

WAG-F-LBG0-00-020 Specification

1. Explanation of part number :

WAG - F - LBG0 - 00 - 020
 (1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material : FPC

(3) Frequency : 1550-1620Mhz , 2400-2500Mhz,5150-5850 Mhz

(4) Coaxial Cable Type : 00

(5) Suffix : 020

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
GBW	1550~162MHz, 2400~2500MHz,5150-5850MHz;

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ±0.15 X.XX = ±0.15

ANGLES = ± HOLEDIA = ±

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WAG-F-LBG0-00-020 Specification

DOCUMENT
T
NO.

ENS000170470

PAGE REV.
P1

2-2. Impedance

50 ohm nominal

2-3 VSWR:

Frequency Band	1550	1620	2400	2500	5150	5850
2-3-1. Typical Value:	≤ 2.2	≤ 2.3	≤ 2.5	≤ 3.0	≤ 3.5	≤ 4.5
2-3-2 Measuring Method	1. A 50Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.					

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = ± 0.15 X.XX = ± 0.15

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY : 张涛 CHECKED BY : 张涛

DESIGNED BY : 吴振江 APPROVED BY : 徐克文

TITLE : WAG-F-LBG0-00-020 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000170470

PAGE	REV.
P1	

2-3-3Picture

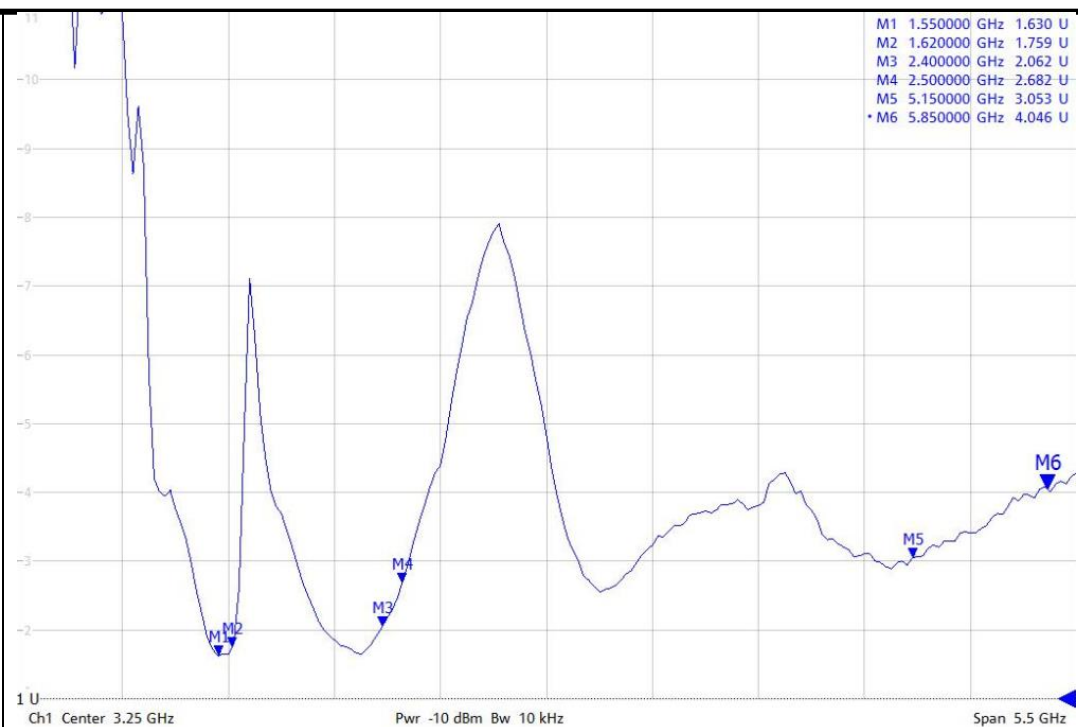

2-4. Gain and Efficiency

2-4.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = ± 0.15 X.XX = ± 0.15

ANGLES = $\pm$

HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文

TITLE : WAG-F-LBG0-00-020 Specification



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
T
NO.

ENS000170470

PAGE REV.

P1

2-4.2 Chamber definition

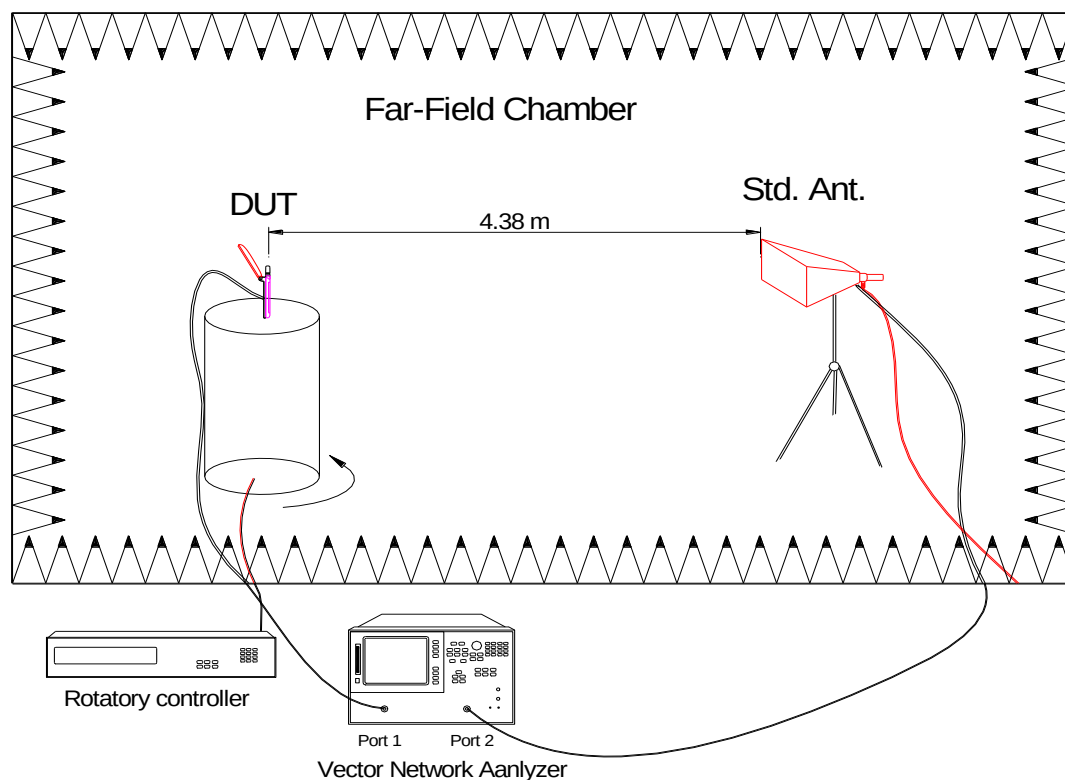

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.		
X = ± X.X = ±0.15 X.XX = ±0.15				
ANGLES = ± HOLEDIA = ±		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
SCALE :	UNIT : mm			
DRAWN BY : 张涛	CHECKED BY : 张涛			
DESIGNED BY : 吴振江	APPROVED BY : 徐克文			
TITLE : WAG-F-LBG0-00-020 Specification		DOCUMENT NO.	ENS000170470	PAGE REV.
				P1

2-4.3 Gain and Efficiency

Frequency (MHz)	Efficiency (dB)	Efficiency (%)
1550	-2.8	52.4
1555	-2.8	52.2
1560	-2.6	54.5
1565	-2.8	52.9
1570	-2.7	53.1
1575	-2.8	52.4
1580	-3.0	50.1
1585	-2.9	51.1
1590	-3.2	48.3
1595	-3.1	49.2
1600	-3.1	49.1
1605	-3.3	46.5
1610	-3.1	48.5
1615	-3.2	47.3
1620	-3.3	46.3
2350	-2.6	54.5
2360	-3.1	49.2
2370	-3.5	44.2
2380	-3.6	43.8
2390	-3.6	43.2
2400	-3.4	45.3
2410	-3.3	46.9
2420	-3.4	46.0
2430	-4.1	39.1
2440	-3.6	43.2
2450	-3.6	43.8
2460	-3.7	42.2
2470	-4.4	36.3
2480	-5.1	30.8
2490	-5.0	31.4
2500	-4.7	34.2
2510	-4.4	36.5
2520	-4.7	34.1
2530	-4.9	32.5
2540	-5.0	31.8
2550	-4.9	32.0

UNLESS OTHER SPECIFIED TOLERANCES ON :

$X = \pm$ $X.X = \pm 0.15$ $X.XX = \pm 0.15$

ANGLES = $\pm$

HOLEDIA = $\pm$



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WAG-F-LBG0-00-020 Specification

DOCUMENT
T
NO.

ENS000170470

PAGE REV.

P1

5000	-6.5	22.6
5050	-6.2	24.1
5100	-5.9	25.4
5150	-6.5	22.6
5200	-5.6	27.8
5250	-5.7	26.9
5300	-5.4	28.9
5350	-5.3	29.2
5400	-5.5	28.3
5450	-5.2	30.1
5500	-5.4	29.0
5550	-5.2	30.3
5600	-6.1	24.6
5650	-5.8	26.2
5700	-6.6	22.0
5750	-6.4	22.7
5800	-6.0	25.1
5850	-6.3	23.7
5900	-6.7	21.3
5950	-7.4	18.3

UNLESS OTHER SPECIFIED TOLERANCES ON :

$X = \pm$ $X.X = \pm 0.15$ $X.XX = \pm 0.15$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY : 张涛 CHECKED BY : 张涛

DESIGNED BY : 吴振江 APPROVED BY : 徐克文

TITLE : WAG-F-LBG0-00-020 Specification



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
T
NO.

ENS000170470


PAGE REV.

P1

WiFi		GPS	
Band	Gain(dBi)	Band	Gain(dBi)
802.11b	1.7	GPS	1.3
802.11g	1.7		
802.11n	1.7		
802.11a	-0.6		

2-4.4 3D Field

1575MHz



UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = ± 0.15 X.XX = ± 0.15

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WAG-F-LBG0-00-020 Specification


DOCUMENT
T
NO.

ENS000170470


PAGE REV.

P1

2450MHz



5500MHz

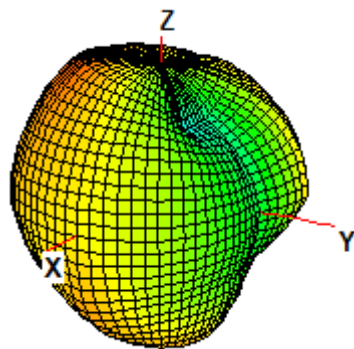

2-4.4 OTA

		SPEC	FS
802.11b	TRP	12	13.5
		12	14.3
		12	13.8
	TIS	-83	-83.2
		-83	-83.5
		-83	-84.0
802.11g	TRP	10	10.7
		10	10.3
		10	10.9

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ±0.15 X.XX = ±0.15

ANGLES = ± HOLEDIA = ±



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WAG-F-LBG0-00-020 Specification

DOCUMENT
T
NO.

ENS000170470

PAGE REV.

P1

		TIS	-70	-71.2
			-70	-71.2
			-70	-71.5
	802.11n	TRP	8	9.7
			8	9.4
			8	9.6
		TIS	-68	-69.6
			-68	-69.3
			-68	-69.8
	802.11a	TRP	9	9.1
			9	9.2
			9	9.2
		TIS	-70	-70.7
			-70	-70.4
			-70	-70.1
	GPS	TIS	-144	-145.7


PS: The antenna needs to be assembled on the whole machine to test the antenna performance.

3. Antenna Dimensions:(unit:mm)

UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X = ± X.X = ±0.15 X.XX = ±0.15 ANGLES = ±			

*13.55±0.15

*17.70±0.15




黑色丝印

露铜区域，镀金

0.10±0.03

手撕位

刀切位



UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ±0.15 X.XX = ±0.15

ANGLES = ±

HOLEDIA = ±

SCALE :

UNIT : mm

DRAWN BY : 张涛

CHECKED BY : 张涛

DESIGNED BY : 吴振江

APPROVED BY : 徐克文

TITLE : WAG-F-LBG0-00-020 Specification



佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
T
NO.

ENS000170470

PAGE REV.

P1