


Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

FCC/IC BT TEST REPORT

PRODUCT	Smart POS system
BRAND	SUNMI
MODEL	T6900
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25T6900P2
IC ID	22621-T6900P2
ISSUE DATE	January 11, 2023
STANDARD(S)	FCC Part15, RSS-247 Issue 2, RSS-Gen Issue 5

Prepared by: Tao Lingyan

Signature



Reviewed by: Yang Fan

Signature



Approved by: Zhang Min

Signature

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	5
2. GENERAL INFORMATION OF THE LABORATORY	7
2.1 TESTING LABORATORY	7
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	7
2.3 PROJECT INFORMATION.....	7
3. GENERAL INFORMATION OF THE CUSTOMER.....	8
3.1 APPLICANT	8
3.2 MANUFACTURER	8
4. GENERAL INFORMATION OF THE PRODUCT.....	9
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	9
4.2 DESCRIPTION FOR AUXILIARY EQUIPMENT (AE)	9
5. TEST CONFIGURATION INFORMATION	11
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	11
5.2 TEST EQUIPMENTS UTILIZED.....	11
5.3 MEASUREMENT UNCERTAINTY	13
6. TEST RESULTS	15
6.1 PEAK OUTPUT POWER-CONDUCTED	15
6.2 FREQUENCY BAND EDGES-CONDUCTED	18
6.3 CONDUCTED EMISSION	21
6.4 RADIATED EMISSION.....	24
6.5 TIME OF OCCUPANCY (DWEIL TIME).....	52
6.6 20DB BANDWIDTH	55
6.7 99% OCCUPIED BANDWIDTH.....	58
6.8 CARRIER FREQUENCY SEPARATION.....	62
6.9 NUMBER OF HOPPING CHANNELS	64
6.10 AC POWERLINE CONDUCTED EMISSION	66
ANNEX A: REVISED HISTORY	71
ANNEX B: ACCREDITATION CERTIFICATE.....	72

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2020
2	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

1.2 Reference Documents

No.	Title	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	2019

1.3 Summary of Test Results

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
20dB Occupied Bandwidth	15.247(a)	RSS-247 5.1	Pass
99% Occupied Bandwidth	15.247(a)	RSS-Gen 6.7	Pass
Band Edges Compliance	15.247 (d)	RSS-247 5.5	Pass
Time Of Occupancy (Dwell Time)	15.247(a)	RSS-247 5.1	Pass
Carrier Frequency Separation	15.247(a)	RSS-247 5.1	Pass
Number Of Hopping Channels	15.247(a)	RSS-247 5.1	Pass
Transmitter Spurious Emission- Conducted	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission- Radiated	15.247,15.209,15.205	RSS-Gen 8.9,8.10	Pass
AC Powerline Conducted Emission	15.207	RSS-Gen 8.8	Pass

Note:

The T6900, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing.

The following configurations were tested for radiation spurious emission:

T6900

Main Supply:Configuration1(fingerprint & scanner&standard)			
Name	Model	Manufacturer	Spec
PCB	STM-5	SHENZHEN SUNTAK MULTILAYER PCB CO LTD	V-0 130℃
LCD	HS55ET10P63B	Huashi Opto-Electronic Co., Ltd.	720X (RGB)(H) X 1440(V) dots TFT Type 3.25mm thickness
Rear camera	HNO0458	Holitech science Technology Co., Ltd.	Sensor:Hi556 1/5" Lens:DULE DL5280 VCM:RuiePF8526-44 F.NO:2.2 FOV:>77° Connection method: BTB
Battery	P2	Guangdong Fenghua New Energy Co.,Ltd.	2480mAh/7.6V
Printer	ATP2XEP6RTWEN A	Xiamen Pinnacle Electrical Co.,Ltd	Thermal dot printing print 4.0-9.5V, 384dot, Dimension 67.3*18.25*30.0mm
Button cell	CR2032	Yichang Power Glory Technology Co.,Ltd.	Nominal Discharge current 0.2mA Nominal Voltage 3V Nominal Capacity 245(mAh)
Adapter	TPA- 23A050200UU01	SHENZHEN TIANYIN ELECTRONICS CO.,LTD.	5V 2A
Secondary Supply:Configuration2(fingerprint & standard)			
Name	Model	Manufacturer	Spec
PCB	HF01	JIANGXI ZHIBOXIN TECHNOLOGY CO LTD	V-0 130℃
LCD	JL-P055H030-05	SICHUAN JINGLONG PHOTOELECTRIC SCIENCE AND TECHNOLOGY CO.,LTD	720X (RGB)(H) X 1440(V) dots TFT Type 3.25mm thickness
Rear camera	VM25C27	Shenzhen Chengxiangtong technology Co.,Ltd.	Sensor: GC05A2 1/5" Lens: Horui TR0517B VCM: Hozel VA26F502 F.NO:2.2 FOV:>77° Connection method: BTB
Battery	P2	DongGuan Veken Battery Co.,Ltd.	2480mAh/7.6V

Printer	LTP02-245-G2	Seiko Instruments Inc.	Thermal line dot printing print 5.5-9.5V, 384dot, Dimension 67.3*18.1*30.0mm
Button cell	CR2032	SHANGHAI LONGYOUNG CORPORATION.	Nominal Discharge current 0.2mA Nominal Voltage 3V Nominal Capacity 220(mAh)
Adapter	UC13US	Jiangsu Chenyang Electron Co.,Ltd.	5V2A
Third Supply:Configuration3(Based on configuration 1) (fingerprint & standard)			
Name	Model	Manufacturer	Spec
PCB			
LCD			
Rear camera			
Battery	P2 Max	Guangdong Fenghua New Energy Co.,Ltd.	3000mAh/7.6V
Printer			
Button cell			
Adapter			
Note: Hardware Version Id Number (HVIN): 1)T6900P2 - 1:Configuration1-fingerprint 2)T6900P2 - 2:Configuration1-scanner 3)T6900P2 - 3:Configuration1-standard 4)T6900P2 - 4:Configuration2-fingerprint 5)T6900P2 - 5:Configuration2-standard			

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 5.3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 6 of this test report.

- All the test data for each data were verified, but only the worst case was reported.
- The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH1 for GFSK, 2-DH1 for $\pi/4$ DQPSK, 3-DH1 for 8DPSK.
- The DC and low frequency voltages' measurement uncertainty is $\pm 2\%$.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	2.9 dBi

Note: The data of 1.4 is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	101kPa

2.3 Project Information

Project Manager	Gao Hongning
Test Date	October 09, 2022 to December 02, 2022

3. General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86-17302160204

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China

4. General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS system
Model	T6900
Date of Receipt	S13aa/S03aa/ S06aa/ S08aa / S16aa: September 26,2022 S21aa : November 3,2022 S26aa: November 23, 2022
EUT ID*	S13aa/S03aa/S06aa/S08aa/S21aa/S26aa/S16aa
SN/IMEI	S13aa: 869325026801226 869325026801234 S03aa: 869325026812009 869325026812017 S06aa: 869325026810920 869325026810938 S08aa: 869325026801002 869325026801010 S26aa: 862318060015875 862318060015883 S16aa: 869325026800780 869325026800798
Supported Radio Technology and Bands	GSM850/GSM900/DCS1800/PCS1900 WCDMA Band I/II/IV/V/VIII LTE Band 1/2/3/4/5/7/17/28/38/41 WLAN 802.11 b/g/n WLAN 802.11 a/n BT4.2 BR/EDR, BLE NFC GPS
Hardware Version	B1691_MAIN_PCB
Software Version	SP6359A-20220922115332
FCC ID	2AH25T6900P2
IC	22621-T6900P2
NOTE: EUT ID is the internal identification code of the laboratory.	

4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
--------	-------------	-------	-----------

AE1	RF Cable	N/A	N/A
NOTE: AE ID is the internal identification code of the laboratory.			

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25℃	0℃	45℃
Working Voltage of EUT	Normal	Minimum	Maximum
	7.6V	7.2V	8.7V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Programmable Power Supply	Keithley 2303	4039070	Starpoint	July 12, 2022	1 Year
2	Vector Signal Generator	SMBV100A	257904	R&S	February 21, 2022	1 Year
3	Temperature box	B-TF-107C	BTF107C-201804107	Boyi	June 30, 2022	1 Year
4	Spectrum Analyzer	FSQ40	200063	R&S	November 02, 2021	1 Year
					October 19, 2022	1 year
5	USB Wideband Power Sensor	U2021XA	MY56410009	Keysight	February 21, 2022	1 Year
6	Simultaneous Sampling DQA	U2531A	TW56183514	Agilent	March 02, 2022	1 Year
7	Vector Signal Generator	SMU200A	104684	R&S	May 10, 2021	1.5 Years
8	Wireless communication comprehensive tester	CMW270	100919	R&S	August 22, 2022	1 Year

9	Eagle Test Software	Eagle V3.3	N/A	ECIT	N/A	N/A
10	Talent Microwave Band Rejection Filter	Filter	191016001	N/A	N/A	N/A

5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	October 17,2022	1Year
					May 10,2021	1.5Years
2	Universal Radio Communication Tester	CMW500	104178	R&S	October 17,2022	1Year
					May 10,2021	1.5Years
3	EMI Test Receiver	ESU40	100307	R&S	February 23, 2022	1 Year
4	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	March 11, 2022	1 Year
5	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	March 9, 2022	2 Years
6	2-Line V-Network	ENV216	101380	R&S	February 21, 2022	1 Year
7	EMI Test Software	EMC32 V9.15.00	N/A	R&S	N/A	N/A

5.2.3 Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB

Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz

5.3 Measurement Uncertainty

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2402MHz-2480MHz	95%	0.544dB
Frequency Band Edges-Conducted	2402MHz-2480MHz	95%	0.544dB
Conducted Emission	9KHz-30MHz	95%	0.89dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
Dwell Time	2402MHz-2480MHz	95%	0.218ms

20dB Bandwidth	2402MHz-2480MHz	95%	62.04Hz
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

6. Test Results

6.1 Peak Output Power-Conducted

6.1.1 Measurement Limit

Standard	Limit (dBm)	EIRP Limit (dBm)
FCC 47 Part 15.247(b)(3)	<30	<36
RSS-247 5.4(d)	<30	<36

6.1.2 Test Condition


Hopping Mode	RBW	VBW	Span	Sweep time
Hopping OFF	3MHz	10MHz	9MHz	Auto

6.1.3 Test Procedure







The measurement is according to ANSI C63.10 clause 7.8.5.


1. The output power of EUT was connected to the spectrum analyzer and CMW 270 by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Measure the conducted output power and record the results it

6.1.4 Test setup

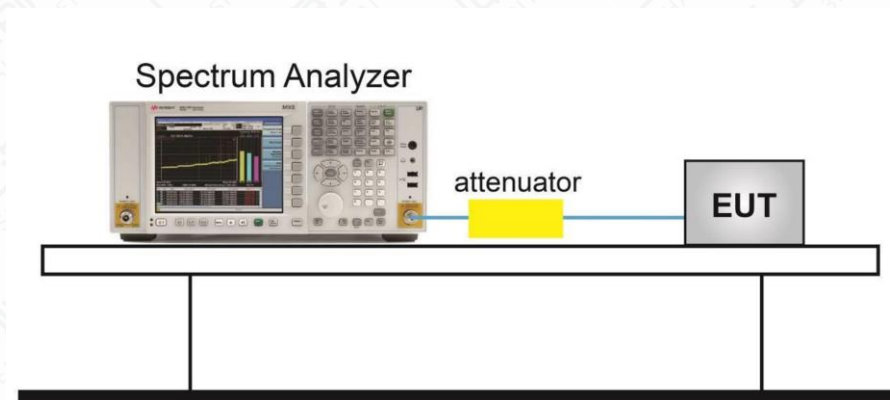

Measurement Results

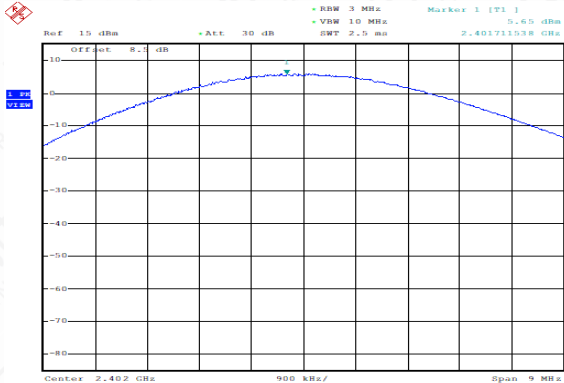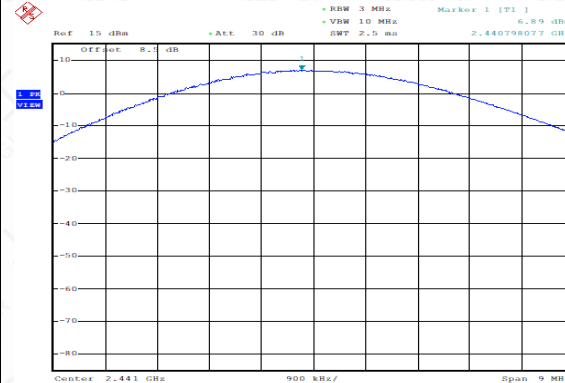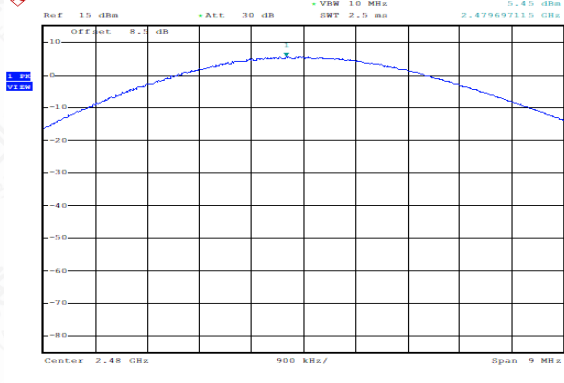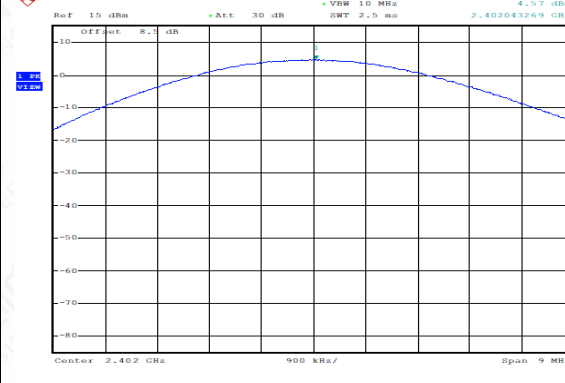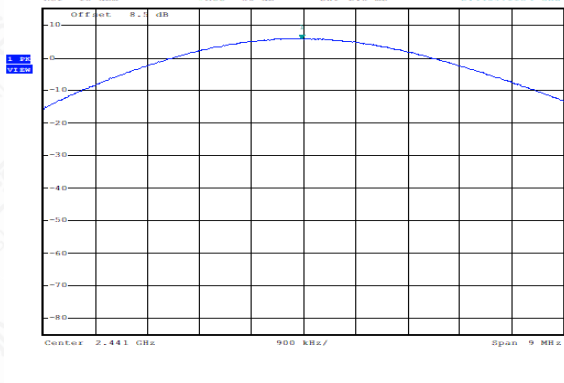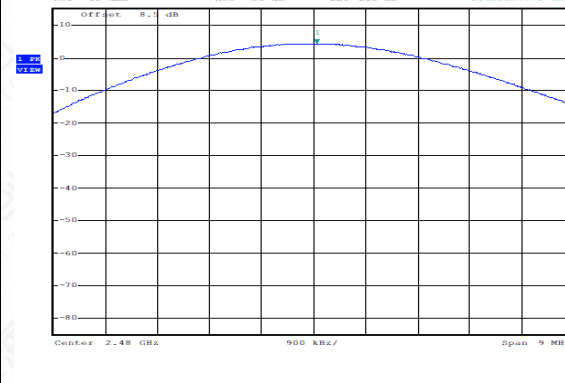Peak Conducted Output Power GFSK, CH0 (dBm)	5.65	Peak Conducted Output Power GFSK, CH39 (dBm)	6.89
 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.65 dBm 2.402731538 GHz Center 2.402 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:14:22		 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.89 dBm 2.440798077 GHz Center 2.441 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:15:06	
Peak Conducted Output Power GFSK, CH78 (dBm)	5.45	Peak Conducted Output Power $\pi/4$ DQPSK, CH0 (dBm)	4.57
 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.45 dBm 2.479697115 GHz Center 2.48 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:15:59		 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 4.57 dBm 2.402043269 GHz Center 2.402 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:16:29	
Peak Conducted Output Power $\pi/4$ DQPSK, CH39 (dBm)	5.74	Peak Conducted Output Power $\pi/4$ DQPSK, CH78 (dBm)	4.22
 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.74 dBm 2.440971154 GHz Center 2.441 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:16:49		 Ref 15 dBm Att 30 dB RBW 3 MHz VSW 10 MHz SWT 2.5 ms Marker 1 [T1] 4.22 dBm 2.480057692 GHz Center 2.48 GHz 900 kHz/ Span 9 MHz Date: 10.OCT.2022 22:17:08	

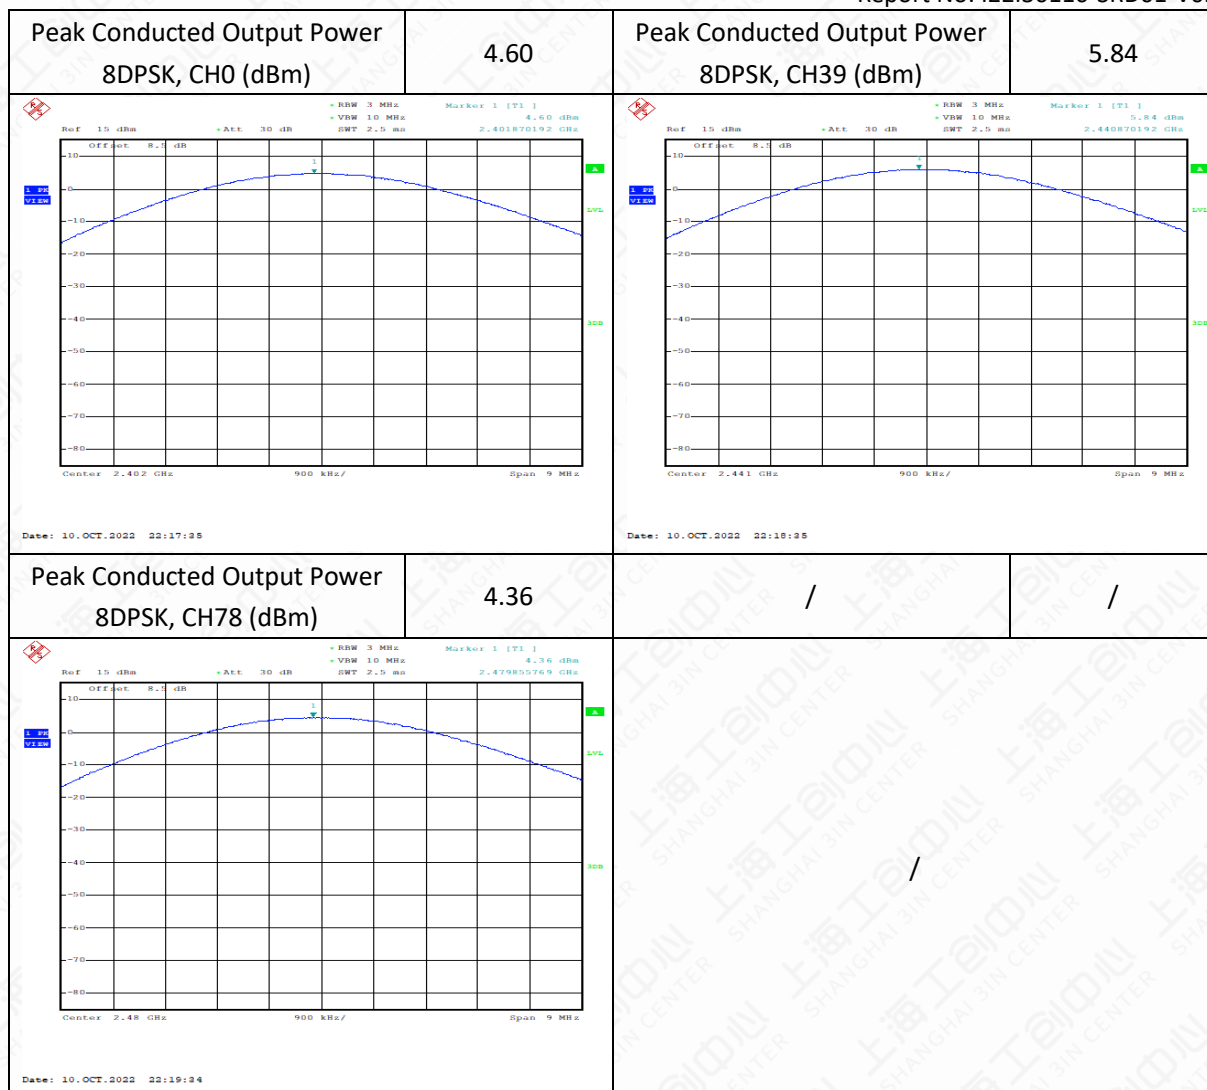

Modulation type	Channel	EIRP
GFSK DH5	Ch 0	8.55
	Ch 19	9.79
	Ch 39	8.35
$\pi/4$ DQPSK	Ch 0	7.47
	Ch 19	8.64
	Ch 39	7.12
8DPSK	Ch 0	7.5
	Ch 19	8.74
	Ch 39	7.26

Note: Test of default power settings for EUT devices.

Using the MTK platform software set by default by the customer.

6.2 Frequency Band Edges-Conducted

6.2.1 Measurement Limit


Standard	Limit(dBc)
FCC 47 CFR Part 15.247(d)	>20
RSS-247 5.5	>20

6.2.2 Test procedures


The measurement is according to ANSI C63.10 clause 7.8.6.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.Allow sweep to continue until the trace stabilizes.


6.2.3 Test setup

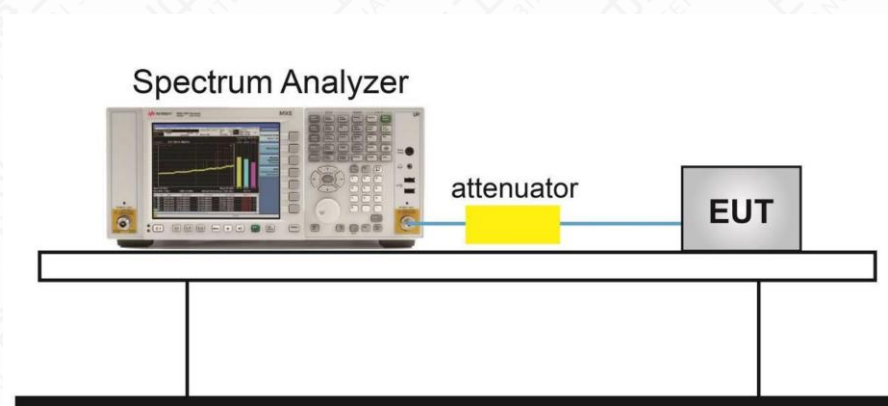

Measurement Result

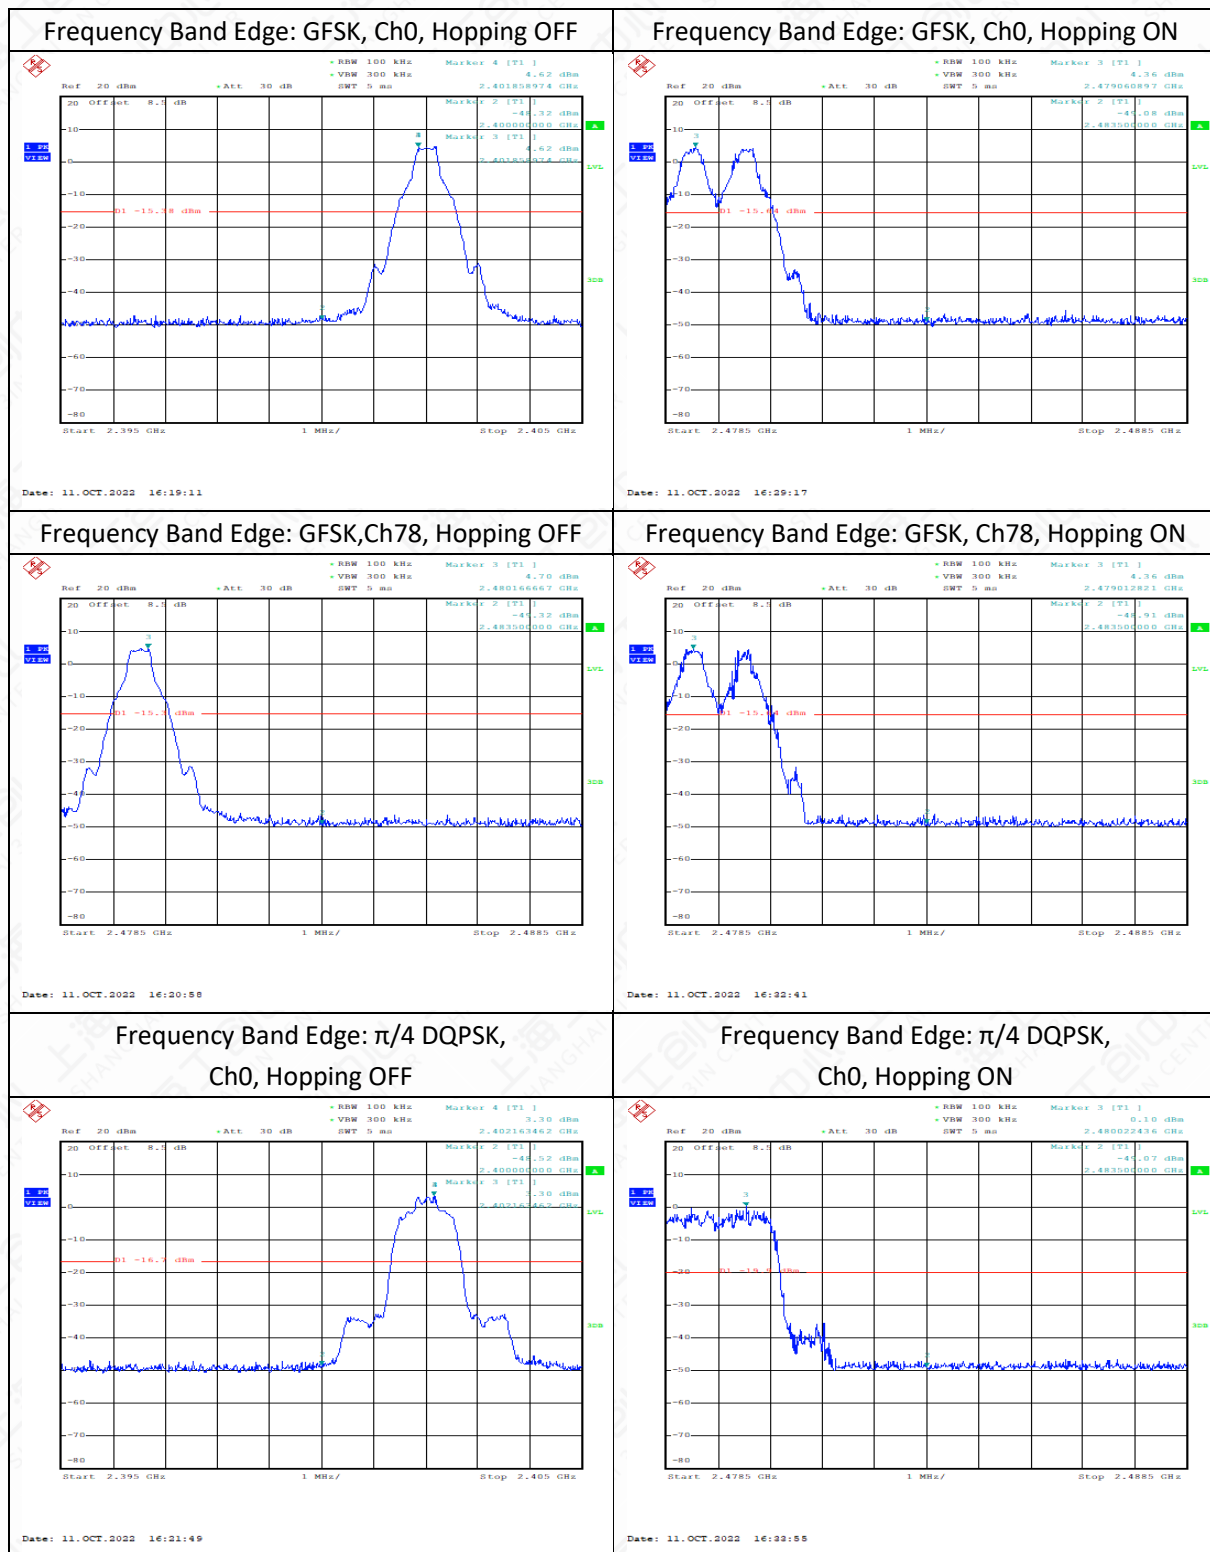


Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping OFF

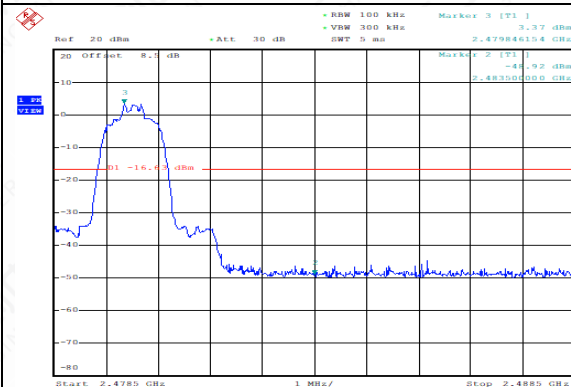


Date: 11.OCT.2022 16:22:51

Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping ON

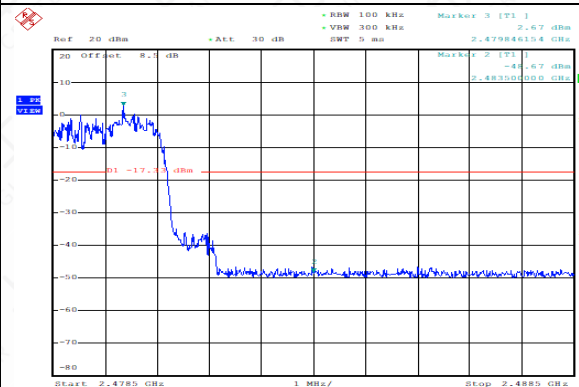


Date: 11.OCT.2022 16:26:49

Frequency Band Edge: 8DPSK, Ch0, Hopping OFF

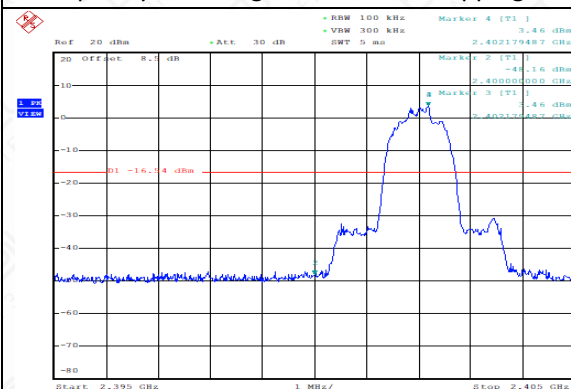


Date: 11.OCT.2022 16:24:55

Frequency Band Edge: 8DPSK, Ch0, Hopping ON

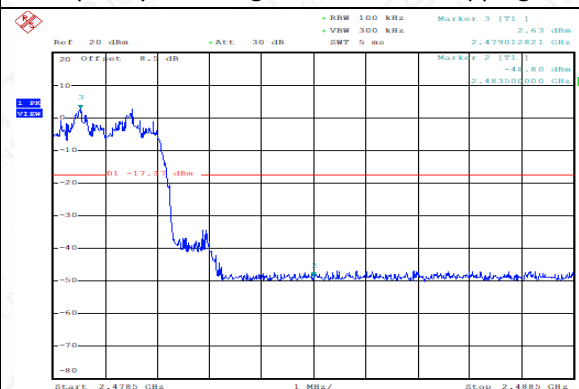


Date: 11.OCT.2022 16:27:56

Frequency Band Edge: 8DPSK,
Ch78, Hopping OFF

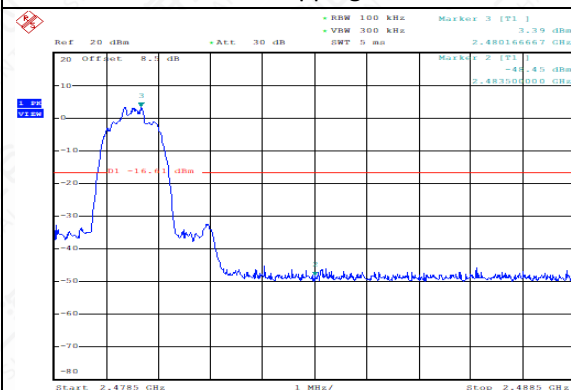

Date: 11.OCT.2022 16:26:34

Frequency Band Edge: 8DPSK,
Ch78, Hopping ON

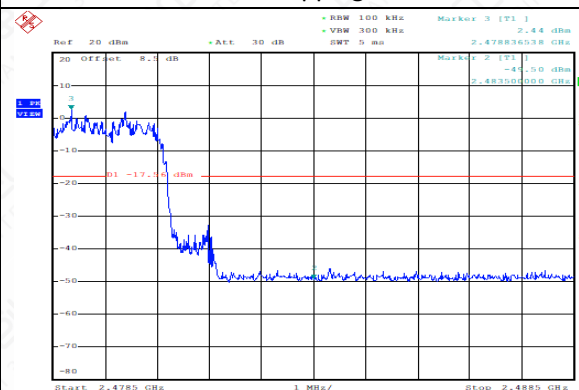

Date: 11.OCT.2022 16:40:05

6.3 Conducted Emission

6.3.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100KHz
RSS-247 5.5	20dB below peak output power in 100KHz

6.3.2 Test procedures


The measurement is according to ANSI C63.10 clause 7.8.8.


1. Connect the EUT to spectrum analyzer.
2. Set RBW=100kHz, VBW=300kHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold

6.3.3 Test Setup

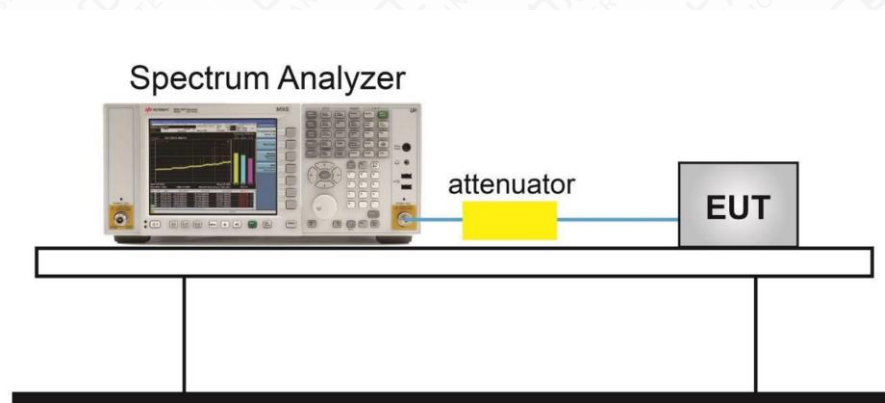

Measurement Results

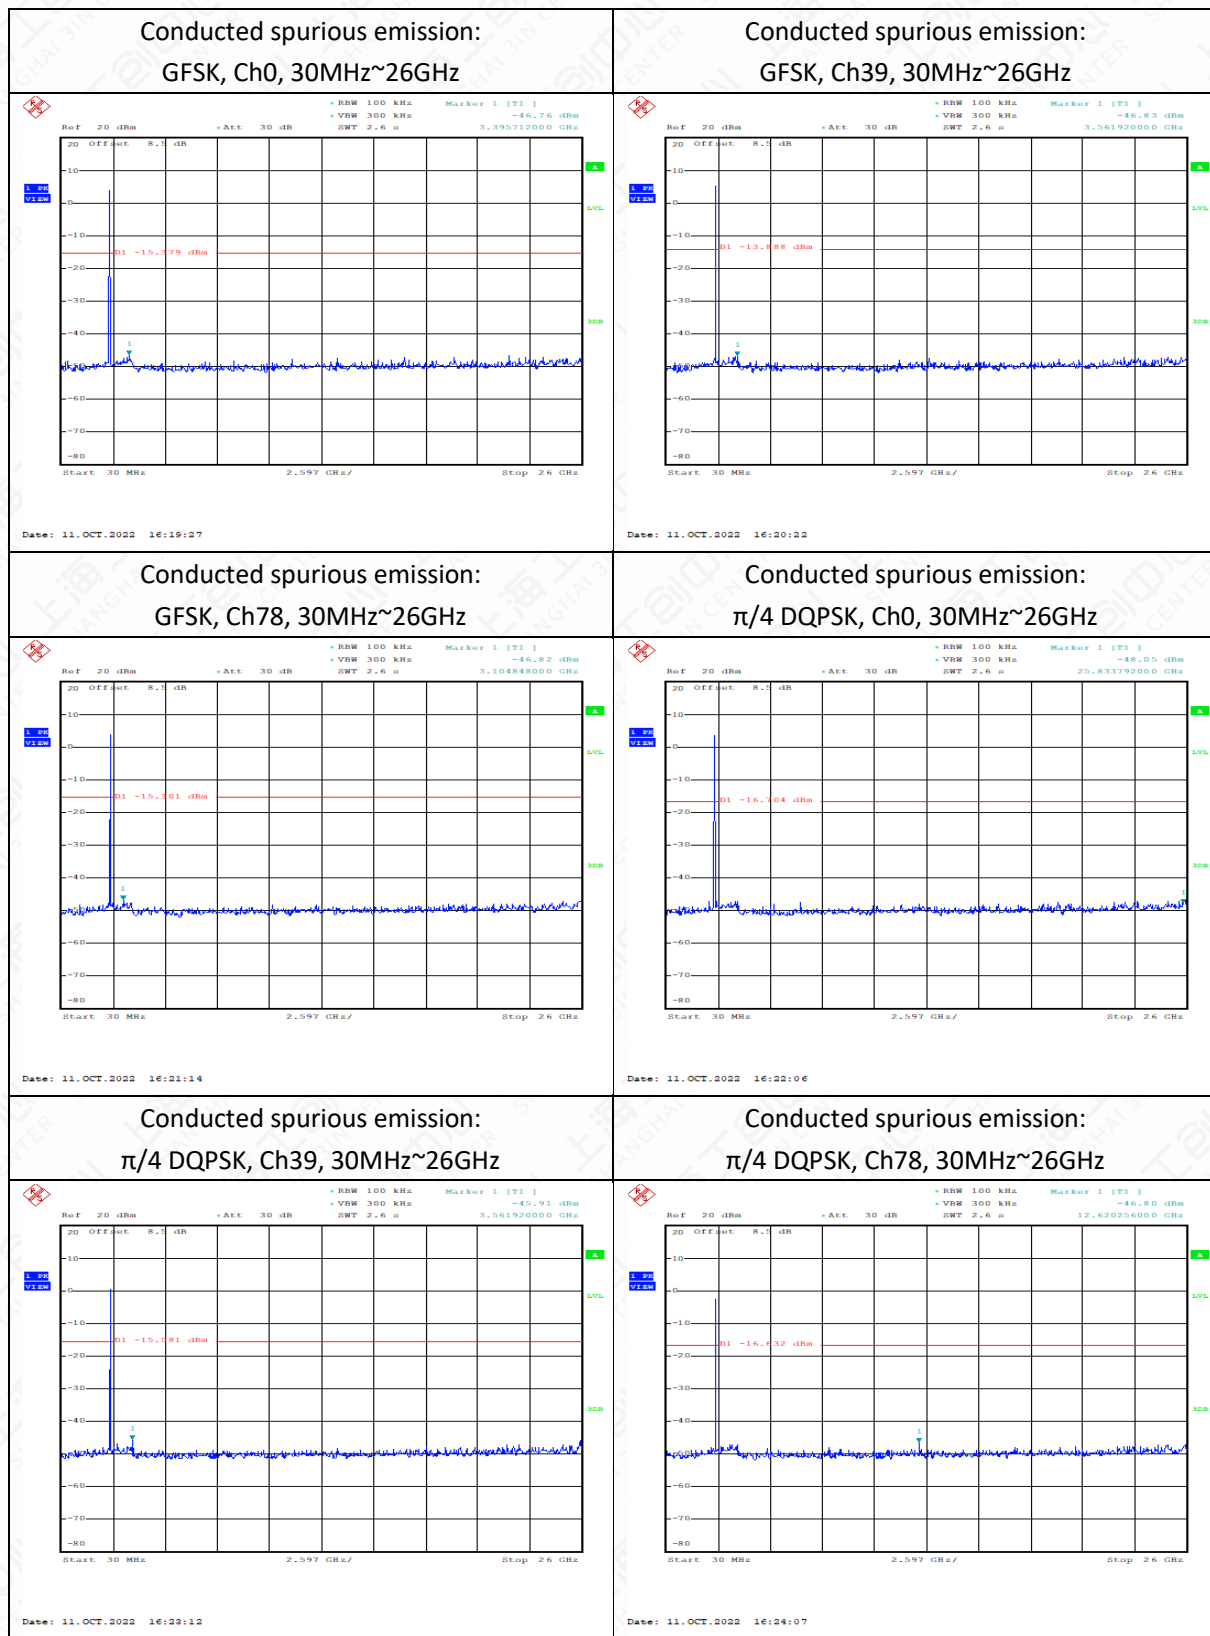

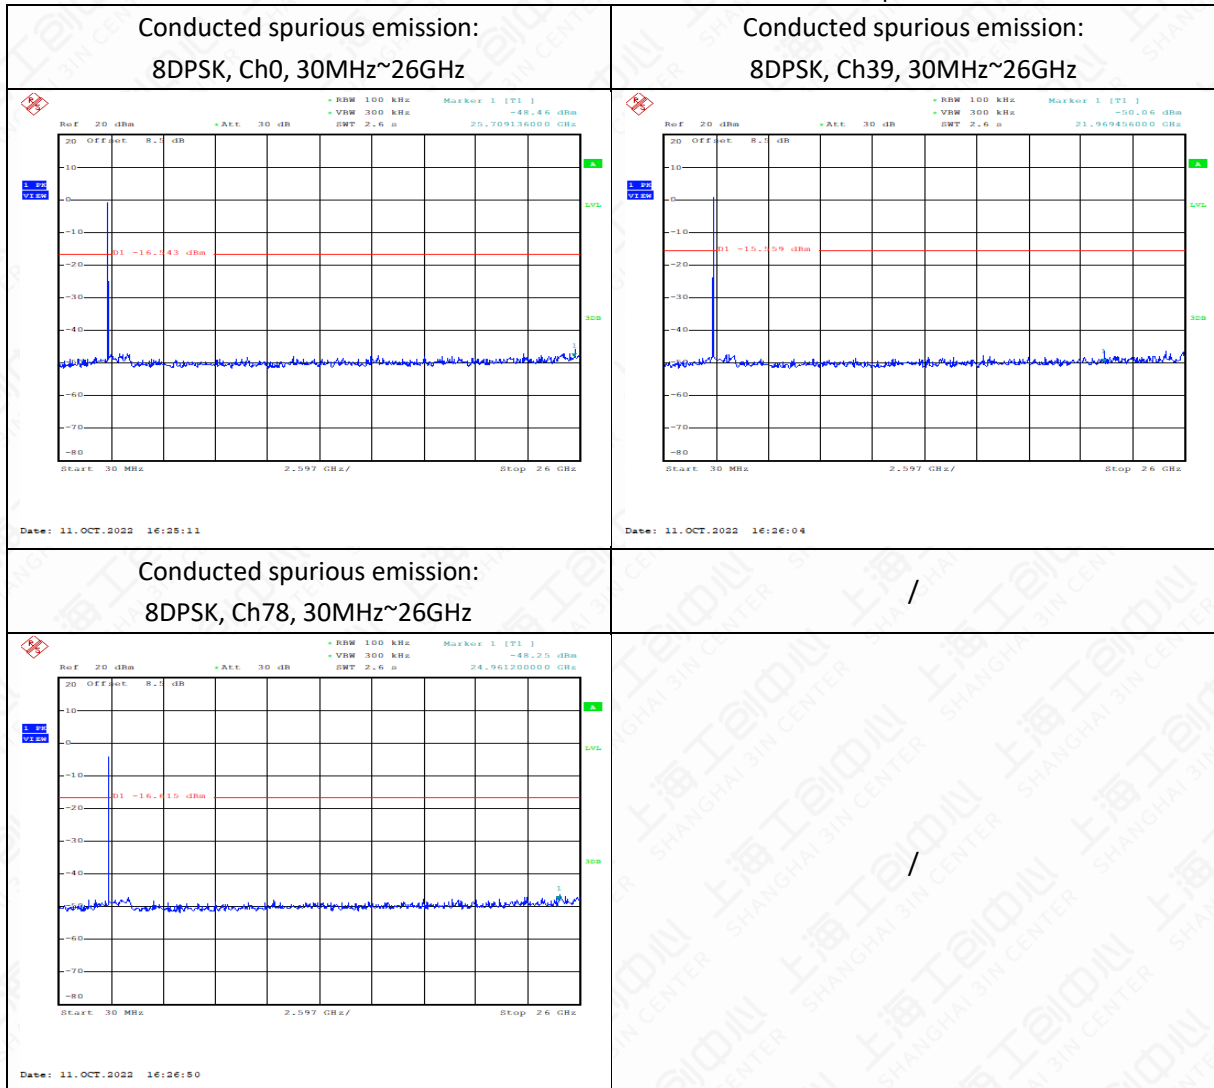

Note: 1. The out-of- limit signal in the picture is the main frequency signal.

2. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.

6.4 Radiated Emission

6.4.1 Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power
RSS-Gen 8.9,8.10	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band

Frequency of emission (MHz)	Field strength (mV/m)	Field strength (dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.


The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40


18000~26500	1MHz/3MHz	20
-------------	-----------	----

6.4.3 Test Setup

Below 1GHz Test Setup

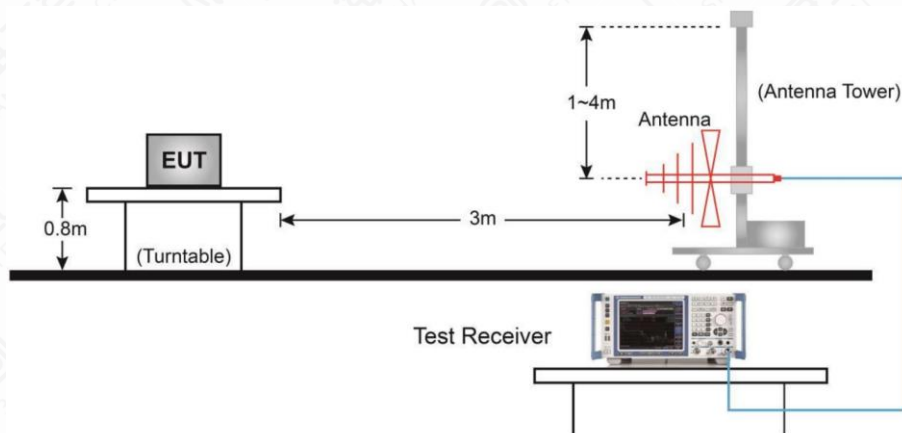

Above 1GHz Test Setup

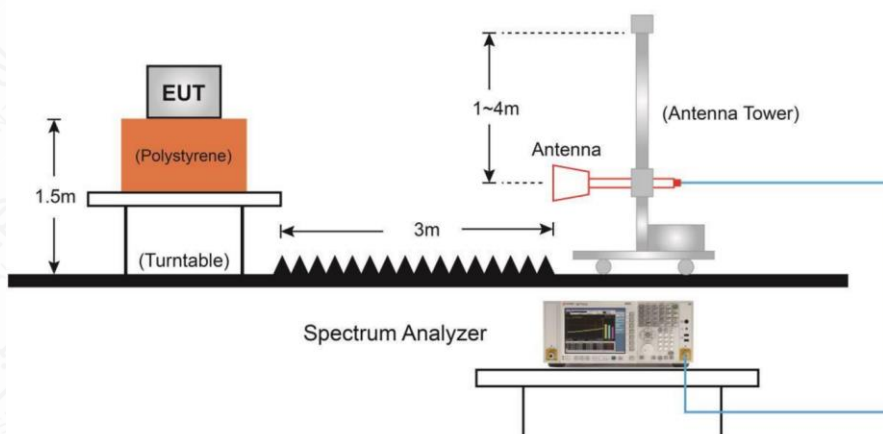

Measurement Results

A “reference path loss” is established and AR_{pi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$AR_{pi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$


$\text{Result} = \text{PMea} + AR_{pi}$

The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.


Standard version

Main Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

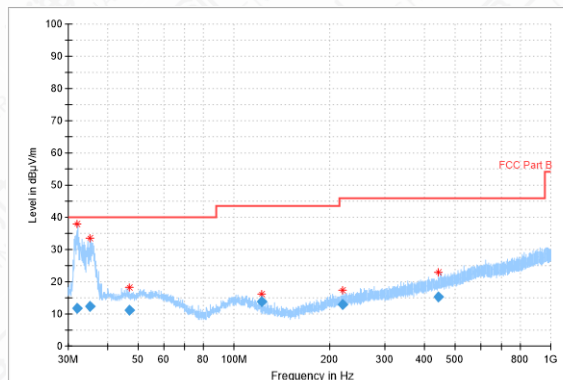


Radiated emission: GFSK, Ch0, 1GHz~3GHz

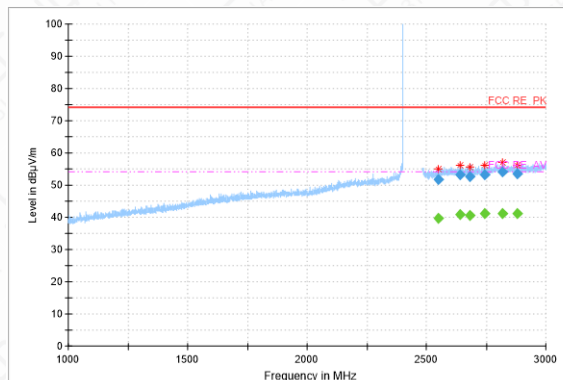


Radiated emission: GFSK, Ch0, 3GHz~18GHz

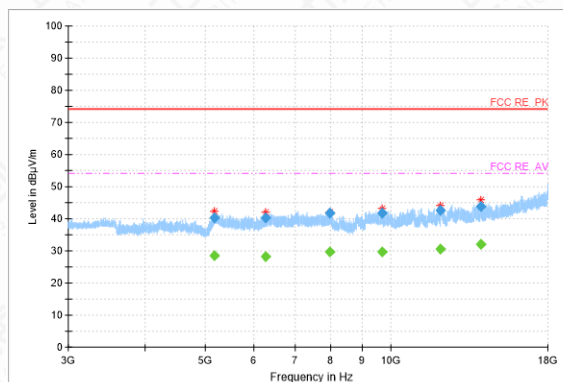


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

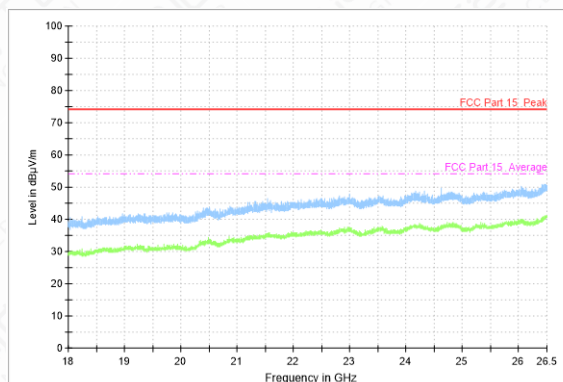


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

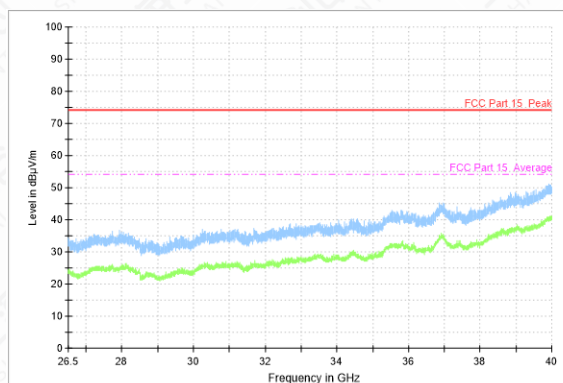


Radiated emission: GFSK, Ch78, 30MHz~1GHz

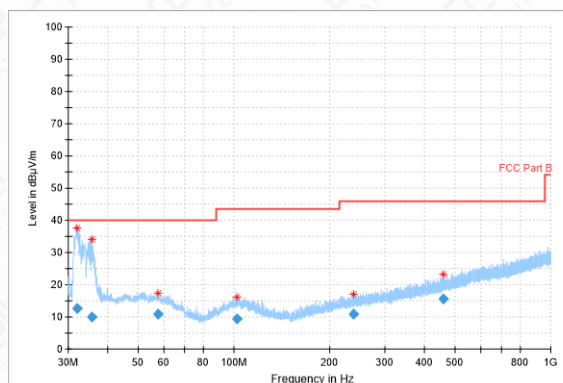


Radiated emission: GFSK, Ch78, 1GHz~3GHz

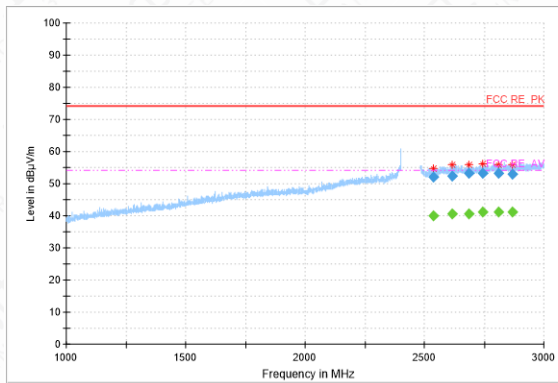


Radiated emission: GFSK, Ch78, 3GHz~18GHz

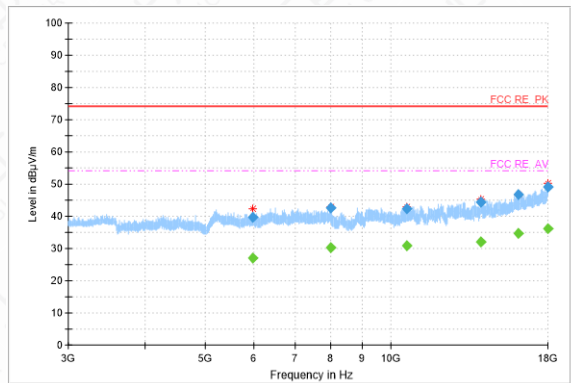


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

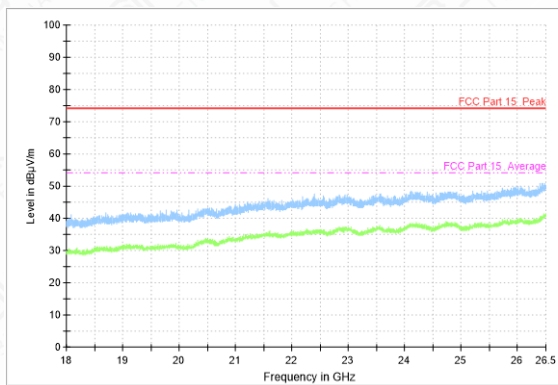


Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

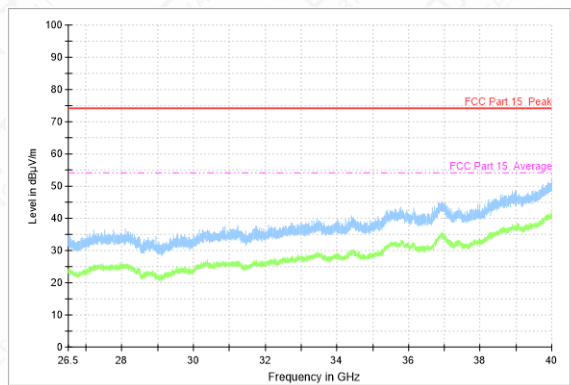

Bandedge (Low): GFSK, low channel

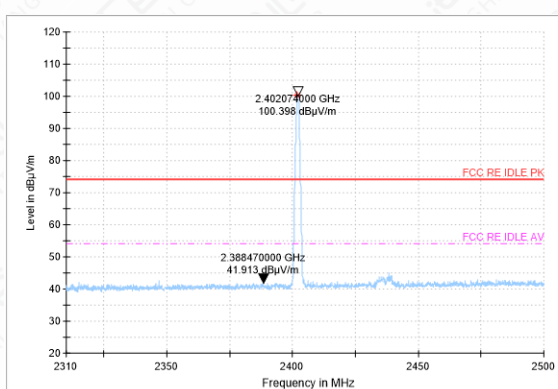

Bandedge (High): GFSK, high channel

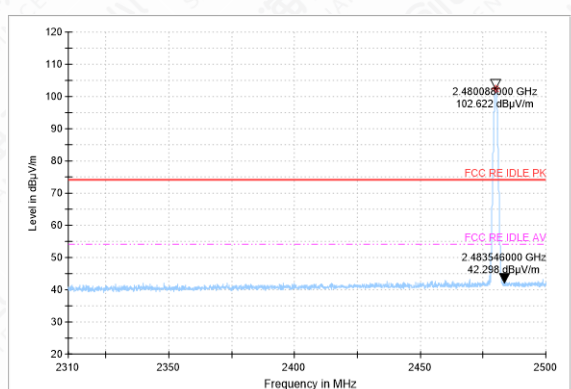

Note: The out-of- limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.1	11.63	-14.3	25.93	V
35.2	12.44	-14	26.44	V
46.8	11.06	-12.2	23.26	H
122.7	13.75	-15.3	29.05	V
220.9	12.99	-12.5	25.49	V

440.8	15.35	-7.7	23.05	H
-------	-------	------	-------	---

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2550.6	51.64	15.1	36.54	V
2640.0	53.18	15.8	37.38	V
2683.3	52.7	15.9	36.8	V
2743.7	53.27	16.2	37.07	H
2816.2	54	16.6	37.4	V
2881.8	53.65	16.7	36.95	H

GFSK Ch0 1GHz-3GHz (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2816.2	41.23	16.6	24.63	V

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5173.0	40.33	-1.1	41.43	H
6267.9	40.39	-2.6	42.99	H
7958.7	41.82	-1.1	42.92	H
9694.3	41.67	-0.6	42.27	V
12056.0	42.71	2	40.71	V
14007.0	43.88	4.7	39.18	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.1	12.59	-14.3	26.89	V
35.5	10.14	-13.9	24.04	V
57.7	10.86	-12.2	23.06	H
102.2	9.39	-13.3	22.69	V
237.8	10.85	-12.5	23.35	H
456.9	15.62	-7	22.62	V

GFSK Ch78 1GHz-3GHz


Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2538.3	52.14	14.9	37.24	H
2615.0	52.33	15.6	36.73	H
2683.9	53.2	15.9	37.3	V
2744.3	53.3	16.2	37.1	V
2810.7	53.26	16.6	36.66	V
2869.5	52.84	16.7	36.14	V

GFSK Ch78 3GHz-18GHz


Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5988.1	39.68	-4	43.68	V
8000.9	42.63	-1	43.63	H
10635.8	42.49	0.7	41.79	H
14005.5	44.35	4.7	39.65	H
16115.5	46.82	7.6	39.22	H
17997.0	49.08	12.3	36.78	V

Secondary Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

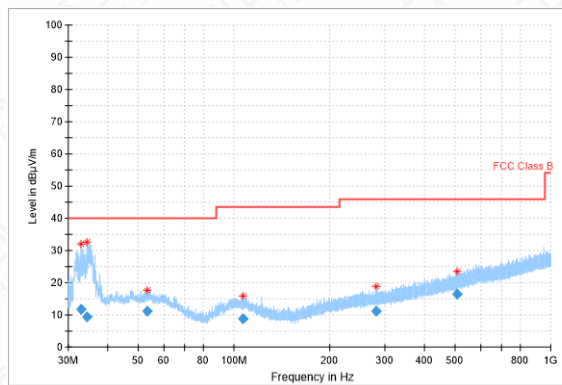


Radiated emission: GFSK, Ch0, 1GHz~3GHz

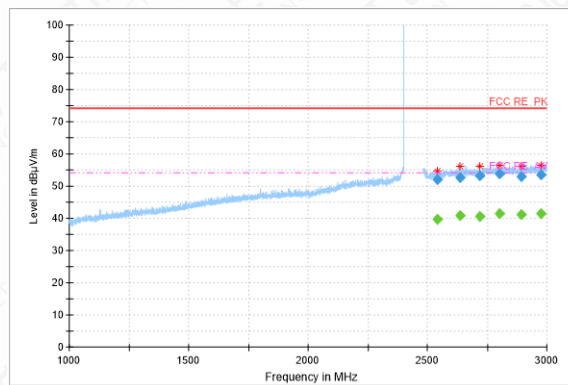


Radiated emission: GFSK, Ch0, 3GHz~18GHz

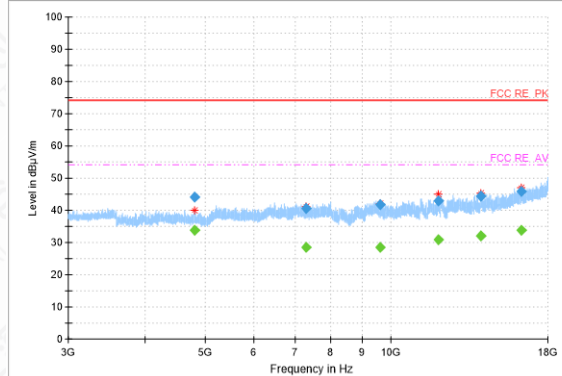


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

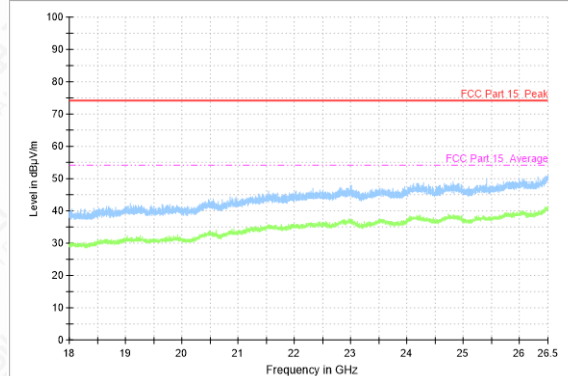


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

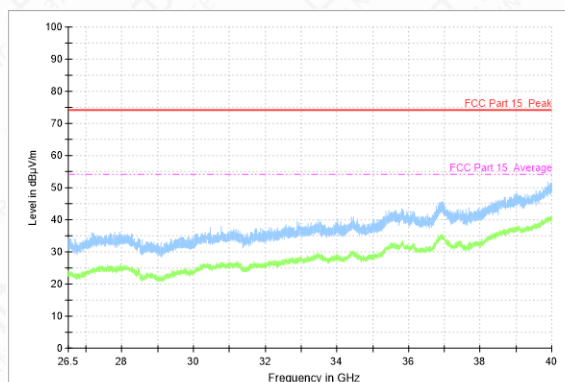


Radiated emission: GFSK, Ch78, 30MHz~1GHz

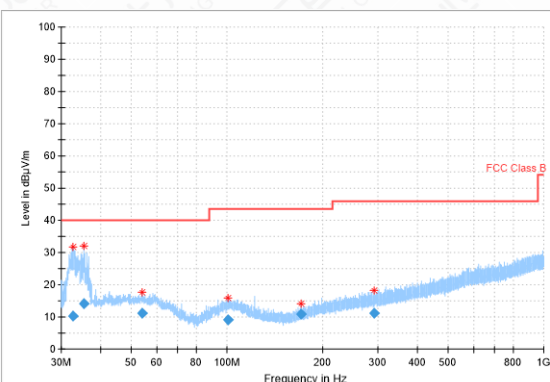


Radiated emission: GFSK, Ch78, 1GHz~3GHz

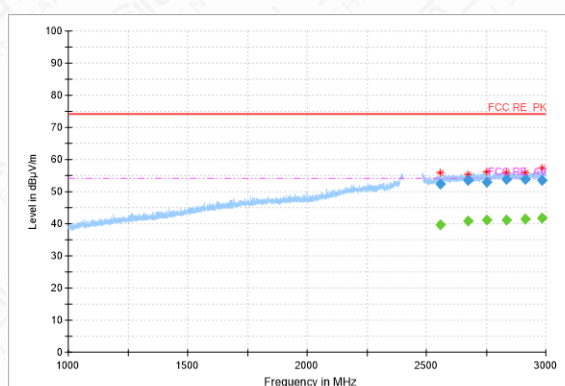


Radiated emission: GFSK, Ch78, 3GHz~18GHz

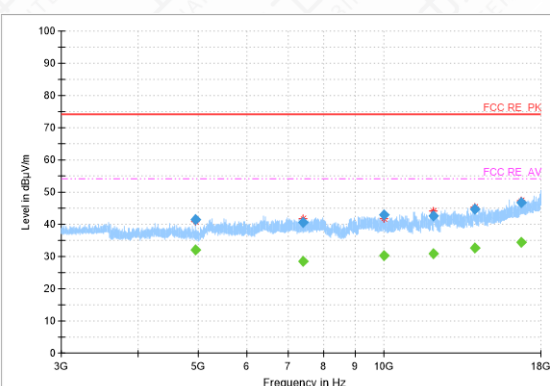


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

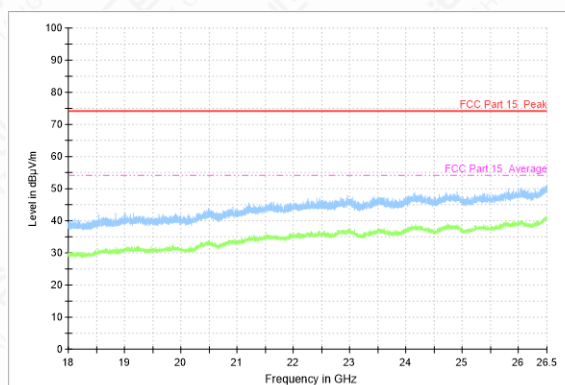

Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

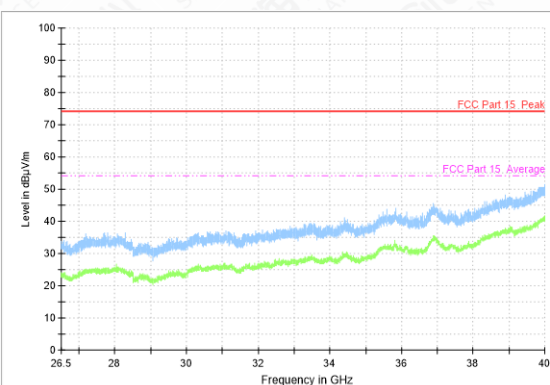

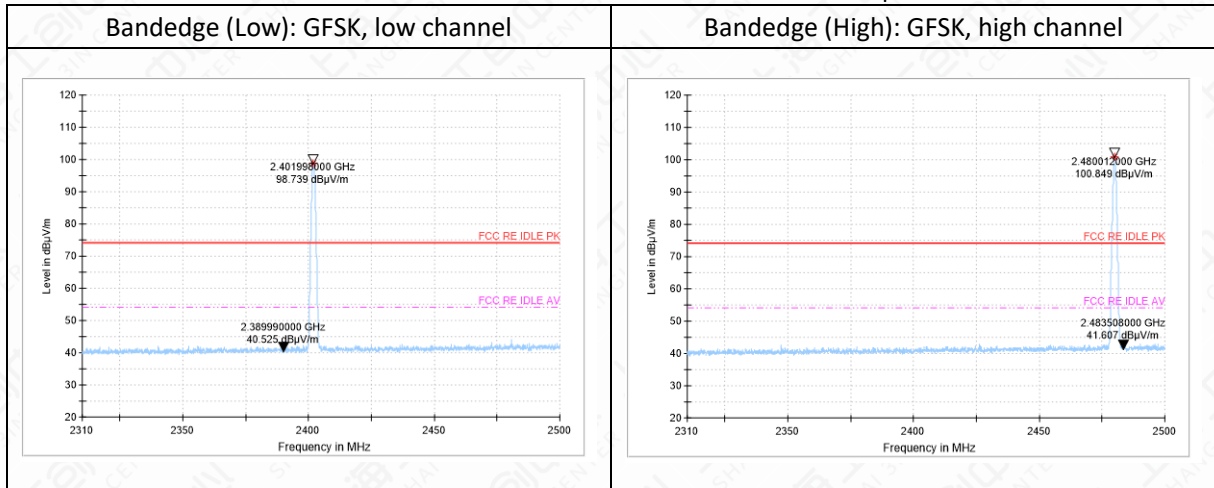

Note: The out-of- limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.9	11.82	-14.3	26.12	V
34.5	9.41	-14.2	23.61	V
53.3	11.14	-12.1	23.24	V
106.9	8.86	-13.3	22.16	V
281.3	11.16	-11.4	22.56	H
507.3	16.5	-6.4	22.9	H

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2540.3	52.03	14.9	37.13	V
2636.9	52.78	15.8	36.98	V
2717.9	53.21	16	37.21	H
2802.5	53.91	16.6	37.31	V
2892.5	52.92	16.7	36.22	H
2974.4	53.51	17.1	36.41	V

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4803.7	44.19	-4.9	49.09	V
7284.6	40.52	-2.2	42.72	H
9627.2	41.85	-0.7	42.55	H
11938.3	42.94	2	40.94	H
14001.1	44.53	4.7	39.83	V
16301.2	46.02	7.9	38.12	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.7	10.38	-14.3	24.68	V
35.4	14.25	-14	28.25	V
54.1	11.29	-12.1	23.39	V
100.6	9.01	-13.2	22.21	V
171.8	10.74	-15.5	26.24	H
291.0	11.23	-11.2	22.43	H

GFSK Ch78 1GHz-3GHz


Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2556.2	52.32	15.2	37.12	H
2673.8	53.59	15.9	37.69	V
2750.1	52.85	16.2	36.65	V
2834.9	53.68	16.6	37.08	H
2913.4	53.69	16.8	36.89	H
2981.7	53.54	17.2	36.34	H

GFSK Ch78 3GHz-18GHz


Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4960.1	41.57	-4.2	45.77	V
7408.4	40.55	-2.3	42.85	V
10029.4	42.82	-0.5	43.32	H
12061.9	42.6	2	40.6	H
14045.7	44.56	4.7	39.86	H
16710.0	46.67	8.6	38.07	V

Third Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

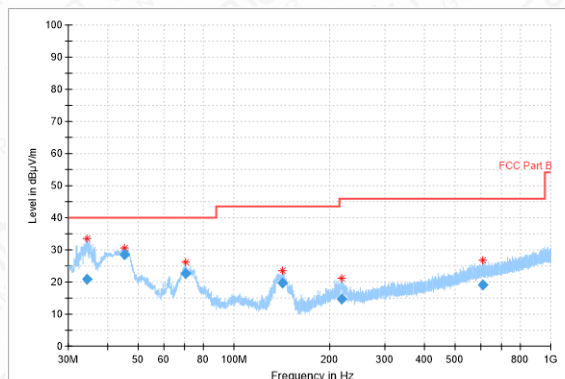


Radiated emission: GFSK, Ch0, 1GHz~3GHz

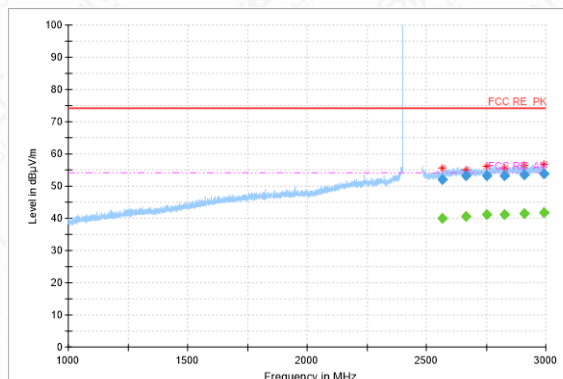


Radiated emission: GFSK, Ch0, 3GHz~18GHz

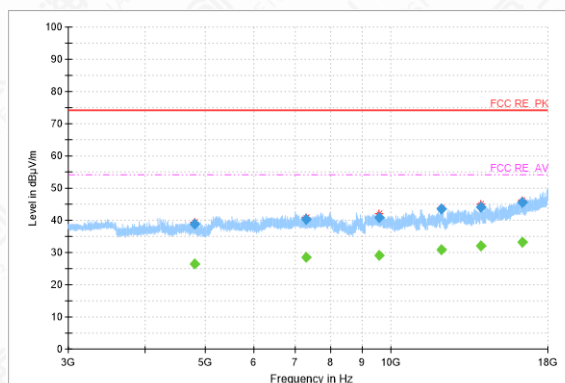


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

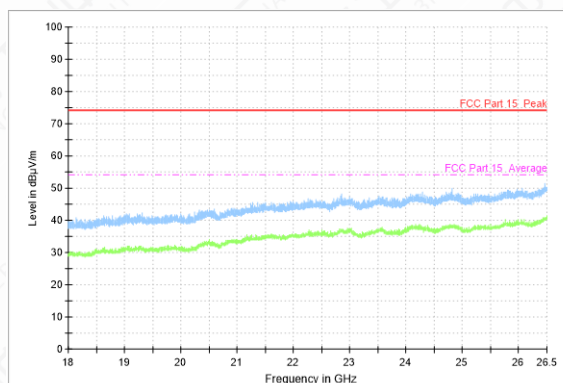


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

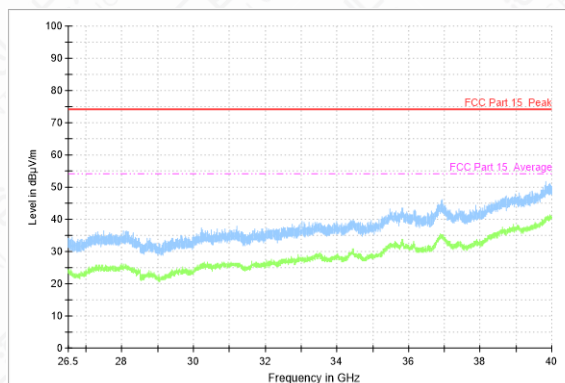


Radiated emission: GFSK, Ch78, 30MHz~1GHz

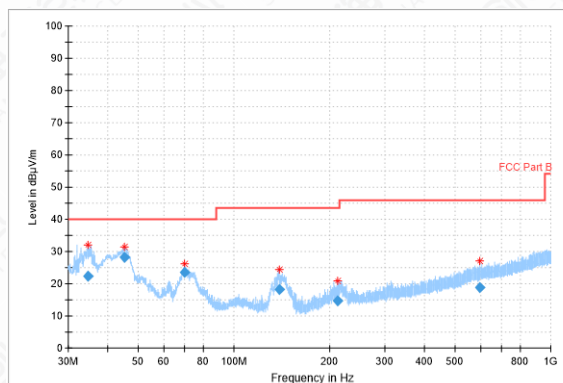


Radiated emission: GFSK, Ch78, 1GHz~3GHz

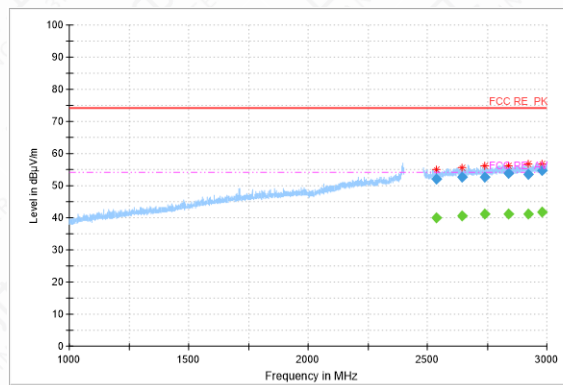


Radiated emission: GFSK, Ch78, 3GHz~18GHz

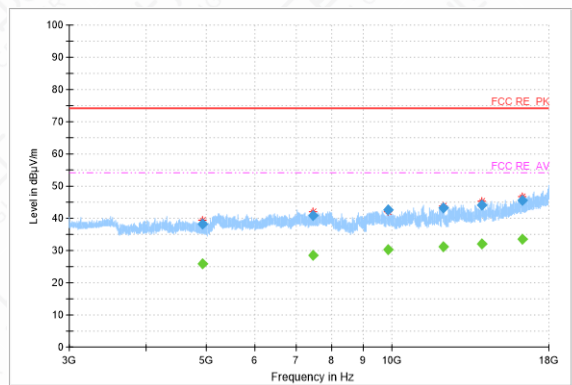


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

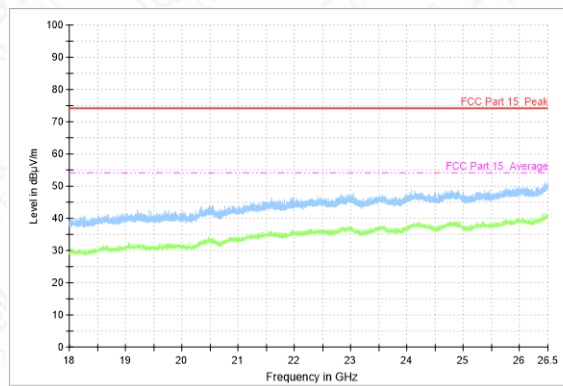


Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

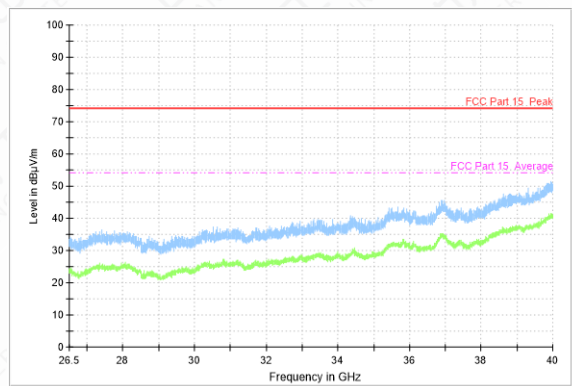

Bandedge (Low): GFSK, low channel

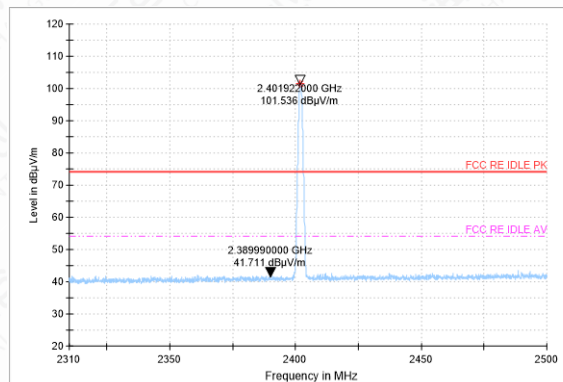

Bandedge (High): GFSK, high channel

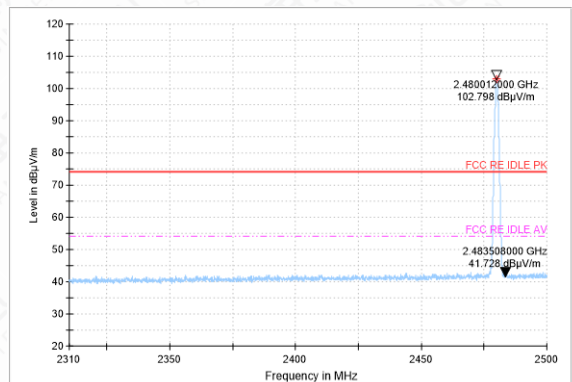

Note: The out-of-limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.3	20.99	-14.1	35.09	V
45.2	28.52	-12.3	40.82	V
70.4	22.7	-15.8	38.5	V
142.3	19.65	-17.1	36.75	H
218.1	14.62	-12.7	27.32	V

608.7	19.1	-3.1	22.2	H
-------	------	------	------	---

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2565.5	52.06	15.2	36.86	H
2667.1	53.23	15.9	37.33	V
2751.1	53.29	16.2	37.09	H
2828.0	53.15	16.6	36.55	V
2910.4	53.42	16.8	36.62	V
2992.6	53.85	17.3	36.55	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4817.9	38.91	-4.9	43.81	H
7292.5	40.34	-2.2	42.54	H
9595.0	40.98	-0.7	41.68	H
12083.9	43.63	1.9	41.73	H
14001.0	43.98	4.7	39.28	H
16333.4	45.51	8	37.51	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.5	22.31	-14.1	36.41	V
45.0	28.11	-12.4	40.51	V
70.0	23.42	-15.6	39.02	V
139.6	18.33	-17	35.33	H
212.5	14.6	-13.1	27.7	V
595.7	18.77	-3.7	22.47	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2536.7	52.15	14.8	37.35	V
2642.8	52.57	15.8	36.77	V
2738.4	52.79	16.1	36.69	H
2837.3	53.76	16.6	37.16	V
2922.1	53.64	16.8	36.84	H
2979.1	54.66	17.1	37.56	V

GFSK Ch78 1GHz-3GHz (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2979.1	41.63	17.1	24.53	V


GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4929.2	38.12	-4.5	42.62	H
7459.6	40.82	-2.4	43.22	H
9868.5	42.7	-0.4	43.1	H
12125.9	43.13	2	41.13	H
14005.6	44.24	4.7	39.54	H
16302.3	45.66	7.9	37.76	H


Scan code version

Main Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

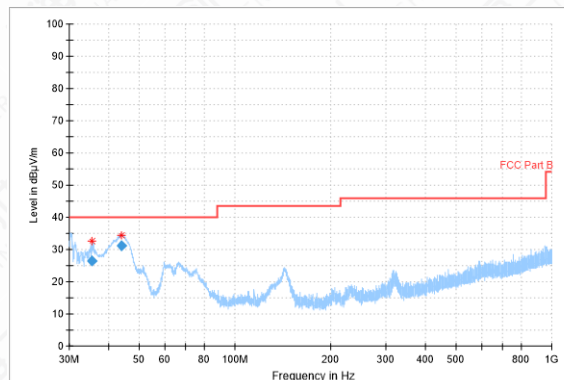


Radiated emission: GFSK, Ch0, 1GHz~3GHz

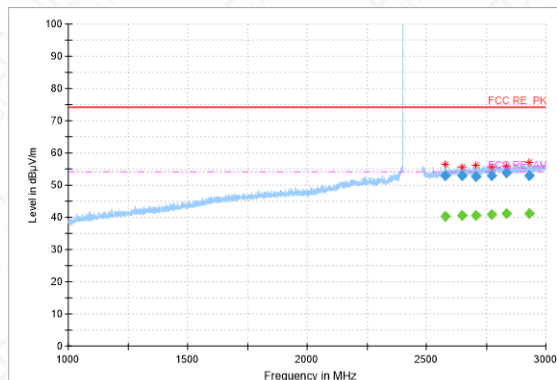


Radiated emission: GFSK, Ch0, 3GHz~18GHz

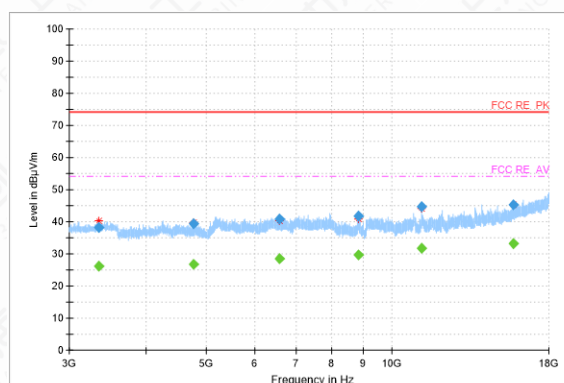


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

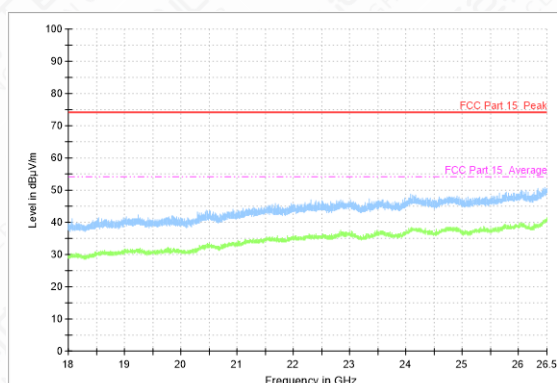


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

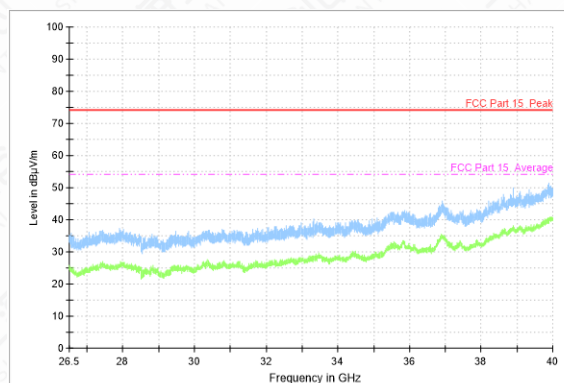


Radiated emission: GFSK, Ch78, 30MHz~1GHz

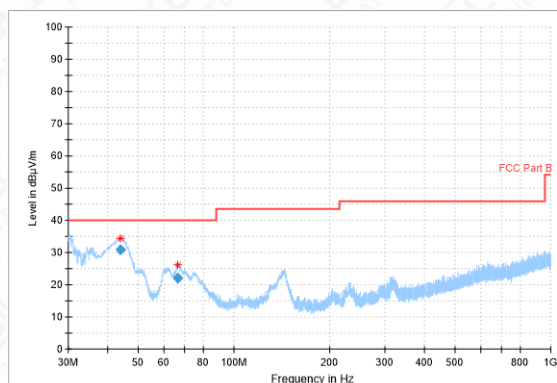


Radiated emission: GFSK, Ch78, 1GHz~3GHz

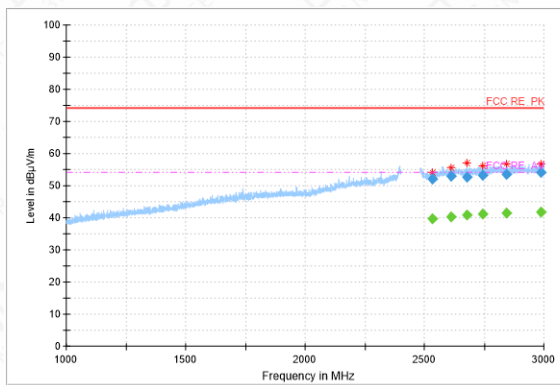


Radiated emission: GFSK, Ch78, 3GHz~18GHz

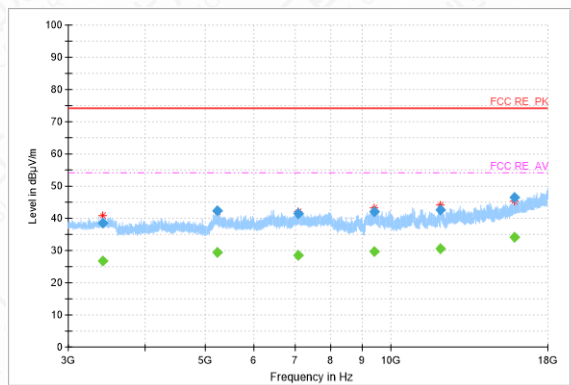


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

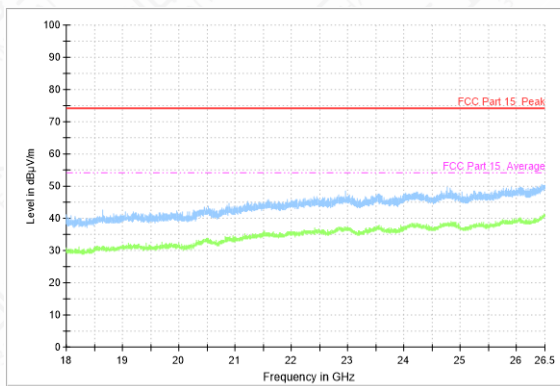


Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

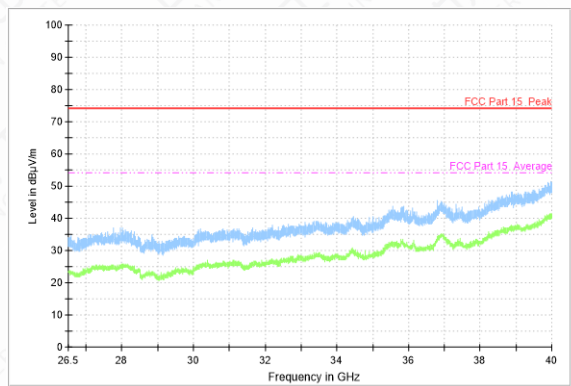

Bandedge (Low): GFSK, low channel

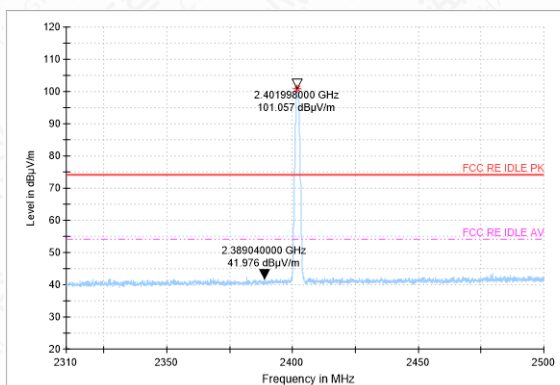

Bandedge (High): GFSK, high channel

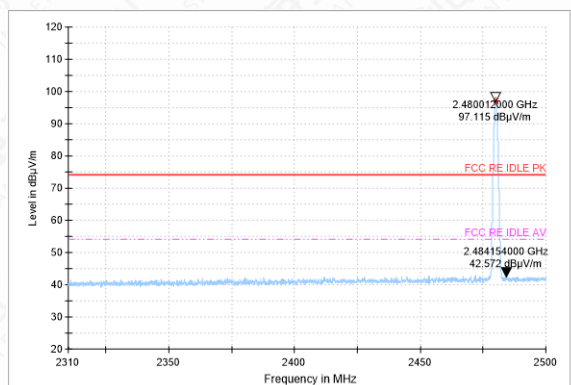

Note: The out-of-limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
35.5	26.55	-13.9	40.45	V
43.8	31.31	-12.5	43.81	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2579.6	52.83	15.3	37.53	V

2646.8	52.99	15.9	37.09	V
2706.8	52.57	15.9	36.67	V
2772.7	52.99	16.4	36.59	H
2834.9	53.79	16.6	37.19	V
2930.9	52.94	16.8	36.14	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
3352.6	38.36	-7.1	45.46	H
4779.6	39.5	-5.1	44.6	H
6571.1	40.88	-2.5	43.38	H
8828.0	41.87	-1.4	43.27	V
11201.9	44.7	1.7	43	H
15748.5	45.42	7	38.42	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
43.7	30.95	-12.5	43.45	V
66.6	21.92	-14.6	36.52	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2533.4	51.96	14.8	37.16	H
2611.2	52.91	15.6	37.31	V
2677.4	52.65	15.9	36.75	V
2743.9	53.13	16.2	36.93	V
2844.9	53.62	16.6	37.02	V
2987.1	54.04	17.2	36.84	V

GFSK Ch78 1GHz-3GHz (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2987.1	41.81	17.2	24.61	V


GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
3411.9	38.45	-6.7	45.15	V
5235.3	42.5	-1.4	43.9	V
7087.9	41.39	-2.2	43.59	H
9403.1	42.17	-0.1	42.27	H
12055.0	42.68	2	40.68	H
15907.1	46.58	7.7	38.88	V


Fingerprint version

Main Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

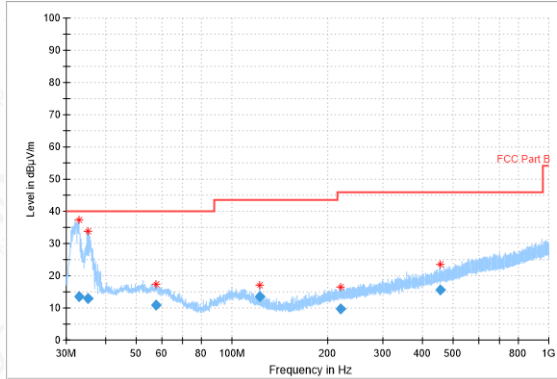


Radiated emission: GFSK, Ch0, 1GHz~3GHz

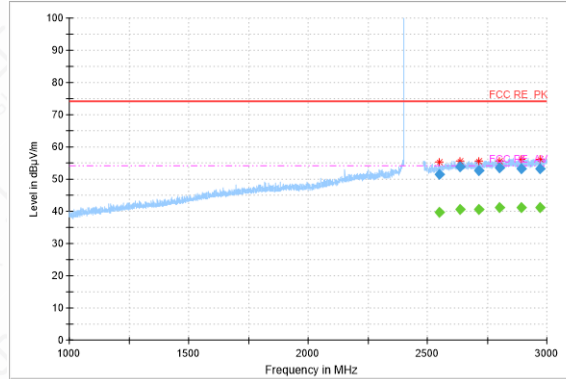


Radiated emission: GFSK, Ch0, 3GHz~18GHz

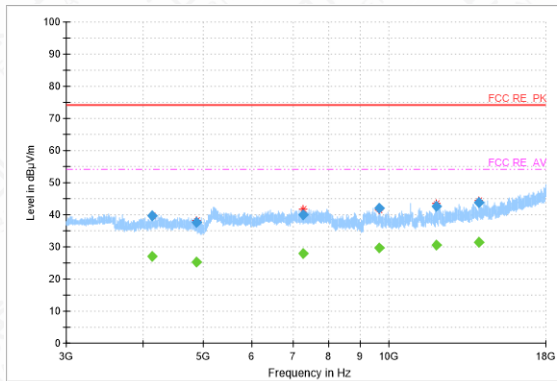


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

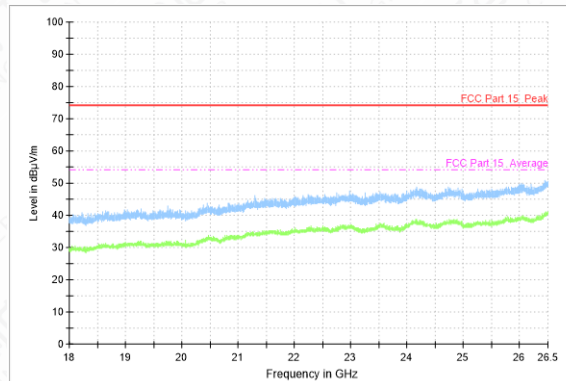

Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

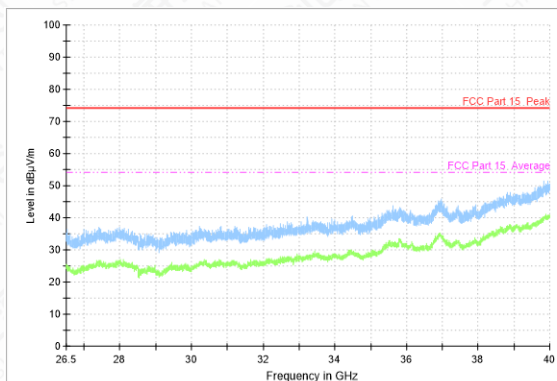


Radiated emission: GFSK, Ch78, 30MHz~1GHz

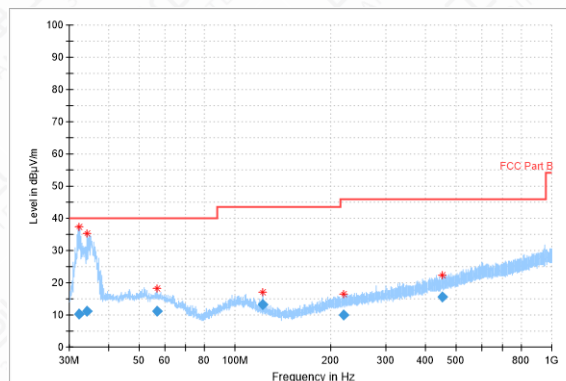

Radiated emission: GFSK, Ch78, 1GHz~3GHz

Radiated emission: GFSK, Ch78, 3GHz~18GHz

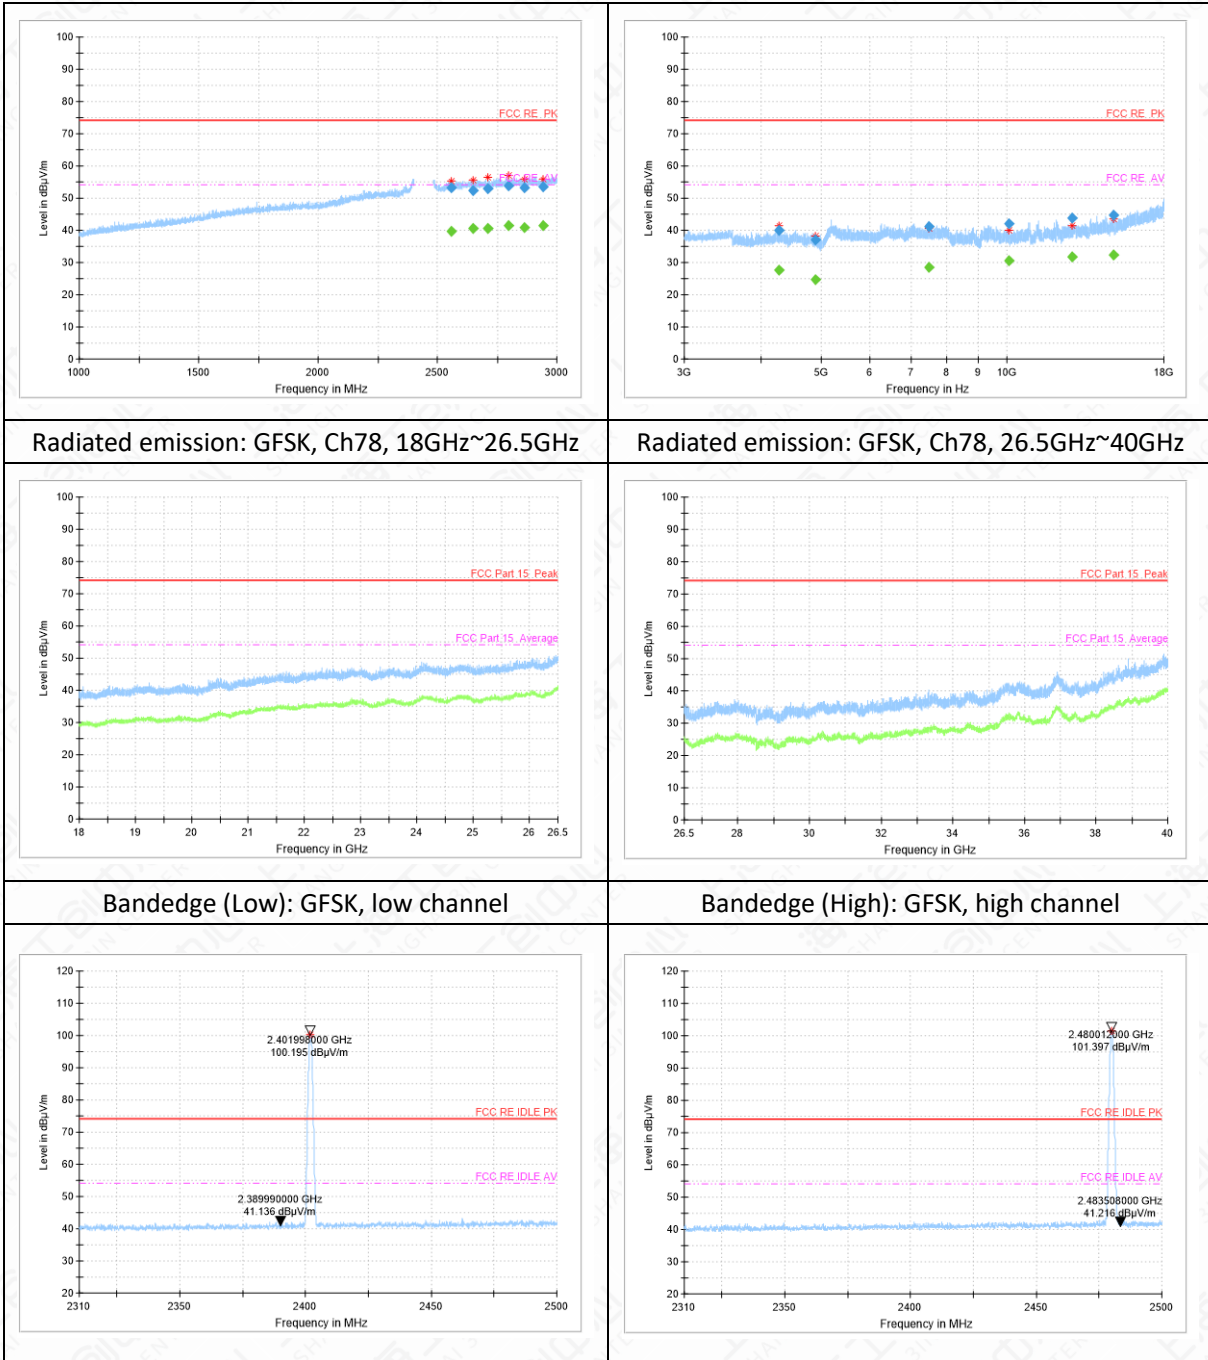

Note: The out-of- limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.9	13.62	-14.2	27.82	V
35.0	12.87	-14	26.87	V
57.8	10.78	-12.2	22.98	H
122.7	13.61	-15.3	28.91	V
219.9	9.67	-12.5	22.17	H
453.5	15.51	-7.2	22.71	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2548.5	51.33	15.1	36.23	H
2635.9	53.79	15.8	37.99	V
2715.3	52.52	16	36.52	H
2802.5	53.55	16.6	36.95	H
2893.5	53.35	16.7	36.65	H
2971.2	53.36	17	36.36	V

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4128.2	39.67	-5.7	45.37	H
4887.9	37.73	-4.7	42.43	V
7255.0	39.87	-2.2	42.07	H
9667.7	42	-0.6	42.6	V
11935.0	42.59	2	40.59	V
14004.3	43.71	4.7	39.01	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.1	10.37	-14.3	24.67	V
34.1	11.26	-14.1	25.36	V
56.6	11.08	-12.2	23.28	H
122.8	13.17	-15.4	28.57	V
221.0	10.07	-12.5	22.57	V
450.5	15.55	-7.3	22.85	H

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2556.4	53.18	15.2	37.98	V
2650.6	52.49	15.9	36.59	V
2709.4	52.84	15.9	36.94	V
2798.2	53.7	16.6	37.1	V
2865.1	53.29	16.7	36.59	H
2941.6	53.52	16.8	36.72	H


GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4270.8	39.94	-5.3	45.24	H
4895.1	36.99	-4.7	41.69	V
7478.5	41.13	-2.3	43.43	H
10079.7	41.98	-0.3	42.28	H


12780.7	43.75	3	40.75	H
14899.6	44.66	5.8	38.86	H

Secondary Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

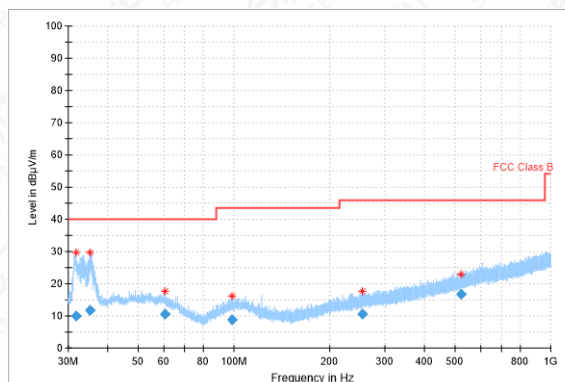


Radiated emission: GFSK, Ch0, 1GHz~3GHz

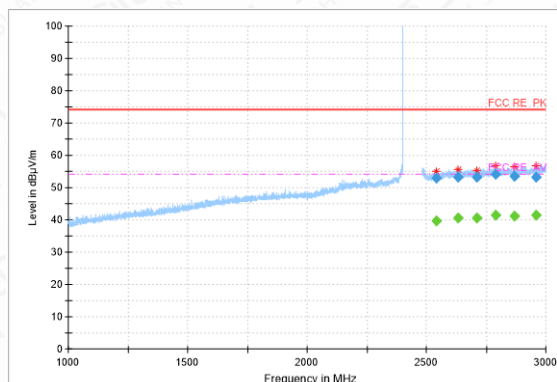


Radiated emission: GFSK, Ch0, 3GHz~18GHz

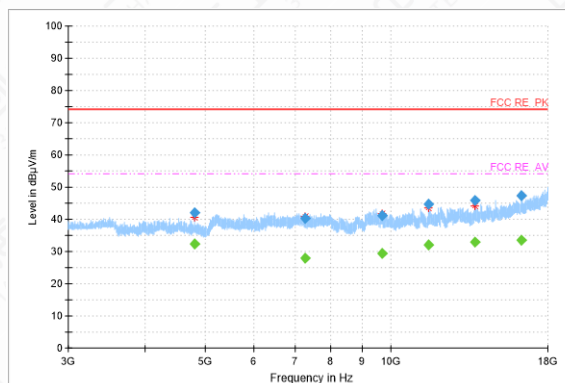


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

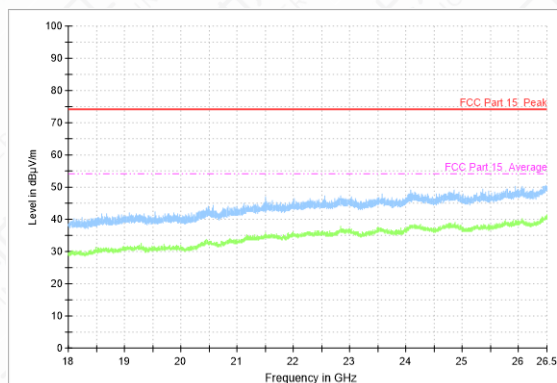


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

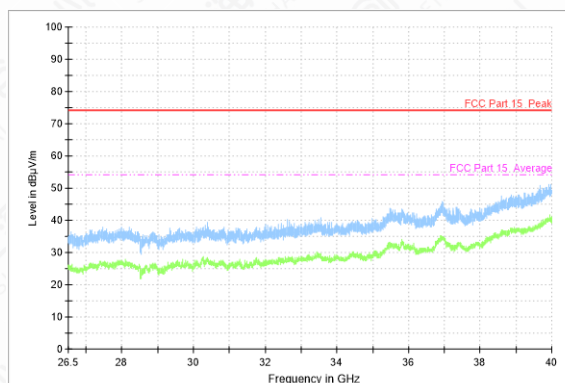


Radiated emission: GFSK, Ch78, 30MHz~1GHz

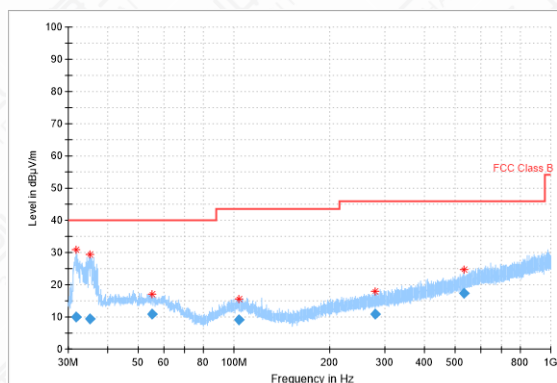


Radiated emission: GFSK, Ch78, 1GHz~3GHz

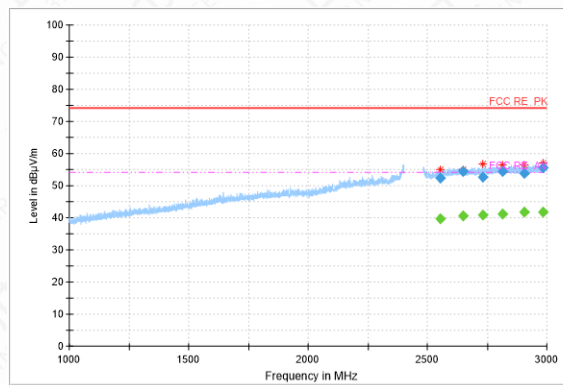


Radiated emission: GFSK, Ch78, 3GHz~18GHz

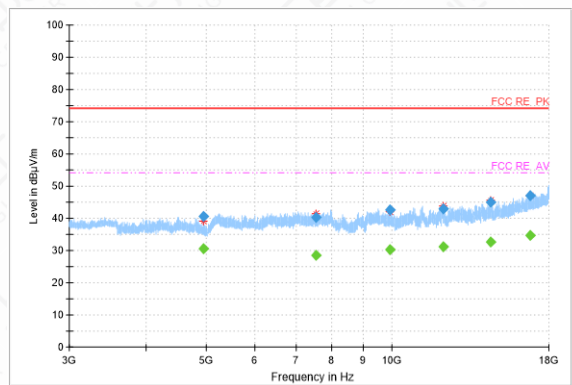


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

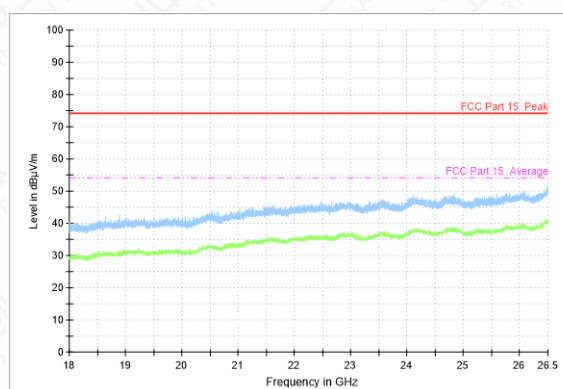


Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

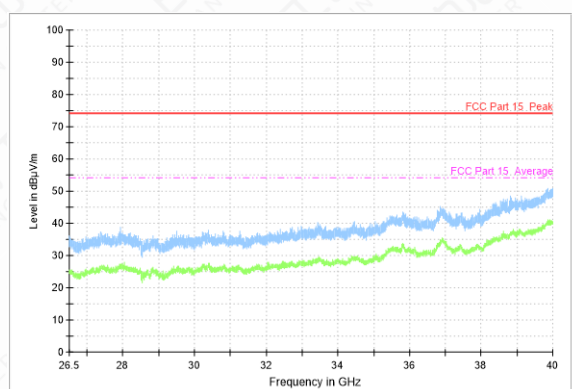

Bandedge (Low): GFSK, low channel

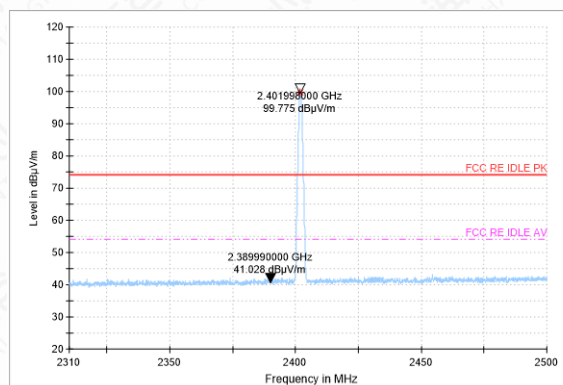

Bandedge (High): GFSK, high channel

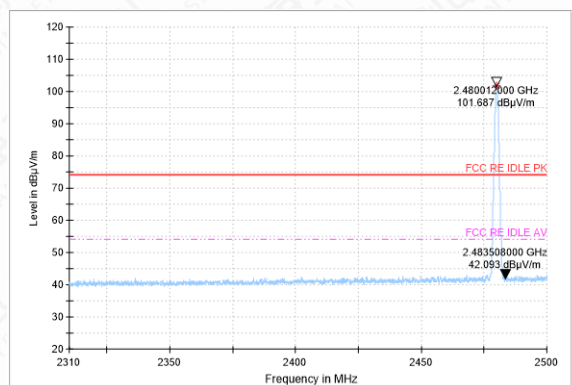

Note: The out-of-limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.8	9.92	-14.4	24.32	H
35.2	11.88	-14	25.88	V
60.4	10.55	-12.5	23.05	V
98.9	8.75	-13.5	22.25	H
253.6	10.48	-11.9	22.38	V

519.4	16.83	-6	22.83	H
-------	-------	----	-------	---

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2542.5	53.07	15	38.07	H
2631.1	53.23	15.7	37.53	H
2711.4	53.13	16	37.13	V
2789.8	54.01	16.5	37.51	H
2866.5	53.51	16.7	36.81	V
2960.5	53.22	16.9	36.32	H

GFSK Ch0 1GHz-3GHz (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2789.8	41.44	16.5	24.94	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4803.9	42.1	-4.9	47	V
7268.0	40.33	-2.2	42.53	V
9692.4	41.05	-0.6	41.65	H
11525.5	44.78	2.3	42.48	H
13680.7	45.74	4	41.74	H
16303.1	47.27	7.9	39.37	V

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.7	9.94	-14.4	24.34	H
35.2	9.34	-14	23.34	V
55.1	10.8	-12.2	23	V
103.9	9.16	-13.4	22.56	H
278.1	10.93	-11.5	22.43	V
532.4	17.3	-5.7	23	H

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2554.8	52.5	15.2	37.3	H
2648.8	54.37	15.9	38.47	H
2733.2	52.73	16.1	36.63	V
2815.8	54.47	16.6	37.87	V
2906.0	53.78	16.7	37.08	H
2985.1	55.52	17.2	38.32	V

GFSK Ch0 1GHz-3GHz (Average)


Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2648.8	40.63	15.9	24.73	H
2815.8	41.25	16.6	24.65	V
2985.1	41.85	17.2	24.65	V

GFSK Ch78 3GHz-18GHz


Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4960.2	40.54	-4.2	44.74	V
7533.5	40.2	-2.1	42.3	H
9933.4	42.53	-0.5	43.03	H
12112.3	42.87	1.9	40.97	H
14487.1	44.86	5.1	39.76	H
16808.4	47.08	8.9	38.18	H

Third Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

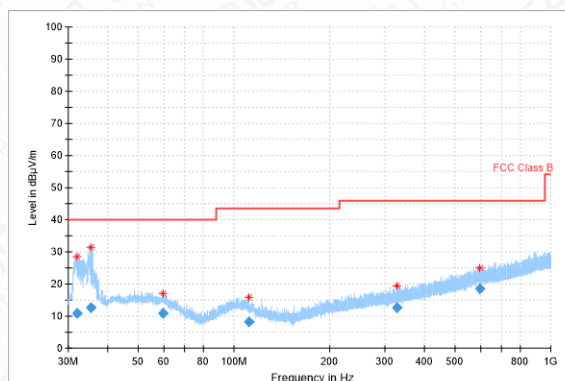


Radiated emission: GFSK, Ch0, 1GHz~3GHz

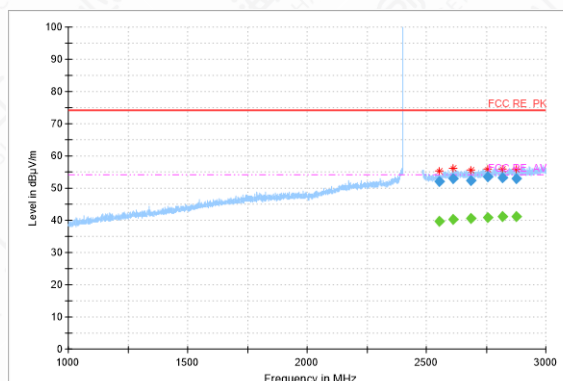


Radiated emission: GFSK, Ch0, 3GHz~18GHz

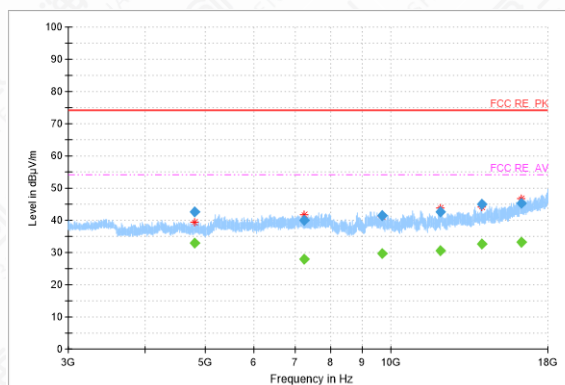


Radiated emission: GFSK, Ch0, 18GHz~26.5GHz

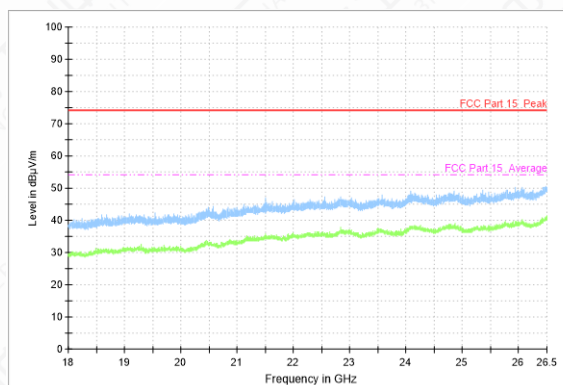


Radiated emission: GFSK, Ch0, 26.5GHz~40GHz

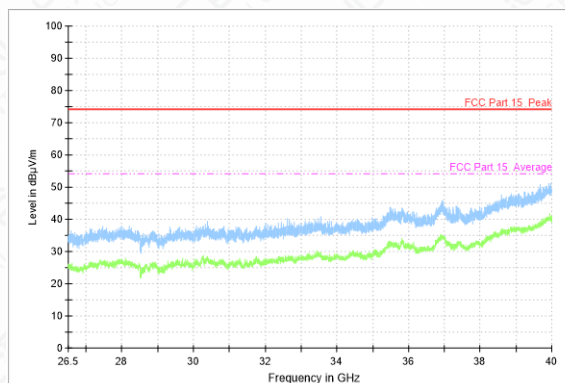


Radiated emission: GFSK, Ch78, 30MHz~1GHz

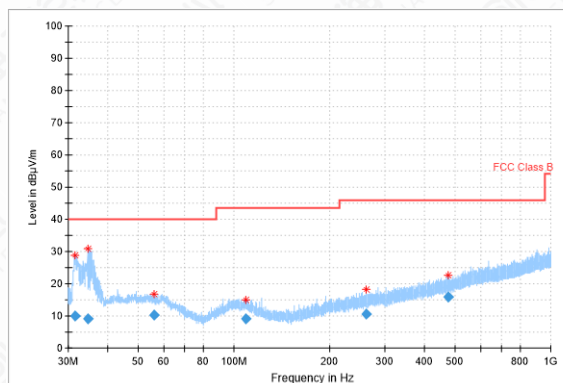


Radiated emission: GFSK, Ch78, 1GHz~3GHz

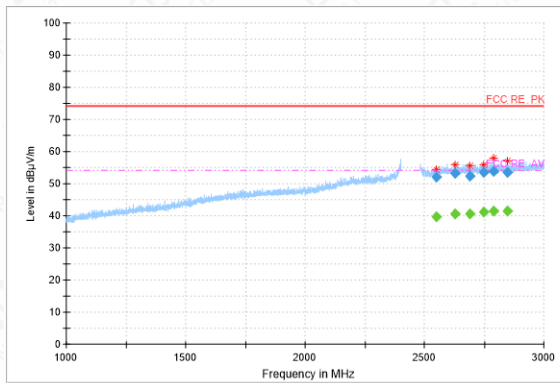


Radiated emission: GFSK, Ch78, 3GHz~18GHz

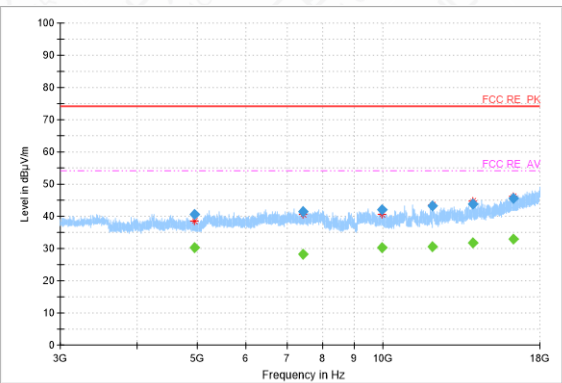


Radiated emission: GFSK, Ch78, 18GHz~26.5GHz

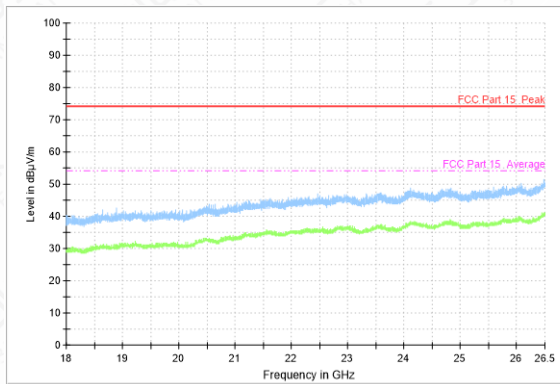


Radiated emission: GFSK, Ch78, 26.5GHz~40GHz

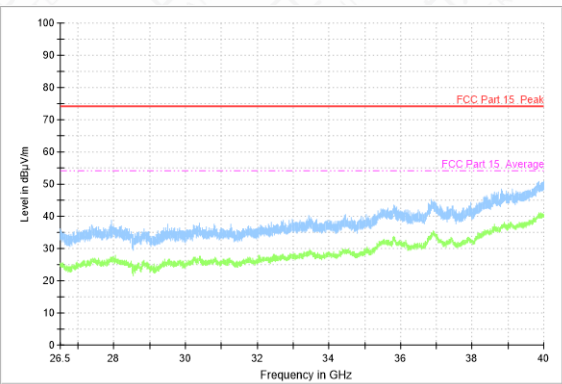

Bandedge (Low): GFSK, low channel

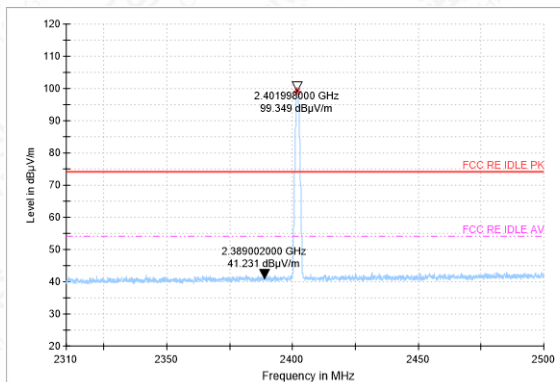

Bandedge (High): GFSK, high channel

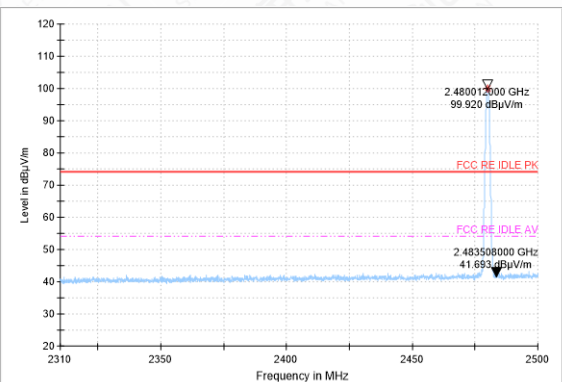

Note: The out-of-limit signal in the picture is the main frequency signal.

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.0	10.78	-14.3	25.08	V
35.3	12.62	-14	26.62	V
59.7	10.8	-12.3	23.1	V
111.3	8.29	-13.8	22.09	V
327.2	12.53	-10	22.53	H

594.7	18.51	-3.8	22.31	H
-------	-------	------	-------	---

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2555.2	51.98	15.2	36.78	H
2611.4	52.82	15.6	37.22	V
2685.3	52.34	15.9	36.44	V
2754.9	53.43	16.3	37.13	V
2816.4	53.3	16.6	36.7	H
2875.2	52.98	16.7	36.28	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4804.1	42.61	-4.9	47.51	H
7227.6	39.86	-2.1	41.96	V
9699.8	41.5	-0.6	42.1	V
12055.3	42.64	2	40.64	H
14043.8	45.05	4.7	40.35	H
16301.0	45.27	7.9	37.37	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
31.5	9.9	-14.5	24.4	H
34.7	9.12	-14.2	23.32	V
55.8	10.33	-12.3	22.63	H
108.7	9.22	-13.4	22.62	H
262.0	10.6	-11.7	22.3	H
473.3	15.8	-7.1	22.9	H

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2551.2	51.96	15.1	36.86	V
2626.9	53.17	15.7	37.47	V
2691.7	52.22	15.9	36.32	V
2746.9	53.66	16.2	37.46	H
2789.4	53.73	16.5	37.23	V
2846.6	53.67	16.6	37.07	H

GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4960.0	40.71	-4.2	44.91	H

7422.3	41.52	-2.3	43.82	H
9985.1	42.12	-0.6	42.72	V
12059.5	43.17	2	41.17	H
14005.4	43.92	4.7	39.22	H
16287.2	45.7	7.9	37.8	H

6.5 Time Of Occupancy (Dwell Time)

6.5.1 Measurement Limit

Standard	Limit(ms)
FCC 47 Part 15.247 (a) (1) (iii)	<400
RSS-247 5.5	<400

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4


1. Connect the EUT through cable and divide with CMW 270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Max hold.
9. Use the marker-delta function, and record it.

Note: For AFH mode, Test Period = 0.4 (second/ channel) x 20 Channel = 8 sec,

For FHSS mode, Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec,

So the Time of Occupancy (Dwell Time) of AFH mode= Time of Occupancy (Dwell Time) of FHSS mode / 79 Channel x 20 Channel.


6.5.3 Test Setup

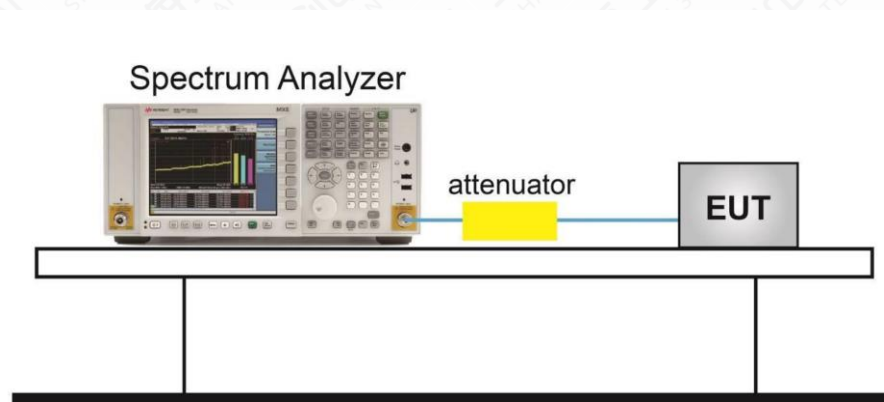


Measurement Result

Modulation type	Frequency (MHz)	Time slot length (ms)	Hop Number	Dwell Time (ms)	Limit (ms)	Conclusion
GFSK DH5	2402-2480	2.88	88	253.44	400	P
$\pi/4$ DQPSK 2DH5	2402-2480	1.52	71	107.92	400	P
8DPSK 3DH5	2402-2480	2.90	52	150.59	400	P

Note: Dwell time = time slot length * hop rate

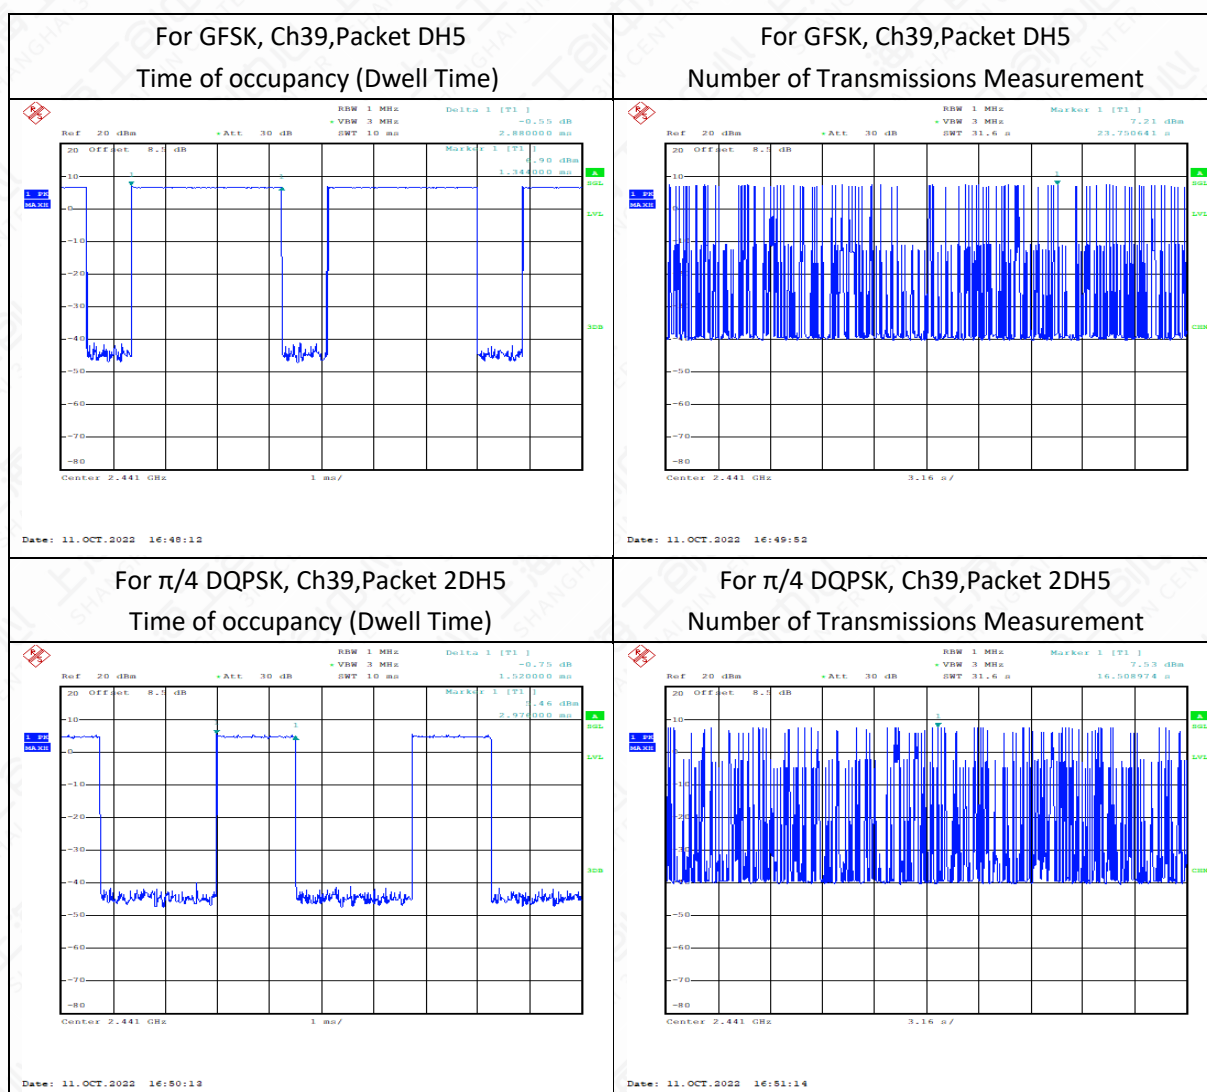


For 8DPSK, Ch39, Packet 3DH5
Time of occupancy (Dwell Time)

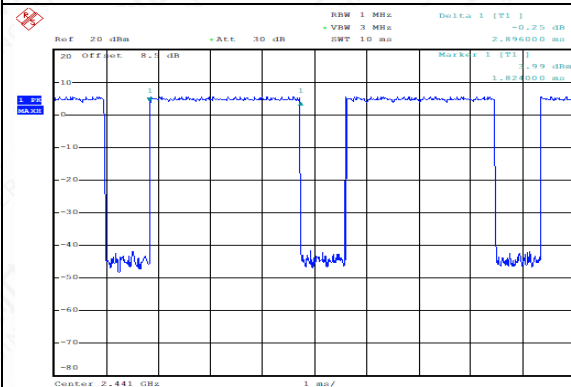

Date: 11.OCT.2022 16:51:38

For 8DPSK, Ch39, Packet 3DH5
Number of Transmissions Measurement

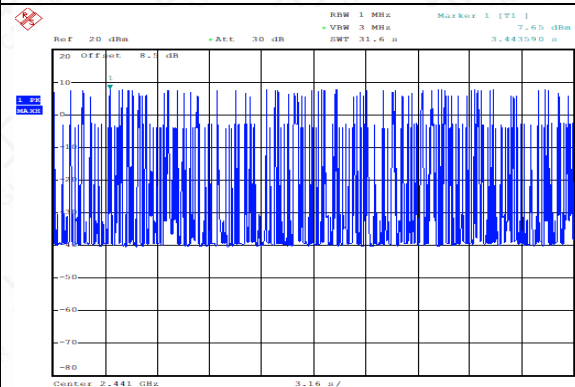

Date: 11.OCT.2022 16:52:50

6.6 20dB Bandwidth

6.6.1 Measurement Limit


Standard	Limit
FCC 47 Part 15.247(d)	20dB below peak output power in 100KHz bandwidth
RSS-247 5.5	20dB below peak output power in 100KHz bandwidth

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7


1. Connect the EUT through cable and divide with CMW 270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.


6.6.3 Test Setup

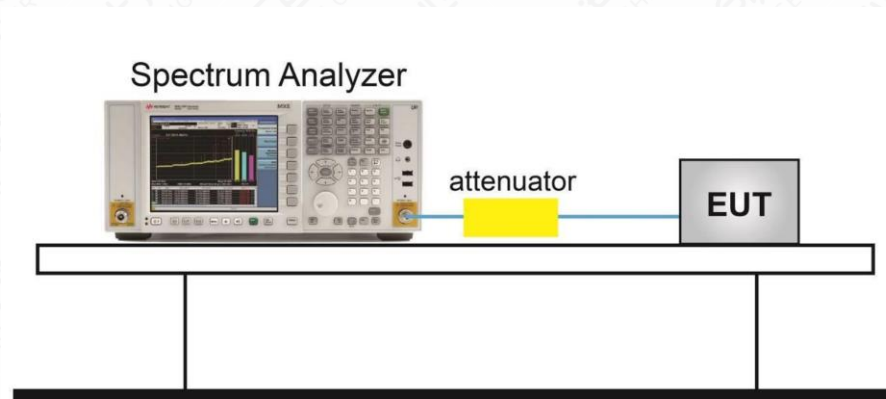

Measurement Result

Modulation type	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK DH5	2402	0.947
	2441	0.947
	2480	0.875
$\pi/4$ DQPSK 2DH5	2402	1.264
	2441	1.259
	2480	1.264
8DPSK 3DH5	2402	1.269
	2441	1.288
	2480	1.264

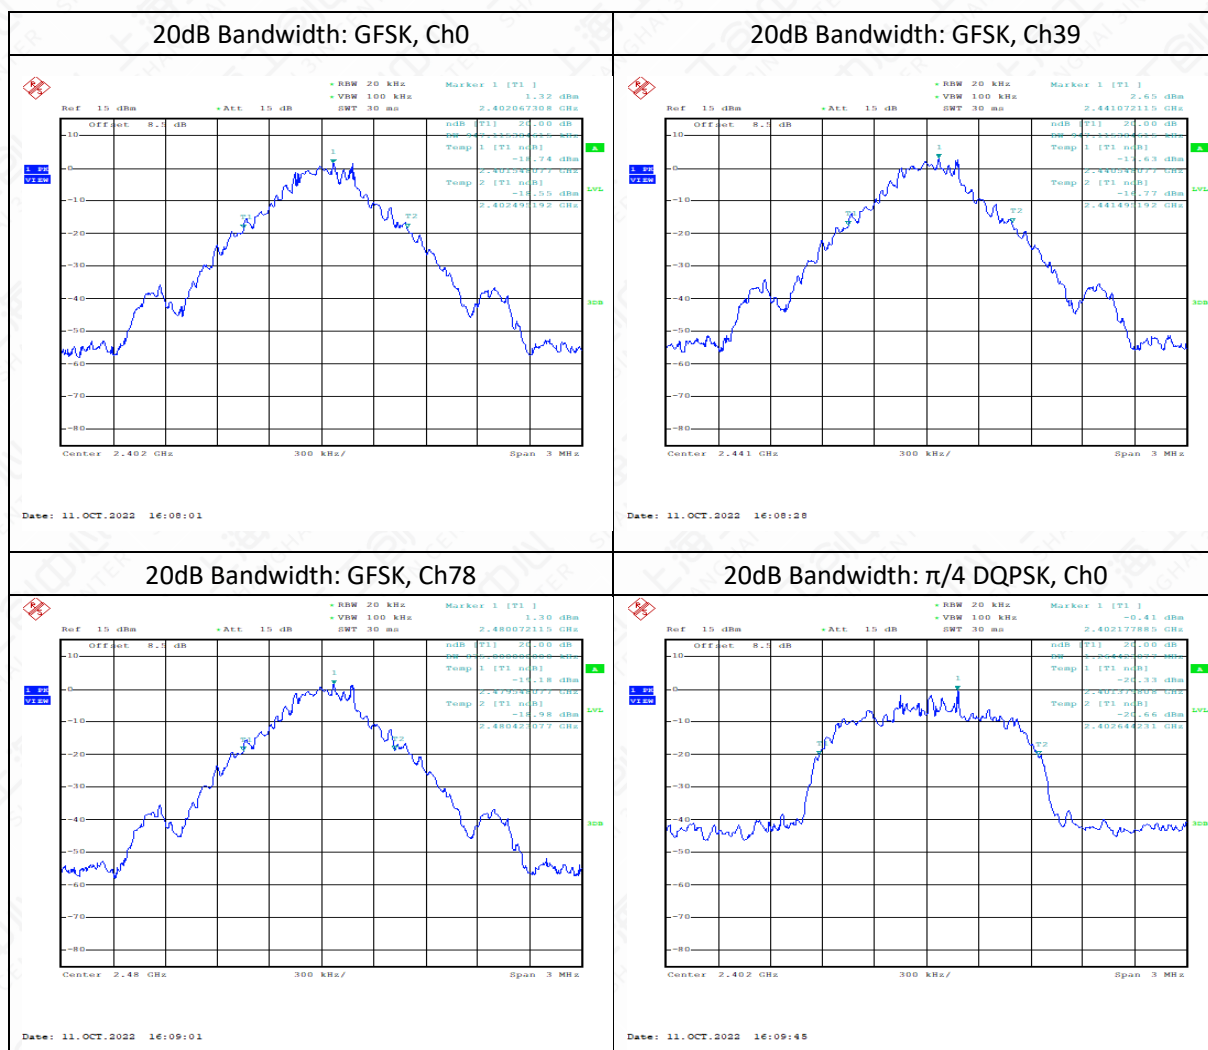

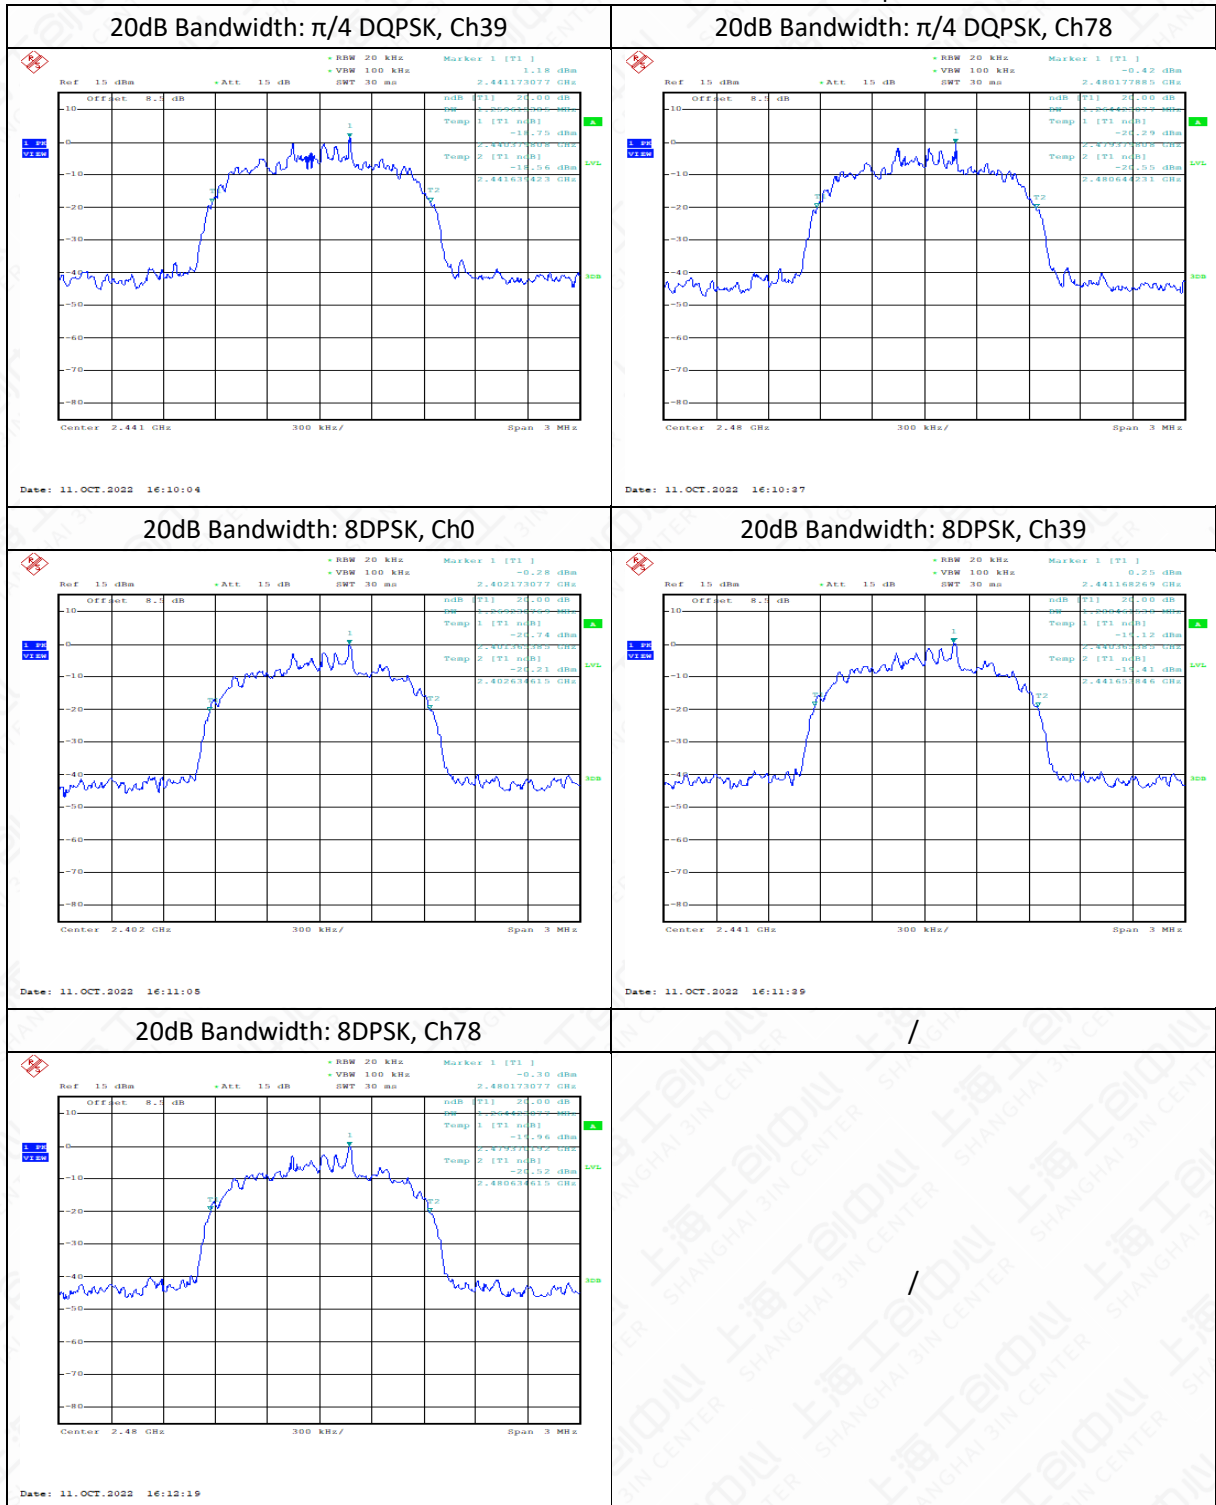

6.7 99% Occupied Bandwidth

6.7.1 Measurement Limit


Standard	Limit
RSS-Gen 6.7	N/A

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.


6.7.3 Test setup

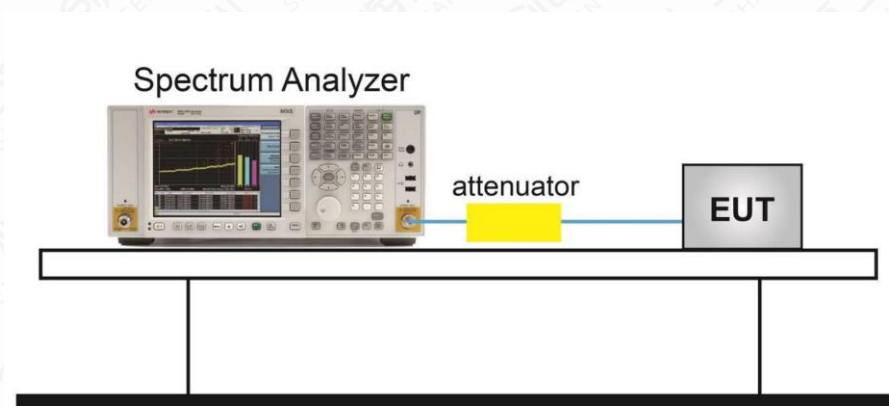



Measurement Result

Modulation type	Channel	99% Bandwidth (MHz)
GFSK DH5	2402	0.899
	2441	0.894
	2480	0.903
$\pi/4$ DQPSK 2DH5	2402	1.182
	2441	1.187
	2480	1.173
8DPSK 3DH5	2402	1.192
	2441	1.201
	2480	1.192

Test graphs as below

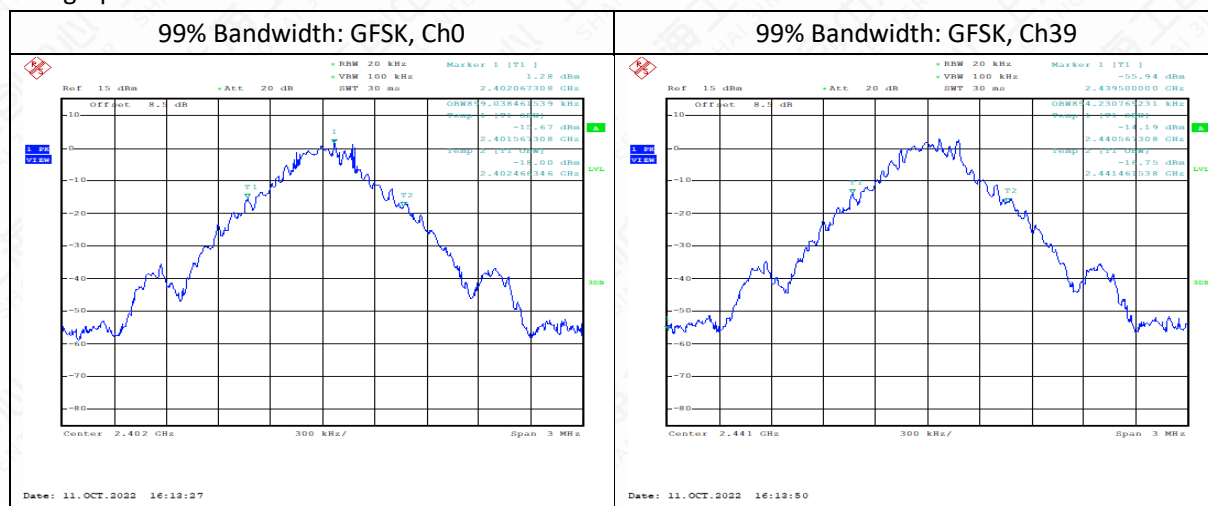

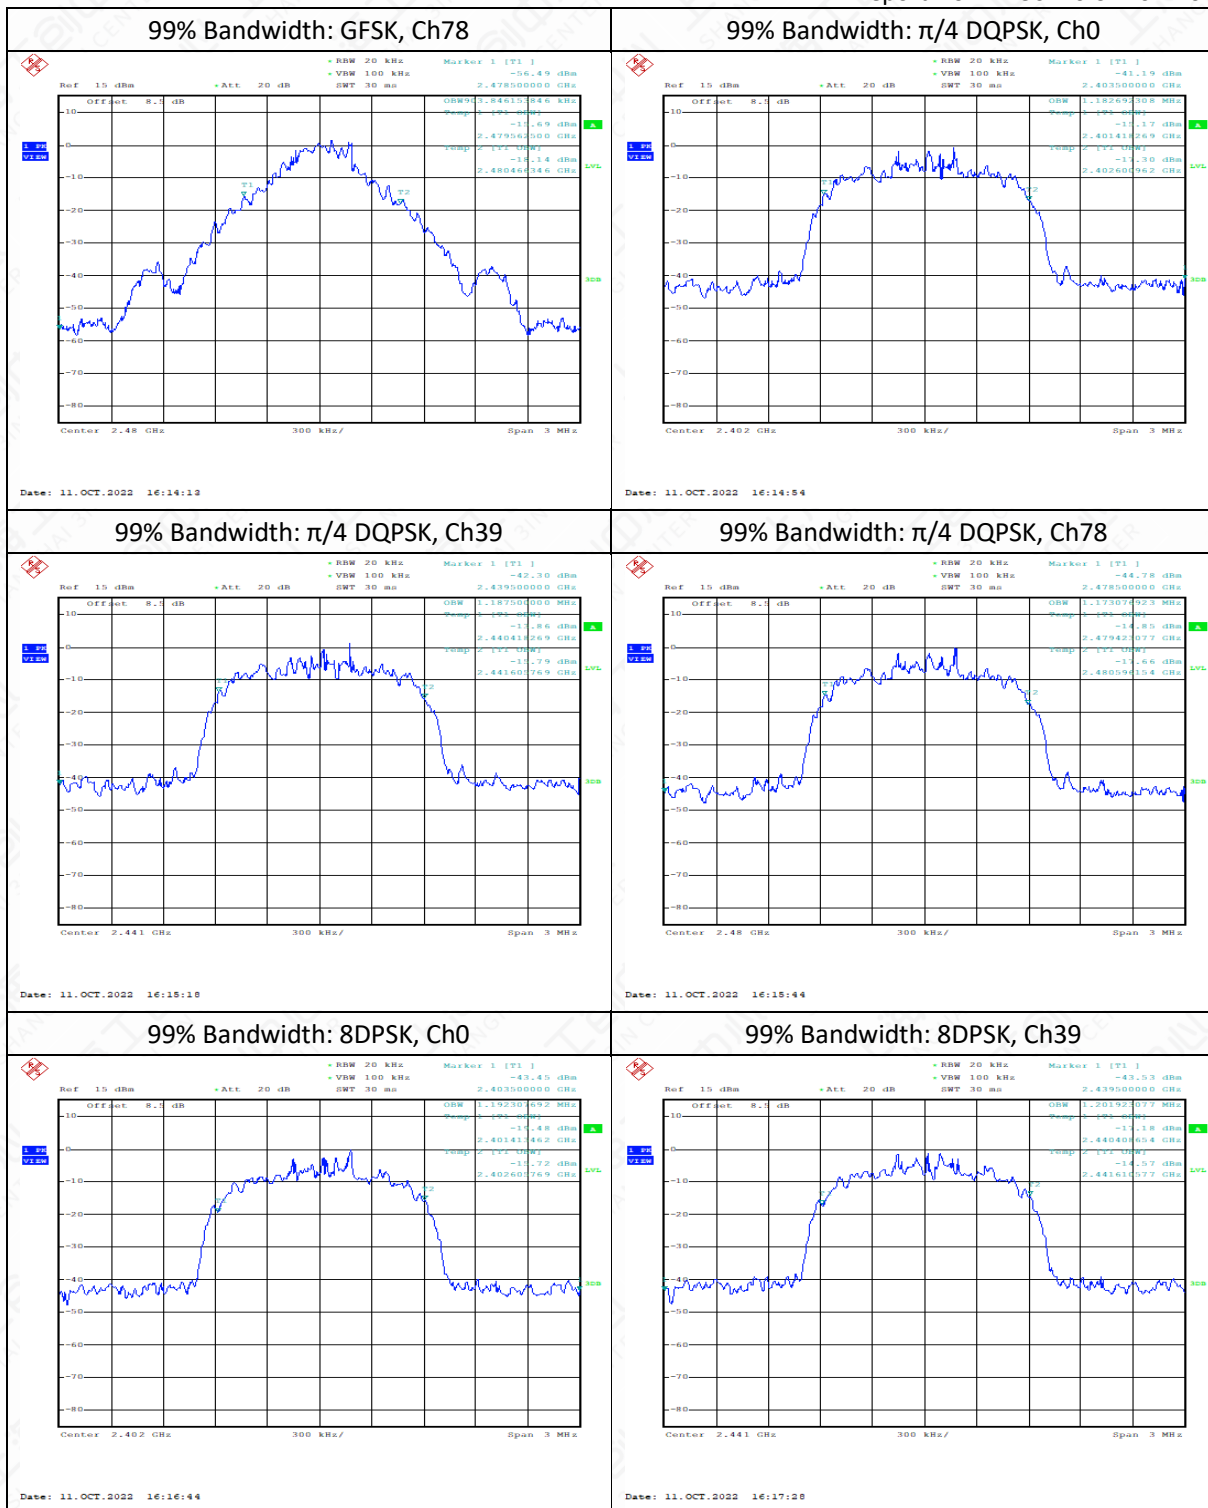

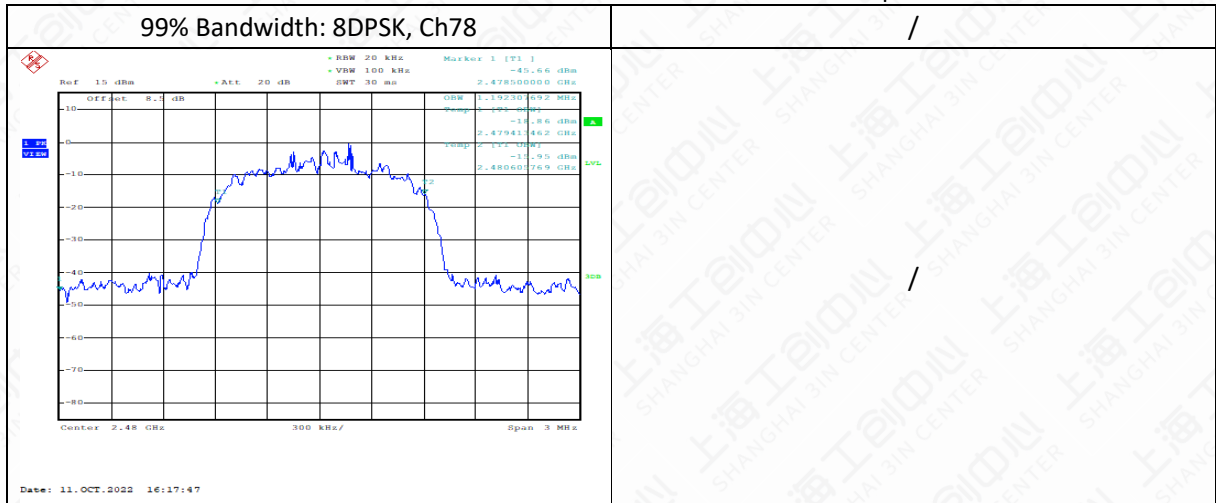

6.8 Carrier Frequency Separation

6.8.1 Measurement Limit


Standard	Limit(KHz)
FCC 47 Part 15.247 (a) (1)	Over 25KHz or $(2/3)*20\text{dB}$ bandwidth
RSS-247 5.1	Over 25KHz or $(2/3)*20\text{dB}$ bandwidth

6.8.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.S

6.8.3 Test Setup

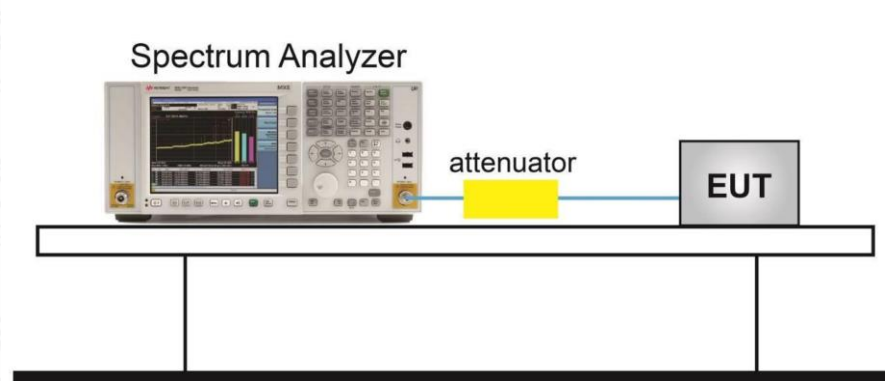

Measurement Result

Modulation type	Frequency (MHz)	Carrier separation measurement (KHz)
GFSK DH5	2441	835.2
$\pi/4$ DQPSK 2DH5	2441	684.8
8DPSK 3DH5	2441	998.4



6.9 Number Of Hopping Channels

6.9.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels
RSS-247 5.1	At least 15 non-overlapping channels

6.9.2 Test procedure


The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CMW 270 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.

6.9.3 Test Setup

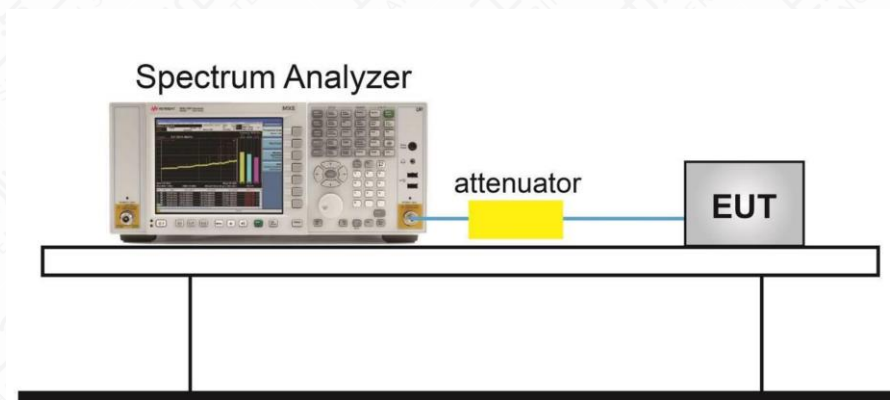

Measurement Result

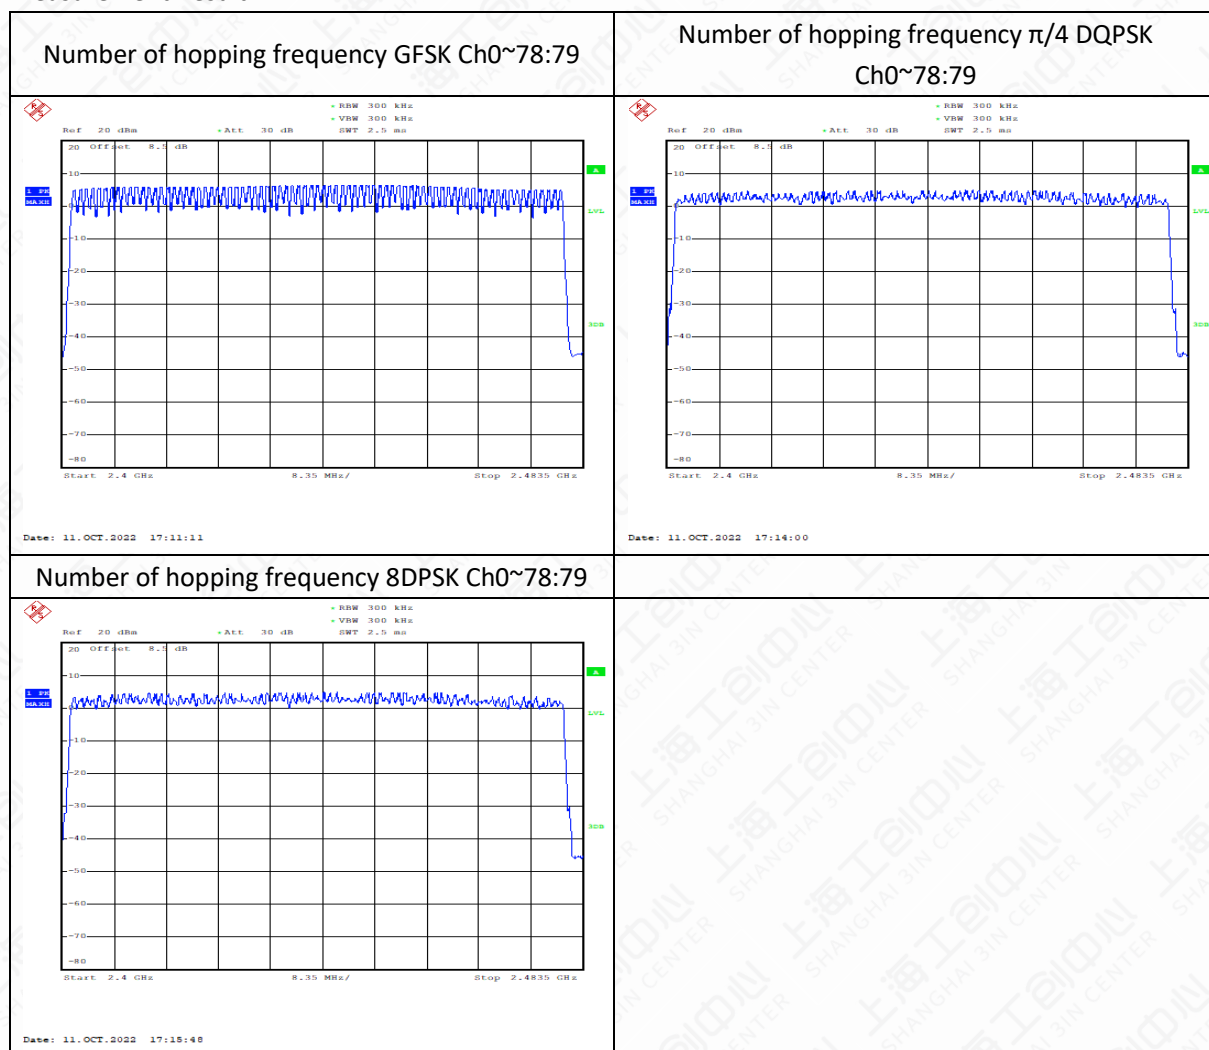


6.10 AC Powerline Conducted Emission

6.10.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.10.2 Test Setup

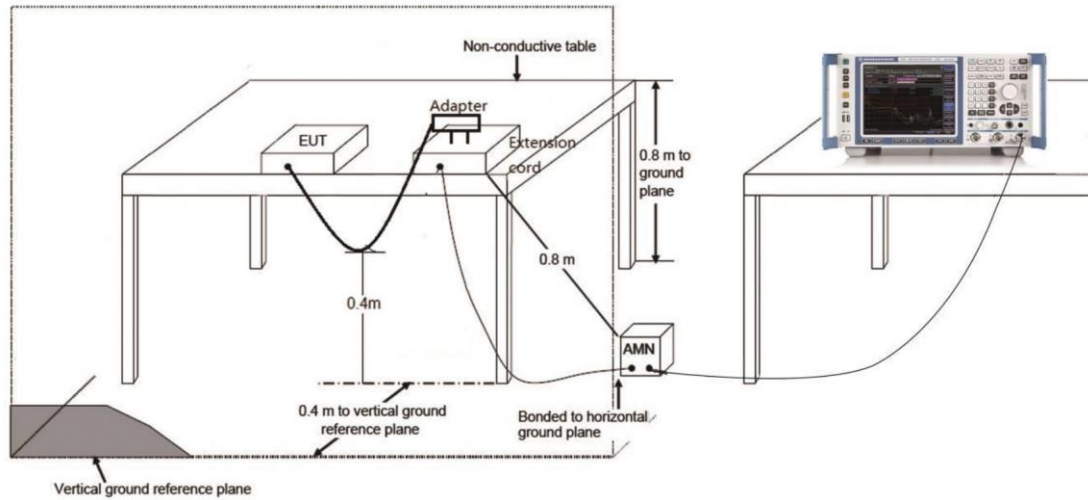

6.10.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit


(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Standard version

Main Supply

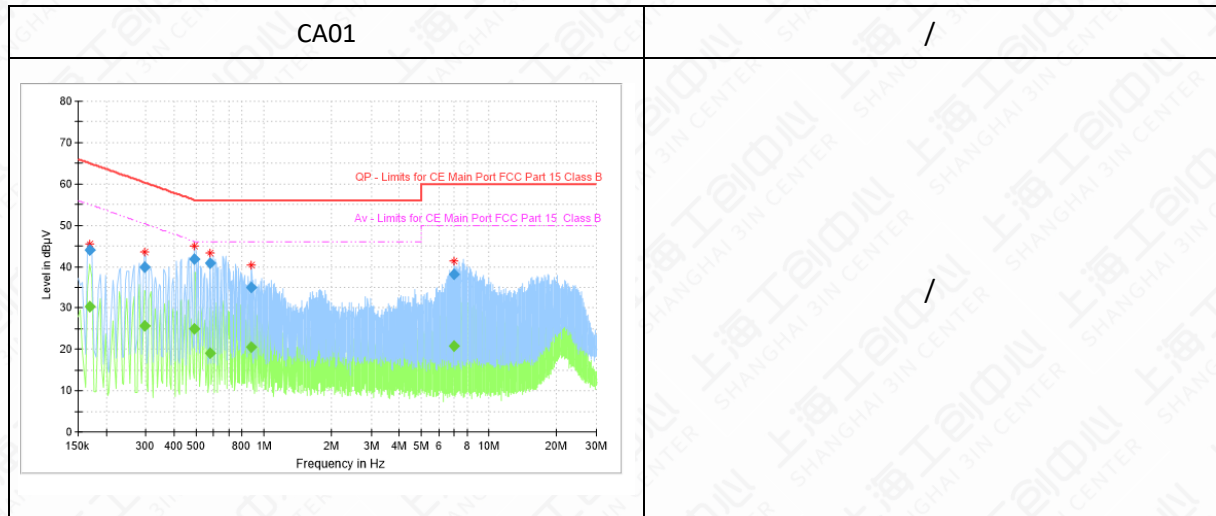


CA01

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.168656	---	30.31	55.03	24.72	15000.0	9.000	L1	ON	9.6
0.168656	44.05	---	65.03	20.97	15000.0	9.000	L1	ON	9.6
0.295519	---	25.57	50.37	24.80	15000.0	9.000	L1	ON	9.6
0.295519	39.78	---	60.37	20.59	15000.0	9.000	L1	ON	9.6
0.493275	41.90	---	56.11	14.21	15000.0	9.000	N	ON	9.6
0.493275	---	25.06	46.11	21.05	15000.0	9.000	N	ON	9.6
0.579094	40.97	---	56.00	15.03	15000.0	9.000	L1	ON	9.6
0.579094	---	19.02	46.00	26.98	15000.0	9.000	L1	ON	9.6
0.885056	34.87	---	56.00	21.13	15000.0	9.000	L1	ON	9.6
0.885056	---	20.47	46.00	25.53	15000.0	9.000	L1	ON	9.6
7.026694	38.23	---	60.00	21.77	15000.0	9.000	L1	ON	9.9
7.026694	---	20.79	50.00	29.21	15000.0	9.000	L1	ON	9.9

Scan code version

Main Supply

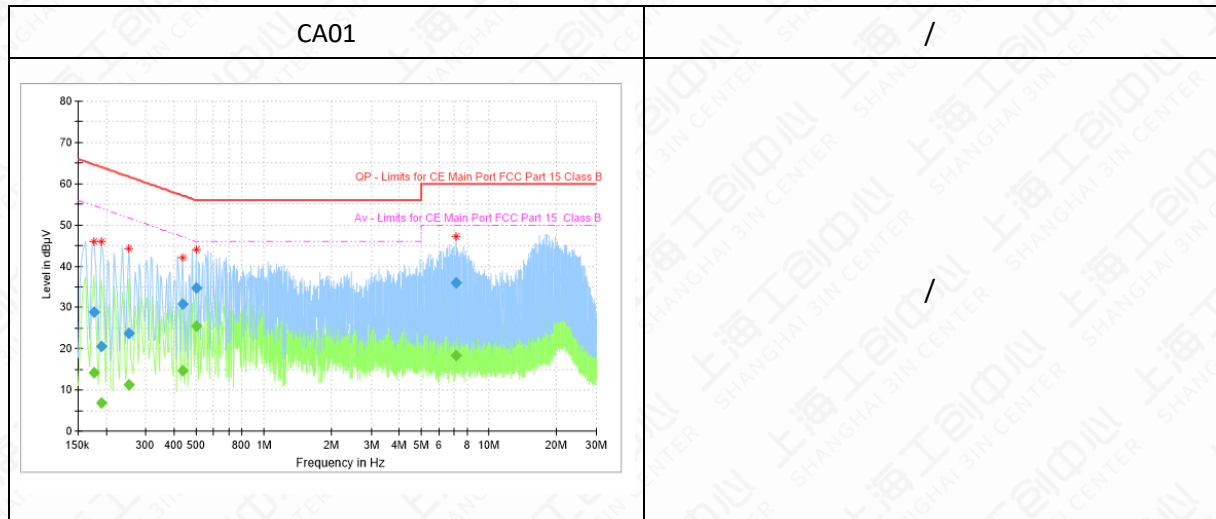


CA01

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.176119	---	14.23	54.67	40.44	15000.0	9.000	N	ON	7.4
0.176119	28.77	---	64.67	35.90	15000.0	9.000	N	ON	7.4
0.191044	20.51	---	63.99	43.48	15000.0	9.000	N	ON	6.2
0.191044	---	6.83	53.99	47.16	15000.0	9.000	N	ON	6.2
0.250744	23.69	---	61.73	38.04	15000.0	9.000	L1	ON	9.6
0.250744	---	11.21	51.73	40.52	15000.0	9.000	L1	ON	9.6
0.437306	---	14.75	47.11	32.36	15000.0	9.000	N	ON	9.0
0.437306	30.75	---	57.11	26.36	15000.0	9.000	N	ON	9.0
0.500738	34.82	---	56.00	21.18	15000.0	9.000	L1	ON	9.6
0.500738	---	25.33	46.00	20.67	15000.0	9.000	L1	ON	9.6
7.179675	35.94	---	60.00	24.06	15000.0	9.000	L1	ON	9.9
7.179675	---	18.34	50.00	31.66	15000.0	9.000	L1	ON	9.9

Fingerprint version

Main Supply

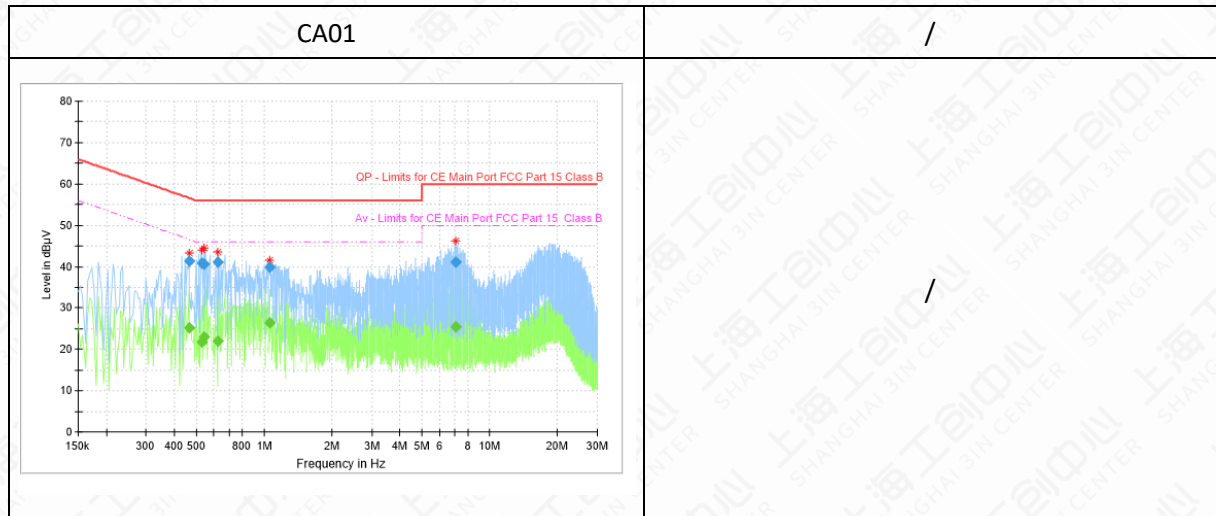

CA01

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.463425	---	25.10	46.63	21.53	15000.0	9.000	L1	ON	9.6
0.463425	41.35	---	56.63	15.28	15000.0	9.000	L1	ON	9.6
0.530588	---	21.77	46.00	24.23	15000.0	9.000	L1	ON	9.6
0.530588	40.91	---	56.00	15.09	15000.0	9.000	L1	ON	9.6
0.541781	---	22.94	46.00	23.06	15000.0	9.000	L1	ON	9.6
0.541781	40.68	---	56.00	15.32	15000.0	9.000	L1	ON	9.6
0.623869	41.01	---	56.00	14.99	15000.0	9.000	N	ON	9.6
0.623869	---	21.96	46.00	24.04	15000.0	9.000	N	ON	9.6
1.056694	39.77	---	56.00	16.23	15000.0	9.000	L1	ON	9.6
1.056694	---	26.44	46.00	19.56	15000.0	9.000	L1	ON	9.6
7.037888	---	25.34	50.00	24.66	15000.0	9.000	N	ON	9.9
7.037888	41.17	---	60.00	18.83	15000.0	9.000	N	ON	9.9

Annex A: Revised History

Version	Revised Content
V00	Initial
V01	update the equipemnts list; add the radiation spurious above 18GHz result; add the EIRP test result and EIRP limit
V02	update the equipemnts Cal. Interval

Annex B: Accreditation Certificate**Accredited Laboratory**

A2LA has accredited

**INDUSTRIAL INTERNET INNOVATION CENTER
(SHANGHAI) CO., LTD.**

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 12th day of April 2021.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT