



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708

Rev.: 01

Page: 1 of 47

Appendix B

Detailed Test Results

1. GSM
GSM850
GSM1900
2. WCDMA
WCDMA Band II
WCDMA Band IV
WCDMA Band V
3. LTE
LTE Band 7
LTE Band 12(17)
LTE Band 13
LTE Band 14
LTE Band 25(2)
LTE Band 26(5)
LTE Band 30
LTE Band 40
LTE Band 41(38)
LTE Band 66
LTE Band 71
4. WIFI
WIFI 2.4G
WIFI 5G
5. BT
BT
6. NFC
NFC

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn

GSM850 GPRS 4TS 190CH Left cheek

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.069 W/kg; SAR (10g) = 0.047 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB


SAR (1g) = 0.072 W/kg; SAR (10g) = 0.055 W/kg;

M2/M1 [%]

97.2

Dist 3dB Peak [mm]

31.0

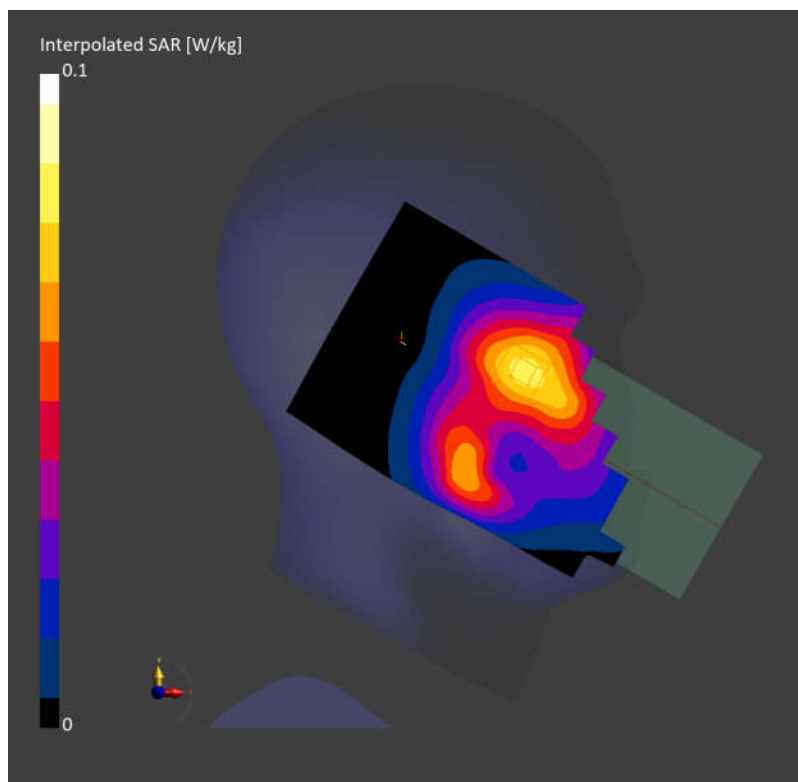

GSM850 GPRS 4TS 190CH Back side 10mm

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.124 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB


SAR (1g) = 0.196 W/kg; SAR (10g) = 0.136 W/kg;

M2/M1 [%]

89.2

Dist 3dB Peak [mm]

24.8

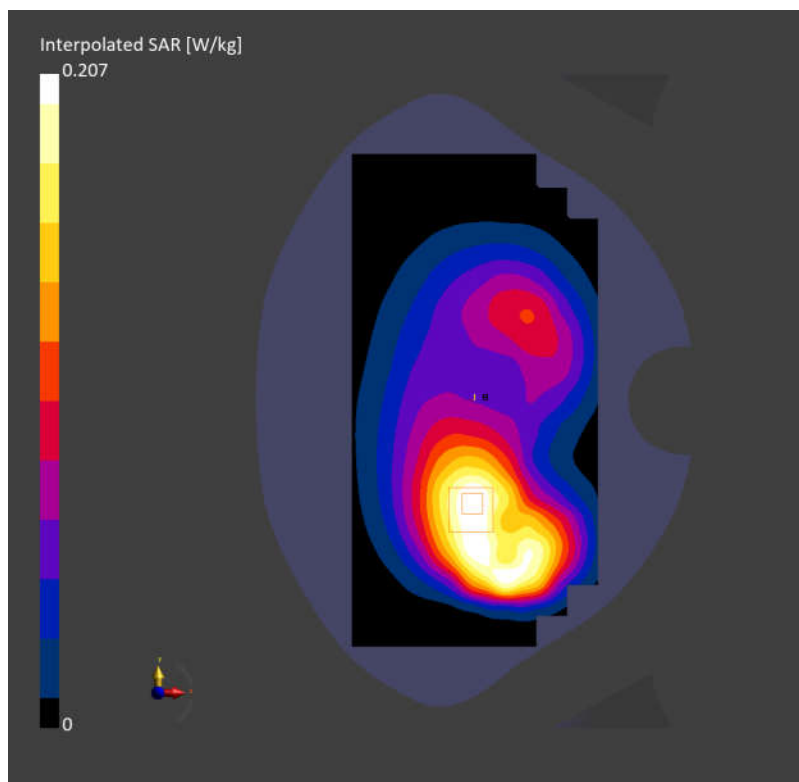


GSM1900 GPRS 4TS 661CH Left cheek

Communication System: PCS 1900; Frequency: 1880.000
Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.35$ S/m; $\epsilon_r=40.1$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.119 W/kg; SAR (10g) = 0.063 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.132 W/kg; SAR (10g) = 0.071 W/kg;
M2/M1 [%] 85.5
Dist 3dB Peak [mm] 6.4

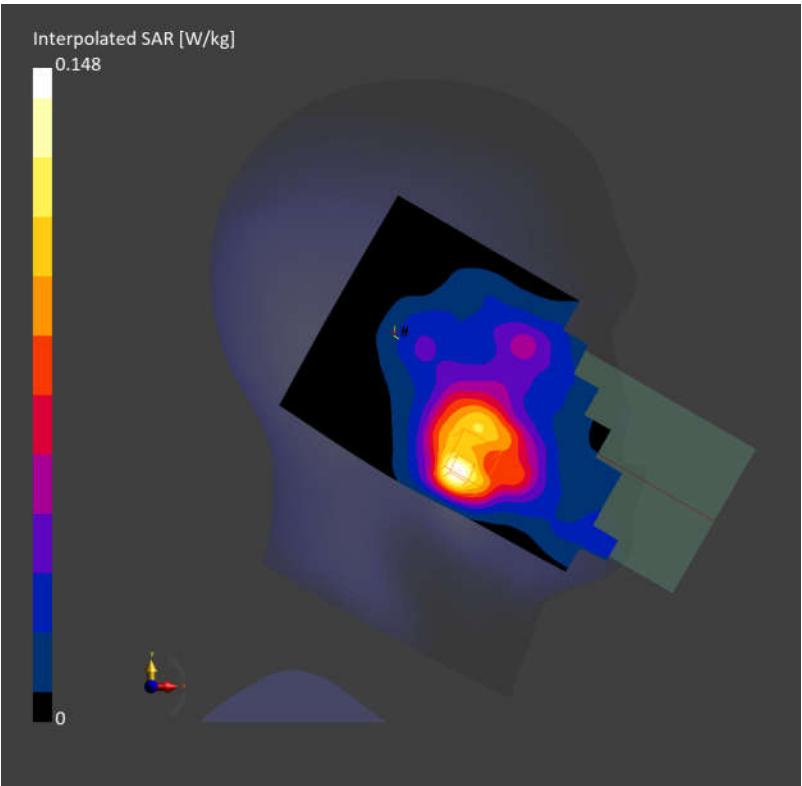

GSM1900 GPRS 4TS 661CH Back side 10mm

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.228 W/kg; SAR (10g) = 0.129 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB


SAR (1g) = 0.238 W/kg; SAR (10g) = 0.138 W/kg;

M2/M1 [%]

85.6

Dist 3dB Peak [mm]

12.1

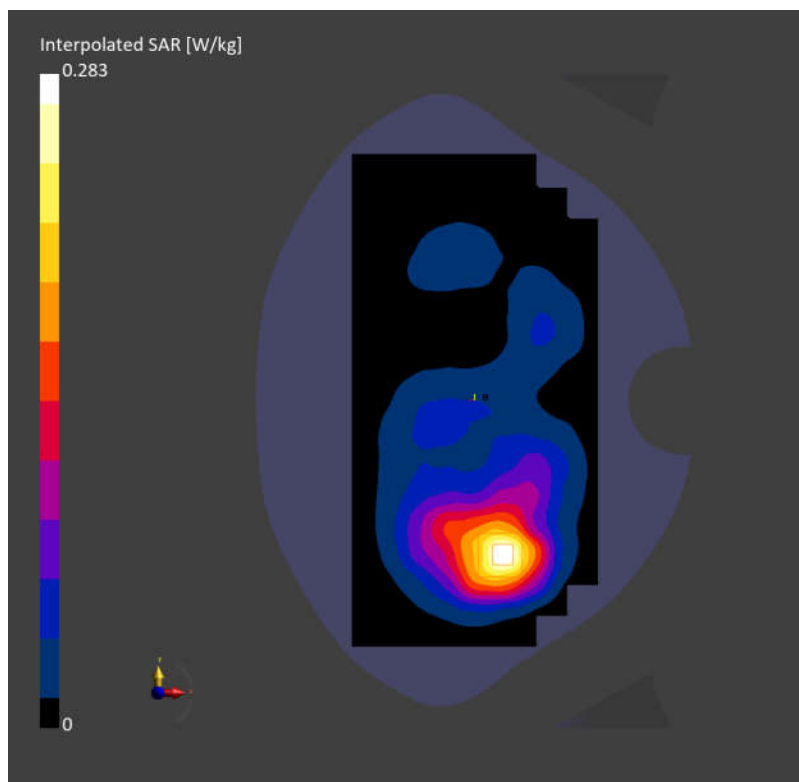

WCDMA Band II RMC 9400CH Left cheek

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.219 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 0.231 W/kg; SAR (10g) = 0.123 W/kg;

M2/M1 [%]

87.8

Dist 3dB Peak [mm]

7.7

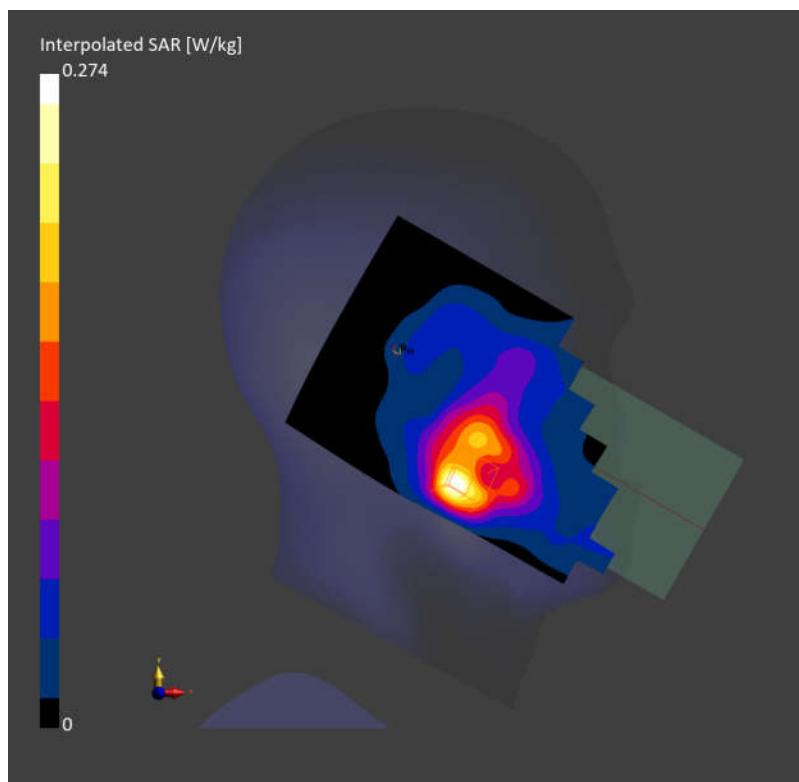

WCDMA Band II RMC 9400CH Back side 10mm

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.375 W/kg; SAR (10g) = 0.214 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB


SAR (1g) = 0.395 W/kg; SAR (10g) = 0.233 W/kg;

M2/M1 [%]

85.8

Dist 3dB Peak [mm]

12.0

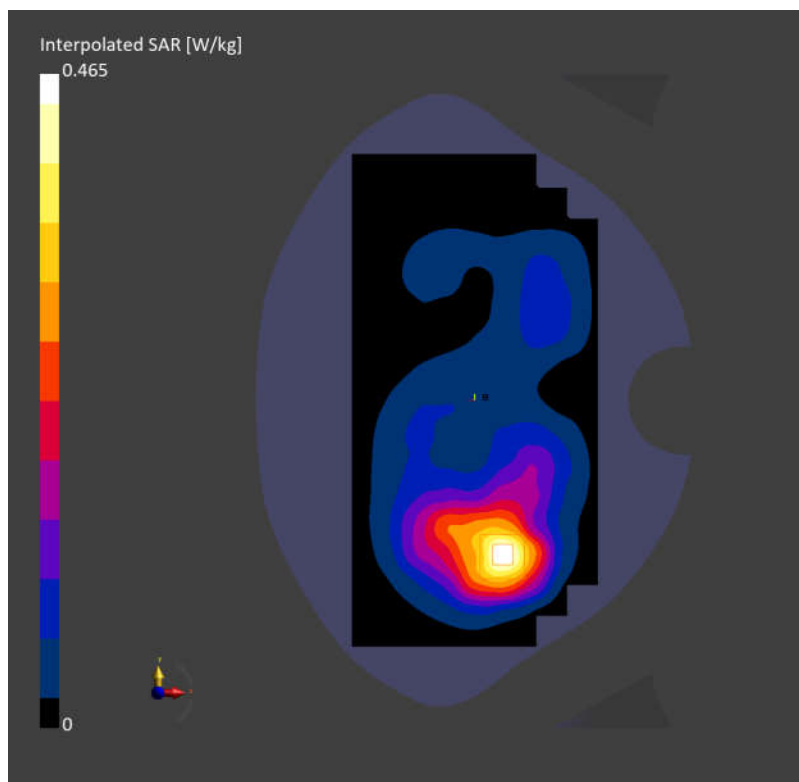

WCDMA Band IV RMC 1412CH Left cheek

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.2$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.63, 7.94, 7.8); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.238 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB


SAR (1g) = 0.251 W/kg; SAR (10g) = 0.170 W/kg;

M2/M1 [%]

93.9

Dist 3dB Peak [mm]

13.4

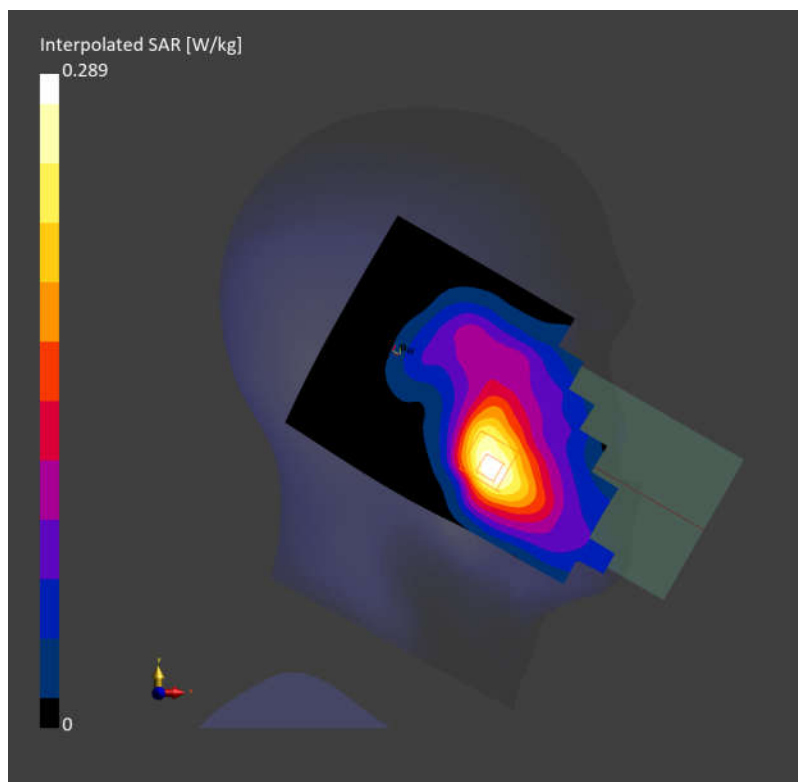

WCDMA Band IV RMC 1412CH Back side 10mm

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.2$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.63, 7.94, 7.8); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.421 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.819 W/kg; SAR (10g) = 0.459 W/kg;

M2/M1 [%]

85.5

Dist 3dB Peak [mm]

12.0

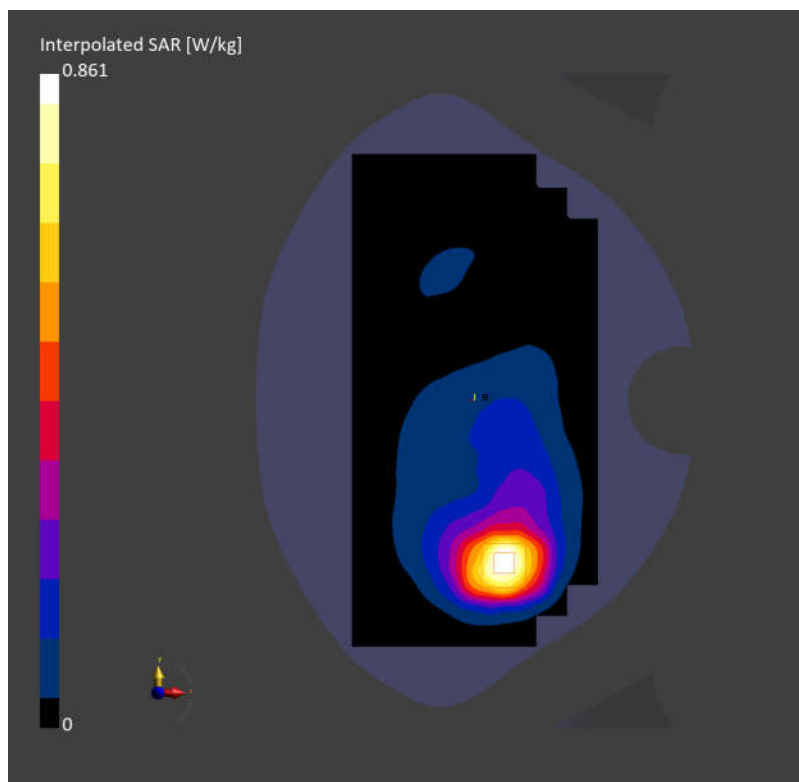

WCDMA Band V RMC 4182CH Left cheek

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.093 W/kg; SAR (10g) = 0.063 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB


SAR (1g) = 0.098 W/kg; SAR (10g) = 0.075 W/kg;

M2/M1 [%]

95.7

Dist 3dB Peak [mm]

22.3

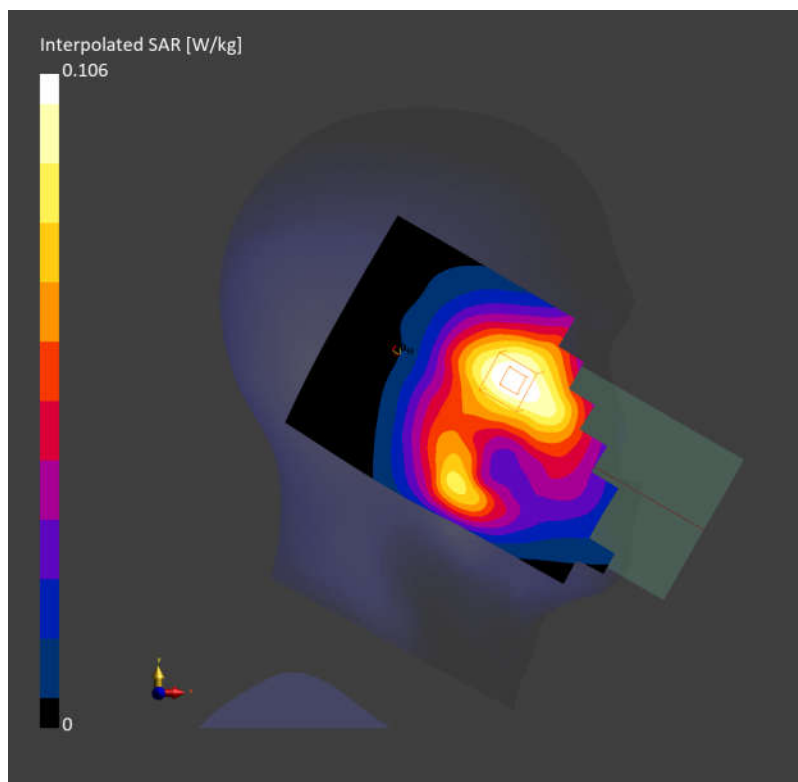

WCDMA Band V RMC 4182CH Back side 10mm

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.358 W/kg; SAR (10g) = 0.239 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB


SAR (1g) = 0.402 W/kg; SAR (10g) = 0.239 W/kg;

M2/M1 [%]

83.7

Dist 3dB Peak [mm]

8.5

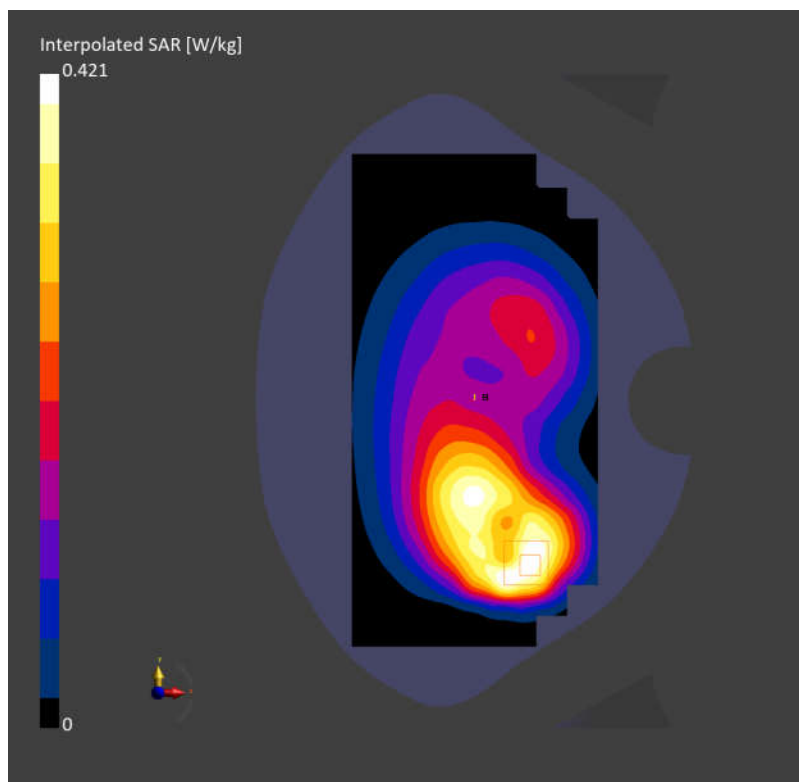

LTE Band 7 QPSK 20M 1RB0 21100CH Left cheek

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 39.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.055 W/kg; SAR (10g) = 0.029 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB


SAR (1g) = 0.054 W/kg; SAR (10g) = 0.032 W/kg;

M2/M1 [%]

83.9

Dist 3dB Peak [mm]

10.9

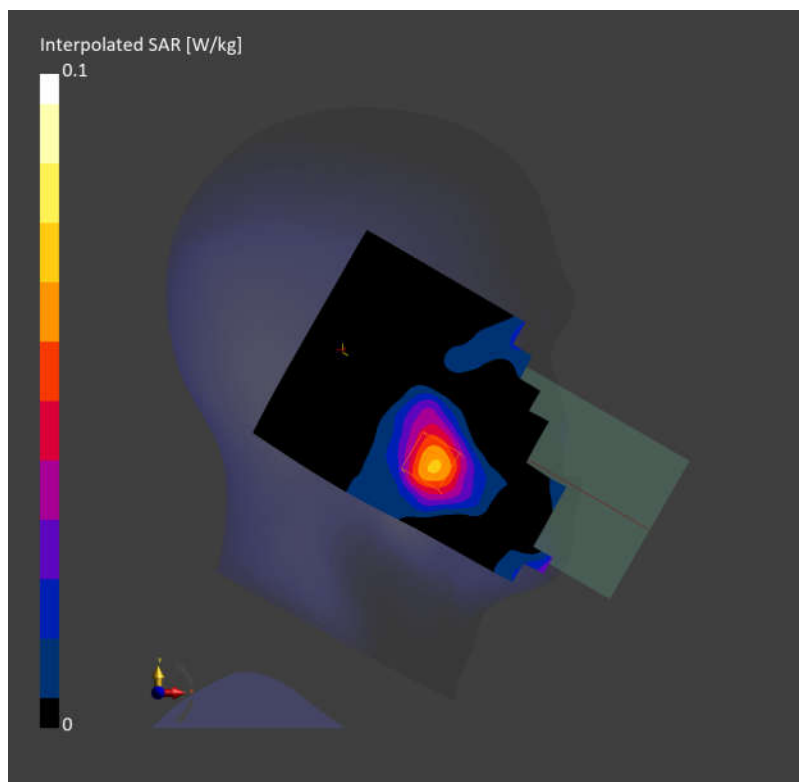

LTE Band 7 QPSK 20M 1RB0 21100CH Back side 10mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 39.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.463 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.499 W/kg; SAR (10g) = 0.237 W/kg;

M2/M1 [%]

84.4

Dist 3dB Peak [mm]

9.5

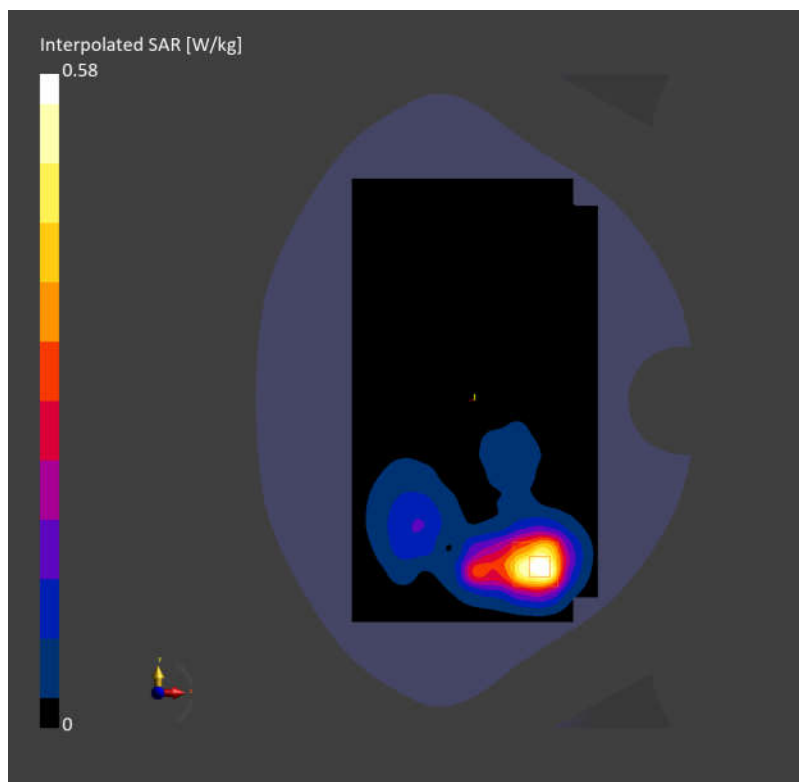

LTE Band 7 QPSK 20M 1RB0 21100CH Left side 10mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 39.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.299 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB


SAR (1g) = 0.654 W/kg; SAR (10g) = 0.313 W/kg;

M2/M1 [%]

84.7

Dist 3dB Peak [mm]

10.0

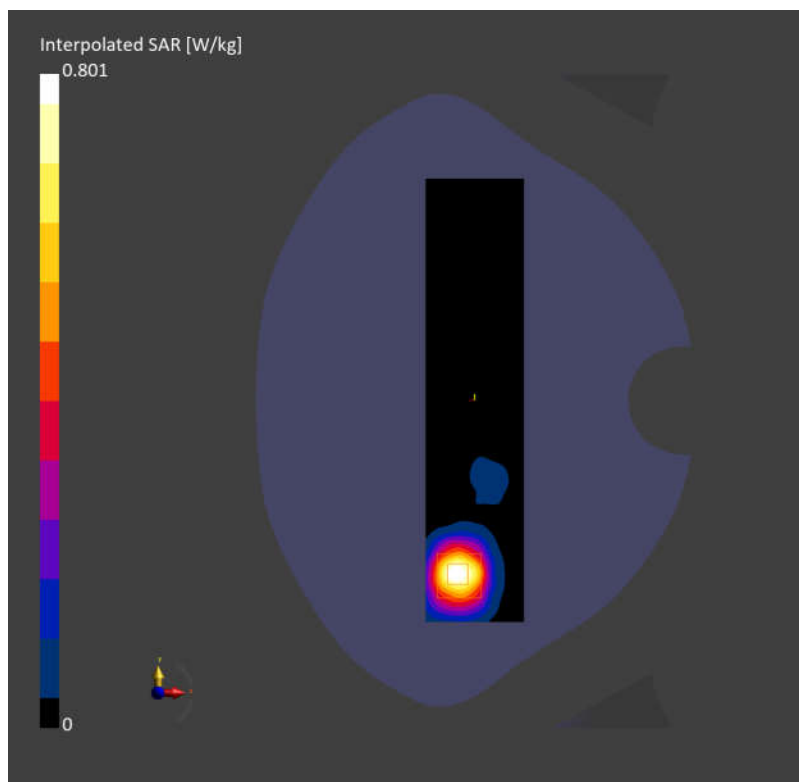

LTE Band 12 QPSK 10M 1RB0 23095CH Left cheek

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.5$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.087 W/kg; SAR (10g) = 0.062 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB


SAR (1g) = 0.097 W/kg; SAR (10g) = 0.083 W/kg;

M2/M1 [%]

96.3

Dist 3dB Peak [mm]

29.0

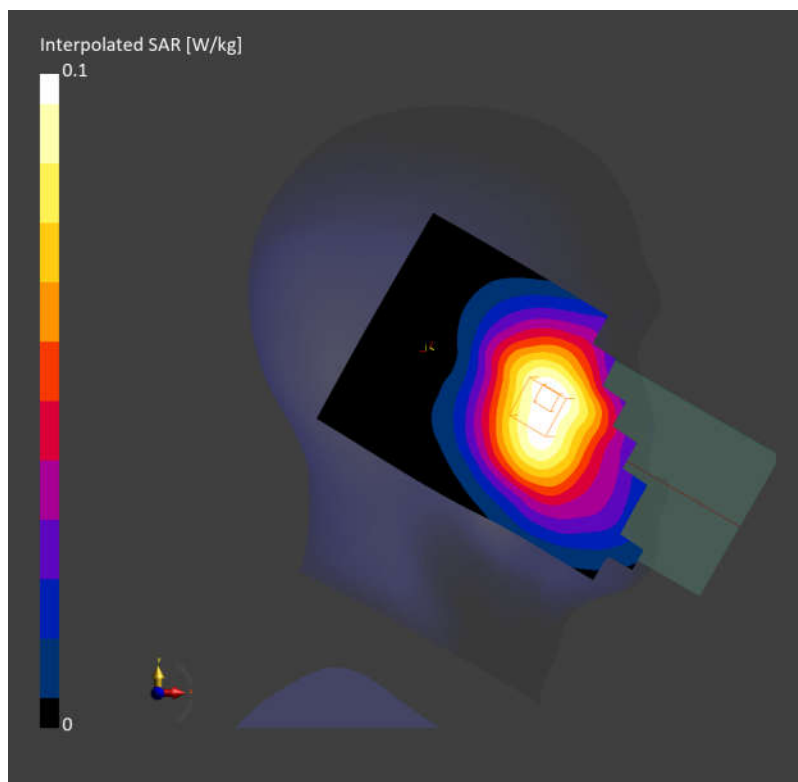

LTE Band 12 QPSK 10M 1RB0 23095CH Back side 10mm

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.5$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.219 W/kg; SAR (10g) = 0.156 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.237 W/kg; SAR (10g) = 0.180 W/kg;

M2/M1 [%]

87.7

Dist 3dB Peak [mm]

> 16.0

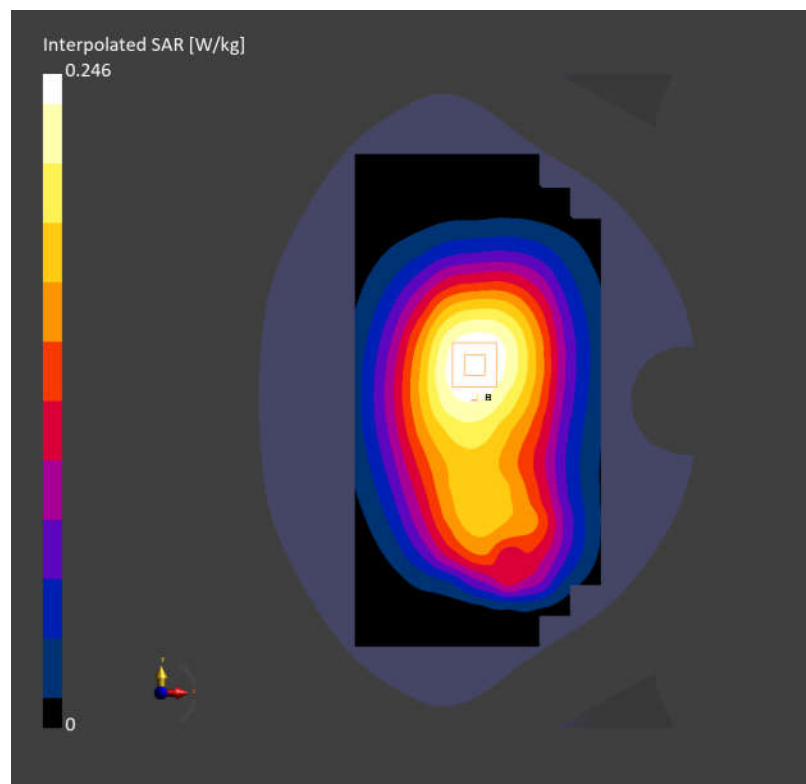

LTE Band 13 QPSK 10M 1RB0 23230CH Left cheek

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.138 W/kg; SAR (10g) = 0.097 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB


SAR (1g) = 0.152 W/kg; SAR (10g) = 0.125 W/kg;

M2/M1 [%]

96.8

Dist 3dB Peak [mm]

> 16.0

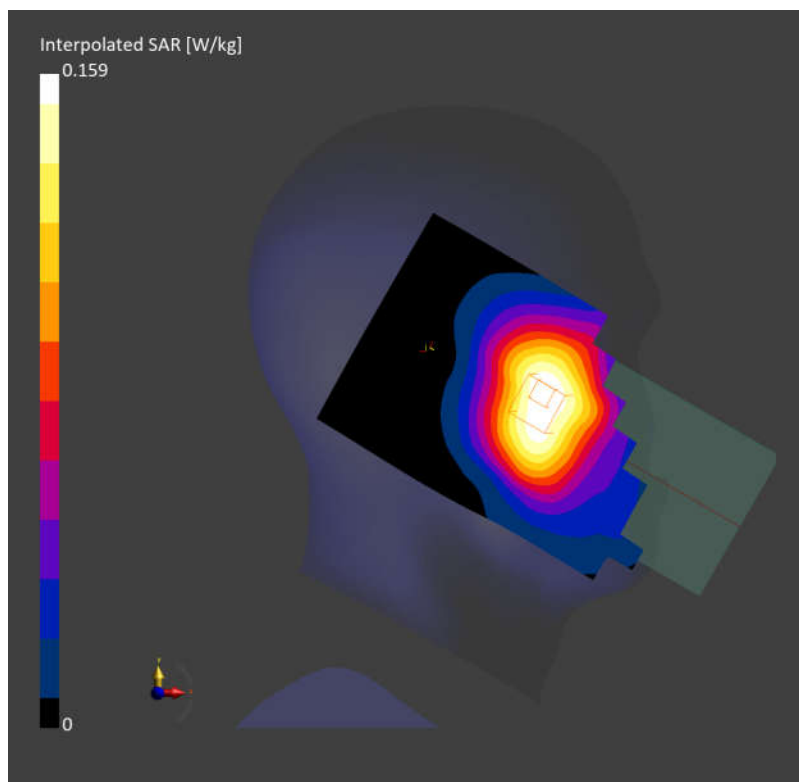

LTE Band 13 QPSK 10M 1RB0 23230CH Back side 10mm

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.189 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB


SAR (1g) = 0.298 W/kg; SAR (10g) = 0.194 W/kg;

M2/M1 [%]

84.6

Dist 3dB Peak [mm]

18.7

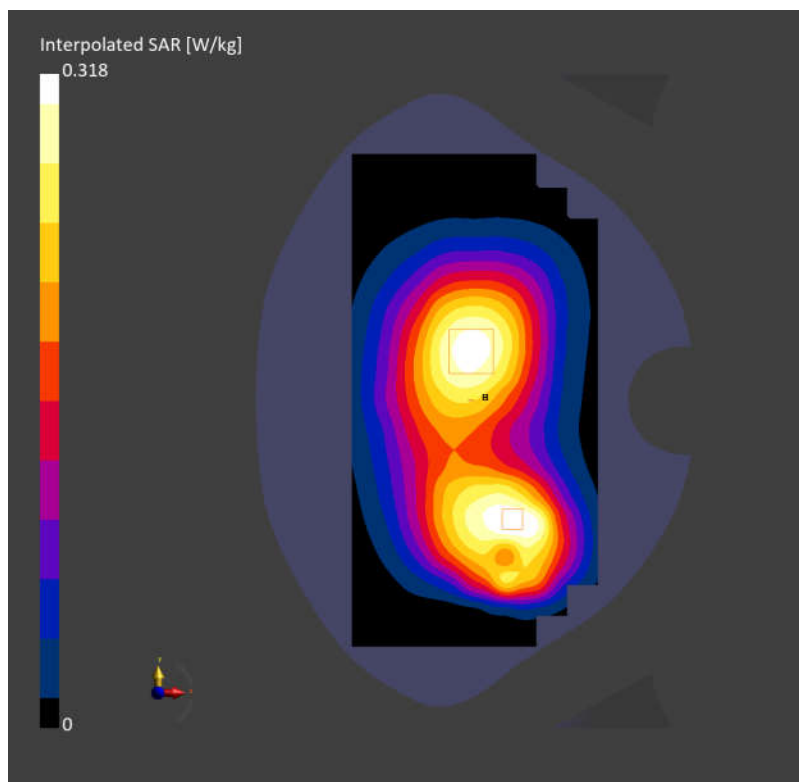

LTE Band 14 QPSK 10M 1RB0 23330CH Left cheek

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.090 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 0.144 W/kg; SAR (10g) = 0.118 W/kg;

M2/M1 [%]

97.0

Dist 3dB Peak [mm]

> 16.0

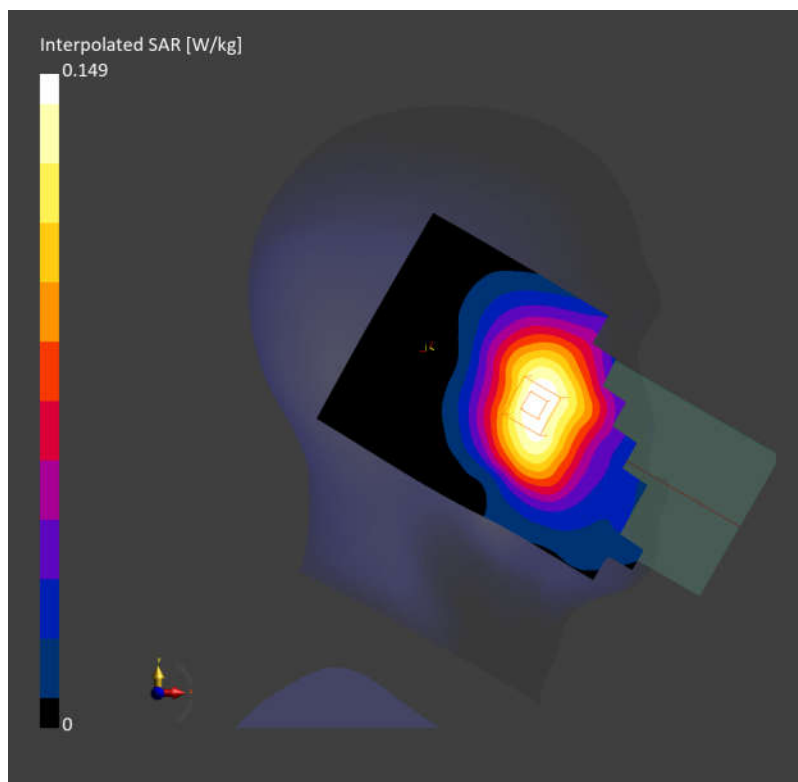

LTE Band 14 QPSK 10M 1RB0 23330CH Back side 10mm

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.291 W/kg; SAR (10g) = 0.196 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB


SAR (1g) = 0.301 W/kg; SAR (10g) = 0.192 W/kg;

M2/M1 [%]

83.9

Dist 3dB Peak [mm]

17.8

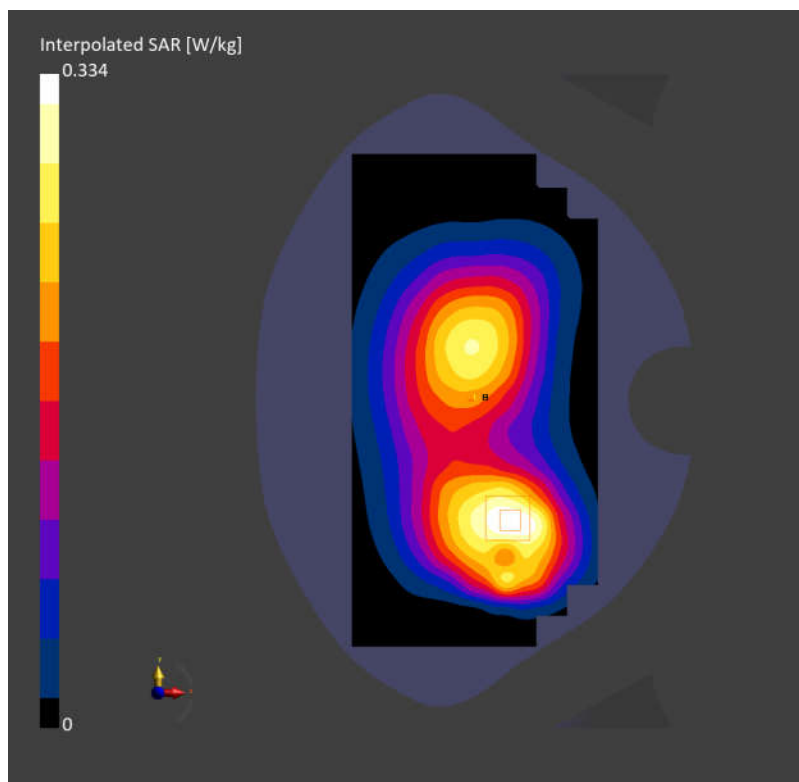

LTE Band 25 QPSK 20M 1RB0 26365CH Left cheek

Communication System: Band 25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.106 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB


SAR (1g) = 0.239 W/kg; SAR (10g) = 0.131 W/kg;

M2/M1 [%]

88.4

Dist 3dB Peak [mm]

7.6

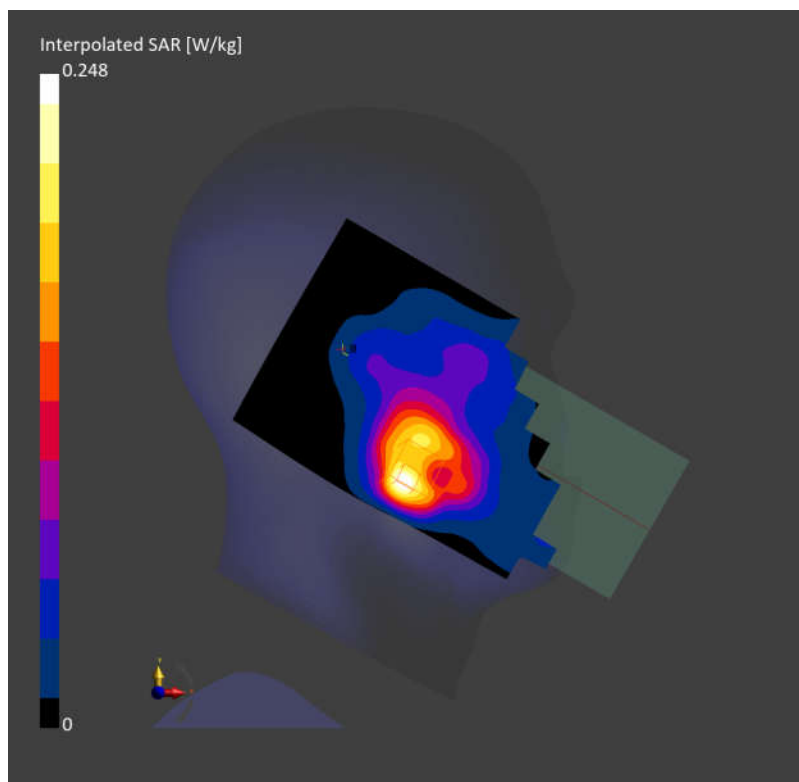

LTE Band 25 QPSK 20M 1RB0 26365CH Back side 10mm

Communication System: Band 25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.46, 7.77, 7.63); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.368 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB


SAR (1g) = 0.388 W/kg; SAR (10g) = 0.226 W/kg;

M2/M1 [%]

86.7

Dist 3dB Peak [mm]

13.0

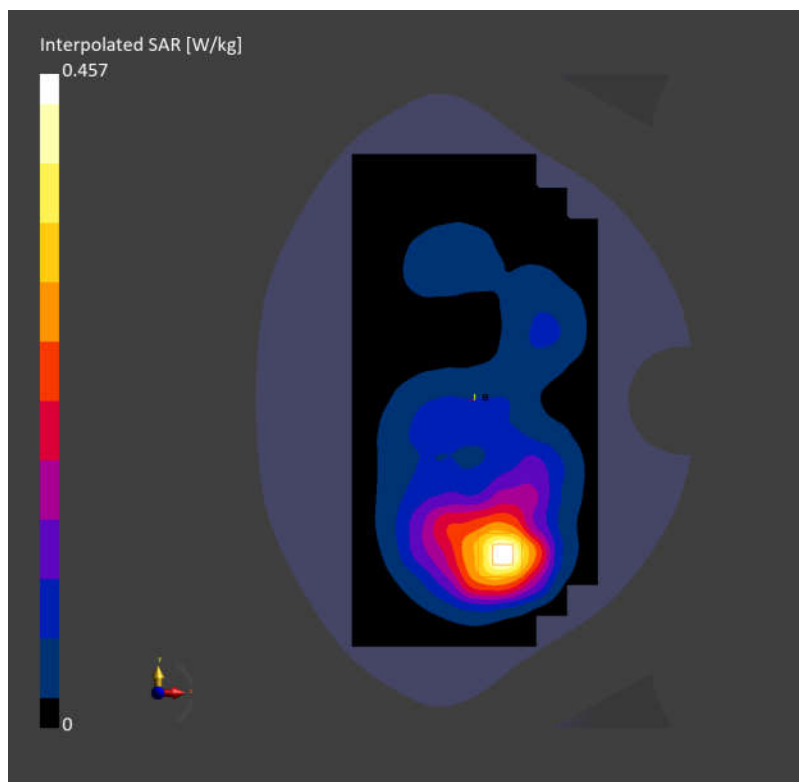

LTE Band 26 QPSK 15M 1RB0 26865CH Left cheek

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.067 W/kg; SAR (10g) = 0.045 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 0.074 W/kg; SAR (10g) = 0.055 W/kg;

M2/M1 [%]

95.6

Dist 3dB Peak [mm]

10.9

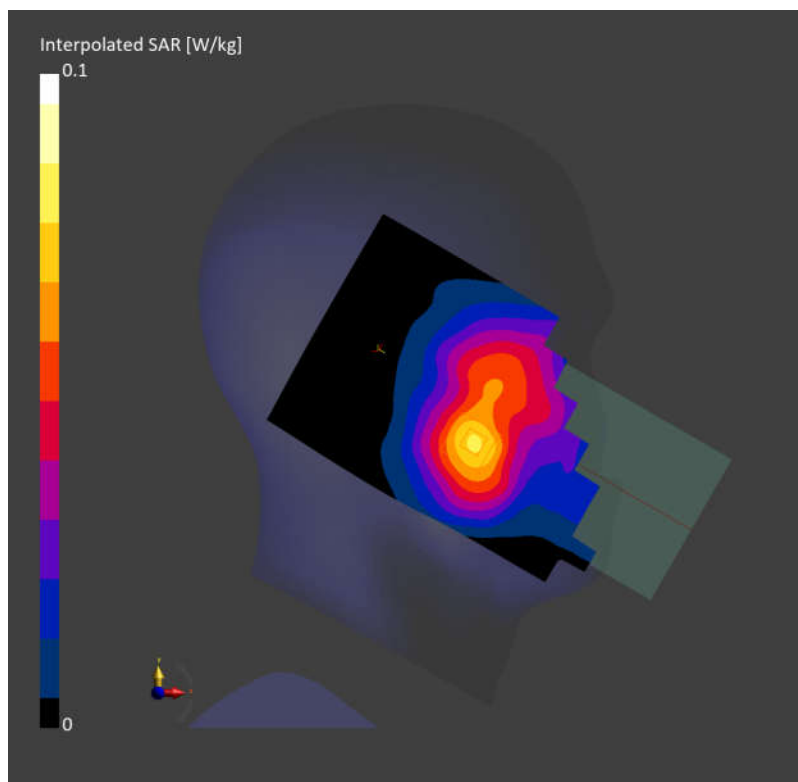

LTE Band 26 QPSK 15M 1RB0 26865CH Back side 10mm

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.1$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.27, 8.61, 8.46); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.265 W/kg; SAR (10g) = 0.180 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB


SAR (1g) = 0.277 W/kg; SAR (10g) = 0.191 W/kg;

M2/M1 [%]

87.0

Dist 3dB Peak [mm]

9.7

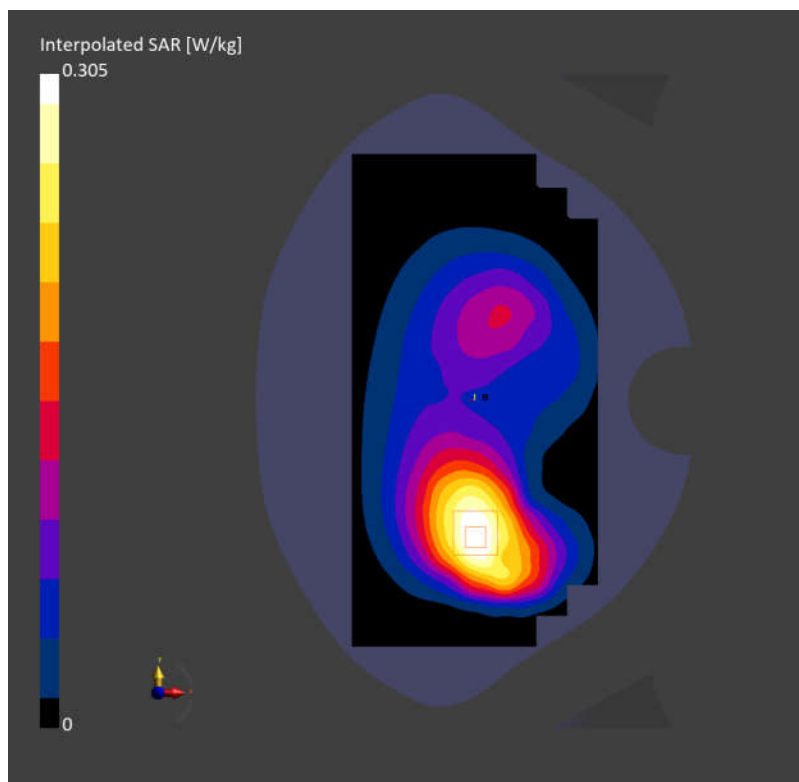

LTE Band 30 QPSK 10M 1RB0 27710CH Left cheek

Communication System: Band 30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 38.6$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.05, 7.34, 7.21); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 0.162 W/kg; SAR (10g) = 0.098 W/kg;

M2/M1 [%]

86.6

Dist 3dB Peak [mm]

13.7

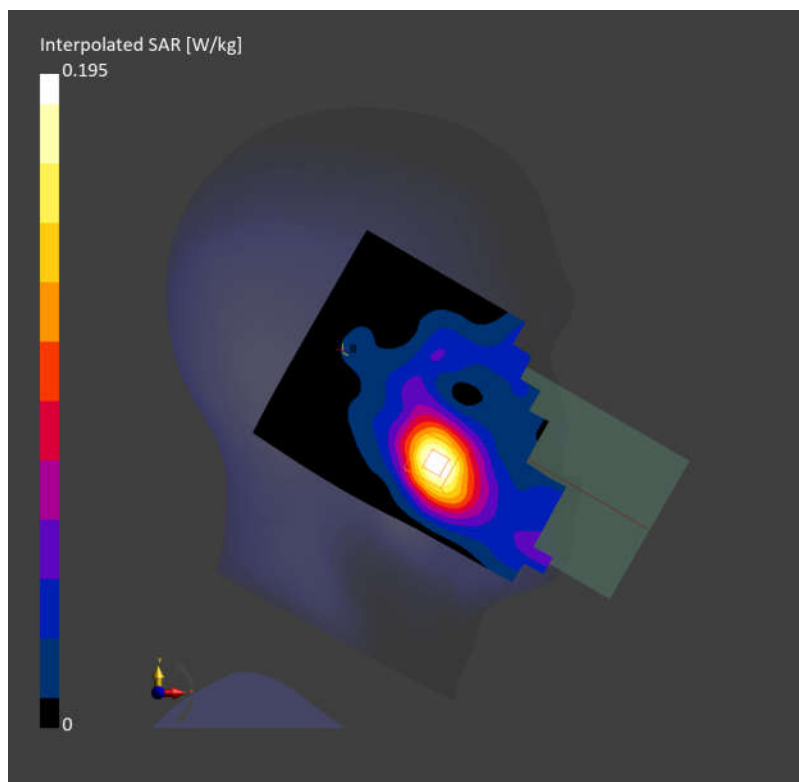

LTE Band 30 QPSK 10M 1RB0 27710CH Front side 10mm

Communication System: Band 30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 38.6$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.05, 7.34, 7.21); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.437 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB


SAR (1g) = 0.442 W/kg; SAR (10g) = 0.267 W/kg;

M2/M1 [%]

87.3

Dist 3dB Peak [mm]

13.7

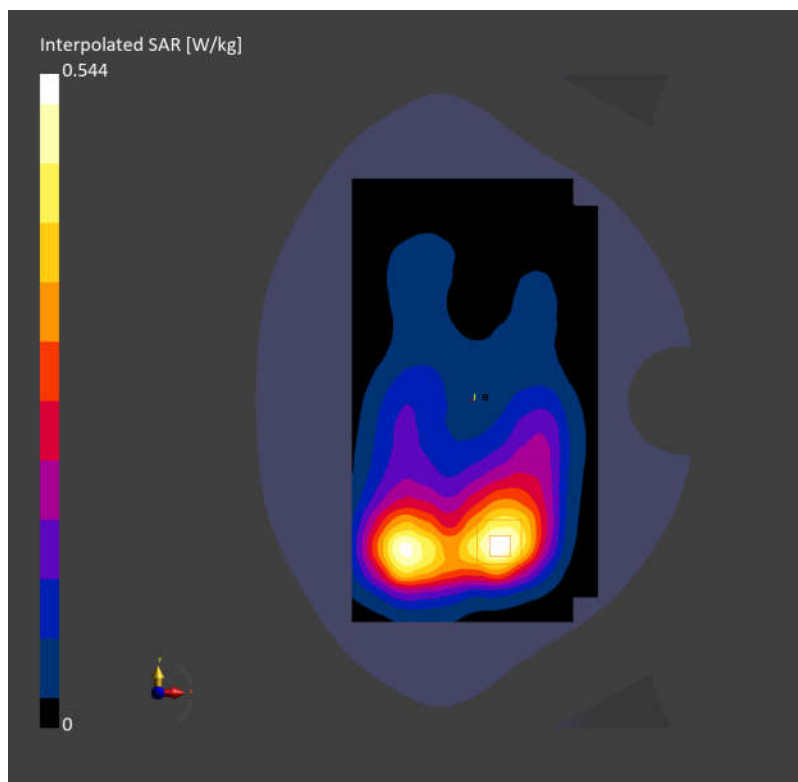

LTE Band 40 QPSK 20M 1RB0 39150CH Left cheek

Communication System: Band 40; Frequency: 2350.000

Medium: HSL. Medium parameters used: $f = 2350.000$ MHz; $\sigma = 1.67$ S/m; $\epsilon_r = 38.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.05, 7.34, 7.21); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.062 W/kg; SAR (10g) = 0.035 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB


SAR (1g) = 0.065 W/kg; SAR (10g) = 0.039 W/kg;

M2/M1 [%]

87.2

Dist 3dB Peak [mm]

13.7

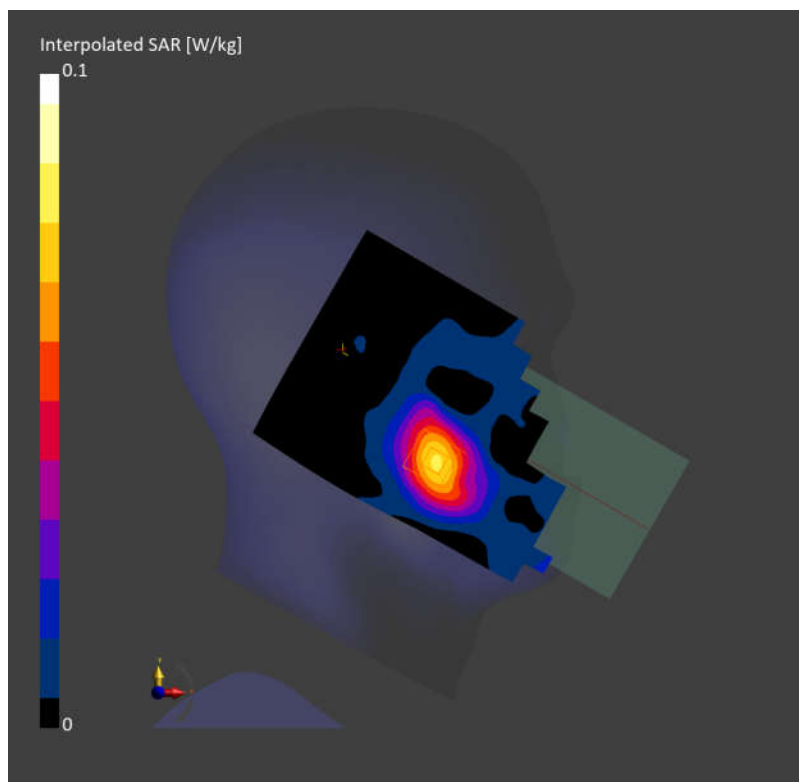

LTE Band 40 QPSK 20M 1RB0 39150CH Front side 10mm

Communication System: Band 40; Frequency: 2350.000

Medium: HSL. Medium parameters used: $f = 2350.000$ MHz; $\sigma = 1.67$ S/m; $\epsilon_r = 38.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.05, 7.34, 7.21); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.198 W/kg; SAR (10g) = 0.109 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB


SAR (1g) = 0.204 W/kg; SAR (10g) = 0.114 W/kg;

M2/M1 [%]

84.8

Dist 3dB Peak [mm]

14.2

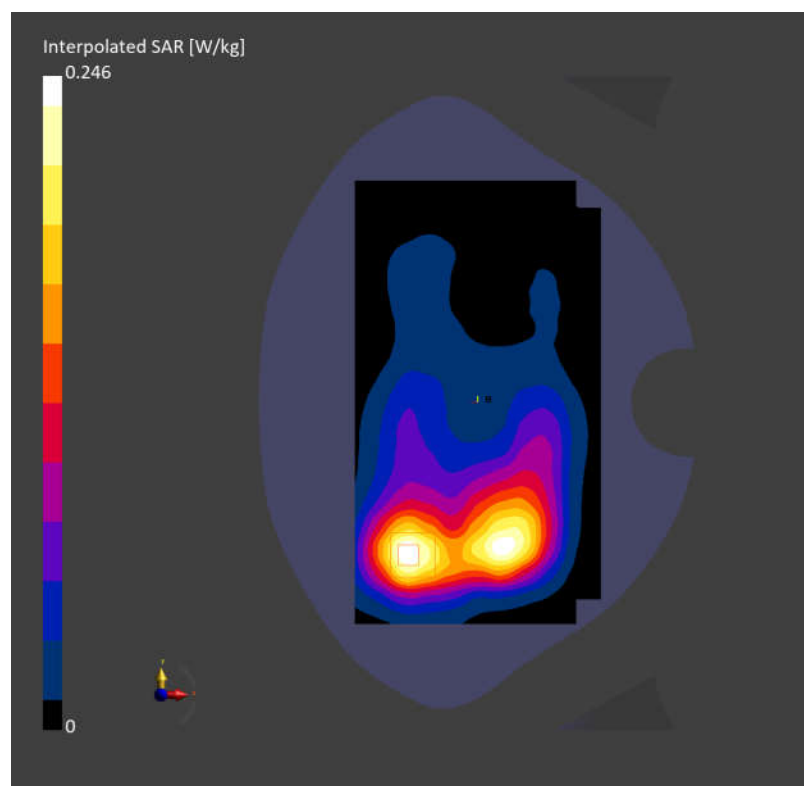

LTE Band 41 QPSK 20M 1RB0 40620CH Left cheek

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.024 W/kg; SAR (10g) = 0.013 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.024 W/kg; SAR (10g) = 0.013 W/kg;

M2/M1 [%]

88.9

Dist 3dB Peak [mm]

8.1

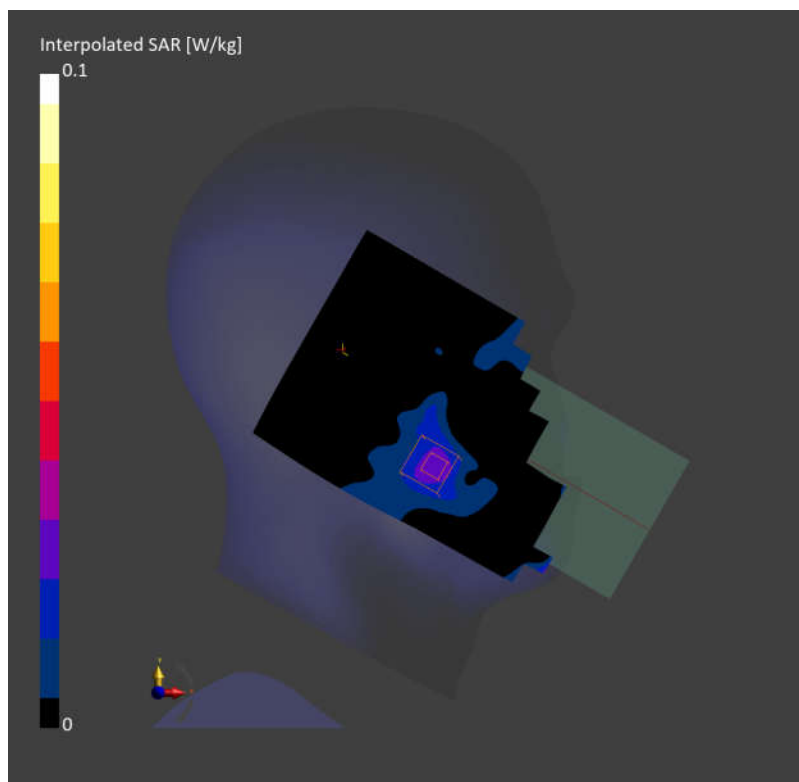

LTE Band 41 QPSK 20M 1RB0 40620CH Back side 10mm

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.348 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB


SAR (1g) = 0.772 W/kg; SAR (10g) = 0.357 W/kg;

M2/M1 [%]

84.1

Dist 3dB Peak [mm]

9.9

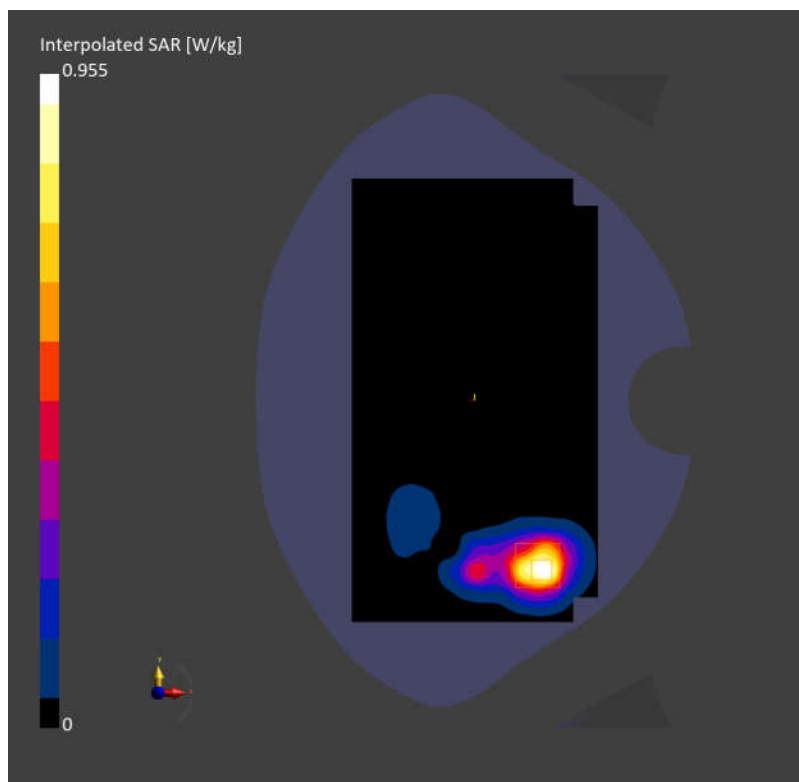

LTE Band 41 QPSK 20M 1RB0 40620CH Left side 10mm

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.78, 7.05, 6.93); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.822 W/kg; SAR (10g) = 0.387 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB


SAR (1g) = 0.877 W/kg; SAR (10g) = 0.416 W/kg;

M2/M1 [%]

83.2

Dist 3dB Peak [mm]

10.0

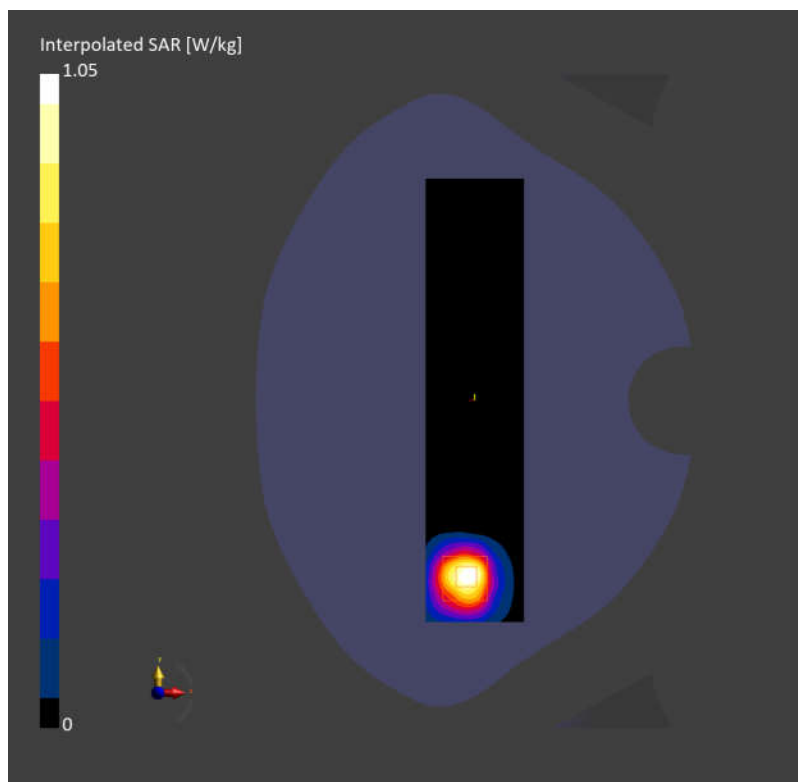

LTE Band 66 QPSK 20M 1RB0 132322CH Left cheek

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.2$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.63, 7.94, 7.8); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.237 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB


SAR (1g) = 0.254 W/kg; SAR (10g) = 0.171 W/kg;

M2/M1 [%]

91.1

Dist 3dB Peak [mm]

14.4

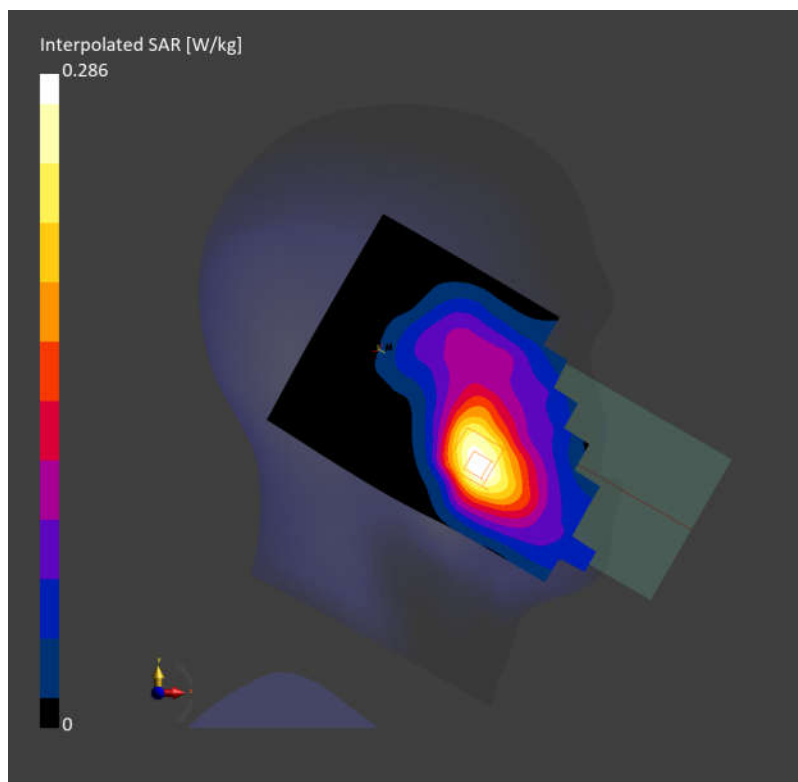

LTE Band 66 QPSK 20M 1RB0 132322CH Back side 10mm

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.2$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(7.63, 7.94, 7.8); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.634 W/kg; SAR (10g) = 0.367 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.733 W/kg; SAR (10g) = 0.407 W/kg;

M2/M1 [%]

85.1

Dist 3dB Peak [mm]

10.8

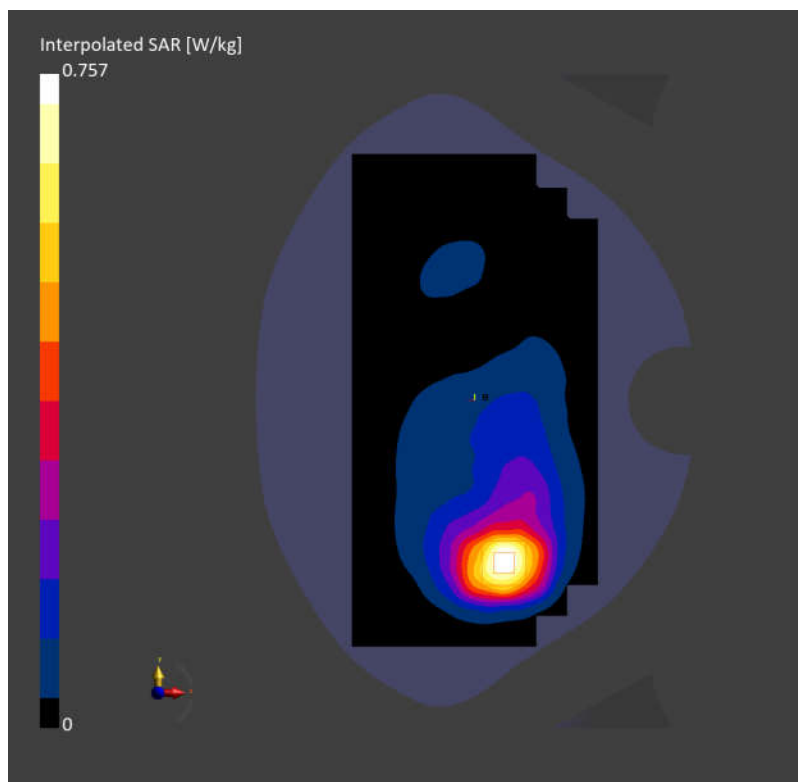

LTE Band 71 QPSK 20M 1RB0 133322CH Left cheek

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.096 W/kg; SAR (10g) = 0.068 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB


SAR (1g) = 0.103 W/kg; SAR (10g) = 0.084 W/kg;

M2/M1 [%]

98.2

Dist 3dB Peak [mm]

> 16.0

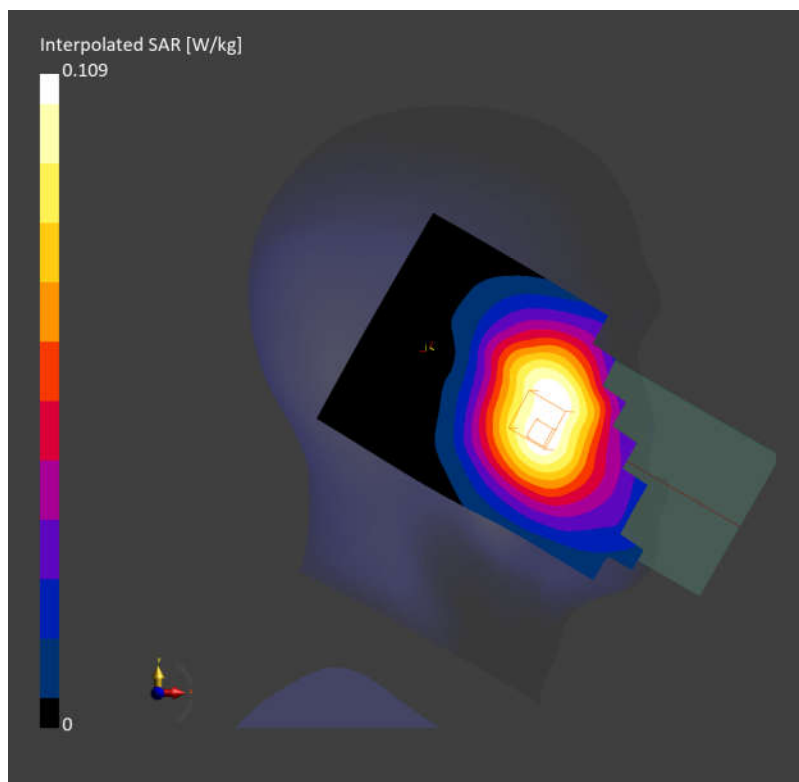

LTE Band 71 QPSK 20M 1RB0 133322CH Back side 10mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(8.46, 8.81, 8.65); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.254 W/kg; SAR (10g) = 0.182 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 0.275 W/kg; SAR (10g) = 0.211 W/kg;

M2/M1 [%]

90.1

Dist 3dB Peak [mm]

> 16.0

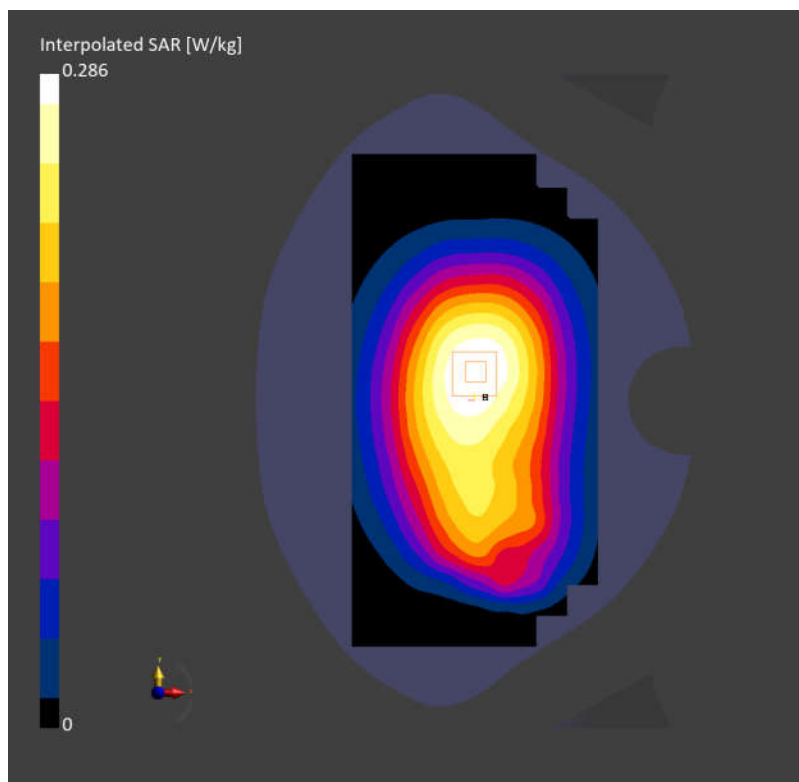

WIFI2.4G 802.11b 6CH Left cheek

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f=2437.000$ MHz; $\sigma=1.83$ S/m; $\epsilon_r=39.3$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.328 W/kg; SAR (10g) = 0.162 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.11 dB


SAR (1g) = 0.342 W/kg; SAR (10g) = 0.178 W/kg;

M2/M1 [%]

85.2

Dist 3dB Peak [mm]

8.6

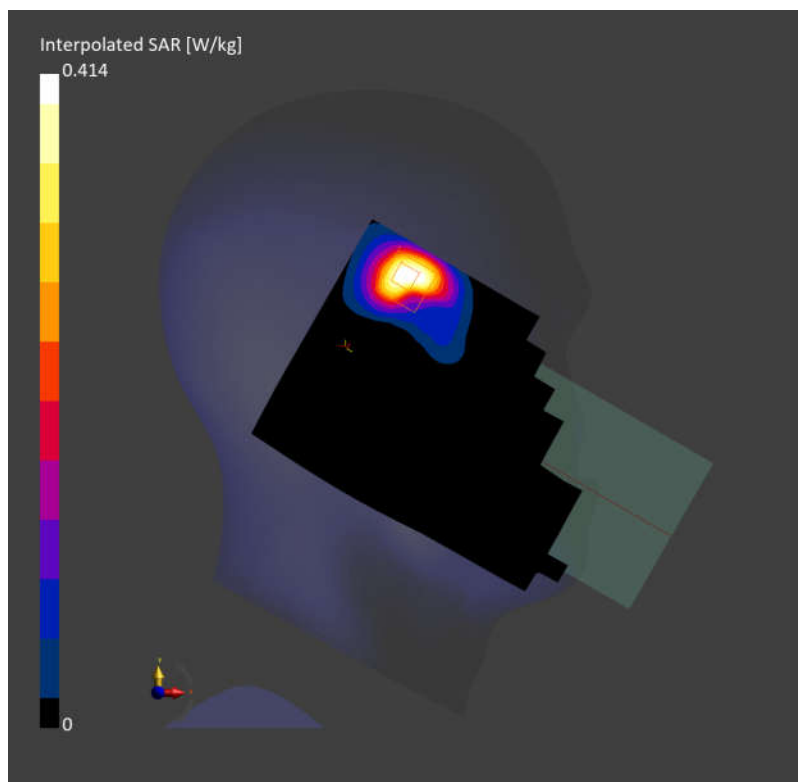

WIFI2.4G 802.11b 6CH Back side 10mm

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.3$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.200 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB


SAR (1g) = 0.219 W/kg; SAR (10g) = 0.115 W/kg;

M2/M1 [%]

84.7

Dist 3dB Peak [mm]

11.0

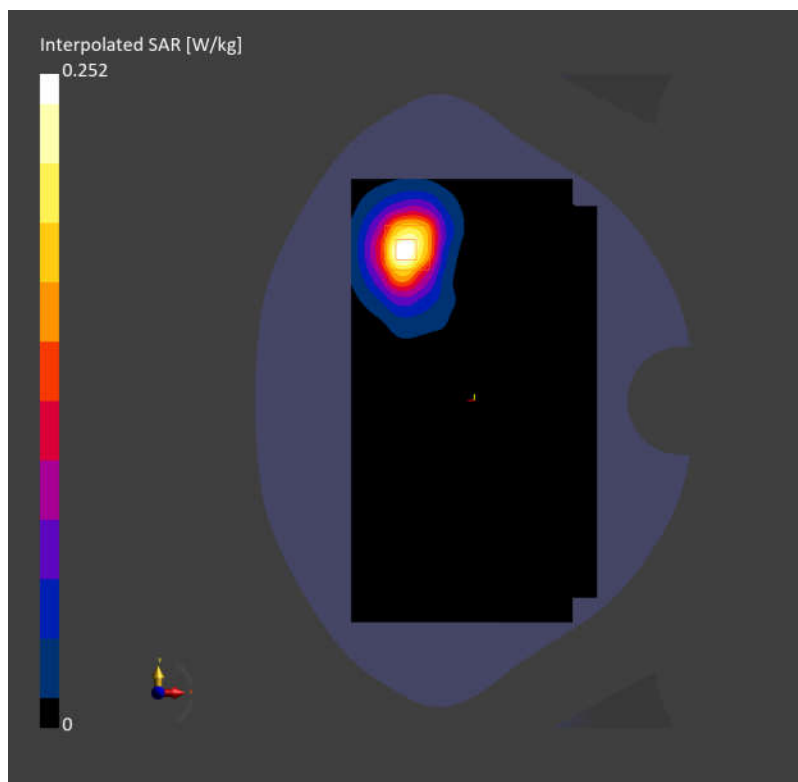

WIFI2.4G 802.11b 6CH Right side 10mm

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.3$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.190 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.07 dB


SAR (1g) = 0.425 W/kg; SAR (10g) = 0.197 W/kg;

M2/M1 [%]

82.5

Dist 3dB Peak [mm]

8.0

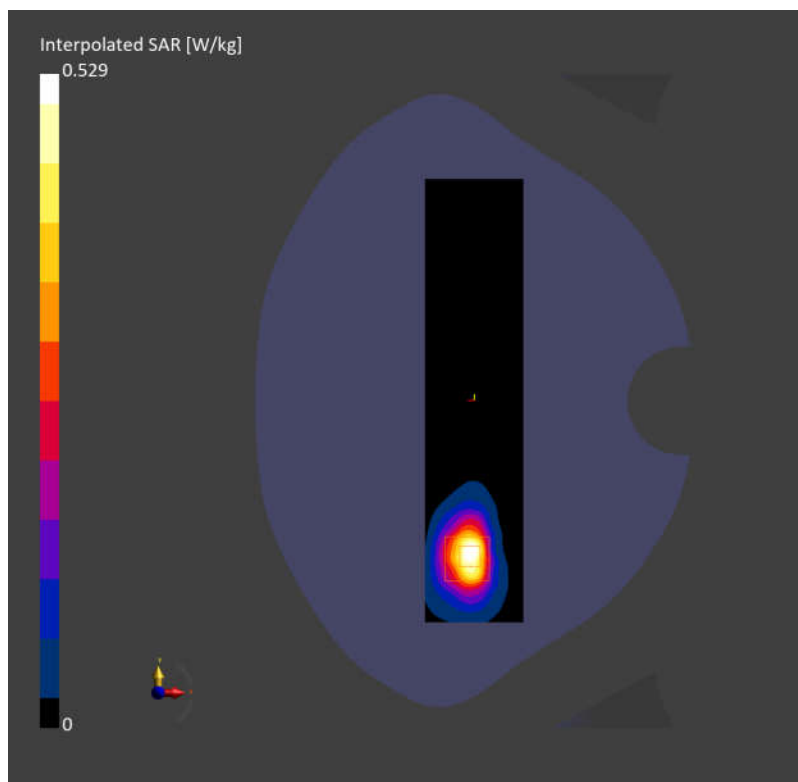

WIFI5G 802.11a 60CH Right tilted

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.81$ S/m; $\epsilon_r = 36.5$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.39, 5.61, 5.51); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.117 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB


SAR (1g) = 0.304 W/kg; SAR (10g) = 0.112 W/kg;

M2/M1 [%]

65.6

Dist 3dB Peak [mm]

8.6

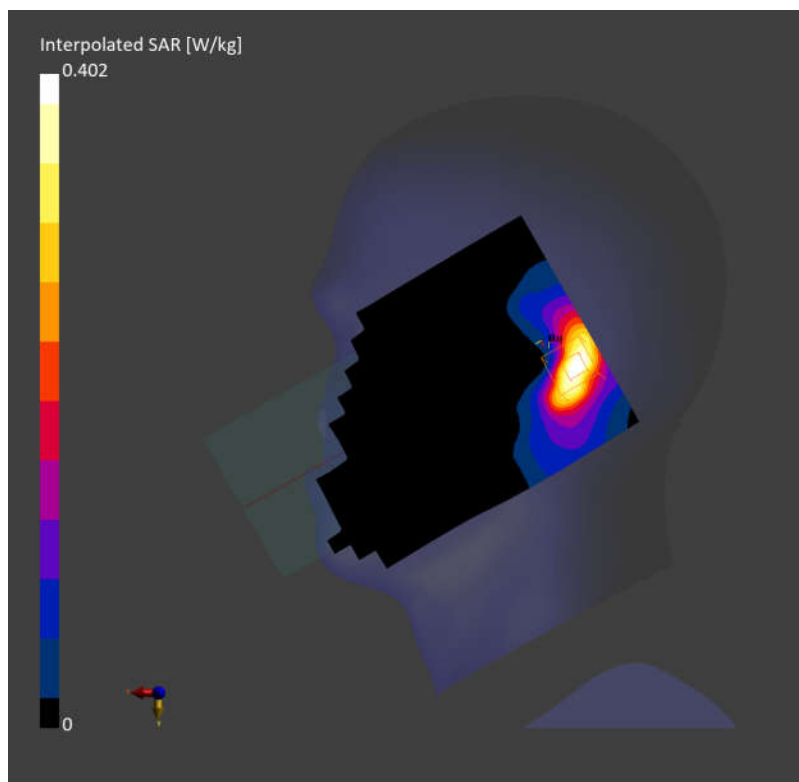

WIFI5G 802.11a 116CH Back side 10mm

Communication System: WLAN 5GHz; Frequency: 5580.000

Medium: HSL. Medium parameters used: $f=5580.000$ MHz; $\sigma=5.04$ S/m; $\epsilon_r=35.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.14, 5.35, 5.25); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.357 W/kg; SAR (10g) = 0.157 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB


SAR (1g) = 0.377 W/kg; SAR (10g) = 0.162 W/kg;

M2/M1 [%]

59.5

Dist 3dB Peak [mm]

14.5

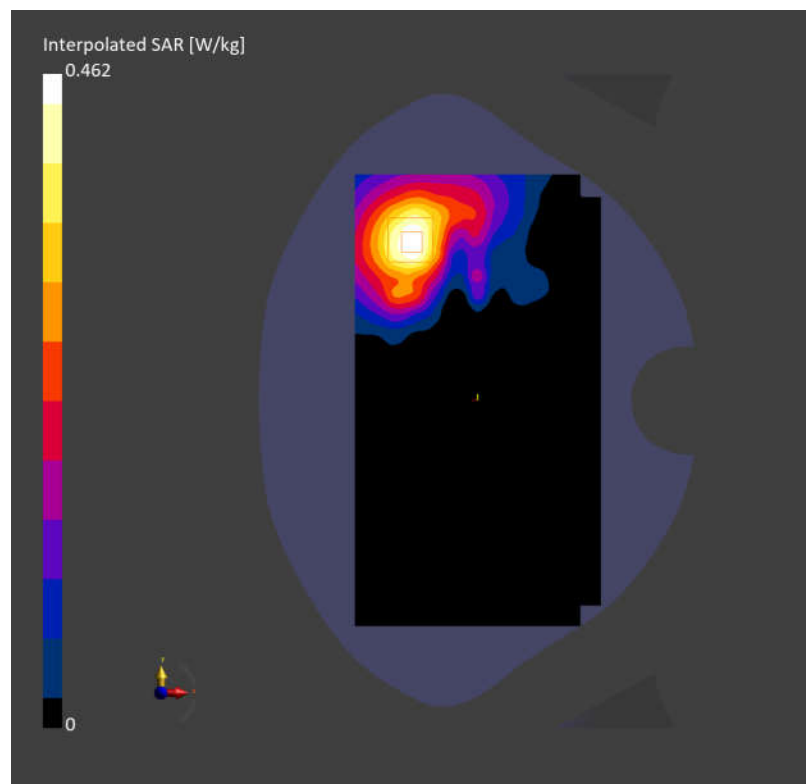

WIFI5G 802.11ac VHT40 46CH Right side 10mm

Communication System: WLAN 5GHz; Frequency: 5230.000

Medium: HSL. Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 36.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.57, 5.79, 5.69); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (60.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.539 W/kg; SAR (10g) = 0.214 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB


SAR (1g) = 0.546 W/kg; SAR (10g) = 0.220 W/kg;

M2/M1 [%]

63.6

Dist 3dB Peak [mm]

9.6

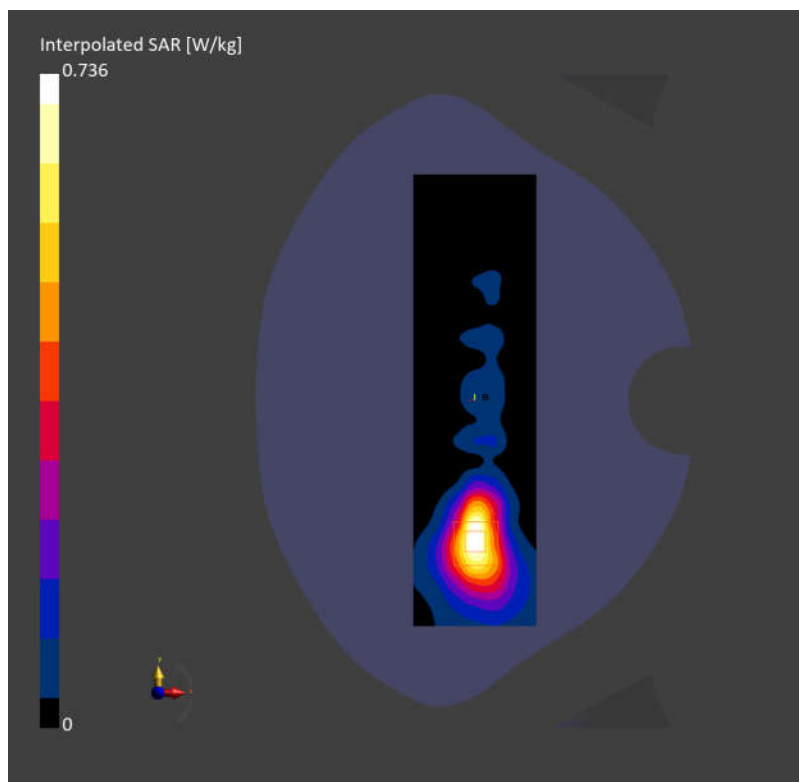

WIFI5G 802.11a 60CH Right side 0mm

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.81$ S/m; $\epsilon_r = 36.5$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(5.39, 5.61, 5.51); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (60.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.89 W/kg; SAR (10g) = 1.91 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB


SAR (1g) = 8.97 W/kg; SAR (10g) = 2.18 W/kg;

M2/M1 [%]

60.3

Dist 3dB Peak [mm]

5.0

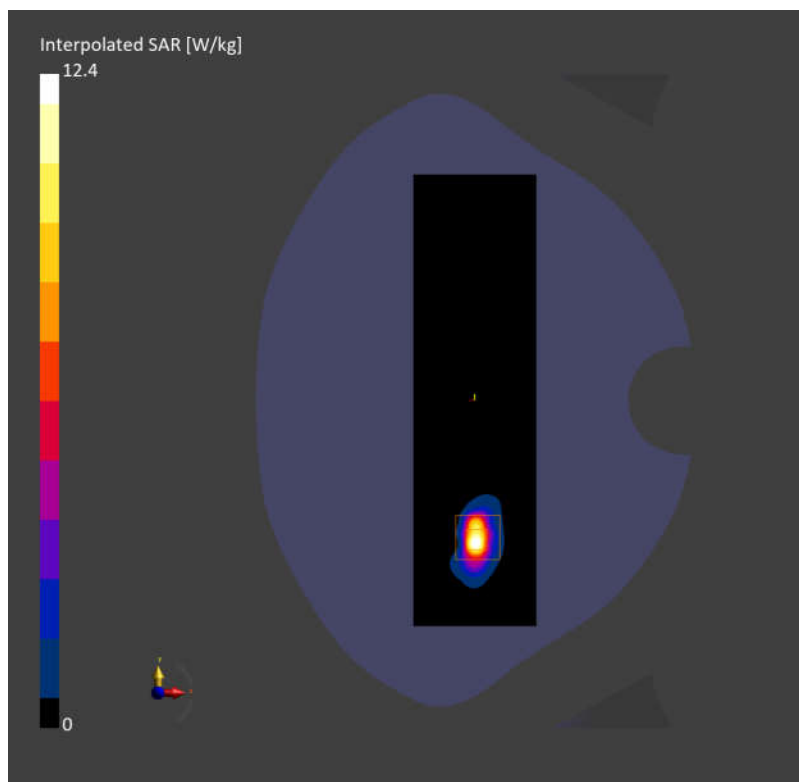

Bluetooth DH5 39CH Left cheek

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.078 W/kg; SAR (10g) = 0.037 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB


SAR (1g) = 0.078 W/kg; SAR (10g) = 0.040 W/kg;

M2/M1 [%]

84.7

Dist 3dB Peak [mm]

7.9

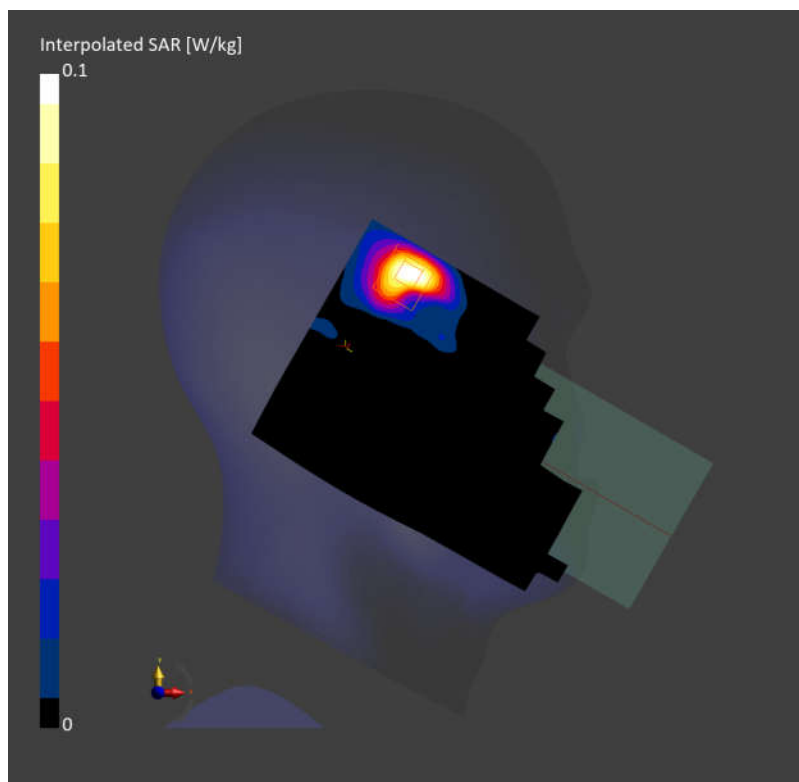

Bluetooth DH5 39CH Back side 10mm

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.046 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB


SAR (1g) = 0.047 W/kg; SAR (10g) = 0.024 W/kg;

M2/M1 [%]

83.9

Dist 3dB Peak [mm]

10.3

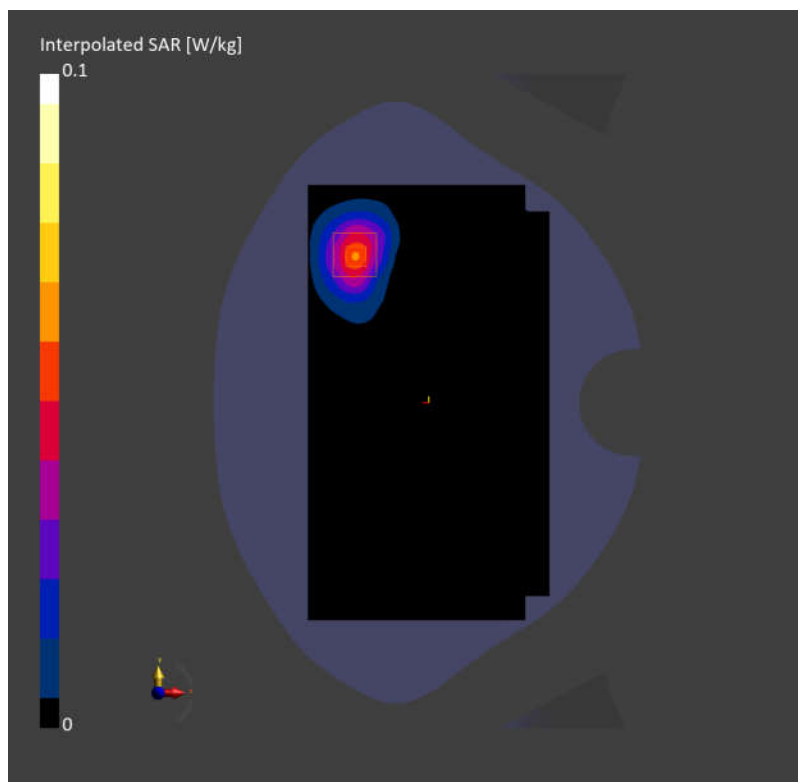

Bluetooth DH5 39CH Right side 10mm

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(6.91, 7.19, 7.06); Calibrated: 2025-01-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.102 W/kg; SAR (10g) = 0.043 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB


SAR (1g) = 0.107 W/kg; SAR (10g) = 0.049 W/kg;

M2/M1 [%]

81.9

Dist 3dB Peak [mm]

8.0

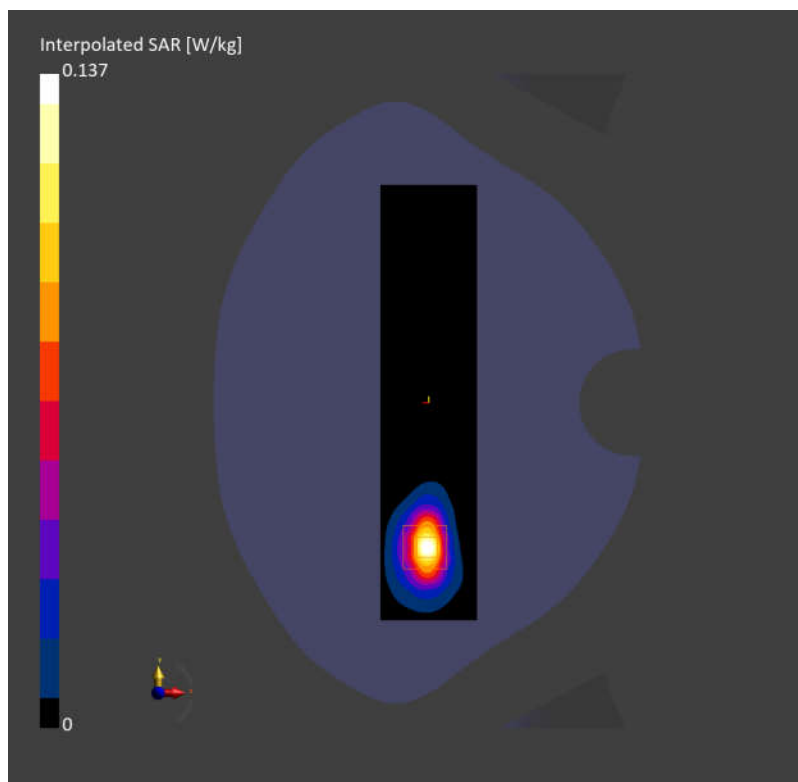


NFC 13.56MHz Back side 0mm

Communication System: Custom Band; Frequency: 13.600
Medium: HSL. Medium parameters used: $f=13.600\text{ MHz}$; $\sigma=0.784\text{ S/m}$; $\epsilon_r=53.0$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7735; ConvF(13.68, 13.51, 13.73); Calibrated: 2025-01-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn1740; Calibrated: 2025-02-17
 - Phantom: ELI V4.0 (20deg probe tilt); Serial: 1123
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.124 W/kg; SAR (10g) = 0.082 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.113 W/kg; SAR (10g) = 0.064 W/kg;
M2/M1 [%] 61.3
Dist 3dB Peak [mm] 6.5

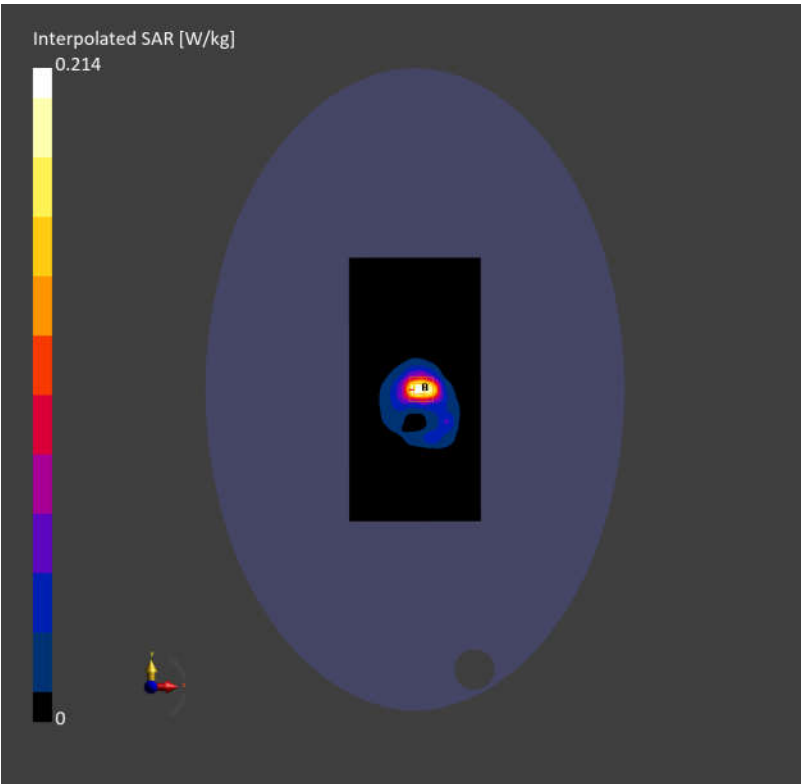



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400033708
Rev.: 01
Page: 47 of 47

- End of the Appendix -

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn