



No. 25T04Z100480-001

For

Shanghai Sunmi Technology Co.,Ltd.

Smart POS System

Model Name: T6F10

with

Hardware Version: V1.0(LA+EU)

Software Version: V3.0.0

FCC ID: 2AH25T6F10

Issued Date: 2025-05-26

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

Test Configuration Photos

Test positions for Body:

According to the antenna position, the Body SAR is tested at the following 5 test positions all with the distance =5mm between the EUT and the phantom bottom:



Figure 1-1 Front Side mode



Figure 1-2 Back Side mode



Figure 1-3 Left Side mode

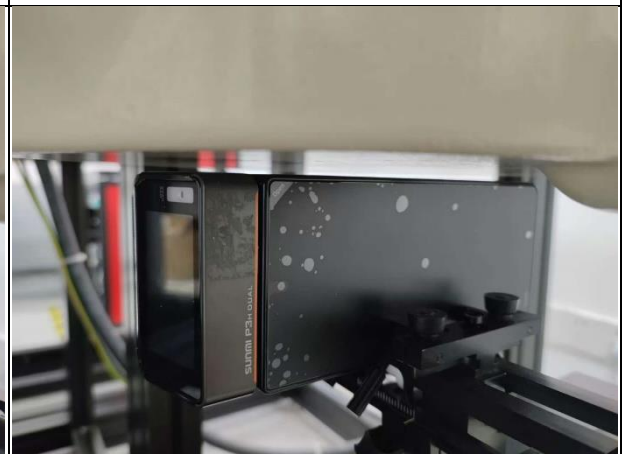


Figure 1-4 Right Side mode

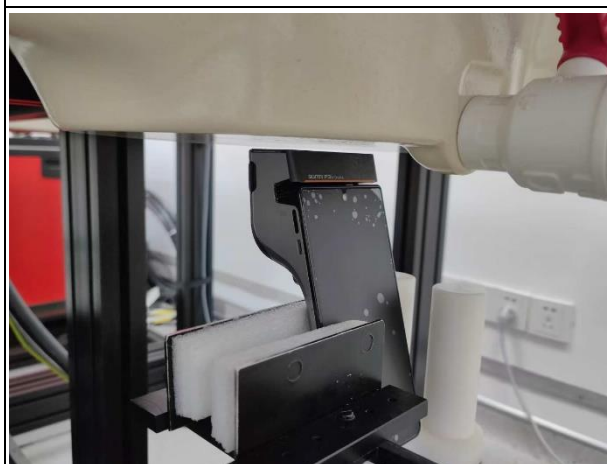


Figure 1-5 Top Side mode

Test positions for Limb:

According to the antenna position, the Limb SAR is tested at the following 7 test positions all with the distance =0mm between the EUT and the phantom bottom:



Figure 1-6 Front Side mode



Figure 1-7 Back Side mode



Figure 1-8 Left Side mode

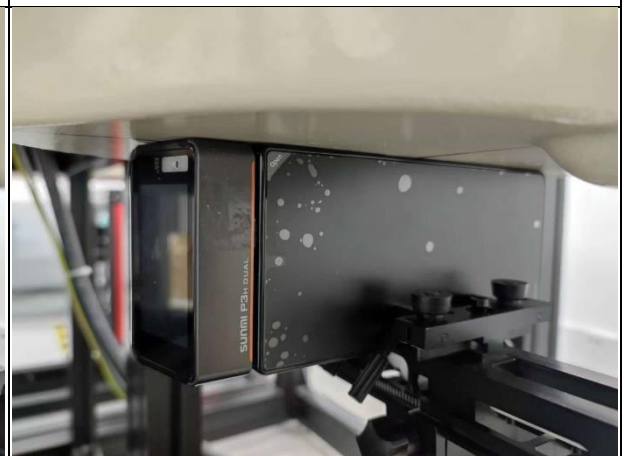


Figure 1-9 Right Side mode

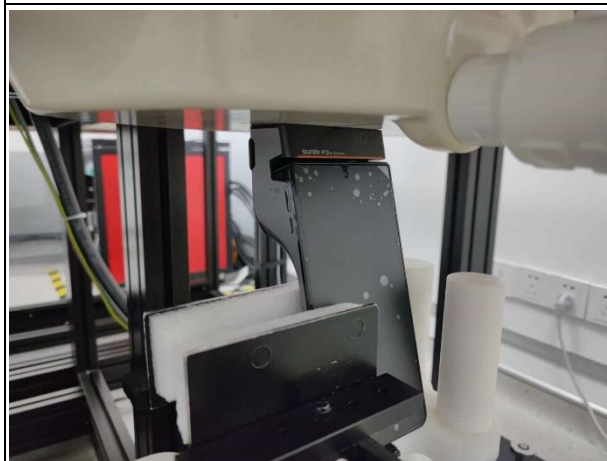


Figure 1-10 Top Side mode



Figure 1-11 Back Side-2 mode



Figure 1-12 Back Side-3 mode

Test positions for sensor triggering minus 1 mm:

The sensor triggering minus 1 mm SAR is tested at the following 1 test positions with the distance =16mm between the EUT and the phantom bottom:


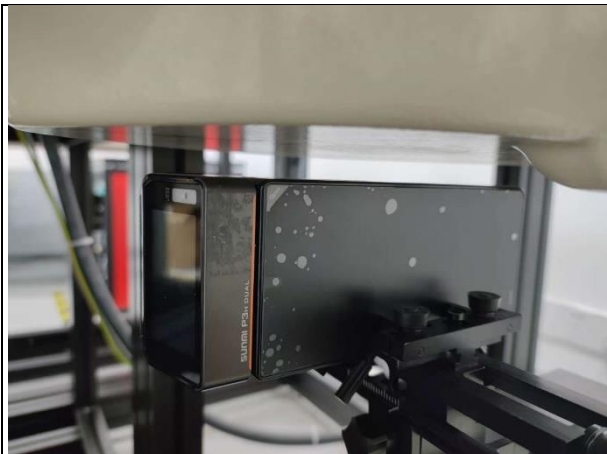


Figure 1-13 Right Side mode 16mm

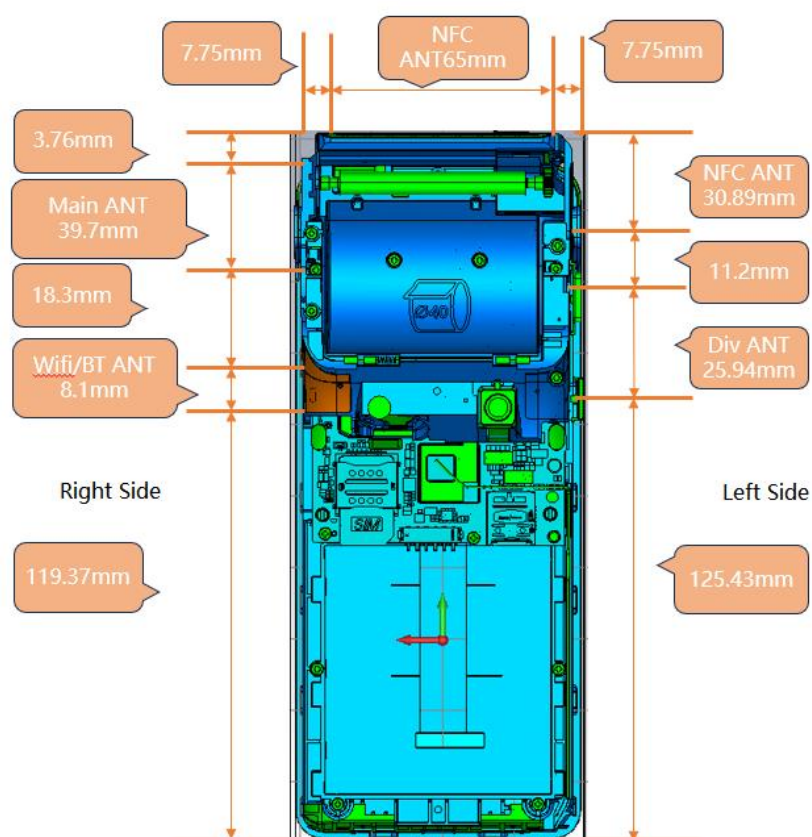

Antenna	Mode
Main ANT	TX: GSM/WCDMA/LTE
Wi-Fi/BT ANT	TX: Wi-Fi 2.4GHz/Wi-Fi 5GHz/BT

Picture 1-14: Antenna Locations