



Report No.: SUCR260700069008
Page: 1 of 34

Appendix B

Detailed Test Results

1. WCDMA
WCDMA Band II
WCDMA Band IV
WCDMA Band V
2. LTE
LTE Band 7
LTE Band 12
LTE Band 13
LTE Band 14
LTE Band 25
LTE Band 26
LTE Band 41
LTE Band 66
LTE Band 71
3. WIFI
WIFI 2.4G
WIFI 5G
4. BT
BT

Test Laboratory: SGS-SAR Lab

WCDMA II RMC 9538CH Right side 5mm

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.55, 7.55, 7.55); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.513 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.697 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.628 W/kg

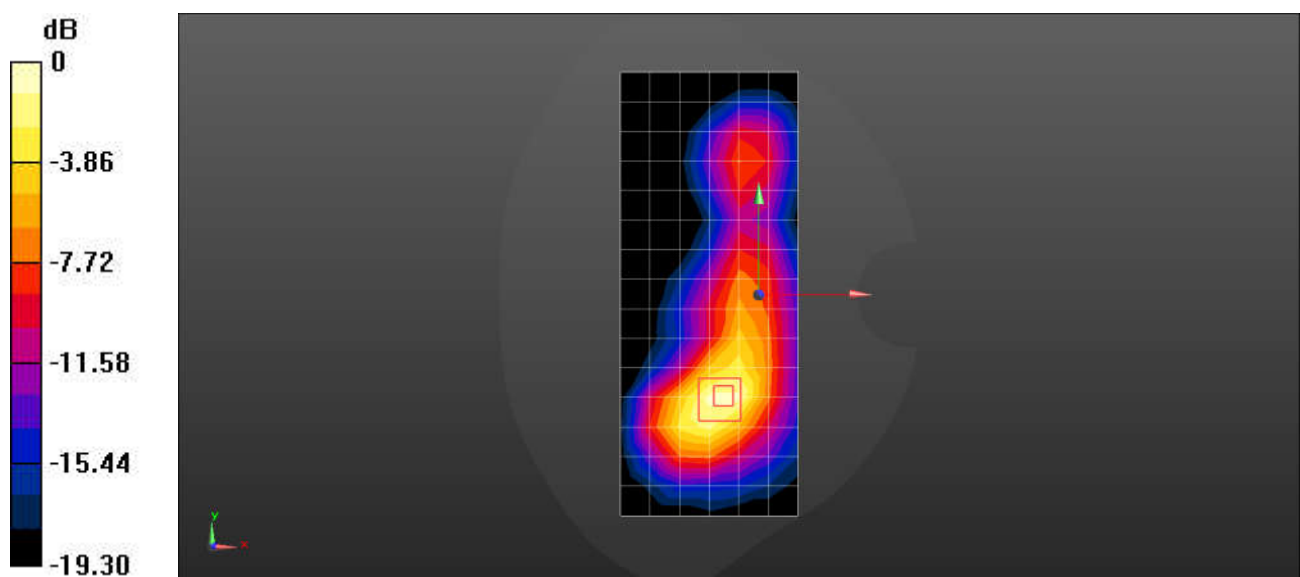

0 dB = 0.628 W/kg = -2.02 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA II RMC 9538CH Right side 0mm

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.55, 7.55, 7.55); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.75 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.770 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.545 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 1.72 W/kg

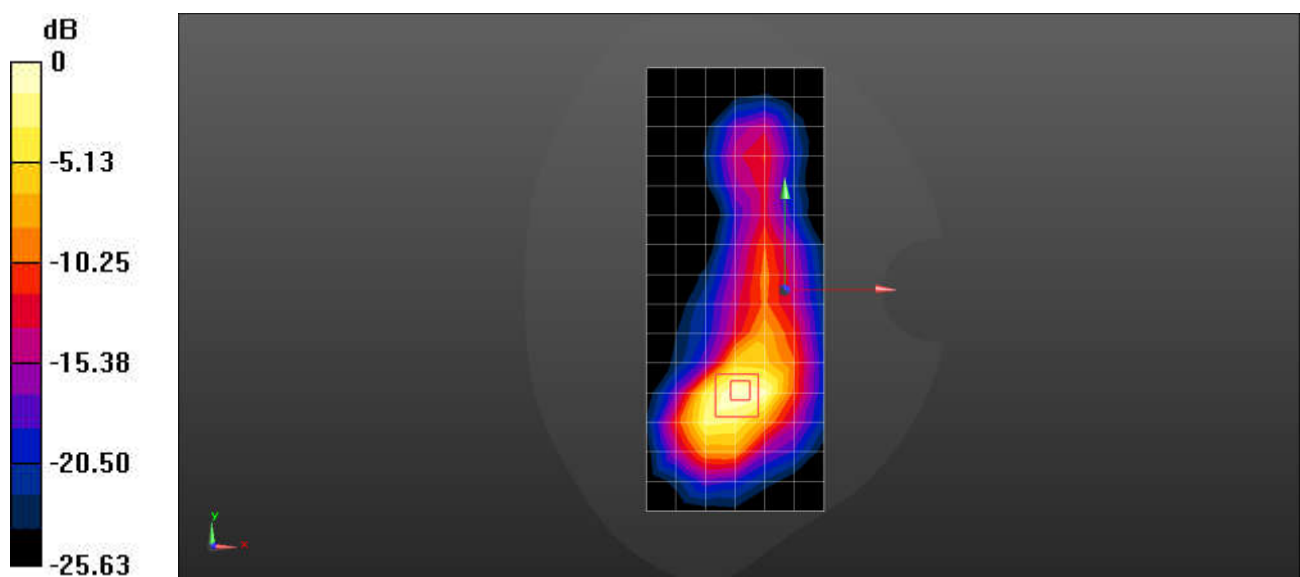

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA IV RMC 1312CH Right side 5mm

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 41.195$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.9, 7.9, 7.9); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.609 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.080 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.656 W/kg

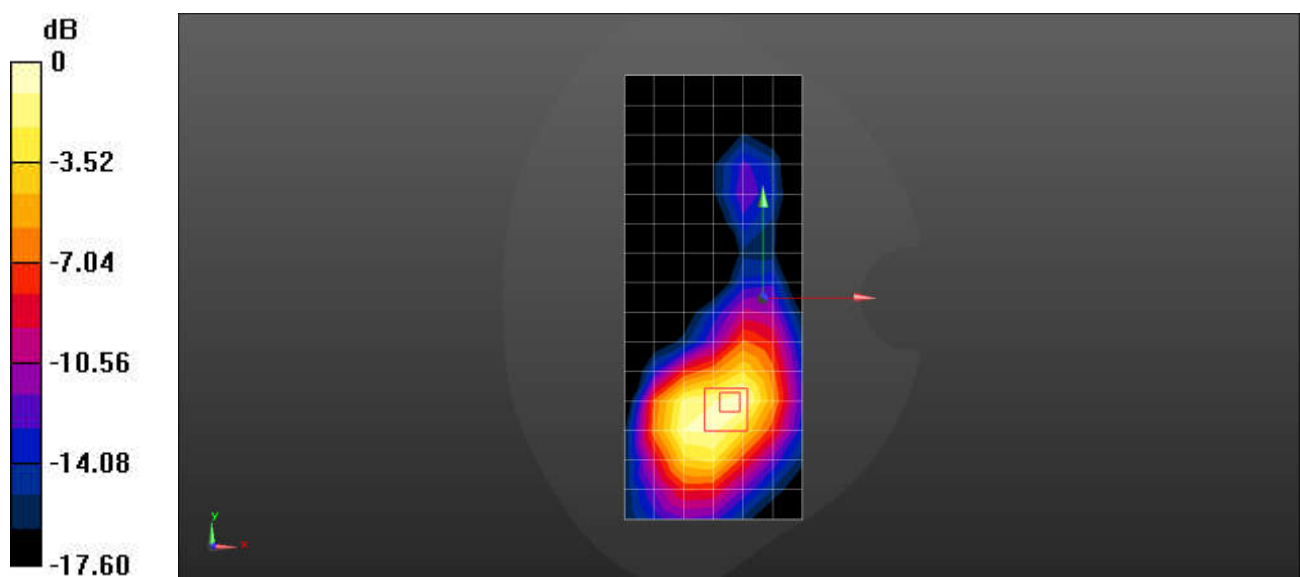

0 dB = 0.656 W/kg = -1.83 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA IV RMC 1513CH Right side 0mm

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1753$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 41.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.9, 7.9, 7.9); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.90 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.378 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.745 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 2.32 W/kg

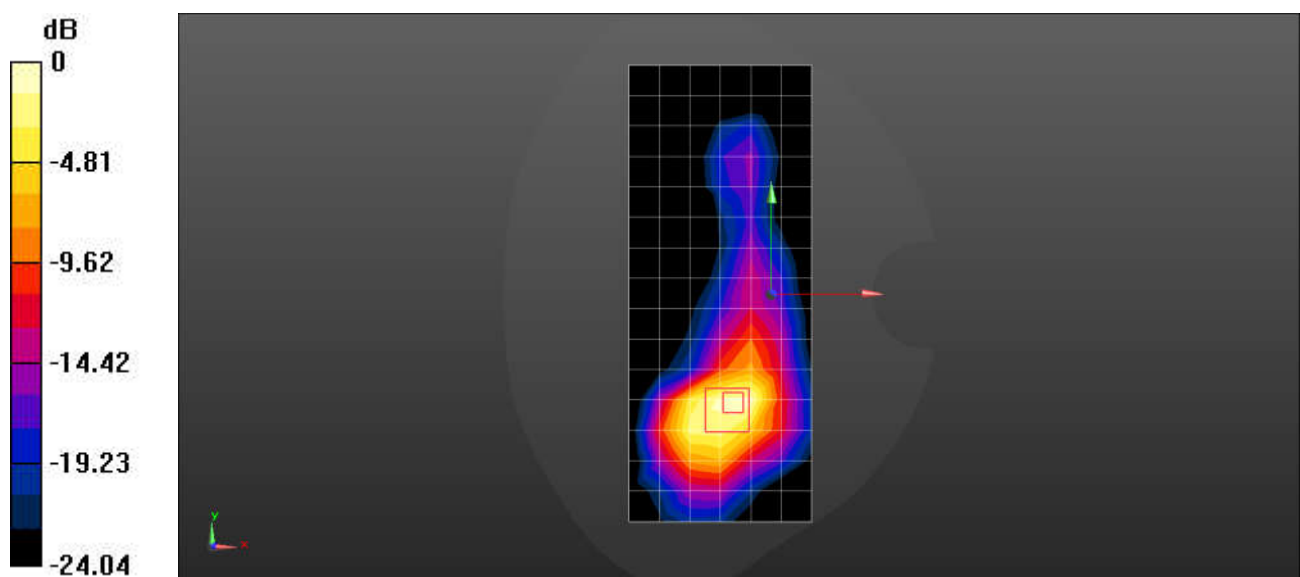

0 dB = 2.32 W/kg = 3.65 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA V RMC 4233CH Right side 5mm

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 847$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.98, 8.98, 8.98); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.760 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.43 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.803 W/kg

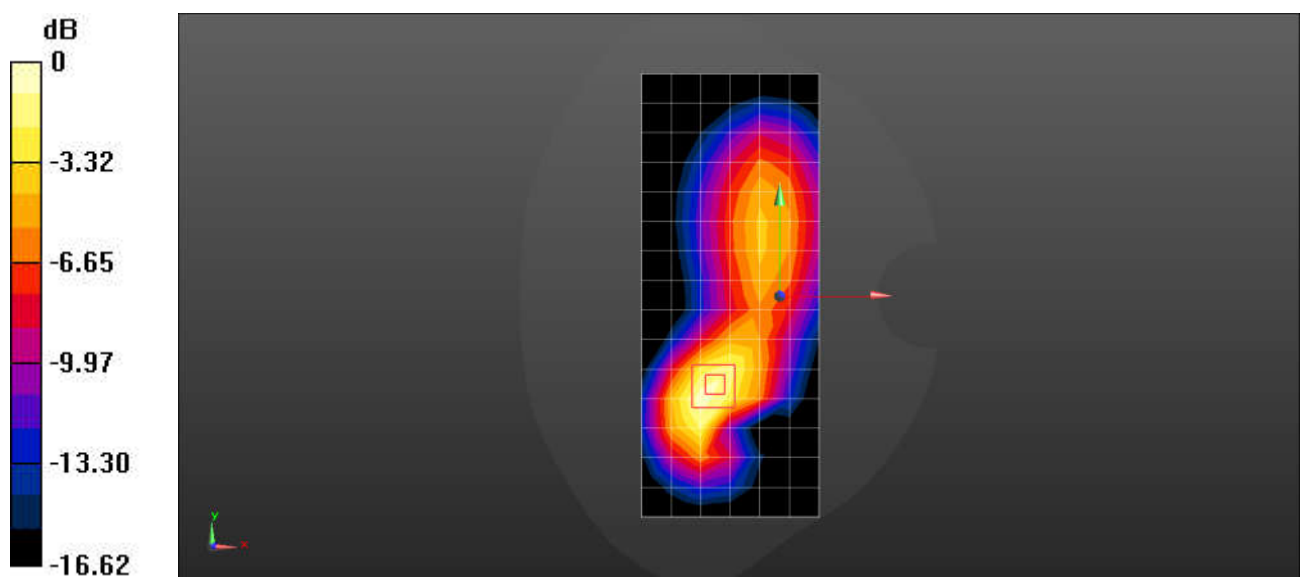

0 dB = 0.803 W/kg = -0.95 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA V RMC 4233CH Right side 0mm

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 847$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.98, 8.98, 8.98); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.24 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.484 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 1.5 W/kg; SAR(10 g) = 0.776 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 2.50 W/kg

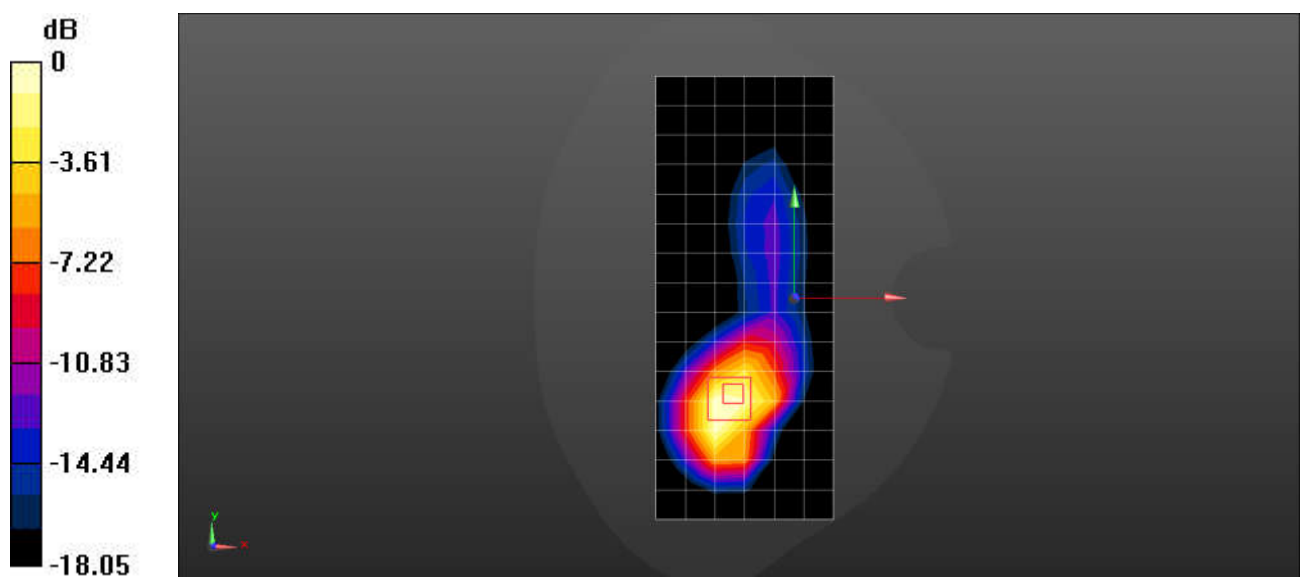

0 dB = 2.50 W/kg = 3.98 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 7 20M QPSK 1RB0 21350CH Front side 5mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2560$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.96, 6.96, 6.96); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.450 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.775 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.520 W/kg

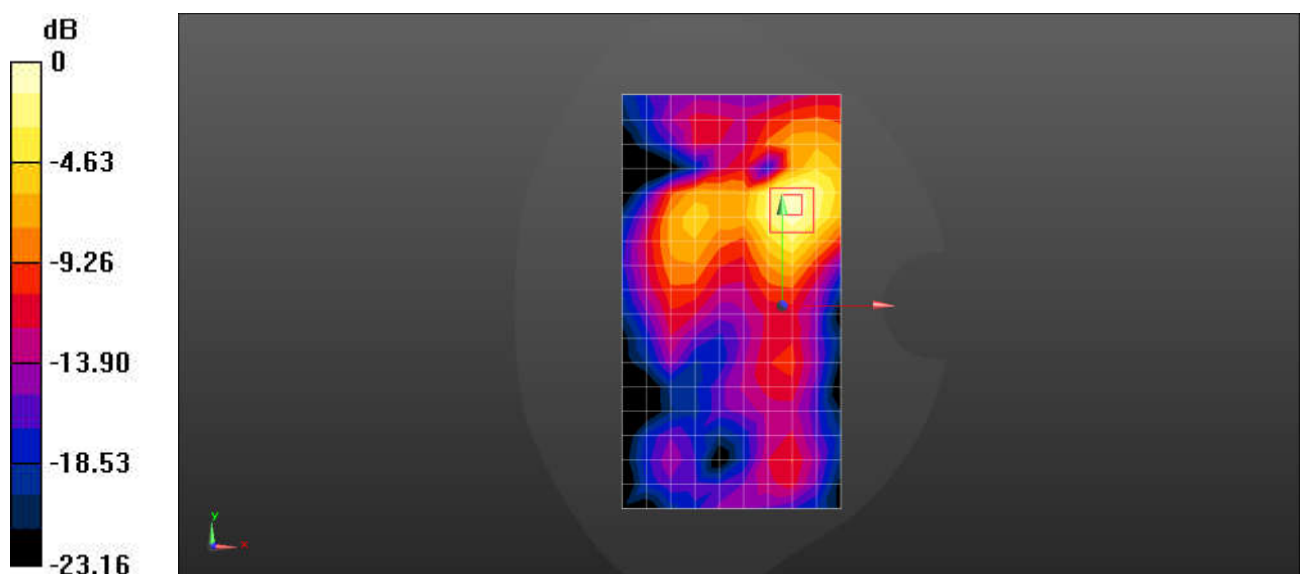

0 dB = 0.520 W/kg = -2.84 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 7 20M QPSK 1RB0 20850CH Front side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 38.593$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.20 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4820 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.11 W/kg

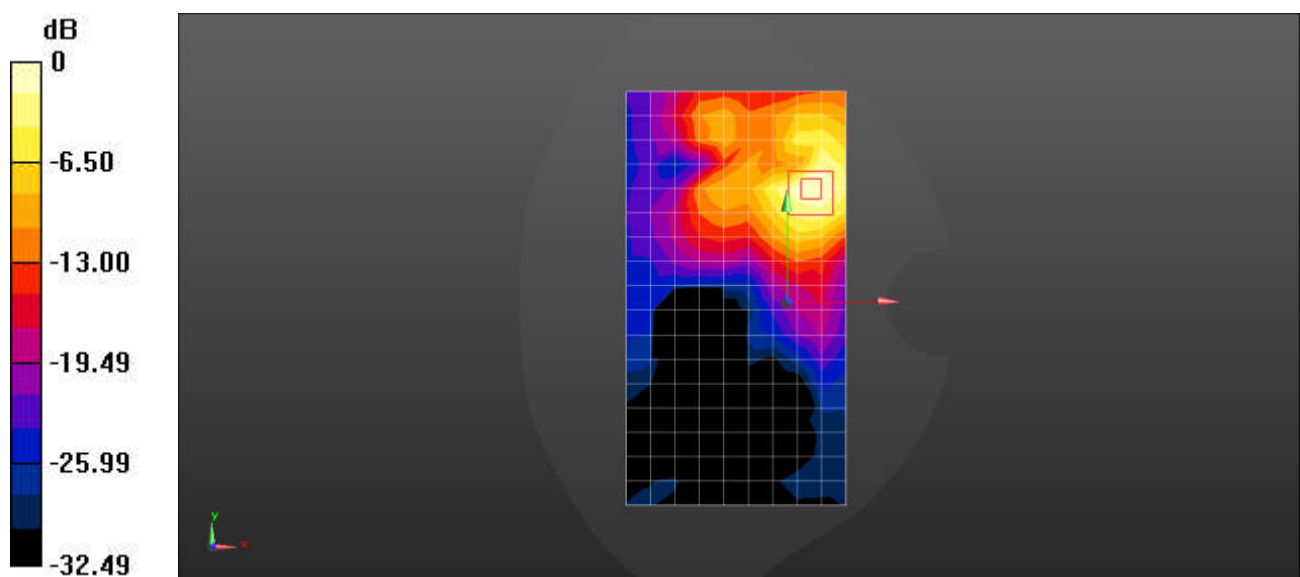

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 12 10M QPSK 1RB0 23095CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.464 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.400 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 0.504 W/kg

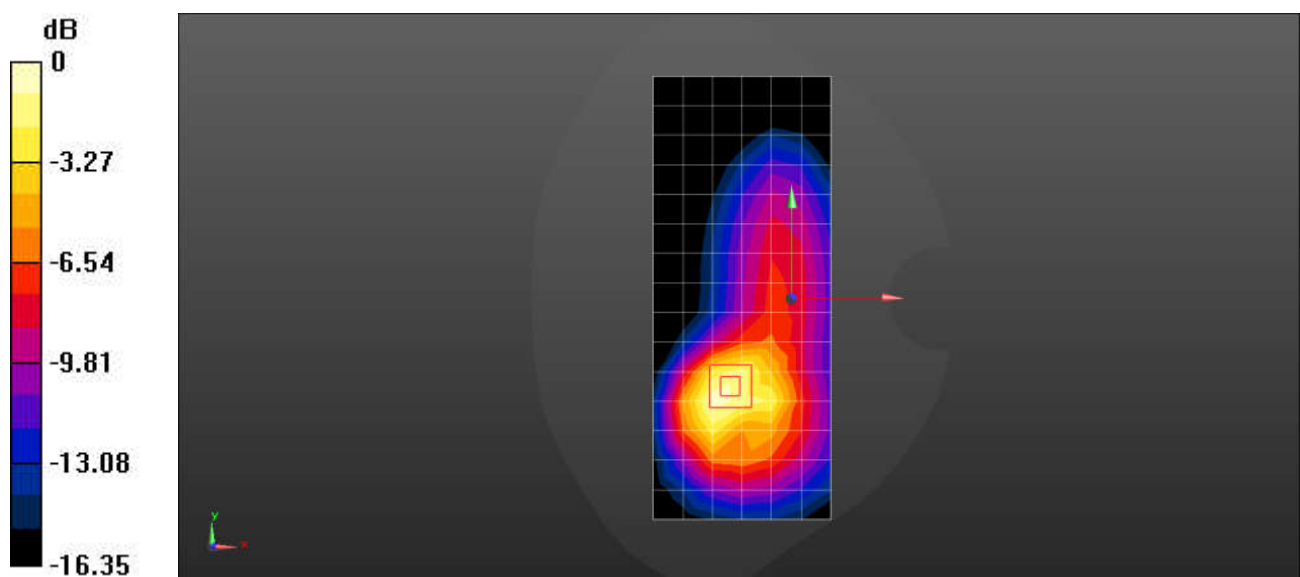

0 dB = 0.504 W/kg = -2.98 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 12 10M QPSK 1RB0 23095CH Front side 0mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.689 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.284 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.312 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.778 W/kg

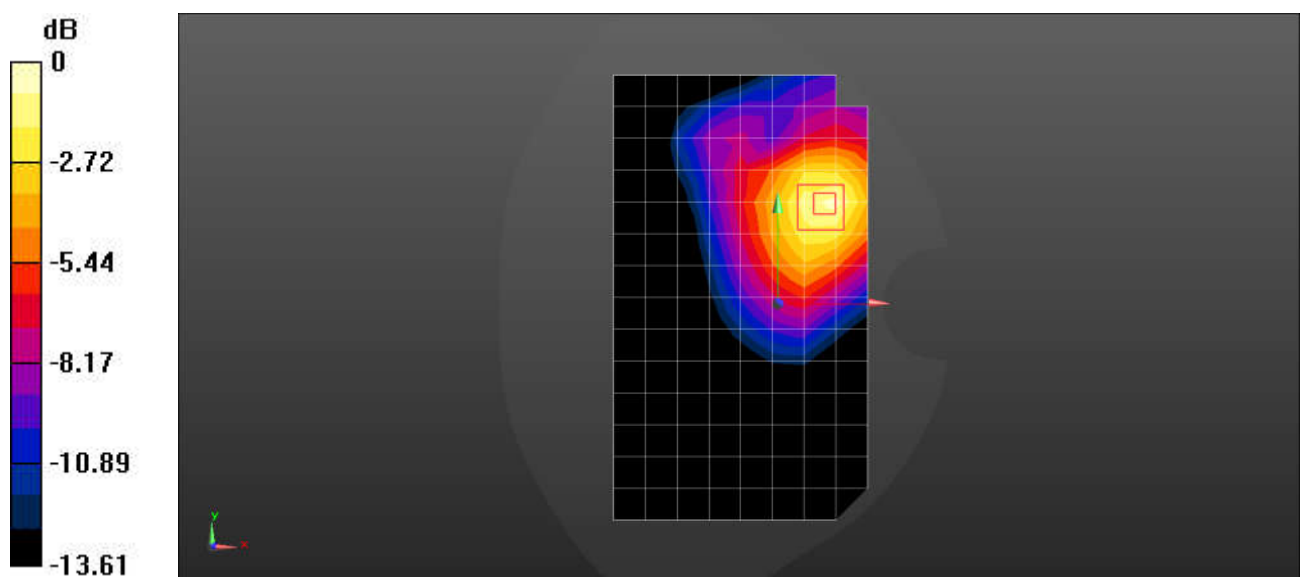

0 dB = 0.778 W/kg = -1.09 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 13 10M QPSK 1RB0 23230CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.551$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.927 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.74 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 1.06 W/kg

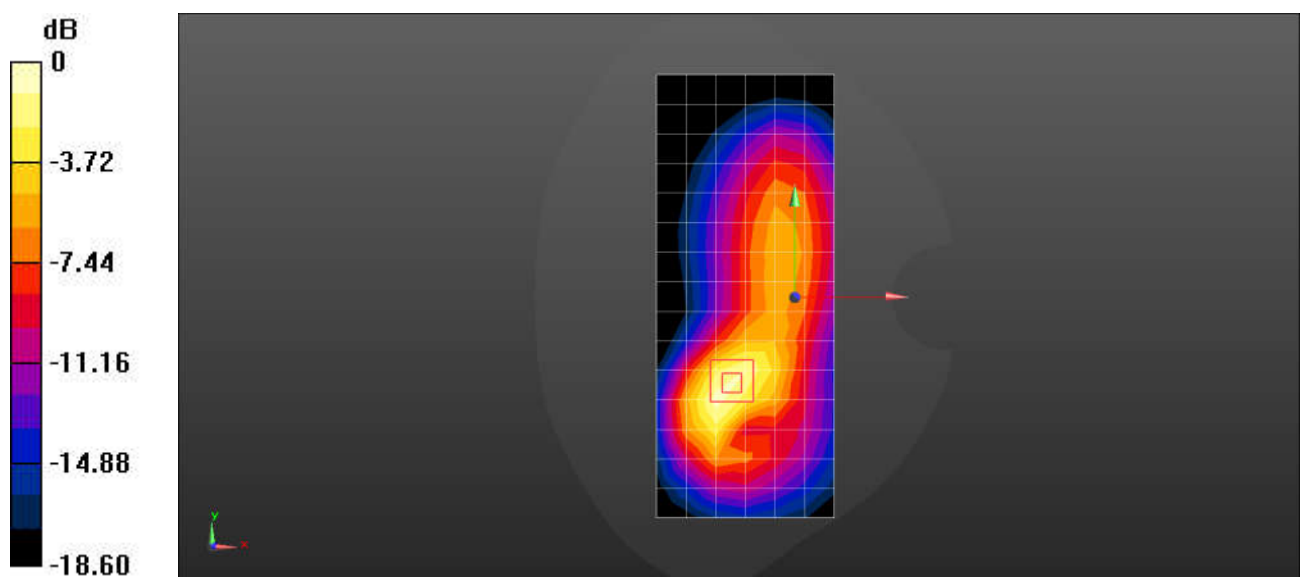

0 dB = 1.06 W/kg = 0.25 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 13 10M QPSK 1RB0 23230CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.551$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.64 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.64 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.553 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.61 W/kg

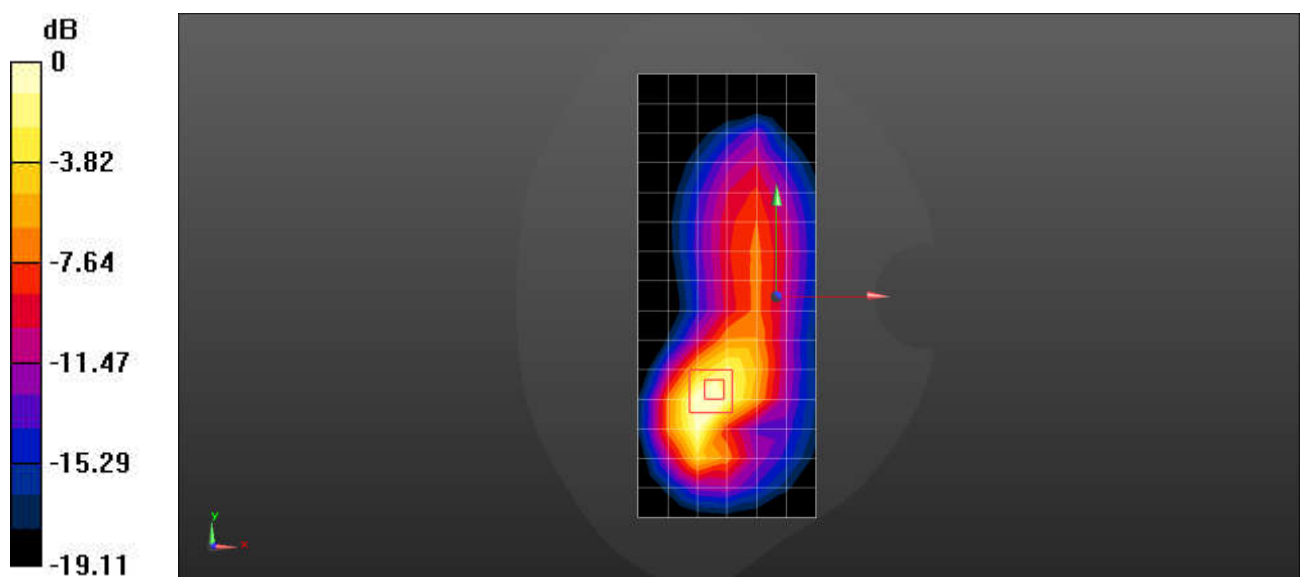

0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 14 10M QPSK 1RB0 23330CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.512$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.769 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.00 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.855 W/kg

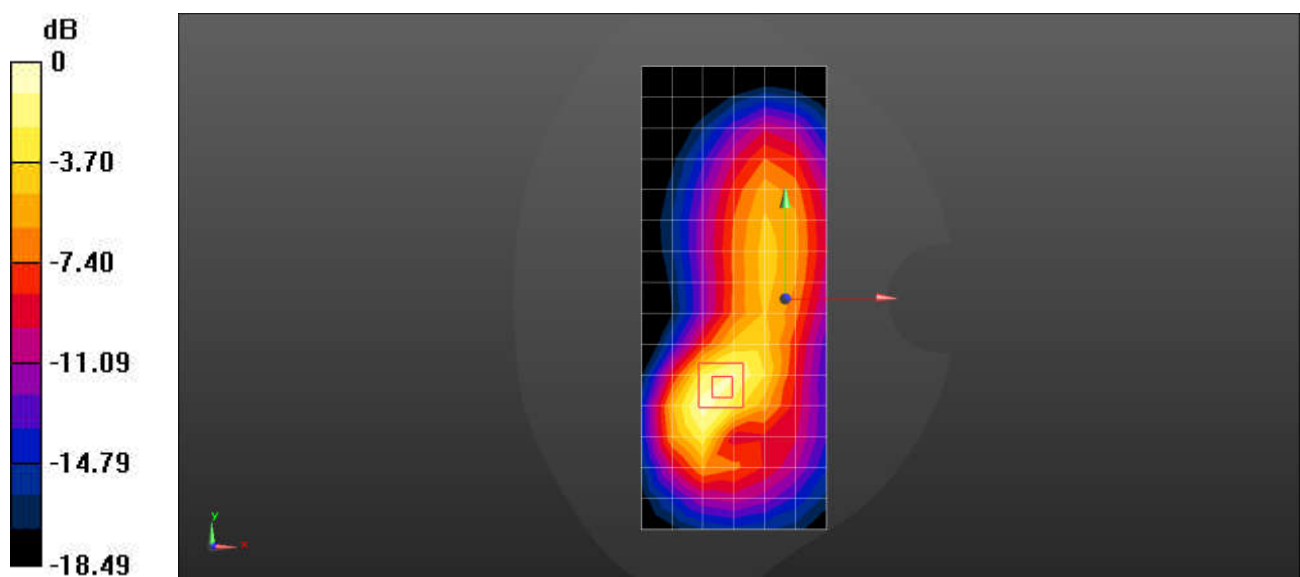

0 dB = 0.855 W/kg = -0.68 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 14 10M QPSK 1RB0 23330CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.512$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.48 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.511 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.47 W/kg

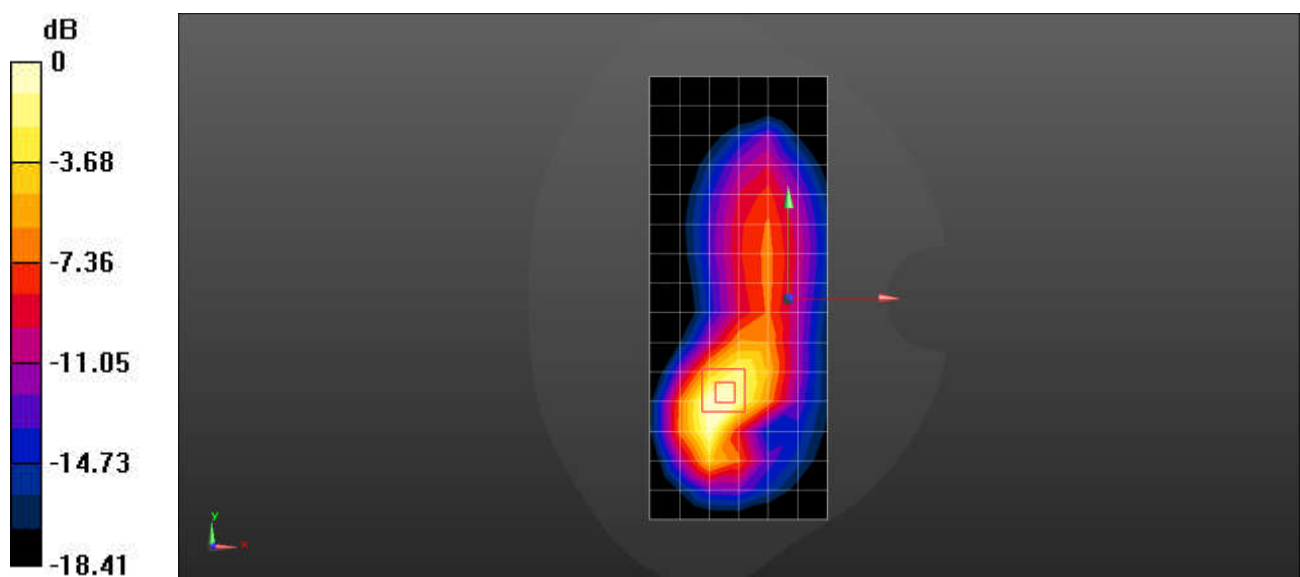

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 25 20M QPSK 50RB0 26590CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1905 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1905$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 38.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.55, 7.55, 7.55); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.459 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.848 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.559 W/kg

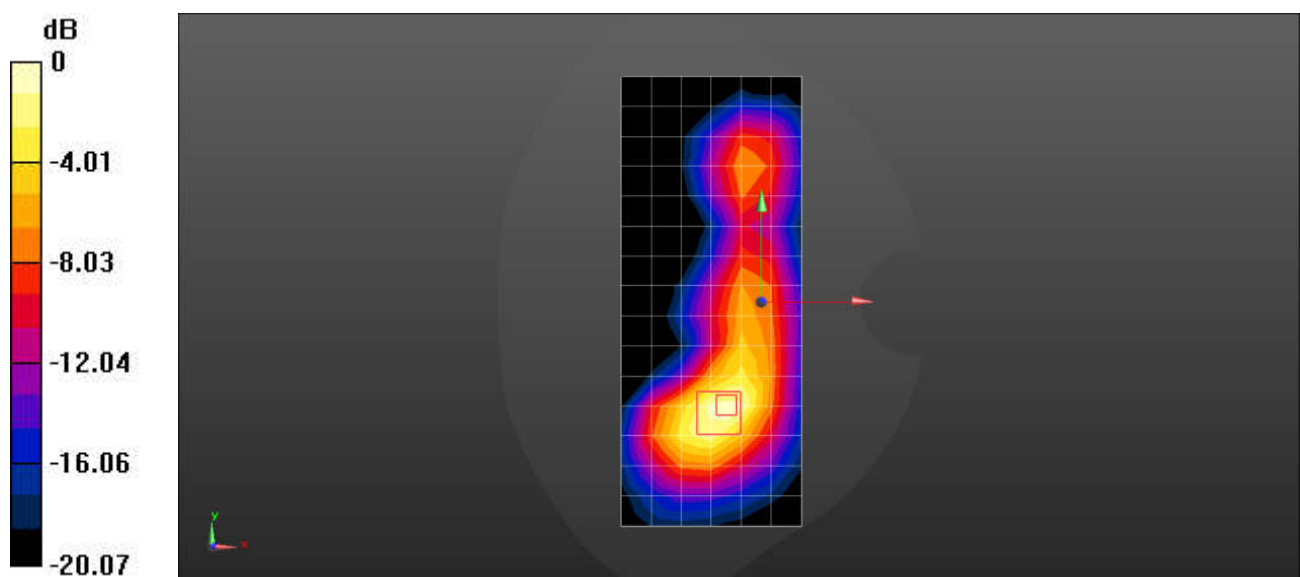

0 dB = 0.559 W/kg = -2.53 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 25 20M QPSK 50RB0 26590CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1905 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1905$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 38.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.55, 7.55, 7.55); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.32 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.318 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 1.24 W/kg

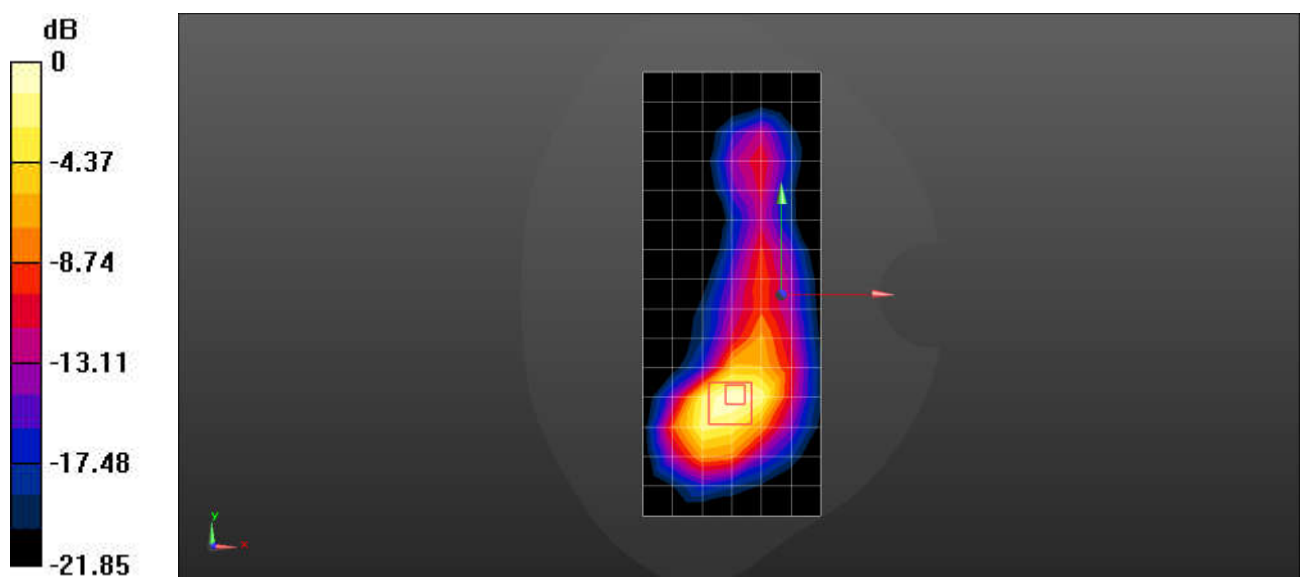

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 26 15M QPSK 1RB0 26965CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.609$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.98, 8.98, 8.98); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.976 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.62 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.988 W/kg

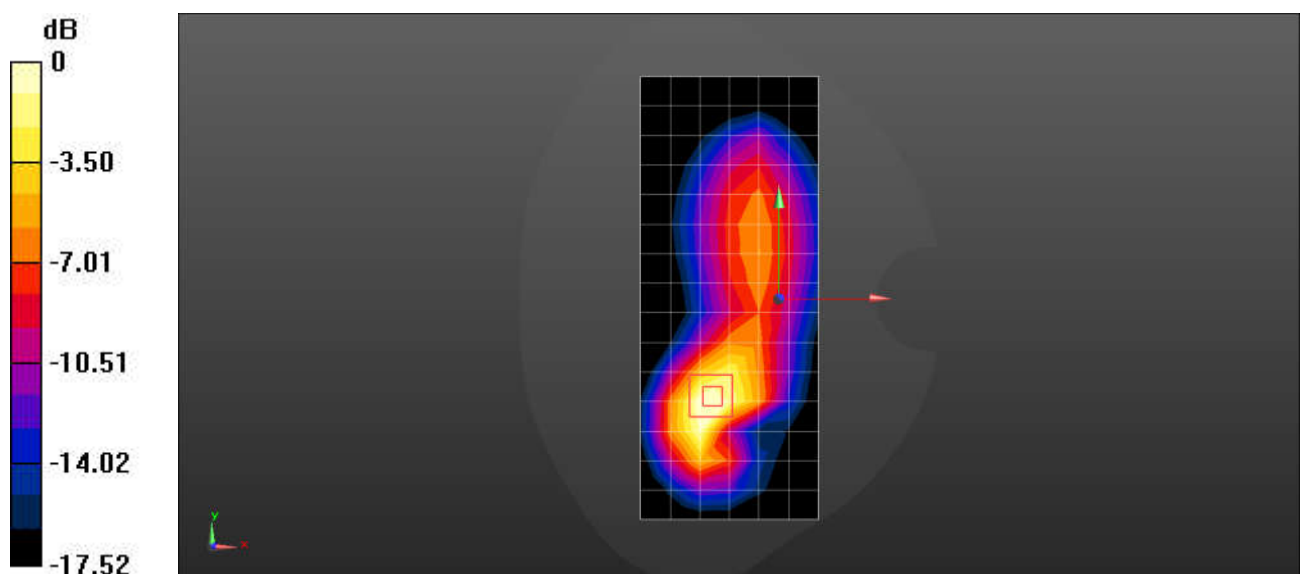

0 dB = 0.988 W/kg = -0.05 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 26 15M QPSK 1RB0 26965CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.609$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.98, 8.98, 8.98); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.64 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.906 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.549 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.65 W/kg

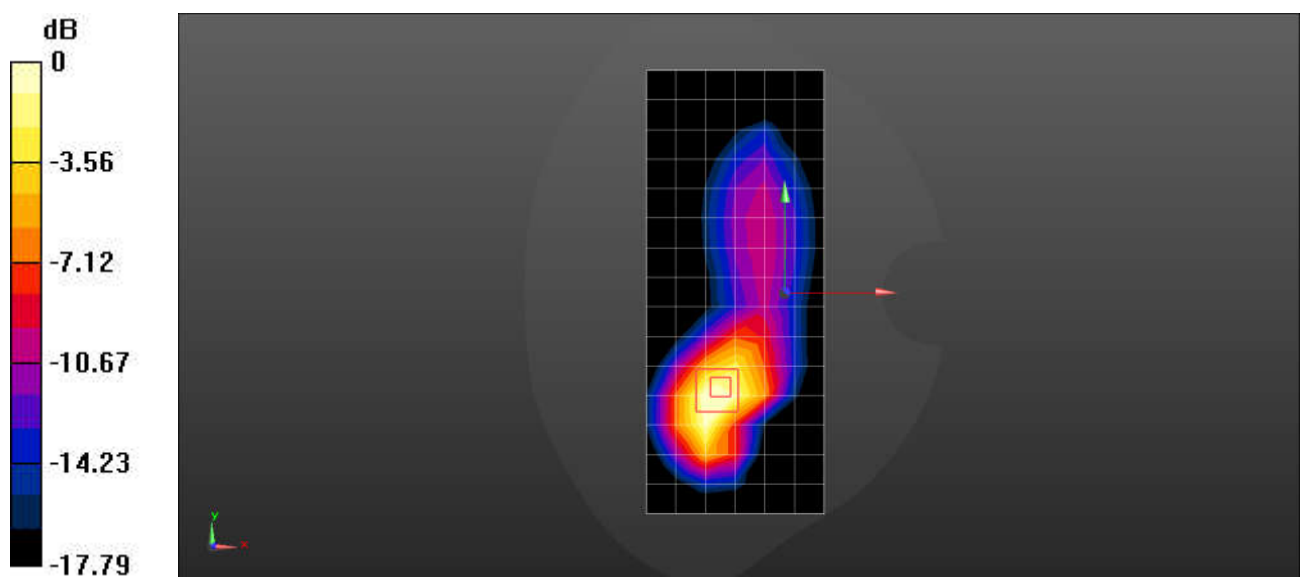

0 dB = 1.65 W/kg = 2.17 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 30 10M QPSK 1RB0 27710CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.673$ S/m; $\epsilon_r = 38.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.41, 7.41, 7.41); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.600 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.083 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.189 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 0.675 W/kg

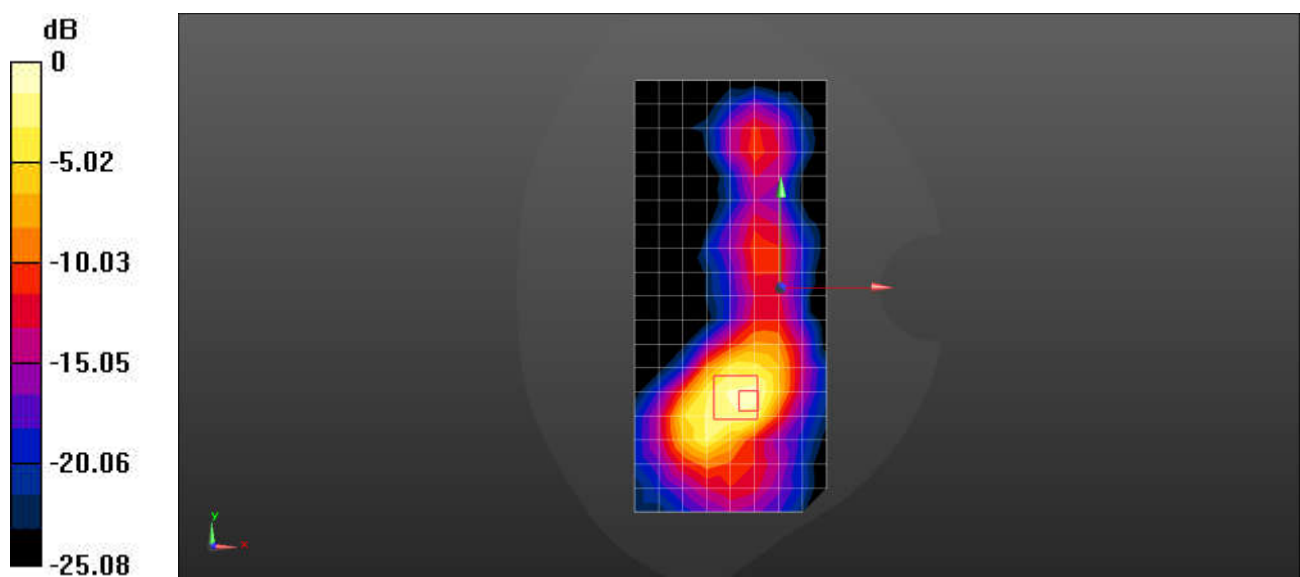

0 dB = 0.675 W/kg = -1.71 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 30 10M QPSK 1RB0 27710CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.673$ S/m; $\epsilon_r = 38.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.41, 7.41, 7.41); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.707 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.584 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 36.7%

Maximum value of SAR (measured) = 1.14 W/kg

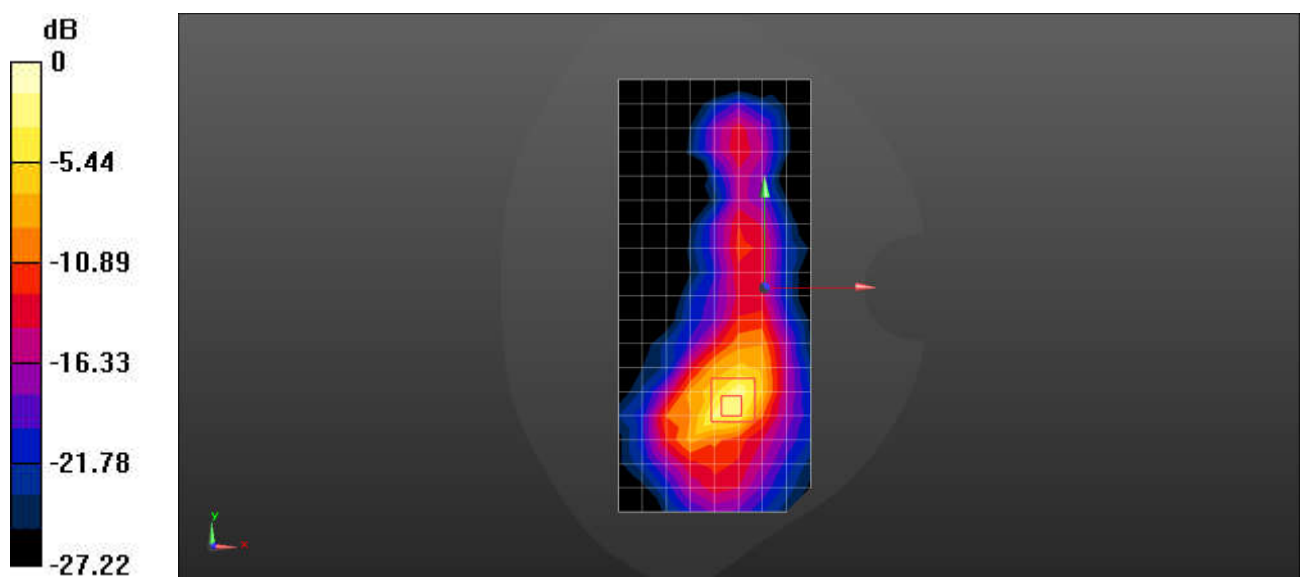

Test Laboratory: SGS-SAR Lab

LTE Band 41 20M QPSK 1RB0 39750CH Front side 5mm

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.606$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.96, 6.96, 6.96); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.372 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.591 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.401 W/kg

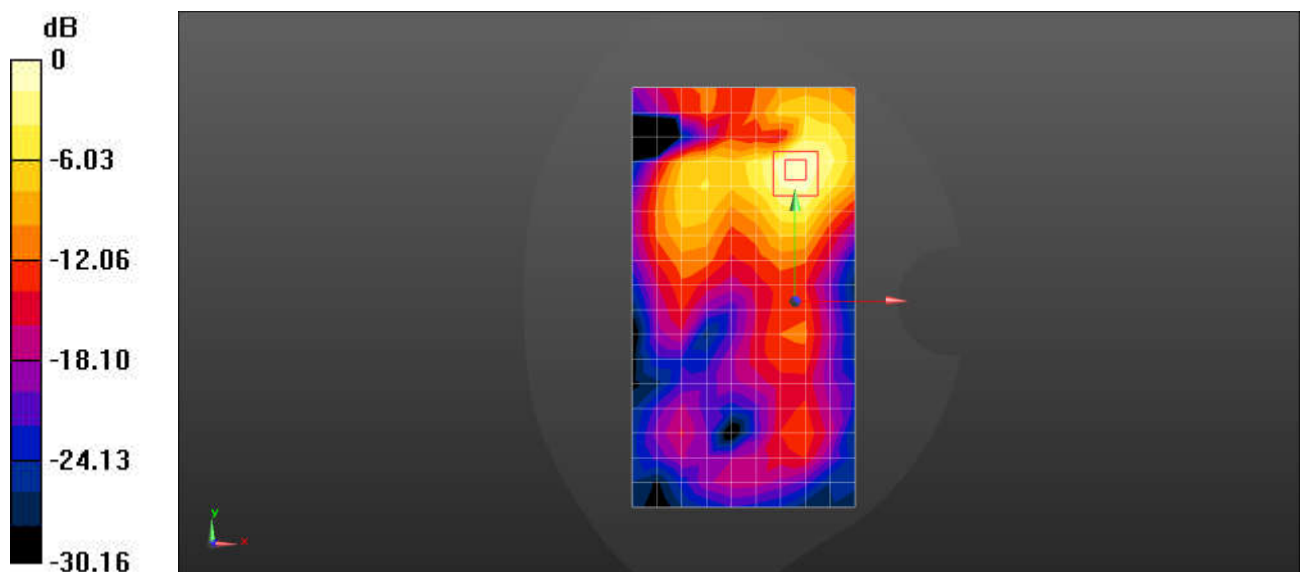

Test Laboratory: SGS-SAR Lab

LTE Band 41 20M QPSK 1RB0 41490CH Right side 0mm

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2680 MHz;Duty Cycle: 1:1.58

Medium: HSL2600;Medium parameters used: $f = 2680$ MHz; $\sigma = 2.041$ S/m; $\epsilon_r = 37.996$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.96, 6.96, 6.96); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.928 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.653 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 1.31 W/kg

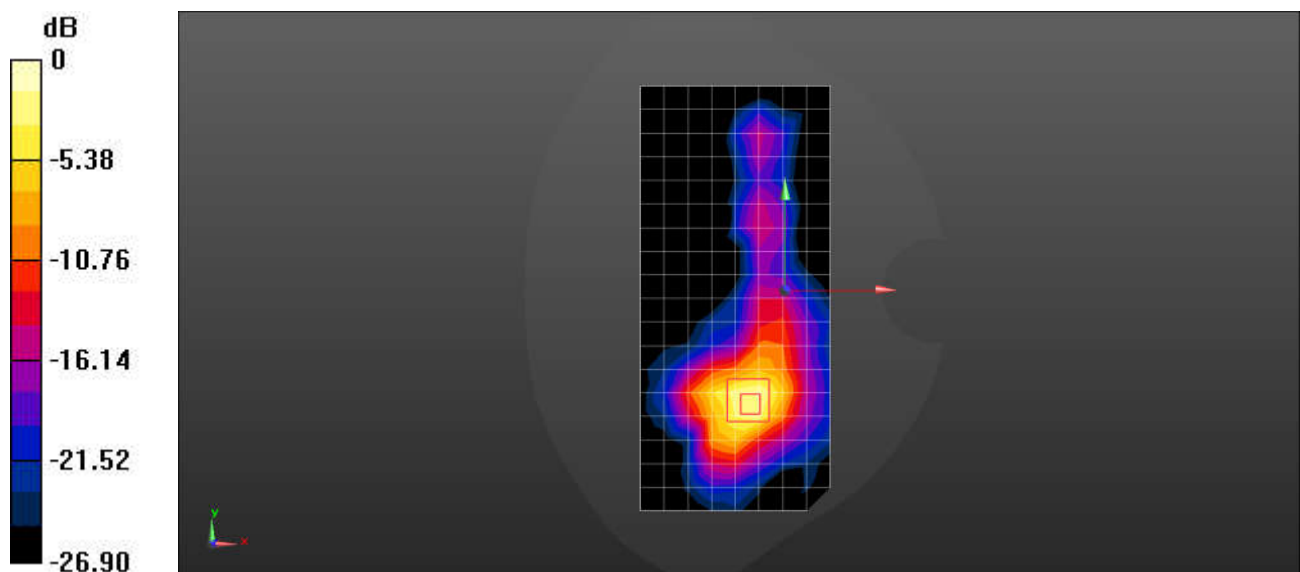

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 66 20M QPSK 1RB0 132072CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1720$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 41.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.9, 7.9, 7.9); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.475 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.497 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.481 W/kg

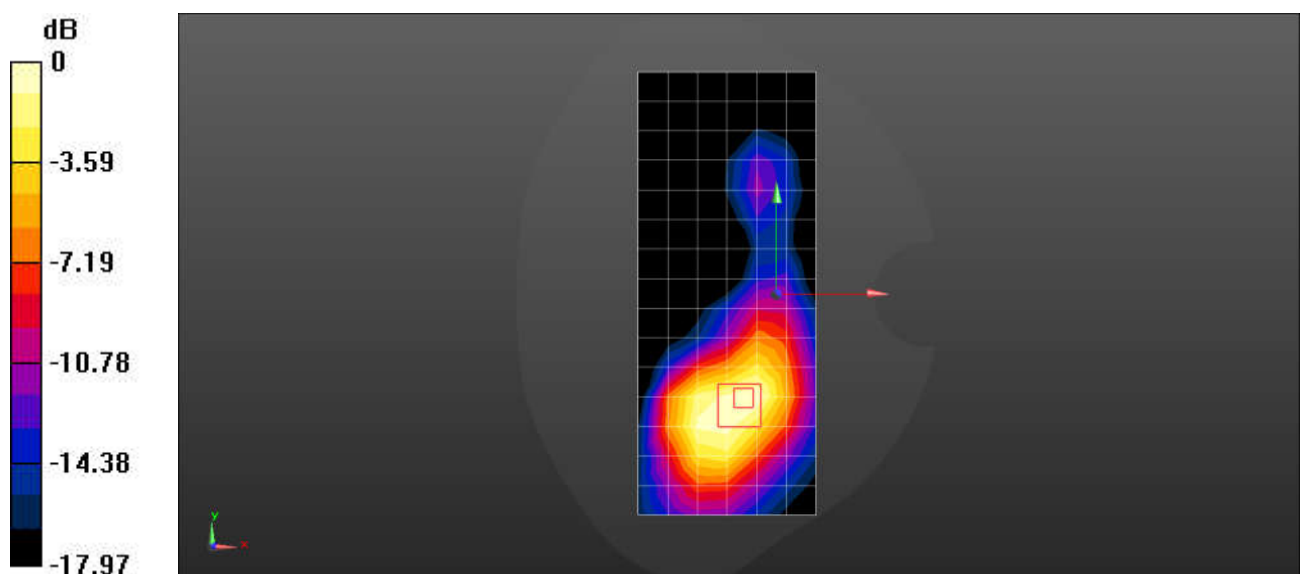

0 dB = 0.481 W/kg = -3.18 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 66 20M QPSK 50RB0 132572CH Right side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1770$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.9, 7.9, 7.9); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.32 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.668 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 1.62 W/kg

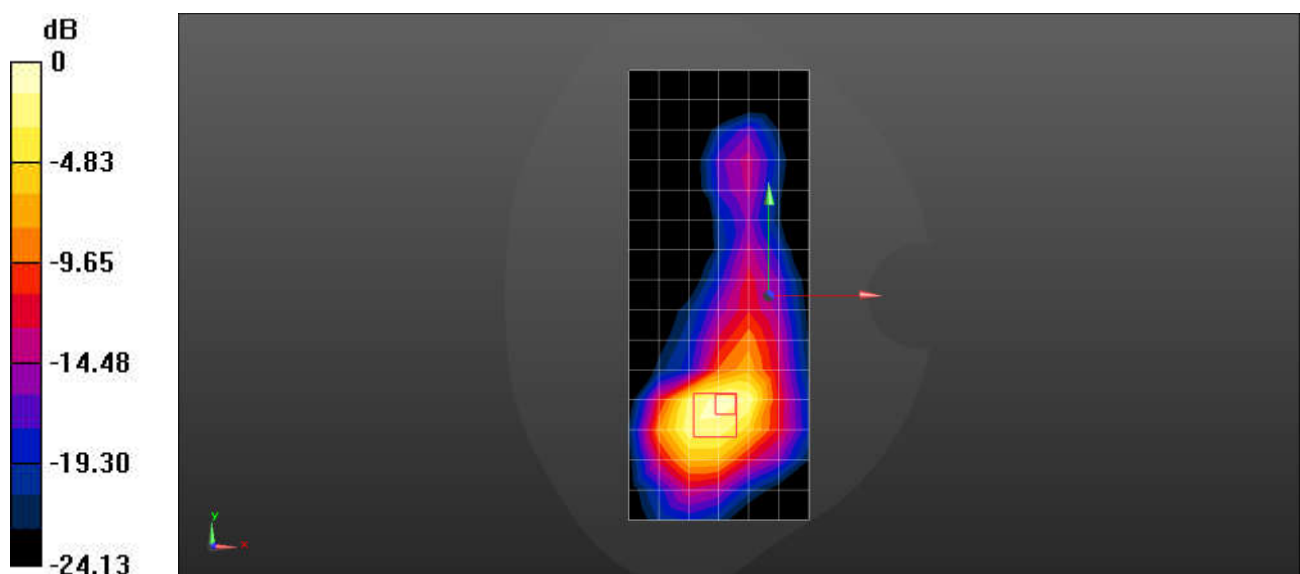

0 dB = 1.62 W/kg = 2.10 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 50RB0 133322CH Right side 5mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.441 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.186 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.825 W/kg
SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.185 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 45.1%
Maximum value of SAR (measured) = 0.639 W/kg

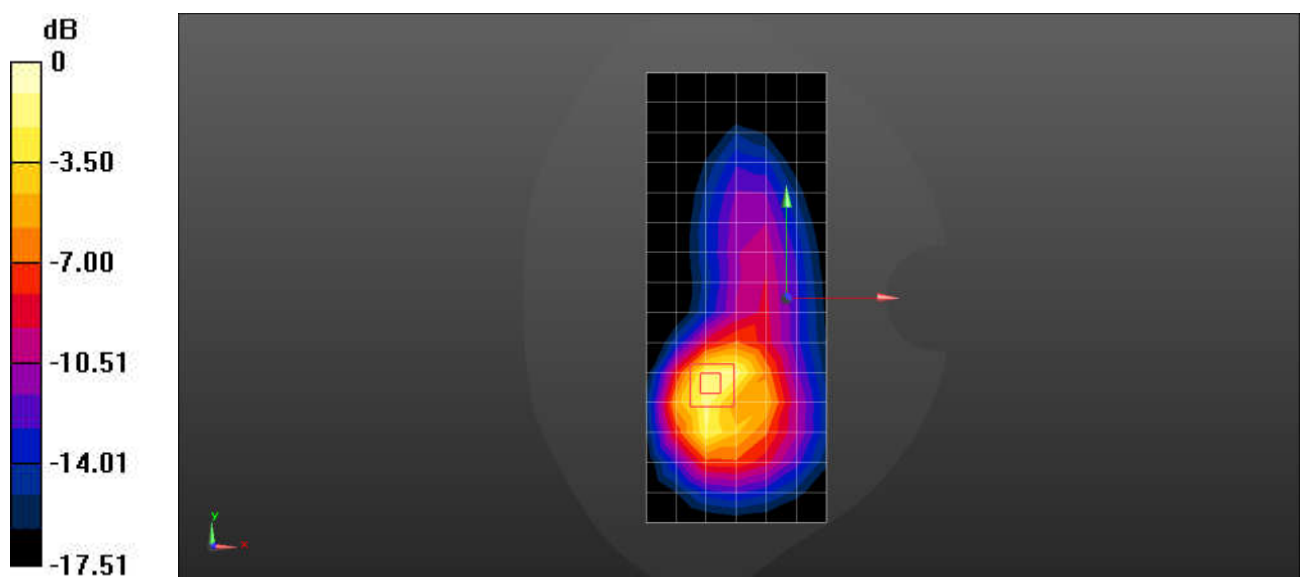

0 dB = 0.639 W/kg = -1.94 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 71 20M QPSK 1RB0 133372CH Front side 0mm

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 688$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 42.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.39, 9.39, 9.39); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.818 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.817 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.856 W/kg

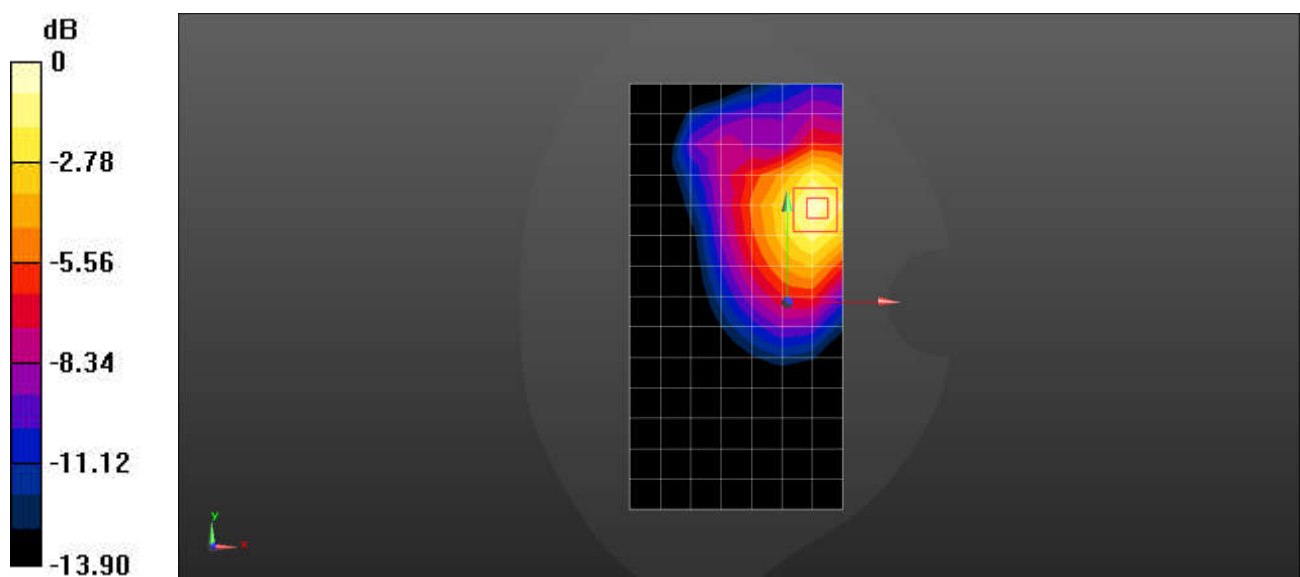

0 dB = 0.856 W/kg = -0.68 dBW/kg

Test Laboratory: SGS-SAR Lab

WIFI2.4G 802.11b 6CH Right side 5mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.081$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.13, 7.13, 7.13); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.626 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.168 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 0.631 W/kg

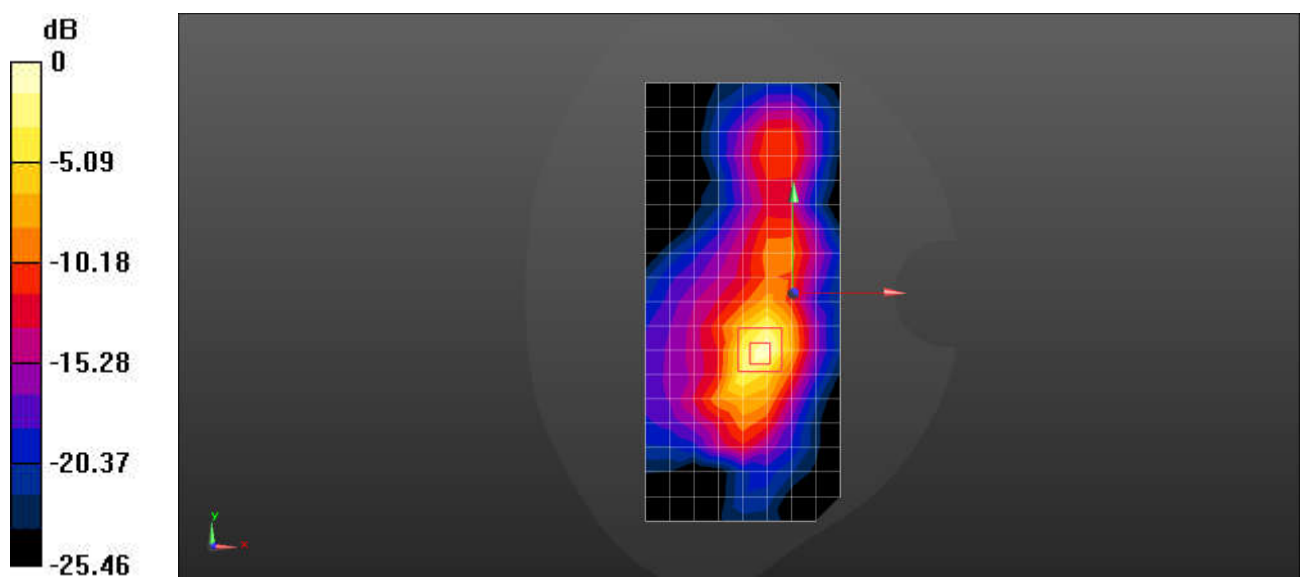

0 dB = 0.631 W/kg = -2.00 dBW/kg

Test Laboratory: SGS-SAR Lab

WIFI2.4G 802.11b 1CH Right side 0mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 39.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.13, 7.13, 7.13); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.958 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 33%

Maximum value of SAR (measured) = 1.45 W/kg

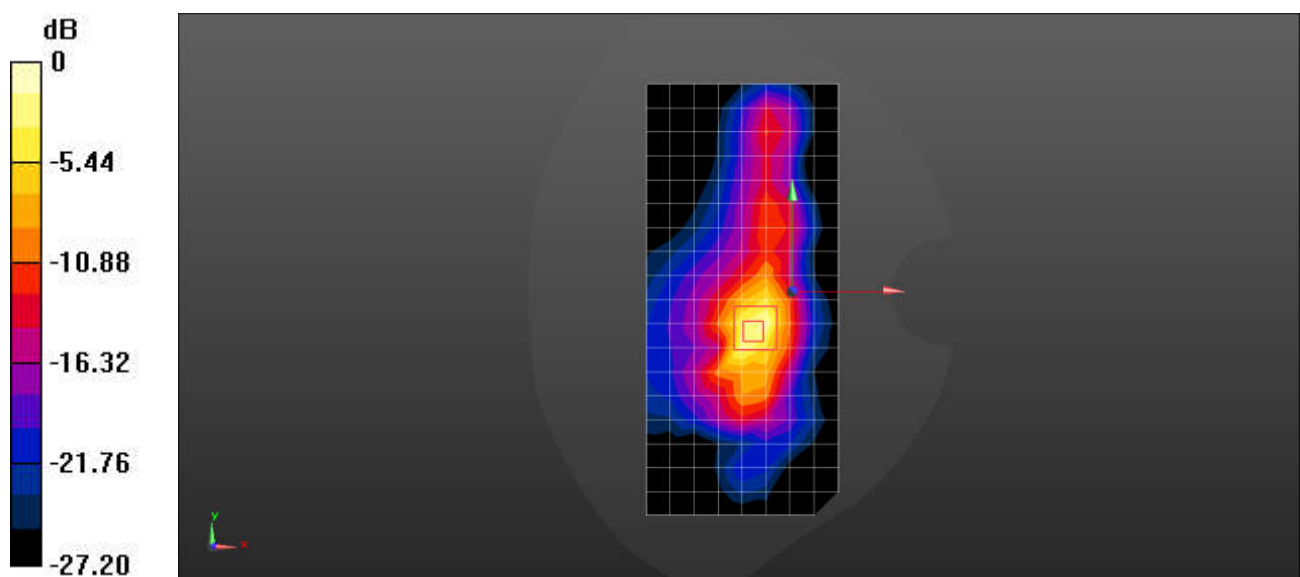

0 dB = 1.45 W/kg = 1.61 dBW/kg

Test Laboratory: SGS-SAR Lab

WIFI5G 802.11a 165CH Right side 5mm

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz;Duty Cycle: 1:1.036

Medium: HSL5G;Medium parameters used: $f = 5825$ MHz; $\sigma = 5.374$ S/m; $\epsilon_r = 34.767$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.66, 4.66, 4.66); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.448 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9470 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.486 W/kg

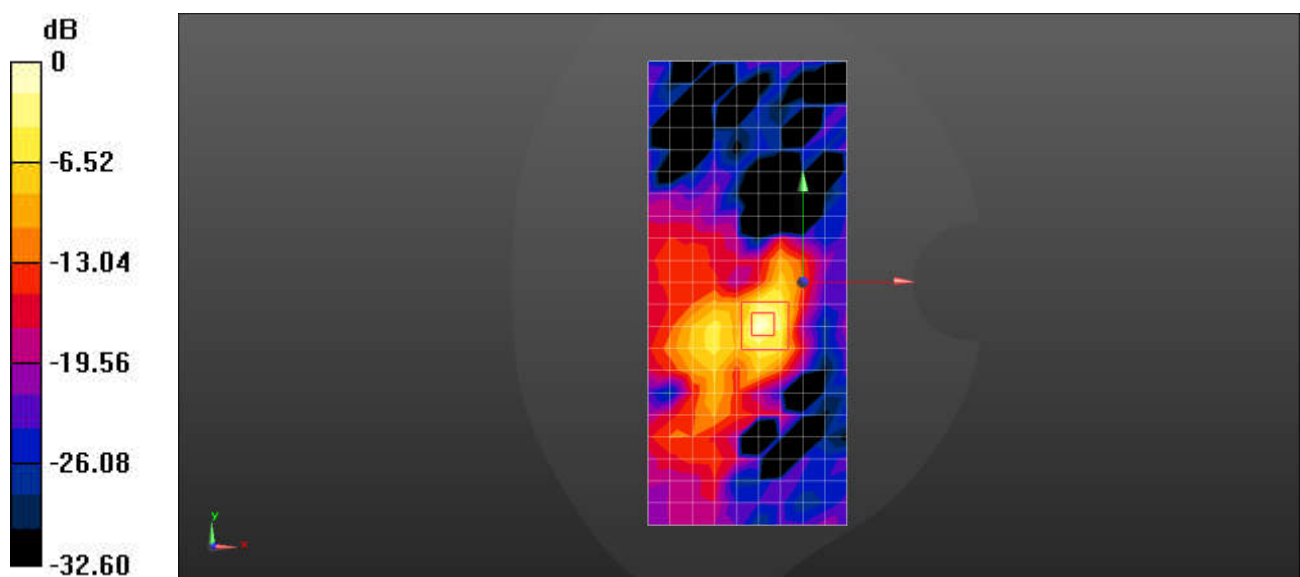

0 dB = 0.486 W/kg = -3.13 dBW/kg

Test Laboratory: SGS-SAR Lab

WIFI5G 802.11a 165CH Right side 0mm

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz;Duty Cycle: 1:1.036

Medium: HSL5G;Medium parameters used: $f = 5825$ MHz; $\sigma = 5.374$ S/m; $\epsilon_r = 34.767$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.66, 4.66, 4.66); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x22x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.26 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.127 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 1.24 W/kg

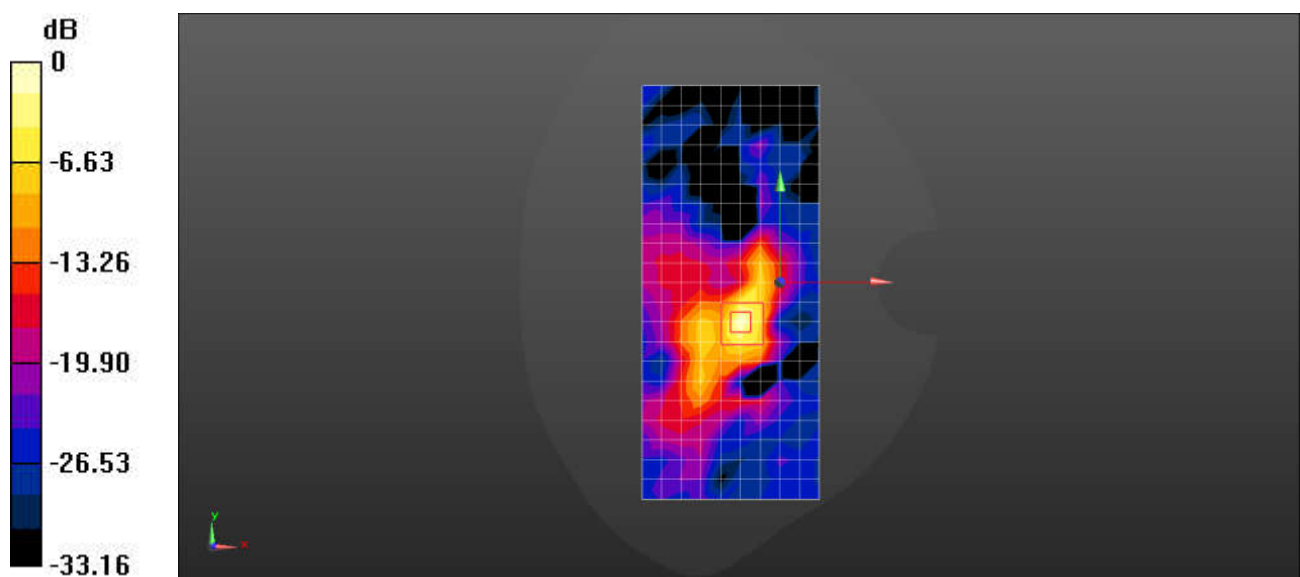

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 78CH Right side 5mm

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 38.987$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.13, 7.13, 7.13); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.048 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9531 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.083 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 39.6%

Maximum value of SAR (measured) = 0.059 W/kg

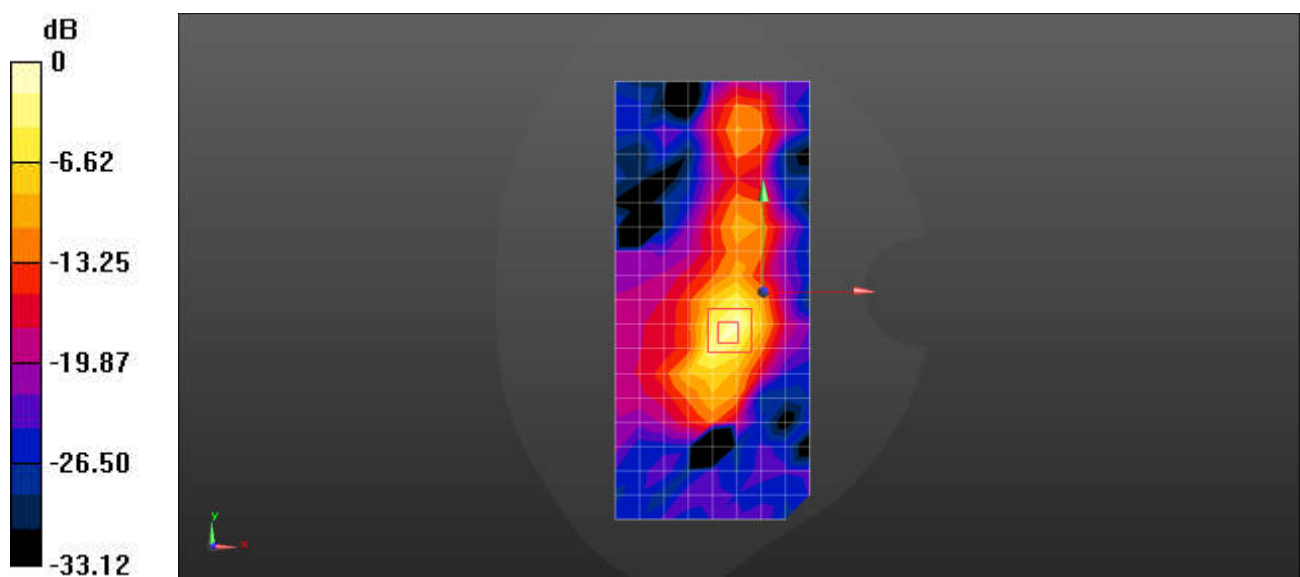

0 dB = 0.059 W/kg = -12.29 dBW/kg

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 39CH Right side 0mm

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 39.079$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.13, 7.13, 7.13); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2025/09/08
- Phantom: SAM 1; Type: SAM; Serial: 1609
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.062 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.245 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 33.3%

Maximum value of SAR (measured) = 0.094 W/kg

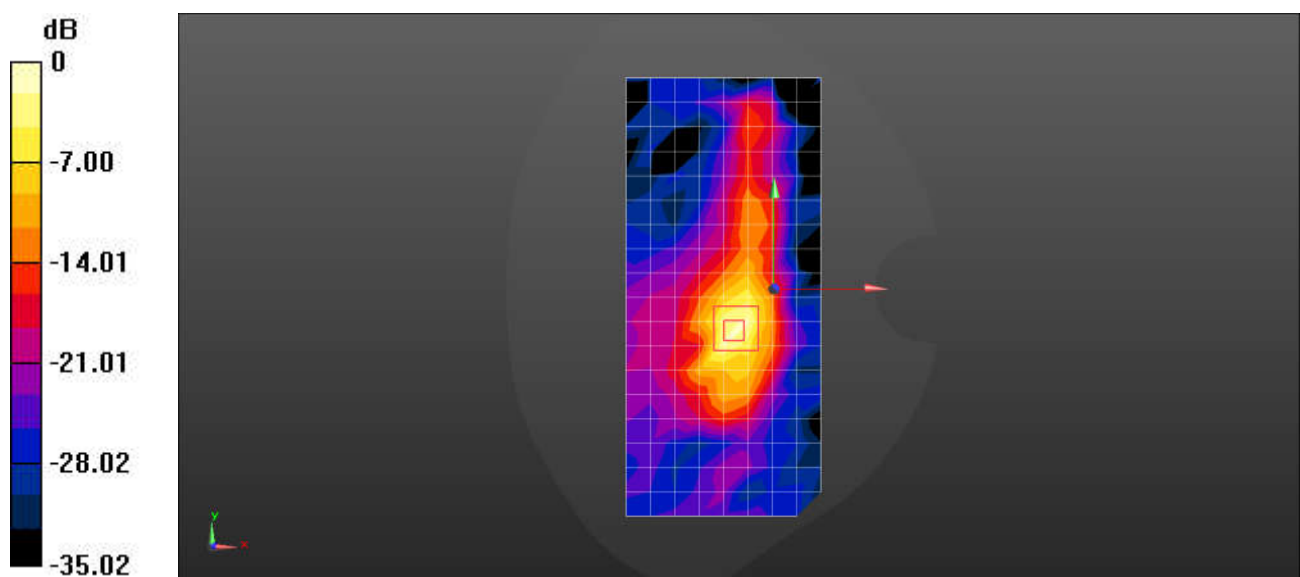



Report No.: SUCR260700069008
Page: 34 of 34

- End of the Appendix -