

ANNEX A: Test Result


1. Radiates Emission

The test is in transmitting all mode, NFC-B was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is coplanar, the other antennas are vertical and horizontal.

A symbol ($\text{dB}\mu\text{V}/\text{m}$) in the test plot below means ($\text{dB}\mu\text{V}/\text{m}$)

In-band

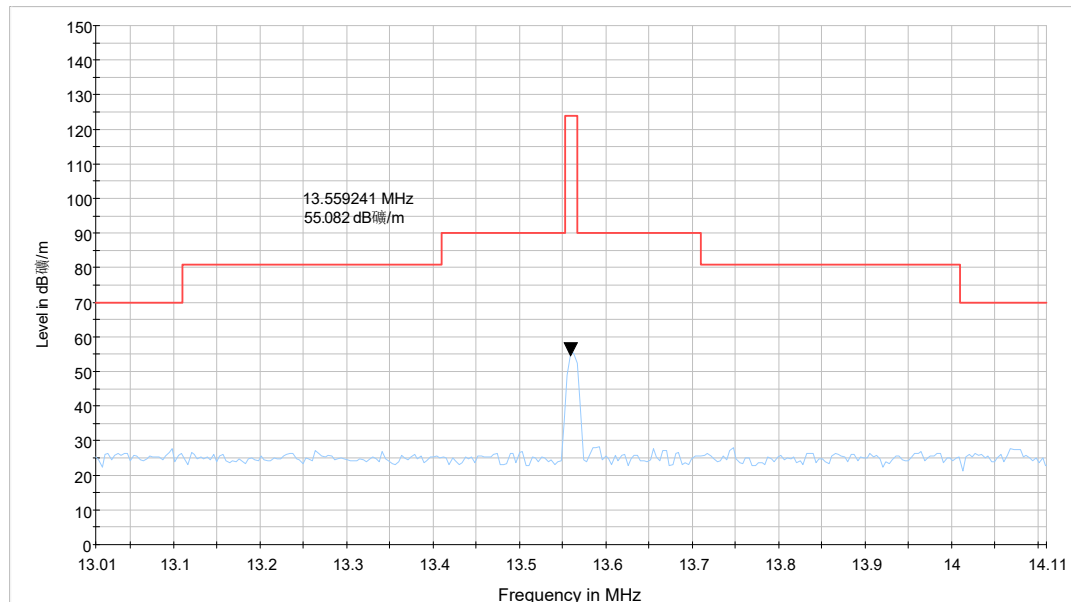


Radiates Emission from 13.01MHz to 14.11MHz

Note: This graph displays the maximum values of coaxial and coplanar by software

Out-of-band


The test is in transmitting all mode, NFC-B was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

The following graphs display the maximum values of coaxial and coplanar for 9k-30MHz; horizontal and vertical for 30MHz to 1GHz by software.

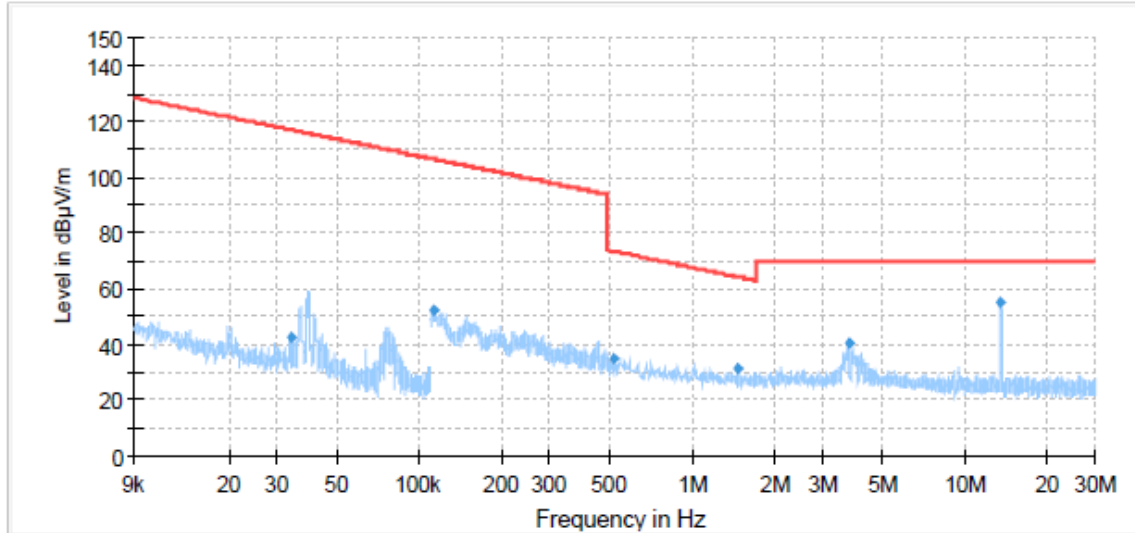

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Azimuth (deg)	Correct Factor (dB)
0.03	42.40	116.96	74.56	500.00	106.00	17
0.11	52.27	106.48	54.20	150.00	95.00	17
0.52	34.64	73.29	38.65	150.00	123.00	17
1.46	31.13	64.29	33.16	150.00	358.00	17
3.79	40.77	69.50	28.73	150.00	33.00	17
13.56	55.32	69.50	14.18	150.00	283.00	17

Radiates Emission from 9kHz to 30MHz

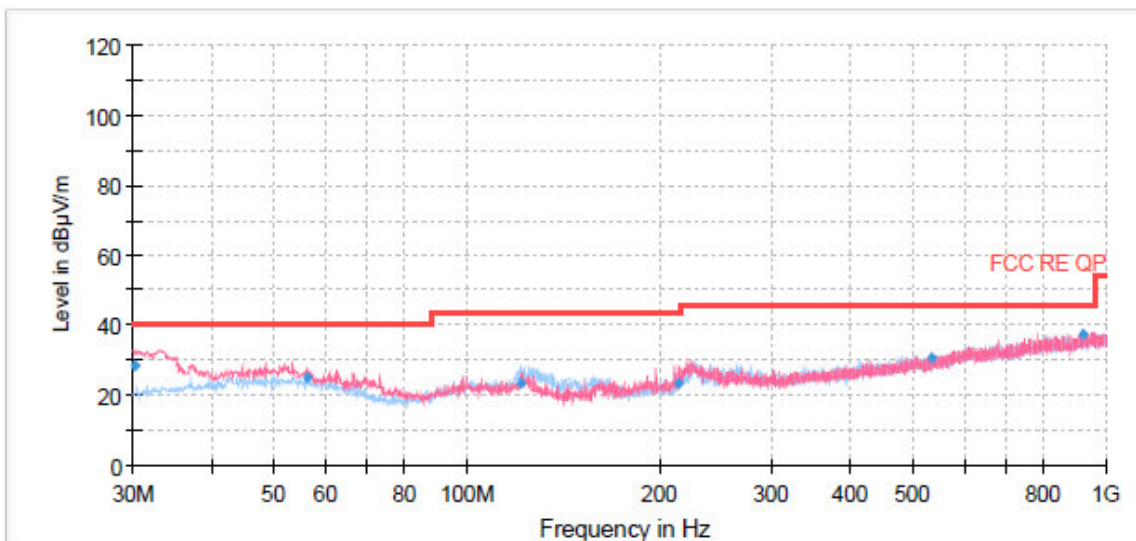

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
30.12	28.67	40.00	11.33	100.0	V	355.00	17
56.07	25.08	40.00	14.92	100.0	V	0.00	20
121.30	23.62	43.50	19.88	200.0	H	84.00	17
214.42	23.37	43.50	20.13	200.0	V	160.00	18
533.55	30.55	46.00	15.45	100.0	H	171.00	26
919.98	37.48	46.00	8.52	200.0	V	301.00	32

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

2. Conducted Emission


During the test, the Conducted Emission was performed in all modes with all channel. The test data of the worst-case condition was recorded in this report.

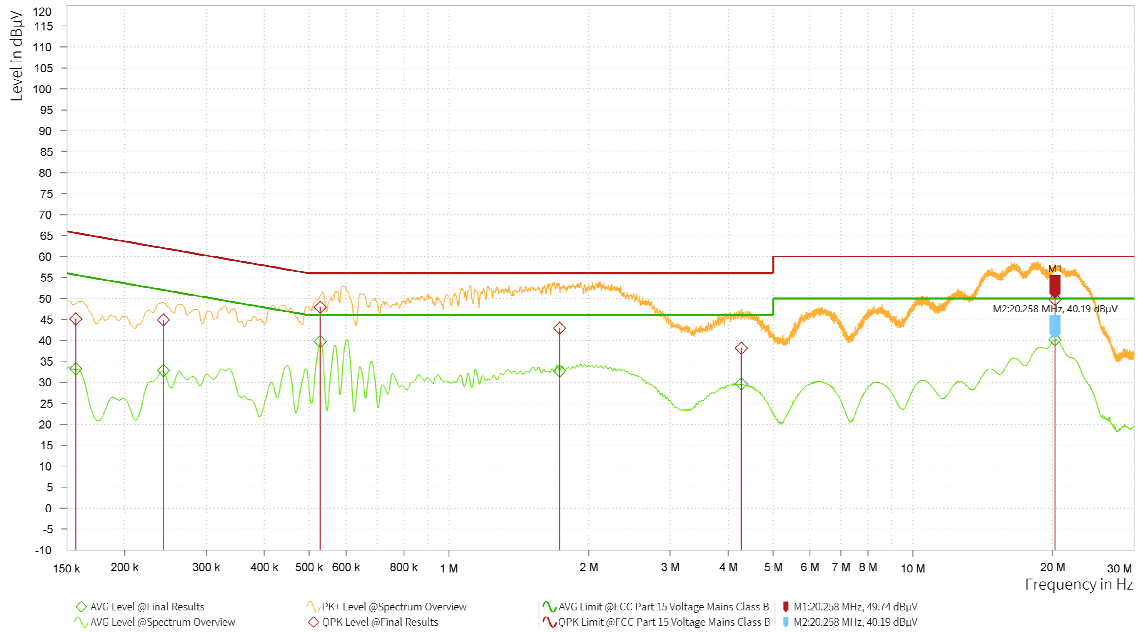

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	AVG Level [dBμV]	AVG Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.157	45.12	65.63	20.51	33.24	55.63	22.39	20.90	L1	9.000	1.000
0.242	44.90	62.02	17.12	32.80	52.02	19.22	20.98	L1	9.000	1.000
0.528	47.89	56.00	8.11	39.71	46.00	6.29	20.75	L1	9.000	1.000
1.732	42.89	56.00	13.11	32.73	46.00	13.27	19.74	L1	9.000	1.000
4.270	38.17	56.00	17.83	29.66	46.00	16.34	19.42	L1	9.000	1.000
20.258	49.74	60.00	10.26	40.19	50.00	9.81	19.67	L1	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 kHz to 30 MHz

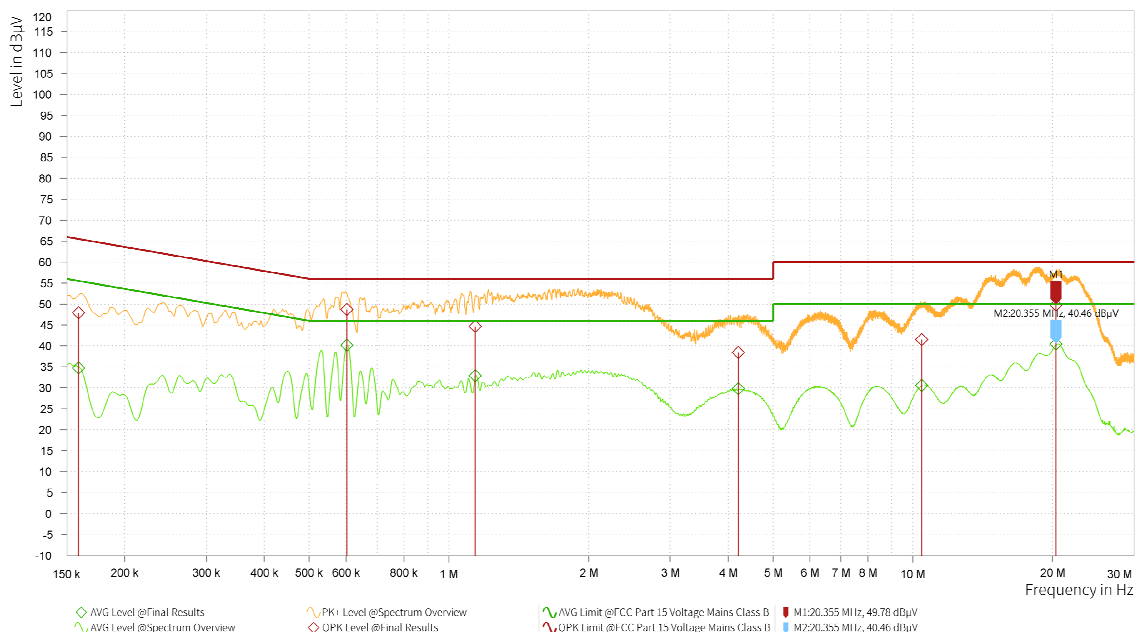

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	AVG Level [dBμV]	AVG Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.159	47.93	65.52	17.59	34.75	55.52	20.77	20.91	N	9.000	1.000
0.602	48.67	56.00	7.33	40.19	46.00	5.81	20.68	N	9.000	1.000
1.140	44.66	56.00	11.34	32.87	46.00	13.13	20.07	N	9.000	1.000
4.207	38.42	56.00	17.58	29.81	46.00	16.19	19.43	N	9.000	1.000
10.457	41.50	60.00	18.50	30.60	50.00	19.40	19.45	N	9.000	1.000
20.355	49.78	60.00	10.22	40.46	50.00	9.54	19.72	N	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz