



No. 25B02Z101619-001

For

Shanghai Sunmi Technology Co.,Ltd.

Handheld Wireless Terminal

Model Name: T8F1C

with

Hardware Version: V00

Software Version: 4.0.0

FCC ID: 2AH25T8F1C

Issued Date: 2025-07-29

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

Test positions for Head:



Figure 1 Left Touch



Figure 2 Left Tilt 15°



Figure 3 Right Touch



Figure 4 Right Tilt 15°

Test positions for Body-worn/Hotspot:

According to the antenna position, the Body-worn/Hotspot SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

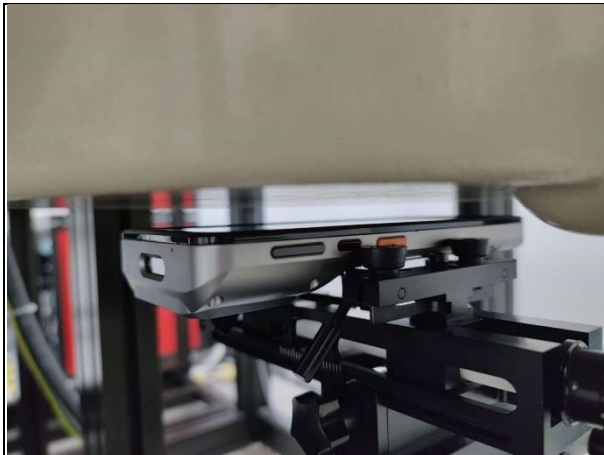


Figure 5 Front Side 10mm

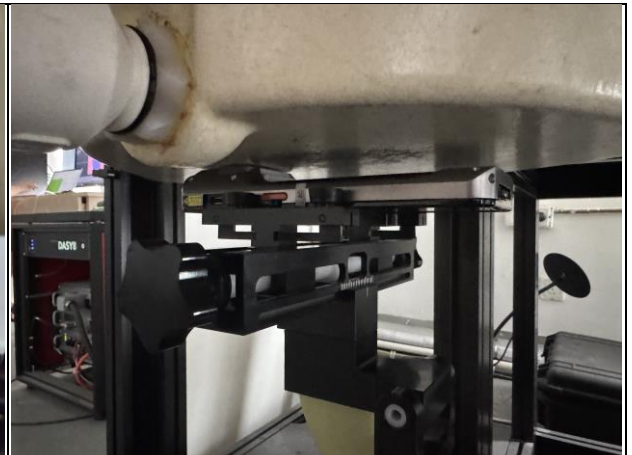


Figure 6 Back Side 10mm



Figure 7 Left Side 10mm

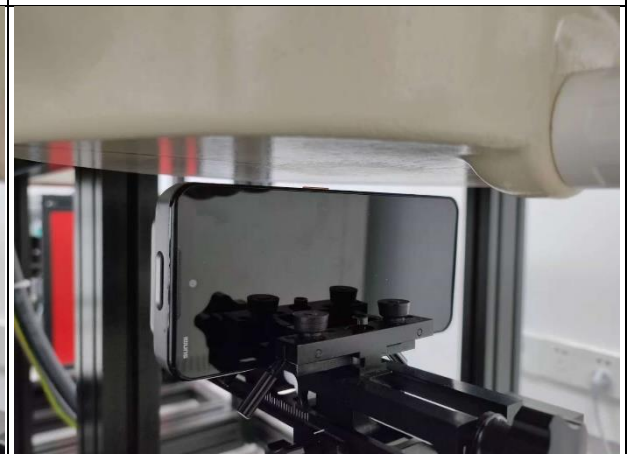


Figure 8 Right Side 10mm



Figure 9 Top Side 10mm



Figure 10 Bottom Side 10mm

Test positions for Limb:

According to the antenna position, the Limb SAR is tested at the following 6 test positions all with the distance =0mm between the EUT and the phantom bottom:

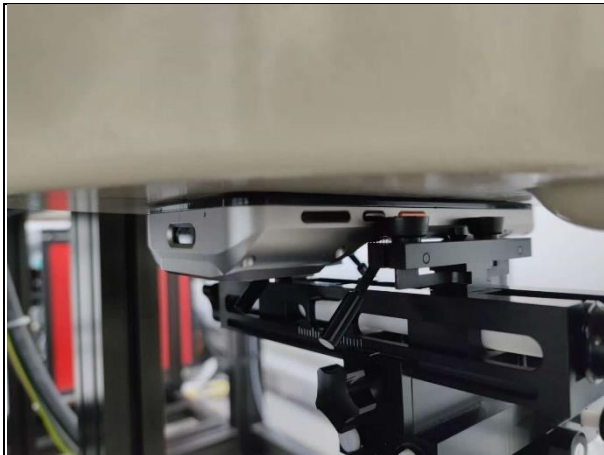


Figure 11 Front Side 0mm



Figure 12 Back Side 0mm



Figure 13 Left Side 0mm

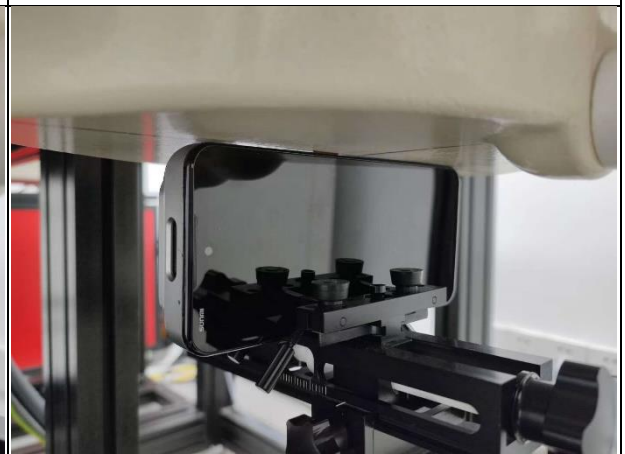


Figure 14 Right Side 0mm



Figure 15 Top Side 0mm



Figure 16 Bottom Side 0mm

Test positions for sensor triggering minus 1 mm:

The sensor triggering minus 1 mm SAR is tested at the following 2 test positions with the distance =29/19mm between the EUT and the phantom bottom:

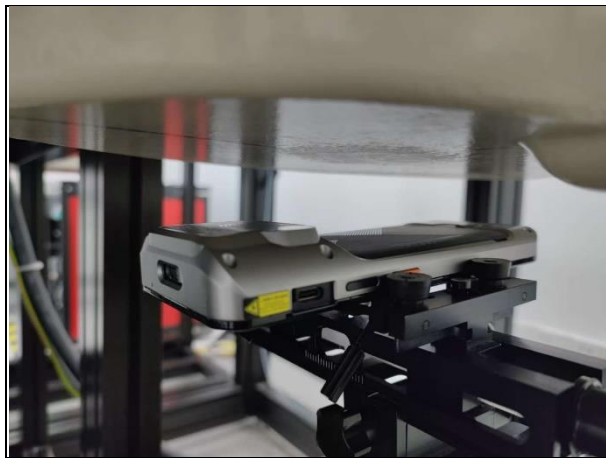


Figure 17 Back Side 29mm


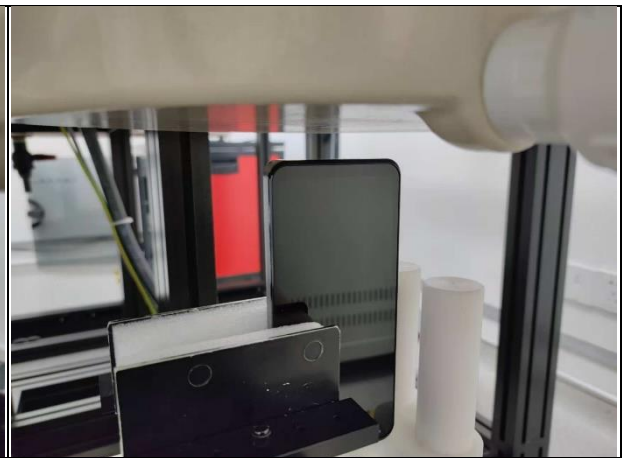


Figure 18 Bottom Side 19mm

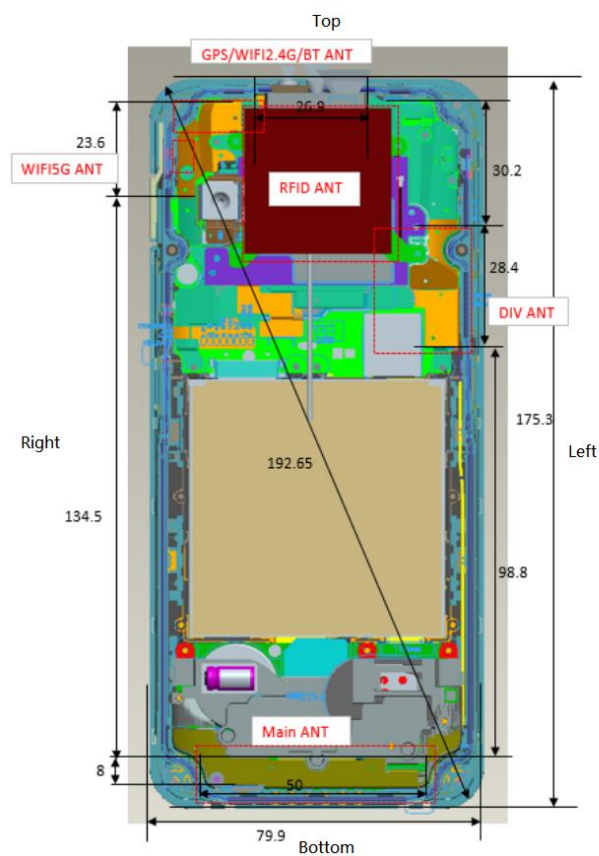

Picture 18: Antenna Locations