

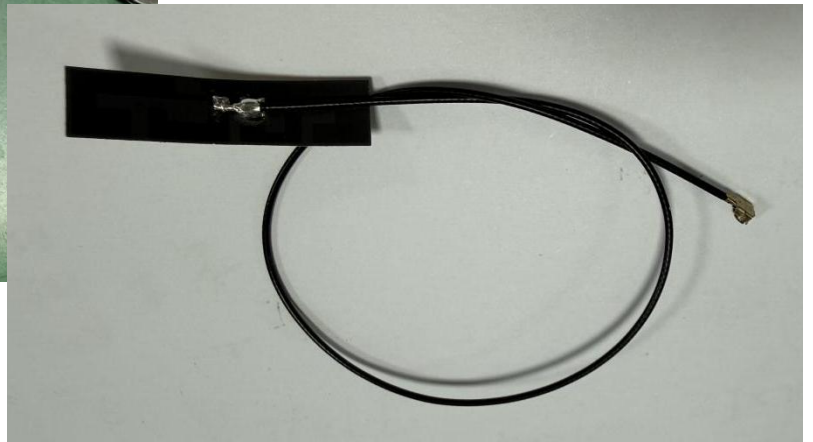


1. 产品图片 product picture

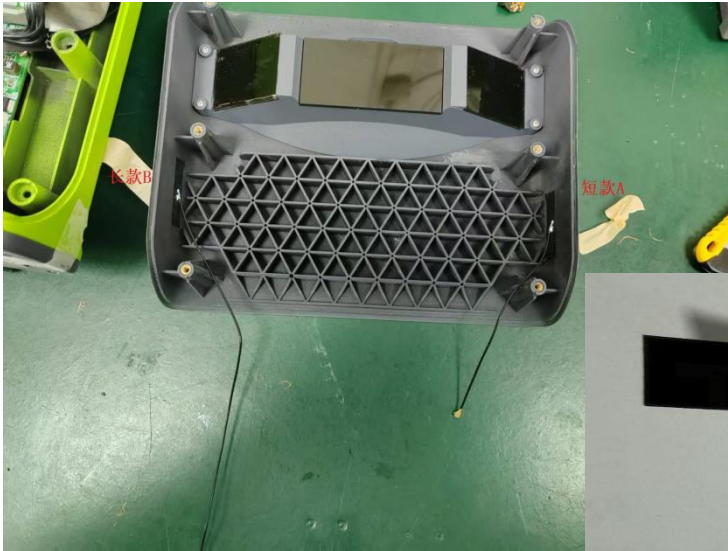


2. 电气性能测试报告: Electrical Performance Test Report: VSWR

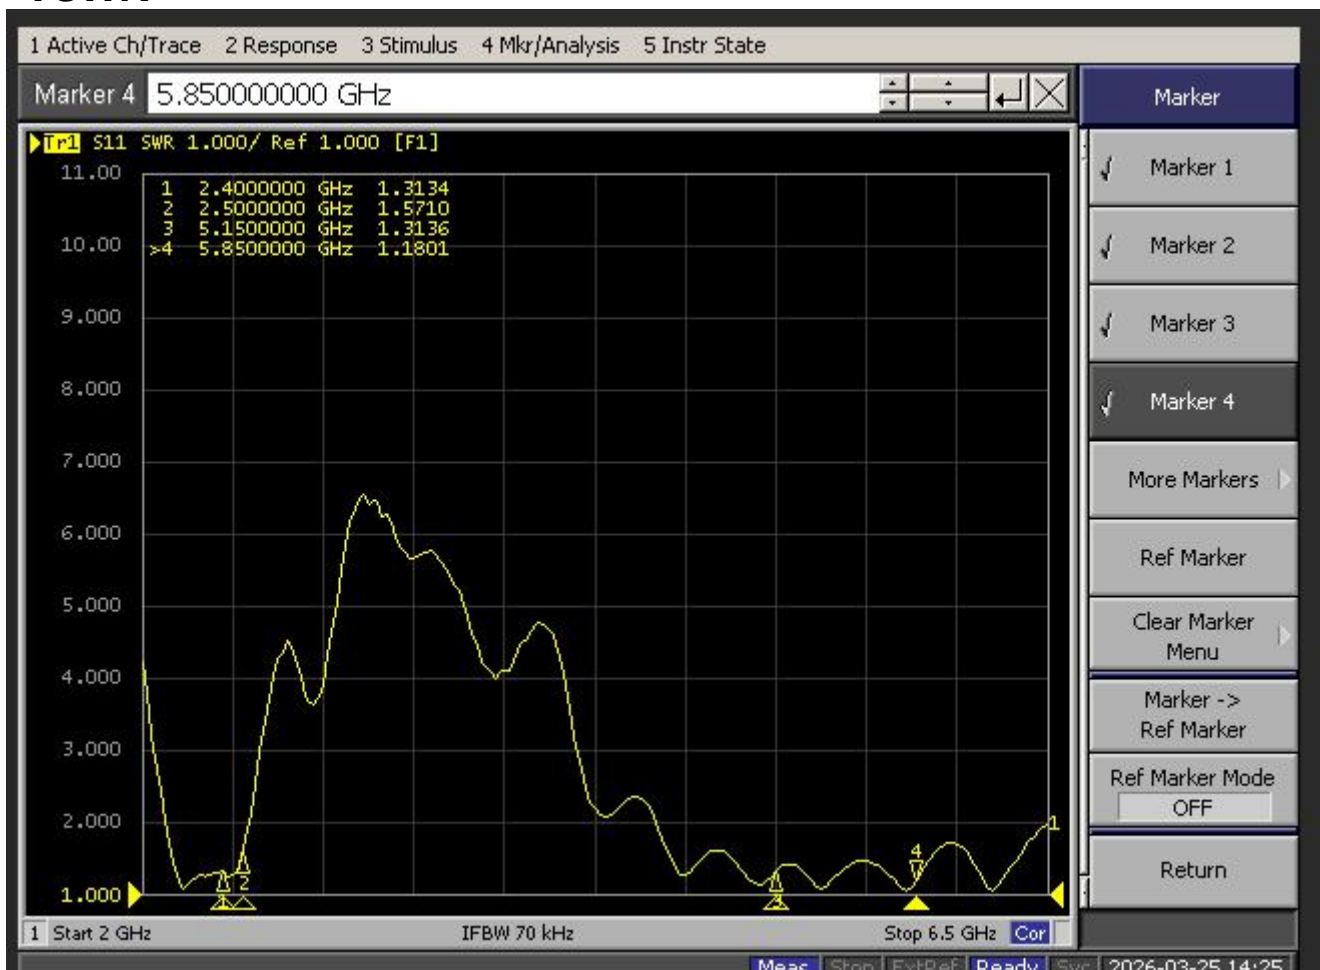


效率&增益 Efficiency & Gain

Freq (MHz)	Effi (%)	Gain (dBi)
2400	54.98	3.00
2450	49.03	2.00
2500	45.62	1.16
5150	51.18	3.20
5550	46.44	3.01
5850	43.71	3.85

2D&3D 图: 2D&3D picture

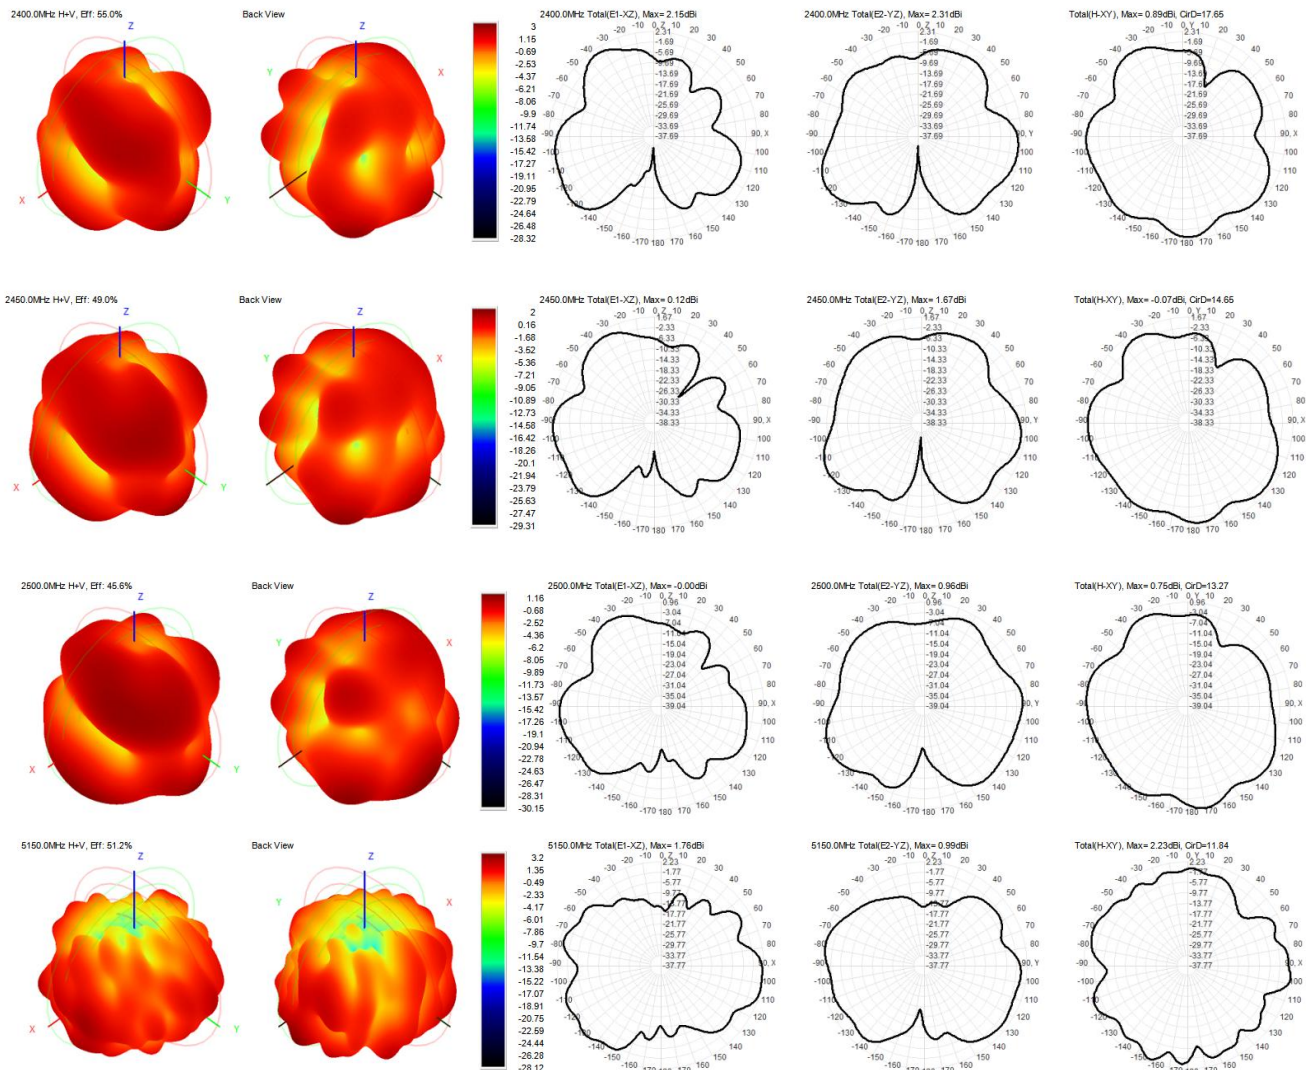

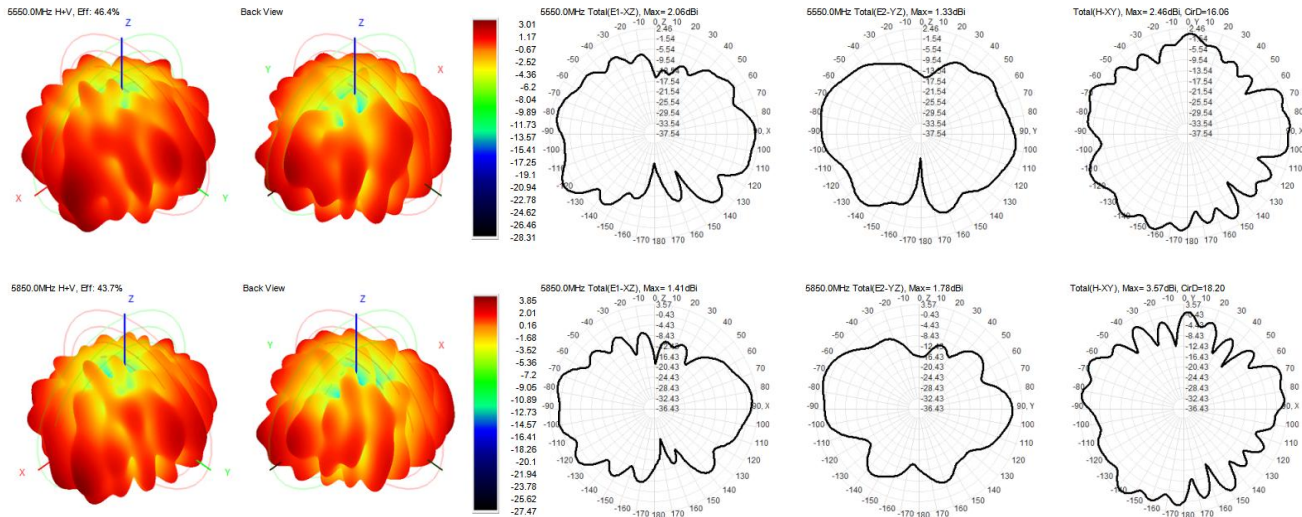

3. 产品性能参数: Product Performance Specifications:

电性能指标Electrical Specifications	
频率范围Frequency Range (MHz)	2400-2500/5150-5850MHz
输入阻抗Input Impedence (Ω)	50
电压驻波比V.S.W.R	≤ 2.0
增益Gain (dBi)	3 ± 1
极化形式Polarization Type	线性Liner
机械指标Mechanical Specifications	
连接器型号Connect Type	IPEX
电缆型号Cable Type	RG1.13
天线体材质Material	FPC
天线尺寸Size	37*9MM
工作温度Operating Temp	-25 ~ +75 °C