

Test Report

Product: ST PRO

Trade Mark: SKYTRAK™

Model Number: SKYTRAK PRO

FCC ID: 2AH3O-SKYTRAKPRO

Prepared for

Rapsodo Pte Ltd

Blk 20 Ayer Rajah Crescent, #08-05 Singapore 139964

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	6
1.3	OPERATION CHANNEL LIST	6
1.4	TEST SETUP	7
1.5	ANCILLARY EQUIPMENT	7
2	SUMMARY OF TEST RESULT	8
3	TEST FACILITIES AND ACCREDITATIONS	9
3.1	TEST LABORATORY	9
3.2	ENVIRONMENTAL CONDITIONS	9
3.3	MEASUREMENT UNCERTAINTY	9
3.4	TEST SOFTWARE	10
4	LIST OF TEST EQUIPMENT	11
5	TEST ITEM AND RESULTS.....	12
5.1	DYNAMIC FREQUENCY SELECTION.....	12
5.1.1	<i>Limits</i>	12
5.1.2	<i>Test Procedures</i>	14
5.1.3	<i>Test Setup</i>	15
5.1.4	<i>Test Result</i>	16
6	PHOTOGRAPHS OF THE TEST SETUP.....	21

TEST RESULT CERTIFICATION**Applicant's Name**..... : Rapsodo Pte Ltd

Address : Blk 20 Ayer Rajah Crescent, #08-05 Singapore 139964

Manufacturer's Name : Rapsodo Pte Ltd

Address : Blk 20 Ayer Rajah Crescent, #08-05 Singapore 139964

Product description

Product name : ST PRO

Model Number : SKYTRAK PRO


Standards : FCC Part 15.407IEEE/ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 +
Errata to C63.10a-2024Test procedure..... : KDB 905462 D06 802.11 Channel Plans New Rules v02
KDB 905462 D02 UNII DFS Compliance Procedures New Rules
v02

KDB 905462 D04 Test Mode New Rules v01


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test


Date (s) of performance of tests : June 26, 2026~July 20, 2026

Test Result..... : **Pass****Testing Engineer** :

(Z o e S u)

Technical Manager :

(M i n g L i u)

Authorized Signatory :

(L e o S u)

Revision History

[illegible]

1 General Description

1.1 Description of EUT

Product name:	ST PRO
Model name:	SKYTRAK PRO
Series Model:	N/A
Different of series model:	N/A
Frequency range:	U-NII-1: 5180-5240MHz U-NII-2A: 5260-5320MHz U-NII-2C: 5500-5700MHz U-NII-3: 5745-5825MHz
Modulation type:	IEEE802.11a/n(HT20/HT40)/ac(VHT20/VHT40/VHT80)/ax(HE 20/HE40/HE80): OFDM/OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Bit Rate of transmitter:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n (20MHz): MCS0-7, up to 72.2Mbps 802.11n (40MHz): MCS0-7, up to 150Mbps 802.11ac (20 MHz): MCS0-8, up to 86.7Mbps 802.11ac (40MHz): MCS0-9, up to 200Mbps. 802.11ac (80MHz): MCS0-9, up to 433.3Mbps 802.11ax (20MHz): MCS0-8, up to 143.4Mbps 802.11ax (40MHz): MCS0-10, up to 286.8Mbps 802.11ax (80MHz): MCS0-11, up to 600.5Mbps
Channel bandwidth:	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac/ax: 20 MHz, 40 MHz 802.11ac/ax: 20 MHz, 40 MHz, 80MHz
Antenna type:	ANT1: FPC Antenna ANT2: FPC Antenna
Antenna gain:	ANT1: 5.05dBi ANT2: 3.85dBi MIMO: 7.47dBi
Max. output power:	U-NII-1: 17.07dBm U-NII-2A: 17.15dBm U-NII-2C: 17.22dBm U-NII-3: 17.32dBm
Hardware version:	Rev B
Software version:	BSP: v2.1.5 SW: v1.4.3
Battery:	DC 7.4V, 10000mAh

Power supply:	Input: 15V=3A
Adapter information:	MODEL: SW-PD45WC INPUT: 100-240V~1.5A 50/60Hz OUTPUT: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A (45W Max)

1.2 Test Mode

For 802.11a/n(HT20)/ac(VHT20)/ax(HE20)

U-NII-2A(5250 - 5350MHz)			U-NII-2C (5470 - 5725MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
52	Low	5260	100	Low	5500
56	Mid	5280	116	Mid	5580
64	High	5320	140	High	5700

For 802.11n(HT40)/ac(VHT40)/ax(HE40)

U-NII-2A(5250 - 5350MHz)			U-NII-2C (5470 - 5725MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
54	Low	5270	102	Low	5510
62	High	5310	110	Mid	5550
--	--	--	134	High	5670

U-NII-2A(5250 - 5350 MHz)	
Channel Number	Frequency (MHz)
58	5290

For 802.11ac(VHT80)/ax(HE80)

U-NII-2C (5470 - 5725 MHz)	
Channel Number	Frequency (MHz)
106	5530
122	5610

1.3 Operation Channel List

For U-NII-1:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	--	--
44	5220	--	--	--	--
48	5240	--	--	--	--

For U-NII-2A:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310	--	--
60	5300	--	--	--	--
64	5320	--	--	--	--

For U-NII-2C:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630	--	--
116	5580	134	5670	--	--
120	5600	142	5710	--	--
124	5620	--	--	--	--
128	5640	--	--	--	--
132	5660	--	--	--	--
136	5680	--	--	--	--
140	5700	--	--	--	--
144	5720	--	--	--	--

For U-NII-3:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Ancillary Equipment

Equipment	Model	S/N	FCC ID	Manufacturer
Notebook	BDR-WDH	A3RQPM242 0002411	/	Honor Terminal Co., Ltd.
Wireless Home Router	FAST5280	/	VW3FAST 5280	/

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.407(h)	Non-Occupancy PeriodDFS Detection Threshold	Pass	
2	15.407(h)	Channel Availability Check Time	N/A	
3	15.407(h)	U-NII Detection Bandwidth	N/A	
4	15.407(h)	Channel Closing Transmission Time	N/A	
5	15.407(h)	Channel Move Time	Pass	
6	15.407(h)	Statistical Performance Check	N/A	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	

Humidity	± 5 %	
----------	-------	--

3.4 Test Software

Software name	Manufacturer	Model	Version
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaio Signal Generator	Agilent	N5181A	MY47070421	2026-04-27	2027-04-26
2	HB-E042	WIDEBAND RADIO COMMUNICA TION TESTER	R&S	CMW500	132108	2026-04-27	2027-04-26
3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2026-04-28	2027-04-27
4	HB-E044	Signal & spectrum Analyzer	R&S	FSV3044	101264	2026-04-28	2027-04-27
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2026-04-28	2027-04-27
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2026-04-30	2027-04-29

Note:

1. The calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).
2. The instrument RF Control Box, numbered HB-E045, contains power meter.

5 Test Item And Results

5.1 Dynamic Frequency Selection

5.1.1 Limits

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid cochannel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.¹

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.² Tables 1 and 2 shown below summarize the information contained in sections 5.1.1 and 5.1.2.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Master Devices

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250-5350 MHz and 5470-5725 MHz bands, DFS is not required in the 5150-5250 MHz or 5725-5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-N devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Client Devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

DFS technical requirements specifications

DFS Detection Thresholds

Table 3 below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

NOTE: For devices that support multiple Nominal Channel Bandwidths, the Channel Availability Check

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	62 dBm
EIRP < 200 milliwatt that do not meet the powerspectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

5.1.2 Test Procedures

In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during In-Service Monitoring

-Channel Closing Transmission Time

-Channel Move Time

- Non-Occupancy Period

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating

Channel of the U-NII device (In- Service Monitoring).

- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without DFS), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Radar Type 0 in Table 5 at levels defined in Table 3, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/error. Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs. Figure 17 illustrates Channel Closing Transmission Time.
- f) When operating as a Master Device, monitor the UUT for more than 30 minutes following instant T_2 to verify that the UUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.
- g) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps a) to f).

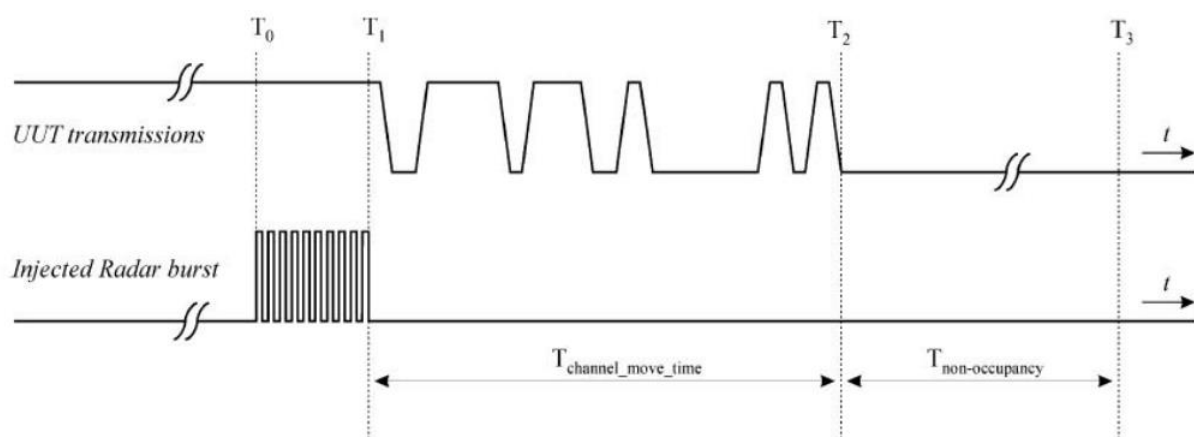


Figure 17: Example of Channel Closing Transmission Time & Channel Closing Time

5.1.3 Test Setup


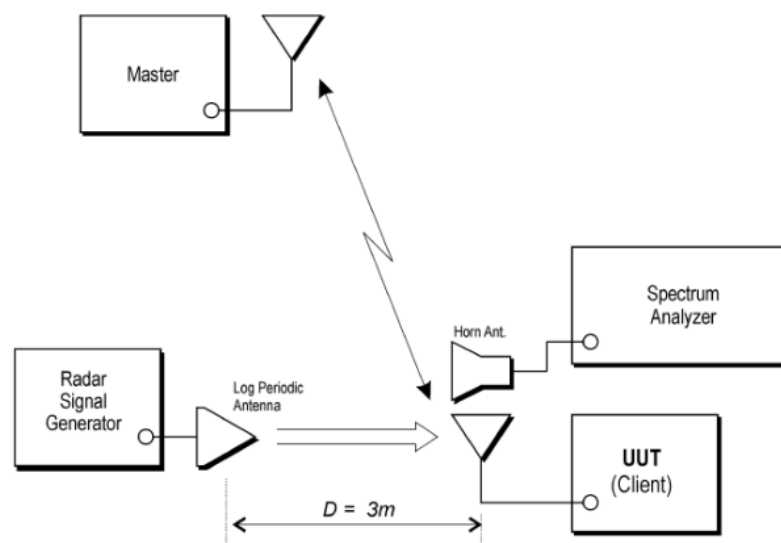


Figure 7: Example Radiated Setup where UUT is a Client and radar Test Waveforms are injected into the Client

5.1.4 Test Result

ANT 1

Radar Waveform calibration Plot

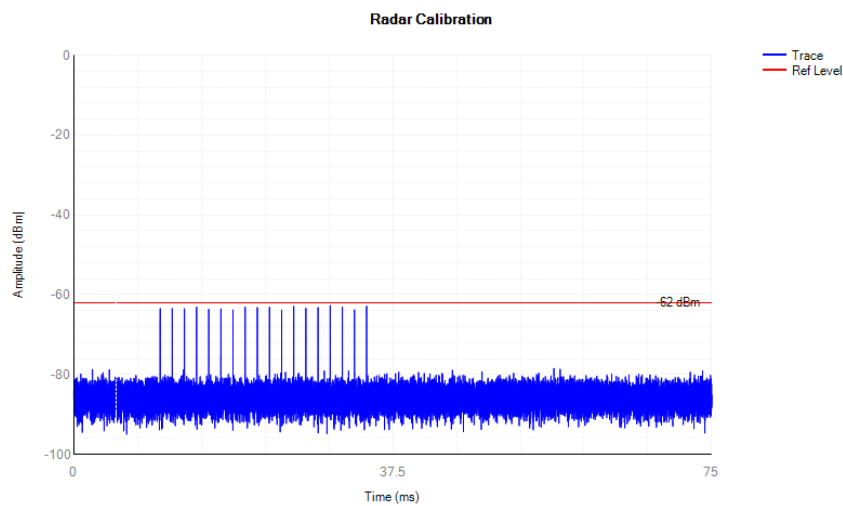


Channel Shutdown

Mode	Channel number	Center frequency	Channel MoveTime (ms)	Limits (ms)	Channel Closing Transmission Time (ms)	Limits(ms)	Results
802.11ax80	58	5290	737.7	10000	4.8	60	Pass


Note 1: We test all channels that need to be tested for DFS, recording only part of the test pattern and data. In this report, we have identified other parts that are compliant with FCC regulations.

802.11ax80 channel 58 5290MHz

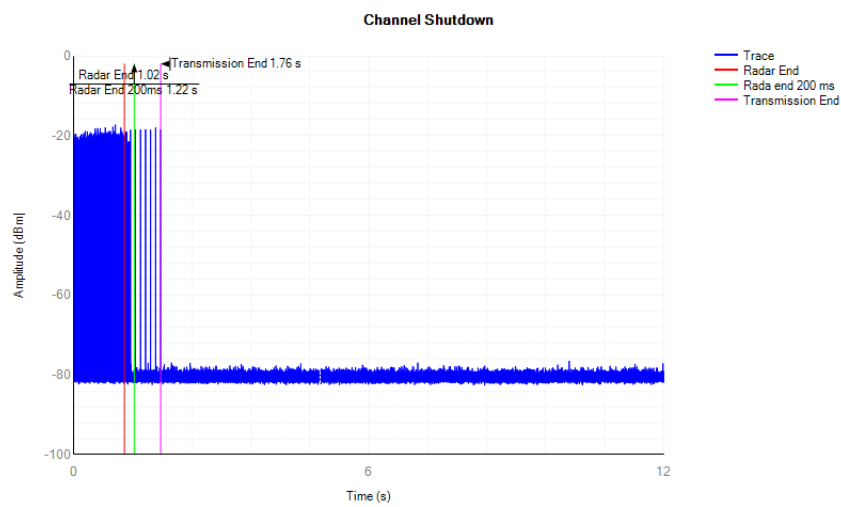


Non-Occupancy Period					
Mode	Frequency	Bandwidth	Measured Value	Limit Requirements	Verdict
802.11ax80	5290MHz	80MHz	>30min	30min	Pass

802.11ax80 channel 58 5290MHz

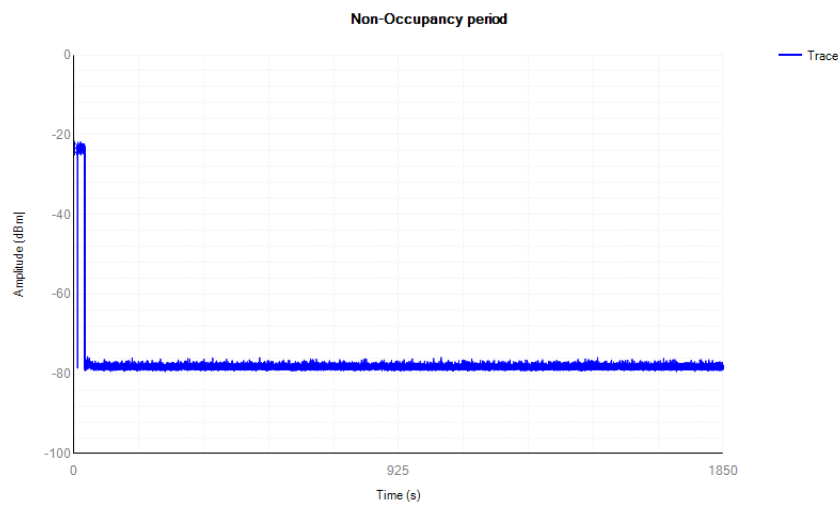

ANT 1

Radar Waveform calibration Plot

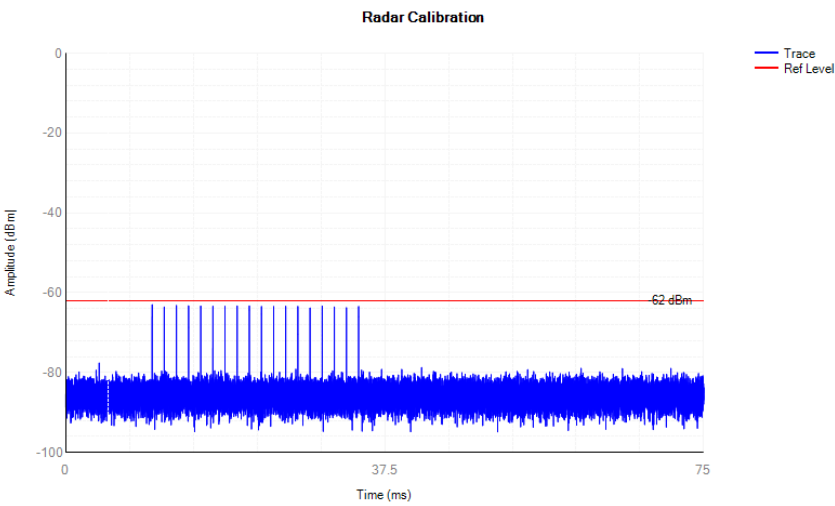


Channel Shutdown

Mode	Channel number	Center frequency	Channel MoveTime (ms)	Limits (ms)	Channel Closing Transmission Time (ms)	Limits(ms)	Results
802.11ax 80	106	5530	739.3	10000	2.8	60	Pass

Note 1: We test all channels that need to be tested for DFS, recording only part of the test pattern and data. In this report, we have identified other parts that are compliant with FCC regulations.


802.11ax80 channel 106 5530MHz

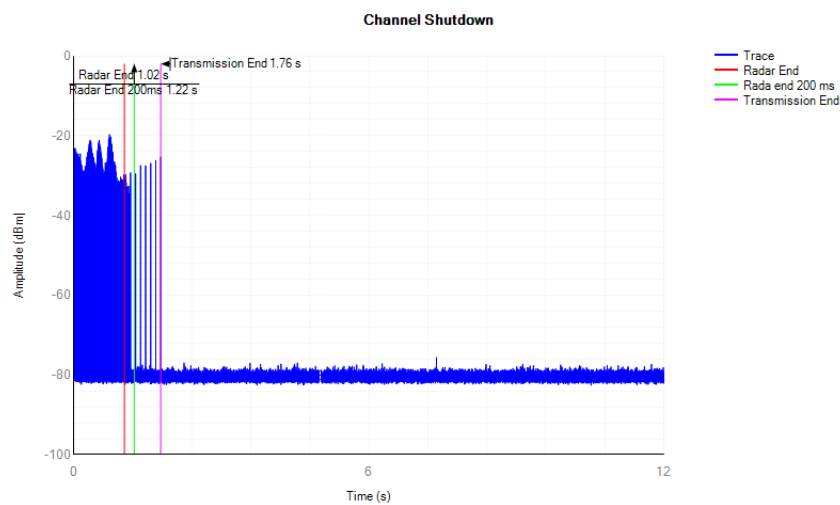

Non-Occupancy Period

Mode	Frequency	Bandwidth	Measured Value	Limit Requirements	Verdict
802.11ax80	5530MHz	80MHz	>30min	30min	Pass

802.11ax80 channel 106 5530MHz

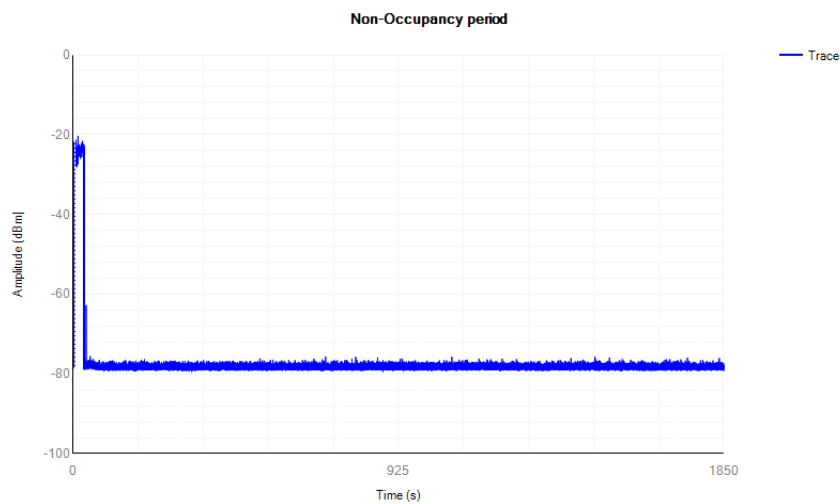

Note: All the mode have been tested and passed, only showed the worst mode in the report.

6 Photographs of the Test Setup

See the Appendix: Test Setup Photo

******* END OF REPORT *******