



FCC Part 15C Test Report

FCC ID: 2AH4KIBOX

Product Name:	Mini pc
Trademark:	N/A
Model Name :	IBOX-501 N10 FW10804
Prepared For :	Protectli
Address :	3109 Levante St, Carlsbad, CA 92009, USA
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	Mar. 25 – Apr. 20, 2016
Date of Report :	Apr. 21, 2016
Report No.:	BCTC-160302477E



TEST RESULT CERTIFICATION

Applicant's name : Protectli

Address : 3109 Levante St, Carlsbad, CA 92009, USA

Manufacture's Name..... : SHENZHEN XINSAIKE TECHNOLOGY Co.,Ltd

Address : No. 46 Workshop, The Fourth Industry Zone of Shuitian, Shiyan ,
Baoan, Shenzhen, Guangdong, China.

Product description

Product name : Mini pc

Model and/or type reference : IBOX-501 N10
FW10804

Standards : FCC Part15.247

Test procedure ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer : _____

Eric Yang

(Eric Yang)

Technical Manager : _____

Sophie Lee

(Sophia Lee)

Authorized Signatory : _____

Casey Wang

(Casey Wang)



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	17
3.2.5 EUT OPERATING CONDITIONS	18
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	19
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	20
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	22
4 . POWER SPECTRAL DENSITY TEST	26
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27



Table of Contents	Page
5 . BANDWIDTH TEST	43
5.1 APPLIED PROCEDURES / LIMIT	43
5.1.1 TEST PROCEDURE	43
5.1.2 DEVIATION FROM STANDARD	43
5.1.3 TEST SETUP	43
5.1.4 EUT OPERATION CONDITIONS	43
5.1.5 TEST RESULTS	44
6 . PEAK OUTPUT POWER TEST	60
6.1 APPLIED PROCEDURES / LIMIT	60
6.1.1 TEST PROCEDURE	60
6.1.2 DEVIATION FROM STANDARD	60
6.1.3 TEST SETUP	60
6.1.4 EUT OPERATION CONDITIONS	60
6.1.5 TEST RESULTS	61
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	62
7.1 DEVIATION FROM STANDARD	62
7.2 TEST SETUP	62
7.3 EUT OPERATION CONDITIONS	63
7.4 TEST RESULTS	63
8 . ANTENNA REQUIREMENT	72
8.1 STANDARD REQUIREMENT	72
8.2 EUT ANTENNA	72
9 . EUT TEST PHOTO	73
10 . EUT PHOTO	75
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registered No.: 187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mini pc										
Trade Name	N/A										
Model Name	IBOX-501 N10 FW10804										
Model Difference	The product is different for model number and outlook color.										
Product Description	The EUT is a Mini pc <table border="1"> <tr> <td>Operation Frequency:</td><td>802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz</td></tr> <tr> <td>Modulation Type:</td><td>WIFI: OFDM/DSSS</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps</td></tr> <tr> <td>Number Of Channel</td><td>802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz	Modulation Type:	WIFI: OFDM/DSSS	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz										
Modulation Type:	WIFI: OFDM/DSSS										
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps										
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH										
Antenna Designation:	Please see Note 3.										
Channel List	Please refer to the Note 2.										
Adapter	Model:MS-DC-1 I/P:100~240V 50/60Hz 1.0A max O/P:DC 12V 4000mA										
Power	DC 12V from adapter										
hardware version	--										
Software version	--										
Serial number	--										
Connecting I/O Port(s)	Please refer to the User's Manual										

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		



Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	external Antenna	anti thread SMA	2.0	
2	N/A	N/A	external Antenna	anti thread SMA	2.0	

Note: The EUT incorporates a mimo funtion. Physically, the EUT provide two completed transmitter and two receivers.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Mini pc	N/A	IBOX-501 N10	N/A	EUT
E-3	Adapter	N/A	MS-DC-1	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	Unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2015.08.25	2016.08.24
2	Test Receiver	R&S	ESPI	101396	2015.08.25	2016.08.24
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2015.08.25	2016.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.07.06	2016.07.05
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2015.07.06	2016.07.05
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2015.08.25	2016.08.24
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2015.08.25	2016.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2015.08.25	2016.08.24
10	Loop Antenna	ARA	PLIBOX-501 N1030/B	1029	2015.07.06	2016.07.05
11	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05
13	RF cables	R&S	N/A	N/A	2015.07.06	2016.07.05

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2015.06.06	2016.06.05
2	LISN	R&S	NSLK8126	8126466	2015.08.24	2016.08.23
3	LISN	R&S	NSLK8126	8126487	2015.08.24	2016.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06
5	RF cables	R&S	R204	R20X	2015.07.06	2016.07.05



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.6 TEST RESULTS

EUT :	Mini pc	Model Name. :	IBOX-501 N10
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 12V from adapter	Test Mode :	Mode 5

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2420	25.71	10.08	35.79	62.02	-26.23	QP	
2		0.2420	27.08	10.08	37.16	52.02	-14.86	AVG	
3		0.4820	33.45	10.11	43.56	56.30	-12.74	QP	
4	*	0.4820	31.75	10.11	41.86	46.30	-4.44	AVG	
5		0.9620	30.37	10.16	40.53	56.00	-15.47	QP	
6		0.9620	28.82	10.16	38.98	46.00	-7.02	AVG	
7		1.4420	28.76	10.17	38.93	56.00	-17.07	QP	
8		1.4420	27.36	10.17	37.53	46.00	-8.47	AVG	
9		3.7180	19.95	10.17	30.12	56.00	-25.88	QP	
10		3.7180	18.44	10.17	28.61	46.00	-17.39	AVG	
11		8.3979	20.34	10.11	30.45	60.00	-29.55	QP	
12		8.3979	15.75	10.11	25.86	50.00	-24.14	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

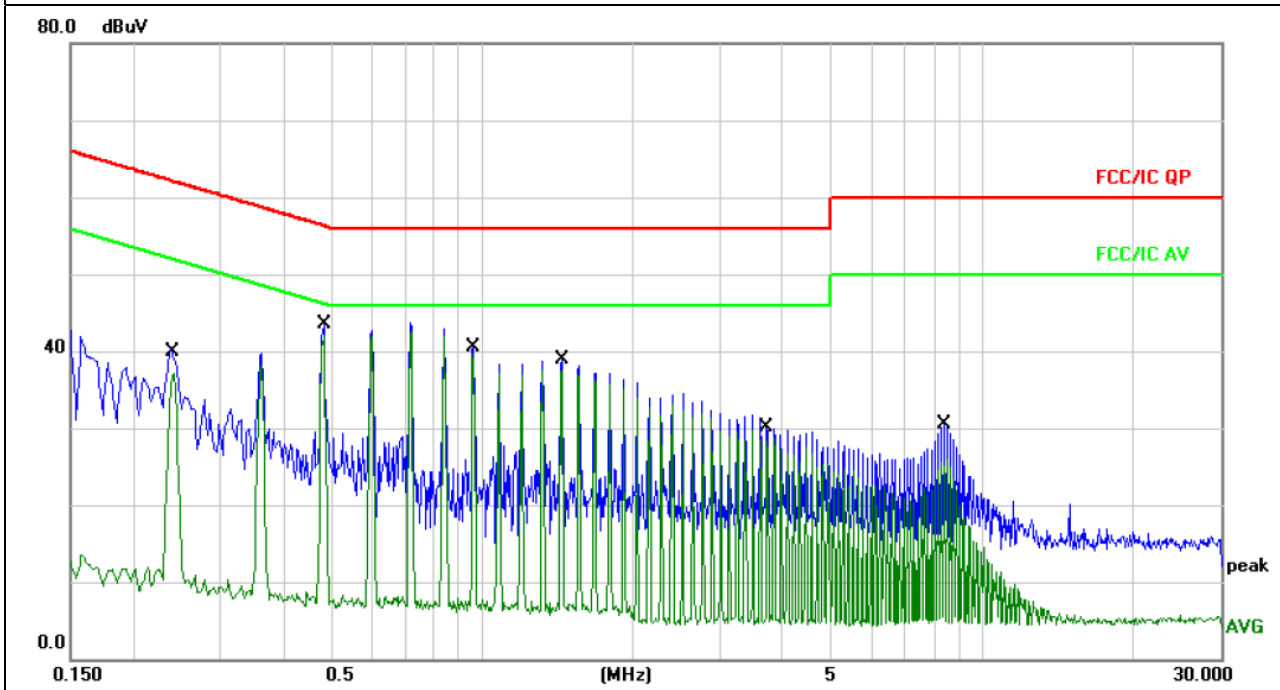




EUT :	Mini pc	Model Name. :	IBOX-501 N10
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 12V from adapter	Test Mode :	Mode 5

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.3620	27.53	10.10	37.63	58.68	-21.05	QP	
2		0.3620	25.55	10.10	35.65	48.68	-13.03	AVG	
3		0.7180	30.79	10.14	40.93	56.00	-15.07	QP	
4	*	0.7180	29.25	10.14	39.39	46.00	-6.61	AVG	
5		1.4380	25.94	10.17	36.11	56.00	-19.89	QP	
6		1.4380	24.10	10.17	34.27	46.00	-11.73	AVG	
7		2.6380	20.06	10.19	30.25	56.00	-25.75	QP	
8		2.6380	19.14	10.19	29.33	46.00	-16.67	AVG	
9		4.4379	15.98	10.16	26.14	56.00	-29.86	QP	
10		4.4379	13.85	10.16	24.01	46.00	-21.99	AVG	
11		8.3979	13.02	10.11	23.13	60.00	-36.87	QP	
12		8.3979	6.37	10.11	16.48	50.00	-33.52	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

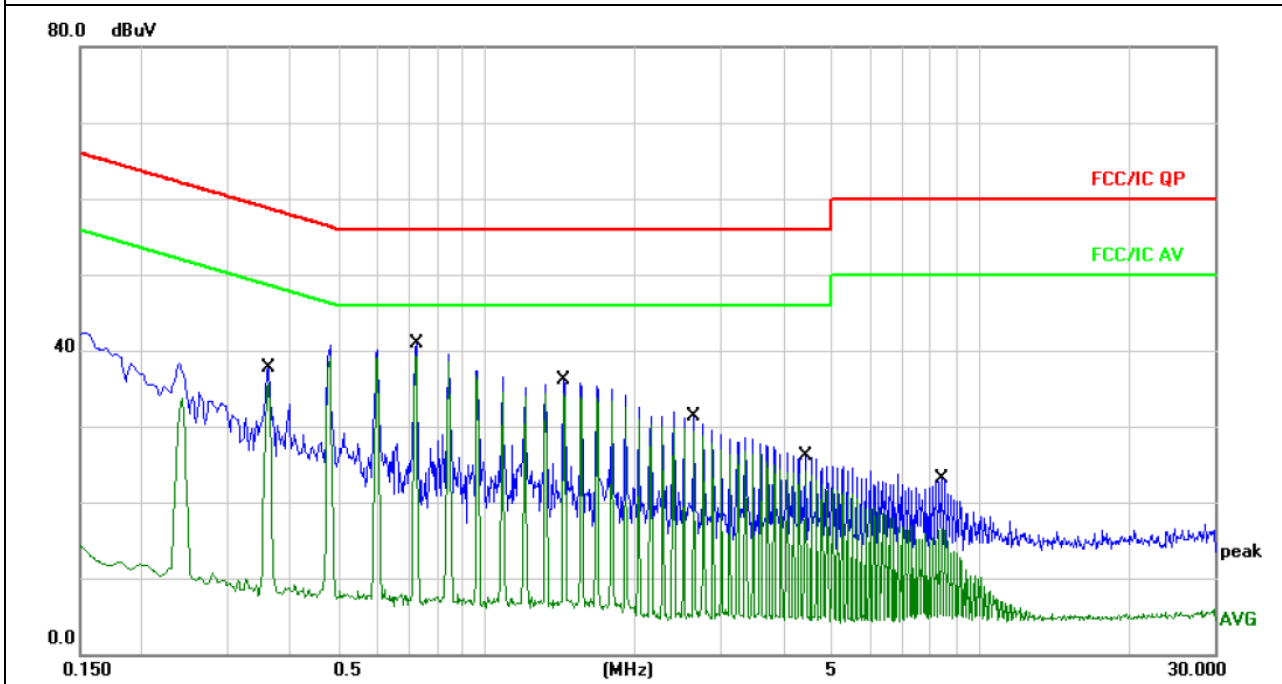



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

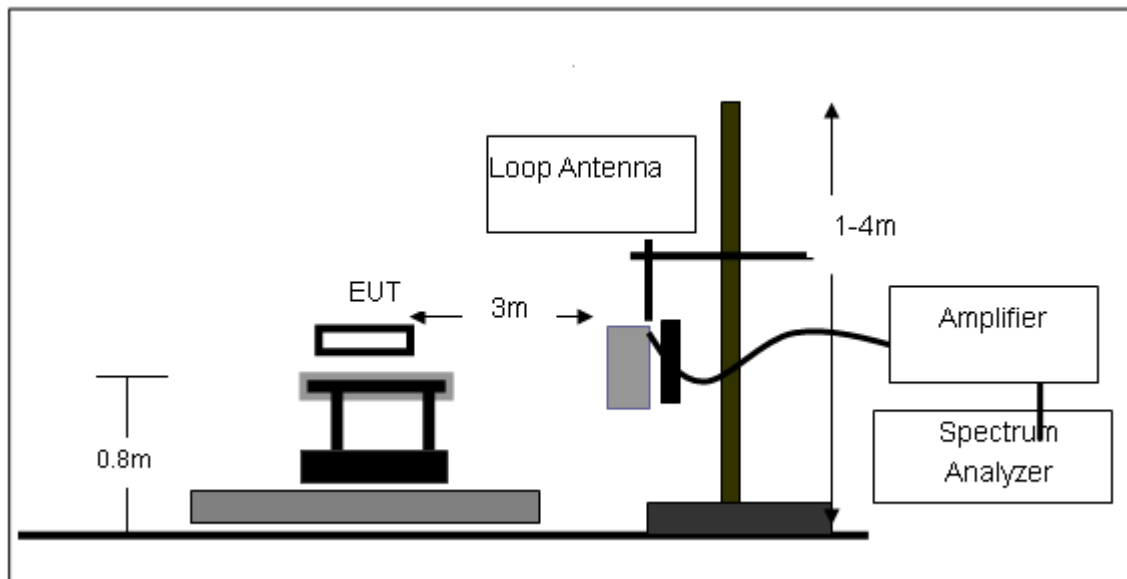

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

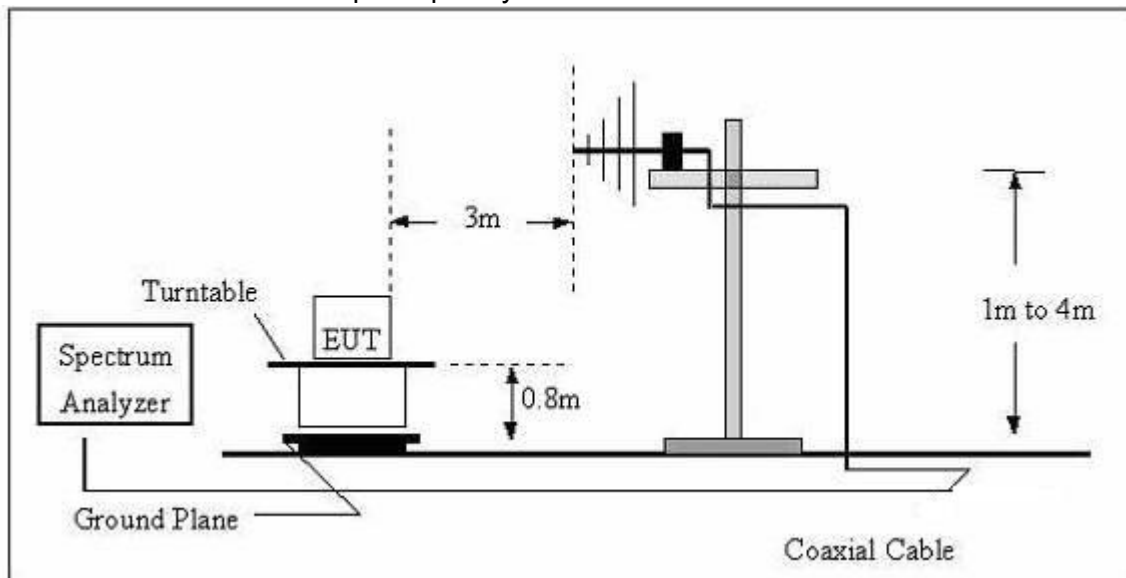

(C) Radiated Emission Test-Up Frequency Above 1GHz

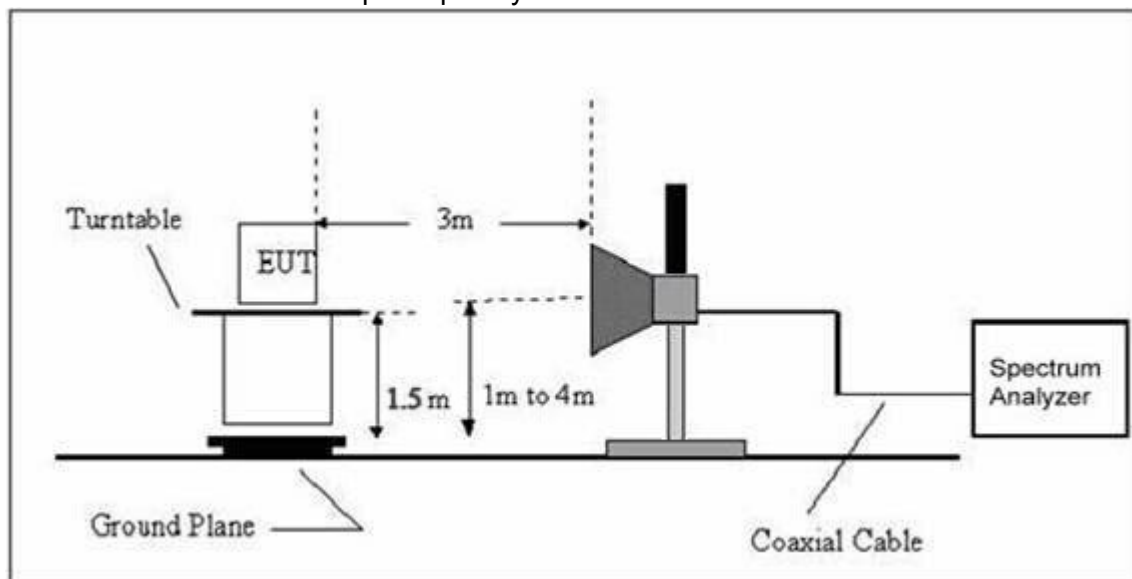

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Mini pc	Model Name. :	IBOX-501 N10
Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**


EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V from adapter		
Test Mode :	Mode 5		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		38.3462	32.66	-8.77	23.89	40.00	-16.11	QP		
2		148.4410	40.40	-12.93	27.47	43.50	-16.03	QP		
3		223.7334	45.98	-15.42	30.56	46.00	-15.44	QP		
4		446.4141	48.36	-9.08	39.28	46.00	-6.72	QP		
5		595.1329	44.20	-5.83	38.37	46.00	-7.63	QP		
6	*	744.8661	48.41	-3.49	44.92	46.00	-1.08	QP		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

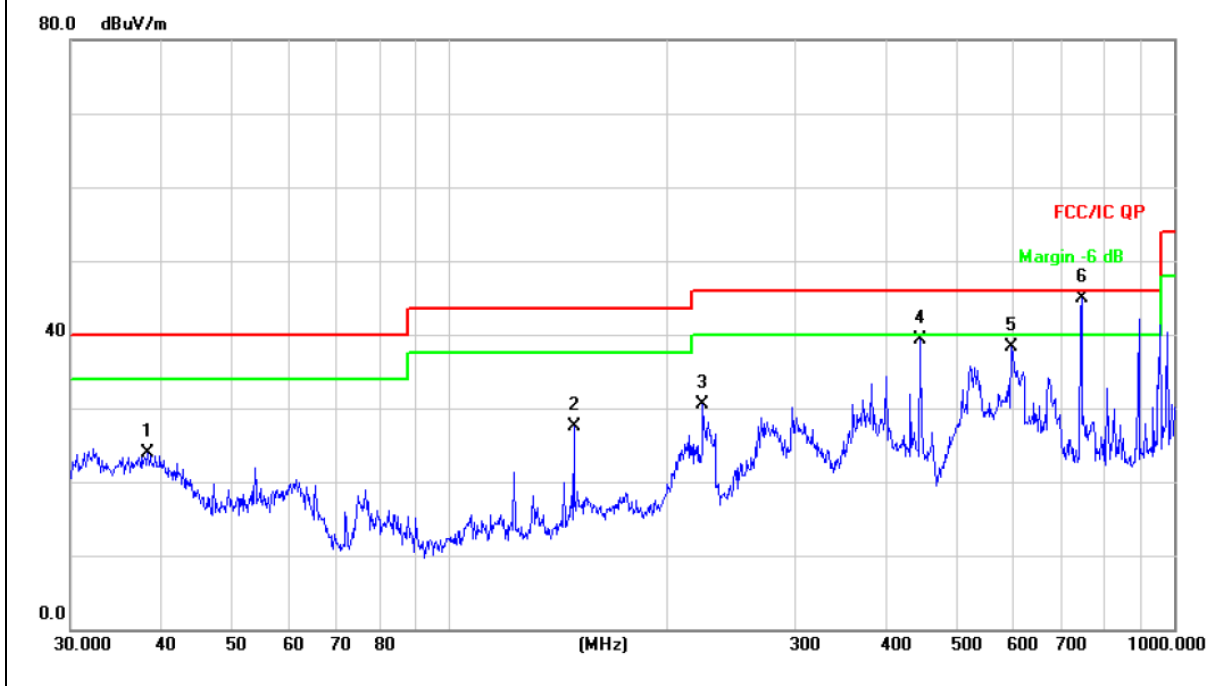




EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V from adapter		
Test Mode :	Mode 5		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	47.67	-8.02	39.65	40.00	-0.35	QP		
2		40.4172	42.74	-8.91	33.83	40.00	-6.17	QP		
3		63.5356	39.57	-12.22	27.35	40.00	-12.65	QP		
4		446.4141	48.18	-9.08	39.10	46.00	-6.90	QP		
5	!	595.1329	49.83	-5.83	44.00	46.00	-2.00	QP		
6	!	744.8661	46.55	-3.22	43.33	46.00	-2.67	QP		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

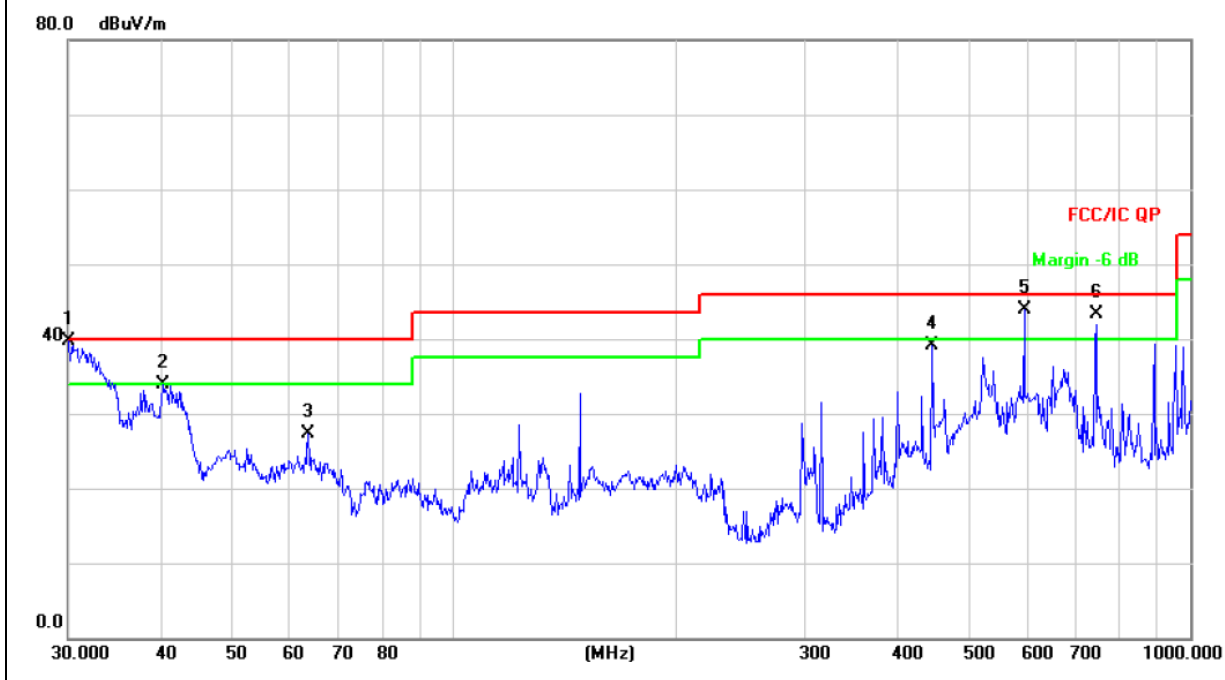

**3.2.8 TEST RESULTS (1GHZ~25GHZ)****802.11b**

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.000	65.72	-3.64	62.08	74	-11.92	Pk
V	4824.000	47.25	-3.64	43.61	54	-10.39	AV
V	7236.000	58.43	-5.38	53.05	74	-20.95	Pk
V	7236.000	41.24	-5.38	35.86	54	-18.14	AV
H	4824.000	65.22	-3.64	61.58	74	-12.42	Pk
H	4824.000	45.95	-3.64	42.31	54	-11.69	AV
H	7236.000	58.60	-5.38	53.22	74	-20.78	Pk
H	7236.000	41.33	-5.38	35.95	54	-18.05	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4874.000	63.48	-3.63	59.85	74	-14.15	Pk
V	4874.000	45.25	-3.63	41.62	54	-12.38	AV
V	7311.000	58.61	-5.67	52.94	74	-21.06	Pk
V	7311.000	41.08	-5.67	35.41	54	-18.59	AV
H	4874.000	64.43	-3.63	60.80	74	-13.20	Pk
H	4874.000	44.92	-3.63	41.29	54	-12.71	AV
H	7311.000	57.58	-5.67	51.91	74	-22.09	Pk
H	7311.000	40.38	-5.67	34.71	54	-19.29	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4924.000	66.13	-3.64	62.49	74	-11.51	Pk
V	4924.000	46.93	-3.64	43.29	54	-10.71	AV
V	7386.000	57.68	-5.84	51.84	74	-22.16	Pk
V	7386.000	40.97	-5.84	35.13	54	-18.87	AV
H	4924.000	64.90	-3.64	61.26	74	-12.74	Pk
H	4924.000	45.75	-3.64	42.11	54	-11.89	AV
H	7386.000	57.89	-5.84	52.05	74	-21.95	Pk
H	7386.000	40.37	-5.84	34.53	54	-19.47	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.000	65.72	-3.64	62.08	74	-11.92	Pk
V	4824.000	47.25	-3.64	43.61	54	-10.39	AV
V	7236.000	58.66	-5.38	53.28	74	-20.72	Pk
V	7236.000	42.33	-5.38	36.95	54	-17.05	AV
H	4824.000	65.22	-3.64	61.58	74	-12.42	Pk
H	4824.000	45.95	-3.64	42.31	54	-11.69	AV
H	7236.000	57.84	-5.38	52.46	74	-21.54	Pk
H	7236.000	42.03	-5.38	36.65	54	-17.35	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4874.000	63.48	-3.63	59.85	74	-14.15	Pk
V	4874.000	45.25	-3.63	41.62	54	-12.38	AV
V	7311.000	58.34	-5.67	52.67	74	-21.33	Pk
V	7311.000	41.22	-5.67	35.55	54	-18.45	AV
H	4874.000	64.43	-3.63	60.80	74	-13.20	Pk
H	4874.000	44.92	-3.63	41.29	54	-12.71	AV
H	7311.000	58.36	-5.67	52.69	74	-21.31	Pk
H	7311.000	40.67	-5.67	35.00	54	-19.00	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4924.000	66.13	-3.64	62.49	74	-11.51	Pk
V	4924.000	46.93	-3.64	43.29	54	-10.71	AV
V	7386.000	58.66	-5.84	52.82	74	-21.18	Pk
V	7386.000	42.35	-5.84	36.51	54	-17.49	AV
H	4924.000	64.90	-3.64	61.26	74	-12.74	Pk
H	4924.000	45.75	-3.64	42.11	54	-11.89	AV
H	7386.000	57.68	-5.84	51.84	74	-22.16	Pk
H	7386.000	41.36	-5.84	35.52	54	-18.48	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.000	65.72	-3.64	62.08	74	-11.92	Pk
V	4824.000	47.25	-3.64	43.61	54	-10.39	AV
V	7236.000	57.36	-5.38	51.98	74	-22.02	Pk
V	7236.000	41.06	-5.38	35.68	54	-18.32	AV
H	4824.000	65.22	-3.64	61.58	74	-12.42	Pk
H	4824.000	45.95	-3.64	42.31	54	-11.69	AV
H	7236.000	57.66	-5.38	52.28	Pk	-21.72	Pk
H	7236.000	41.31	-5.38	35.93	AV	-18.07	AV
Remark:							
Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level							

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4874.000	63.48	-3.63	59.85	74	-14.15	Pk
V	4874.000	45.25	-3.63	41.62	54	-12.38	AV
V	7311.000	57.53	-5.67	51.86	74	-22.14	Pk
V	7311.000	41.08	-5.67	35.41	54	-18.59	AV
H	4874.000	64.43	-3.63	60.80	74	-13.20	Pk
H	4874.000	44.92	-3.63	41.29	54	-12.71	AV
H	7311.000	57.48	-5.67	51.81	74	-22.19	Pk
H	7311.000	41.11	-5.67	35.44	54	-18.56	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462							
V	4924.000	66.13	-3.64	62.49	74	-11.51	Pk
V	4924.000	46.93	-3.64	43.29	54	-10.71	AV
V	7386.000	57.28	-5.84	51.44	74	-22.56	Pk
V	7386.000	40.31	-5.84	34.47	54	-19.53	AV
H	4912.732	64.90	-3.64	61.26	74	-12.74	Pk
H	4912.732	45.75	-3.64	42.11	54	-11.89	AV
H	7386.000	57.58	-5.84	51.74	74	-22.26	Pk
H	7386.000	40.09	-5.84	34.25	54	-19.75	AV
Remark:							
Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level							

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422							
V	4844.000	65.31	-3.58	61.73	74	-12.27	Pk
V	4844.000	46.92	-3.58	43.34	54	-10.66	AV
V	7266.000	56.35	-5.51	50.84	74	-23.16	Pk
V	7266.000	39.58	-5.51	34.07	54	-19.93	AV
H	4844.000	65.48	-3.58	61.90	74	-12.10	Pk
H	4844.000	46.18	-3.58	42.60	54	-11.40	AV
H	7266.000	56.54	-5.51	51.03	74	-22.97	Pk
H	7266.000	39.35	-5.51	33.84	54	-20.16	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437							
V	4874.000	67.13	-3.63	63.50	74	-10.50	Pk
V	4874.000	46.61	-3.63	42.98	54	-11.02	AV
V	7311.000	56.24	-5.67	50.57	74	-23.43	Pk
V	7311.000	39.35	-5.67	33.68	54	-20.32	AV
H	4874.000	65.69	-3.63	62.06	74	-11.94	Pk
H	4874.000	45.85	-3.63	42.22	54	-11.78	AV
H	7311.000	56.18	-5.67	50.51	74	-23.49	Pk
H	7311.000	38.89	-5.67	33.22	54	-20.78	AV

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2452							
V	4904.000	64.46	-3.64	60.82	74	-13.18	Pk
V	4904.000	43.82	-3.64	40.18	54	-13.82	AV
V	7356.000	56.37	-5.78	50.59	74	-23.41	Pk
V	7356.000	39.88	-5.78	34.10	54	-19.90	AV
H	4904.000	59.53	-3.64	55.89	74	-18.11	Pk
H	4904.000	43.29	-3.64	39.65	54	-14.35	AV
H	7356.000	56.54	-5.78	50.76	74	-23.24	Pk
H	7356.000	39.27	-5.78	33.49	54	-20.51	AV

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX b Mode		


Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	Ant.1	4.08	7.02	8	PASS
	Ant.2	3.92			
2437 MHz	Ant.1	4.28	7.13	8	PASS
	Ant.2	3.97			
2462 MHz	Ant.1	4.31	7.25	8	PASS
	Ant.2	4.16			

Ant. 1

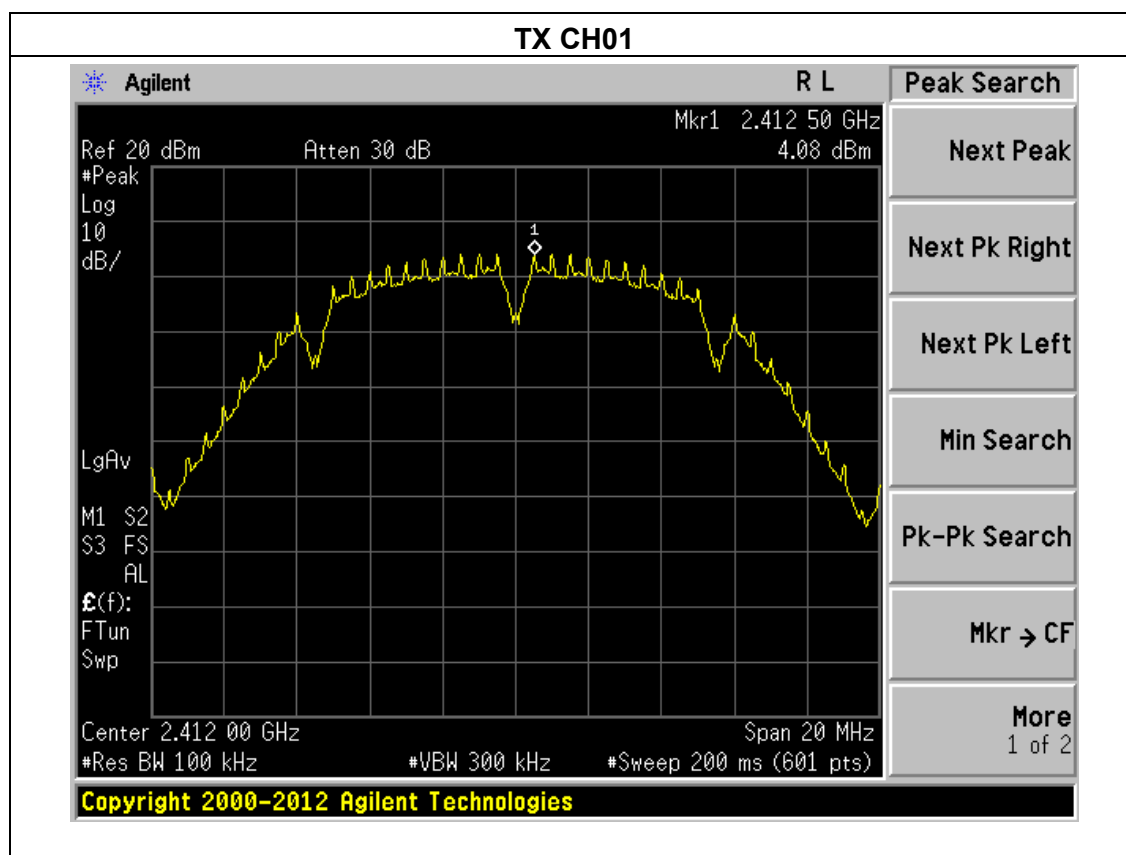




TX CH06


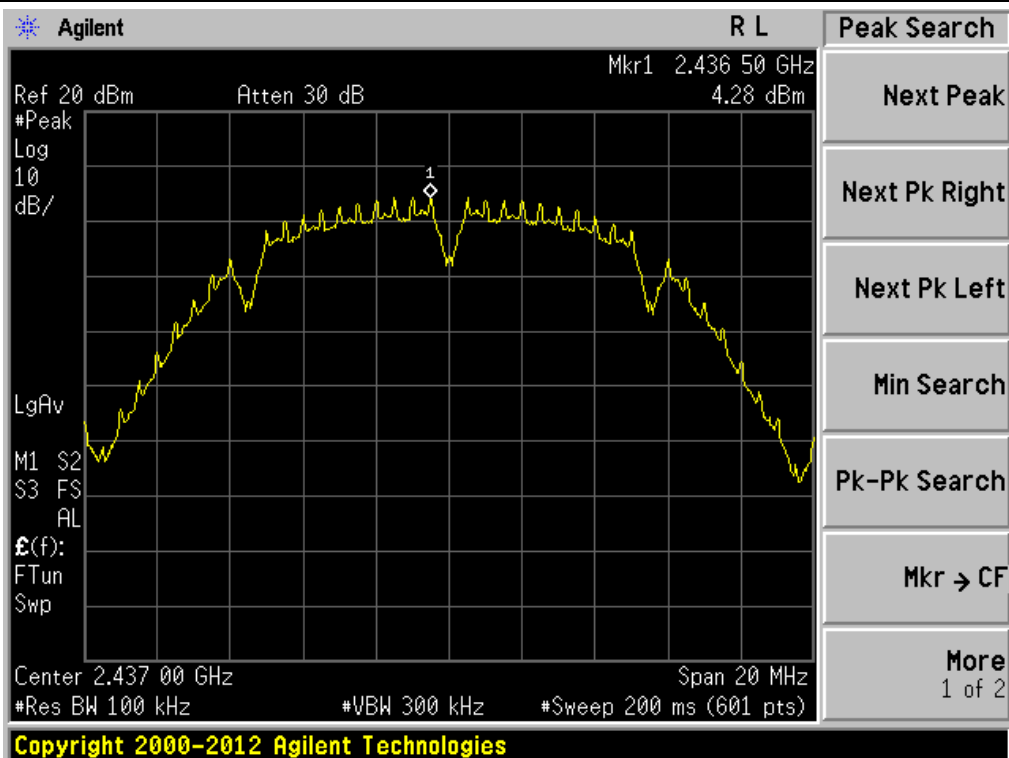



TX CH11

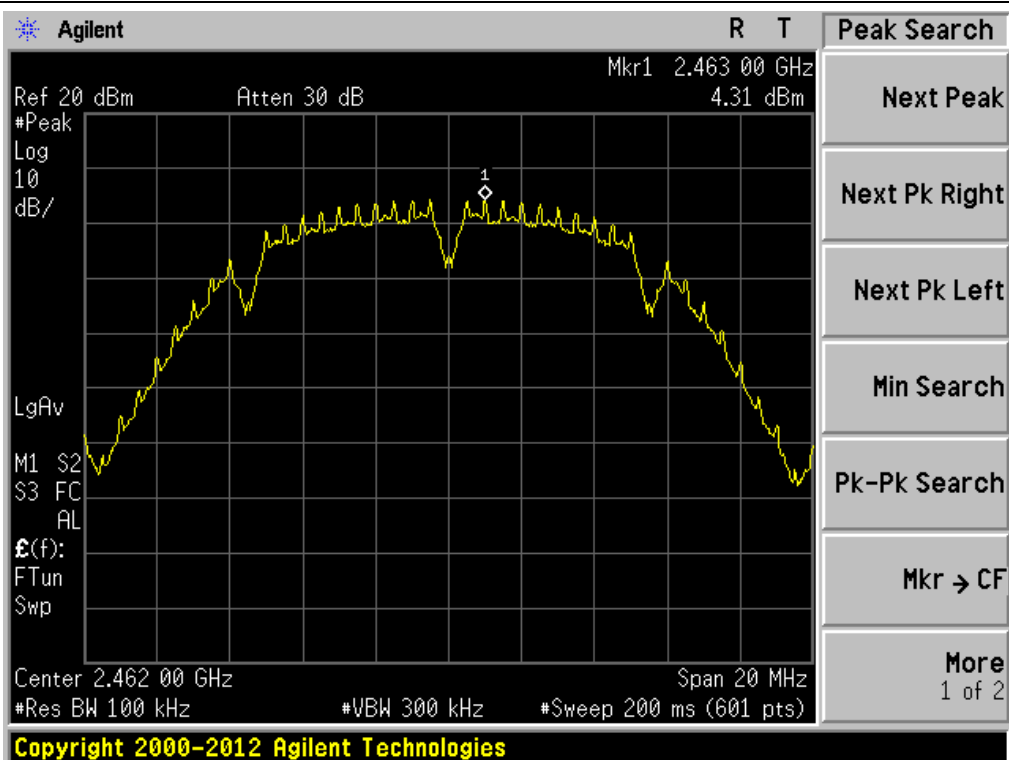



Ant. 2

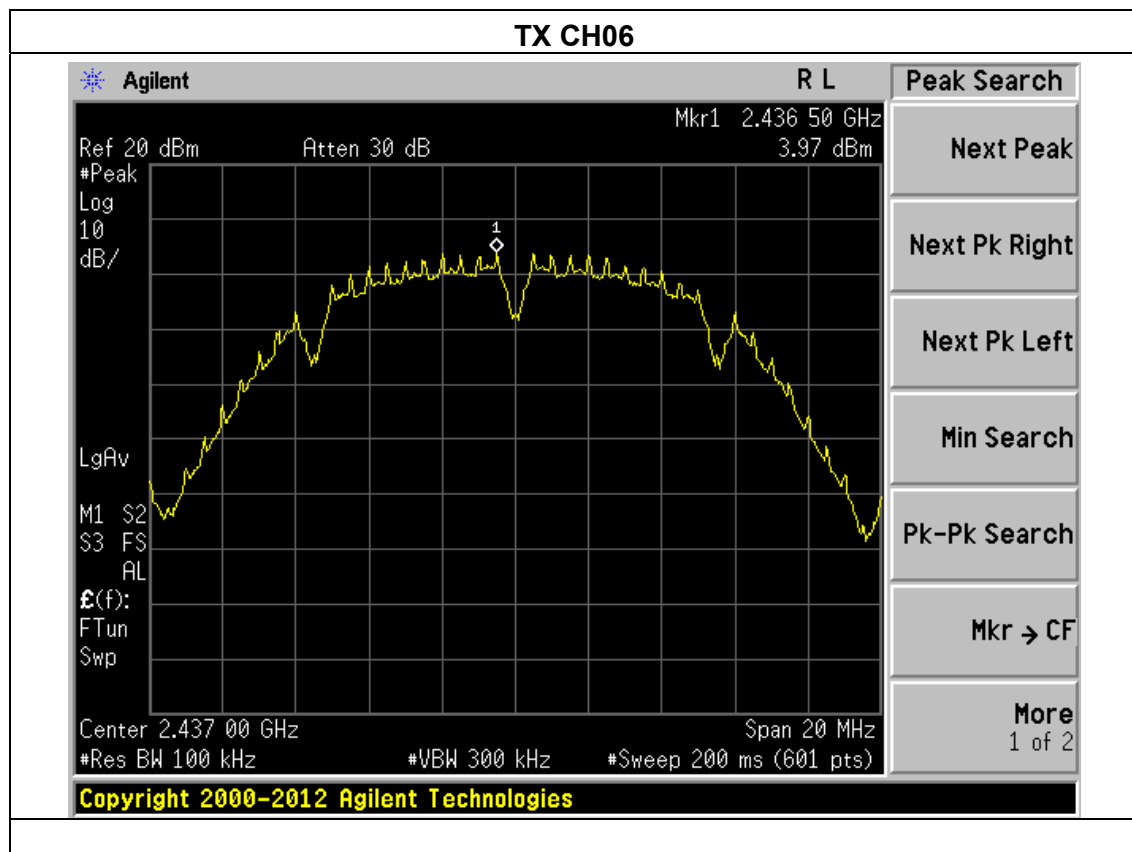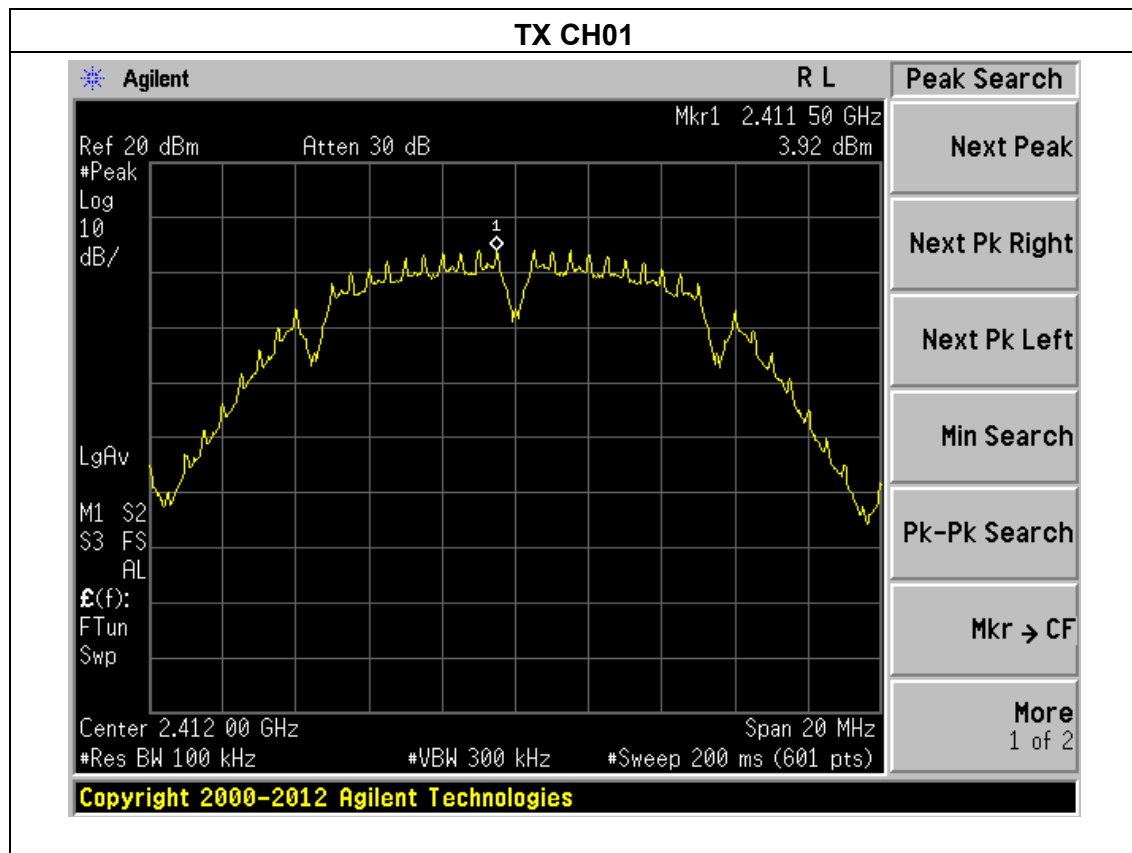

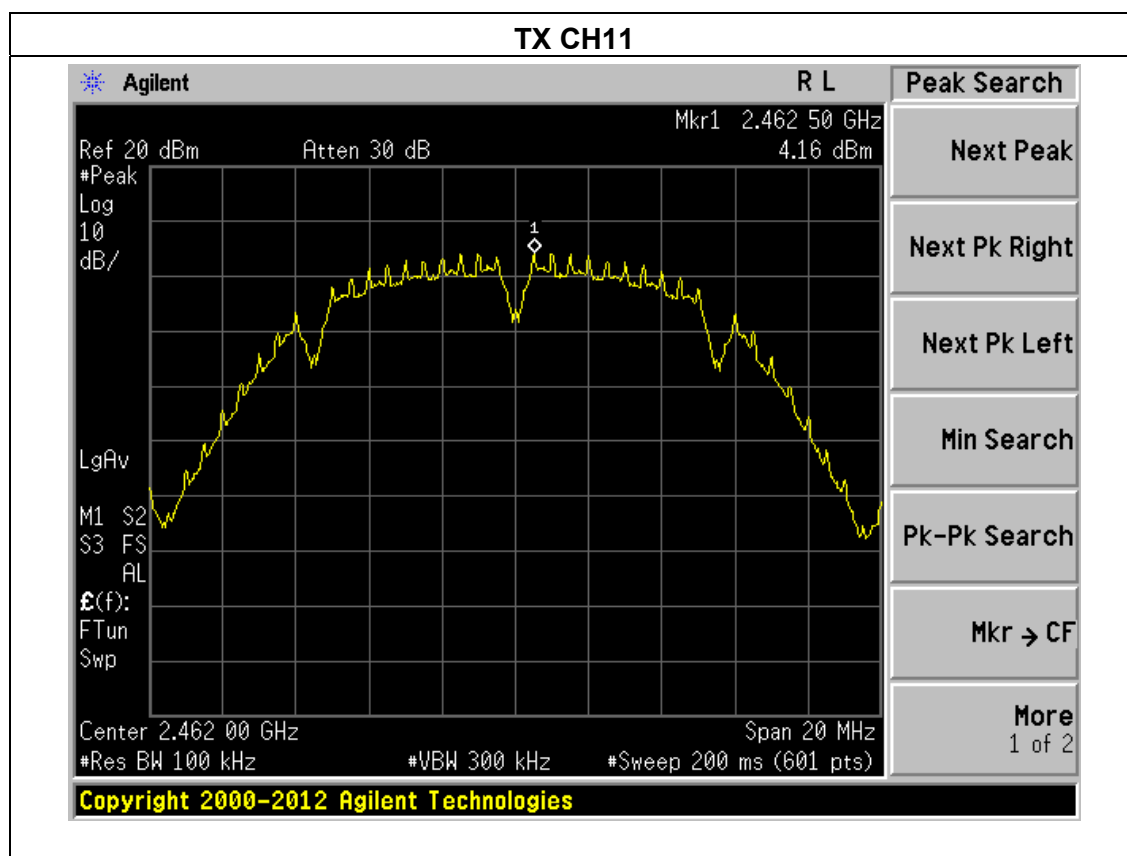






EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX g Mode		

Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	Ant.1	-1.50	1.41	8	PASS
	Ant.2	-1.54			
2437 MHz	Ant.1	-1.47	1.37	8	PASS
	Ant.2	-1.53			
2462 MHz	Ant.1	-1.45	1.43	8	PASS
	Ant.2	-1.86			



Ant.1

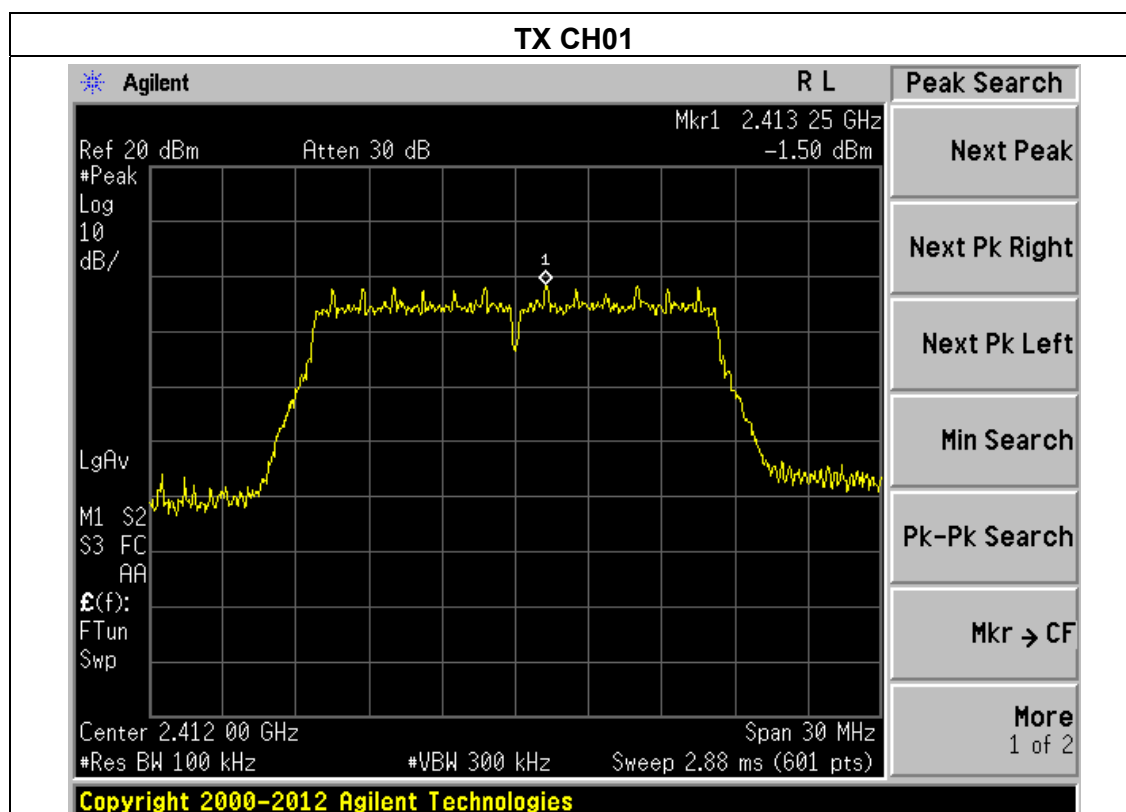


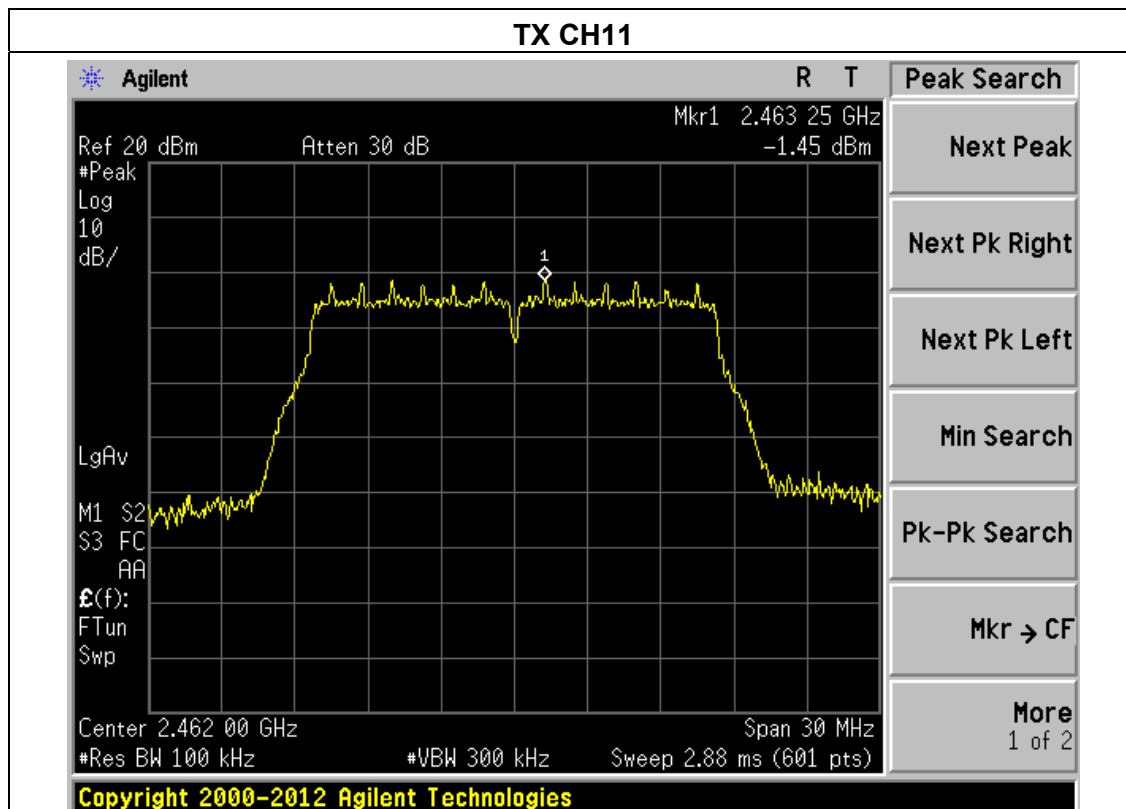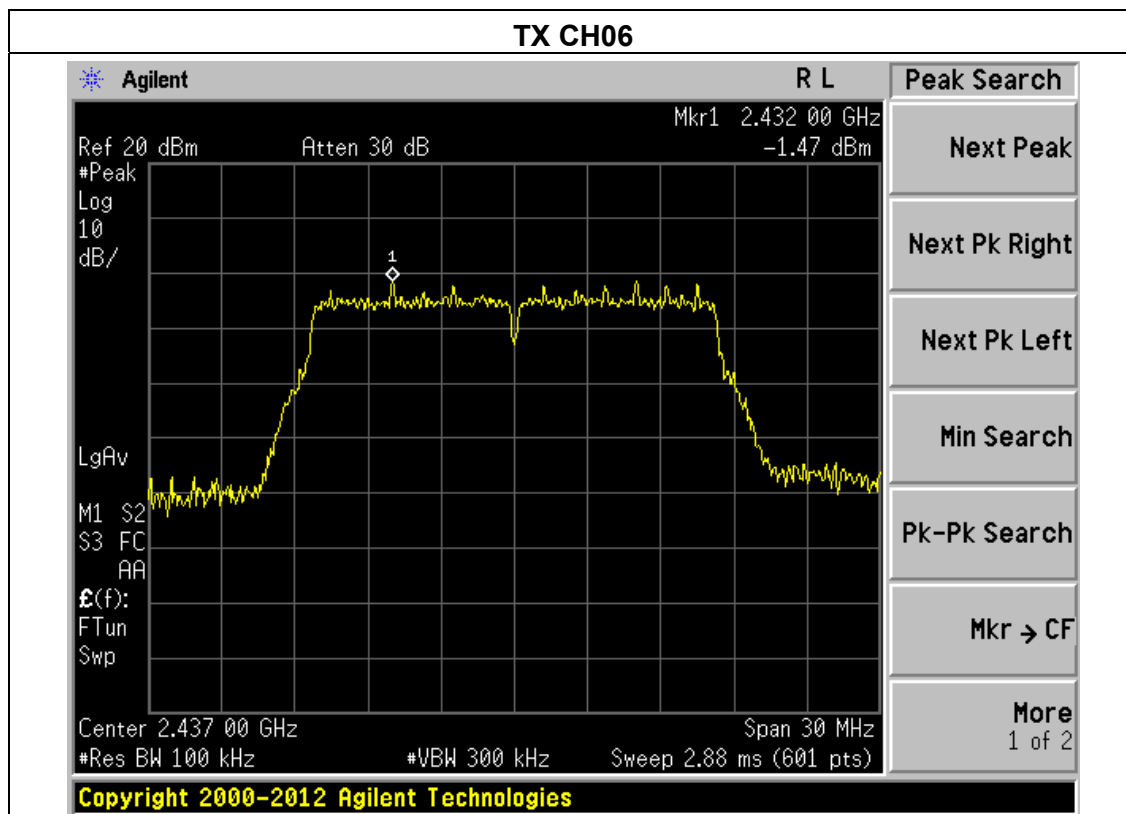



Ant.2

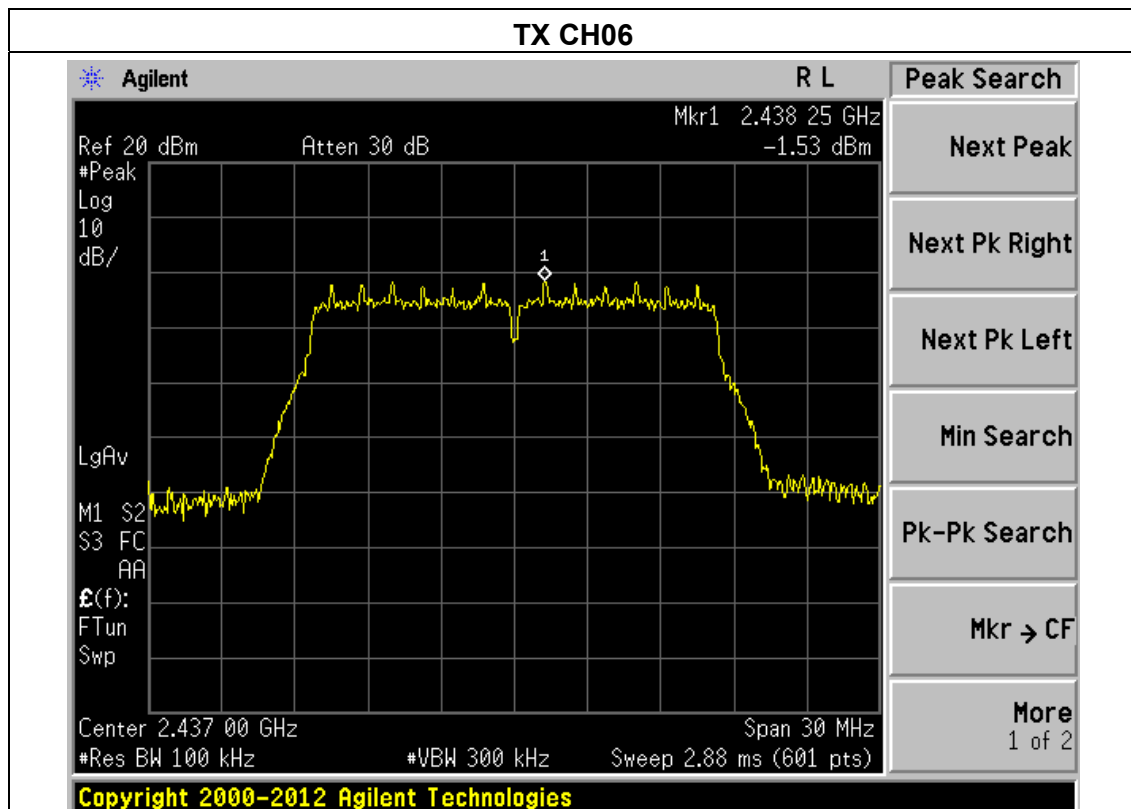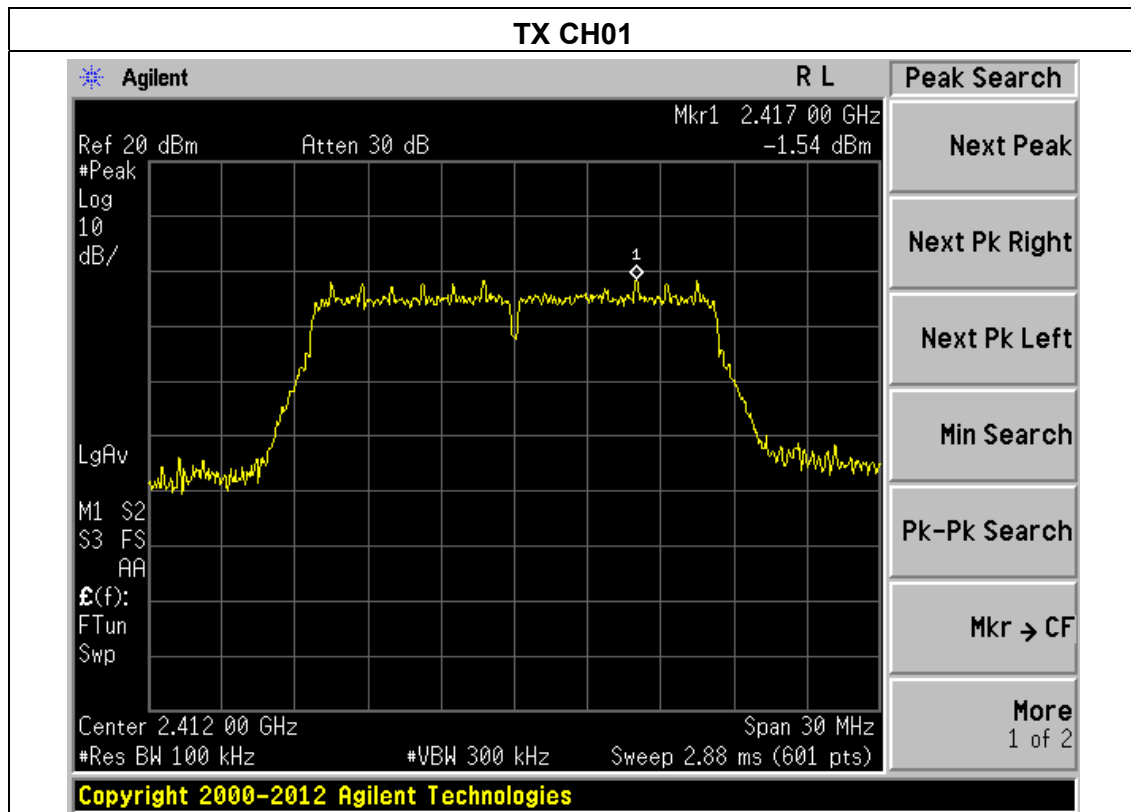

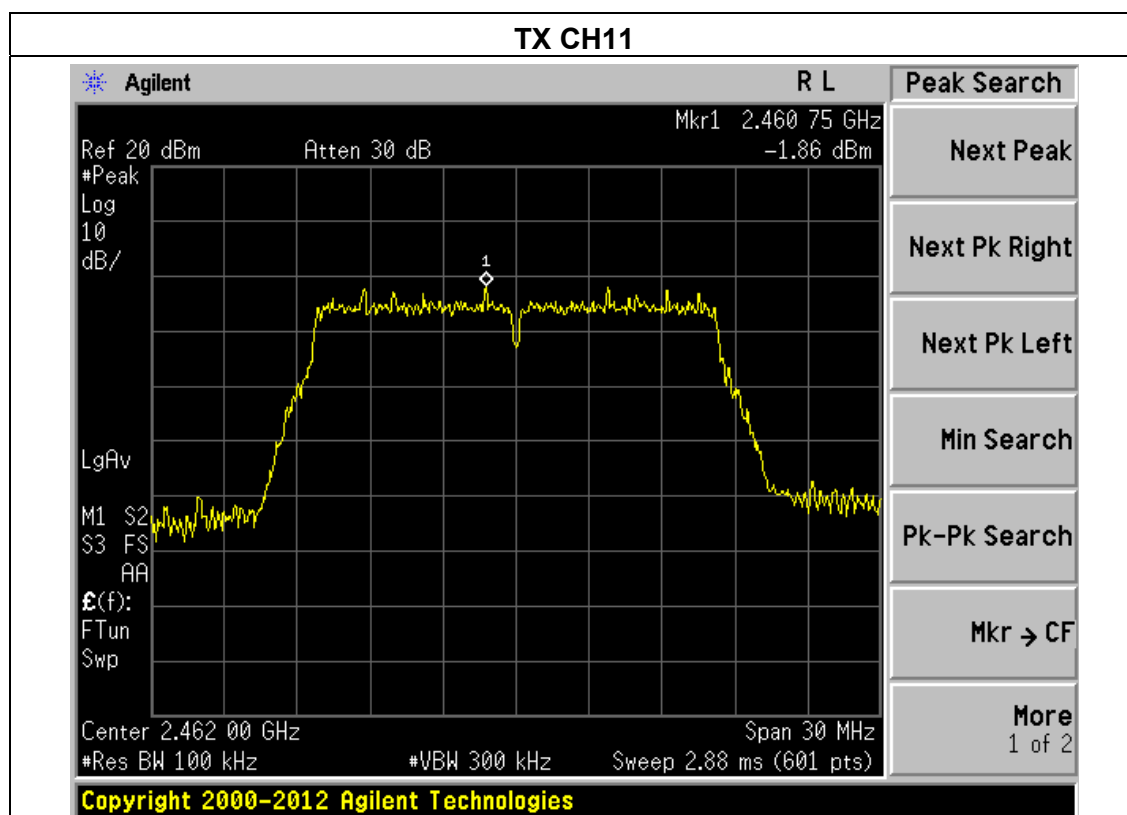






EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX n Mode(20M)		

Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	Ant.1	-1.43	1.43	8	PASS
	Ant.2	-1.47			
2437 MHz	Ant.1	-1.54	1.41	8	PASS
	Ant.2	-1.48			
2462 MHz	Ant.1	-1.31	1.41	8	PASS
	Ant.2	-1.73			



Ant.1

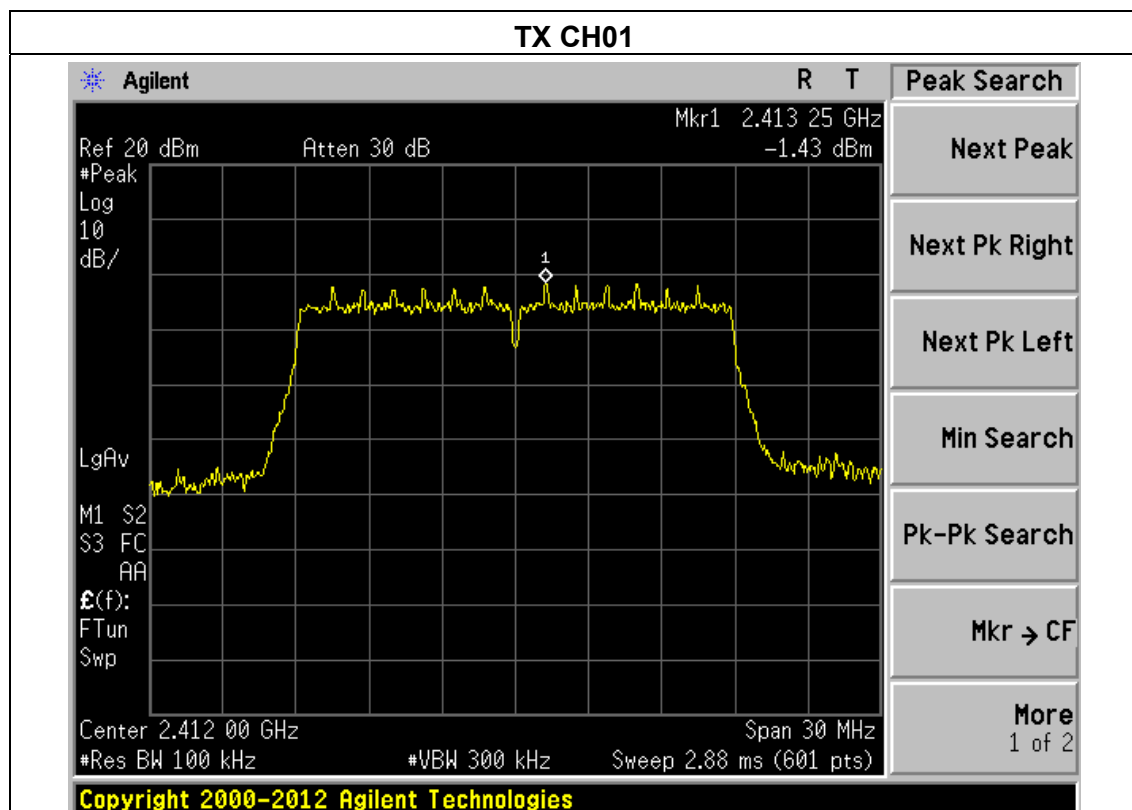


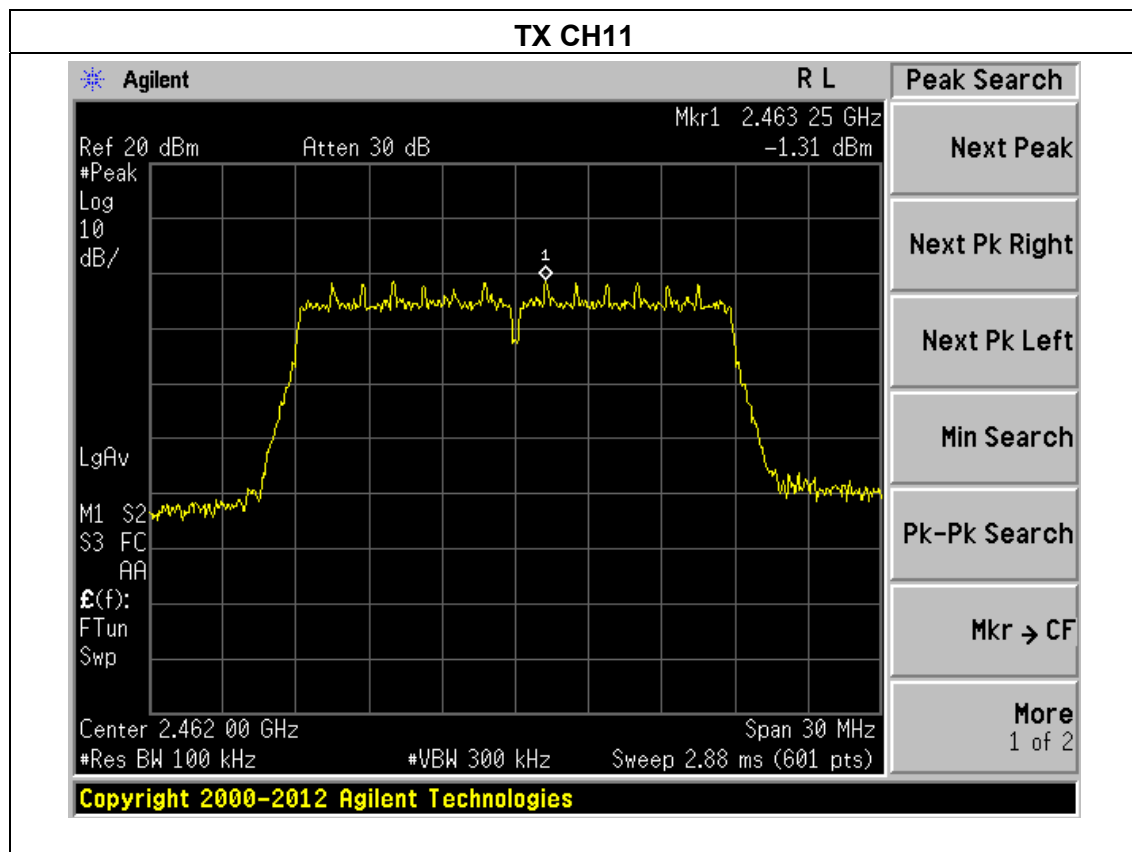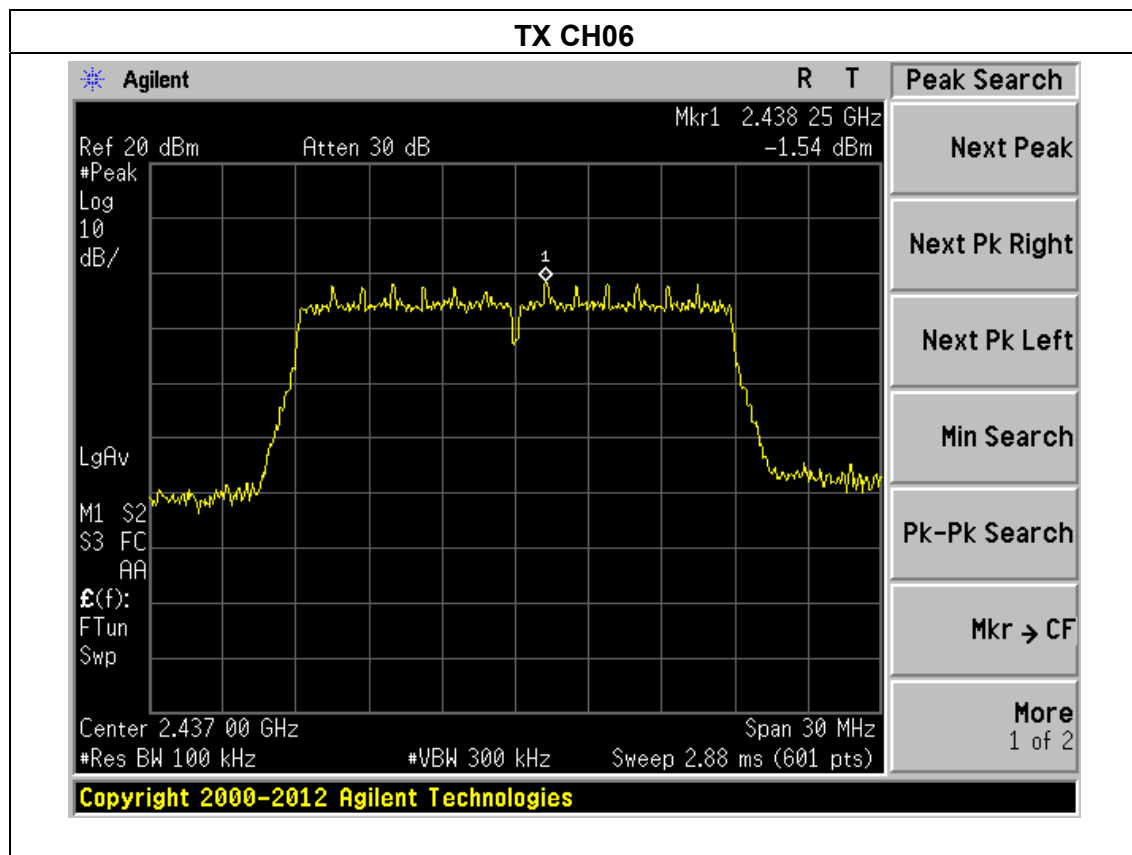



Ant.2

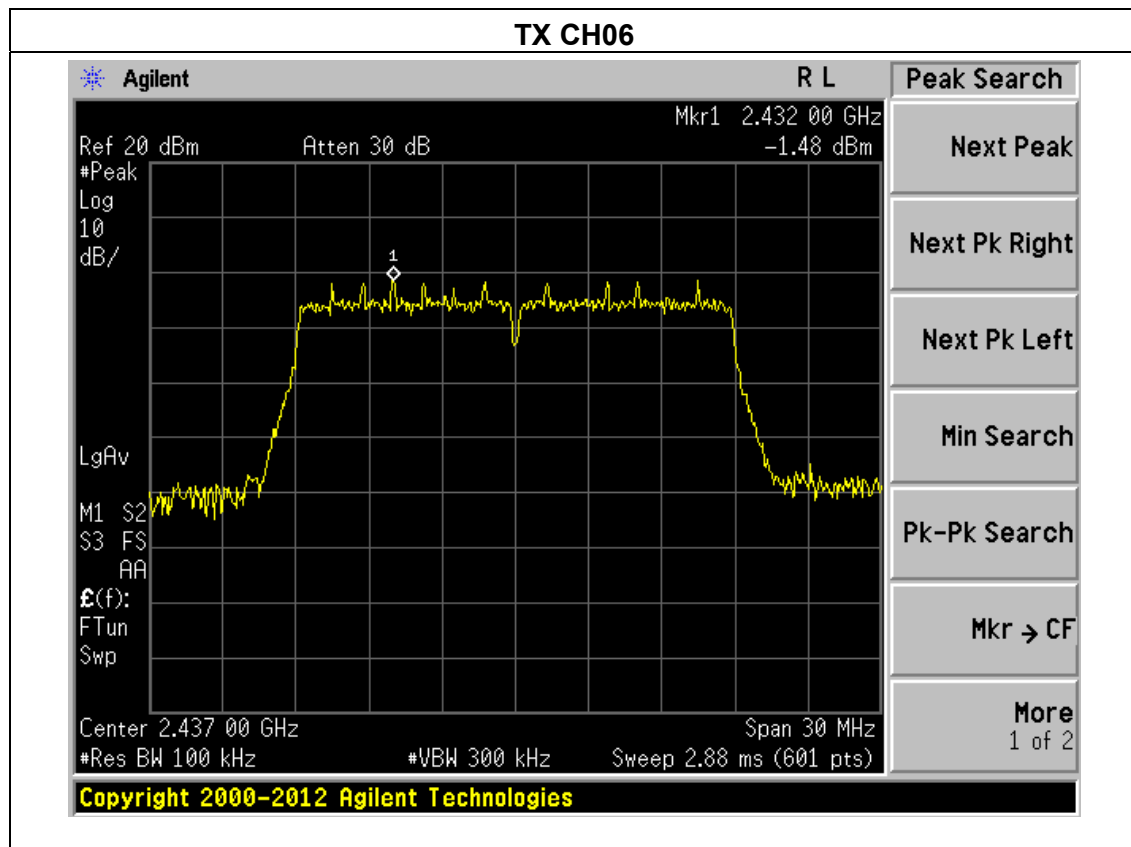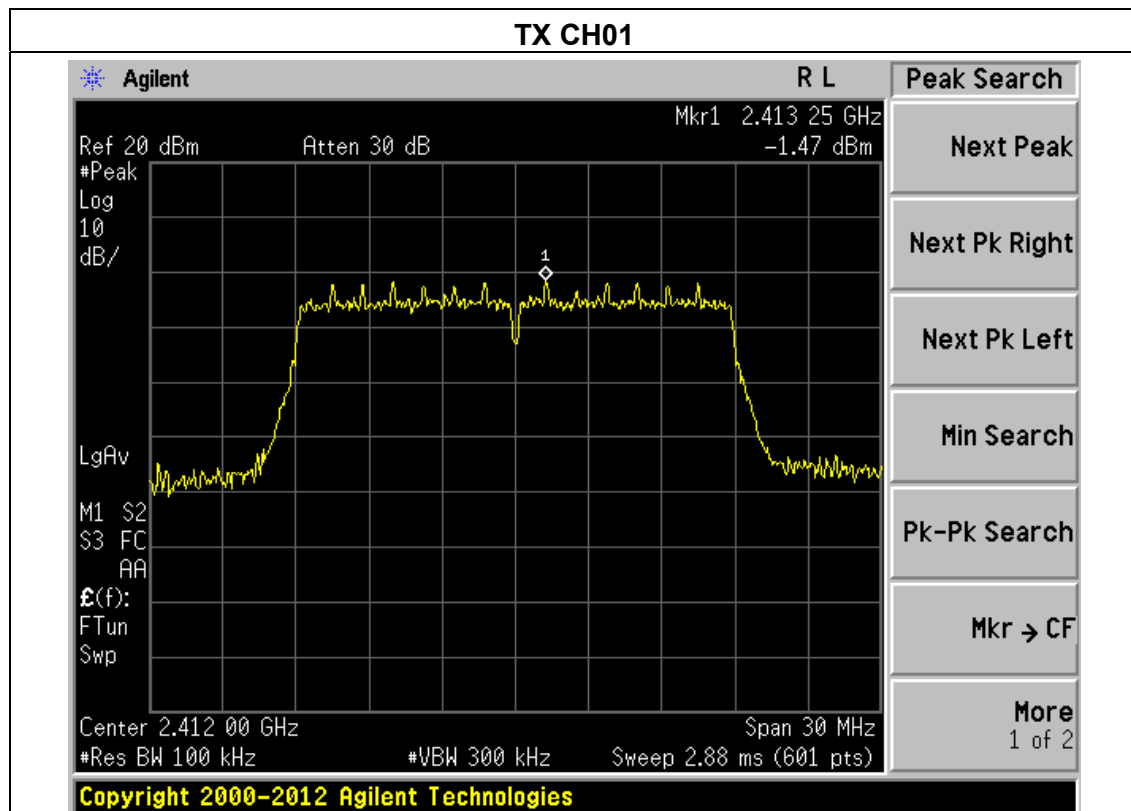

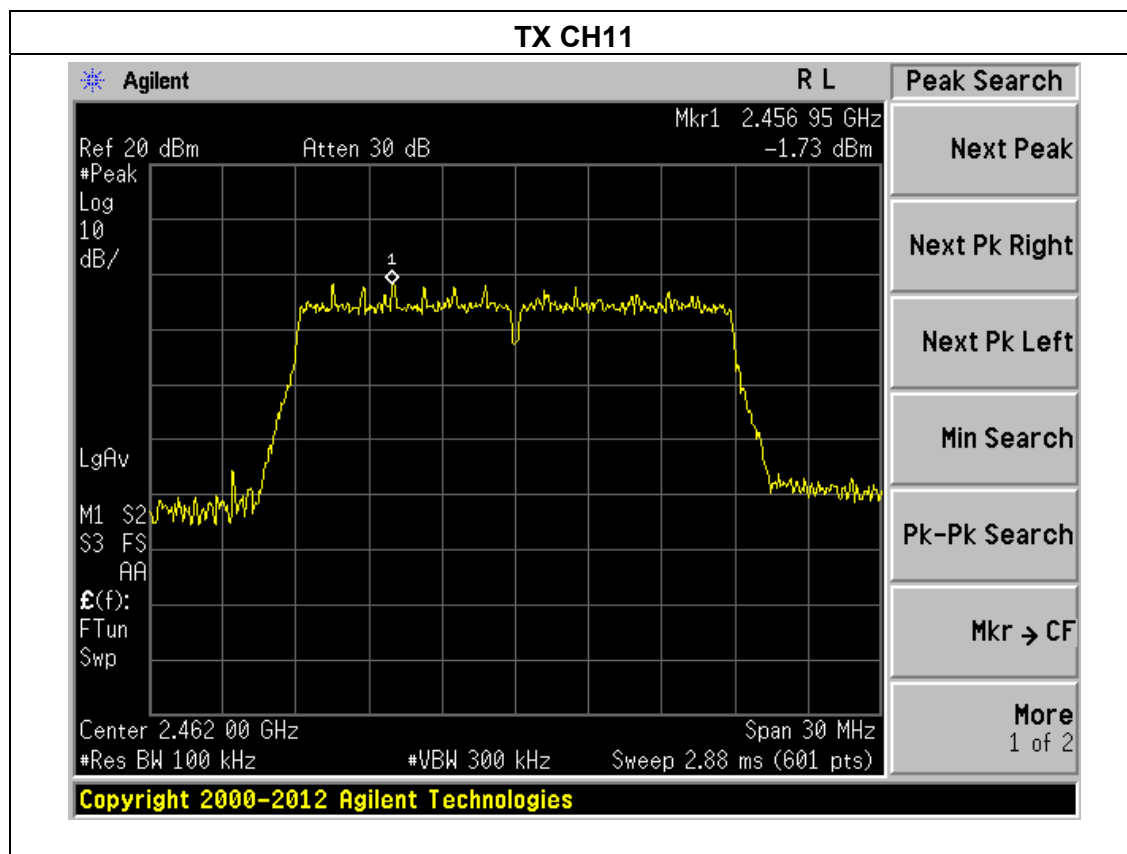




EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX n Mode(40M)		


Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
2422 MHz	Ant.1	-7.13	0.38	8	PASS
	Ant.2	-7.16			
2437 MHz	Ant.1	-6.89	0.41	8	PASS
	Ant.2	-6.84			
2452 MHz	Ant.1	-6.64	0.44	8	PASS
	Ant.2	-6.64			

Ant.1

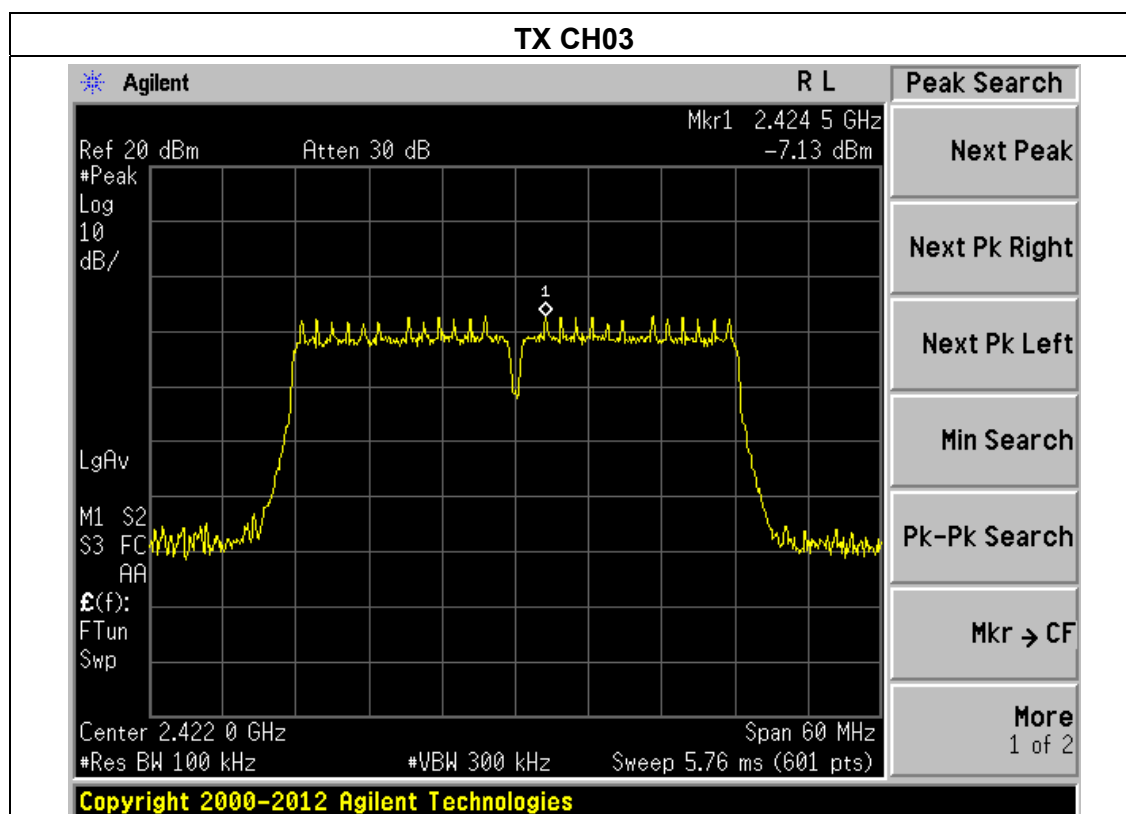




TX CH06


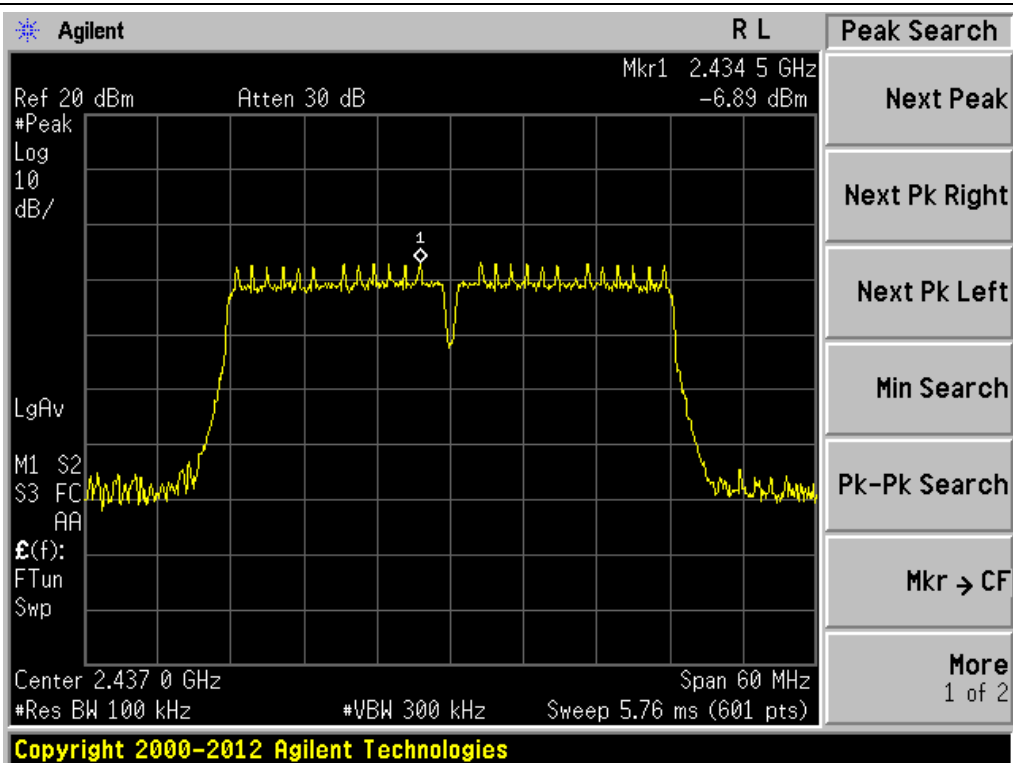



TX CH09

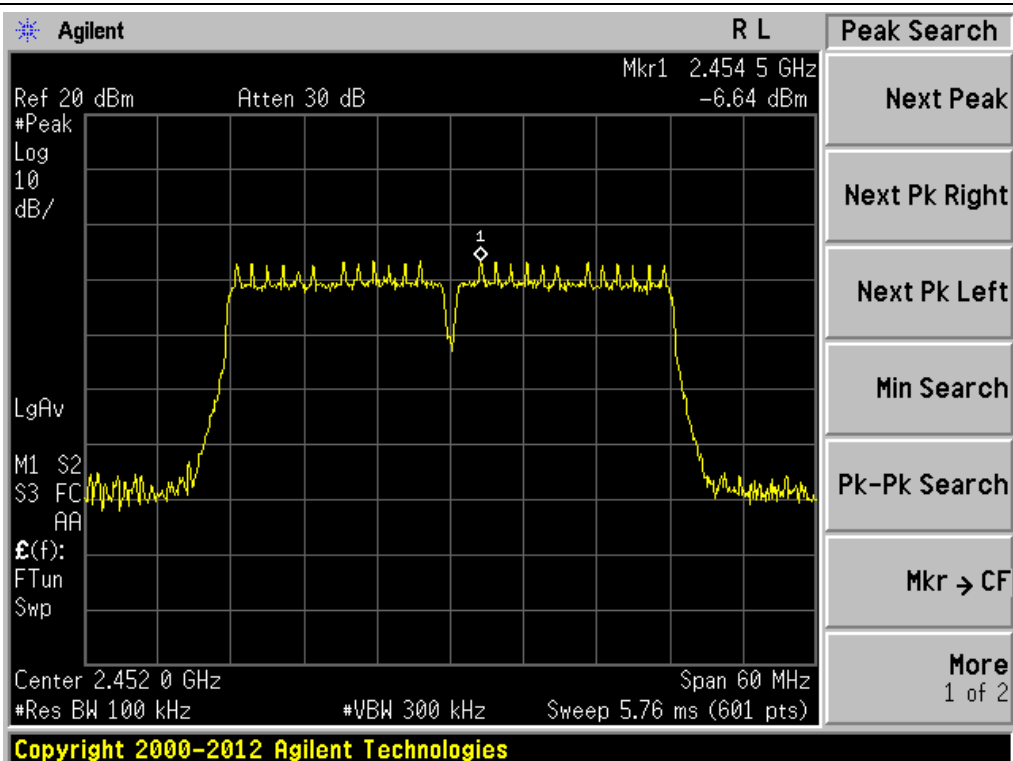



Ant.2

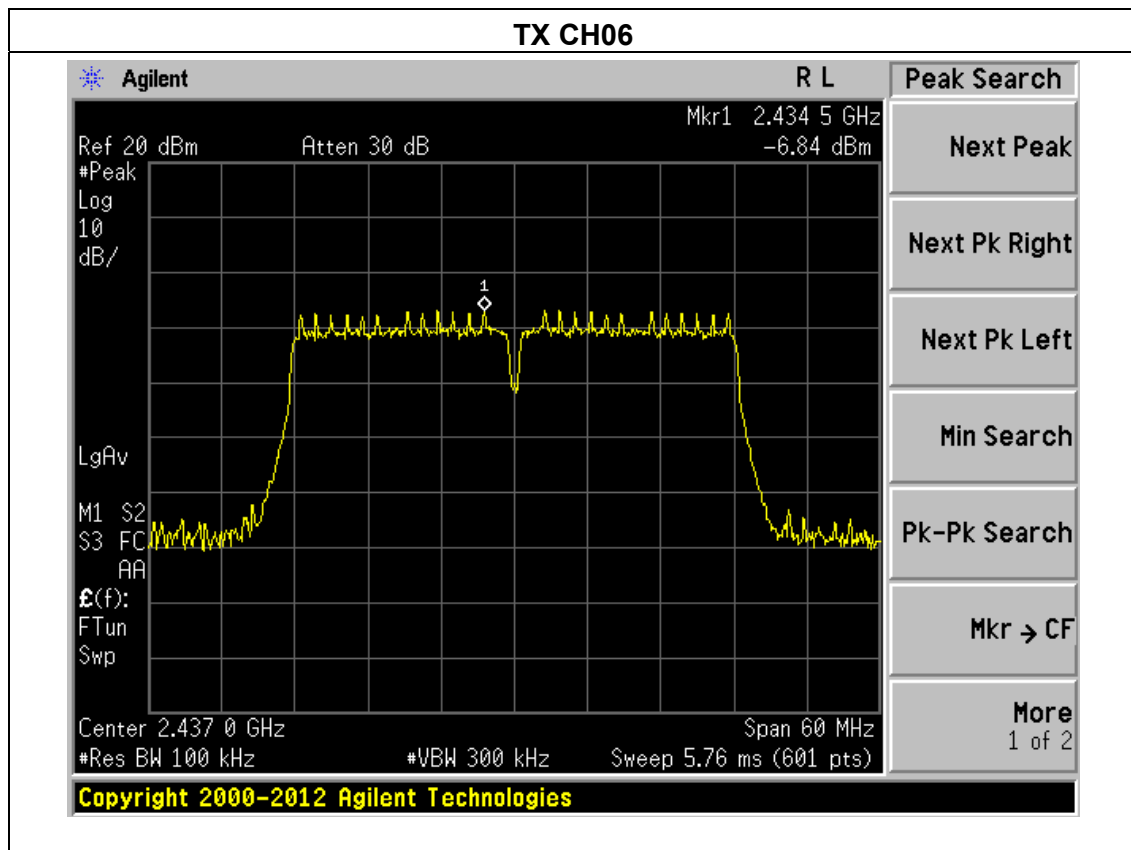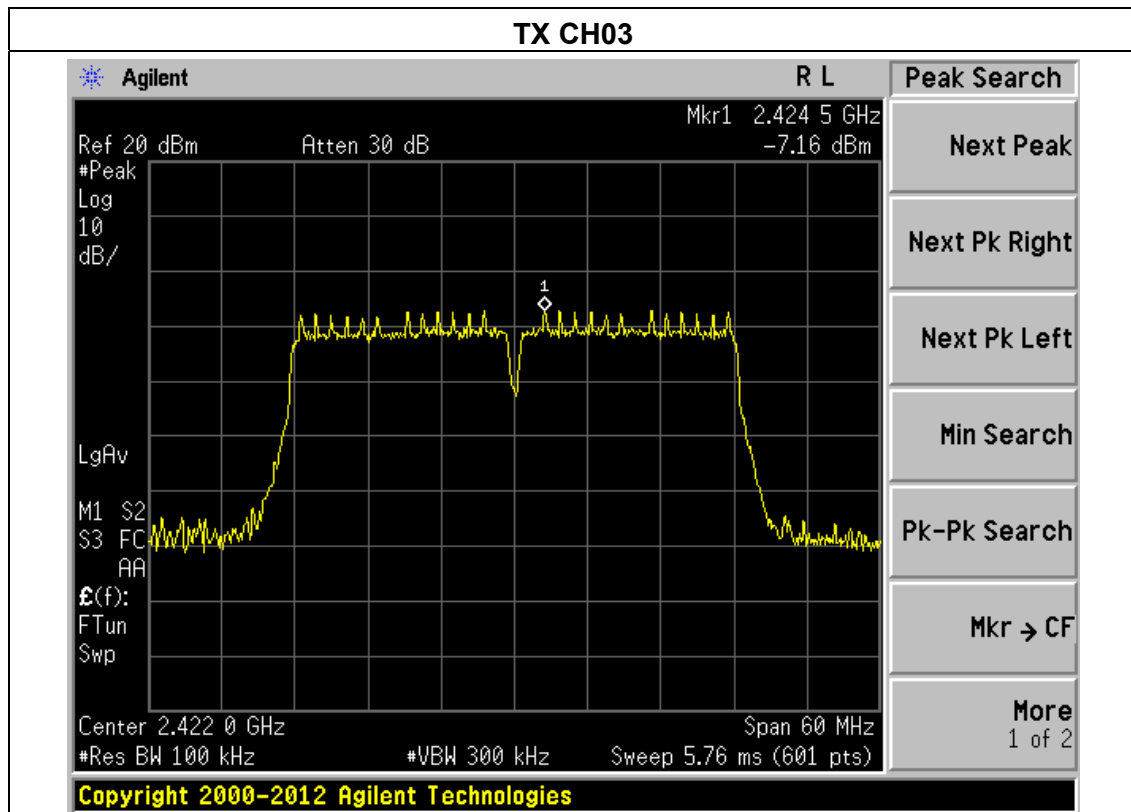

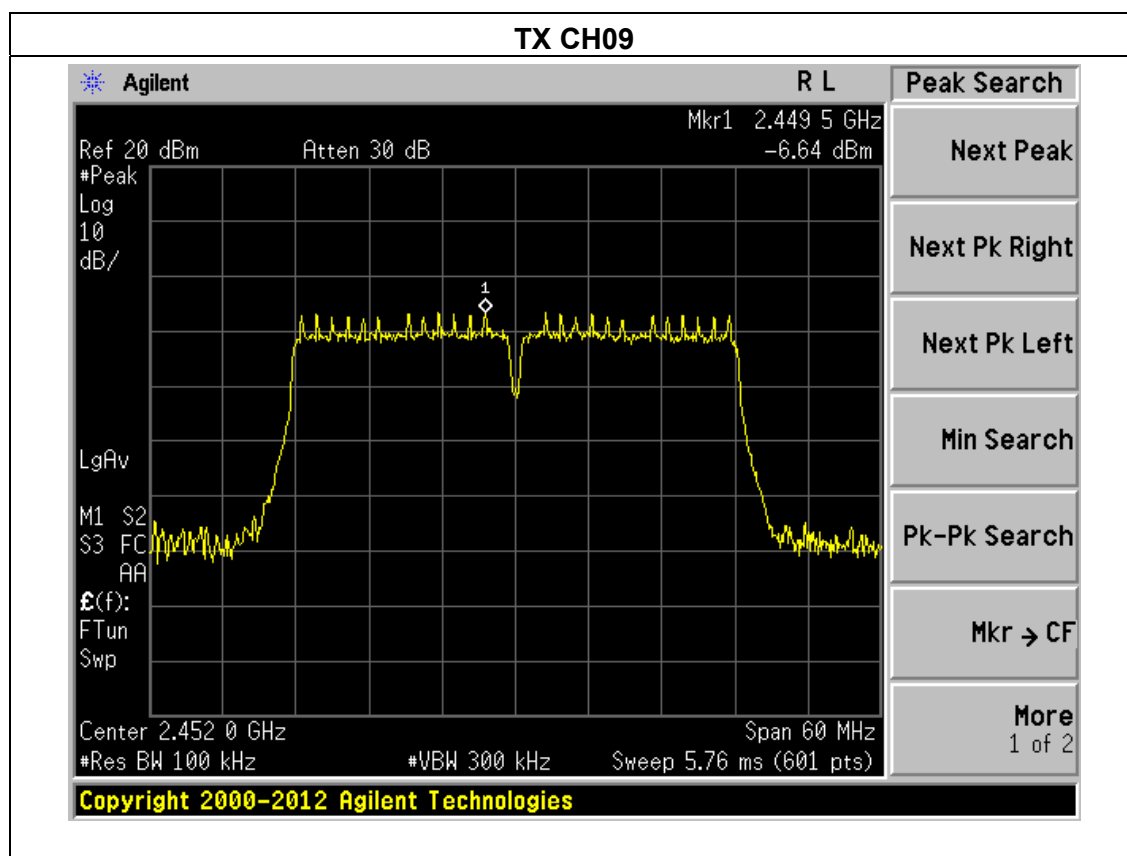



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

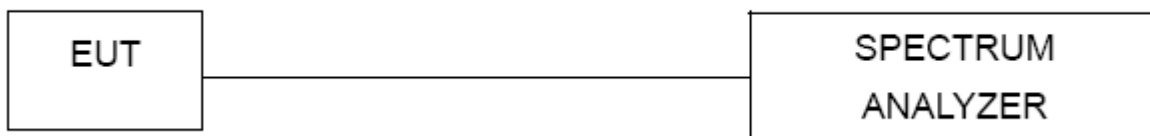

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.5 TEST RESULTS

EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX b Mode		


Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
Low	2412	Ant.1	10.023	500	Pass
		Ant.2	10.033	500	Pass
Middle	2437	Ant.1	9.614	500	Pass
		Ant.2	9.172	500	Pass
High	2462	Ant.1	9.626	500	Pass
		Ant.2	10.048	500	Pass

Ant.1

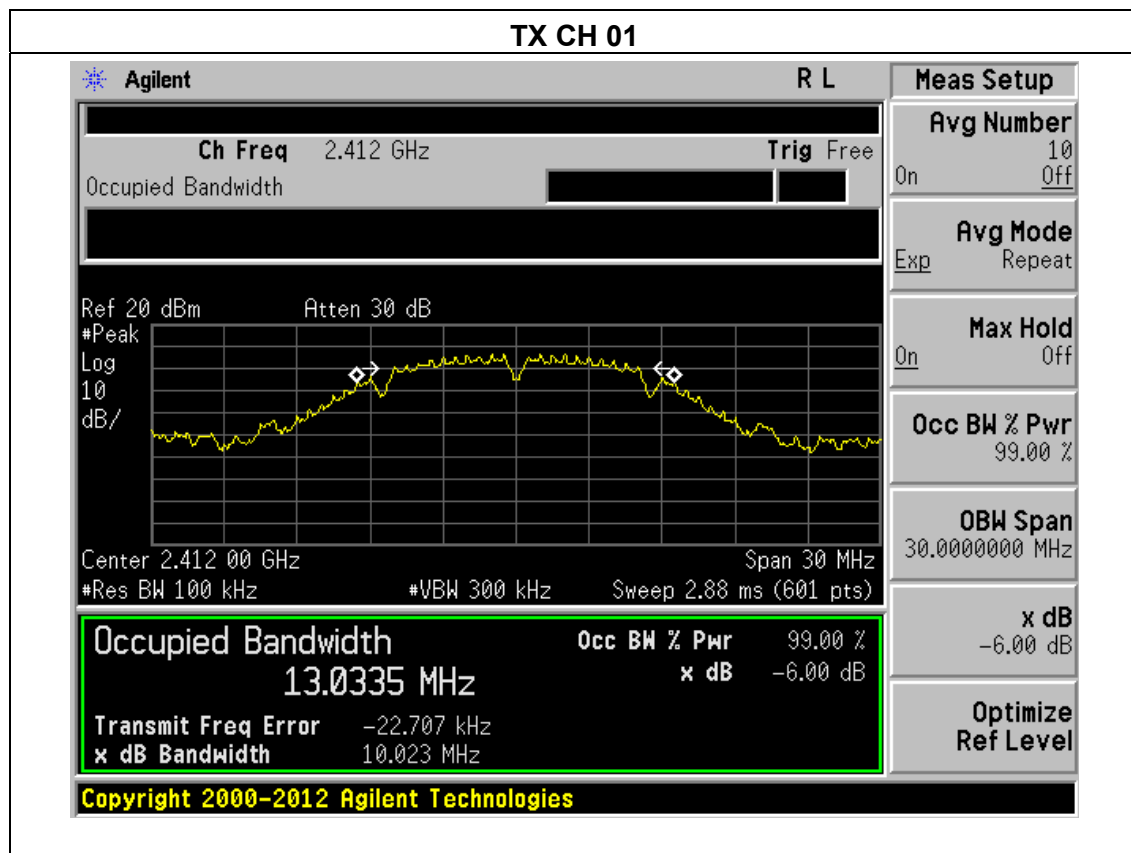




TX CH 06


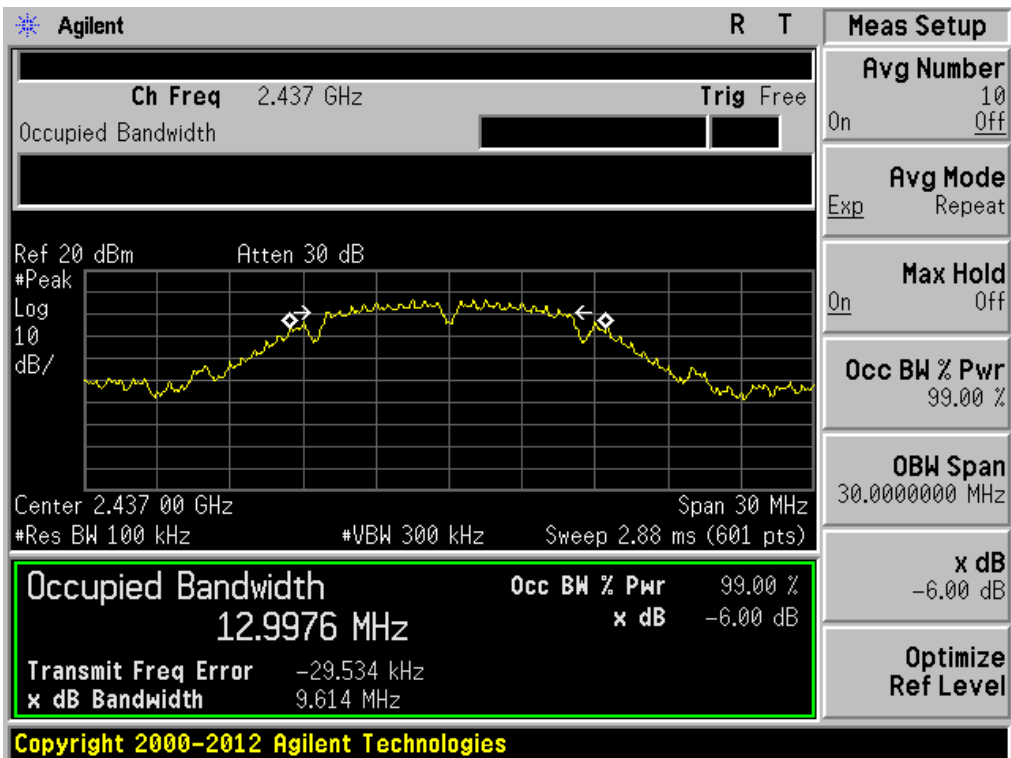



TX CH 11

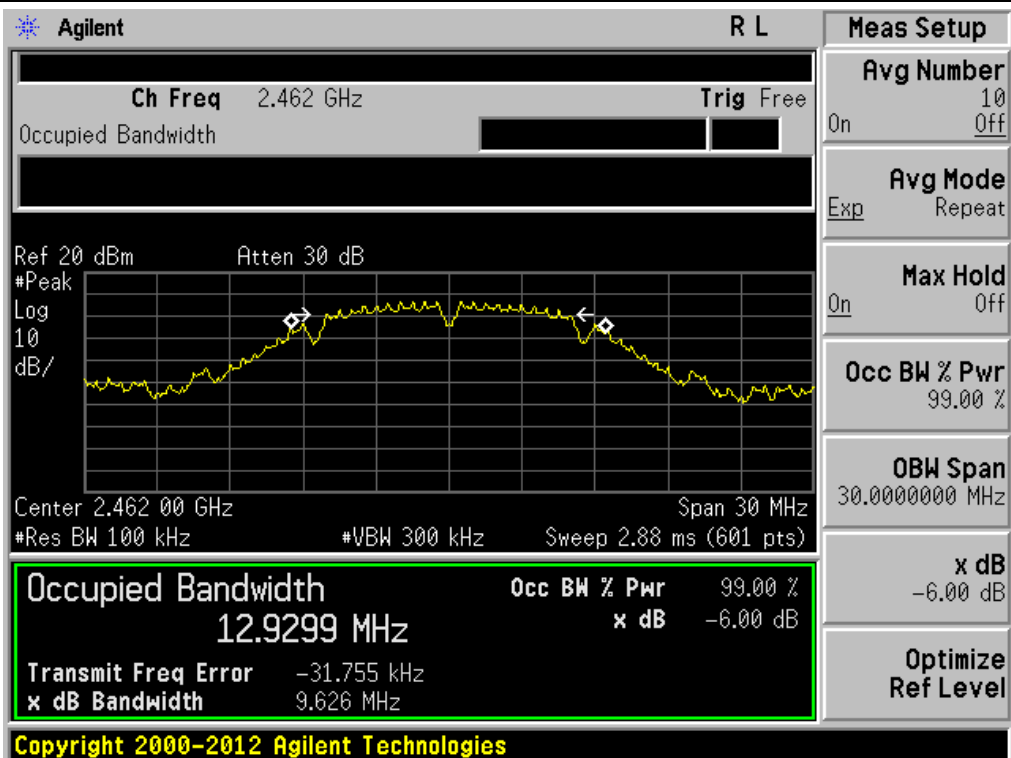



Ant.2

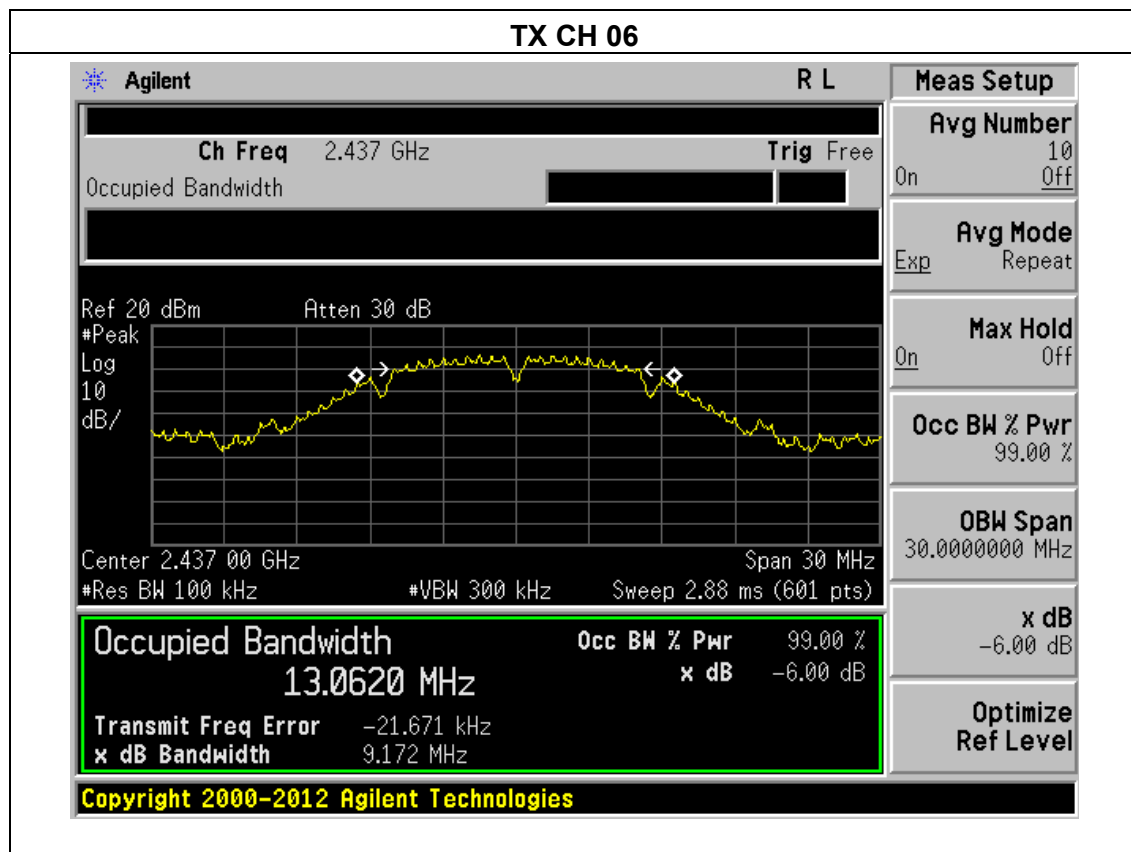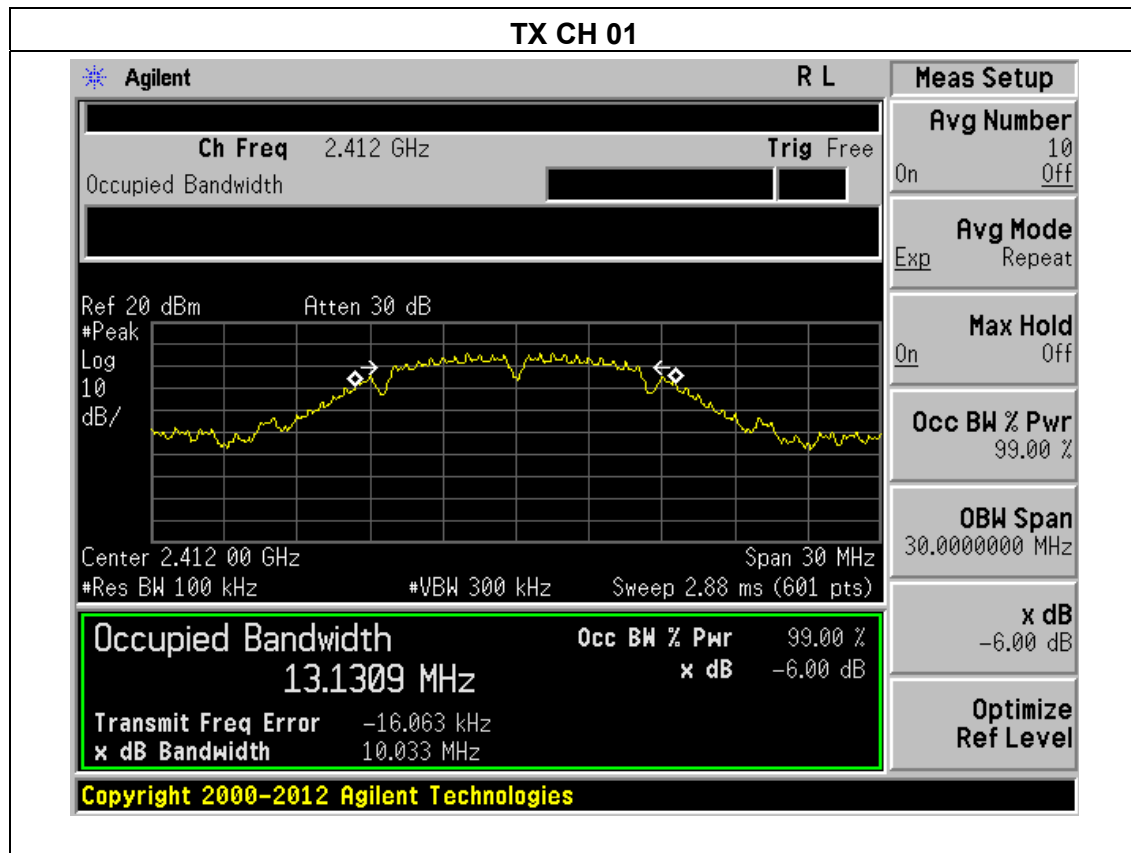

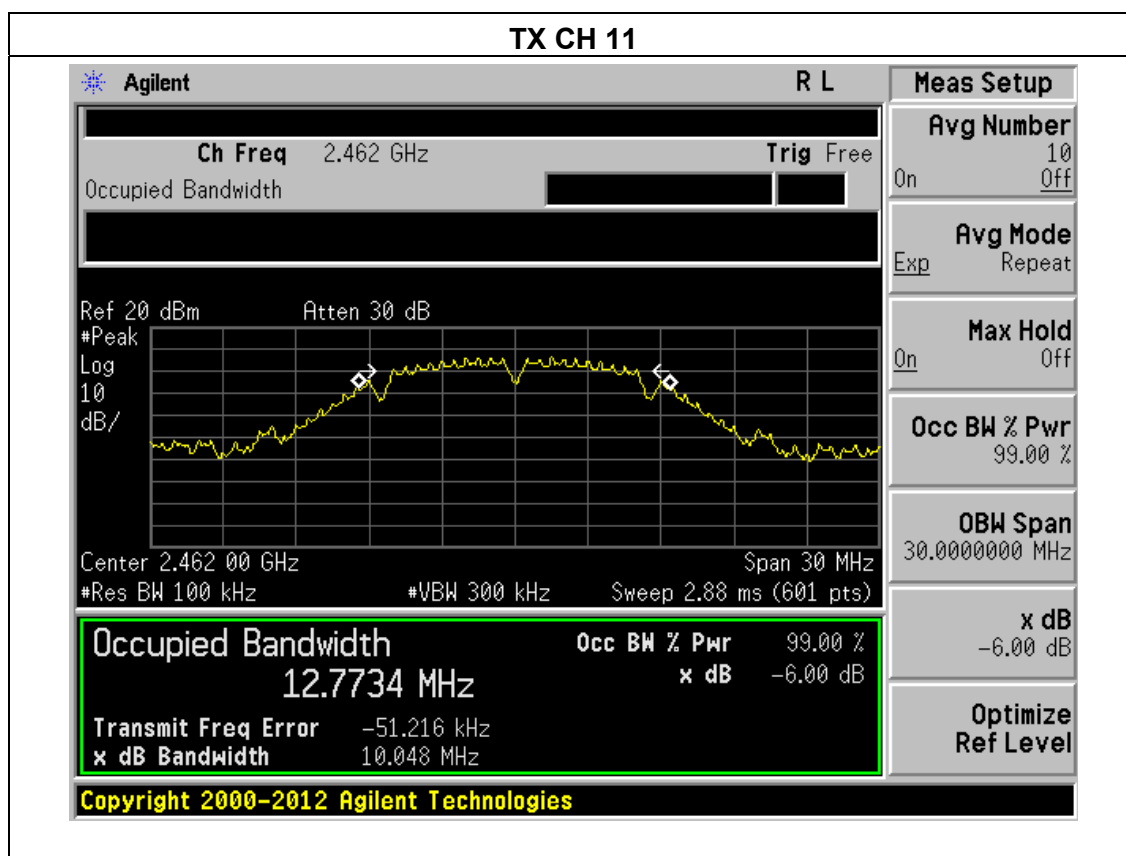




EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX g Mode		


Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
Low	2412	Ant.1	16.421	500	Pass
		Ant.2	16.426	500	Pass
Middle	2437	Ant.1	16.432	500	Pass
		Ant.2	16.430	500	Pass
High	2462	Ant.1	16.448	500	Pass
		Ant.2	16.474	500	Pass

Ant.1

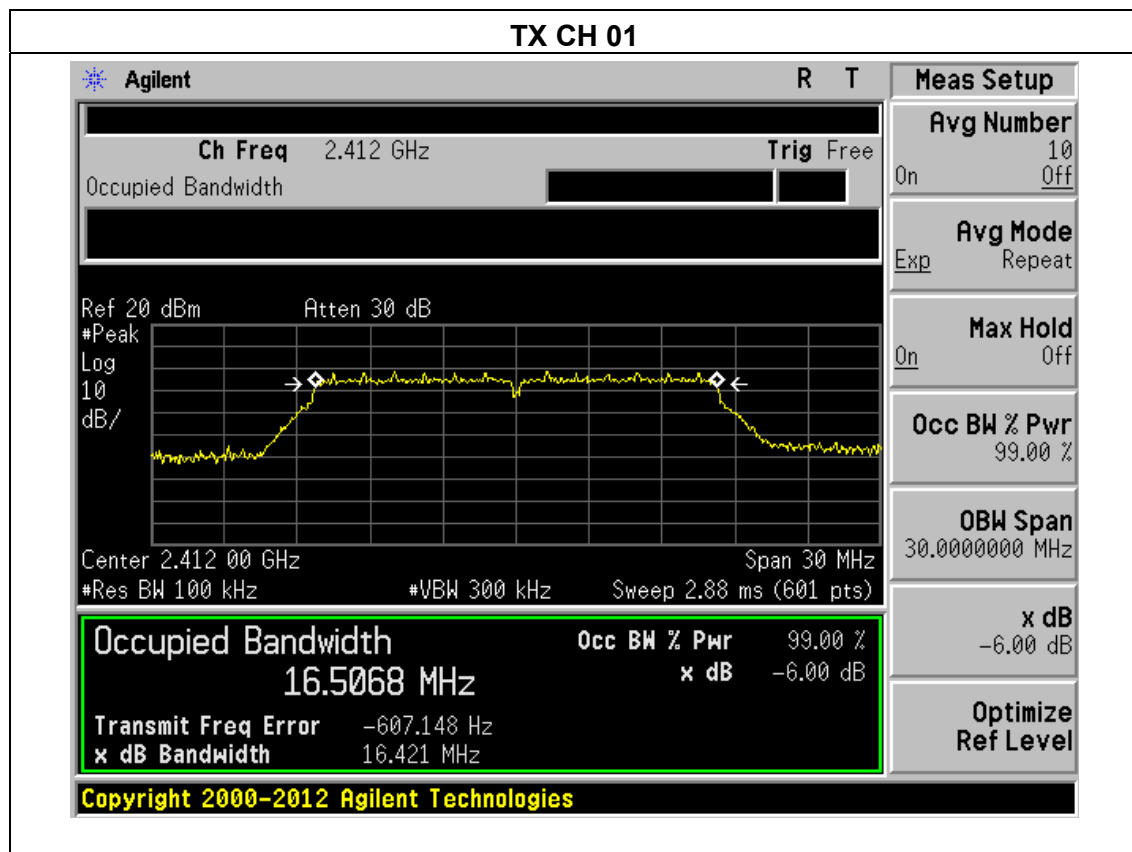




TX CH 06


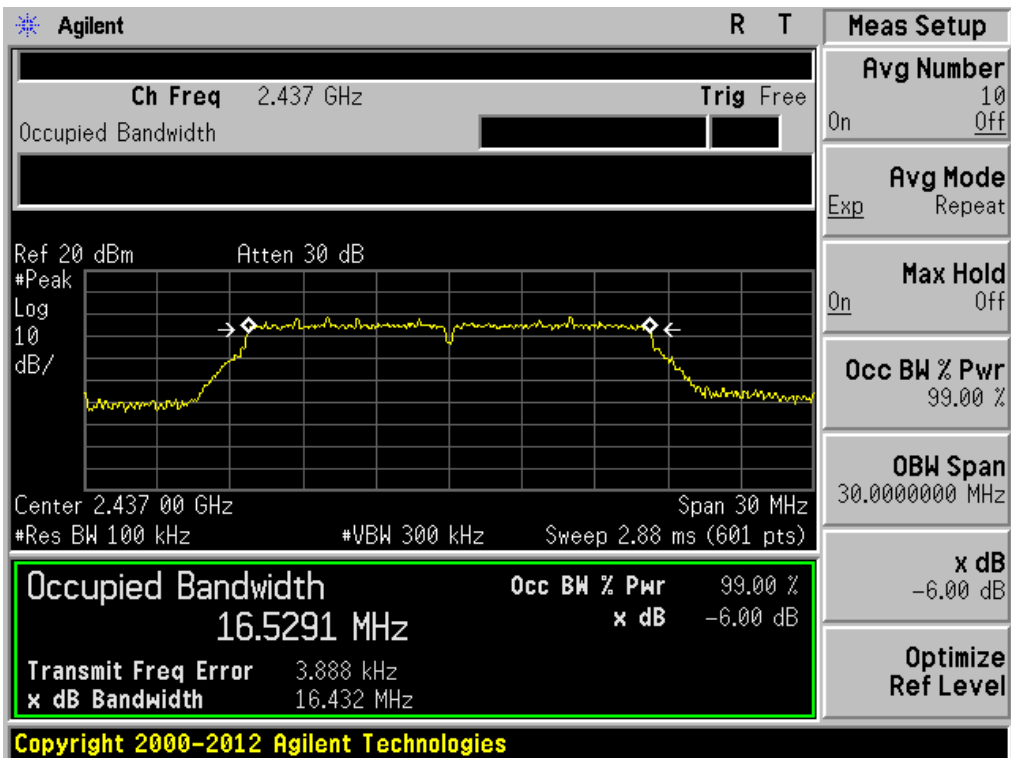



TX CH 11

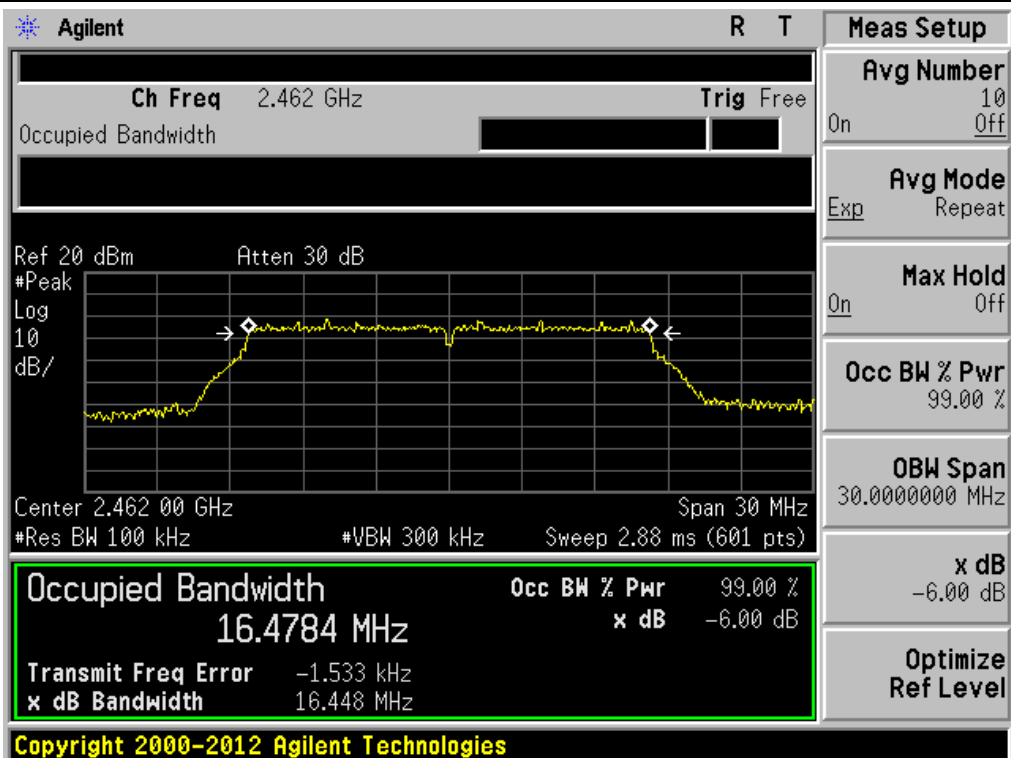



Ant.2

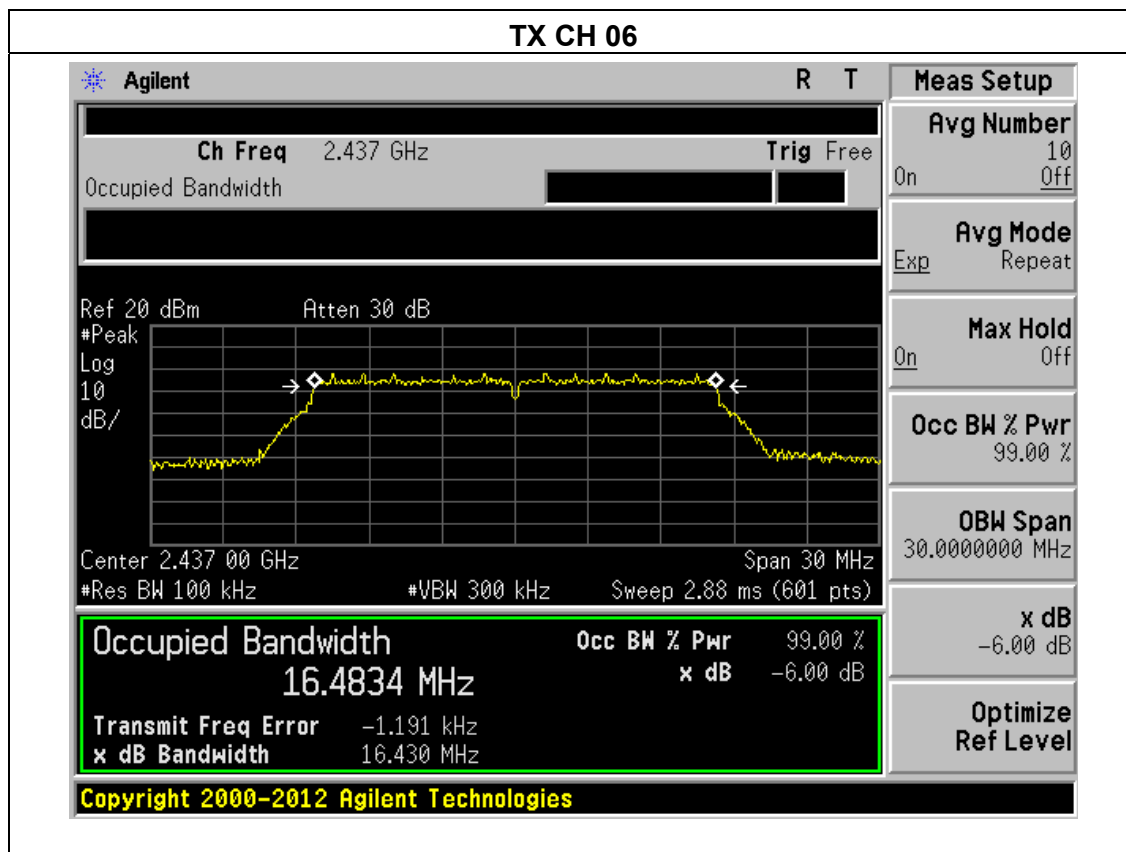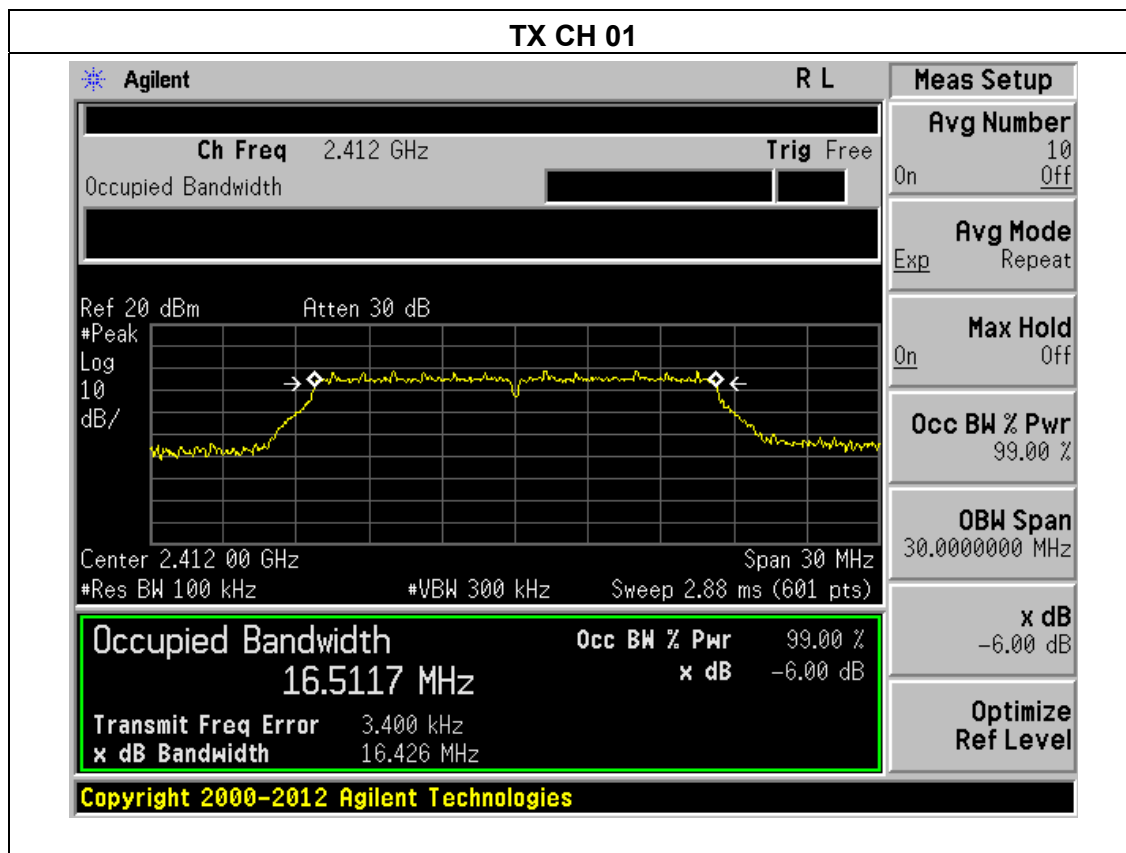

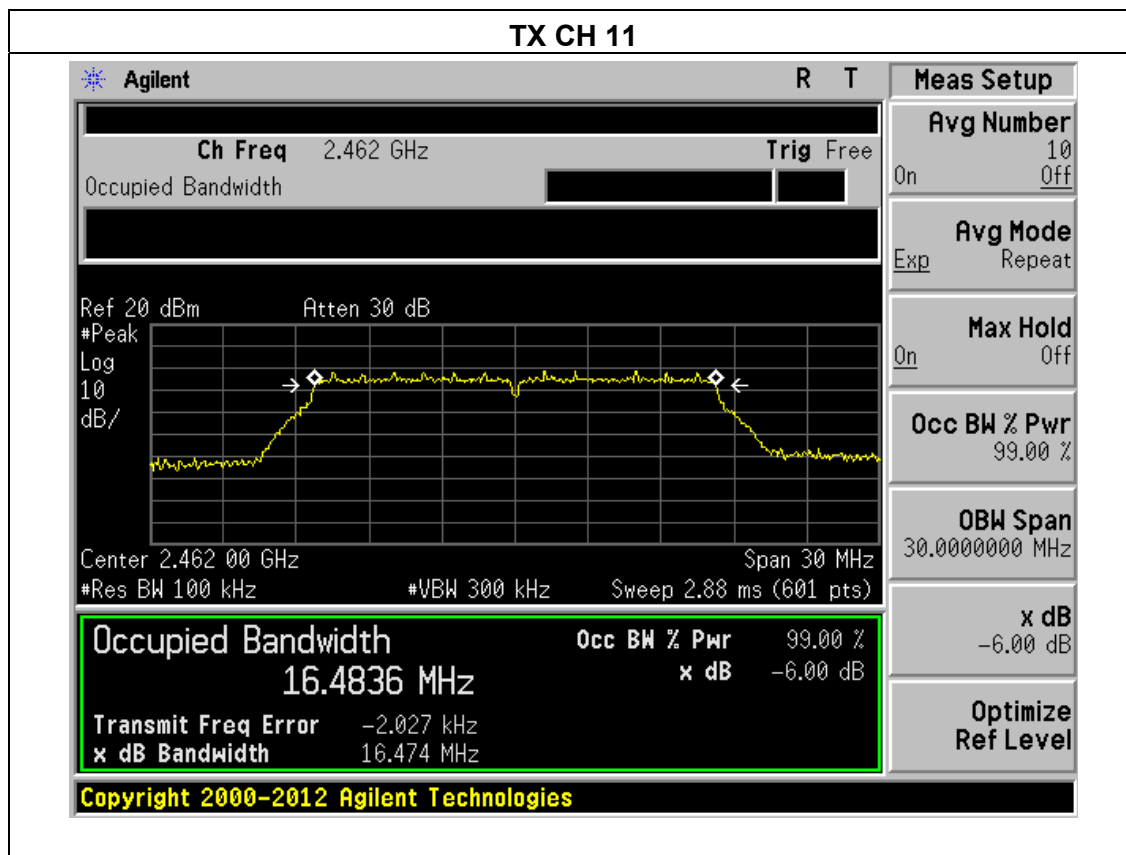





EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX n Mode(20M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
Low	2412	Ant.1	17.641	500	Pass
		Ant.2	17.657	500	Pass
Middle	2437	Ant.1	17.662	500	Pass
		Ant.2	17.670	500	Pass
High	2462	Ant.1	17.671	500	Pass
		Ant.2	17.662	500	Pass



Ant.1

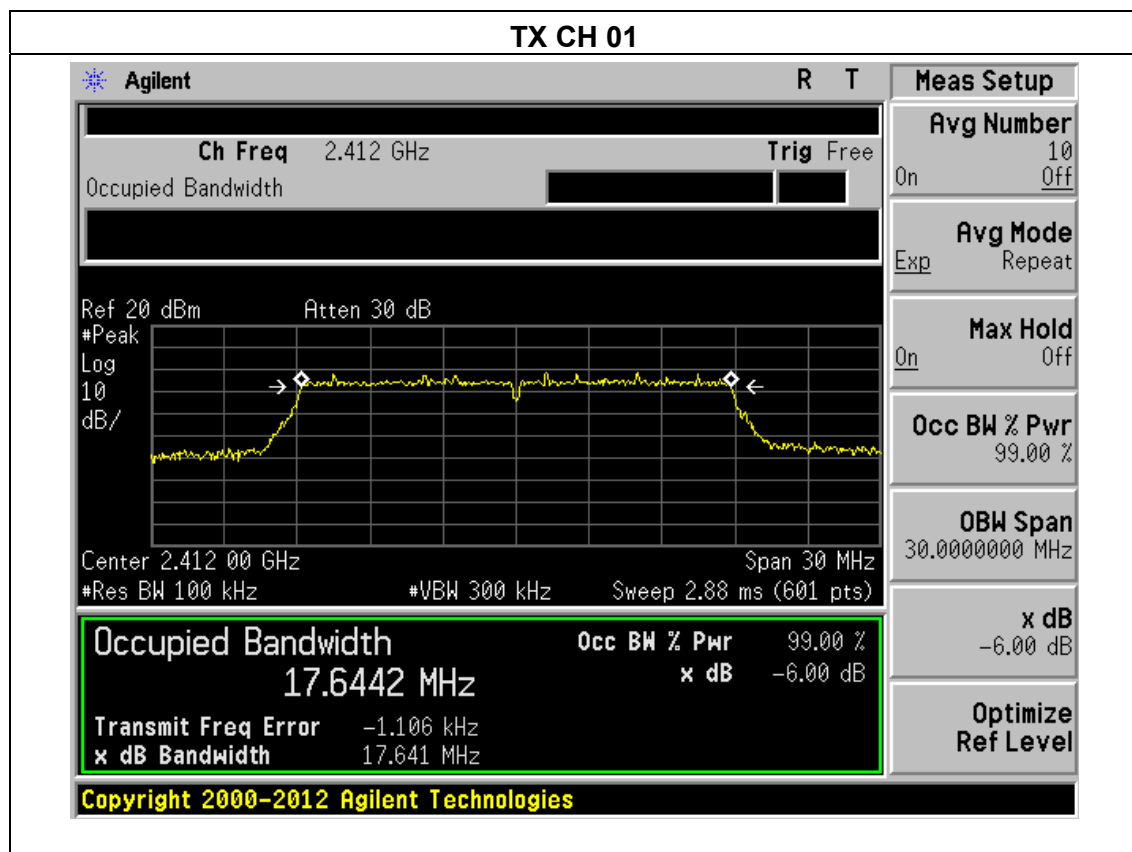


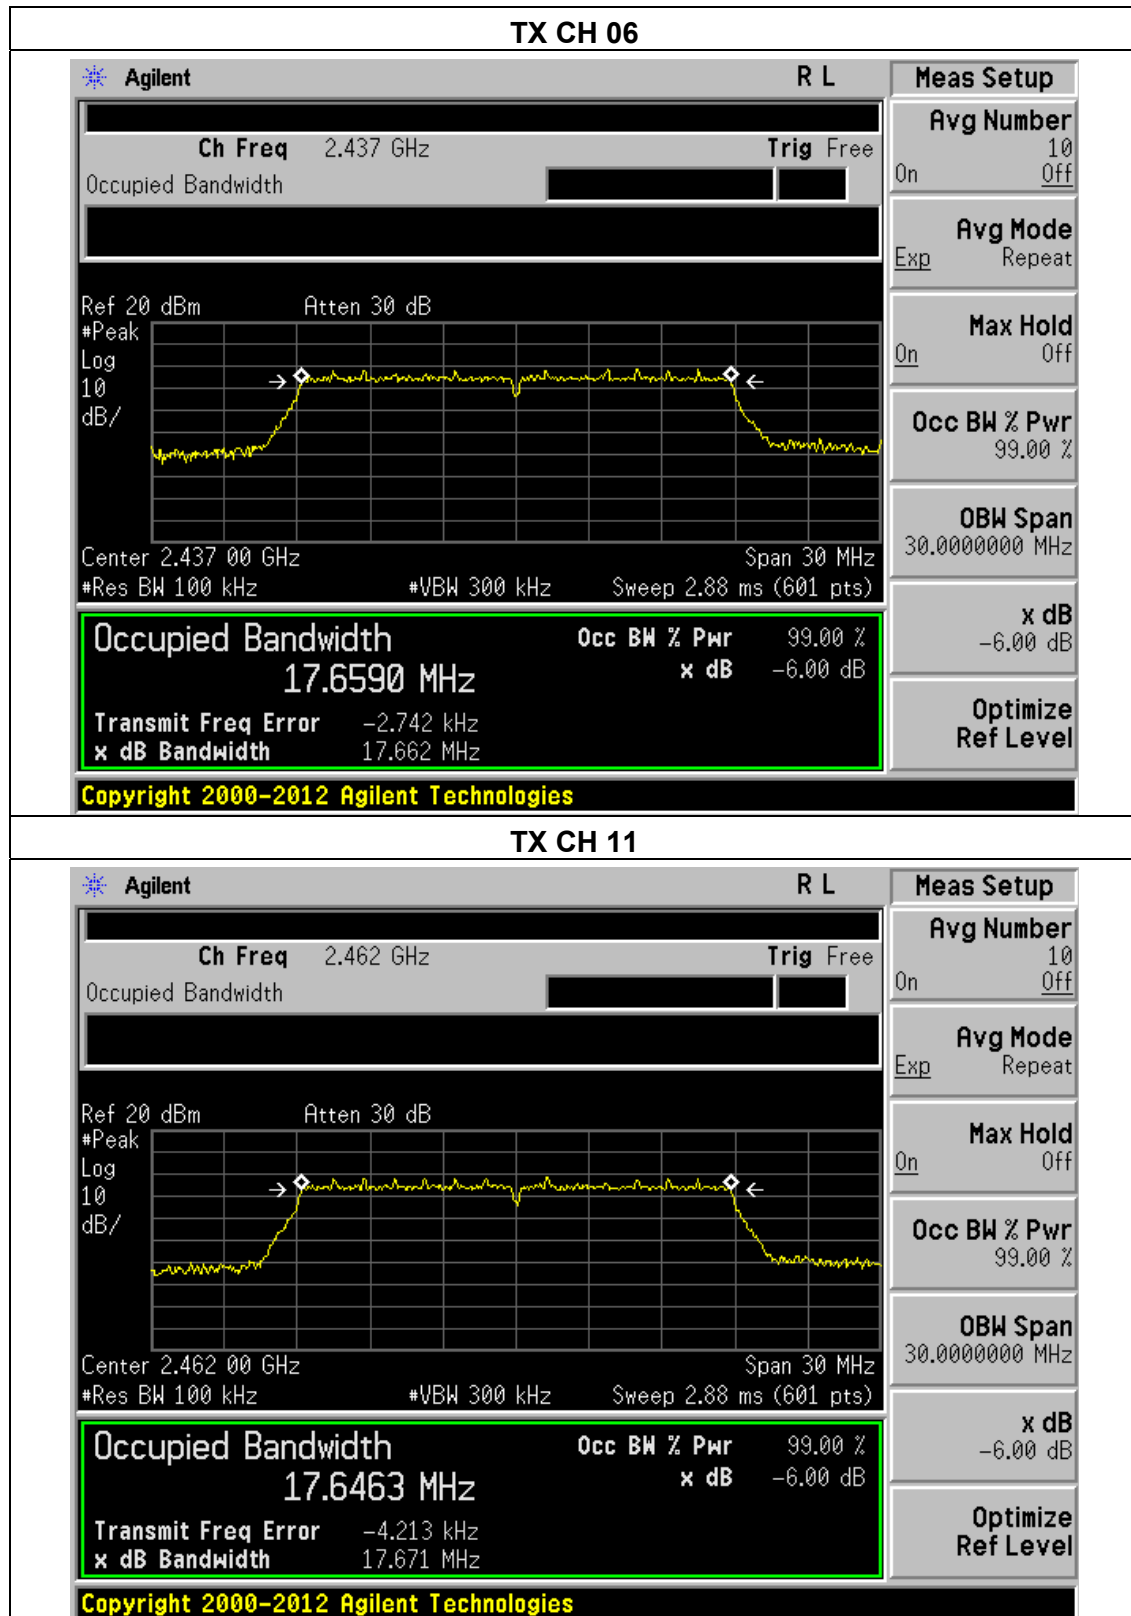



Ant.2

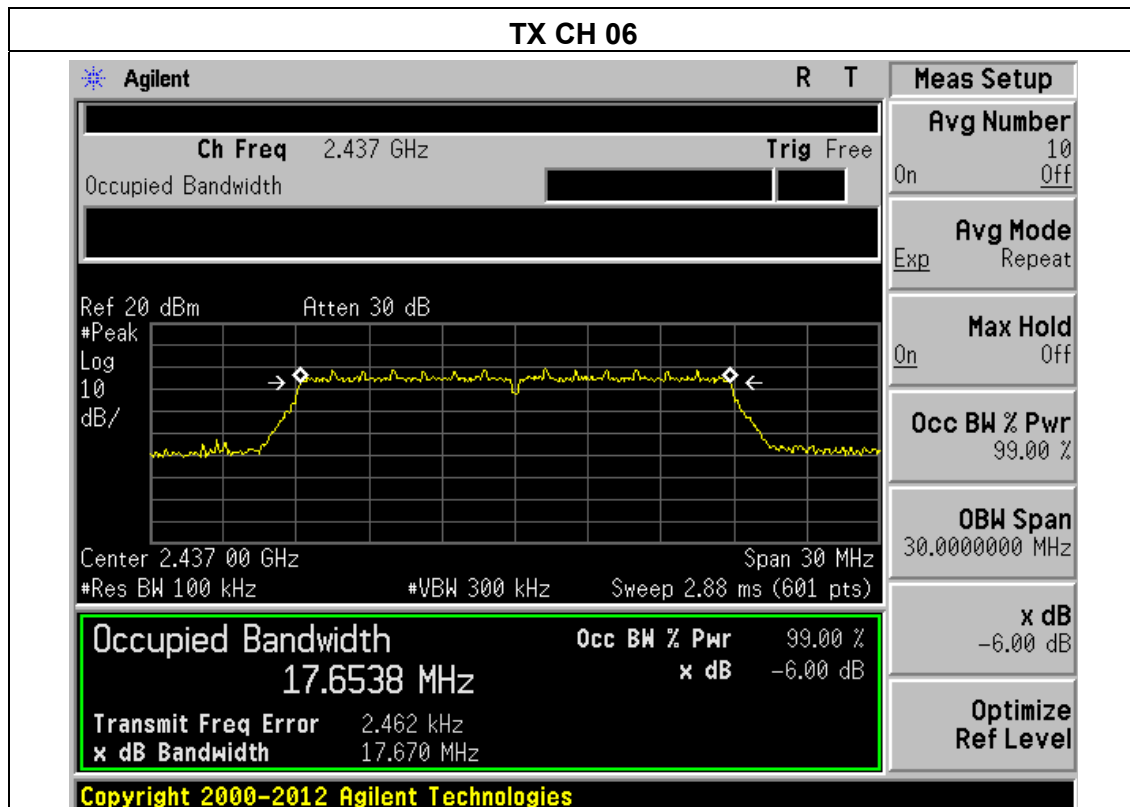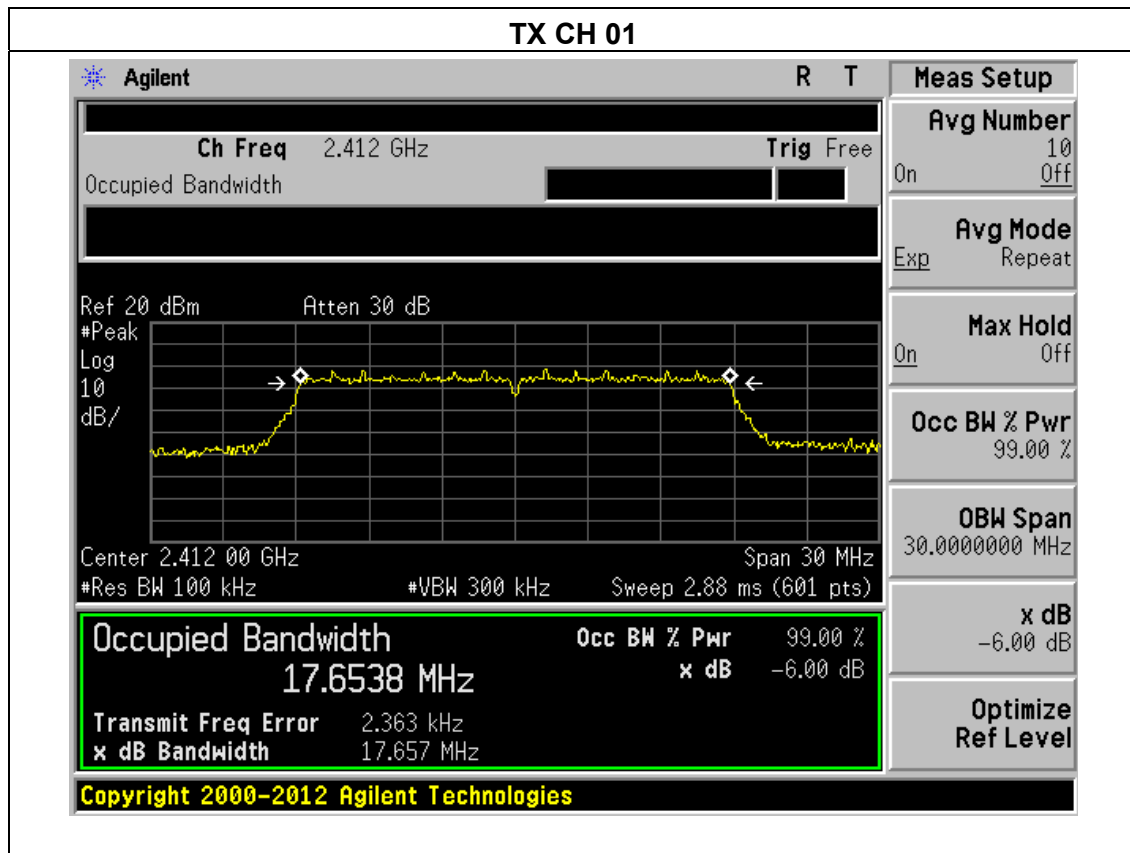

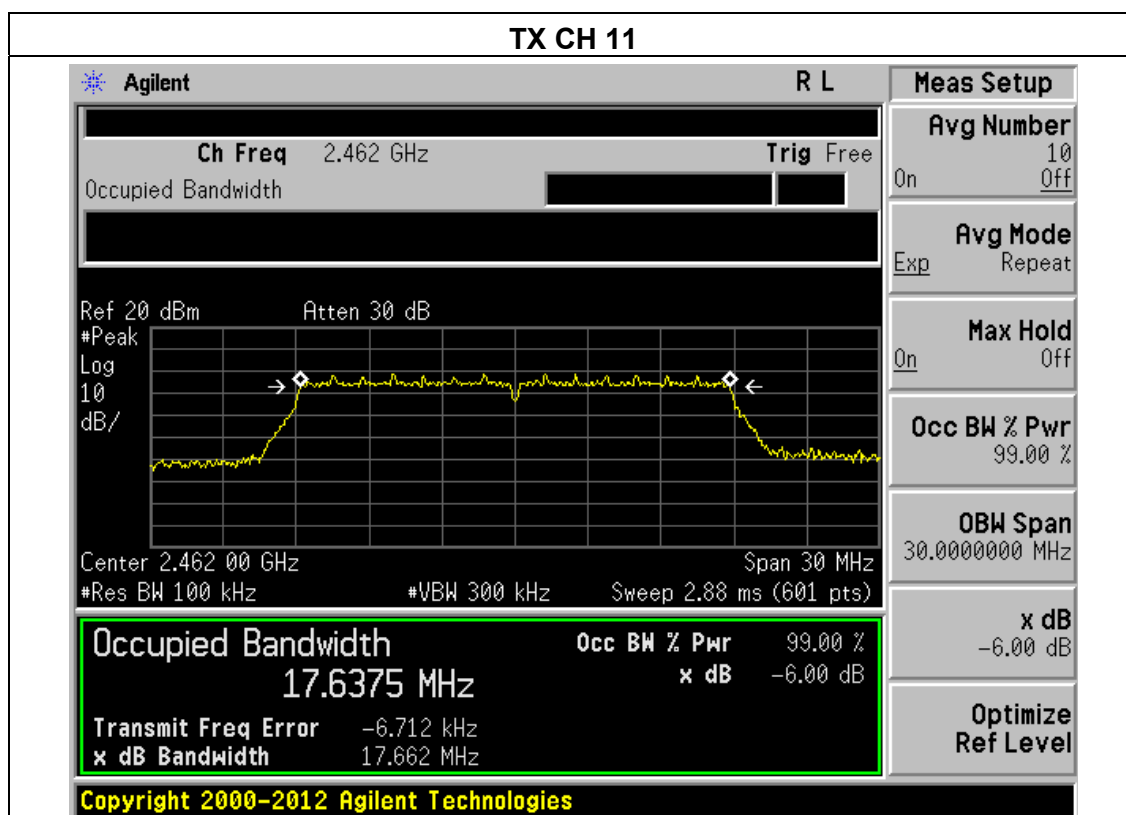





EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter
Test Mode :	TX n Mode(40M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
Low	2422	Ant.1	36.271	500	Pass
		Ant.2	36.085	500	Pass
Middle	2437	Ant.1	36.111	500	Pass
		Ant.2	36.156	500	Pass
High	2452	Ant.1	36.025	500	Pass
		Ant.2	36.097	500	Pass



Ant.1

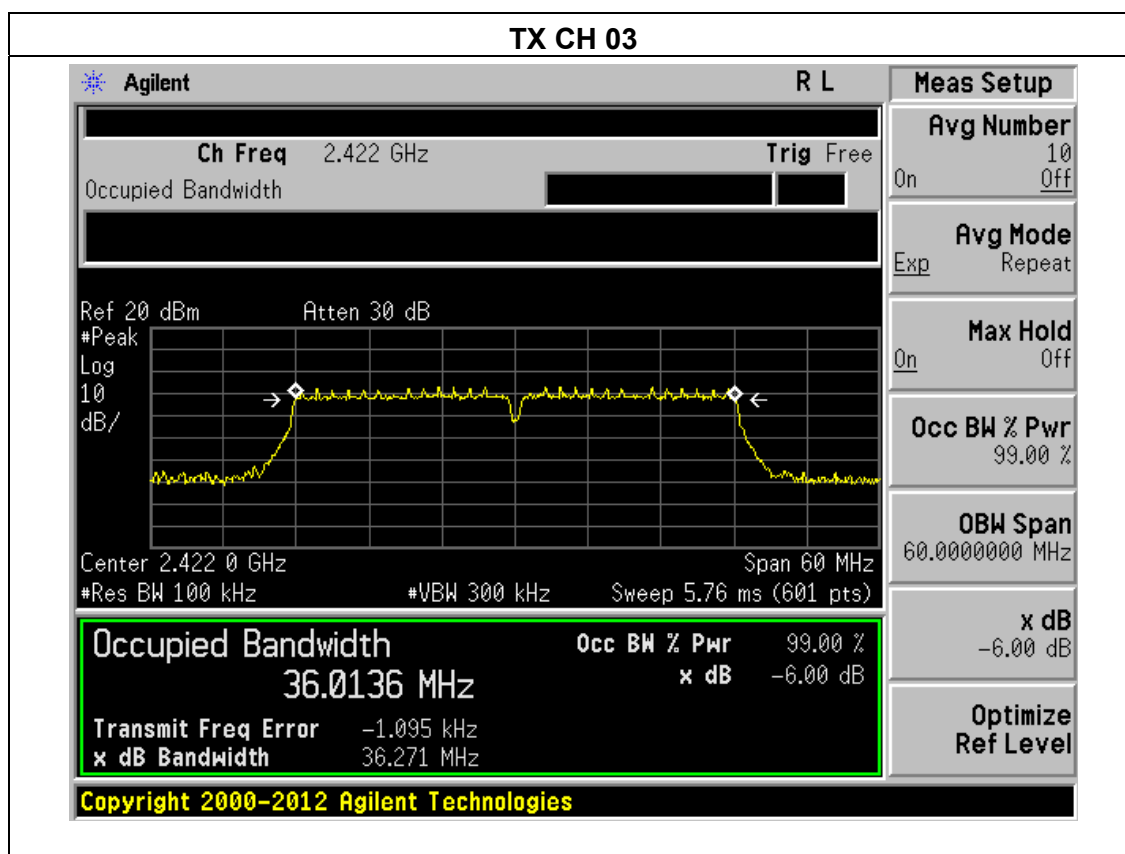


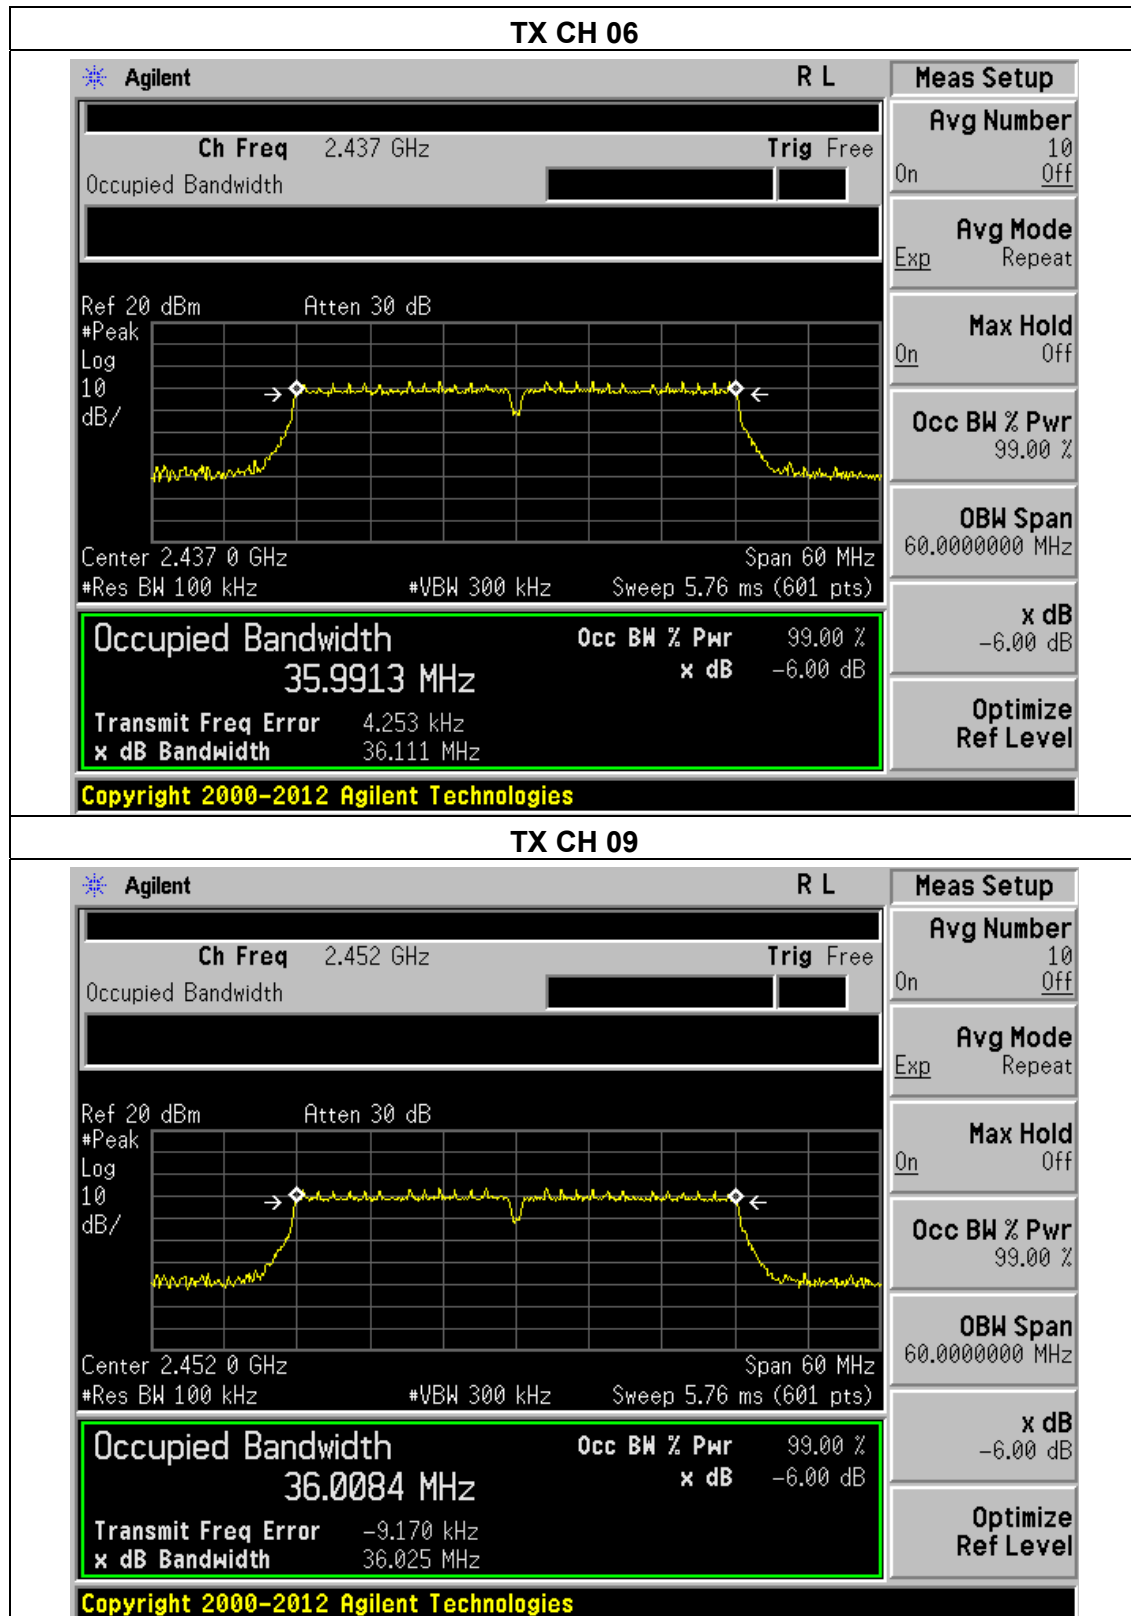



Ant.2

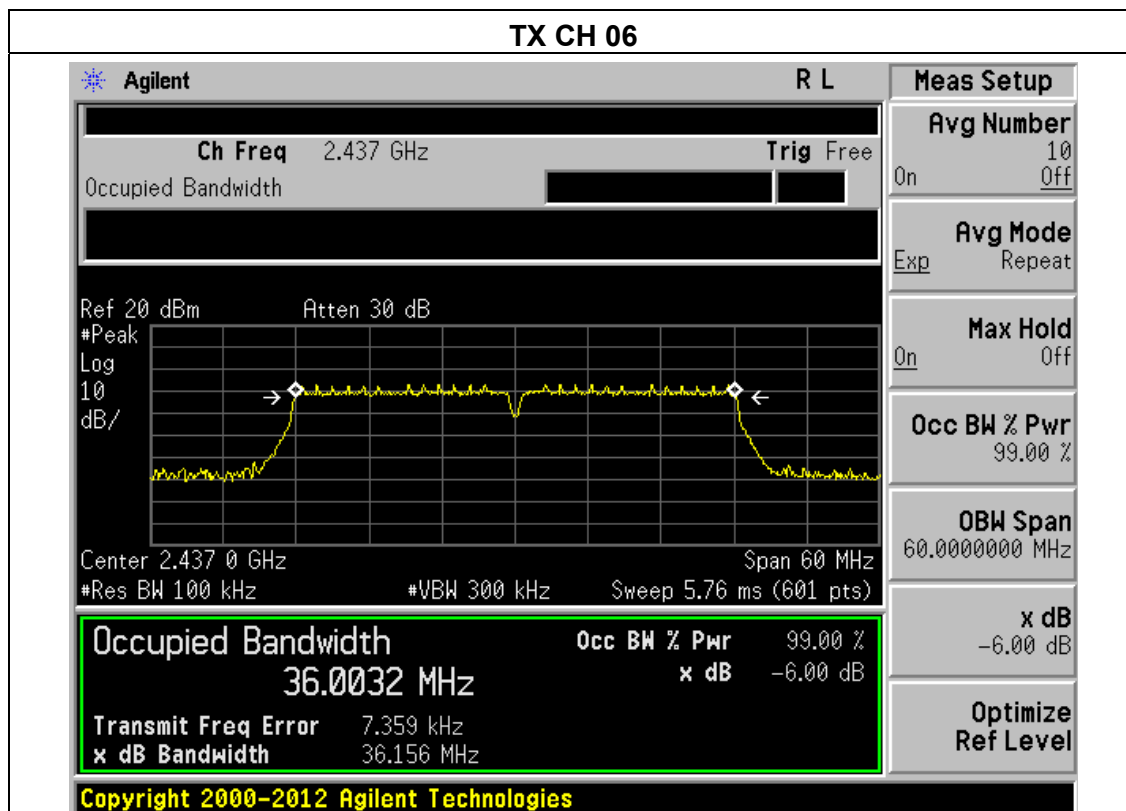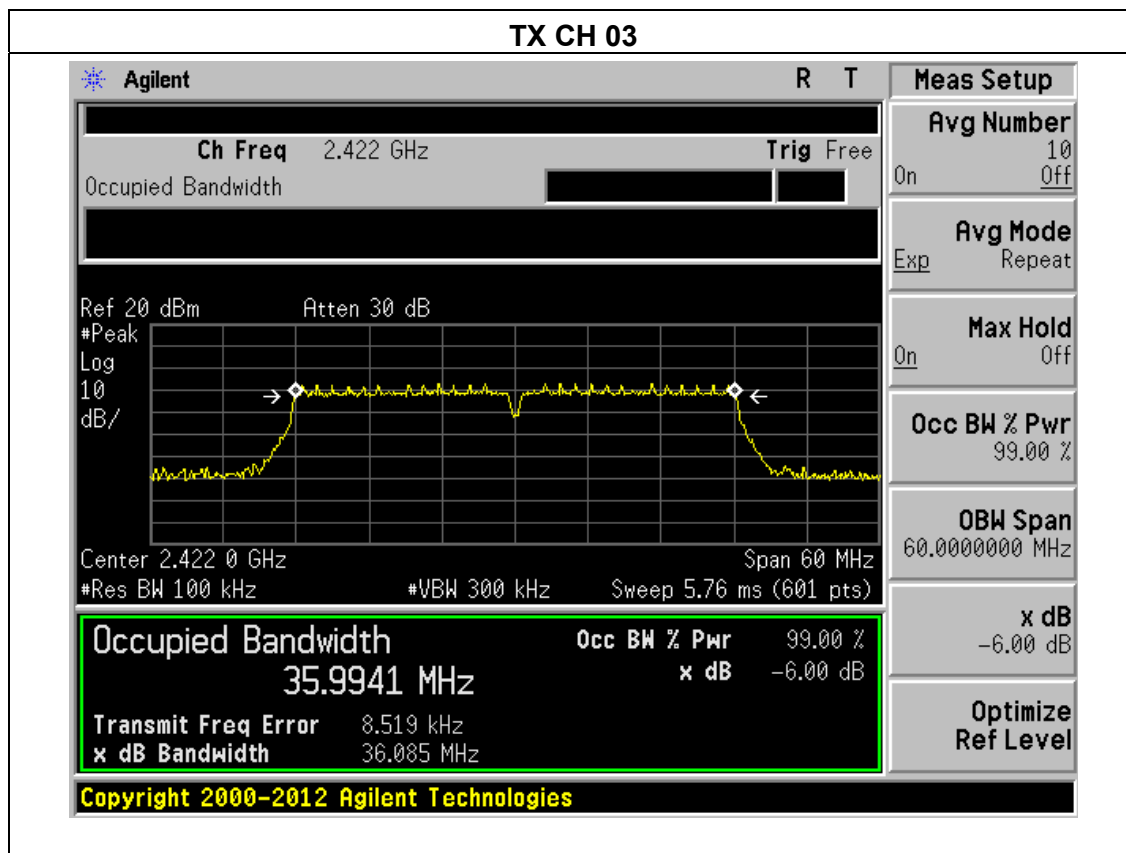

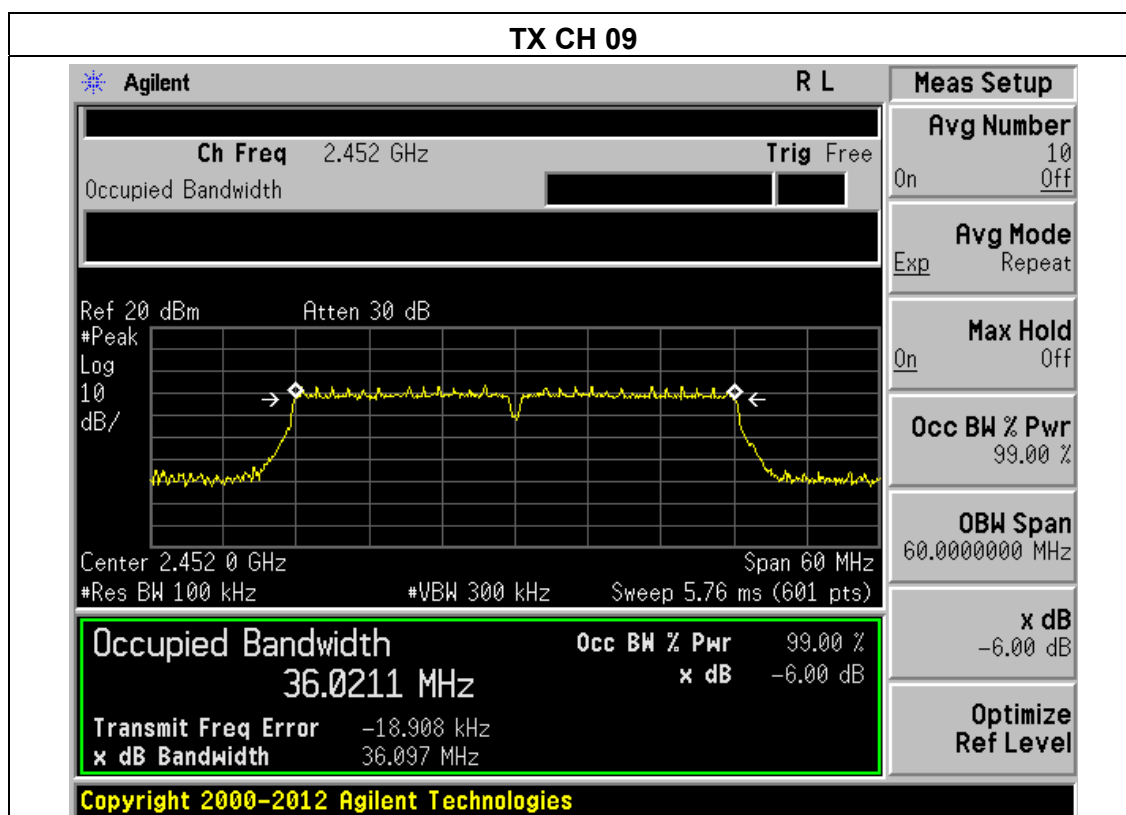



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter

	Frequency	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(PK)	Total Conducted Output Power(PK)	Total Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	(mW)	(mW)	(dBm)	dBm
802.11b	2412	16.35	43.15	86.10	19.35	30
		16.33	42.95			
	2437	16.28	42.46	84.53	19.27	30
		16.24	42.07			
	2462	16.31	42.76	84.64	19.28	30
		16.22	41.88			
802.11g	2412	14.41	27.61	54.34	17.35	30
		14.27	26.73			
	2437	14.43	27.73	53.91	17.32	30
		14.18	26.18			
	2462	14.27	26.73	53.96	17.32	30
		14.35	27.23			
802.11n20	2412	13.24	21.09	41.89	16.22	30
		13.18	20.80			
	2437	13.21	20.94	41.74	16.21	30
		13.18	20.80			
	2462	13.26	21.18	41.79	16.21	30
		13.14	20.61			
802.11n40	2422	13.11	20.46	41.07	16.14	30
		13.14	20.61			
	2437	13.15	20.65	40.97	16.12	30
		13.08	20.32			
	2452	13.17	20.75	41.16	16.14	30
		13.14	20.61			



7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP





7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

EUT :	Mini pc	Model Name :	IBOX-501 N10
Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter

Radiated

Modulation Type:	Frequency (MHz)	Antenna polarization (H/V)	Factor (dB)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
				PK	PK	AV	
802.11b	<2400	H	1.42	50.26	74.00	54.00	Pass
	<2400	V	1.39	49.46	74.00	54.00	Pass
	>2483.5	H	1.62	49.30	74.00	54.00	Pass
	>2483.5	V	1.75	49.91	74.00	54.00	Pass
802.11g	<2400	H	1.42	49.52	74.00	54.00	Pass
	<2400	V	1.39	49.24	74.00	54.00	Pass
	>2483.5	H	1.62	49.56	74.00	54.00	Pass
	>2483.5	V	1.75	49.98	74.00	54.00	Pass
802.11n20	<2400	H	1.42	50.03	74.00	54.00	Pass
	<2400	V	1.39	49.51	74.00	54.00	Pass
	>2483.5	H	1.62	49.35	74.00	54.00	Pass
	>2483.5	V	1.75	50.04	74.00	54.00	Pass
802.11n40	<2400	H	1.42	49.82	74.00	54.00	Pass
	<2400	V	1.39	49.45	74.00	54.00	Pass
	>2483.5	H	1.62	49.50	74.00	54.00	Pass
	>2483.5	V	1.75	50.09	74.00	54.00	Pass

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

If peak level below the average limit, the average level was no recording.




Ant.1

802.11b: Band Edge, Left Side

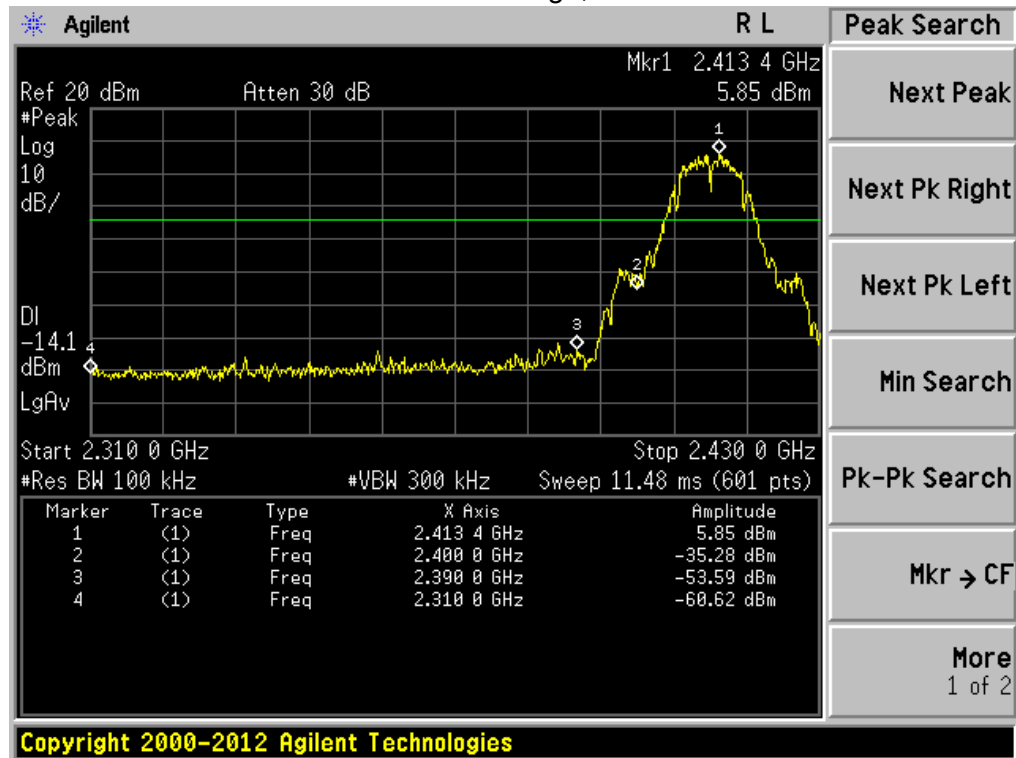


802.11b: Band Edge, Right Side

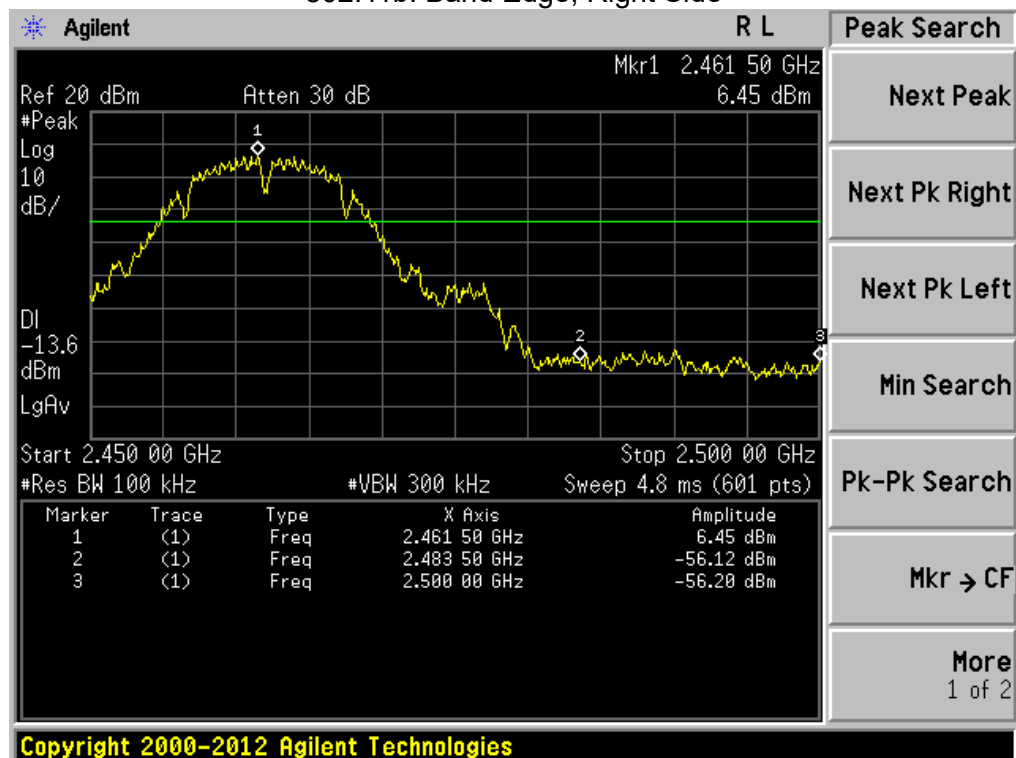




802.11g: Band Edge, Left Side

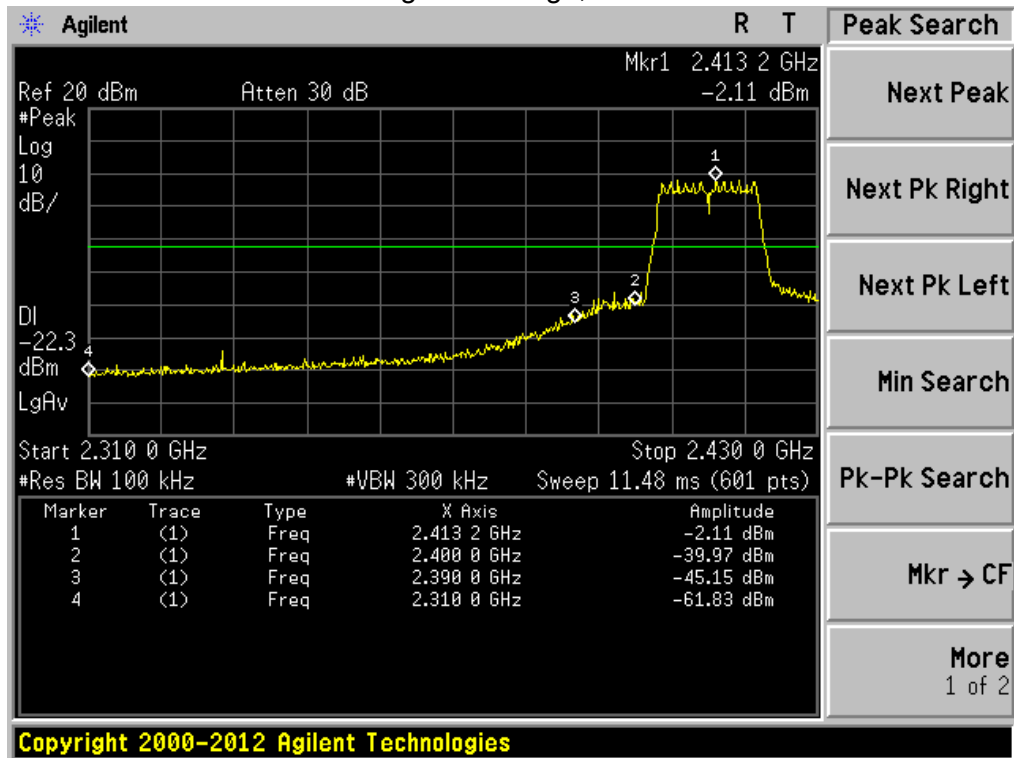


802.11g: Band Edge, Right Side

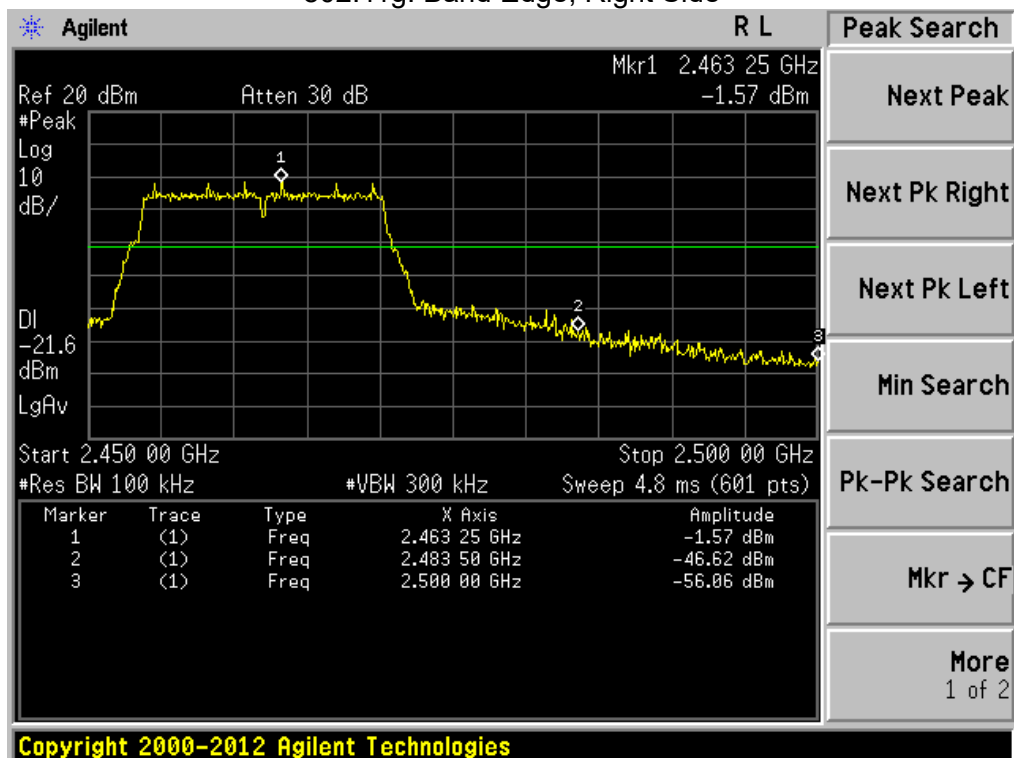




802.11n-HT20: Band Edge, Left Side

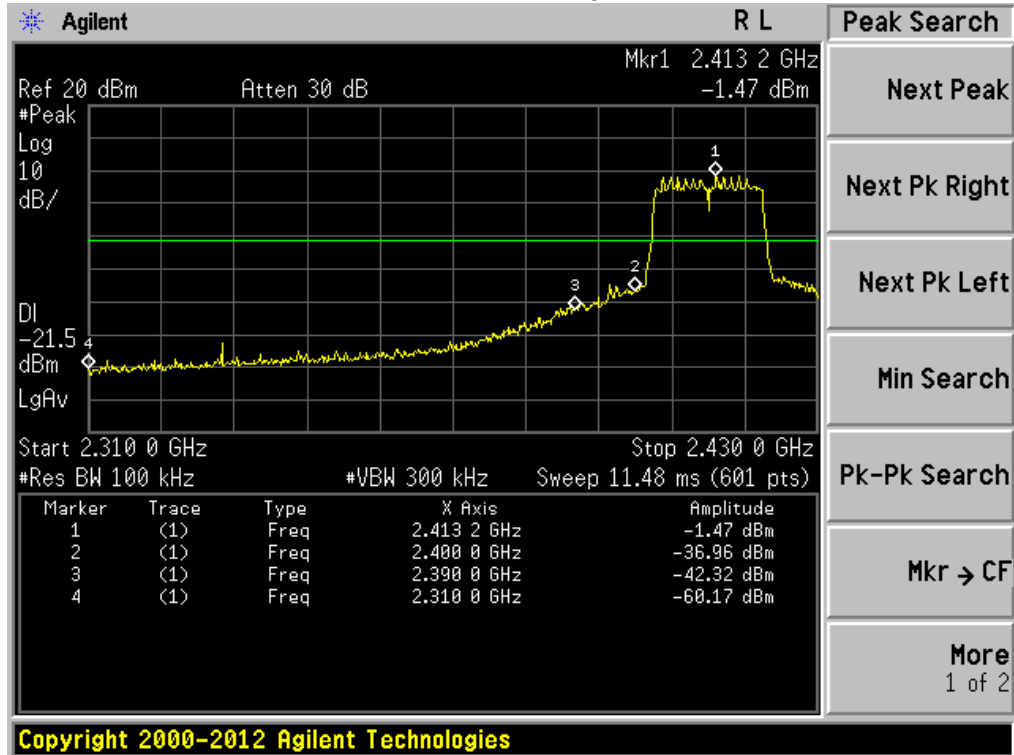


802.11n-HT20: Band Edge, Right Side

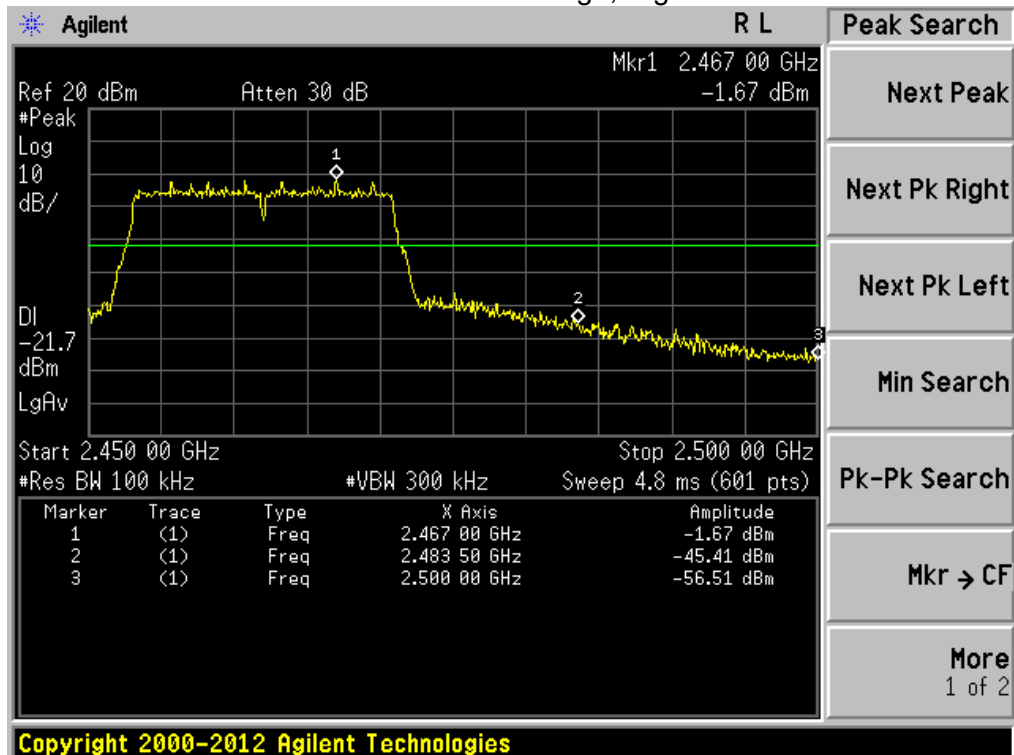




802.11n-HT40: Band Edge, Left Side

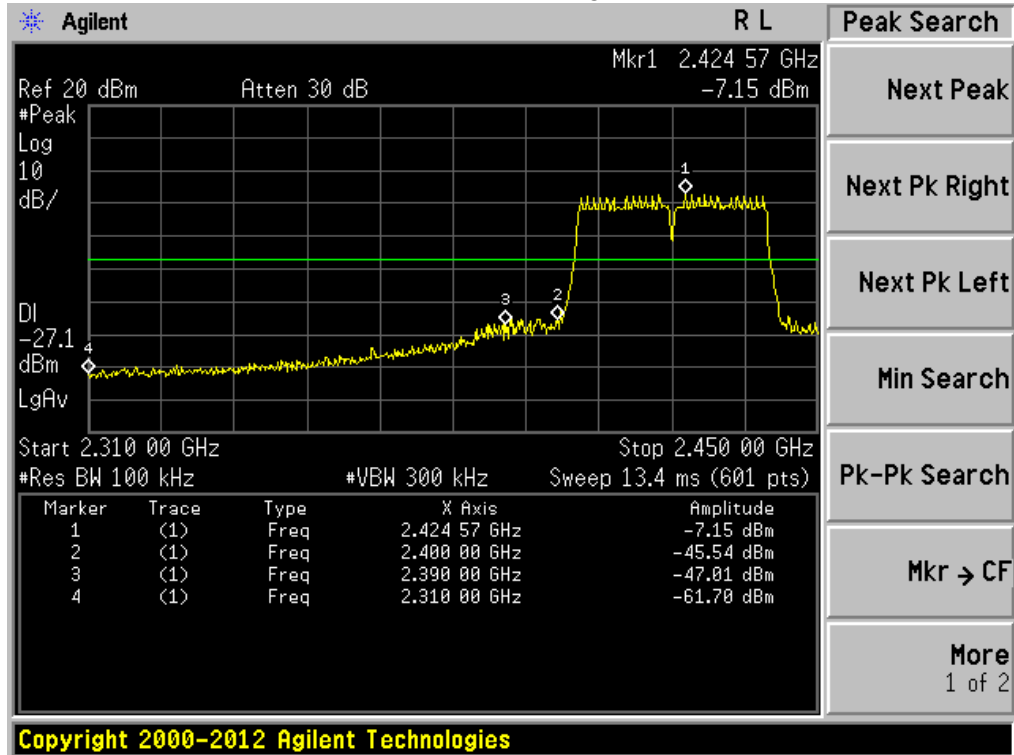


802.11n-HT40: Band Edge, Right Side

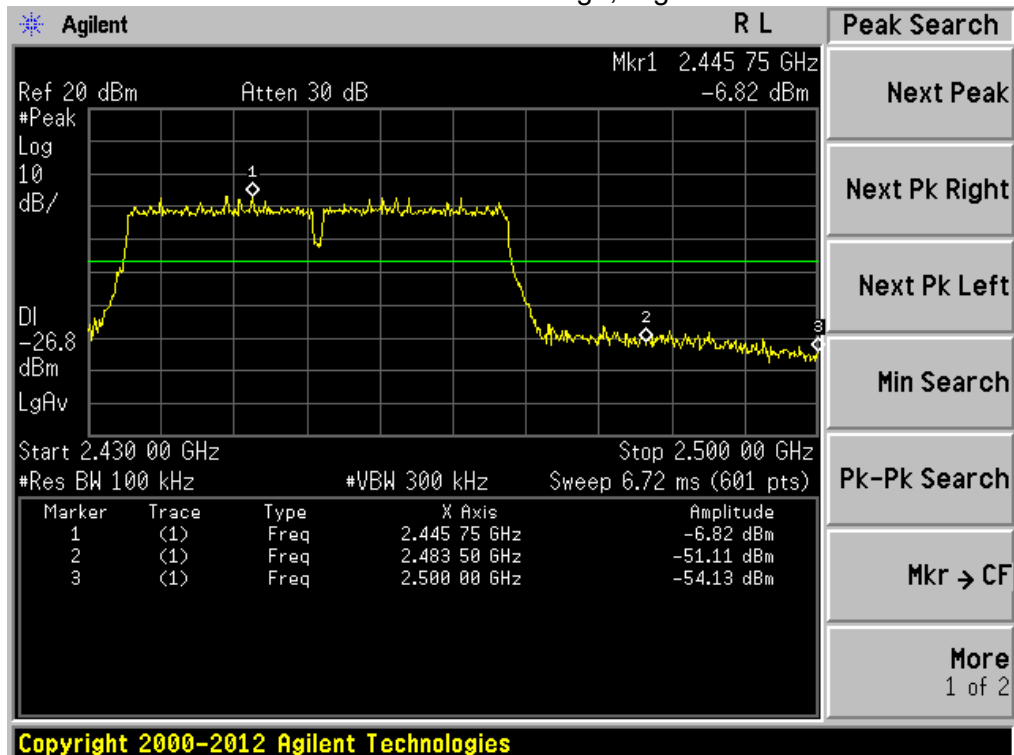




Ant.2

802.11b: Band Edge, Left Side

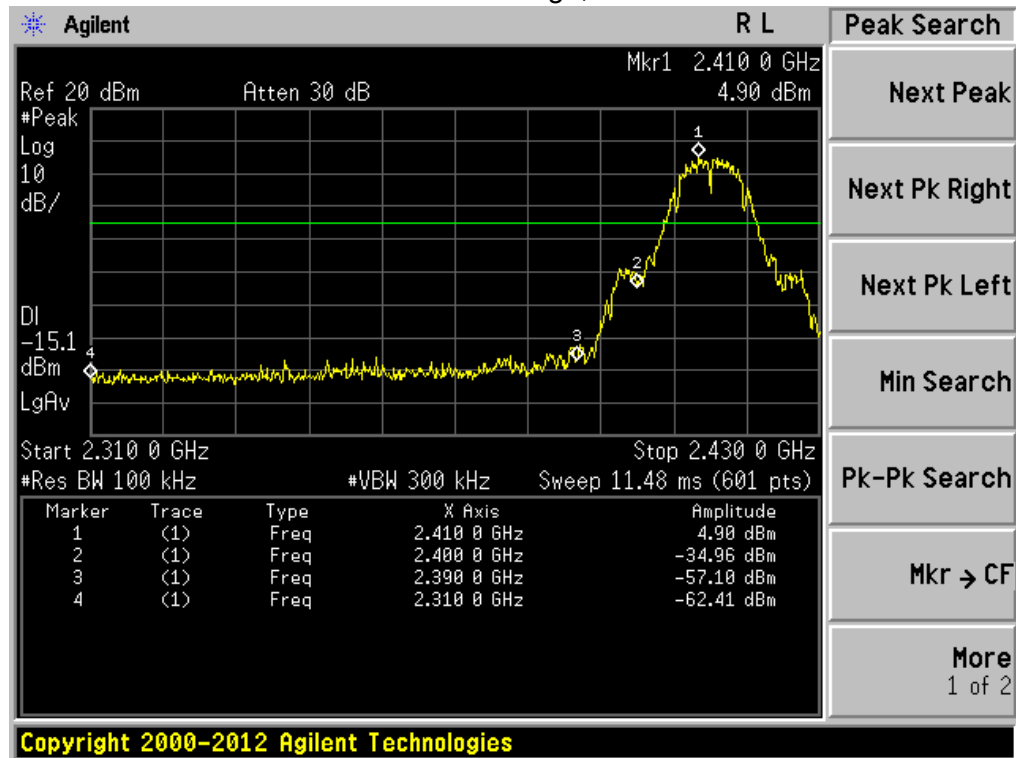


802.11b: Band Edge, Right Side

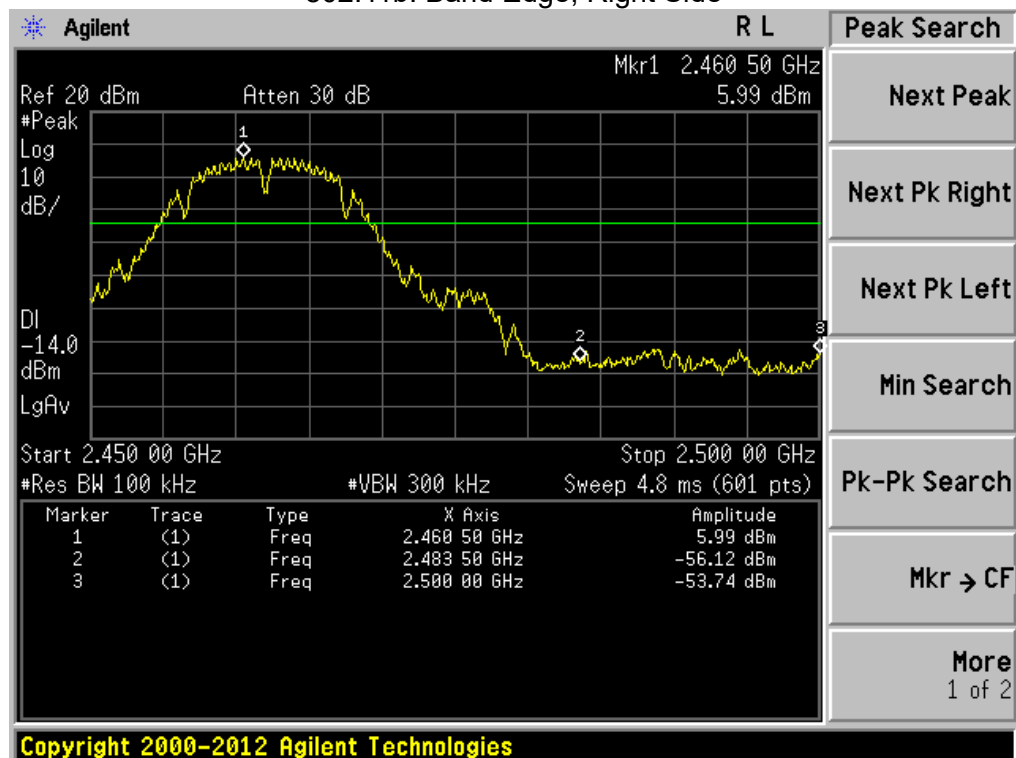




802.11g: Band Edge, Left Side

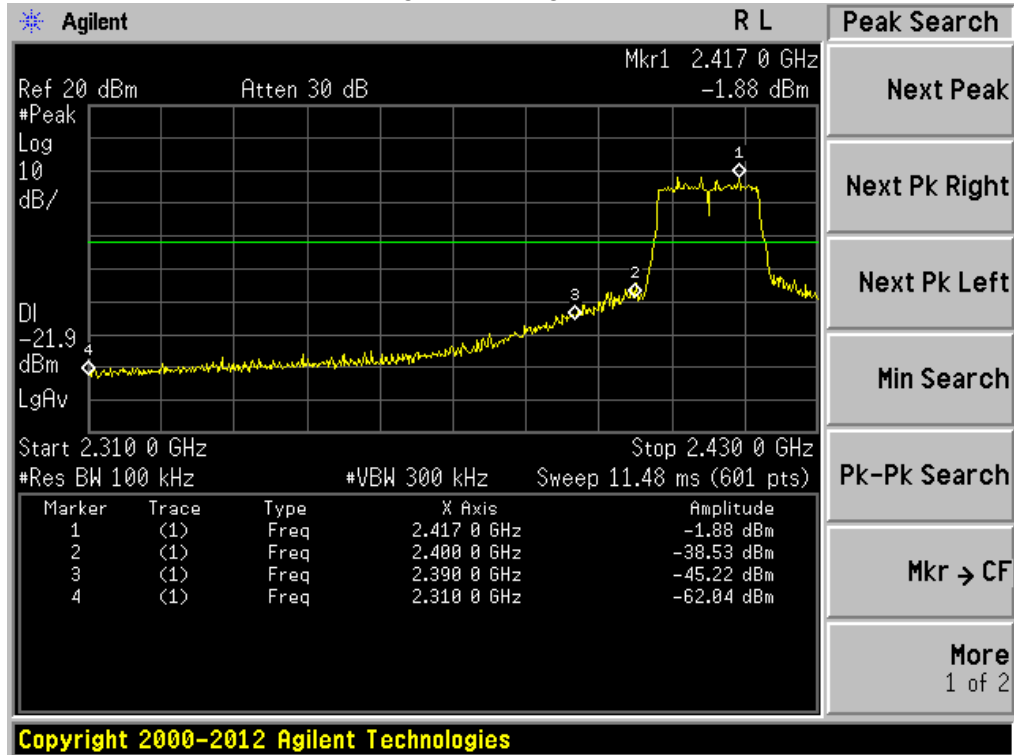


802.11g: Band Edge, Right Side

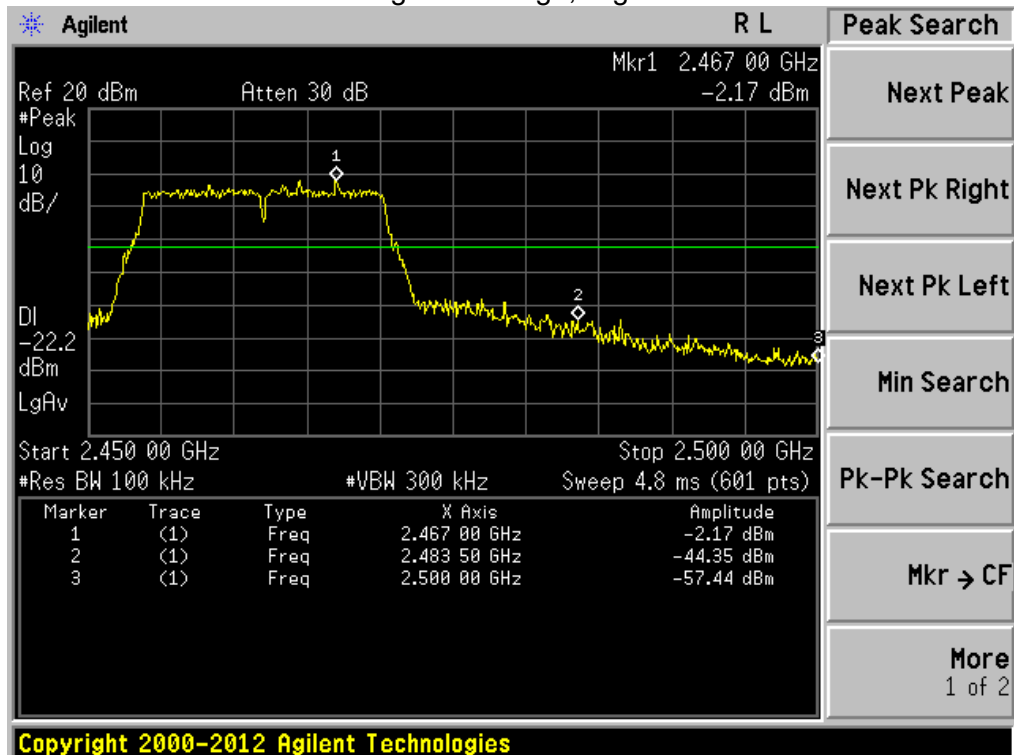




802.11n-HT20: Band Edge, Left Side

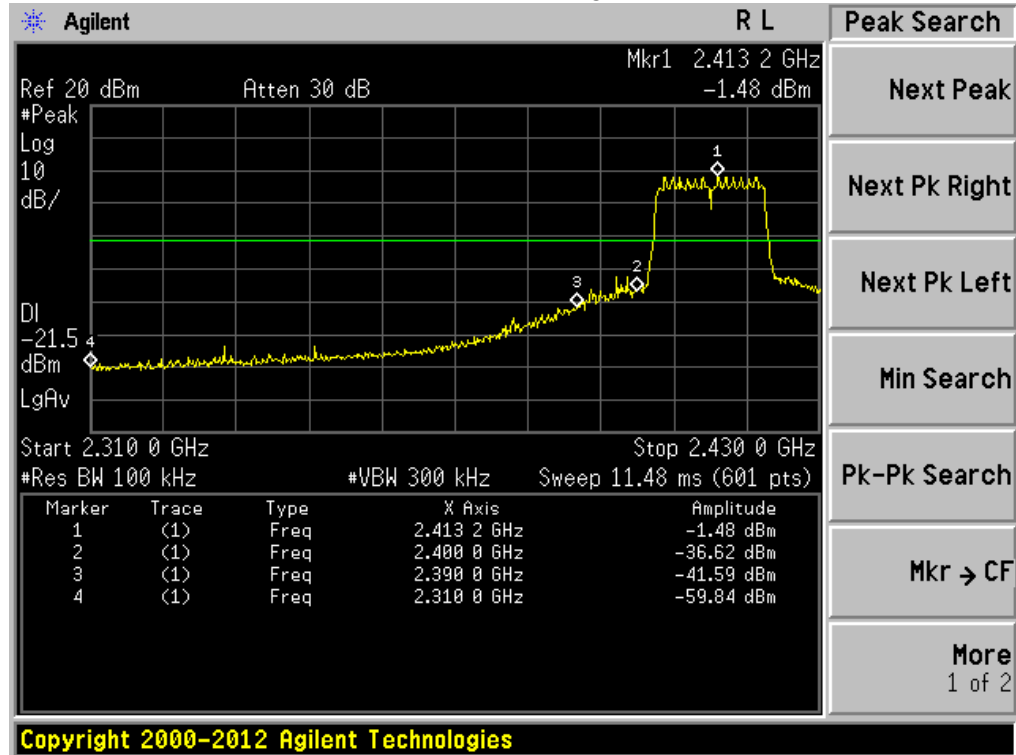


802.11n-HT20: Band Edge, Right Side

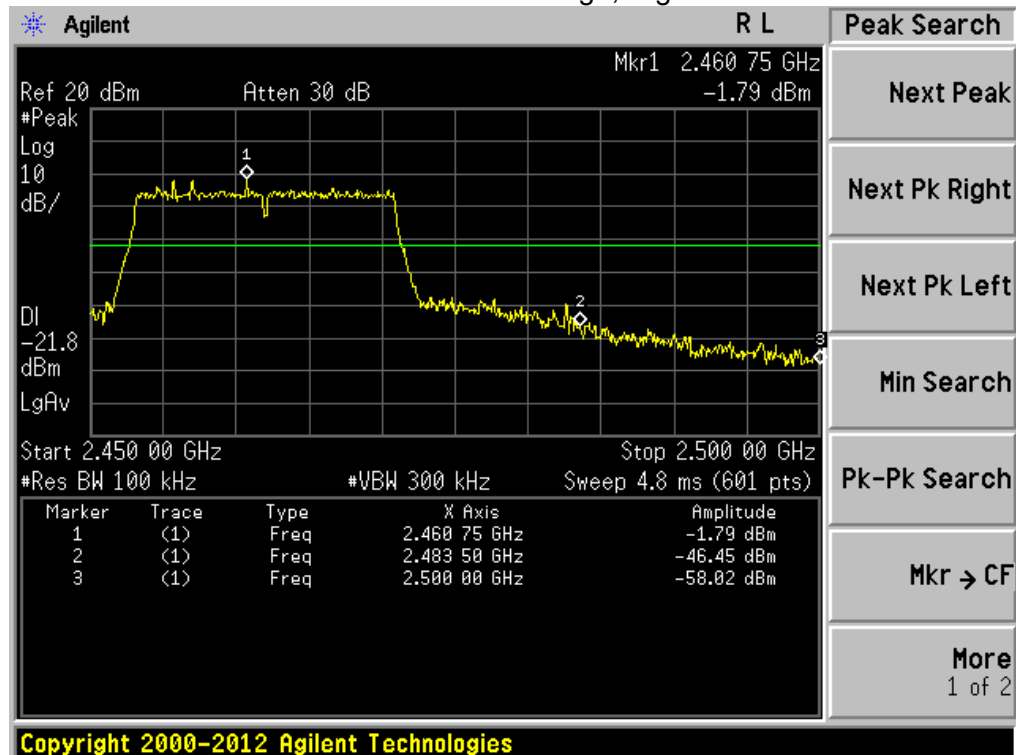




802.11n-HT40: Band Edge, Left Side

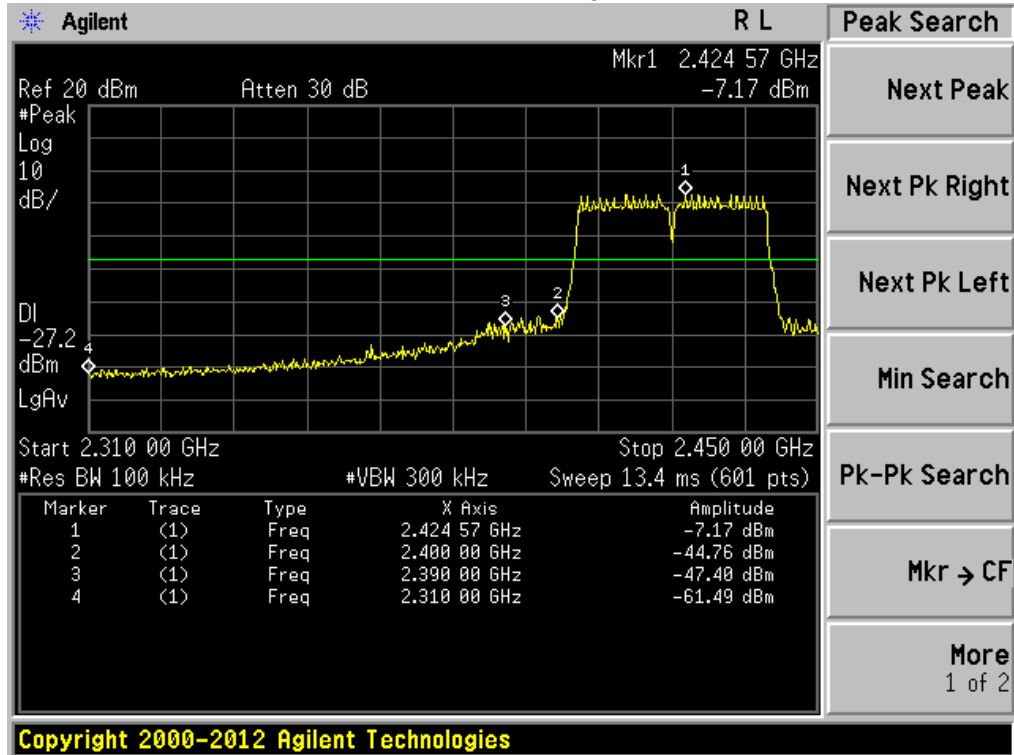

802.11n-HT40: Band Edge, Right Side

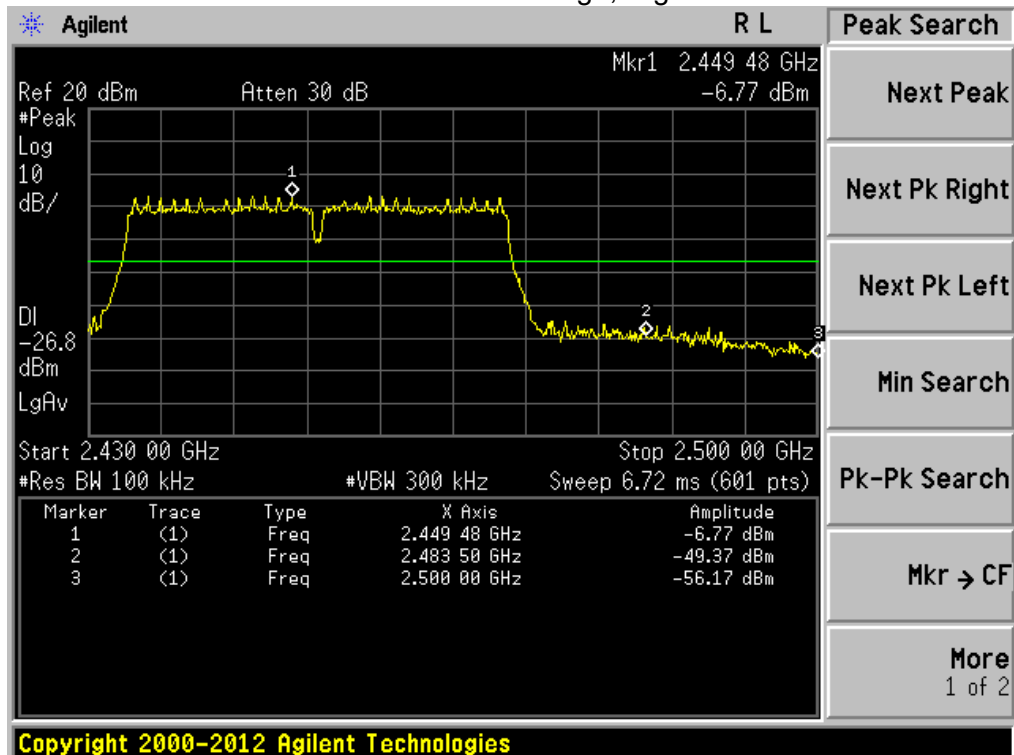



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is external antenna, use of anti thread antenna, It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

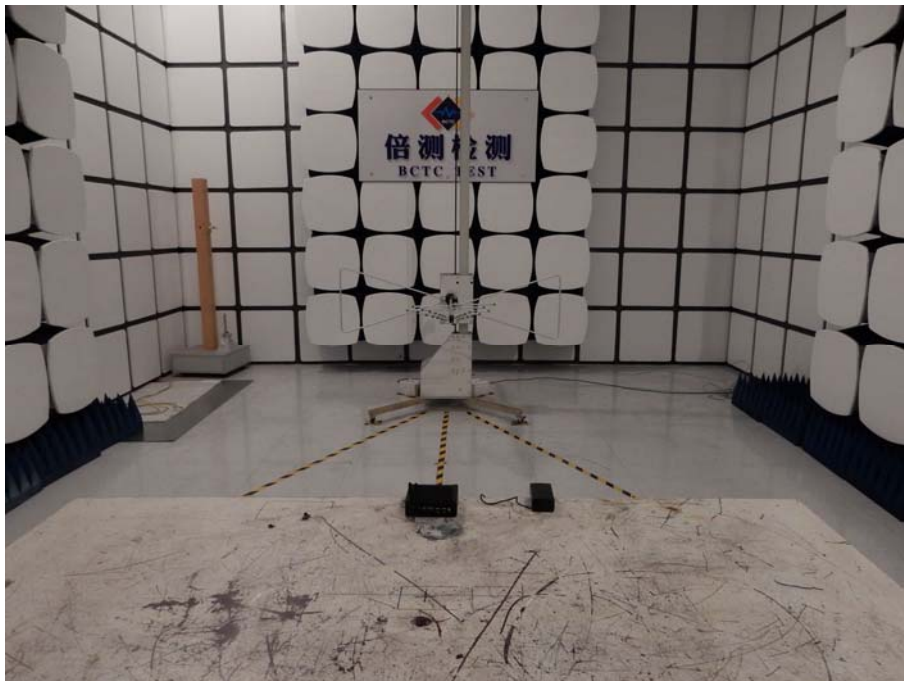

Radiated Measurement Photos

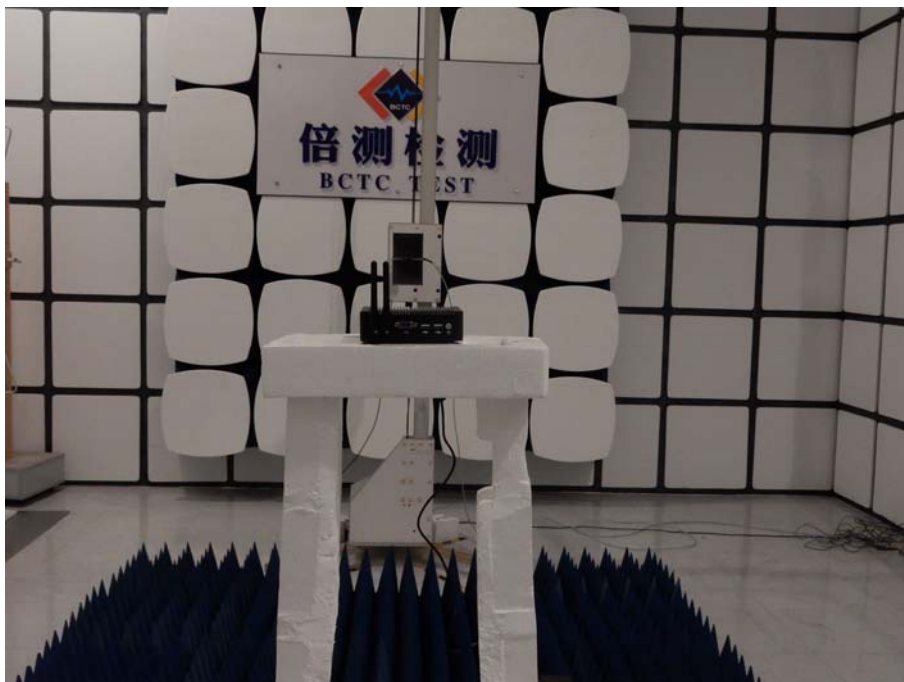




Conducted Measurement Photos






10. EUT PHOTO



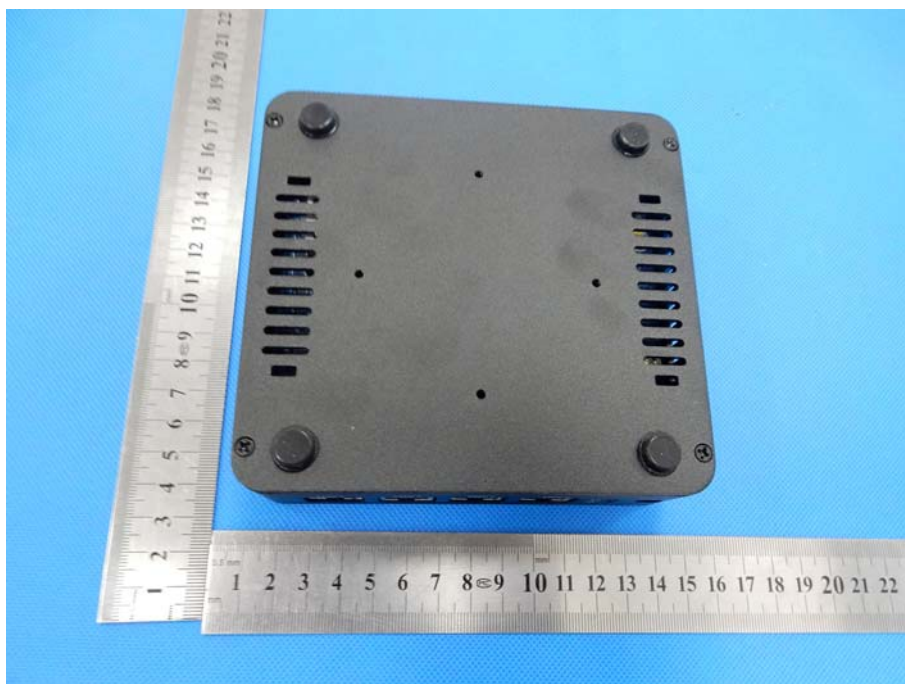

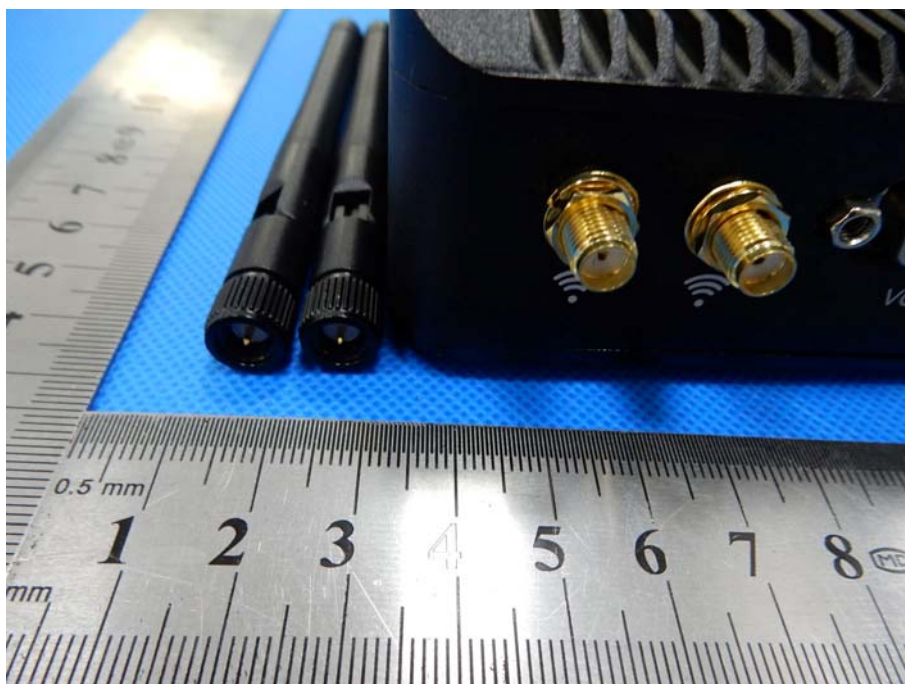



***** END OF REPORT *****