


ENGINEERING TEST REPORT



TX-99 RF Module
Model: CM-TX-99
FCC ID: 2AHAB-TX99

Applicant:

Camden Door Control
5502 Timberlea Blvd.
Mississauga, ON L4W 2T7

In Accordance With

Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.249
Operating in the Frequency Band 902 – 928 MHz

UltraTech's File No.: 16EMSI042_FCC15249

This Test report is Issued under the Authority of
Tri M. Luu
Vice President of Engineering
UltraTech Group of Labs

Date: October 20, 2016

Report Prepared by: Santhosh Fernandez

Tested by: Mr. Wei Wu

Issued Date: October 20, 2016

Test Dates: April 22, July 18 and August 5, 2016

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



91038



1309



46390-2049



AT-1945



SL2-IN-E-
1119R



Korea
KCC-RRR

CA2049

TABLE OF CONTENTS

EXHIBIT 1.	INTRODUCTION	1
1.1.	SCOPE.....	1
1.2.	RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3.	NORMATIVE REFERENCES	1
EXHIBIT 2.	PERFORMANCE ASSESSMENT	2
2.1.	CLIENT INFORMATION	2
2.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION	2
2.3.	EUT'S TECHNICAL SPECIFICATIONS	3
2.4.	ASSOCIATED ANTENNA DESCRIPTIONS	3
2.5.	LIST OF EUT'S PORTS	3
2.6.	ANCILLARY EQUIPMENT	3
EXHIBIT 3.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	4
3.1.	CLIMATE TEST CONDITIONS	4
3.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	4
EXHIBIT 4.	SUMMARY OF TEST RESULTS	5
4.1.	LOCATION OF TESTS	5
4.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	5
4.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	5
EXHIBIT 5.	TEST DATA.....	6
5.1.	DC POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPART B, PARA.15.107(A).....	6
5.2.	OCCUPIED BANDWIDTH [§15.215(c)]	10
5.3.	FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS (RADIATED AT 3M) [47 CFR §§ 15.249(A), 15.209 & 15.205].....	14
EXHIBIT 6.	TEST EQUIPMENT LIST	19
EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	20
7.1.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	20

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.249
Title:	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15 – Radio Frequency Devices
Purpose of Test:	Equipment Certification for Low Power Licensed-Exempt Transmitters operating in the Frequency Band 902-928 MHz.
Test Procedures:	▪ ANSI C63.4 ▪ ANSI C63.10
Environmental Classification:	[x] Commercial, industrial or business environment [x] Residential environment

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2016	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22	2008-09,Ed 6	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Camden Door Control
Address:	5502 Timberlea Blvd. Mississauga, ON L4W 2T7 CANADA
Contact Person:	Mr. Frank Gerlach Phone #: 905-282-1750 Fax #: 905-282-9691 Email Address: fgerlach@embeddedsense.com

MANUFACTURER	
Name:	Embedded Sense Inc.
Address:	5155 Spectrum Way Mississauga, ON L4W 5A1 CANADA
Contact Person:	Mr. Frank Gerlach Phone #: 905-282-1750 Fax #: 905-282-9691 Email Address: fgerlach@embeddedsense.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Lazerpoint RF Module
Product Name:	TX-99 RF Module
Model Name or Number:	CM-TX-99
Serial Number:	Test Sample
Type of Equipment:	Low Power Communication Device Transmitter
Input Power Supply:	3.0 - 3.3 V DC
Primary User Functions of EUT:	Transmits Key Code

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	• Mobile • Portable
Intended Operating Environment:	▪ Commercial, industrial or business environment ▪ Residential environment
Power Supply Requirement:	3.0 - 3.3 VDC
RF Output Power Rating:	74.05 dBµV/m Peak at 3m distance
Operating Frequency Range:	905.25 to 925.25 MHz
20 dB Bandwidth:	320.19 KHz
RF Output Impedance:	50 Ohm
Modulation Type:	2-FSK, F1D
Antenna Connector Type:	Integral PCB Antenna

2.4. ASSOCIATED ANTENNA DESCRIPTIONS

Antenna Type	Maximum Gain (dBi)
Integral PCB Antenna	0.0

2.5. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
No I/O port.				

2.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

None

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21 to 23 °C
Humidity:	45 to 58%
Pressure:	102 kPa
Power Input Source:	3.3 V DC using external power supply

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements.
Special Test Software:	Special software provided by the Applicant to operate the EUT at each channel frequency continuously. For example, the transmitter will be operated at each of the lowest, middle and highest frequencies individually continuously during testing.
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment as described with the test results.

Transmitter Test Signals	
Frequency Band(s):	905.25 - 925.25 MHz
Frequency(ies) Tested:	905.25 MHz, 915.25 MHz and 925.25 MHz
RF Power Output: (measured maximum output power at antenna terminals)	74.1 dBµV/m Peak at 3m distance
Normal Test Modulation:	2-FSK
Modulating Signal Source:	Internal

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2017-04-02.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	Yes
15.207(a)	DC Power Line Conducted Emissions	Yes
15.215(c)	20 dB Bandwidth	Yes
15.249(a), 15.209, 15.205	Transmitter Radiated Emissions, Harmonic Emissions	Yes

* The EUT complies with the requirement; it employs an integral antenna.

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. TEST DATA

5.1. DC POWERLINE CONDUCTED Emissions @ FCC PART 15, SUBPART B, PARA.15.107(A)

5.1.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	CLASS B LIMITS		Measuring Bandwidth
	Quasi-Peak (dB μ V)	Average* (dB μ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 10 Hz for Average

* Decreasing linearly with logarithm of frequency

5.1.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

Calculation of Conducted Emission Voltage (dB μ V):

This is calculated by adding the L.I.S.N factor, Cable loss factor, and Attenuator factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{Voltage (dB}\mu\text{V)} = \text{RA} + \text{AF} + \text{CF} + \text{LF}$$


Where

RA	=	Receiver/Analyzer Reading in dB μ V
AF	=	Attenuation Factor in dB
CF	=	Cable loss Factor in dB
LF	=	L.I.S.N Factor in dB

5.1.3. Test Instruments

Refer to Exhibit 6 for Test Instruments & Measurement Uncertainty

5.1.4. Test Arrangement

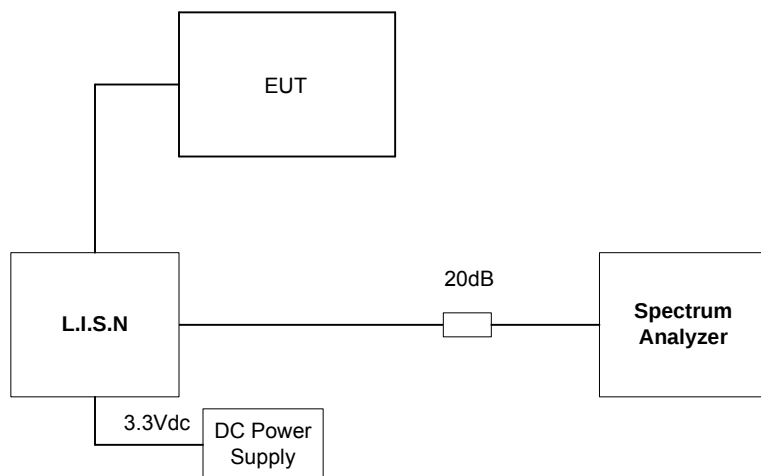


5.1.5. Test Results

The emissions were scanned from 150 kHz to 30 MHz at AC mains Terminal via a LISN, and all emissions less than 20 dB below the limits were recorded.

Negative Line

Current Graph

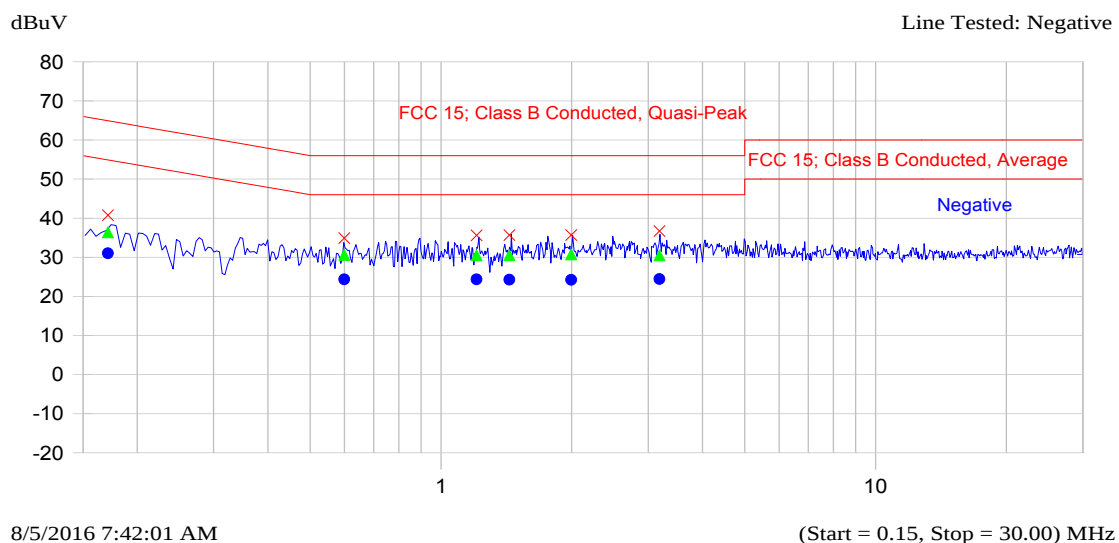


Current List

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
0.171	40.8	36.4	-28.5	31.0	-23.9	Negative
0.599	34.9	30.6	-25.4	24.3	-21.7	Negative
1.208	35.6	30.5	-25.5	24.3	-21.7	Negative
1.436	35.7	30.5	-25.5	24.3	-21.7	Negative
1.995	35.7	30.7	-25.3	24.2	-21.8	Negative
3.182	36.7	30.5	-25.5	24.4	-21.6	Negative

Positive Line

Current Graph

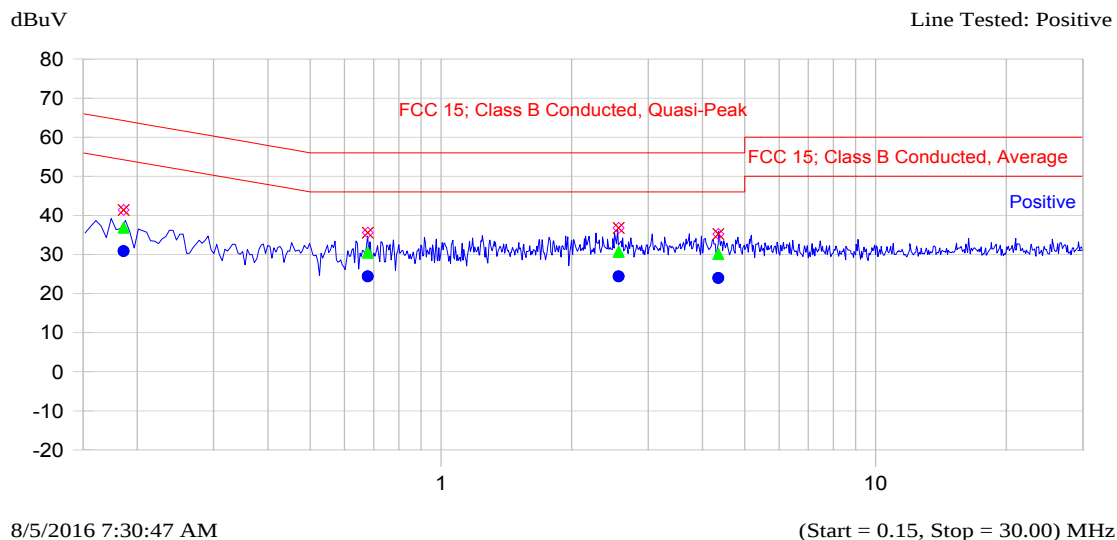

Current List

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
0.186	41.4	36.9	-27.4	30.9	-23.4	Positive
0.678	35.5	30.5	-25.5	24.4	-21.6	Positive
2.564	36.8	30.7	-25.3	24.4	-21.6	Positive
4.348	35.2	30.1	-25.9	24.0	-22.0	Positive

5.2. OCCUPIED BANDWIDTH [§15.215(c)]


5.2.1. Limit(s)

The fundamental emission must be in the authorized bandwidth.

5.2.2. Method of Measurements

ANSI C63.10

5.2.3. Test Arrangement

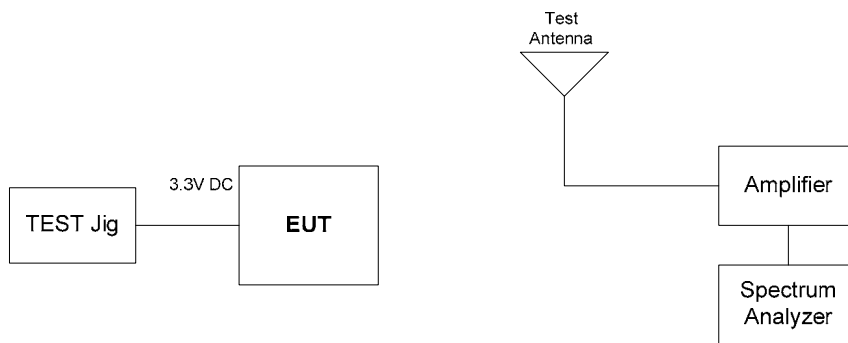


5.2.4. Test Data

Frequency (MHz)	20 dB Bandwidth (kHz)
905.25	306.73
915.25	317.31
925.25	320.19

See the following plots for detailed measurements.

Plot 5.2.4.1. 20 dB Bandwidth, 905.25 MHz

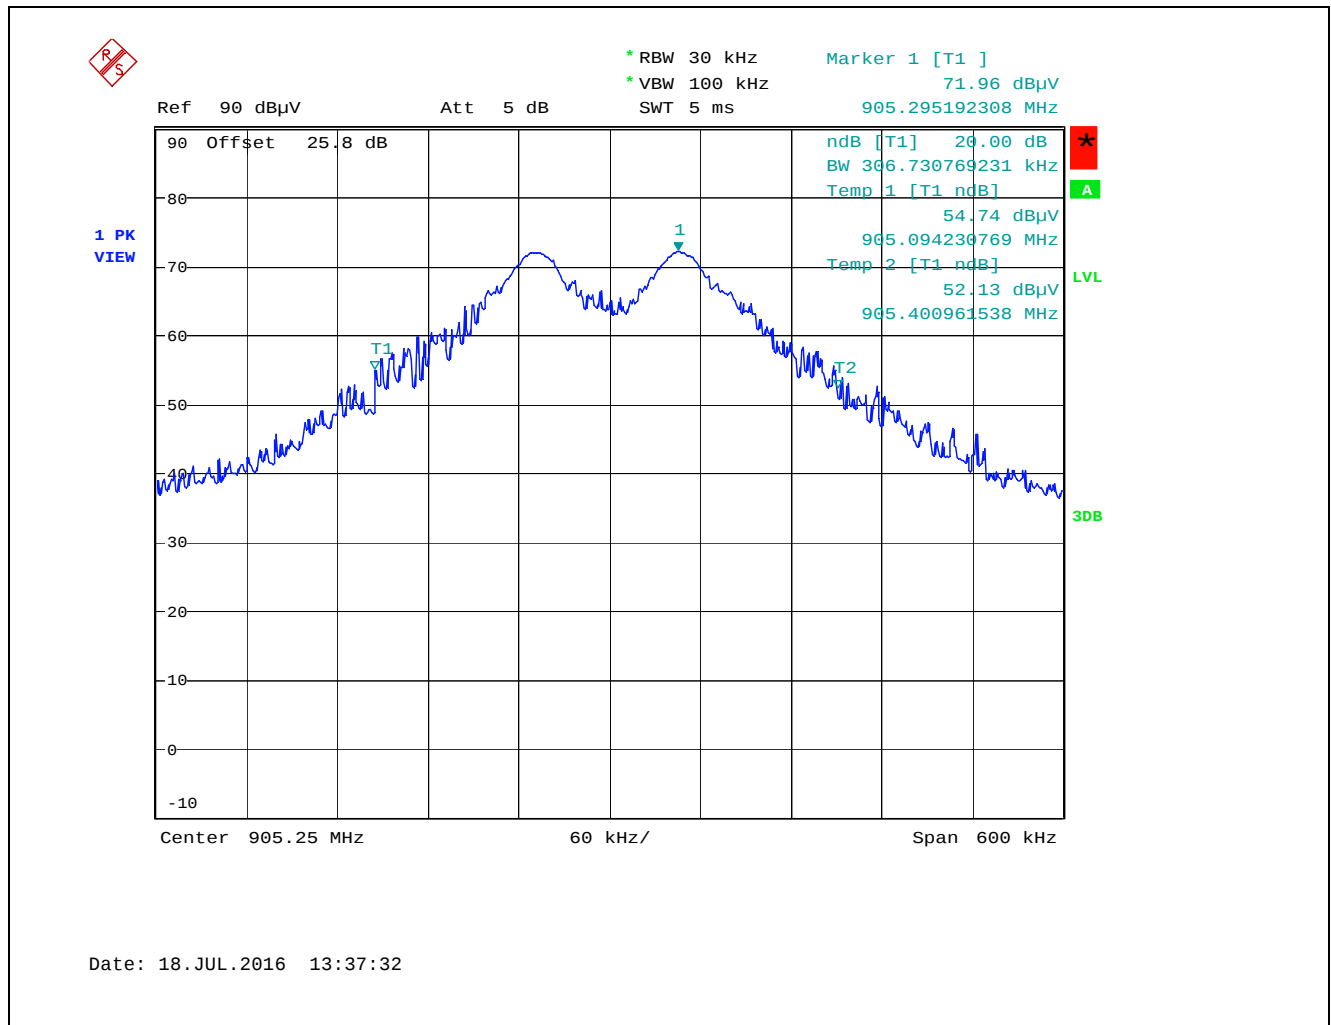

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.2.4.2. 20 dB Bandwidth, 915.25 MHz

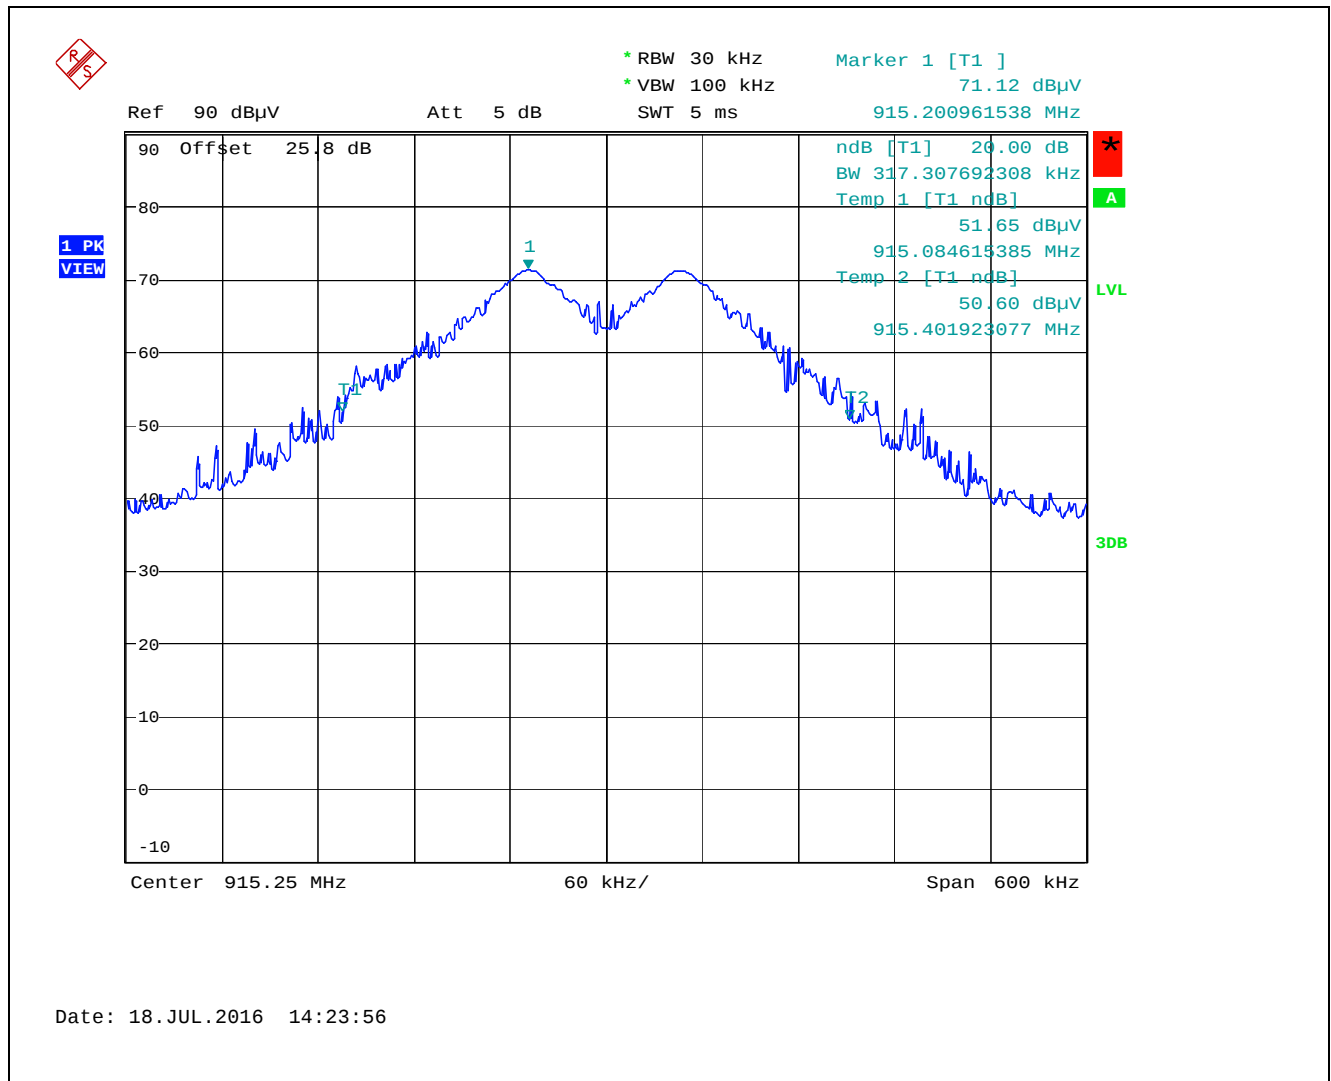

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

* RBW 30 kHz
 * VBW 100 kHz
 Ref 90 dBμV Att 5 dB SWT 5 ms

Marker 1 [T1]
 73.35 dBμV
 925.296153846 MHz

90 Offset 25.8 dB

1 PK VIEW

ndB [T1] 20.00 dB
 BW 320.192307692 kHz
 Temp 1 [T1 ndB] 53.18 dBμV
 925.087500000 MHz
 Temp 2 [T1 ndB] 53.24 dBμV
 925.407692308 MHz

LVL

3dB

Center 925.25 MHz 60 kHz/ Span 600 kHz

5.3. FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS (RADIATED at 3m) [47 CFR §§ 15.249(a), 15.209 & 15.205]

5.3.1. Limit(s)

(a) The Field Strength of emissions from intentional radiators operated within 902–928 MHz band shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902–928 MHz	50	500

(c) Field strength limits specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

- The fundamental frequency shall not fall within any restricted frequency band specified in 15.205. All other emissions that fall in the restricted bands shall not exceed the general radiated emission limits specified in 15.209(a).

47 CFR 15.205 – Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(2)
13.36–13.41.			

¹Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.


²Above 38.6

47 CFR 15.209(a) - Field Strength Limits within Restricted Frequency Bands		
Frequency (MHz)	Field Strength Limits ($\mu\text{V/m}$)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

5.3.2. Method of Measurements

ANSI C63.10 and ANSI C63.4 for measurement methods.

5.3.3. Test Arrangement

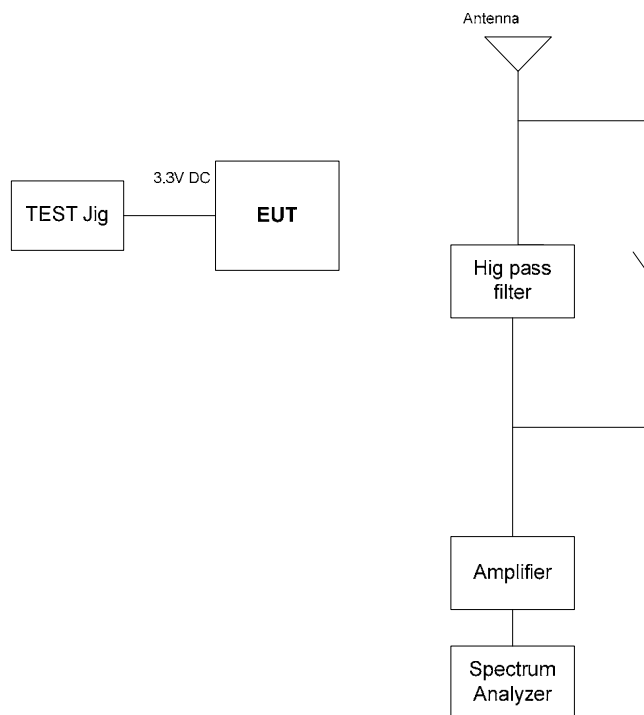

Test Data

Remark(s):

- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT shall be tested in three orthogonal positions @ 3m distance.
- The following test results are the worst-case measurements.

5.3.3.1. Spurious Radiated Emissions

Fundamental Frequency:		905.25 MHz					
Frequency Test Range:		30 MHz – 10 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit of Fundamental / Harmonics (dBµV/m)	Limit 15.209 (dBµV/m)	Margin (dB)	Pass/Fail
905.25	70.53	67.38	V	94.00	--	-23.47	PASS
905.25	72.49	69.64	H	94.00	--	-21.51	PASS
1810.50	45.76	41.48	V	54.00	54.00	-12.52	PASS
1810.50	47.06	43.35	H	54.00	54.00	-10.65	PASS
2715.75	47.04	39.12	V	54.00	54.00	-14.88	PASS
2715.75	45.29	34.25	H	54.00	54.00	-19.75	PASS
3621.00	53.61	49.48	V	54.00	54.00	-4.52	PASS
3621.00	54.06	50.04	H	54.00	54.00	-3.96	PASS
4526.25	51.11	44.37	V	54.00	54.00	-9.63	PASS
4526.25	51.61	44.19	H	54.00	54.00	-9.81	PASS
5431.50	48.32	39.34	V	54.00	54.00	-14.66	PASS
5431.50	52.67	48.58	H	54.00	54.00	-5.42	PASS
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

Fundamental Frequency:		915.25 MHz					
Frequency Test Range:		30 MHz – 10 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit of Fundamental / Harmonics (dBµV/m)	Limit 15.209 (dBµV/m)	Margin (dB)	Pass/Fail
915.25	72.10	69.07	V	94.00	--	-21.90	PASS
915.25	71.10	68.13	H	94.00	--	-22.90	PASS
1830.50	44.87	39.54	V	54.00	54.00	-14.46	PASS
1830.50	45.12	39.89	H	54.00	54.00	-14.11	PASS
2745.75	47.15	41.09	V	54.00	54.00	-12.91	PASS
2745.75	45.58	36.82	H	54.00	54.00	-17.18	PASS
3661.00	52.84	46.78	V	54.00	54.00	-7.22	PASS
3661.00	51.77	45.49	H	54.00	54.00	-8.51	PASS
4576.25	53.56	46.86	V	54.00	54.00	-7.14	PASS
4576.25	51.45	45.79	H	54.00	54.00	-8.21	PASS
5491.50	51.95	43.71	V	54.00	54.00	-10.29	PASS
5491.50	54.54	49.38	H	54.00	54.00	-4.62	PASS
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency:		925.25 MHz					
Frequency Test Range:		30 MHz – 10 GHz					
Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit of Fundamental / Harmonics (dBµV/m)	Limit 15.209 (dBµV/m)	Margin (dB)	Pass/Fail
925.25	74.05	70.94	V	94.00	--	-19.95	PASS
925.25	73.12	69.90	H	94.00	--	-20.88	PASS
1850.50	46.05	42.08	V	54.00	54.00	-11.92	PASS
1850.50	45.95	41.28	H	54.00	54.00	-12.72	PASS
2775.75	47.63	40.49	V	54.00	54.00	-13.51	PASS
2775.75	46.42	37.74	H	54.00	54.00	-16.26	PASS
3701.00	51.02	44.90	V	54.00	54.00	-9.10	PASS
3701.00	51.51	45.58	H	54.00	54.00	-8.42	PASS
4626.25	51.79	44.52	V	54.00	54.00	-9.48	PASS
4626.25	51.60	43.56	H	54.00	54.00	-10.44	PASS
5551.50	50.14	41.32	V	54.00	54.00	-12.68	PASS
5551.50	55.17	50.38	H	54.00	54.00	-3.62	PASS
All other spurious emissions and harmonics are more than 20 dB below the applicable limit.							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20 Hz – 26.5 GHz	14-Aug-17
Attenuator	Pasternack	PE7024-20		DC-18GHz	Cal on use
Horn antenna	EMCO	3117	119425	1-18GHz	17-Jun-17
Preamplifier	Com-power	PA-118A	551016	500MHz-18GHz	14-Dec-16
Preamplifier	SpacekLabs	SLKKa-30-6	161243	18GHz-26.5GHz	4-Aug-17
High Pass Filter	K & L	11SH10-1500/T8000-0/0	2	Cut off 1500 MHz	Cal on use
Antenna	ETS	93148	1101	200-2000 MHz	14-Jul-17
LISN	EMCO	3825/2	8907-1531	10 kHz-100 MHz	29-Sep-2016
Spectrum Analyzer	HP	8593EM	3412A00103	9 kHz-26.5 GHz	9- Apr-2017
Power Supply	Tenma	72-7295	490300271	0-40V dc	Cal on Use

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 16EMSI042_FCC15249

October 20, 2016

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured (dB)	Limit (dB)
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.79	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured (dB)	Limit (dB)
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured (dB)	Limit (dB)
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration