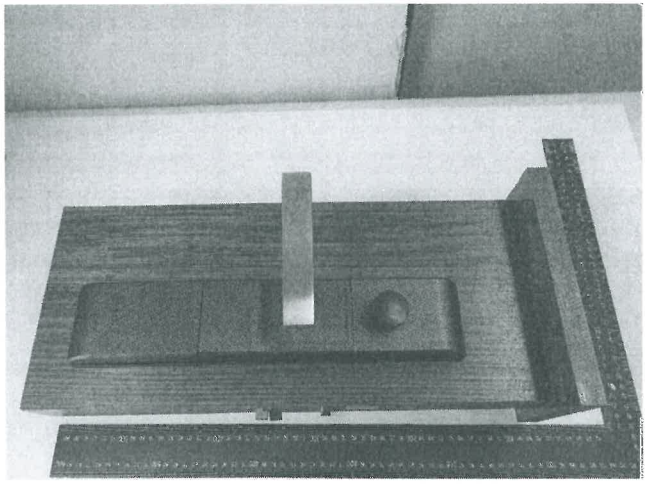


Prüfbericht-Nr.: Test Report No.:	10054947 001	Auftrags-Nr.: Order No.:	114045559	Seite 1 von 20 Page 1 of 20
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	7-Jan-2016	
Auftraggeber: Client:	瑋俐實業股份有限公司 / 新北市新店區民權路 42 巷 59 弄 2 號 1 樓 Weider Metal Inc. / No. 2, Alley 59, Lane 42, MinChiuan Road, TW-231 ShinDian District, New Taipei City Taiwan, R.O.C.			
Prüfgegenstand: Test item:	數位電子氣密防火門禁馬達鎖 (with RFID function) WEIDER WDEL-9800 Digital sound insulation fire door motor lock			
Bezeichnung / Typ-Nr.: Identification / Type No.:	WDEL-9800			
Auftrags-Inhalt: Order content:	NCC LP0002 / FCC Part 15C Test report			
Prüfgrundlage: Test specification:	NCC Low-power Radio-frequency Devices Technical Regulations LP0002(2011) FCC 47CFR Part 15: Subpart C Section 15.225			
Wareneingangsdatum: Date of receipt:	26-Jan-2016			
Prüfmuster-Nr.: Test sample No.:	A000307087-001			
Prüfzeitraum: Testing period:	28-Jan-2016 - 4-Feb-2016			
Ort der Prüfung: Place of testing:	EMC/RF Laboratory Taipei			
Prüflaboratorium: Testing laboratory:	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: Test result*:	Pass			
Report date / tested by:		kontrolliert von / reviewed by:		
2016-03-15 Arvin Ho/Department Manager Datum Name / Stellung Unterschrift Date Name / Position Signature		2016-03-15 Rene Charton/Senior Project Manager Datum Name / Stellung Unterschrift Date Name / Position Signature		
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V04

Prüfbericht - Nr.: 10054947 001
Test Report No.

Seite 2 von 20
Page 2 of 20

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Passed

5.1.3 FREQUENCY STABILITY

RESULT: Passed

5.1.4 SPURIOUS EMISSION

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Field strength of fundamental.....</i>	<i>14</i>
5.1.3	<i>Frequency Stability.....</i>	<i>15</i>
5.1.4	<i>Spurious Emission</i>	<i>16</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP.....	17
7.	LIST OF TABLES	20
8.	LIST OF PHOTOGRAPHS.....	20

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix P: Photo Documentation

(File Name: 10054947APPENDIX P)

Appendix D: Test Result of Radiated Emissions

(File Name: 10054947APPENDIX D)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.225 ANSI C63.10:2013 LP0002(2011)(100 年 6 月 28 日)

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibration	Next Calibration
EMI Test Receiver	R&S	ESR7	101062	10-Sep-15	19-Sep-16
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-14	3-Jul-16
Spectrum Analyzer	R&S	FSV 40	100921	21-Dec-15	21-Dec-16
Spectrum Analyzer	Agilent	N9010A	MY53470241	1-Apr-15	30-Mar-16
Horn Antenna	ETS-Lindgren	3117	138160	12-Jan-15	11-Jan-17
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	22-Oct-15	21-Oct-17
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	31-Aug-15	31-Aug-16
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	26-Aug-14	26-Aug-16
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	4-Nov-15	3-Nov-16
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	21-Oct-14	20-Oct-16
EMI Test Receiver	R&S	ESCI7	100797	28-Dec-15	27-Dec-16
Spectrum Analyzer	R&S	FSL3	101943	7-Sep-15	7-Sep-16
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	13-Jul-15	12-Jul-16
LISN (1 phase)	R&S	ENV216	101243	1-Jun-15	31-May-16
LISN	R&S	ENV216	101262	16-Jun-15	15-Jun-16
Power sensor	Agilent	U2021XA	MY53480013	11-Mar-15	9-Mar-16
Signal Generator	R&S	SMU200	104260	6-Sep-15	5-Sep-16

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1.5 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \text{ \%}$

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Digital sound insulation fire door lock, working at 13.56 MHz with RFID function.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	數位電子氣密防火門禁馬達鎖(with RFID function) WEIDER WDEL-9800 Digital sound insulation fire door motor lock
Type Designation	WDEL-9800
Brand Name	WEIDER METAL INC
FCC ID	2AHAE-WDEL-9800

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	13.56 MHz
Operation Voltage	6V
Extreme Voltage Range	4.4V~24V
Modulation	AM
Antenna Type	Integrated Antenna

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a special firmware which provides the test modes.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


N/A

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

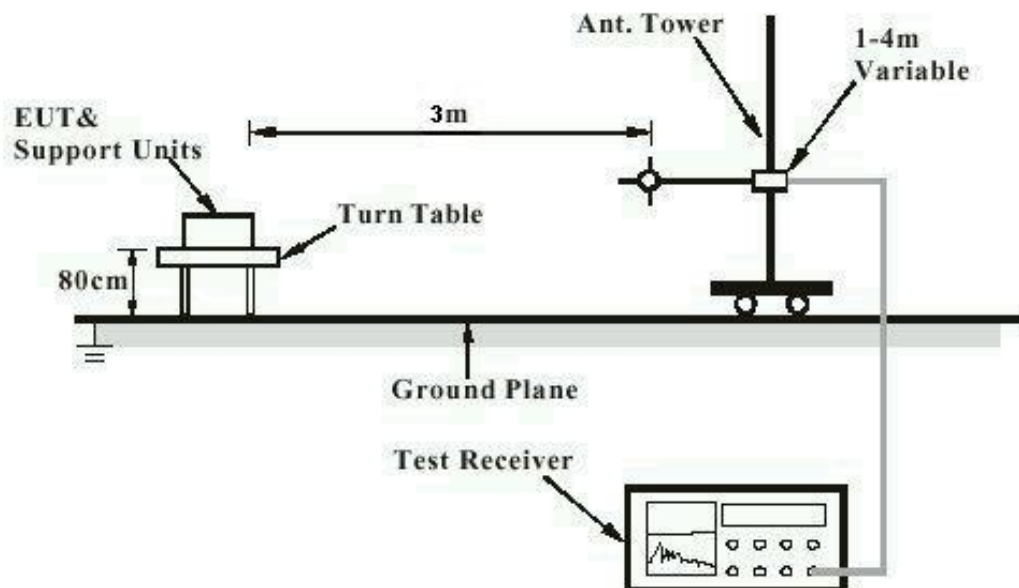

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Standard	:	LP0002(2011): 2.2 Part 15.203 and RSS-Gen 7.1.4
Requirement	:	use of approved antennas only

The antenna is Integrated Antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Field strength of fundamental

RESULT:

Passed

Test standard : LP0002(2011) 3.2
 FCC Part 15.225
 RSS-210 A2.6

Basic standard : ANSI C63.10:2009

Test setup

Test Frequency : 13.56 MHz
 Operation Mode : A

The Emission Mask for NCC LP0002 is more strict than the emission mask for FCC Part 15.225 and RSS-210 A2.6. The device can fulfil the NCC LP0002 requirements, therefore only the emission mask for NCC LP0002 is shown in the table below.

Table 6: Test result of Field strength of fundamental and modulation sidebands

Frequency (MHz)	Test Result	Detector	Limits		Pass/Fail
	$\text{dB}\mu\text{V/m}$ @1.2m		$\text{dB}\mu\text{V/m}$ @1.2m	$\text{dB}\mu\text{V/m}$ @30m	
< 13.553	< 35	peak	85.44	29.54	Pass
13.560	72.50	QP	135.9	80	Pass
> 13.567	< 35	peak	85.44	29.54	Pass

Show booth FCC and NCC plot in appendix

For details refer to Appendix D.

5.1.3 Frequency Stability

RESULT:
Passed

Test standard : LP0002(2011) 3.2.1(3)
 FCC Part 15. 225(e)
 RSS-210 A2.6

Basic standard : ANSI C63.10:2009
 Kind of test site : Shielded room

Test setup

Test Frequency : 13.56 MHz
 Operation Mode : A

Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa

Table 7: Test result of Frequency Stability

Fundamental frequency (MHz)	Temperature (°C)	Voltage	Measurement frequency (MHz)	Frequency Error (ppm)	Limit ±0.01%
13.56	-20	Normal	13.560266	19.62	±100ppm
	-10	Normal	13.560264	19.47	
	0	Normal	13.560266	19.62	
	10	Normal	13.560266	19.62	
	20	85%	13.560270	19.91	
	20	Normal	13.560270	19.91	
	20	115%	13.560270	19.91	
	30	Normal	13.560266	19.62	
	40	Normal	13.560266	19.62	
	50	Normal	13.560266	19.62	

5.1.4 Spurious Emission

RESULT:**Passed**

Test standard	:	LP0002(2011) 3.2.1(2) FCC part 15.209 FCC part 15.225 RSS-210 A2.6
Basic standard	:	ANSI C63.10: 2009
Limits	:	The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209. RSS-210: 30 microvolts/m (29.5 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup


Operation mode	:	A
----------------	---	---

Remark: Testing was carried out within frequency range 9kHz 30MHz to the tenth harmonic.


For details refer to Appendix D.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Radiated Emissions (Front View)

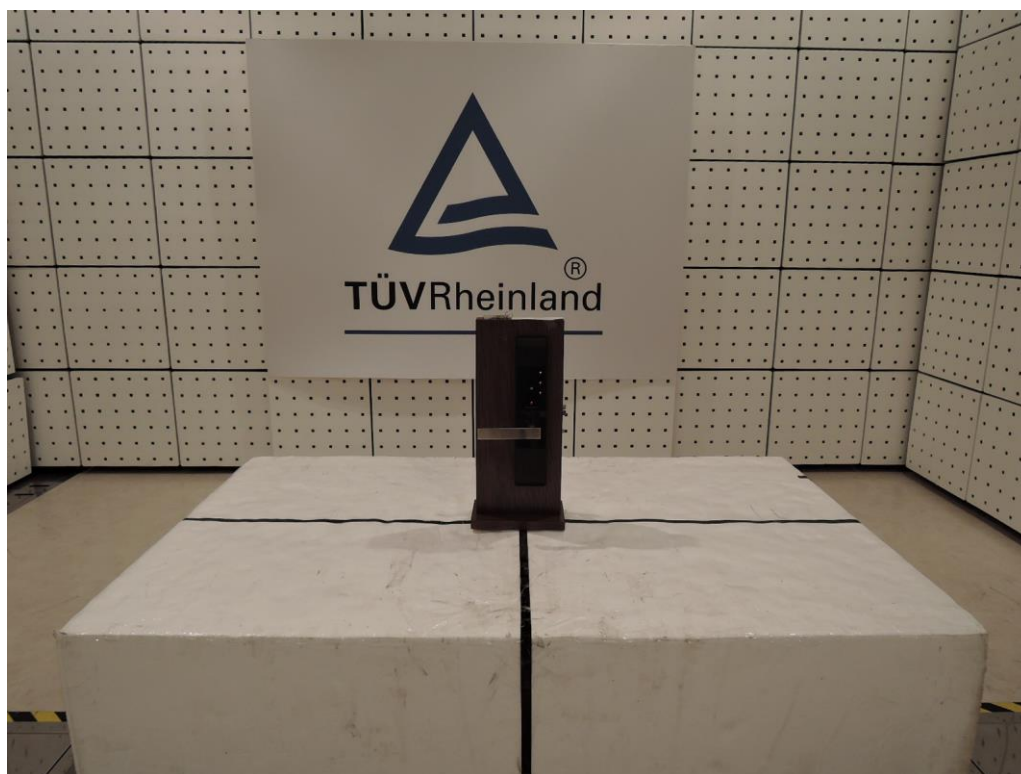


Photograph 2: Set-up for Fundamental Emissions (Back View)

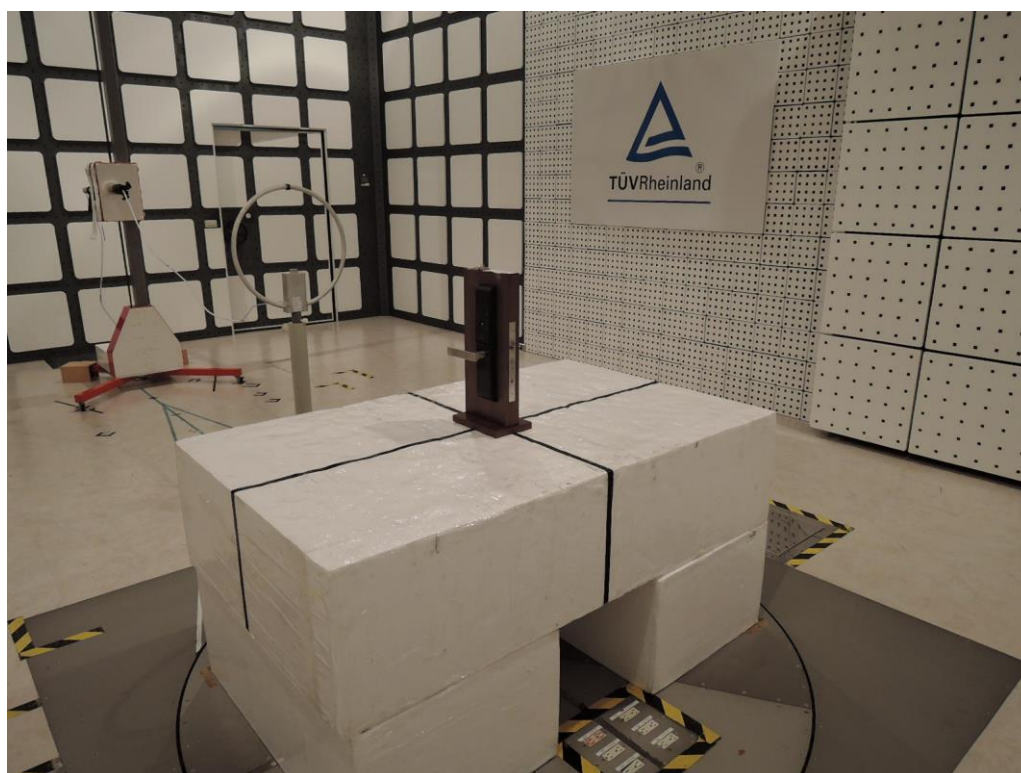


Photograph 3: Set-up for Spurious Emissions (Back View 1)

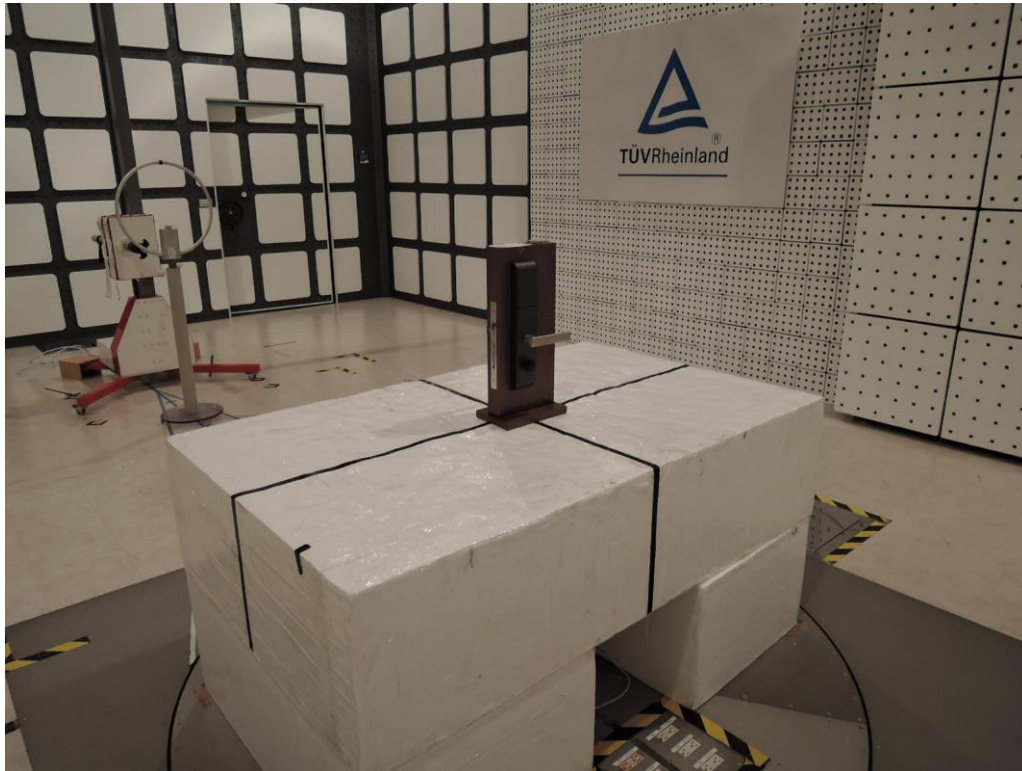

Photograph 4: Set-up for Spurious Emissions (Back View 2)

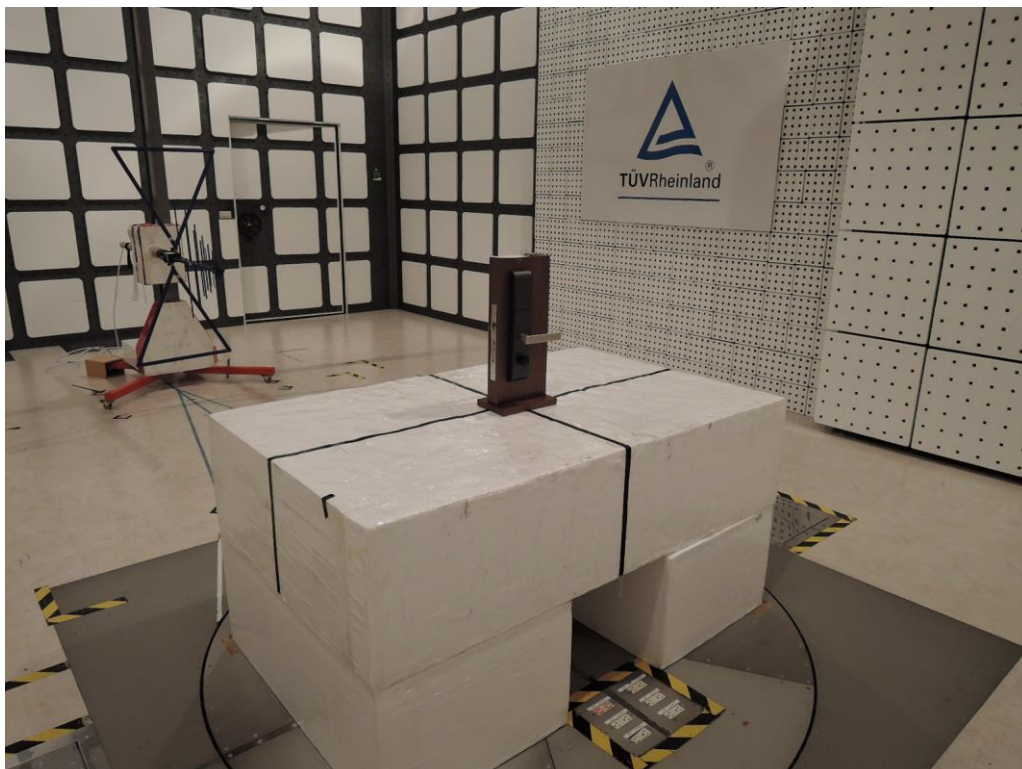

Photograph 5: Set-up for Conducted testing

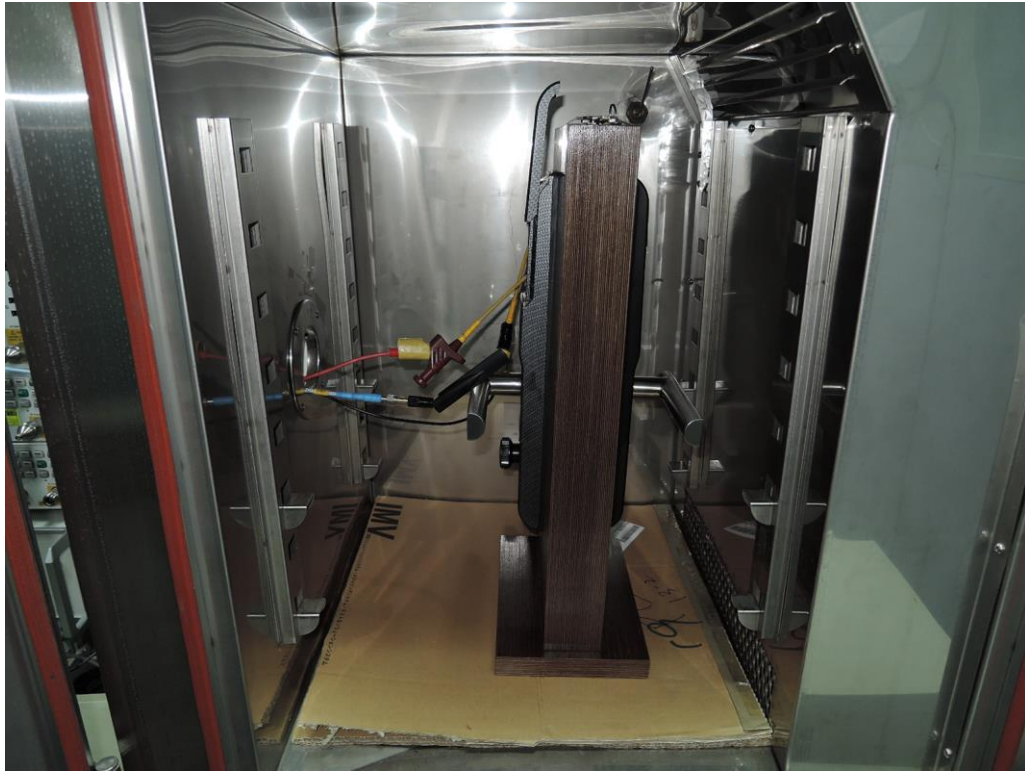

7. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Field strength of fundamental and modulation sidebands.....	14
Table 7: Test result of Frequency Stability	15

8. List of Photographs

Photograph 1: Set-up for Radiated Emissions (Front View)	17
Photograph 2: Set-up for Fundamental Emissions (Back View)	17
Photograph 3: Set-up for Spurious Emissions (Back View 1)	18
Photograph 4: Set-up for Spurious Emissions (Back View 2)	18
Photograph 5: Set-up for Conducted testing	19