
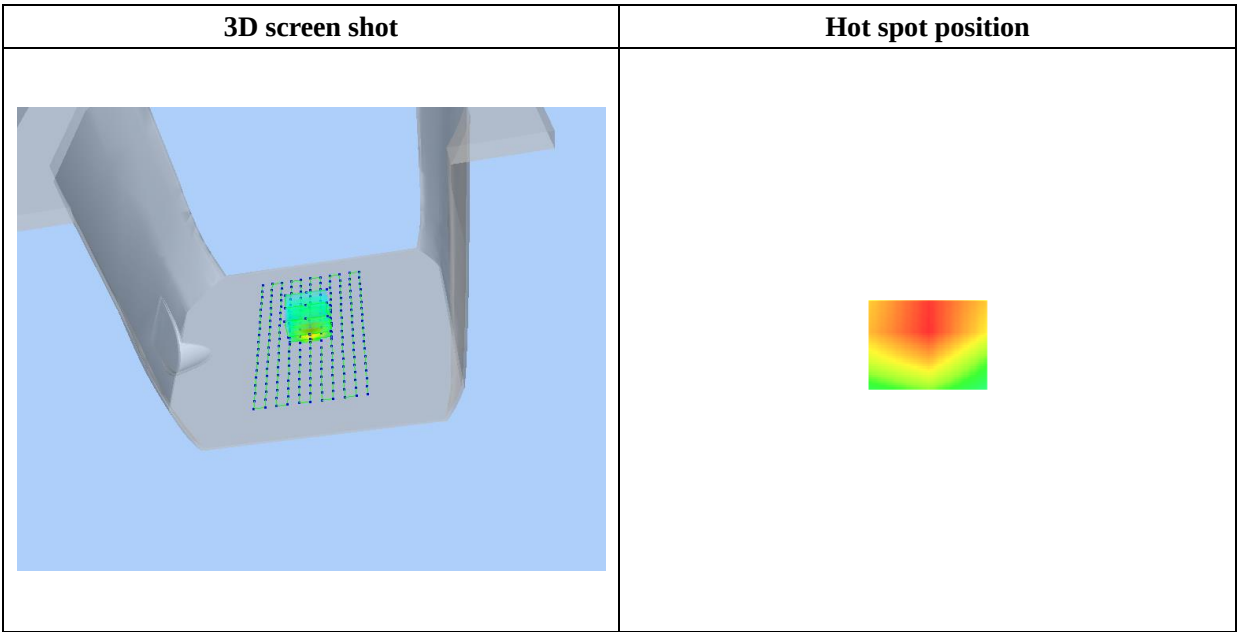


SAR Peak: 1.03 W/kg

SAR 10g (W/Kg)	0.278841
SAR 1g (W/Kg)	0.580308

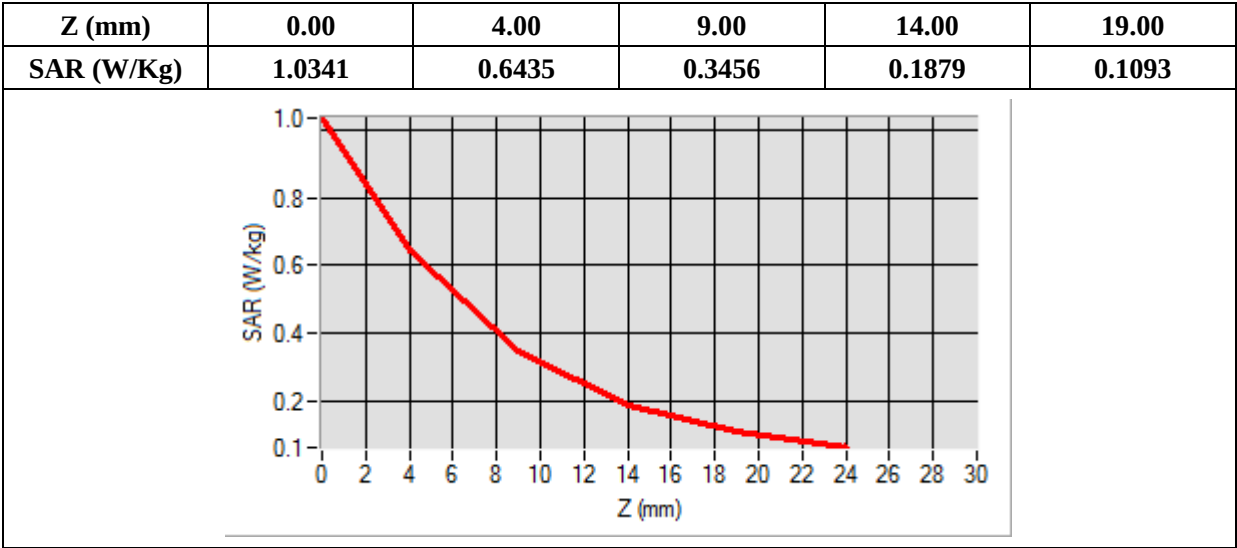

MEASUREMENT 30


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.84; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.883514
Conductivity (S/m)	1.338387
Power Variation (%)	-1.050000
Ambient Temperature	21.8
Liquid Temperature	21.8

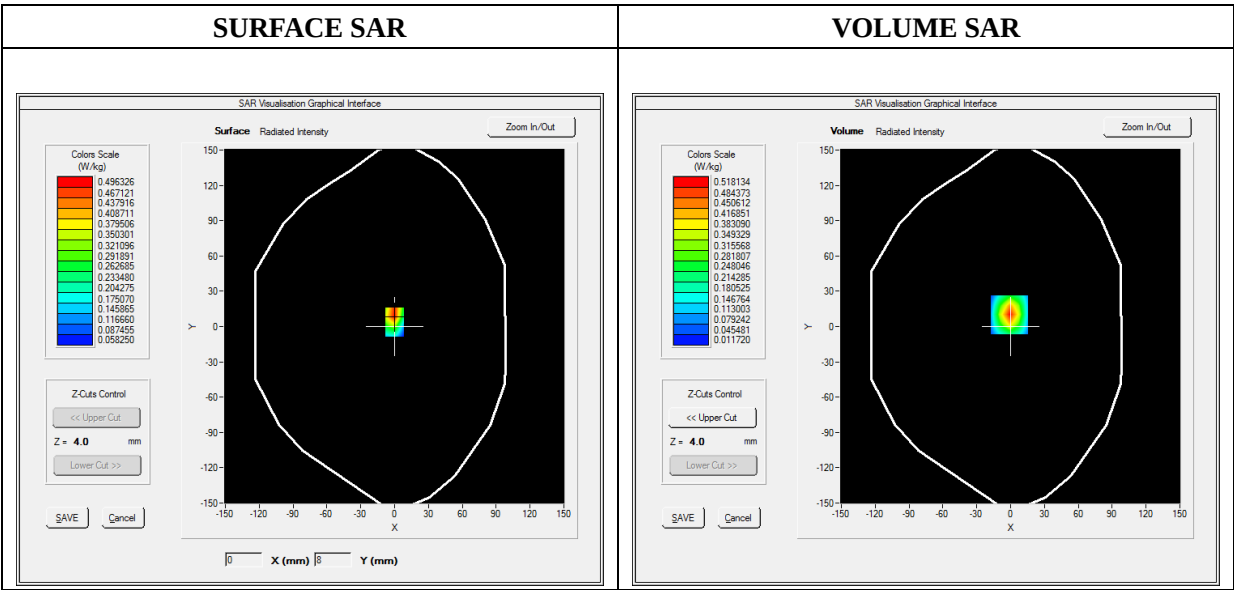

Maximum location: X=-1.00, Y=10.00

SAR Peak: 0.82 W/kg

SAR 10g (W/Kg)	0.228119
SAR 1g (W/Kg)	0.468816

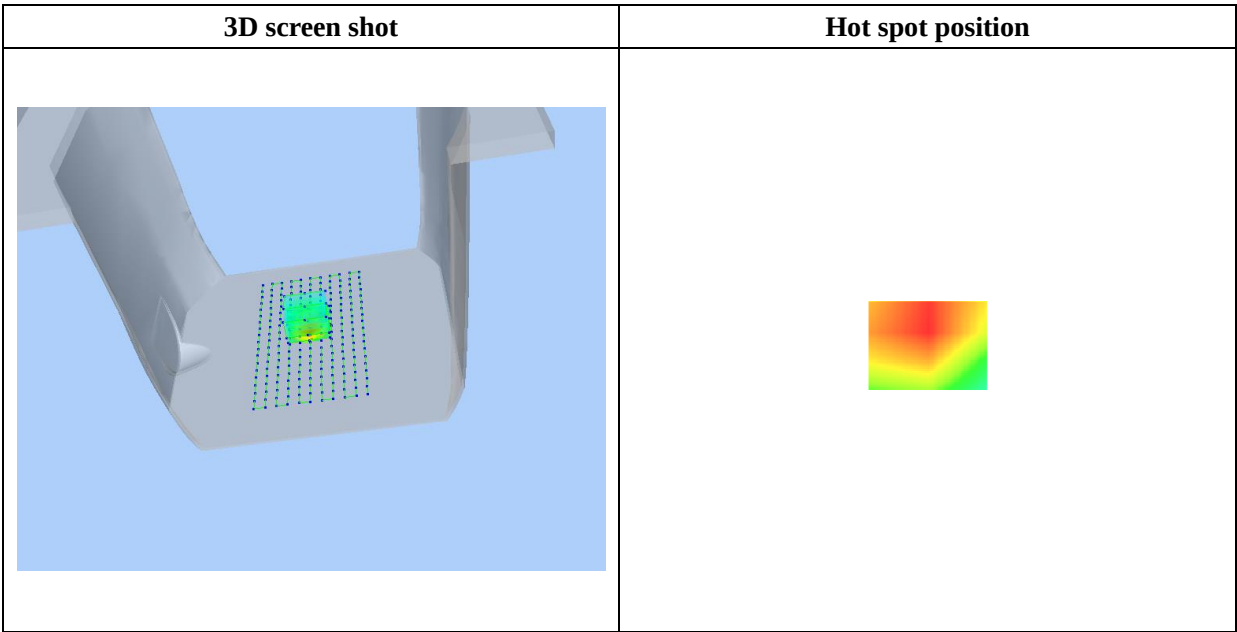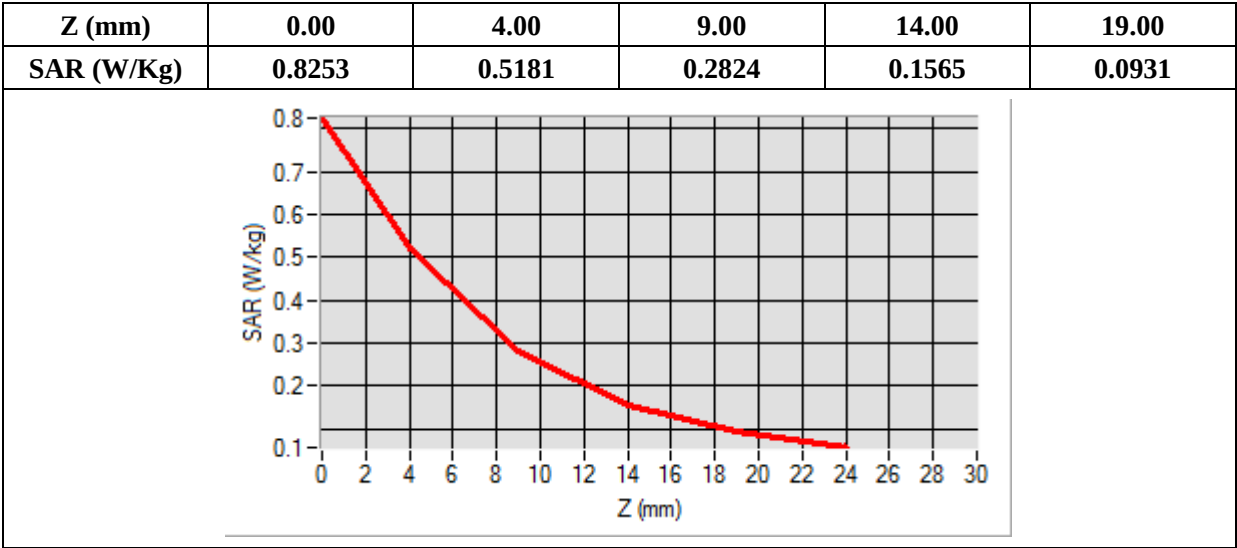

MEASUREMENT 36


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.93; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative Permittivity (real part)	42.430271
Conductivity (S/m)	0.8768312
Power Variation (%)	-0.660000
Ambient Temperature	21.5
Liquid Temperature	21.5

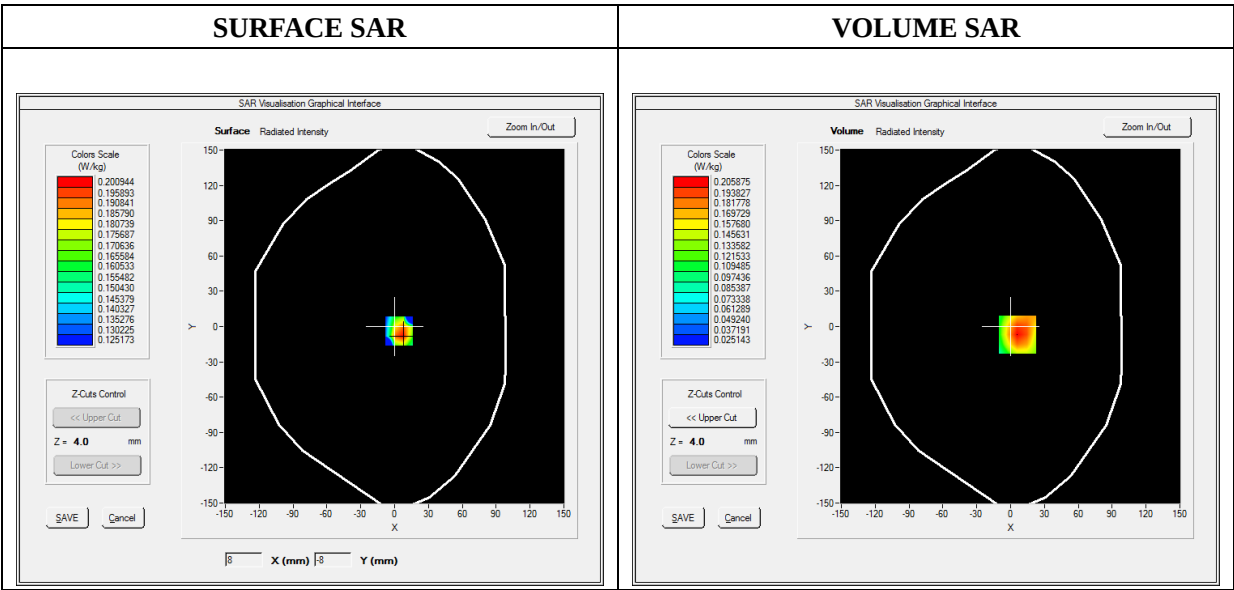

Maximum location: X=6.00, Y=-7.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.131899
SAR 1g (W/Kg)	0.196371

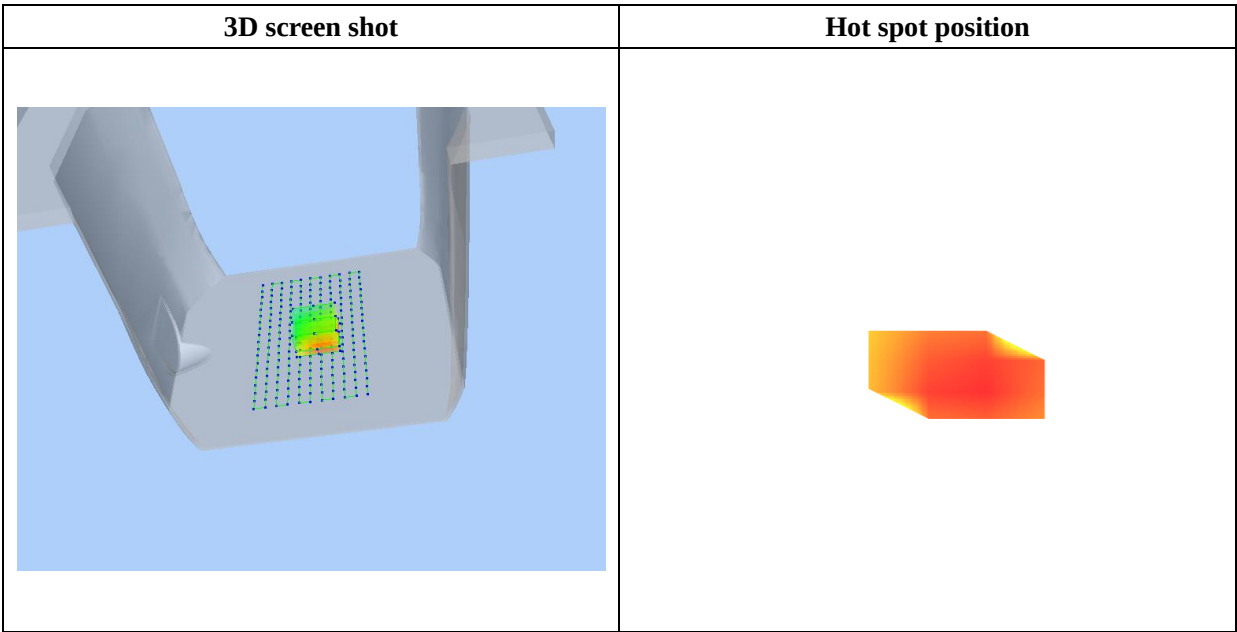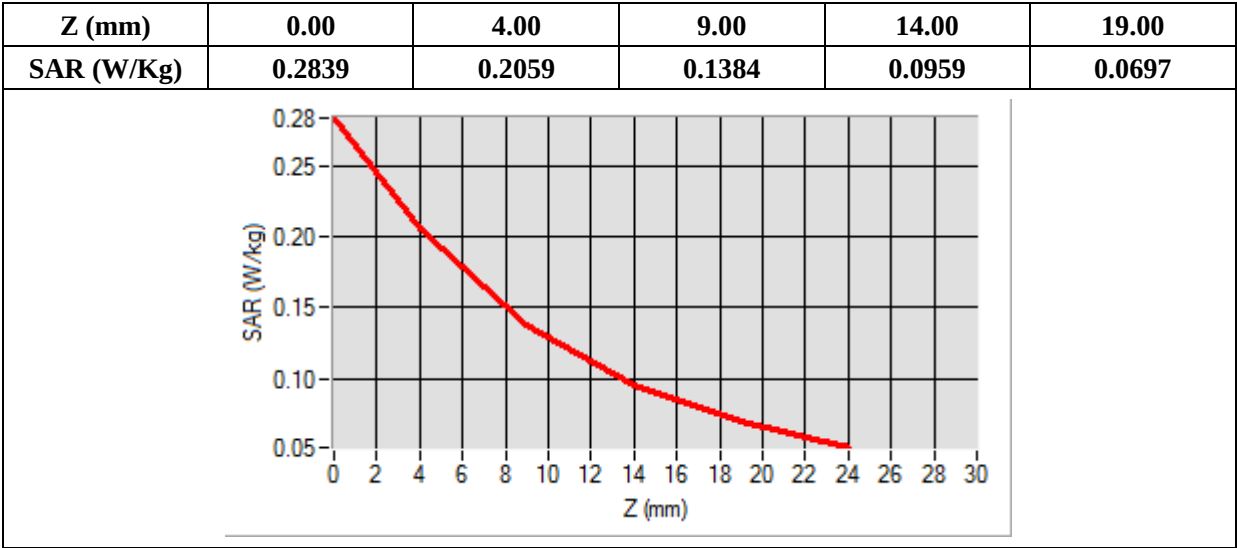

MEASUREMENT 42

Type: Phone measurement (Complete)

Date of measurement: 2020-12-23

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative Permittivity (real part)	38.964820
Conductivity (S/m)	1.932062
Power Variation (%)	-0.690000
Ambient Temperature	21.4
Liquid Temperature	21.4

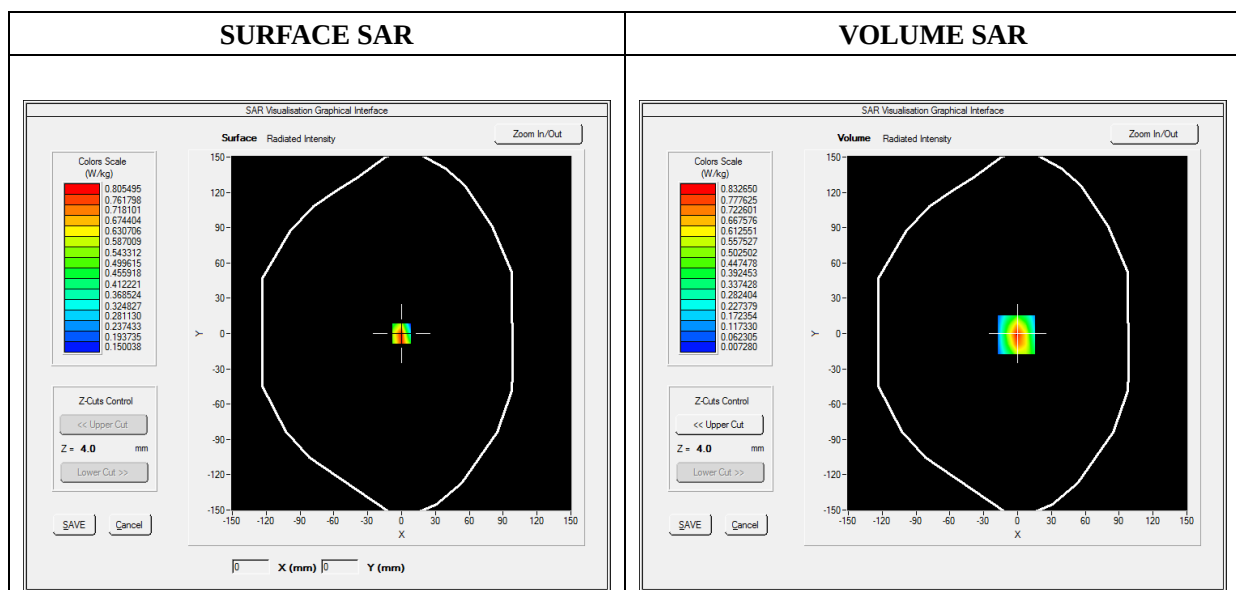

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 1.46 W/kg

SAR 10g (W/Kg)	0.352554
SAR 1g (W/Kg)	0.766202

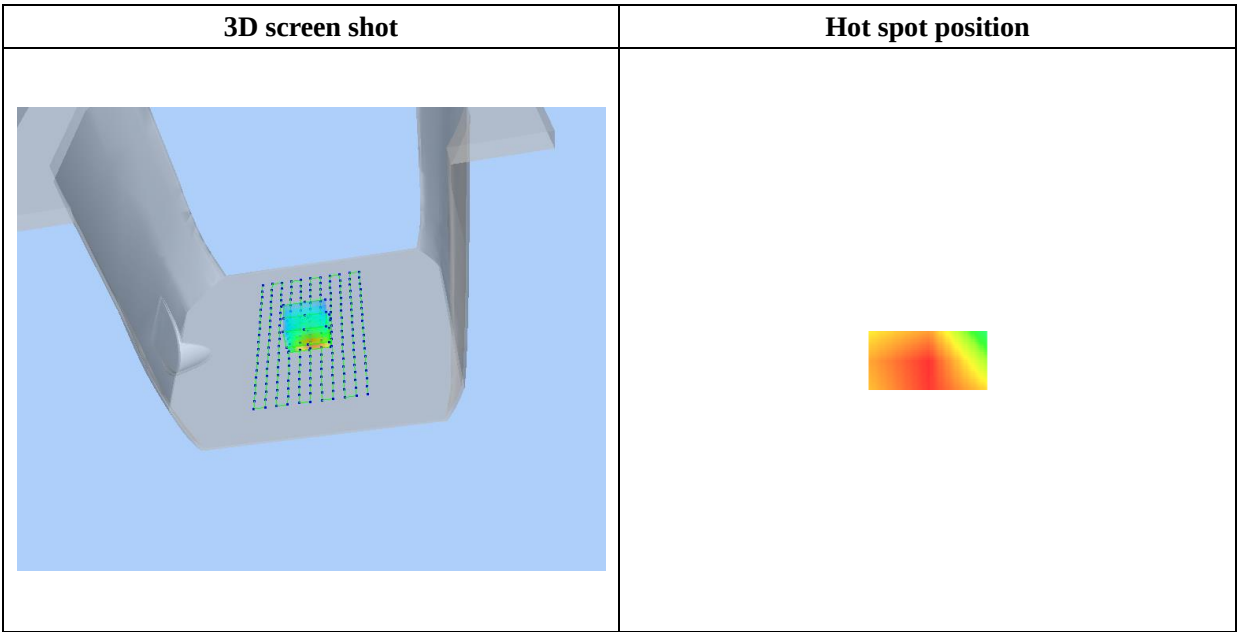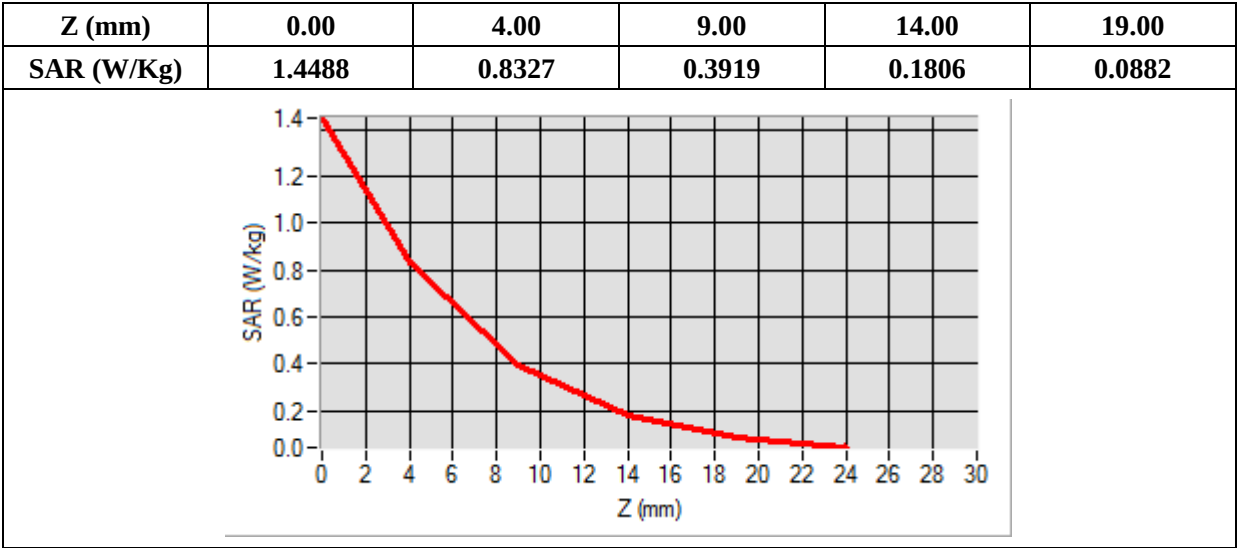

MEASUREMENT 48


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.99; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	704.000000
Relative Permittivity (real part)	42.935843
Conductivity (S/m)	0.839026
Power Variation (%)	-2.100000
Ambient Temperature	21.5
Liquid Temperature	21.5

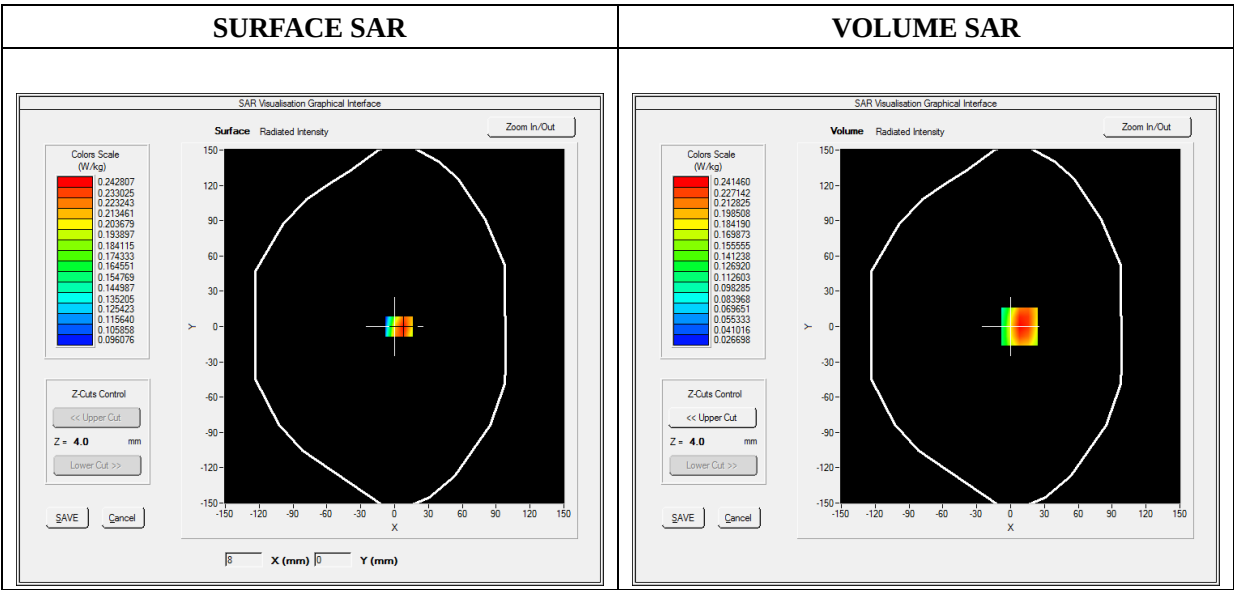

Maximum location: X=8.00, Y=0.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.166137
SAR 1g (W/Kg)	0.238981

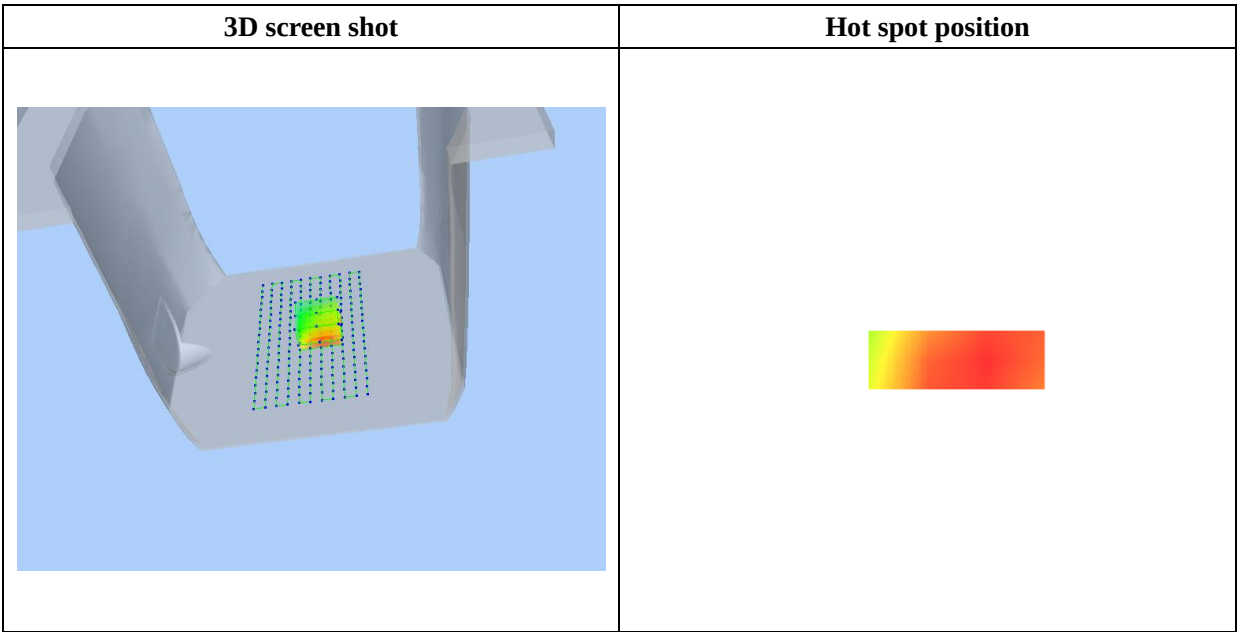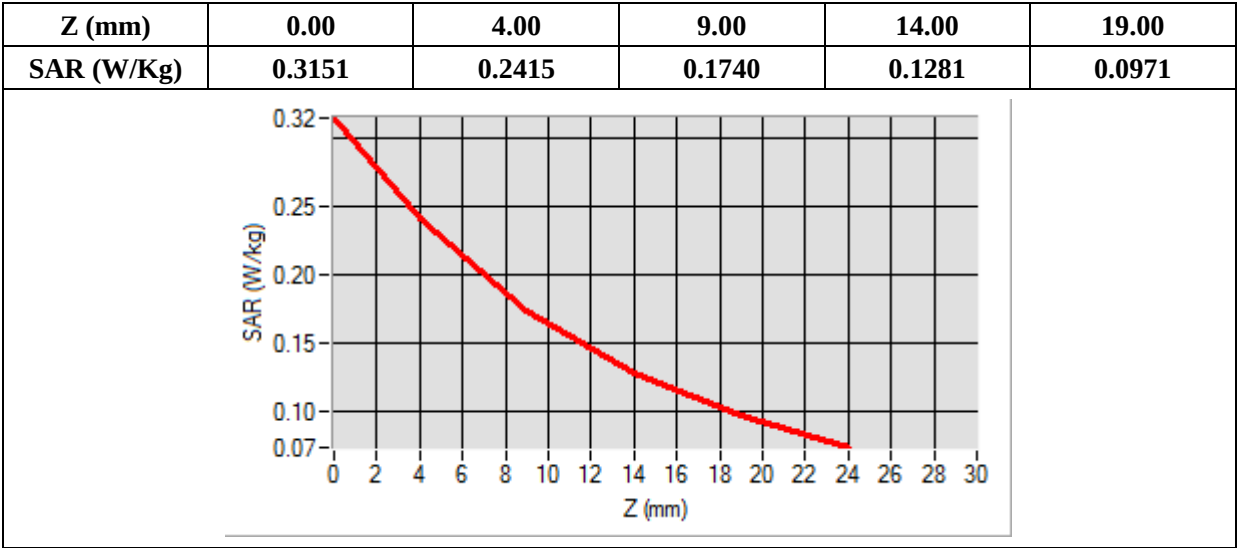

MEASUREMENT 54


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.99; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 17
Channels	QPSK, 10MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	709.000000
Relative Permittivity (real part)	42.935843
Conductivity (S/m)	0.839026
Power Variation (%)	-0.730000
Ambient Temperature	21.5
Liquid Temperature	21.5

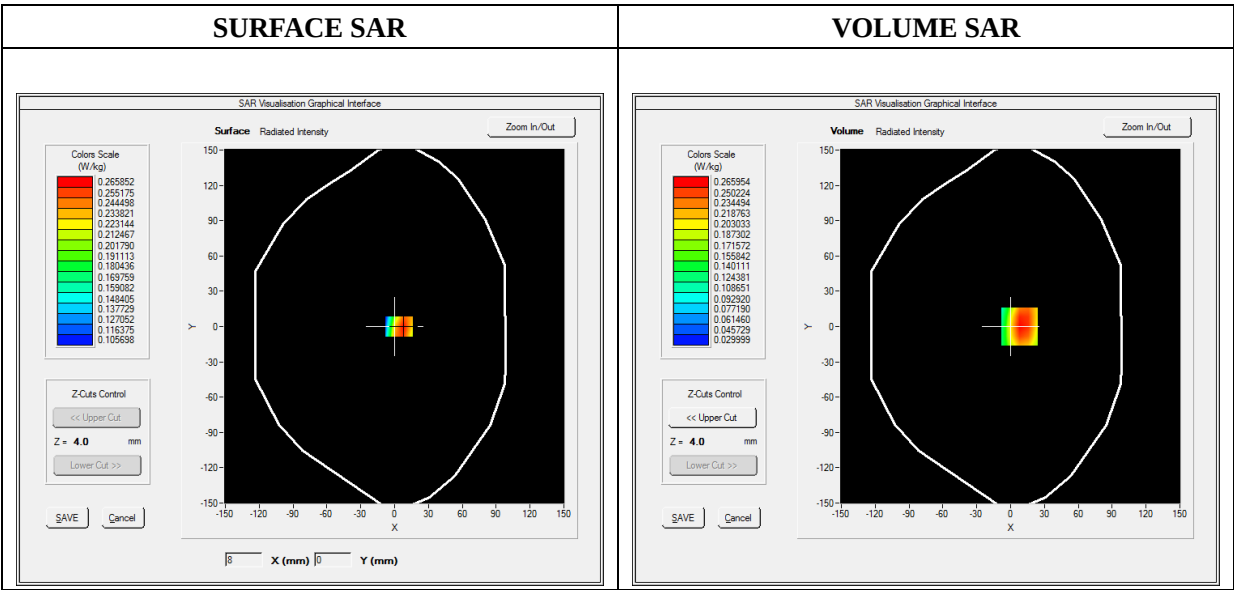

Maximum location: X=8.00, Y=0.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.189451
SAR 1g (W/Kg)	0.271874

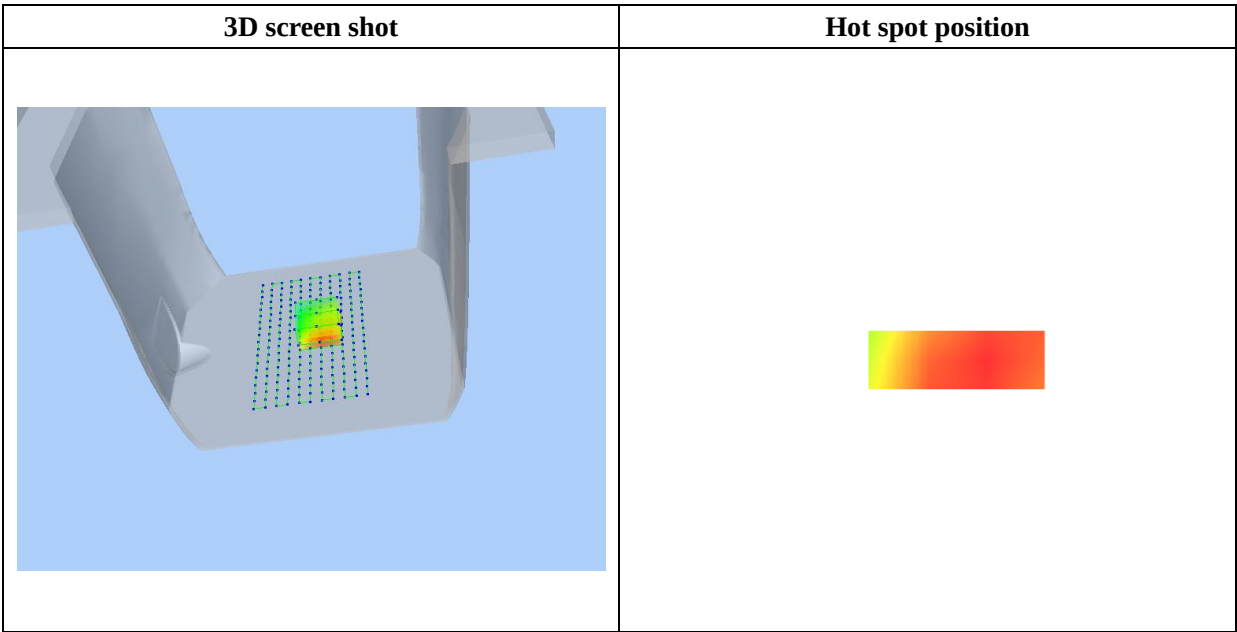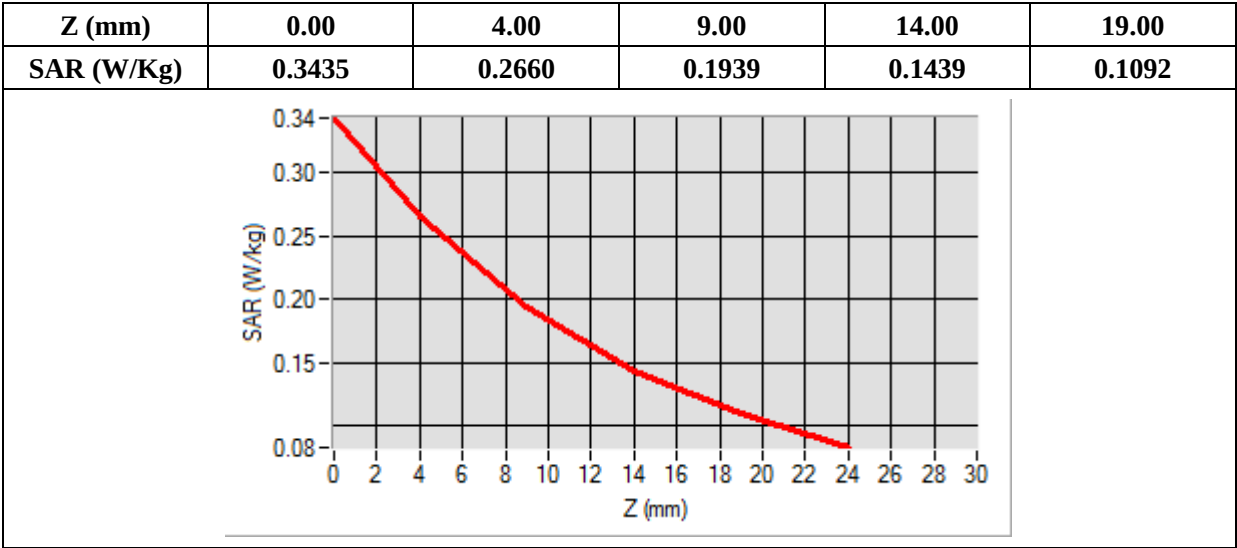

MEASUREMENT 60


Type: Phone measurement (Complete)
Date of measurement: 2020-12-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	39.905111
Conductivity (S/m)	1.790286
Power Variation (%)	-0.540000
Ambient Temperature	21.4
Liquid Temperature	21.4

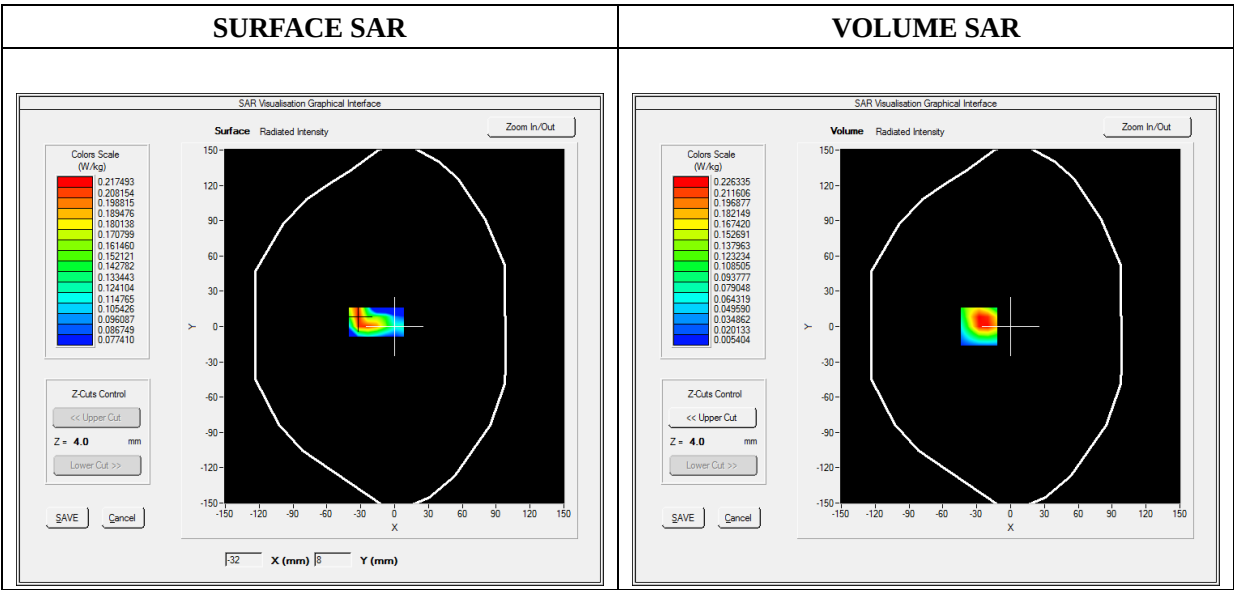

Maximum location: X=-28.00, Y=0.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.109252
SAR 1g (W/Kg)	0.226676

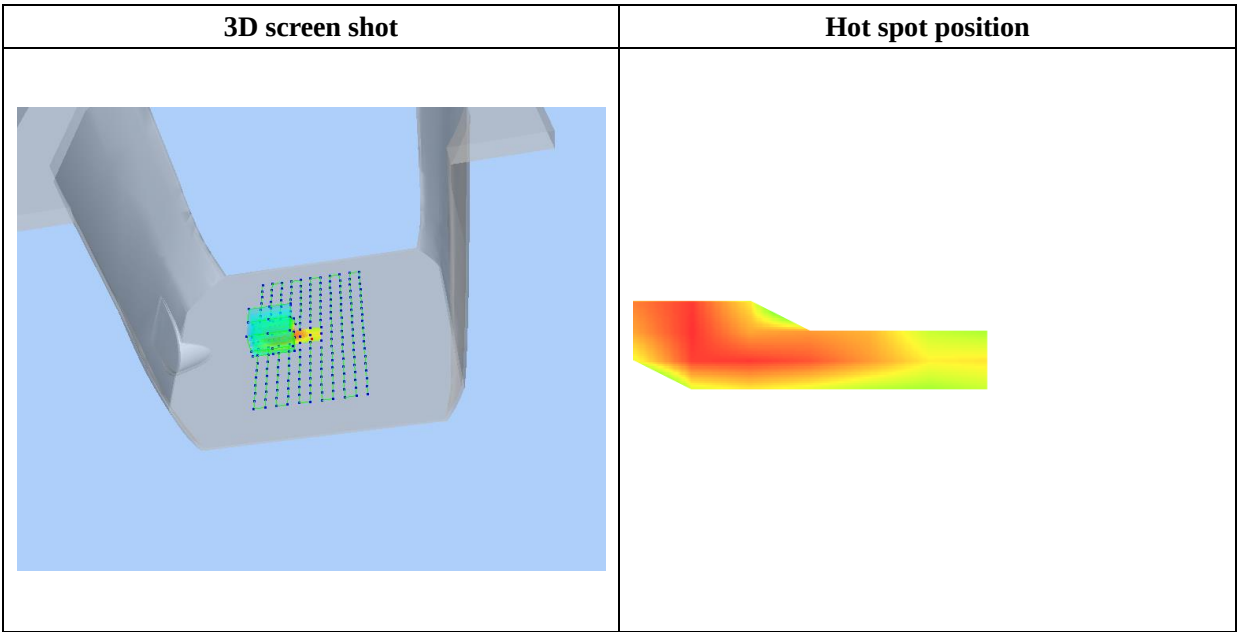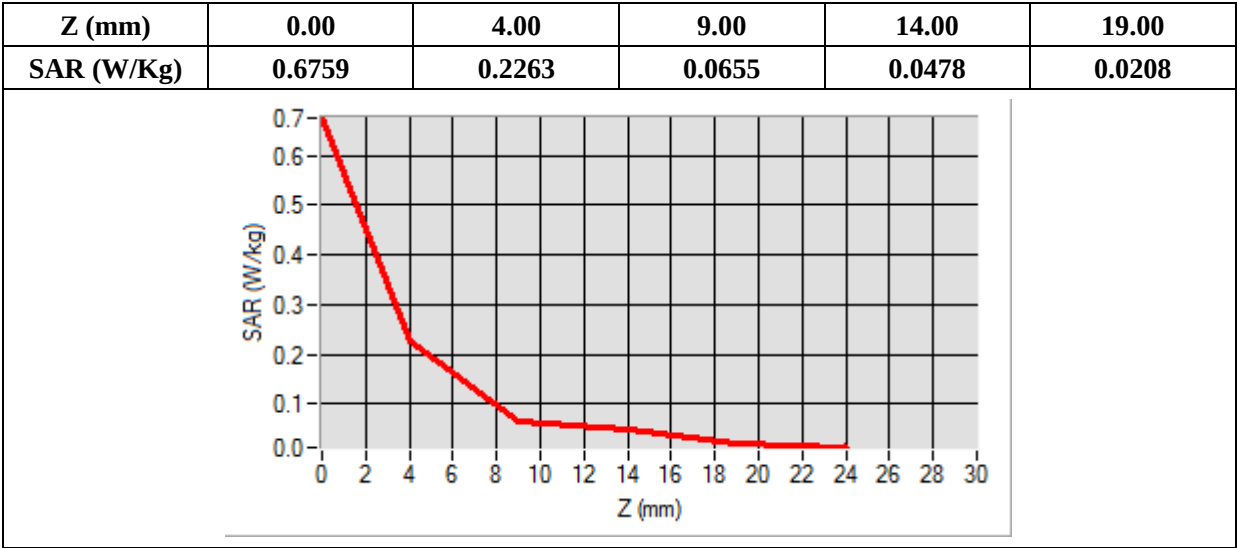

MEASUREMENT 63


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.93; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_4TX
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	824.200000
Relative Permittivity (real part)	42.460277
Conductivity (S/m)	0.878883
Power Variation (%)	0.860000
Ambient Temperature	21.5
Liquid Temperature	21.5

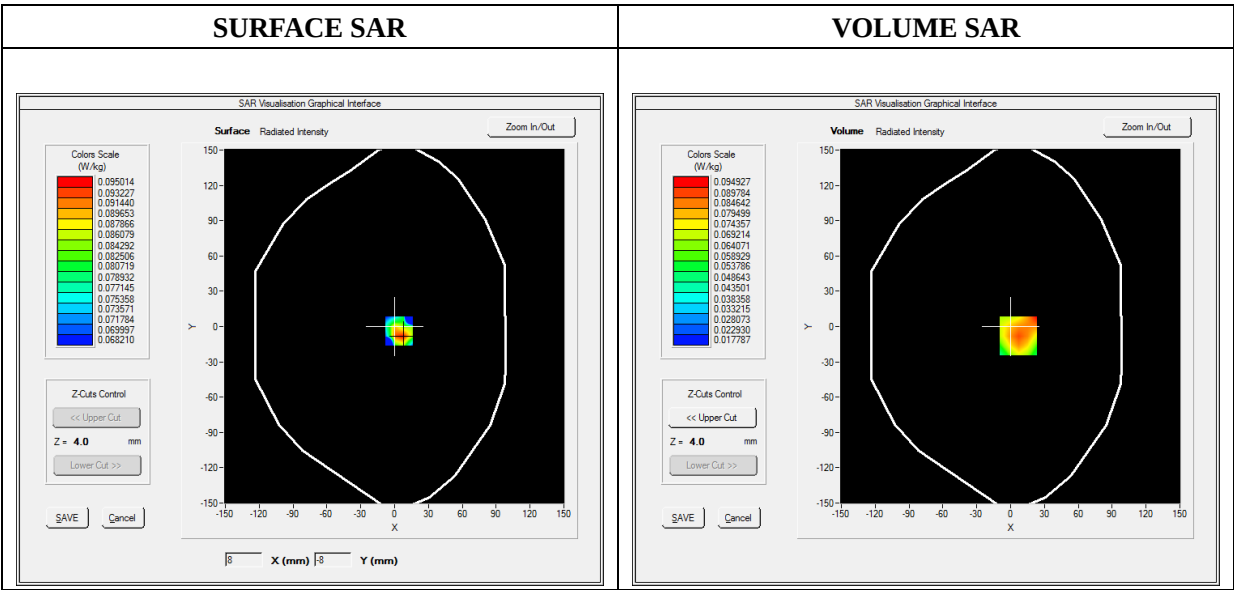

Maximum location: X=7.00, Y=-8.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.063532
SAR 1g (W/Kg)	0.084797

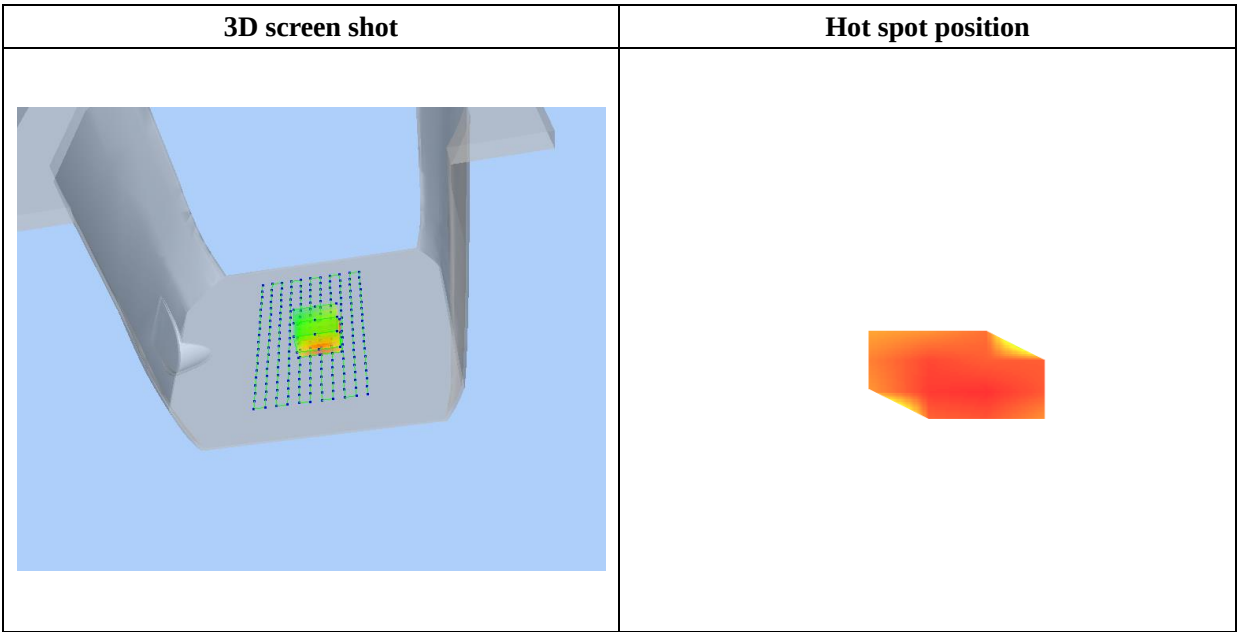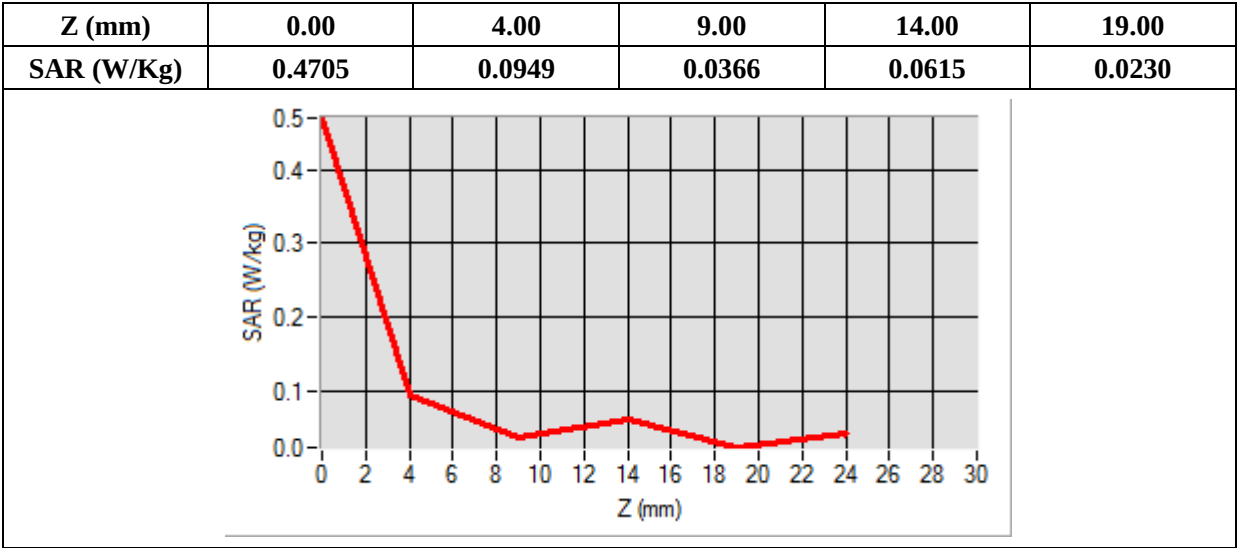

MEASUREMENT 69


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.35; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Bottom
Band	GPRS1900_4TX
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1909.800000
Relative Permittivity (real part)	39.107500
Conductivity (S/m)	1.412250
Power Variation (%)	-1.830000
Ambient Temperature	21.8
Liquid Temperature	21.8

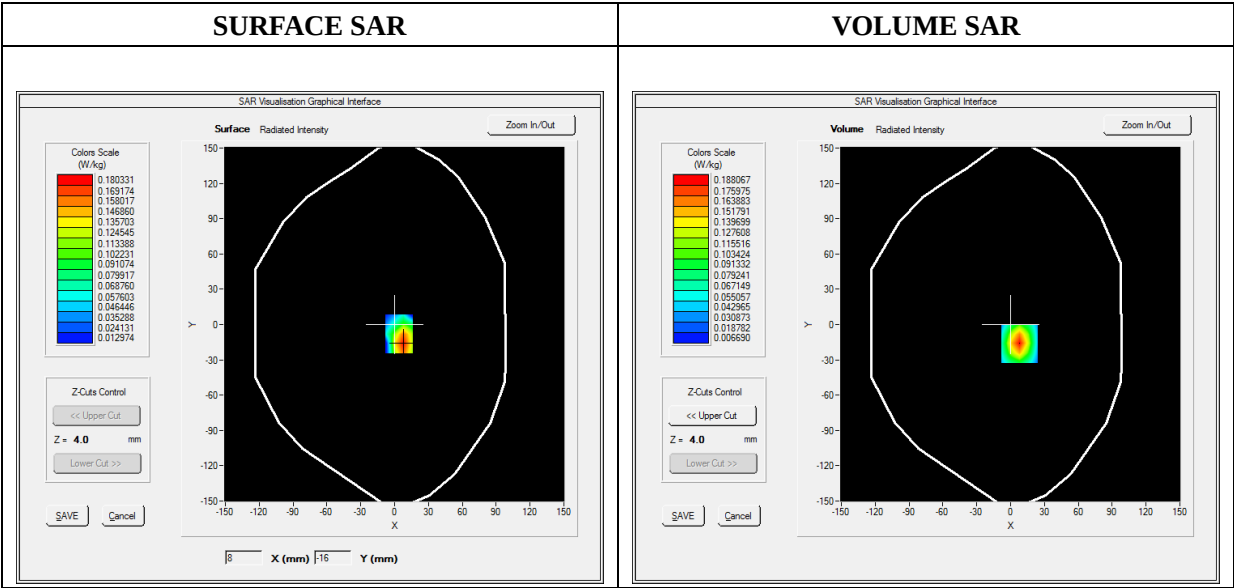

Maximum location: X=8.00, Y=-16.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.088691
SAR 1g (W/Kg)	0.172060

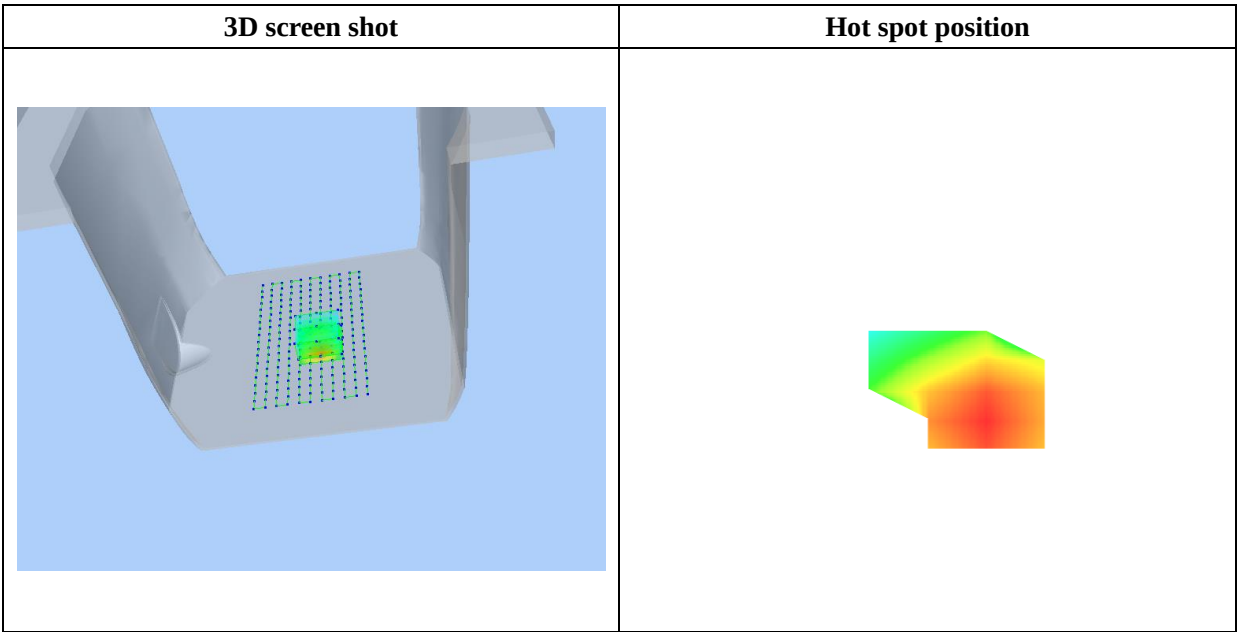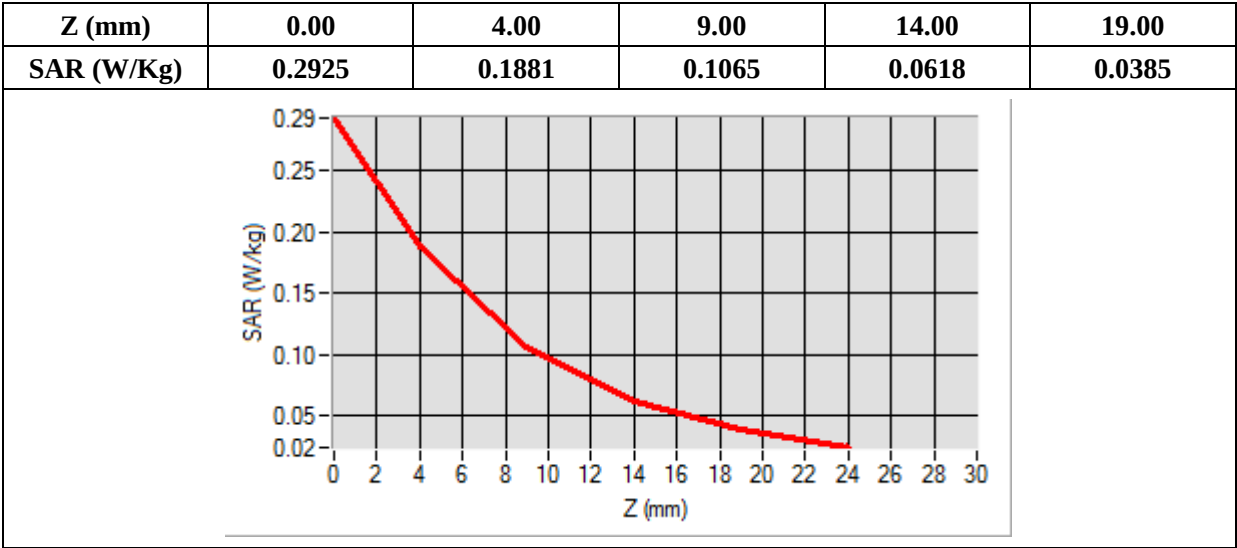

MEASUREMENT 72


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.35; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	39.107500
Conductivity (S/m)	1.412250
Power Variation (%)	-1.300000
Ambient Temperature	21.8
Liquid Temperature	21.8

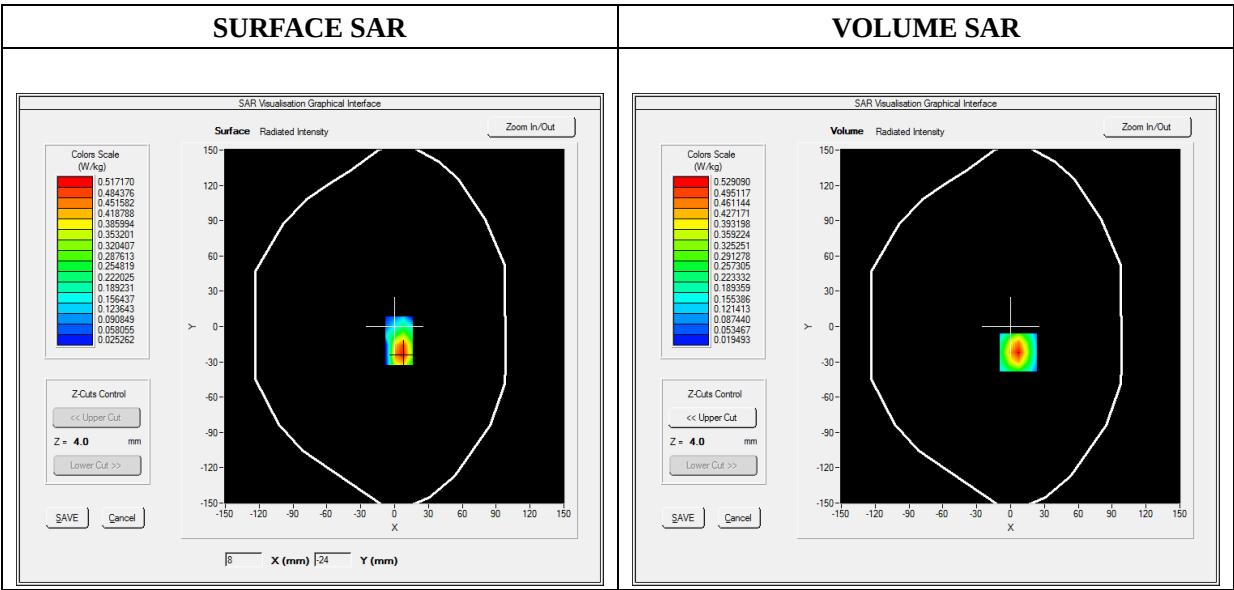

Maximum location: X=7.00, Y=-22.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.257658
SAR 1g (W/Kg)	0.487046

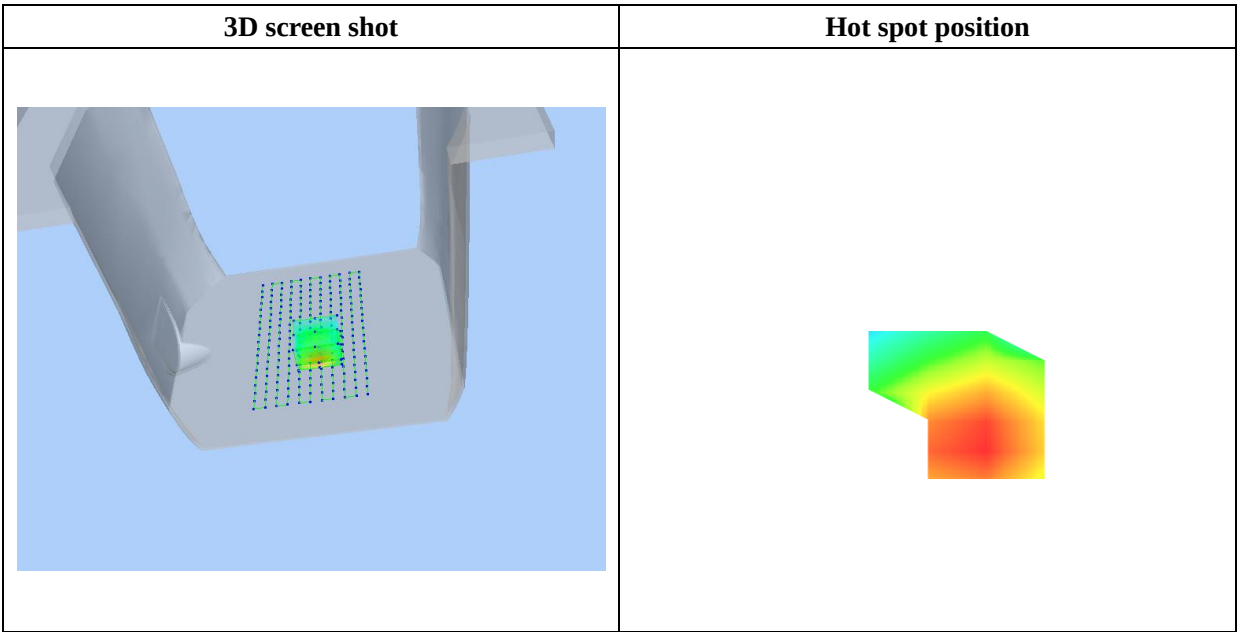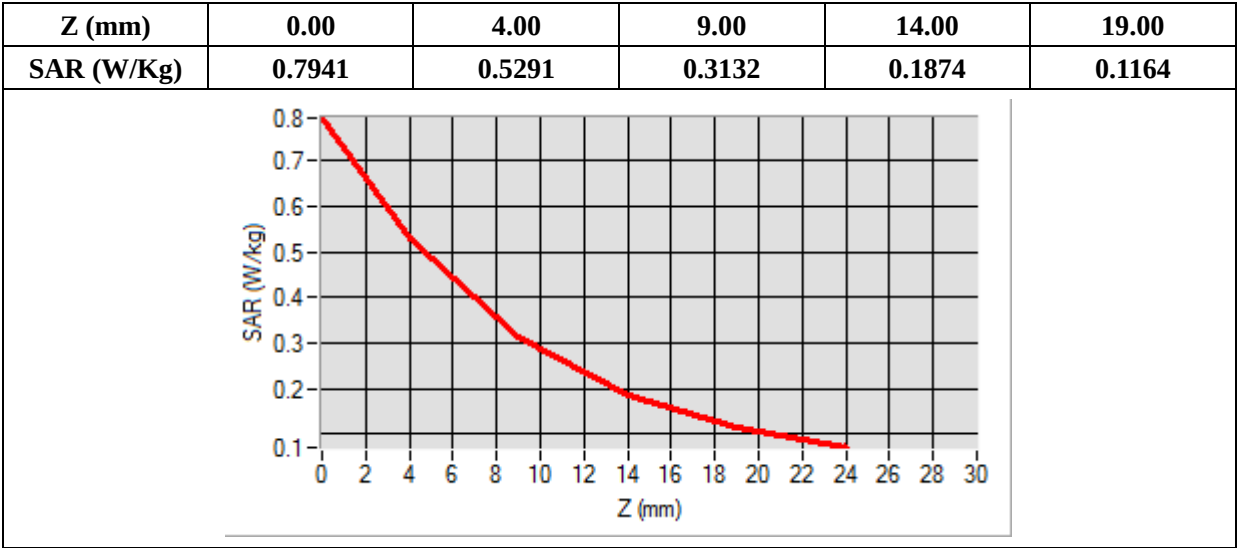

MEASUREMENT 75


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.84; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1700_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1712.400000
Relative Permittivity (real part)	39.883514
Conductivity (S/m)	1.338387
Power Variation (%)	-0.510000
Ambient Temperature	21.8
Liquid Temperature	21.8

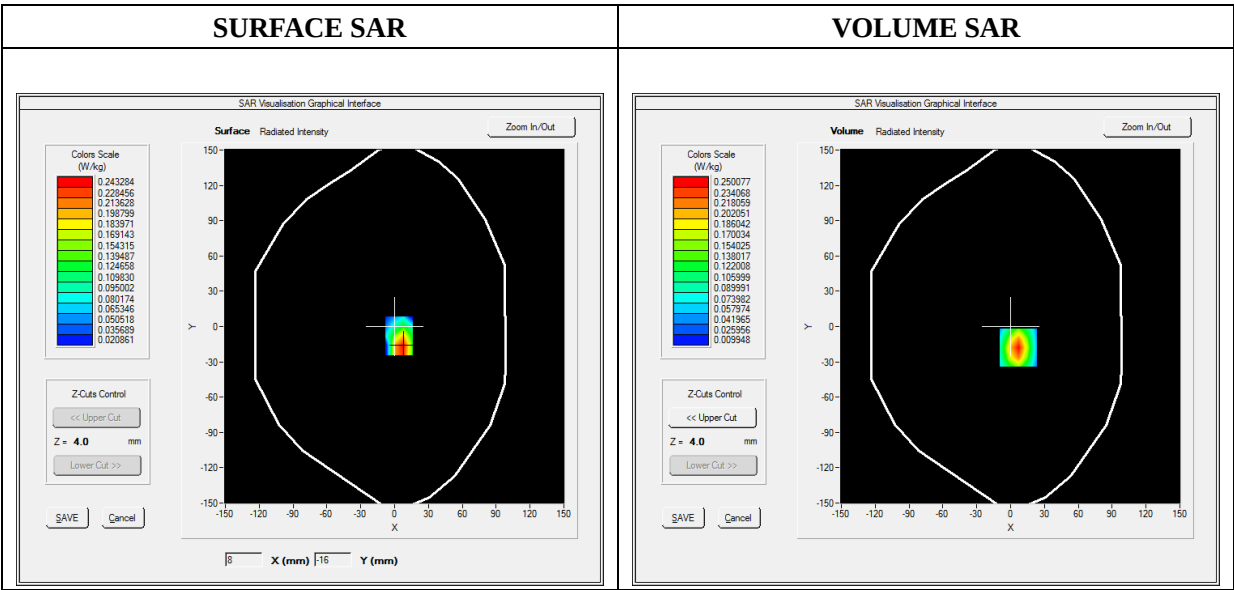

Maximum location: X=7.00, Y=-18.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.124886
SAR 1g (W/Kg)	0.229867

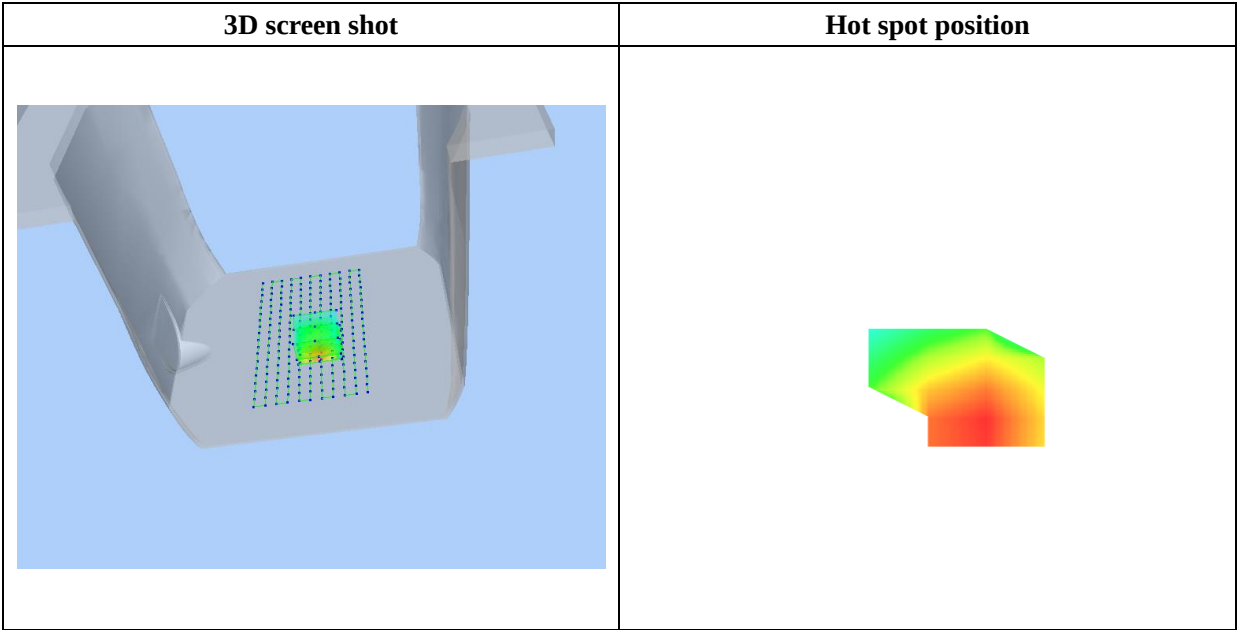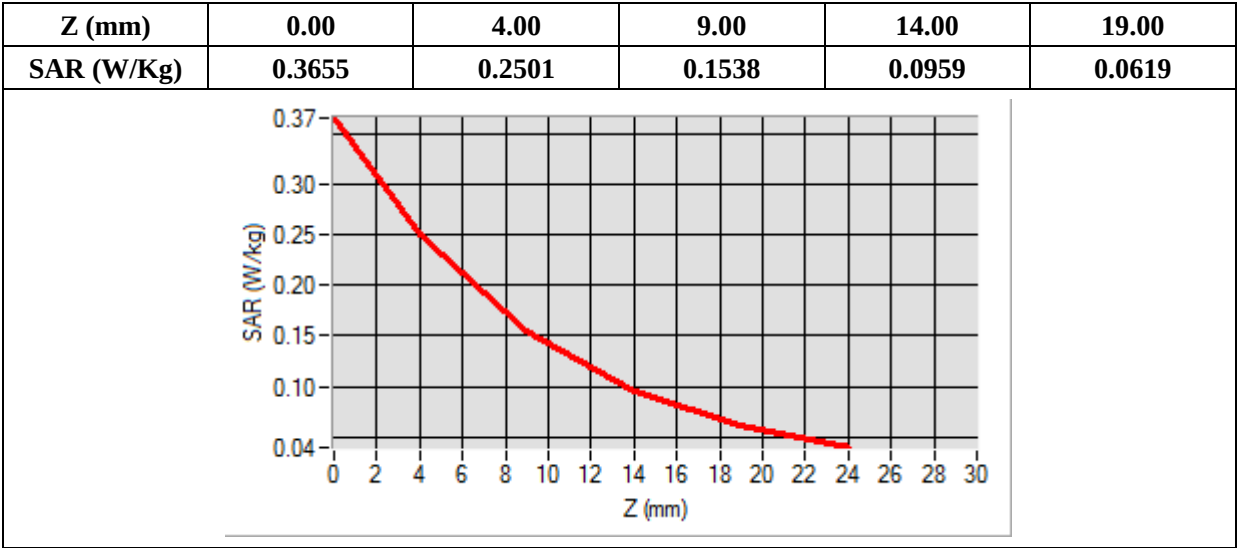

MEASUREMENT 76


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.93; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.460277
Conductivity (S/m)	0.878883
Power Variation (%)	-1.630000
Ambient Temperature	21.5
Liquid Temperature	21.5

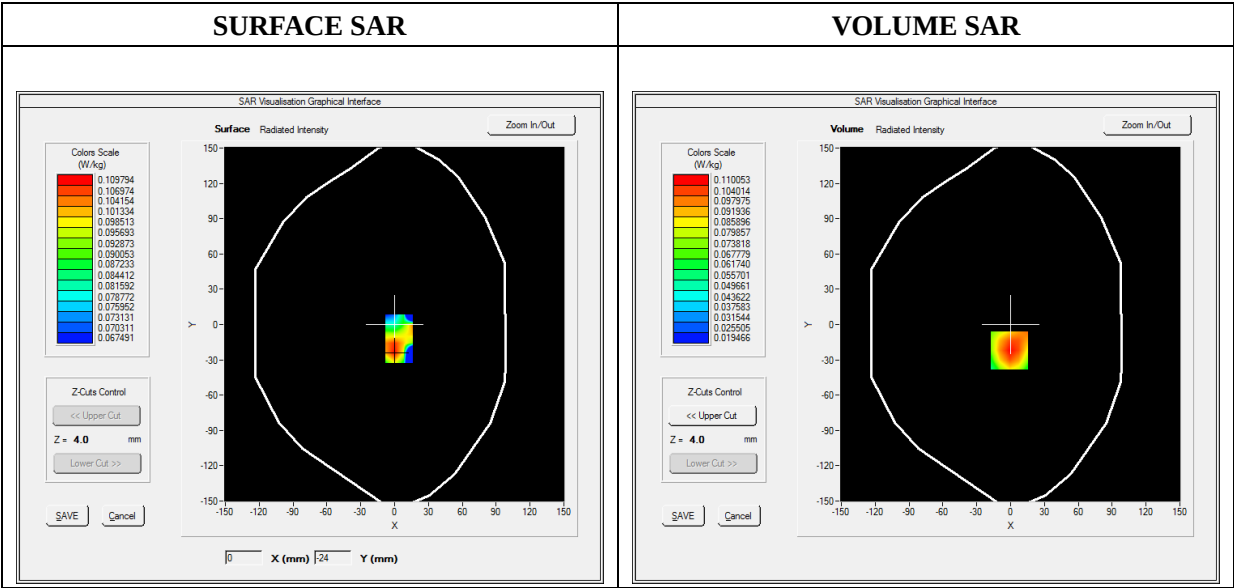

Maximum location: X=-1.00, Y=-22.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.073362
SAR 1g (W/Kg)	0.105446

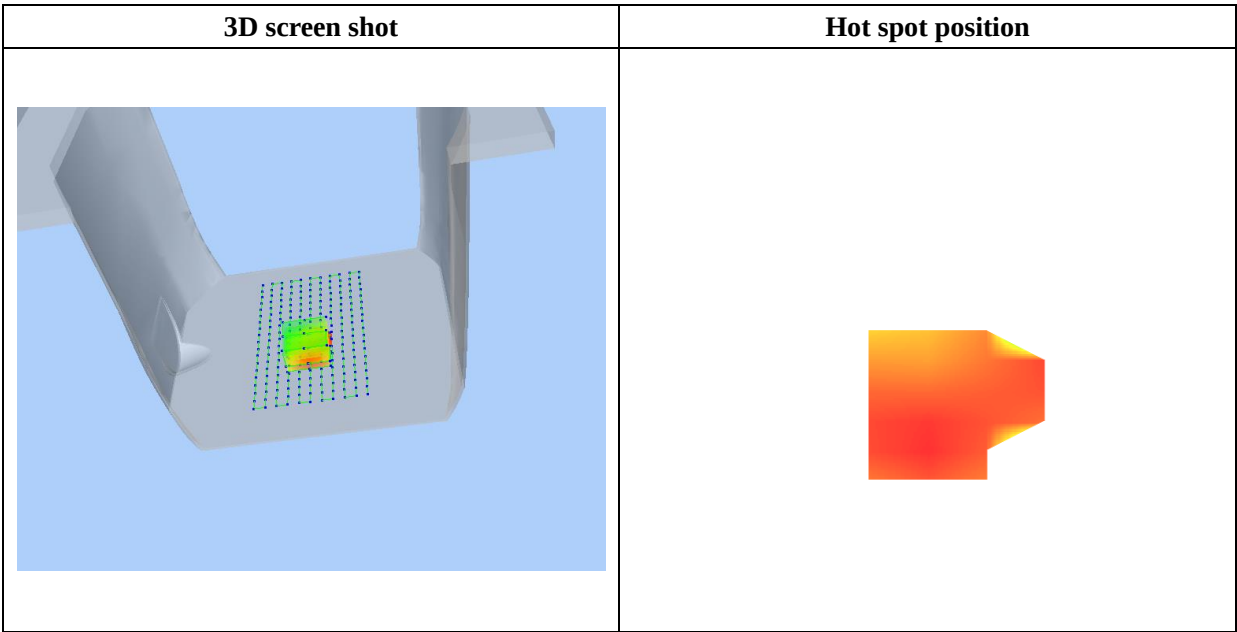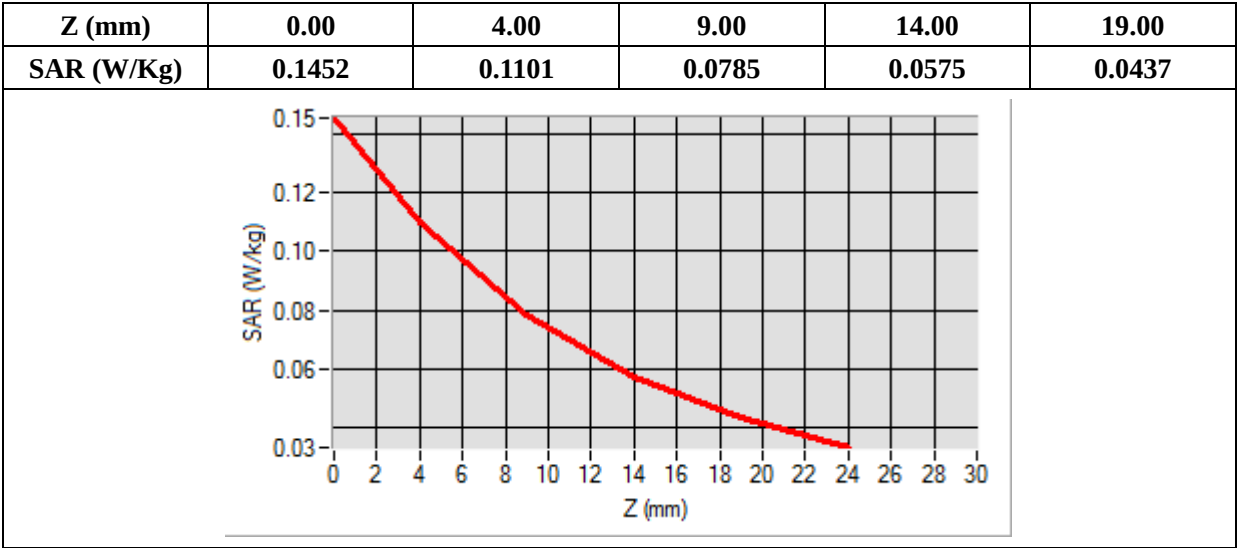

MEASUREMENT 81


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.35; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	39.140521
Conductivity (S/m)	1.407486
Power Variation (%)	-0.850000
Ambient Temperature	21.8
Liquid Temperature	21.8

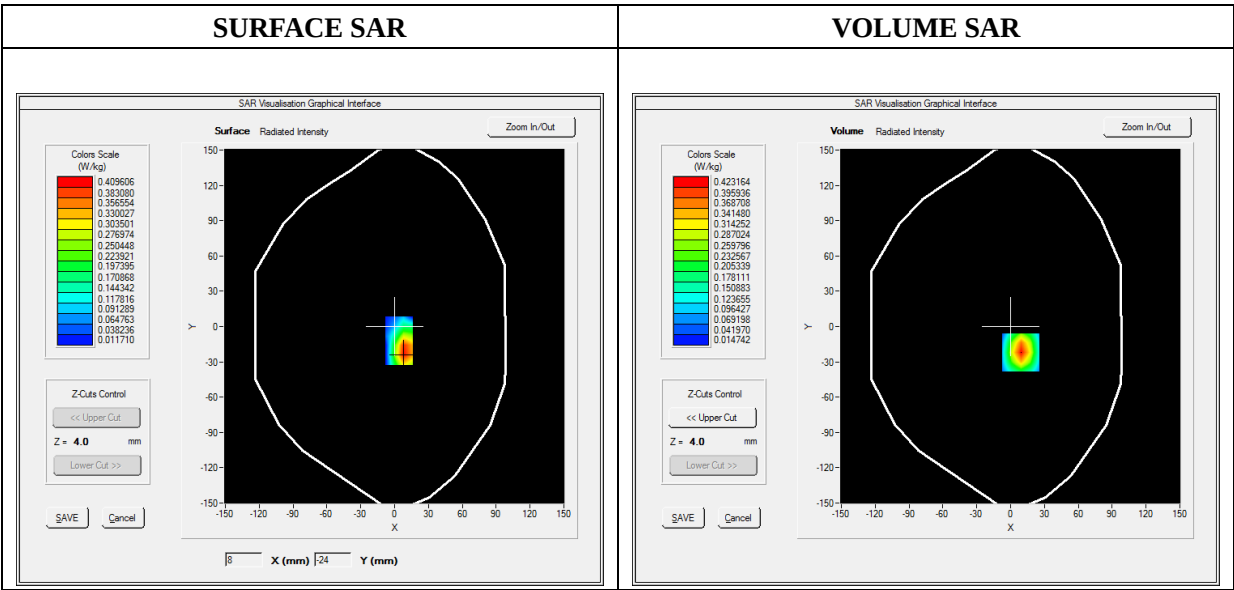

Maximum location: X=9.00, Y=-22.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.203363
SAR 1g (W/Kg)	0.386839

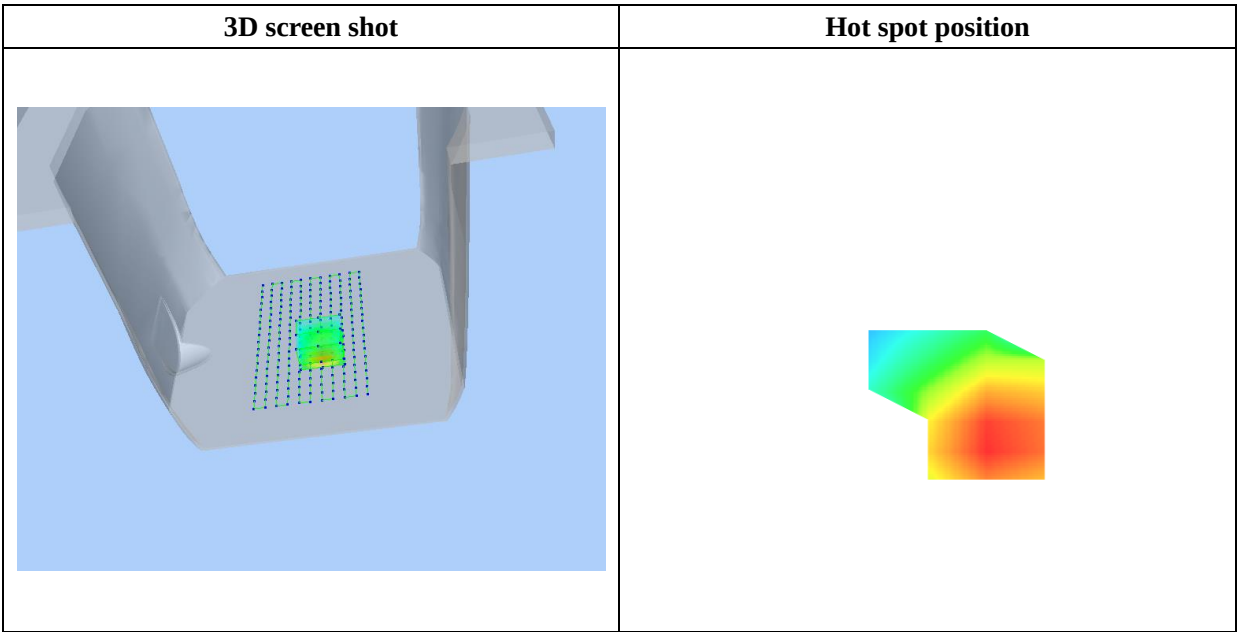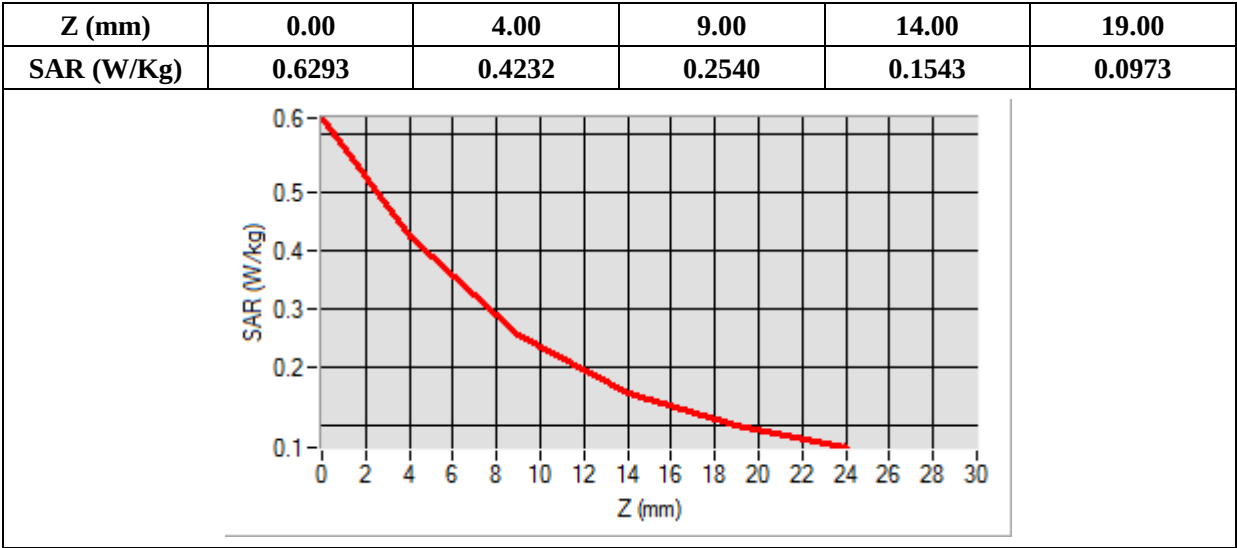

MEASUREMENT 87


Type: Phone measurement (Complete)
Date of measurement: 2020-12-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.84; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.883514
Conductivity (S/m)	1.338387
Power Variation (%)	-0.870000
Ambient Temperature	21.8
Liquid Temperature	21.8

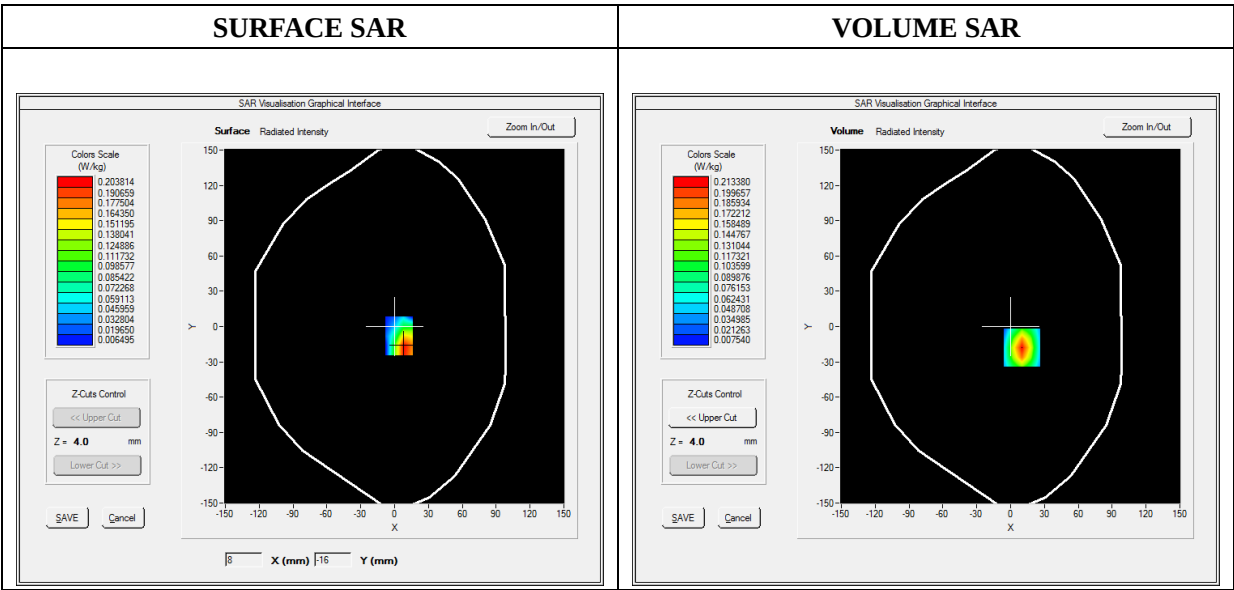

Maximum location: X=10.00, Y=-18.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.104552
SAR 1g (W/Kg)	0.194881

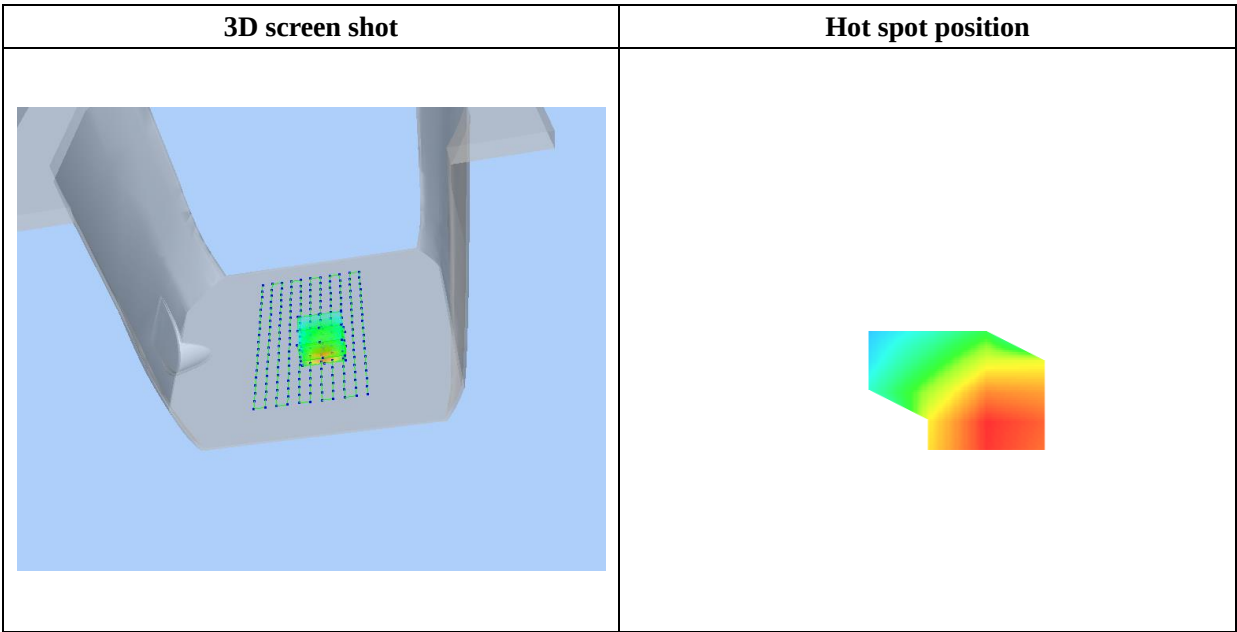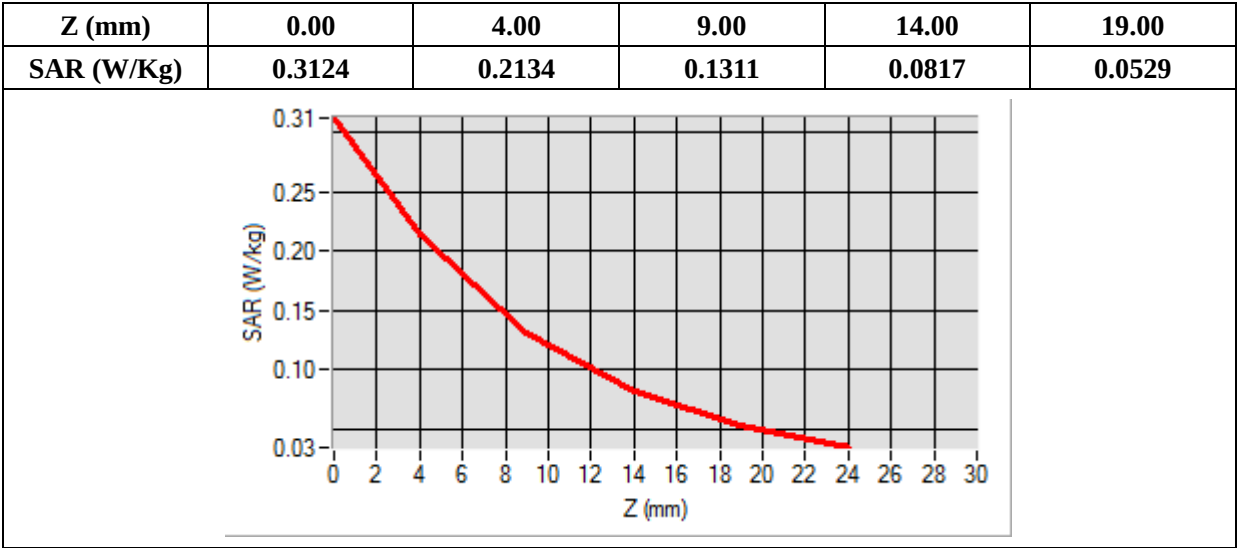

MEASUREMENT 91


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.93; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative Permittivity (real part)	42.430271
Conductivity (S/m)	0.8768312
Power Variation (%)	0.100000
Ambient Temperature	21.5
Liquid Temperature	21.5

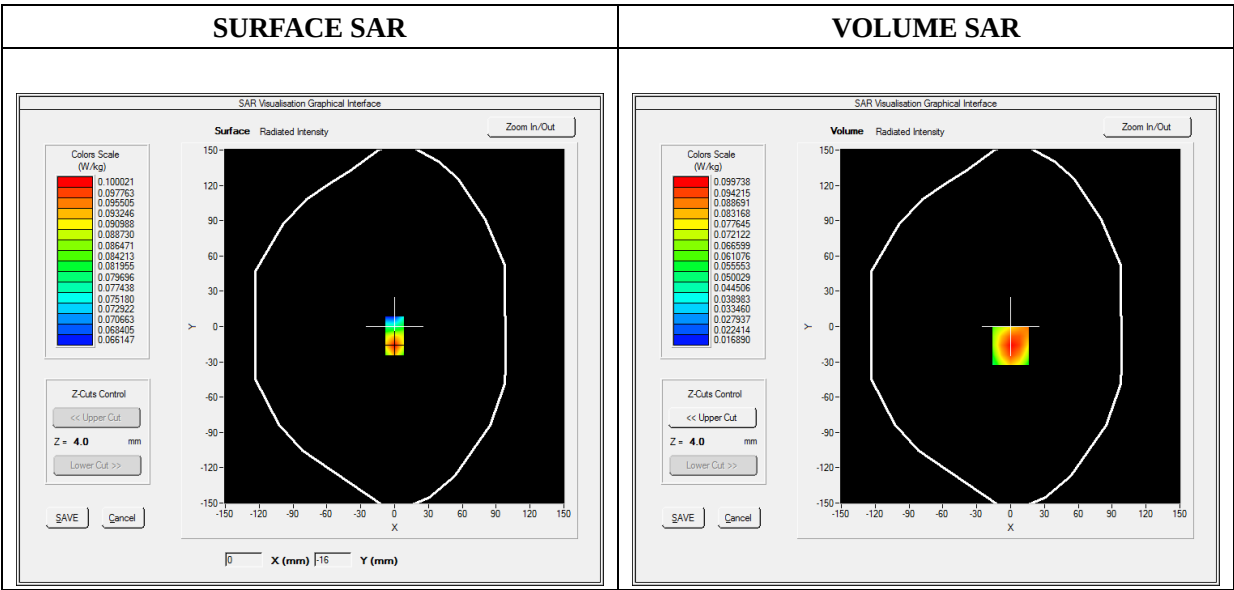

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.066638
SAR 1g (W/Kg)	0.095165

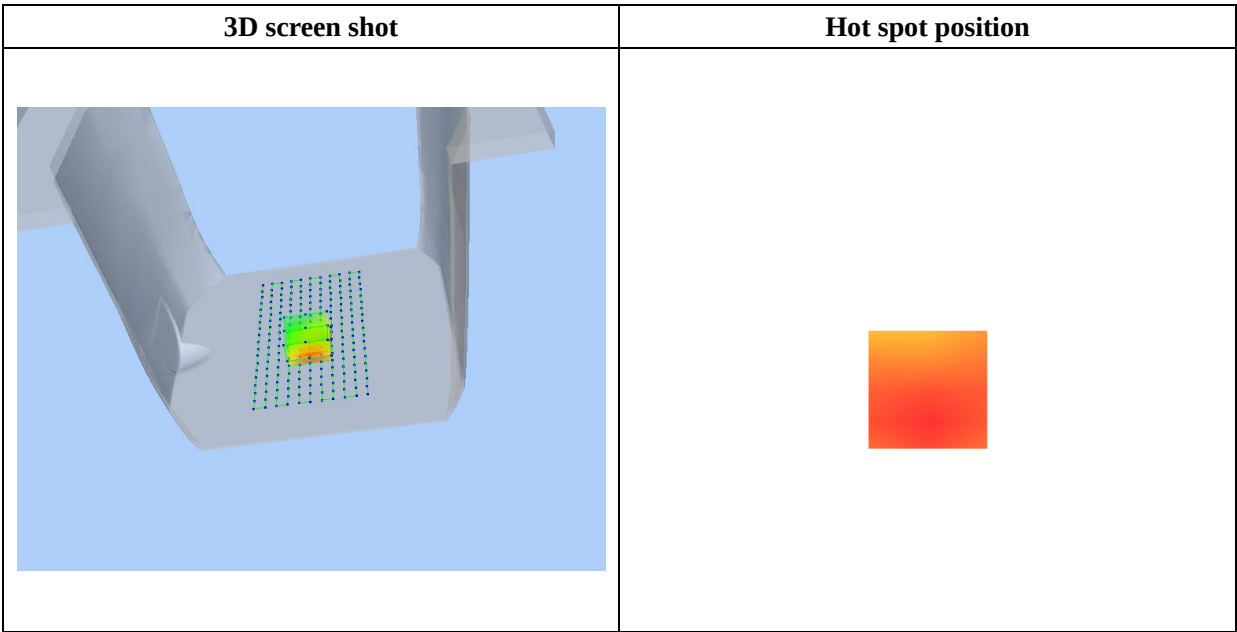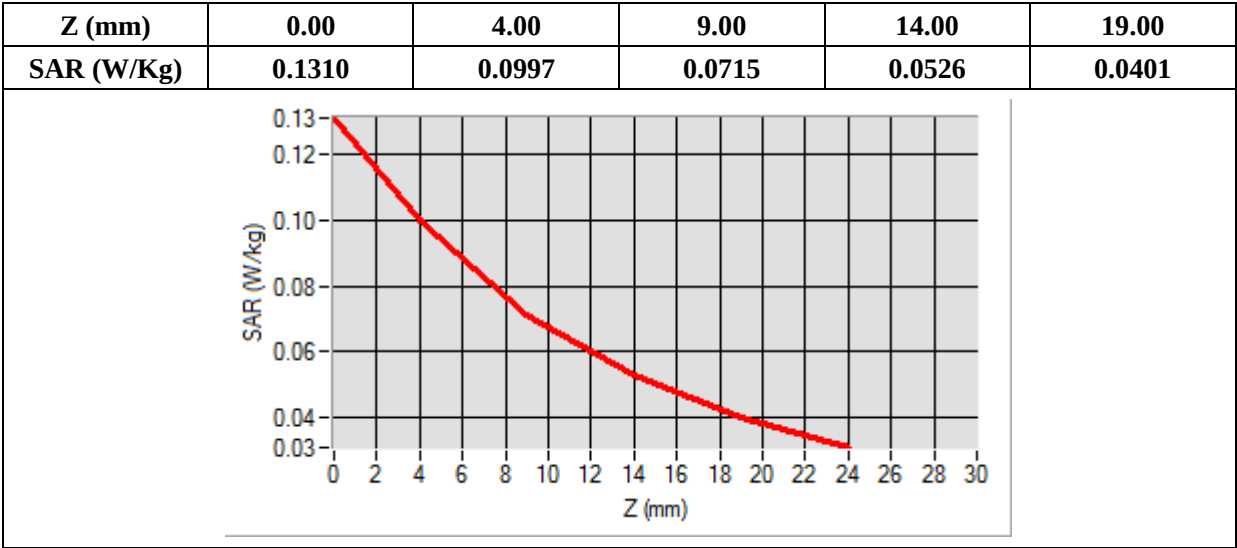

MEASUREMENT 97


Type: Phone measurement (Complete)
Date of measurement: 2020-12-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative Permittivity (real part)	38.964820
Conductivity (S/m)	1.932062
Power Variation (%)	-0.450000
Ambient Temperature	21.4
Liquid Temperature	21.4

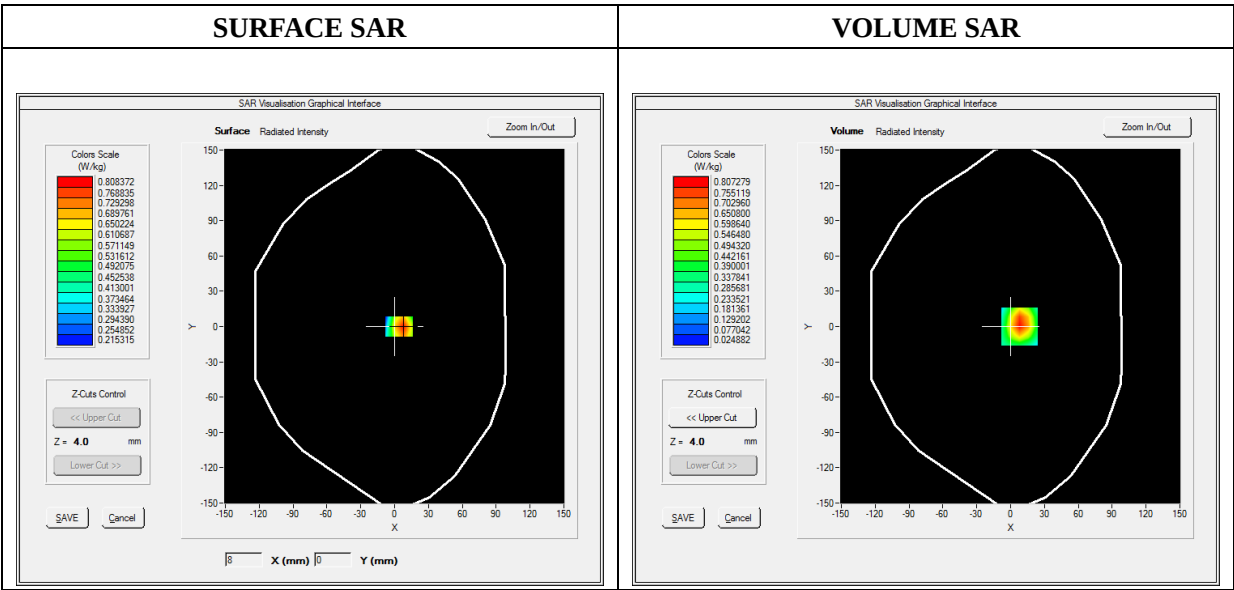

Maximum location: X=8.00, Y=0.00

SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.393911
SAR 1g (W/Kg)	0.752606

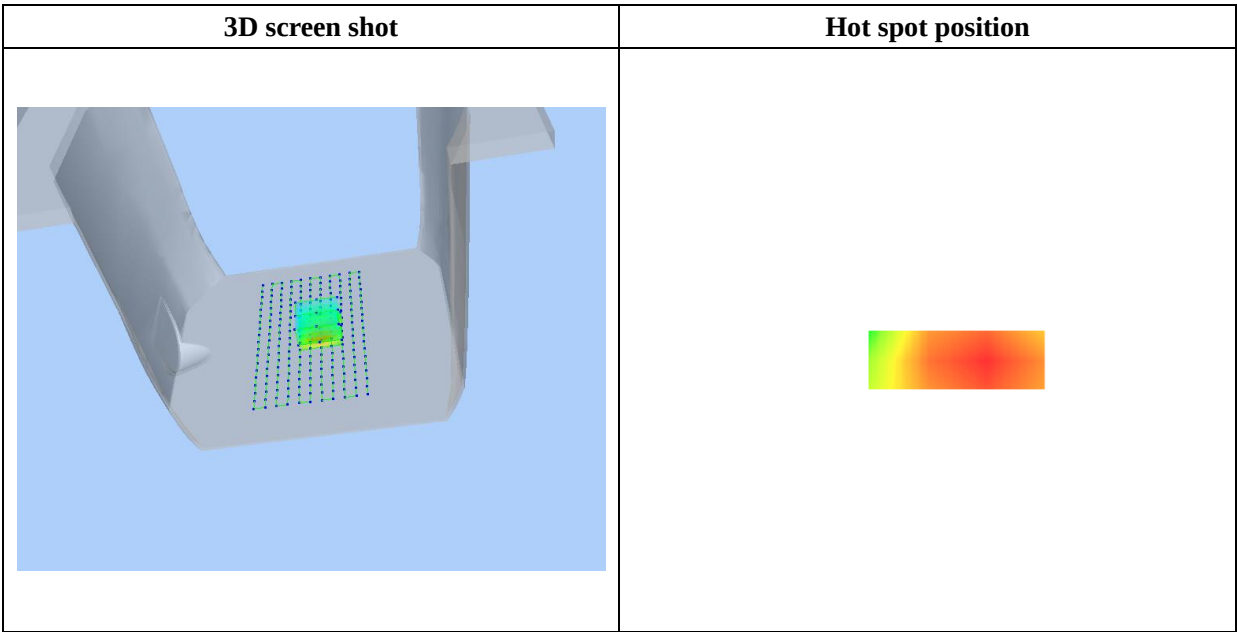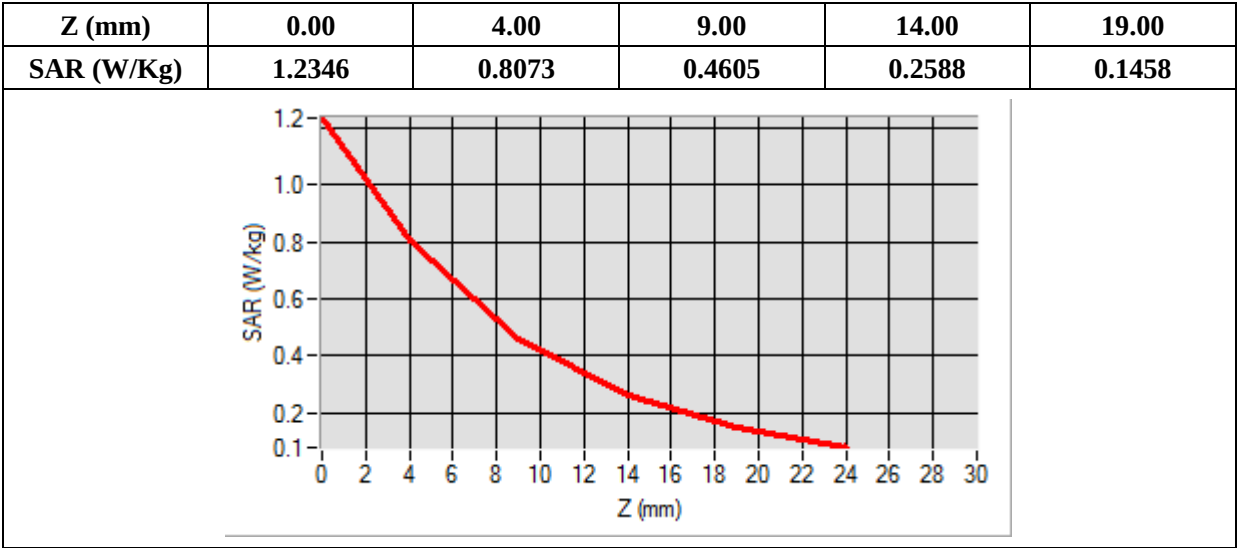

MEASUREMENT 103


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.99; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	704.000000
Relative Permittivity (real part)	42.935843
Conductivity (S/m)	0.839026
Power Variation (%)	-0.070000
Ambient Temperature	21.5
Liquid Temperature	21.5

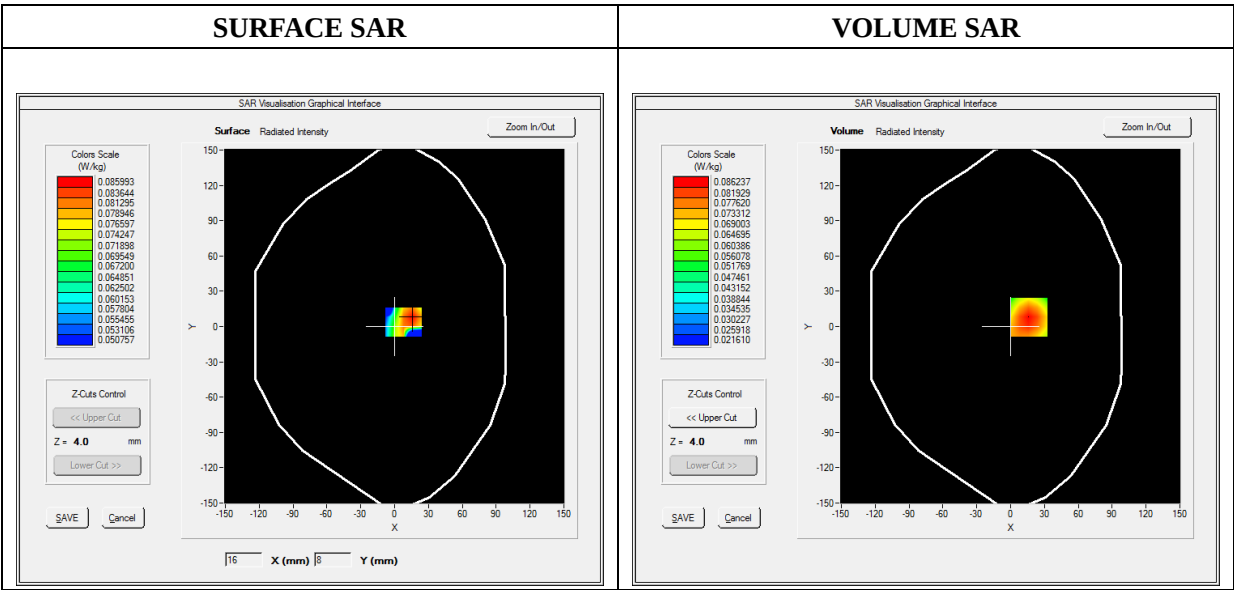

Maximum location: X=16.00, Y=8.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.066905
SAR 1g (W/Kg)	0.085691

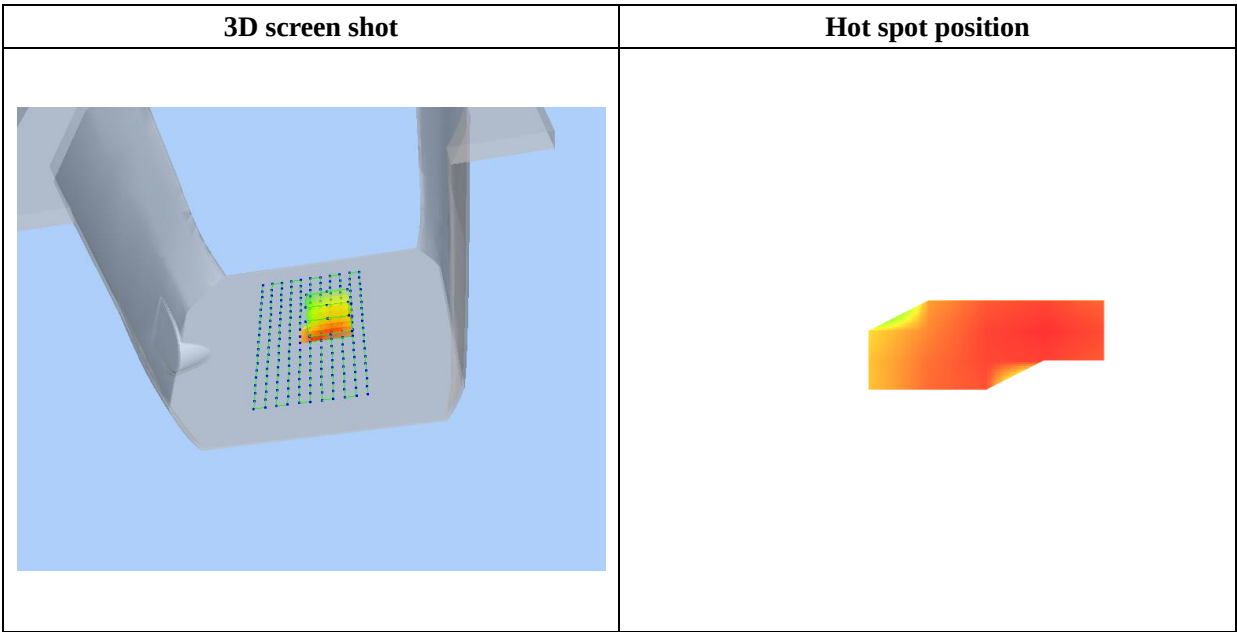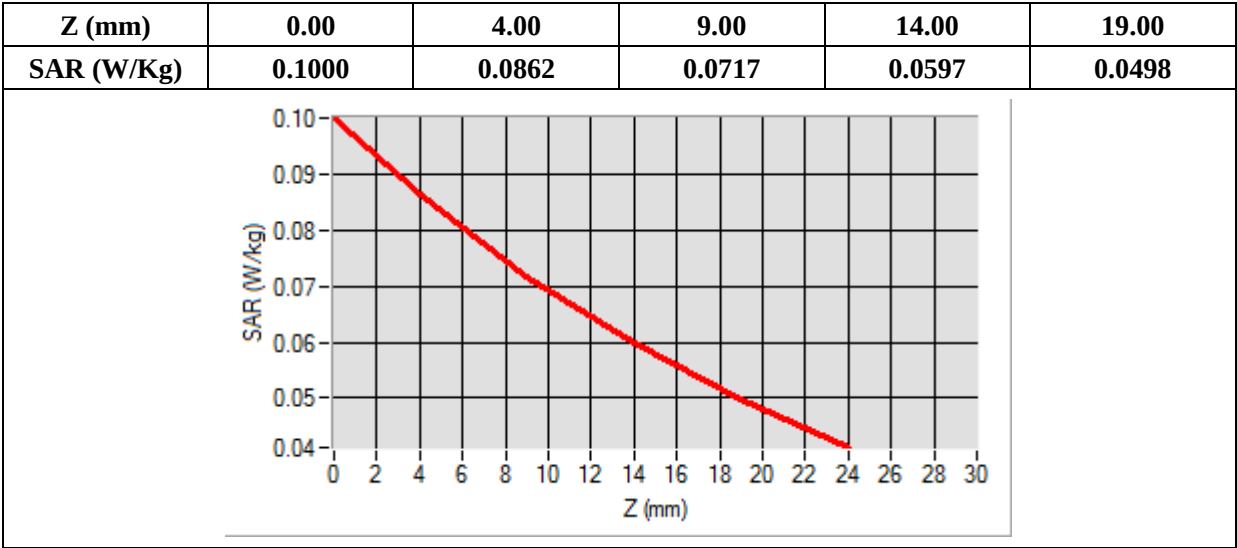

MEASUREMENT 109


Type: Phone measurement (Complete)
Date of measurement: 2020-12-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 6.99; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 17
Channels	QPSK, 10MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	709.000000
Relative Permittivity (real part)	42.935843
Conductivity (S/m)	0.839026
Power Variation (%)	0.470000
Ambient Temperature	21.5
Liquid Temperature	21.5

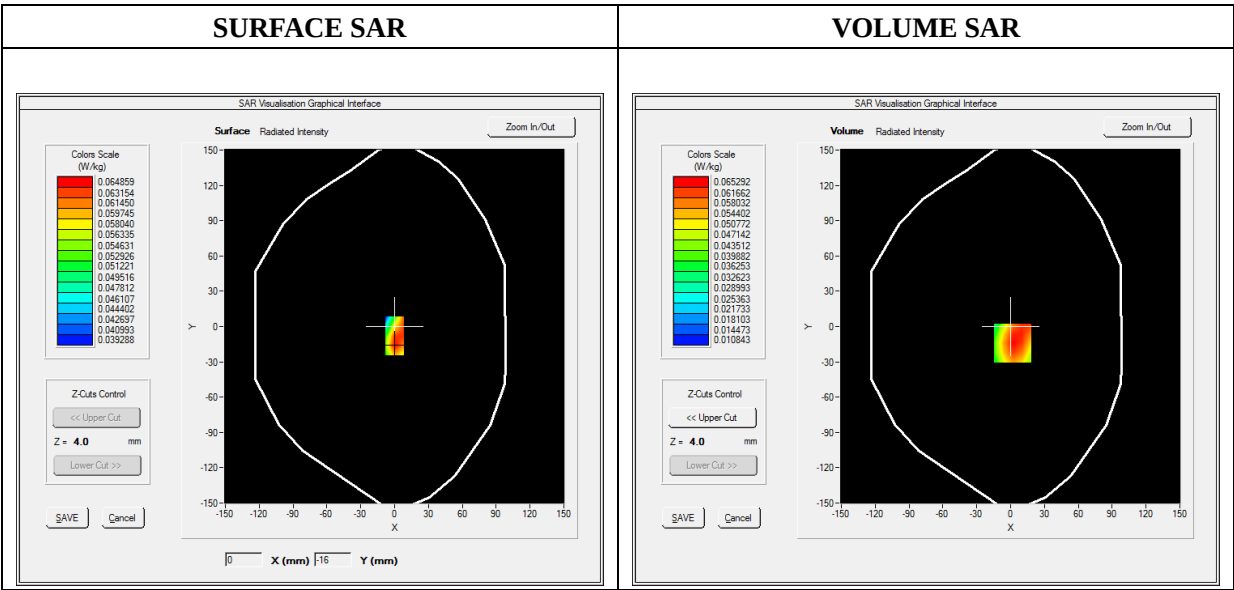

Maximum location: X=2.00, Y=-14.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.049072
SAR 1g (W/Kg)	0.067158

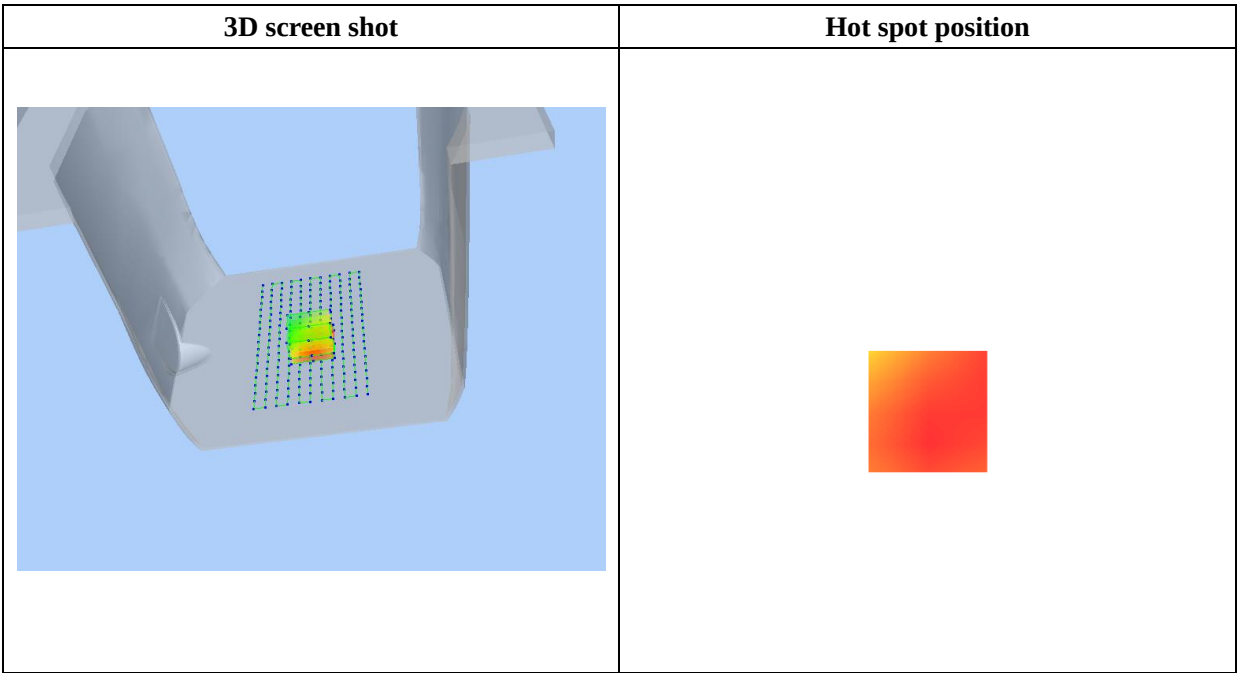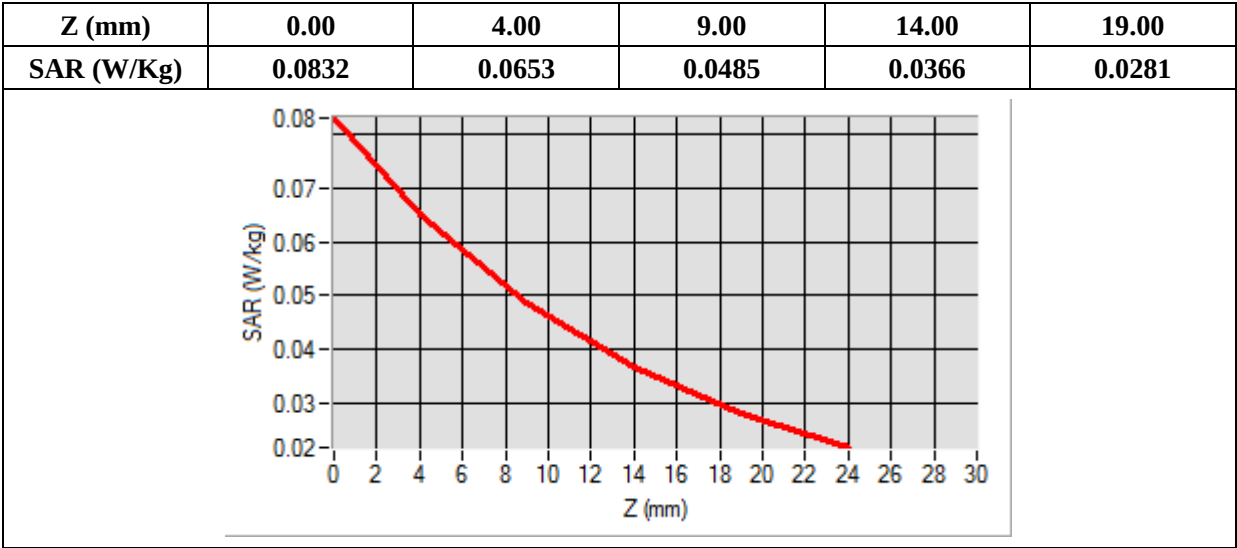

MEASUREMENT 115


Type: Phone measurement (Complete)
Date of measurement: 2020-12-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5- SN 09/13 EP168; ConvF: 5.64; Calibrated: 2020-05-22

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	39.905111
Conductivity (S/m)	1.790286
Power Variation (%)	0.330000
Ambient Temperature	21.4
Liquid Temperature	21.4

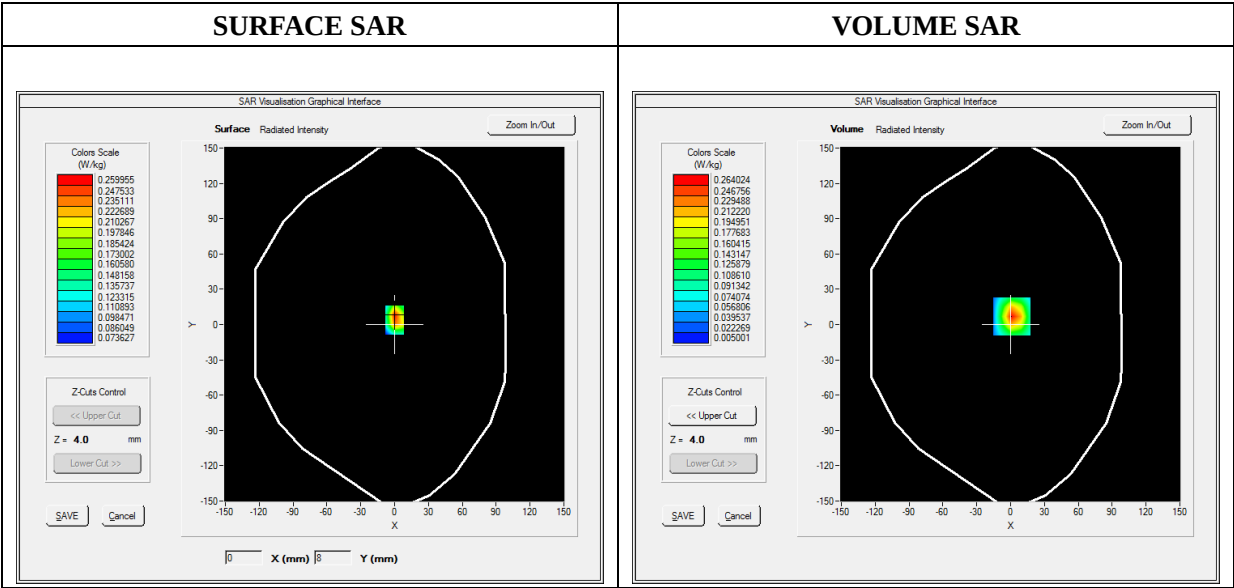

Maximum location: X=1.00, Y=7.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.112781
SAR 1g (W/Kg)	0.241726

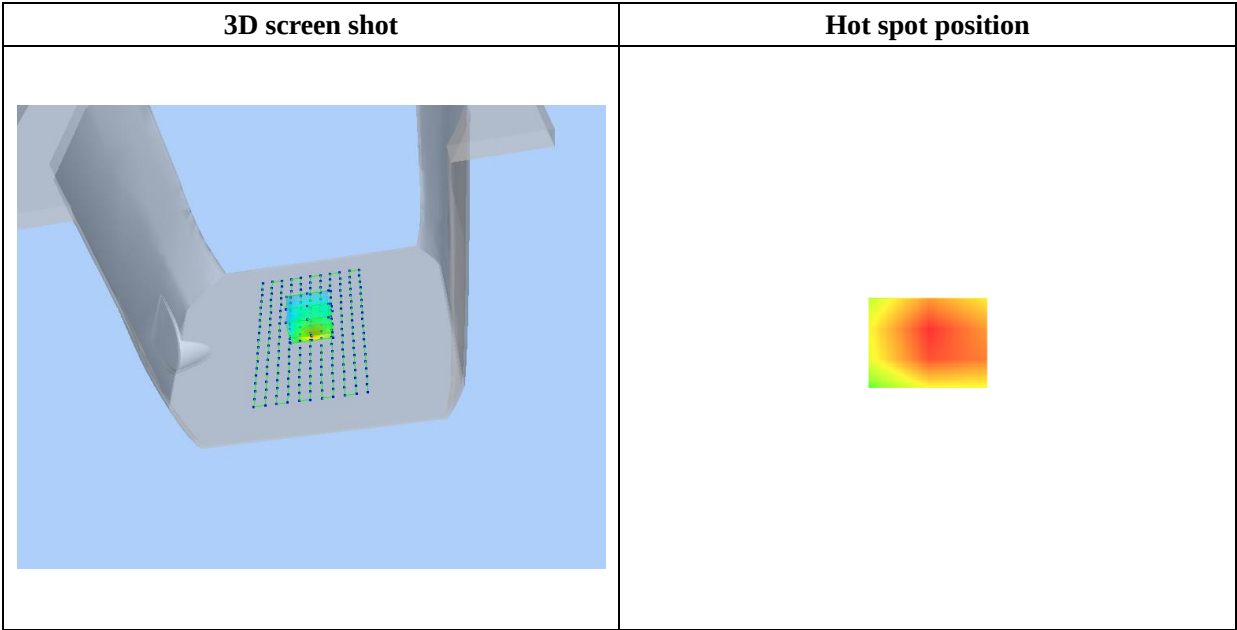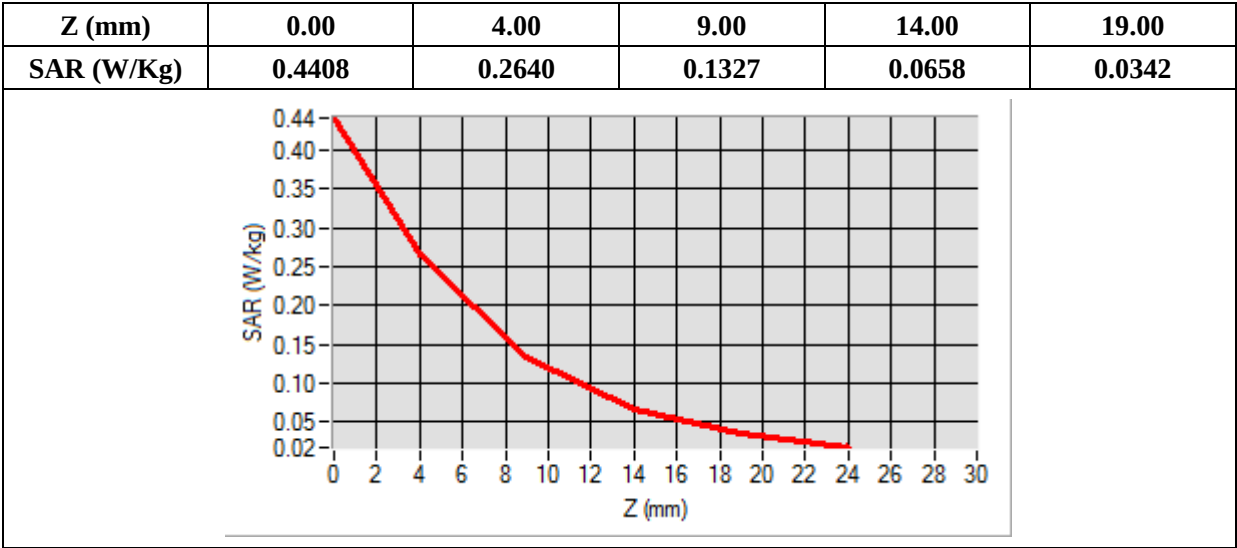

Annex C. EUT Photos

MDT760


EUT View Front




EUT View Back




Antenna View

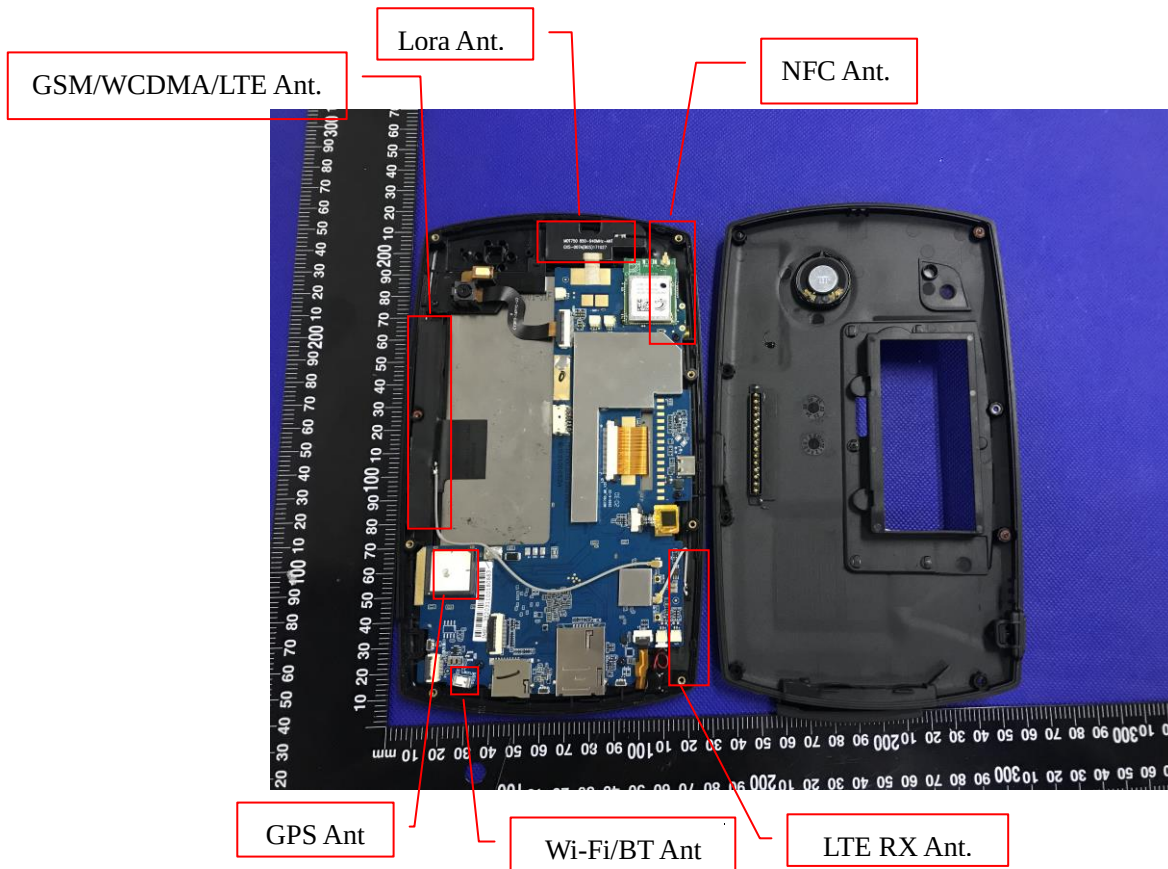


MDT860
EUT View Front

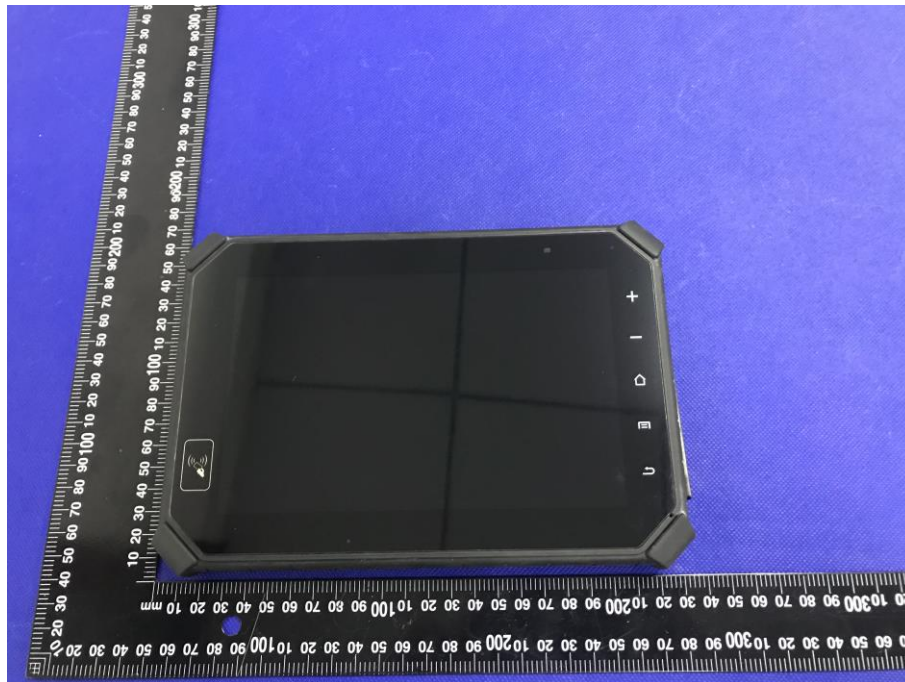

EUT View Back

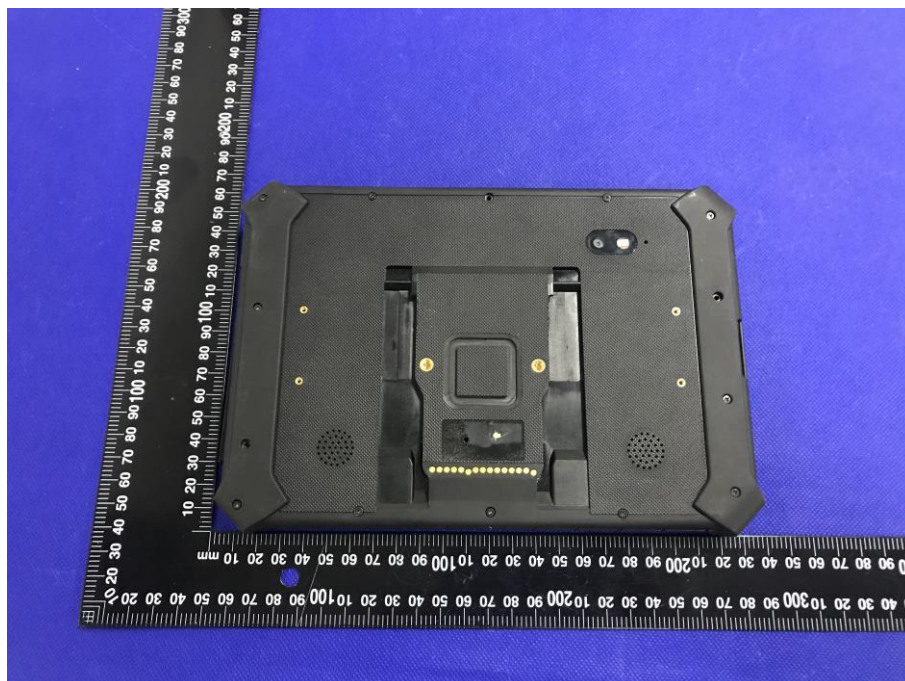

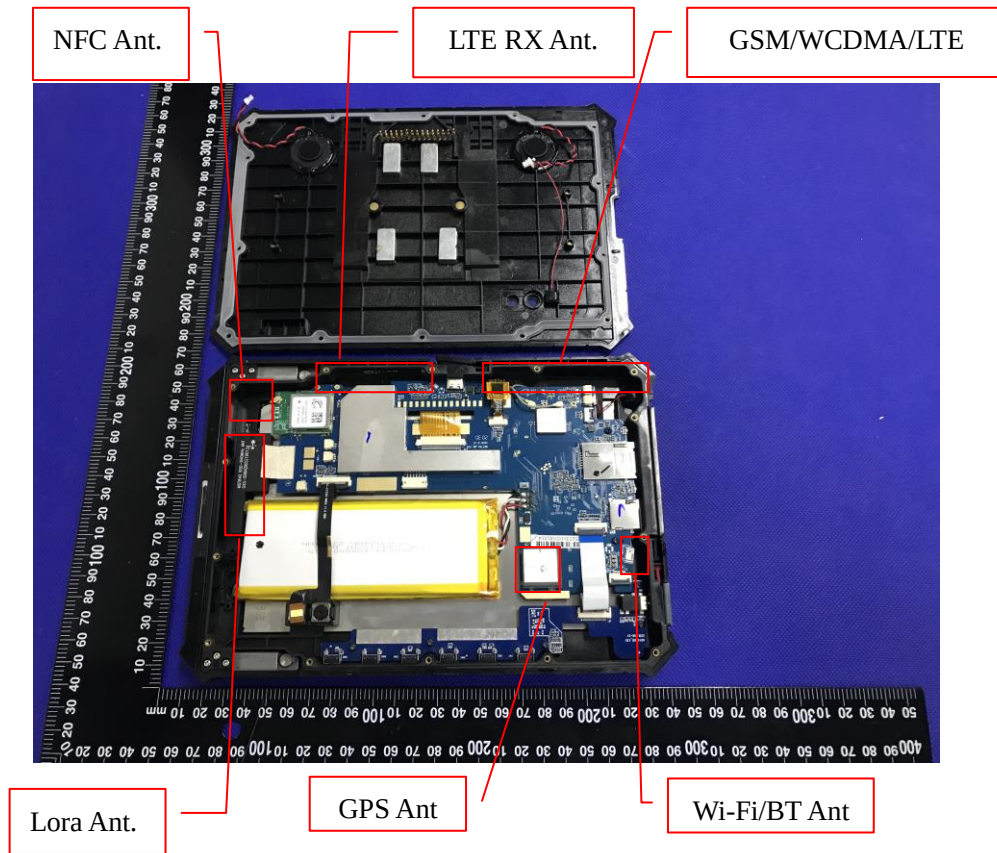
Antenna View

Annex D. Test Setup Photos


Body mode Exposure Conditions

MDT760 (Test distance: 0mm)


Body Front

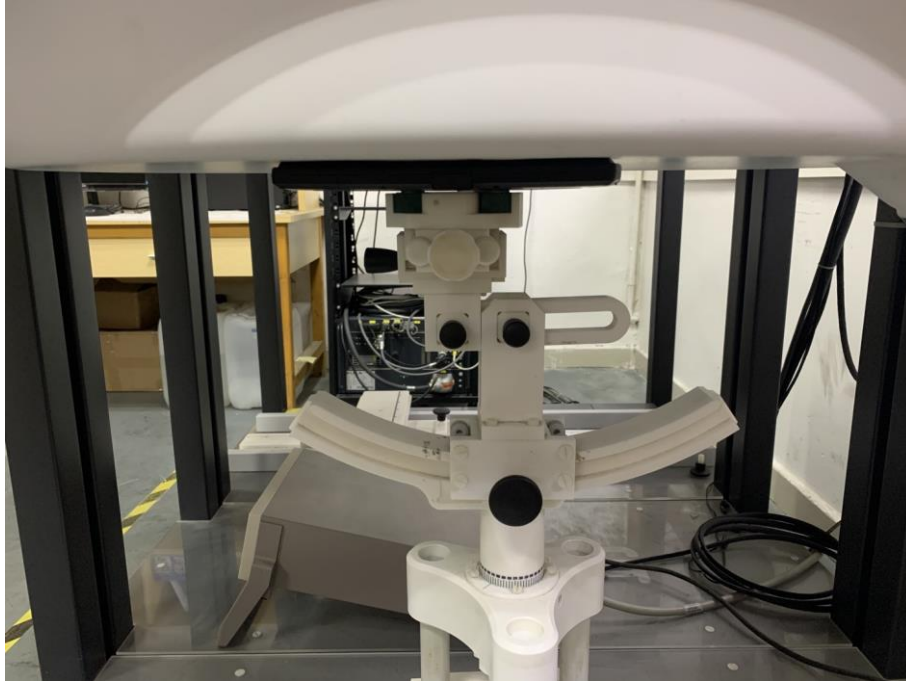


Body Back

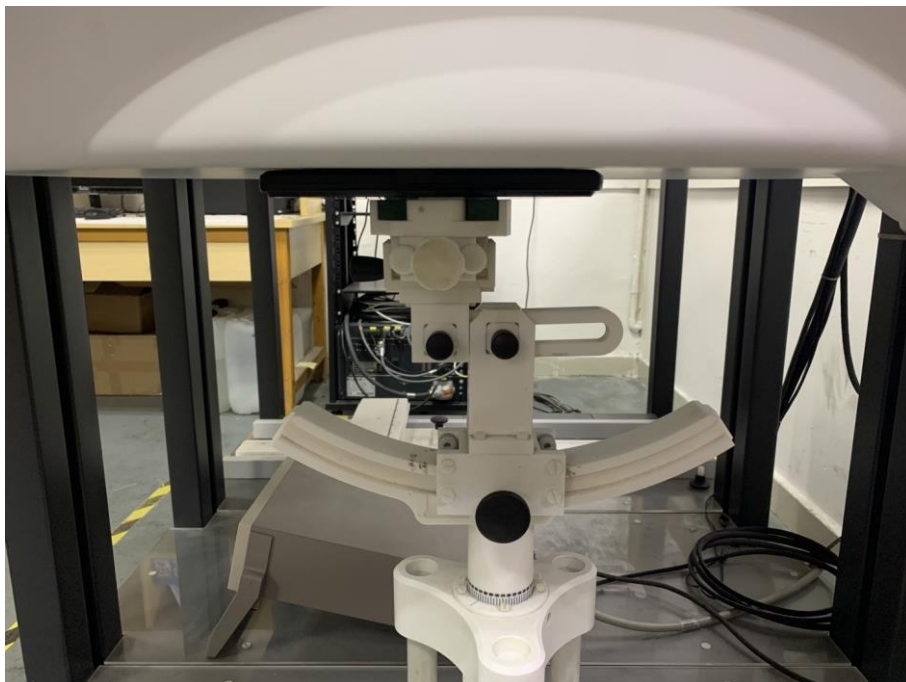

Body Right

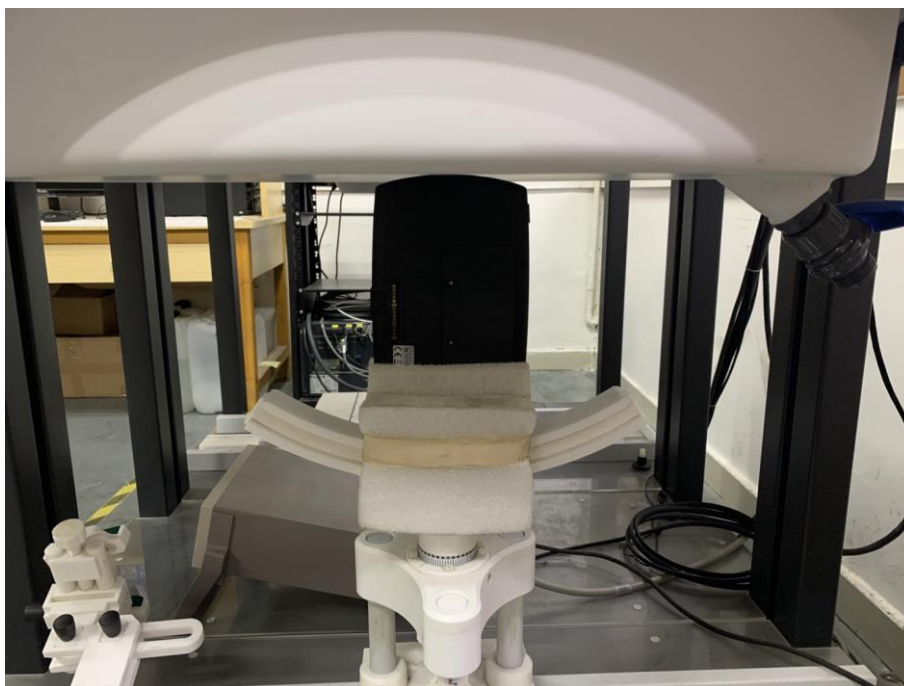

Body Left

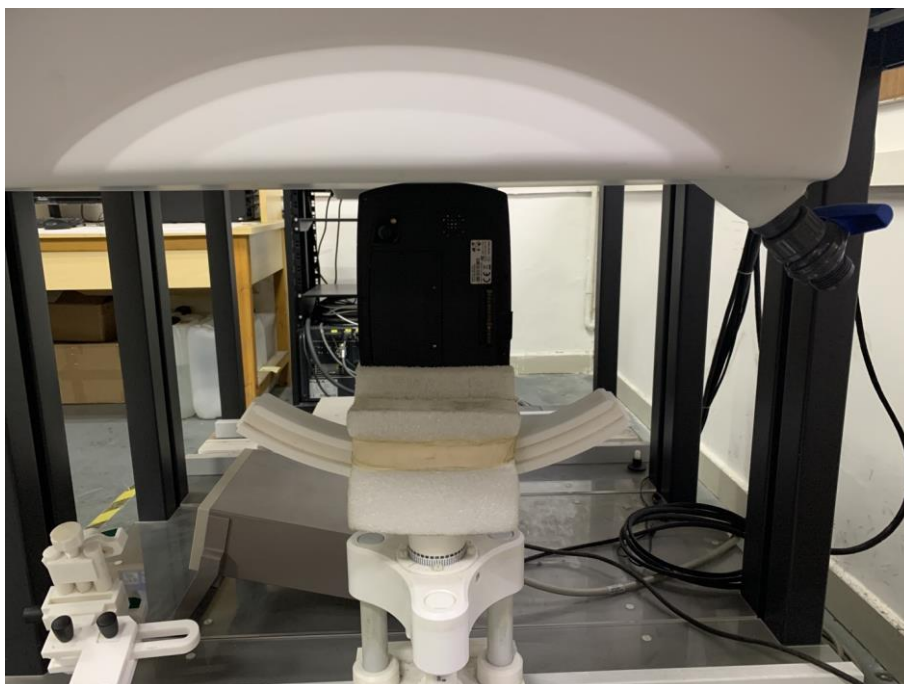

Body Top




Body Bottom




MDT860 (Test distance: 0mm)


Body Front

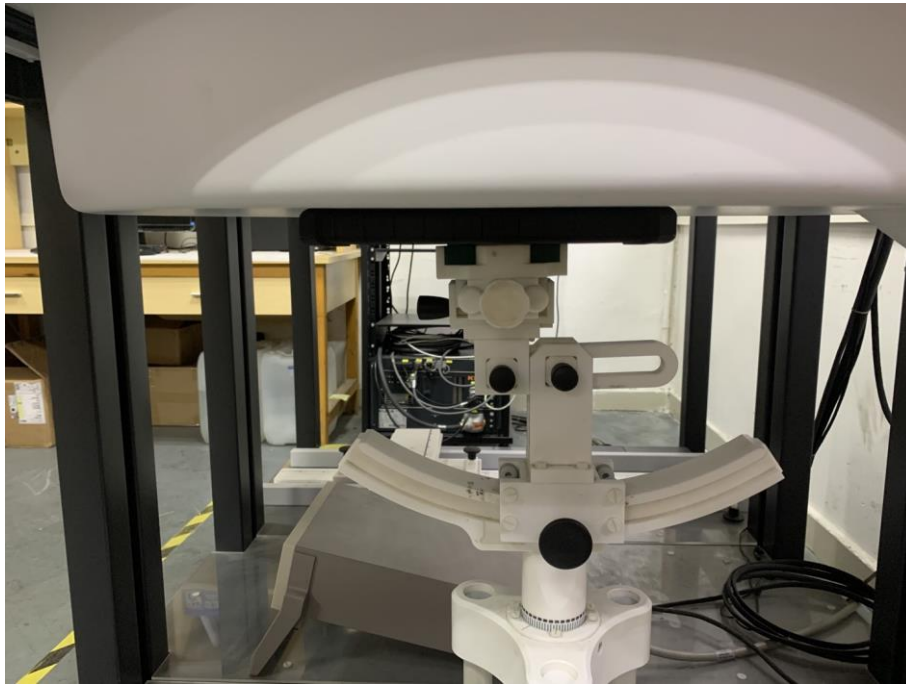


Body Back

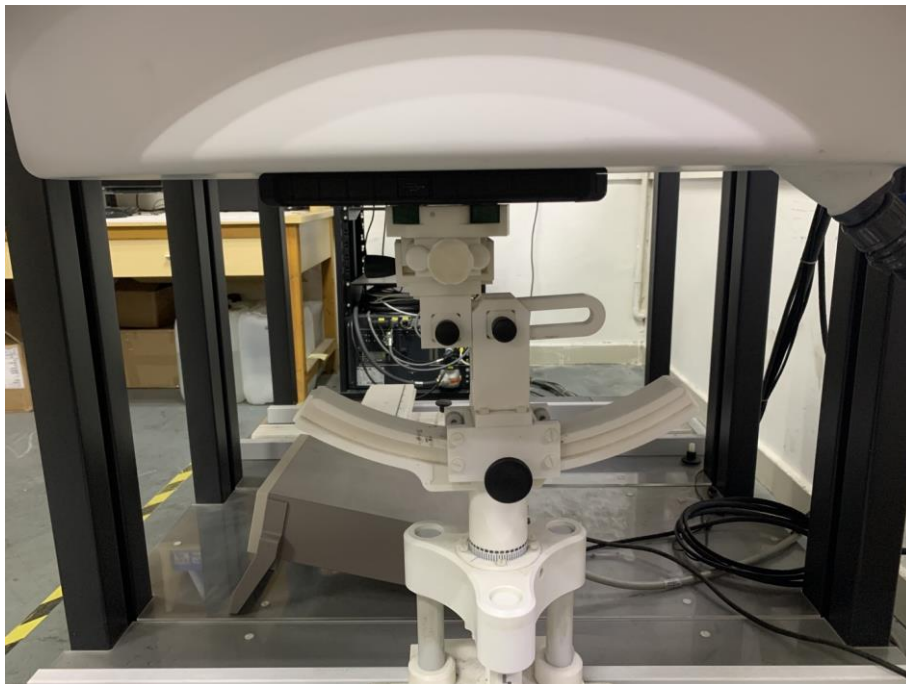


Body Right

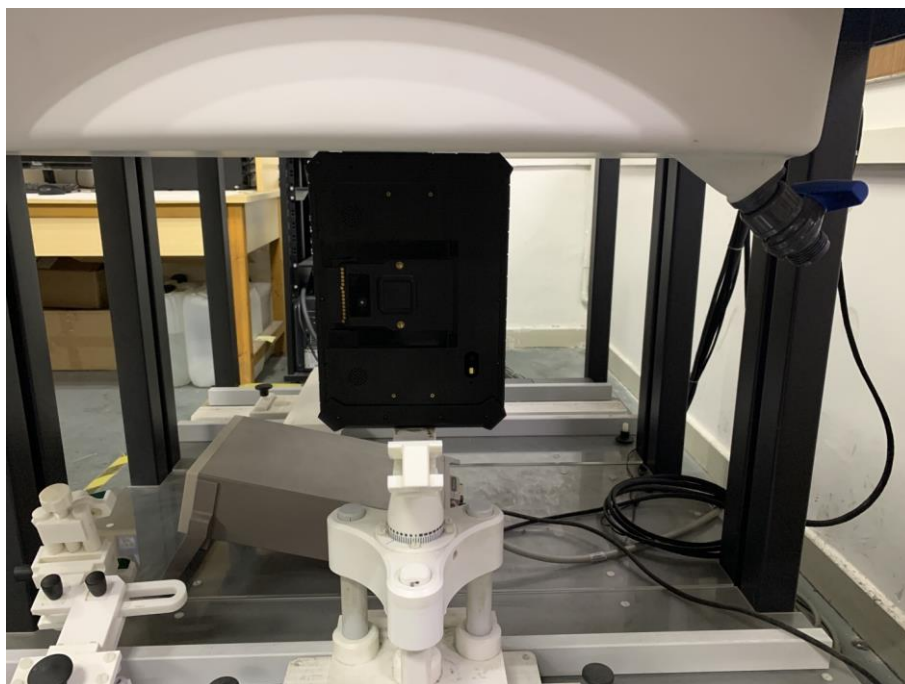


Body Left

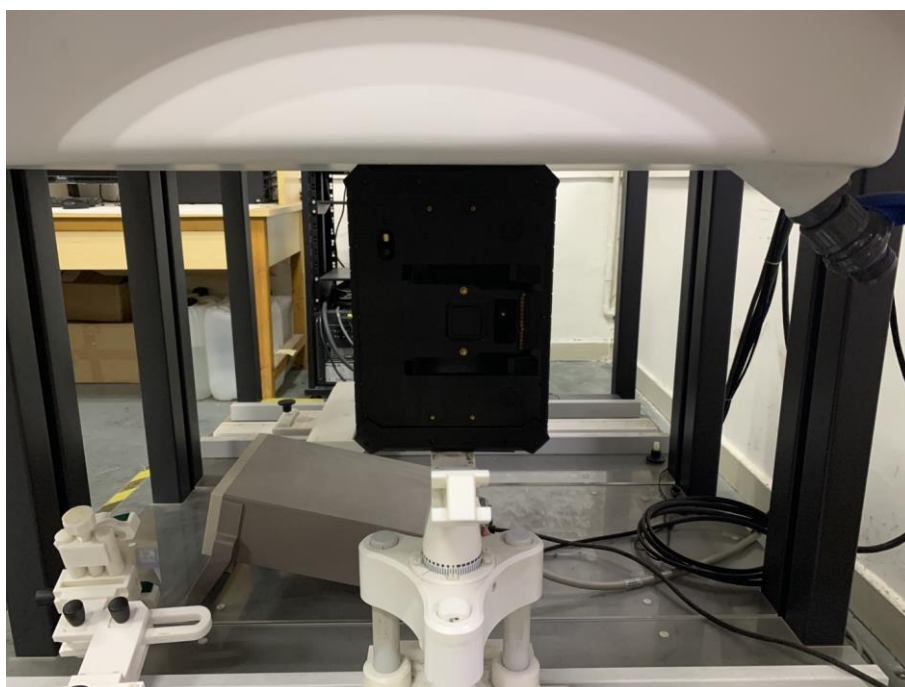

Body Top

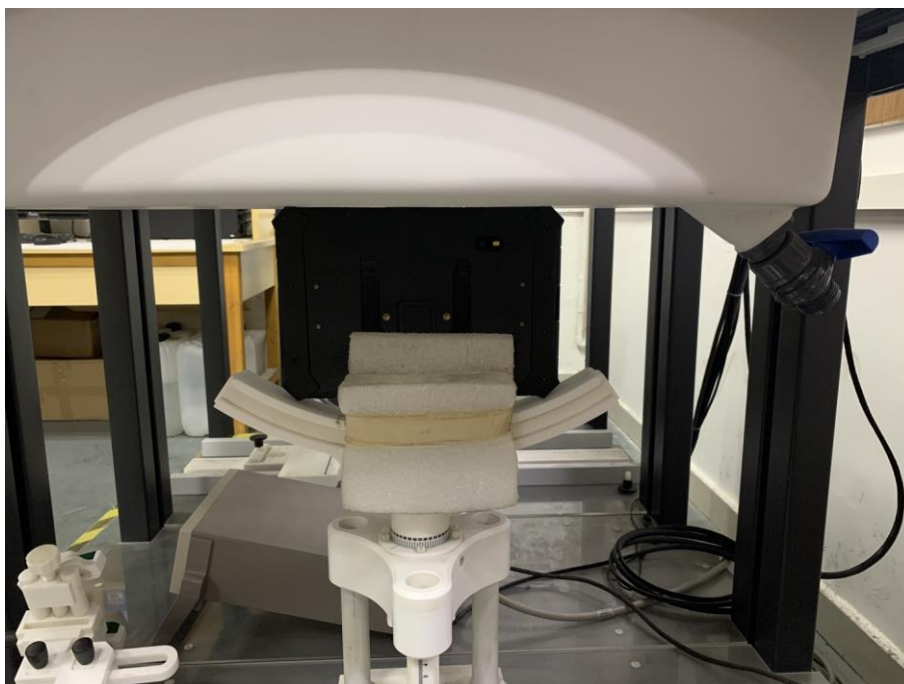

Body Bottom

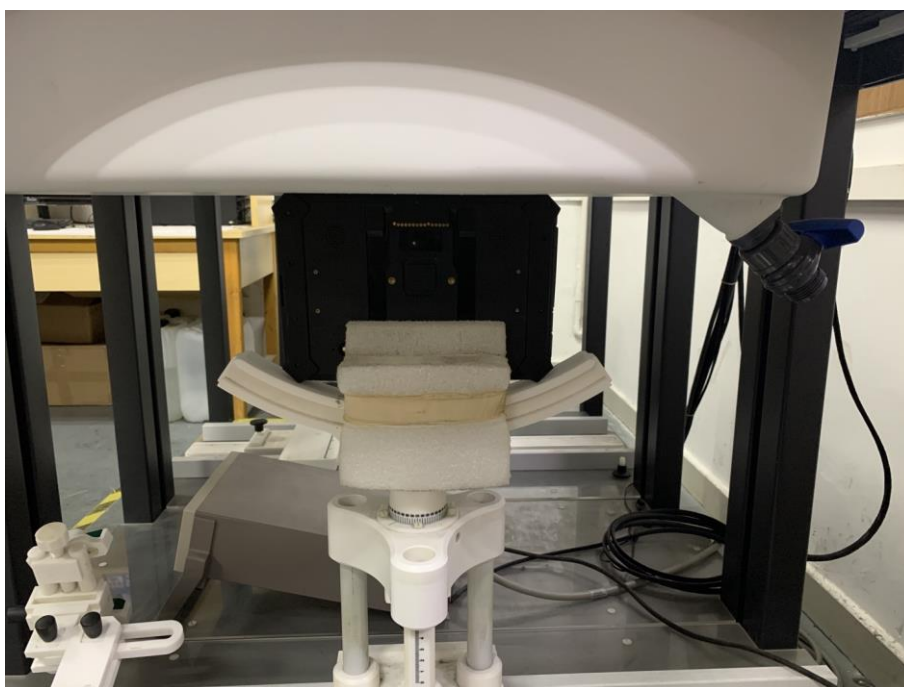

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******