




RADIO TEST REPORT

FCC ID : 2AHBN-AP27
Equipment : Wi-Fi 7 Wireless Access Point
Brand Name : Juniper
Model Name : AP27, AP27E
Applicant : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089
USA
Manufacturer : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089
USA
Standard : 47 CFR FCC Part 15.407

The product was received on Apr. 28, 2026, and testing was started from May 12, 2026 and completed on Aug. 14, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

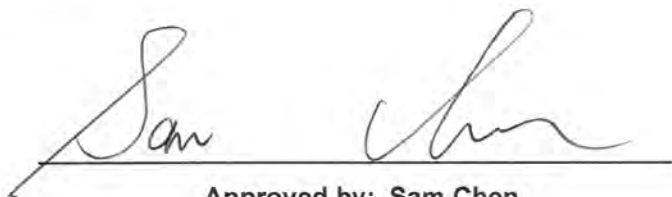

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	18
1.3 Testing Location Information	18
1.4 Measurement Uncertainty	19
2 Test Configuration of EUT.....	20
2.1 Test Channel Mode	20
2.2 The Worst Case Measurement Configuration	25
2.3 EUT Operation during Test	27
2.4 Accessories	27
2.5 Support Equipment.....	28
2.6 Test Setup Diagram	29
3 Transmitter Test Result	31
3.1 Emission Bandwidth	31
3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	33
3.3 Peak Power Spectral Density (E.I.R.P.)	36
3.4 Unwanted Emissions.....	39
4 Test Equipment and Calibration Data	43
Appendix A. Test Results of Emission Bandwidth	
Appendix B. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix C. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix D. Test Results of Unwanted Emissions	
Appendix E. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.3	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.3	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen**Report Producer: Sharon Jiang**



1 General Description

1.1 Information

1.1.1 RF General Information

For Indoor Access Point:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7095	1-229 [58]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

For Radio 0:

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	802.11 be EHT320	320	2TX
	802.11 be EHT320-BF	320	2TX

For Scanning Radio 3:

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 a	20	1TX

**For Standard Power Access Point:**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6105-6265	31-63 [2]

For Radio 0:

Band	Mode	BWch (MHz)	Nant
5925-6425	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	802.11 be EHT320	320	2TX
	802.11 be EHT320-BF	320	2TX



Band	Mode	BWch (MHz)	Nant
6525-6875	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX

For Scanning Radio 3:

Band	Mode	BWch (MHz)	Nant
5925-6425	802.11 a	20	1TX
6525-6875	802.11 a	20	1TX

MRU (static preamble puncturing)
For Multi_RU/Puncturing:

RU-tone	Configuration	Bandwidth [MHz]				6GHz Test CH	
		80				UNII-5 CH7	UNII-8 CH215
484+242	1		242		484	–	V
	2	242			484	V	V
	3		484			V	V
	4		484	242		V	–

RU-tone	Configuration	Bandwidth [MHz]				6GHz Test CH	
		160				UNII-5 CH15	UNII-8 CH207
996+484	1		484		996	–	V
	2	484			996	V	V
	3		996		484	V	V
	4		996	484		V	–
996+484+242	1		242	484	996	–	V
	2	242		484	996	V	V
	3		484	242	996	V	V
	4		484	242	996	V	V
	5		996		242	484	V
	6		996	242		484	V
	7		996	484		242	V
	8		996	484	242		–

RU-tone	Configuration	Bandwidth [MHz]				6GHz Test CH	
		320				UNII-5 CH31	UNII-8 CH191
2×996+484	1		484	996	996	–	–
	2	484		996	996	V	–
	3		996		484	V	–
	4		996	484	996	V	–
	5		996	996		V	–
	6		996	996	484	V	–
	7			484	996	996	–
	8		484		996	996	–
	9			996		484	996
	10			996	484	996	–
	11			996	996		484
	12			996	996	484	–
3×996	1			996		996	–
	2		996		996	996	V
	3		996		996	996	V
	4		996		996	996	V
3×996+484	1		484	996		996	–
	2	484		996		996	V
	3		996		484	996	V
	4		996	484	996	996	V
	5		996	996		484	996
	6		996	996	484	996	V
	7		996	996		484	V
	8		996	996	484		–

Note:

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Worst case of MRU(static preamble puncturing) evaluation procedure**

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(puncturing) by conducted method and find out the MRU(puncturing) worst case configuration.
4. Follow step 3 to find the worst MRU(puncturing) configuration and perform radiated BE/RSE testing.
5. Confirm whether the worst MRU(puncturing) configuration setting in step 2 & 4 is the same. If there is a channel where the setting drops due to the test in step 4, the MRU(puncturing) conducted PSD needs to be retested.
6. Use worst configuration of MRU(puncturing) and perform MASK measurements by conducted method .


1.1.3 Antenna Information
<For EUT 1>

Ant.	RF Port					Brand Name	Model Name	Ant. Type	Connector	Gain (dBi)	Modes of Operation
	2.4G/5G	6G	IEEE 802.15.4	Bluetooth	GPS						
1	2	-	-	-	-	Juniper	AP27	PIFA	I-PEX	Note 1	WLAN 2.4GHz (Radio 2)
2	1	-	-	-	-	Juniper	AP27	PIFA	I-PEX		WLAN 5GHz UNII 1-3 (Radio 1)
3	-	2	1	-	-	Juniper	AP27	PIFA	I-PEX		WLAN 6GHz UNII 5-8 (Radio 0)
4	-	1	-	1	-	Juniper	AP27	PIFA	I-PEX		IEEE 802.15.4 (Radio 4)
5	1	1	-	-	-	Juniper	AP27, AP27E	PIFA	I-PEX		WLAN 6GHz UNII 5-8 (Radio 0)
6	-	-	-	-	1	Juniper	AP27, AP27E	PIFA	I-PEX	L1: 3.2 L5: 1.2	Bluetooth (Radio 4)
											WLAN 2.4GHz WLAN 5GHz UNII 1-3 WLAN 6GHz UNII 5-8 (Radio 3)
											GPS (Radio 5)

Note 1:

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz (Radio 2)		WLAN 5GHz UNII 1-3 (Radio 1)						
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz				
1	2.07	4.39	3.95	4.78	3.77				
2	3.16	3.08	3.92	4.68	4.27				
Ant.	WLAN 6GHz UNII 5-8 (Radio 0)				IEEE 802.15.4 (Radio 4)				
	6.175GHz	6.475GHz	6.695GHz	6.995GHz					
3	4.33	4.54	4.06	4.61	3.1				
Ant.	WLAN 6GHz UNII 5-8 (Radio 0)				Bluetooth (Radio 4)				
	6.175GHz	6.475GHz	6.695GHz	6.995GHz					
4	4.03	4.46	4.39	4.53	2.5				
Ant.	Scanning radio (Radio 3)								
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz	6.175GHz	6.475GHz	6.695GHz	6.995GHz
5	4.9	3.52	4.07	4.19	5.01	4.42	4.36	5.86	3.44



Directional Gain (dBi)				
Item	WLAN 2.4GHz (Radio 2)			
	2.45GHz			
2T1S	4.26			
2T2S	3.16			
Item	WLAN 5GHz UNII 1-3 (Radio 1)			
	5.2GHz	5.3GHz	5.6GHz	5.785GHz
2T1S	5.58	5.59	5.98	5.92
2T2S	4.39	3.95	4.78	4.27
Item	WLAN 6GHz UNII 5-8 (Radio 0)			
	6.175GHz	6.475GHz	6.695GHz	6.995GHz
2T1S	6.72	6.5	6.87	6.83
2T2S	4.33	4.54	4.39	4.61

Note 2: The above information (excepting Ant. 1-5 (WLAN) antenna gain and directional gain) was declared by Manufacturer.

Note 3: Radio 0-3: Maximum Directional Gain following KDB662911 D03.

For Radio 0:

6GHz (UNII 5-8) IEEE 802.11ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 1:

5GHz (UNII 1-3) IEEE 802.11a/n/ac/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:

2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 3(Scanning radio):

2.4GHz IEEE 802.11b/g mode (1TX/1RX)

5GHz (UNII 1-3) IEEE 802.11a mode (1TX/1RX)

6GHz (UNII 5-8) IEEE 802.11a mode (1TX/1RX)

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 4:

Bluetooth and IEEE 802.15.4 mode (1TX/1RX)

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 5:

GPS (1RX)

Only Port 1 can be used as receiving antenna.


<For EUT 2>

Ant.	RF Port	Brand Name	Model Name	Ant. Type	Connector	Gain (dBi)	Modes of Operation
1	1 (V)	HUBBELL & AccelTex	ATS-OP-2456-81010-4RPSP-36	Patch	RPSMA	Note 1	WLAN 2.4GHz (Radio 2)
2	2 (H)	HUBBELL & AccelTex	ATS-OP-2456-81010-4RPSP-36	Patch	RPSMA		WLAN 5GHz UNII 1-3 (Radio 1)
3	1 (V)	HUBBELL & AccelTex	ATS-OP-2456-81010-4RPSP-36	Patch	RPSMA		<External antenna>
4	2 (H)	HUBBELL & AccelTex	ATS-OP-2456-81010-4RPSP-36	Patch	RPSMA		WLAN 6GHz UNII 5-8 (Radio 0)
5	1	Juniper	AP27, AP27E	PIFA	I-PEX		<External antenna>
6	1	Juniper	AP27, AP27E	PIFA	I-PEX	2.5	WLAN 2.4GHz WLAN 5GHz UNII 1-3 WLAN 6GHz UNII 5-8 (Radio 3)
7	1	Juniper	AP27, AP27E	PIFA	I-PEX	3.1	<Internal antenna>
8	1	Juniper	AP27, AP27E	PIFA	I-PEX	L1: 3.2 L5: 1.2	Bluetooth (Radio 4)
							IEEE 802.15.4 (Radio 4)
							<Internal antenna>
							GPS (Radio 5)
							<Internal antenna>

Note 1:

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz (Radio 2)			WLAN 5GHz UNII 1-3 (Radio 1)					
	2.45GHz			5.2GHz	5.3GHz	5.6GHz		5.785GHz	
1	8			10	10	10		10	
2	8			10	10	10		10	
Ant.	WLAN 6GHz UNII 5-8 (Radio 0)								
	6.175GHz		6.475GHz		6.695GHz		6.995GHz		
3	10		10		10		10		
4	10		10		10		10		
Ant.	Scanning radio (Radio 3)								
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz	6.175GHz	6.475GHz	6.695GHz	6.995GHz
5	4.9	3.52	4.07	4.19	5.01	4.42	4.36	5.86	3.44



Ant.	Cable Loss (dB)				
	WLAN 2.4GHz (Radio 2)	WLAN 5GHz UNII 1-3 (Radio 1)			
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz
1	0.4	0.5	0.6	0.6	0.6
2	0.4	0.5	0.6	0.6	0.6
Ant.	WLAN 6GHz UNII 5-8 (Radio 0)				
	6.175GHz	6.475GHz	6.695GHz	6.995GHz	
	0.6	0.7	0.7	0.7	
4	0.6	0.7	0.7	0.7	

Ant.	Net Gain (dBi)				
	WLAN 2.4GHz (Radio 2)	WLAN 5GHz UNII 1-3 (Radio 1)			
	2.45GHz	5.2GHz	5.3GHz	5.6GHz	5.785GHz
1	7.6	9.5	9.4	9.4	9.4
2	7.6	9.5	9.4	9.4	9.4
Ant.	WLAN 6GHz UNII 5-8 (Radio 0)				
	6.175GHz	6.475GHz	6.695GHz	6.995GHz	
	9.4	9.3	9.3	9.3	
4	9.4	9.3	9.3	9.3	

Note 2: The above information (excepting Ant. 5 antenna gain) was declared by Manufacturer.

Note 3: V indicates that the antenna is vertically polarized.

H indicates that the antenna is horizontally polarized.

Note 4: The antenna 1~4 are the cross-polarized antenna; it doesn't need to evaluate array gain

Note 5:

For Radio 0:

6GHz (UNII 5-8) IEEE 802.11ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 1:

5GHz (UNII 1-3) IEEE 802.11a/n/ac/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:

2.4GHz IEEE 802.11b/g/n/VHT/ax/be mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 3(Scanning radio):

2.4GHz IEEE 802.11b/g mode (1TX/1RX)

5GHz (UNII 1-3) IEEE 802.11a mode (1TX/1RX)

6GHz (UNII 5-8) IEEE 802.11a mode (1TX/1RX)

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 4:

Bluetooth and IEEE 802.15.4 mode (1TX/1RX)

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 5:

GPS (1RX)

Only Port 1 can be used as receiving antenna.

1.1.4 Mode Test Duty Cycle

For Full RU
<For EUT 1>
For Radio 0

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20	0.979	0.09	1.496m	1k
802.11be EHT20-BF	0.976	0.11	1.496m	1k
802.11be EHT40	0.959	0.18	780.625u	2k
802.11be EHT40-BF	0.959	0.18	780.313u	2k
802.11be EHT80	0.925	0.34	409.375u	3k
802.11be EHT80-BF	0.922	0.35	409.375u	3k
802.11be EHT160	0.878	0.57	240.313u	5k
802.11be EHT160-BF	0.871	0.6	240.313u	5k
802.11be EHT320	0.824	0.84	158.75u	10k
802.11be EHT320-BF	0.824	0.84	158.75u	10k

For Scanning Radio 3

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a	0.807	0.93	128.281u	10k

<For EUT 2>
For Radio 0

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20	0.977	0.1	1.496m	1k
802.11be EHT20-BF	0.977	0.1	1.496m	1k
802.11be EHT40	0.959	0.18	780.625u	2k
802.11be EHT40-BF	0.959	0.18	780.625u	2k
802.11be EHT80	0.921	0.36	409.063u	3k
802.11be EHT80-BF	0.921	0.36	409.063u	3k
802.11be EHT160	0.877	0.57	240.313u	5k
802.11be EHT160-BF	0.877	0.57	240.313u	5k
802.11be EHT320	0.823	0.85	158.75u	10k
802.11be EHT320-BF	0.823	0.85	158.75u	10k

**For Multi_RU/Puncturing****<For EUT 1>****For Radio 0**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss 1,(M0),RU484+RU242	0.966	0.15	998.75u	2k
802.11be EHT160_Nss 1,(M0),RU996+RU484+RU242	0.966	0.15	998.75u	2k
802.11be EHT160_Nss 1,(M0),RU996+RU484	0.97	0.13	998.75u	2k
802.11be EHT320_Nss 1,(M0),3xRU996+RU484	0.966	0.15	998.75u	2k
802.11be EHT320_Nss 1,(M0),3xRU996	0.967	0.15	998.75u	2k
802.11be EHT320_Nss 1,(M0),2xRU996+RU484	0.967	0.15	998.75u	2k

<For EUT 2>**For Radio 0**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss 1,(M0),RU484+RU242	0.97	0.13	1.003m	1k
802.11be EHT160_Nss 1,(M0),RU996+RU484+RU242	0.97	0.13	1.003m	1k
802.11be EHT160_Nss 1,(M0),RU996+RU484	0.97	0.13	1.003m	1k
802.11be EHT320_Nss 1,(M0),3xRU996+RU484	0.97	0.13	1.003m	1k
802.11be EHT320_Nss 1,(M0),3xRU996	0.97	0.13	1.003m	1k
802.11be EHT320_Nss 1,(M0),2xRU996+RU484	0.97	0.13	1.003m	1k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.5 EUT Operational Condition**

EUT Power Type	From PoE	
	☒ With beamforming	☐ Without beamforming
Beamforming Function	The product has beamforming function for Radio 0 (ax/be in 6GHz) and Radio 1 (n/ac/ax/be in 5GHz), Radio 2 (n/VHT/ax/be in 2.4GHz).	
Device Type	☒ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☒ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☒ Supported for Radio 0	
	☒ Unsupported for Scanning Radio 3	
	Note: The EUT doesn't support puncturing for CBP.	
Support RU	☒ Full RU Radio 0 and Scanning Radio 3	☒ Partial RU for Radio 0
Test Software Version	For Radiated Emission TXBF mode: DOS [ver 6.1.7601] For others: accessMTool v3.3.0.9	

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

EUT	Model Name	6GHz	Wi-Fi Antenna	802.15.4 Antenna	BT Antenna	Scan Antenna	GPS Antenna
1	AP27	Support (Radio 0, 3)	Internal antenna (Radio 0~3)	the same (the only difference between two model is the cable length)	the same (the only difference between two model is the cable length)	The same	The same
2	AP27E	Support (Radio 0, 3)	external antenna (Radio 0~2) Internal antenna (Radio 3)	the same (the only difference between two model is the cable length)	the same (the only difference between two model is the cable length)	The same	The same

Note 1: All models are identical to each other in all aspects except for the listing table.

Note 2: For Radio 0, both EUTs were selected for testing.

For Scanning Radio 3, EUT 1 was selected as the representative model for the test.

Note 3: The above information was declared by manufacturer.

1.1.7 Table for Radio Function

Radio \ Function	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	IEEE 802.15.4	GPS
0	-	-	V (UNII 5~8)	-	-	-
1	-	V (UNII 1-3)	-	-	-	-
2	V	-	-	-	-	-
3 (Scanning radio)	V	V (UNII 1-3)	V (UNII 5~8)	-	-	-
4	-	-	-	V	V	-
5	-	-	-	-	-	V

Note 1: For WLAN 2.4GHz: The Radio 2 and Radio 3 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 5GHz: The Radio 1 and Radio 3 (Scanning radio) can't operate at the same frequency simultaneously.

For WLAN 6GHz: The Radio 0 and Radio 3 (Scanning radio) can't operate at the same frequency simultaneously.

Note 2: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR5N0636AC.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding the Standard Power Access Point for UNII-5, 7 2. Enable the 6GHz function of Radio 0 of EUT 2 for Standard Power Access Point.	1. Emission Bandwidth 2. Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) 3. Peak Power Spectral Density (E.I.R.P.) 4. Unwanted Emissions above 1GHz



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)				
(TAF: 3787) TEL: 886-3-656-9065 FAX: 886-3-656-9085				
Test site Designation No. TW3787 with FCC.				
Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.				

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (EUT 1_Other tests)	TH01-CB	Edmund Tsai	20.5~21 / 63~67	May 12, 2026
RF Conducted (EUT 1_Multi_RU/Puncturing)	TH01-CB	Edmund Tsai	20.5~21 / 63~67	Aug. 12, 2026
RF Conducted (EUT 2_Other tests)	TH02-CB	Brian Sun	20.5~21 / 63~67	May 12, 2026~ May 13, 2026
RF Conducted (EUT 2_Multi_RU/Puncturing)	TH02-CB	Brian Sun	20.5~21 / 63~67	Aug. 14, 2026
Radiated above 1GHz (EUT 1_Other tests)	03CH03-CB	George Fan	24.3~24.7 / 60~66	May 14, 2026~ Aug. 14, 2026
	03CH04-CB	Stim Sung	24.4~25.0 / 60~63	
	03CH03-CB	George Fan	24.1~24.3 / 55~65	
Radiated above 1GHz (EUT 1_Multi_RU/Puncturing)	03CH01-CB	Sean Ku	24.0~24.7 / 56~61	May 14, 2026~ Aug. 14, 2026
	03CH06-CB	Jimmy Huang	23.8~25.0 / 58~67	
Radiated above 1GHz (EUT 2_Other tests)	03CH05-CB	Lex Lee	24.0~24.1 / 60~61	May 14, 2026~ Aug. 14, 2026
	03CH06-CB	Jimmy Huang	24.3~24.7 / 55~61	
Radiated above 1GHz (EUT 2_Multi_RU/Puncturing)	03CH03-CB	George Fan	23.7~24.9 / 60~63	May 14, 2026~ Aug. 14, 2026
	03CH06-CB	Jimmy Huang	24.2~24.7 / 57~67	



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%

Test Date: After May 27, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Full RU
<For EUT 1>
For Radio 0

Mode
802.11be EHT20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss1,(MCS0)_2TX
6105MHz
6265MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz



6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz

For Scanning Radio 3

Mode
802.11a_Nss1,(6Mbps)_1TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz



<For EUT 2>
For Radio 0

Mode
802.11be EHT20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz



6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz

**For Multi_RU/Puncturing****<For EUT 1>****For Radio 0**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_2TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_2TX
6105MHz

<For EUT 2>**For Radio 0**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_2TX
5985MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_2TX
6025MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX
6025MHz
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 3_2TX
6105MHz
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_2TX
6105MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth
Test Condition	Conducted measurement at transmit chains Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)
1	EUT 1_R0
2	EUT 1_R3
3	EUT 2_R0

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density (E.I.R.P.) Emission MASK
Test Condition	Conducted measurement at transmit chains
1	EUT 1_R0_Full RU
2	EUT 1_R3
3	EUT 2_R0_Full RU
4	EUT 1_R0_Multi_RU/Puncturing
5	EUT 2_R0_Multi_RU/Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
After evaluating, the worst-case axis was found as below. So the measurement will follow this same test configuration	
1	EUT 1 in Z axis_R0_Full RU
2	EUT 1 in Z axis_R3
3	EUT 2 in Y axis_R0_Full RU
4	EUT 1 in Z axis_R0_Multi_RU/Puncturing
5	EUT 2 in Y axis_R0_Multi_RU/Puncturing



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 2.4GHz+R4: Bluetooth
2	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 5GHz+R4: Bluetooth
3	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 6GHz+R4: Bluetooth
4	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 2.4GHz+R4: IEEE 802.15.4
5	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 5GHz+R4: IEEE 802.15.4
6	EUT 1_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 6GHz+R4: IEEE 802.15.4
7	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 2.4GHz+R4: Bluetooth
8	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 5GHz+R4: Bluetooth
9	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 2.4GHz+R4: IEEE 802.15.4
10	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 5GHz+R4: IEEE 802.15.4
11	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 6GHz+R4: Bluetooth
12	EUT 2_R0: 6GHz+R1: 5GHz+R2: 2.4GHz+R3: 6GHz+R4: IEEE 802.15.4
Refer to Sporton Test Report No.: FA5N0636-01 for Co-location RF Exposure Evaluation.	

Note1: R means Radio.

Note2: 16-pin connector port was used for debugging by the manufacturer only.

Note3: The PoE is used for testing purpose; it will not be sold with the EUT

Power	Brand Name	Model Name
PoE	PHIHONG	POE60U-BTA



2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "DOS [ver 6.1.7601]" to link with the remote workstation to transmit and receive packet by Wi-Fi 7 Wireless Access Point and transmit duty cycle no less than 98%.

2.4 Accessories

Accessories
Bracket*1
Antenna Bracket of External Ant. 1~4 (Used for EUT 2) / (Note)

Note: Optional, not sold with EUT



2.5 Support Equipment

For Radiated (above 1GHz):

For non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A


For beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE	PHIHONG	POE60U-BTA	N/A
C	Wi-Fi 7 Wireless Access Point	Juniper	AP27	2AHBN-AP27
D	NB	DELL	E4300	N/A


For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE60U-BTA	N/A
B	NB	Lenovo	L440	N/A

2.6 Test Setup Diagram

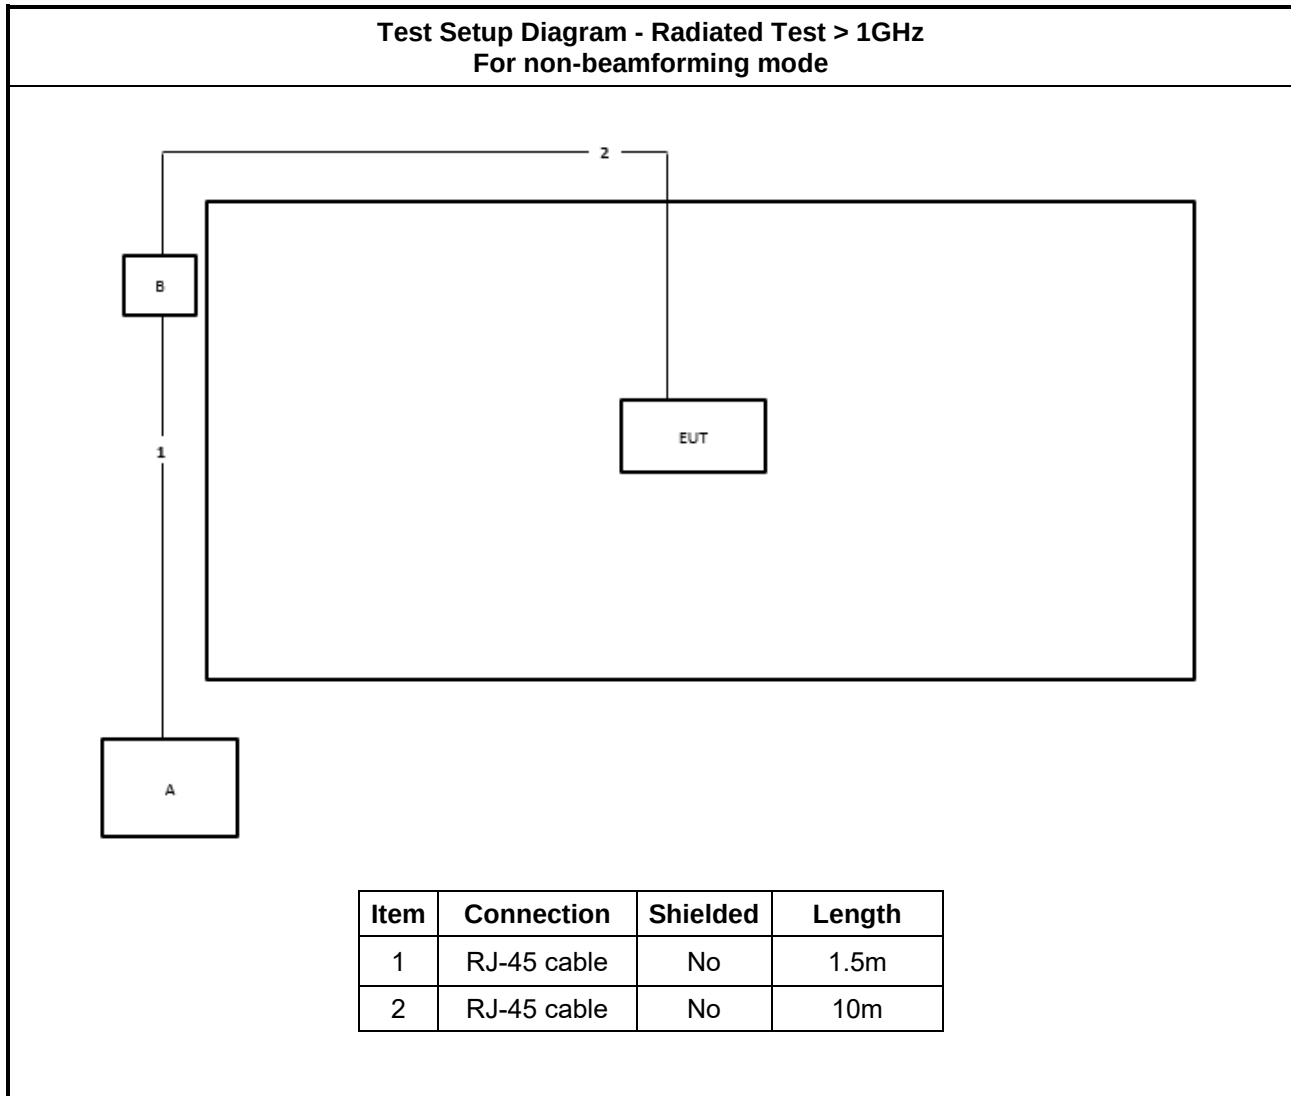

**Test Setup Diagram - Radiated Test > 1GHz
For beamforming mode**

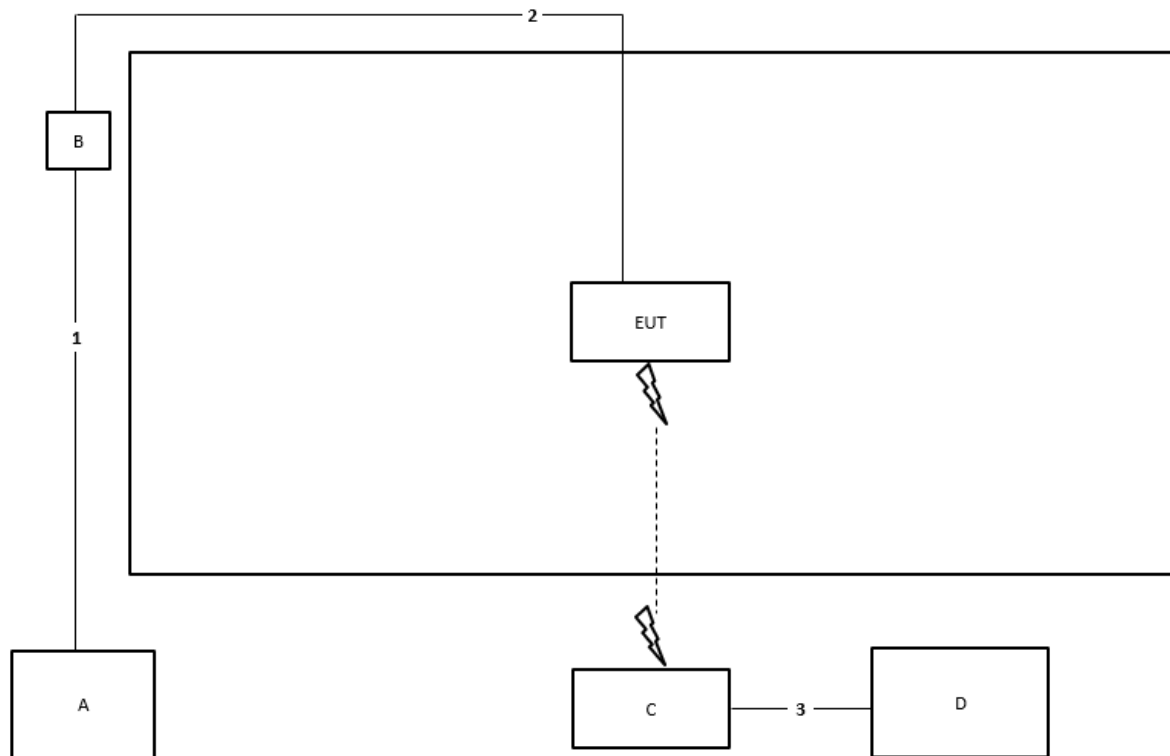

Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

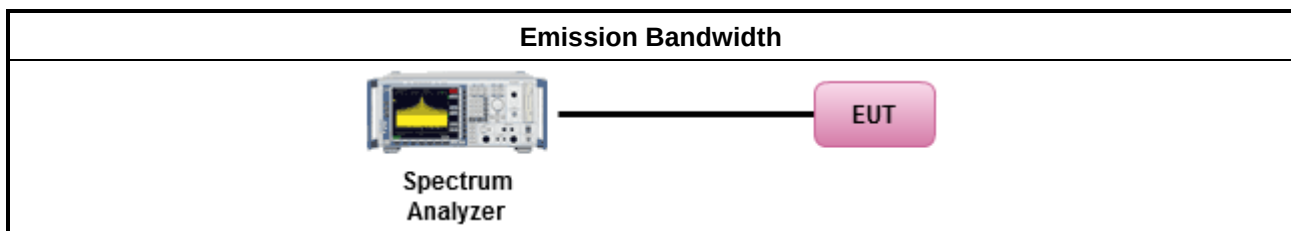



3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.2.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	

For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
For standard client devices < 30 dBm.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☒ Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.	
☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
Wideband RF power meter and average over on/off periods with duty factor	
☒ Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).	
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.2.4 Test Setup

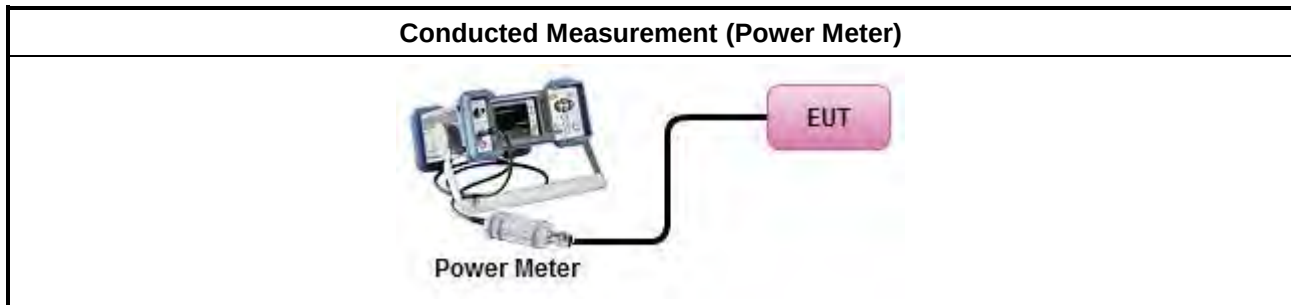

3.2.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix B



3.3 Peak Power Spectral Density (E.I.R.P.)

3.3.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

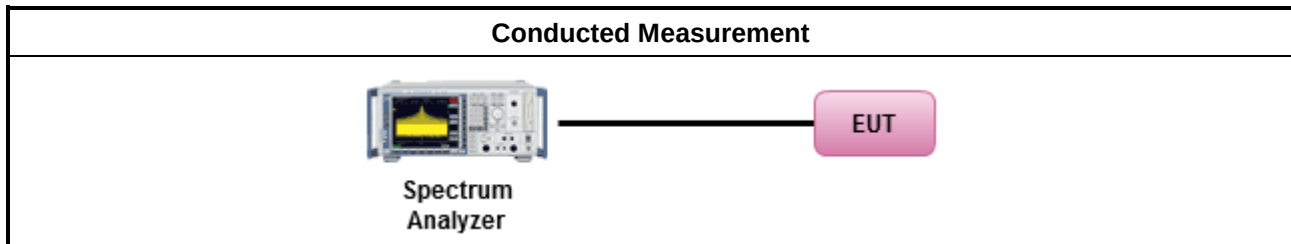

3.3.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix C

3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

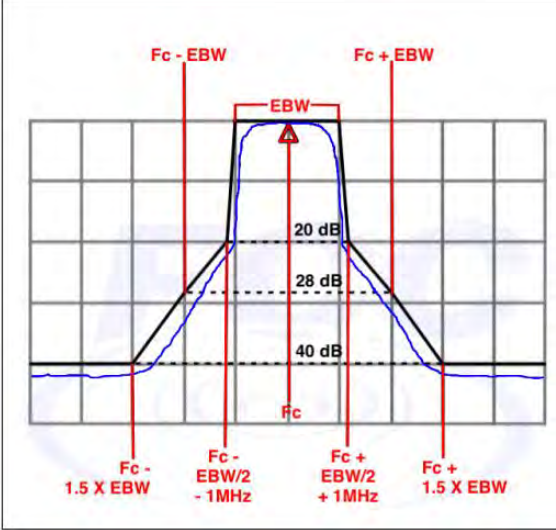Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 





3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.4.4 Test Setup

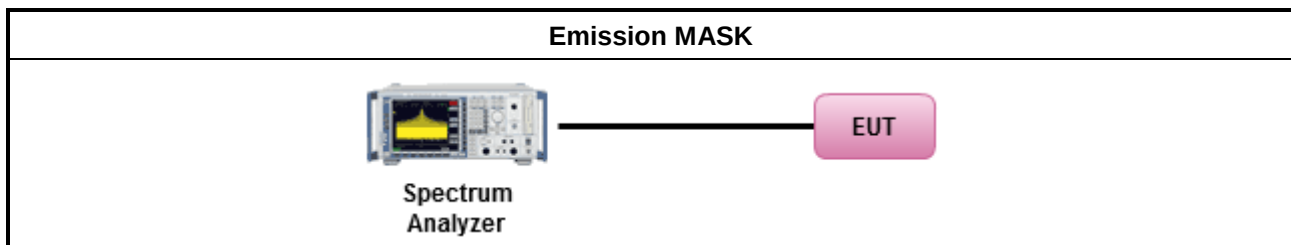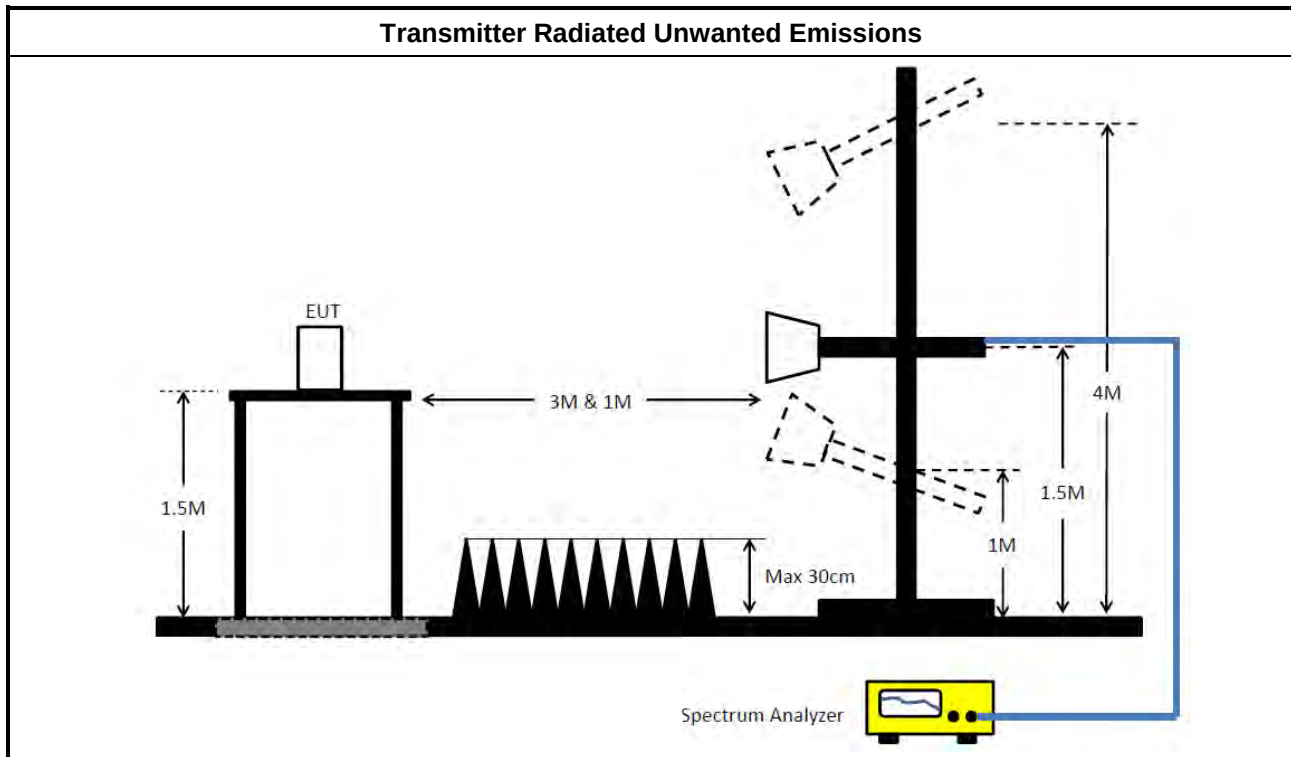

3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.4.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 02, 2026	May 01, 2027	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170586	15GHz ~ 40GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH01-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 15, 2026	May 14, 2027	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Jan. 26, 2026	Jan. 25, 2027	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 01, 2026	Apr. 30, 2027	Radiation (03CH03-CB)
Horn Antenna	ETS • Lindgren	3115	6821	750MHz~18GHz	Feb. 06, 2026	Feb. 05, 2027	Radiation (03CH03-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170586	15GHz ~ 40GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH03-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
Horn Antenna	ETS • Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 30, 2026	Mar. 29, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 06, 2025	Jun. 05, 2026	Radiation (03CH05-CB)
Horn Antenna	ETS • Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	May 08, 2026	May 07, 2027	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 25	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV3044	101320	9kHz ~ 44GHz	Aug. 07, 2025	Aug. 06, 2026	Conducted (TH01-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 30, 2026	Jun. 29, 2027	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1339408	300MHz~40GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1517009	300MHz~40GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Conducted (TH01-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jul. 01, 2025	Jun. 30, 2026	Conducted (TH02-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jul. 23, 2026	Jul. 22, 2027	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1531343	300MHz~40GHz	Aug. 29, 2025	Aug. 28, 2026	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1728001	300MHz~40GHz	Aug. 29, 2025	Aug. 28, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1–18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	39.71M	19.215M	19M2D1D	21.23M	19.015M
802.11be EHT40_Nss1,(MCS0)_2TX	76.34M	38.181M	38M2D1D	44.11M	37.781M
802.11be EHT80_Nss1,(MCS0)_2TX	177.76M	78.161M	78M2D1D	89.1M	77.261M
802.11be EHT160_Nss1,(MCS0)_2TX	284.68M	157.121M	157MD1D	190.96M	156.322M
802.11be EHT320_Nss1,(MCS0)_2TX	615.12M	317.841M	318MD1D	388.08M	316.242M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	32.065M	19.14M	19M1D1D	21.285M	19.04M
802.11be EHT40_Nss1,(MCS0)_2TX	66.88M	37.881M	37M9D1D	40.7M	37.731M
802.11be EHT80_Nss1,(MCS0)_2TX	150.7M	77.861M	77M9D1D	104.94M	77.461M
802.11be EHT160_Nss1,(MCS0)_2TX	212.08M	156.722M	157MD1D	197.12M	156.722M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	39.71M	19.215M	21.23M	19.065M
6195MHz	Pass	320M	30.36M	19.14M	33.275M	19.09M
6415MHz	Pass	320M	21.725M	19.015M	21.395M	19.04M
6535MHz	Pass	320M	30.635M	19.09M	21.285M	19.04M
6695MHz	Pass	320M	29.26M	19.14M	30.195M	19.09M
6855MHz	Pass	320M	32.065M	19.09M	28.655M	19.09M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	76.34M	38.181M	44.11M	37.831M
6205MHz	Pass	320M	68.42M	38.081M	49.83M	37.881M
6405MHz	Pass	320M	52.03M	37.781M	56.32M	37.881M
6565MHz	Pass	320M	54.89M	37.881M	44.44M	37.731M
6685MHz	Pass	320M	66.88M	37.881M	40.7M	37.831M
6845MHz	Pass	320M	64.24M	37.881M	65.89M	37.831M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	163.02M	77.861M	89.1M	77.261M
6225MHz	Pass	320M	177.76M	78.161M	103.84M	77.361M
6385MHz	Pass	320M	120.78M	77.661M	107.36M	77.361M
6625MHz	Pass	320M	150.7M	77.761M	104.94M	77.461M
6705MHz	Pass	320M	121.66M	77.461M	108.46M	77.561M
6785MHz	Pass	320M	130.46M	77.861M	108.9M	77.461M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	256.96M	157.121M	205.48M	156.522M
6185MHz	Pass	320M	258.72M	156.322M	198M	156.522M
6345MHz	Pass	320M	284.68M	157.121M	190.96M	157.121M
6665MHz	Pass	320M	212.08M	156.722M	197.12M	156.722M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	557.92M	317.841M	388.08M	316.242M
6265MHz	Pass	320M	551.76M	317.441M	615.12M	316.242M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

12/05/2026

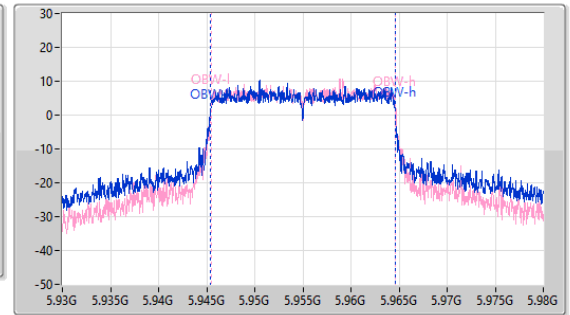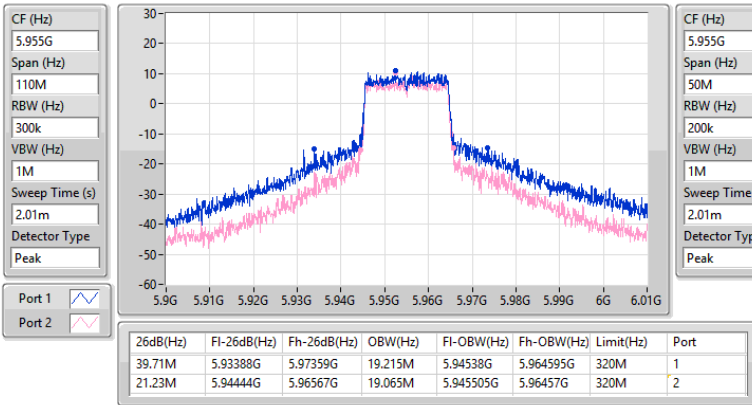

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

12/05/2026

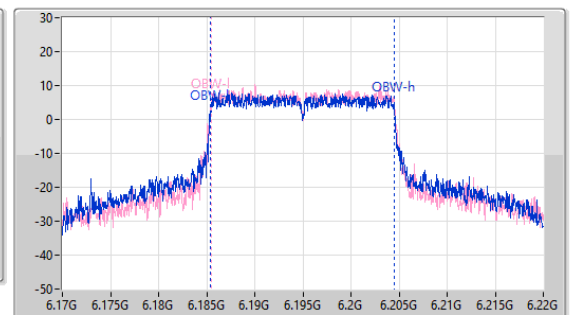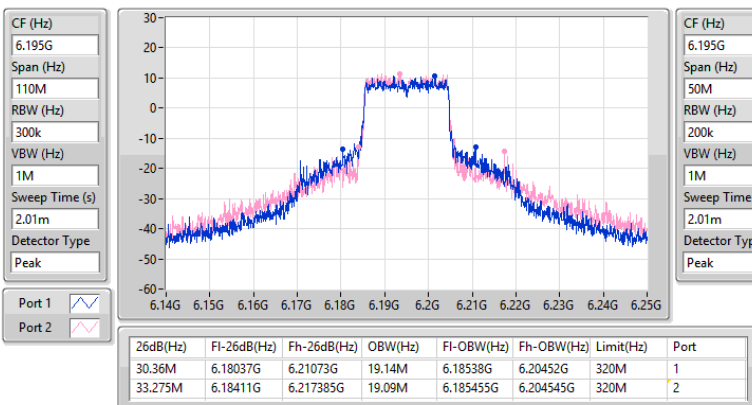


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6415MHz

12/05/2026


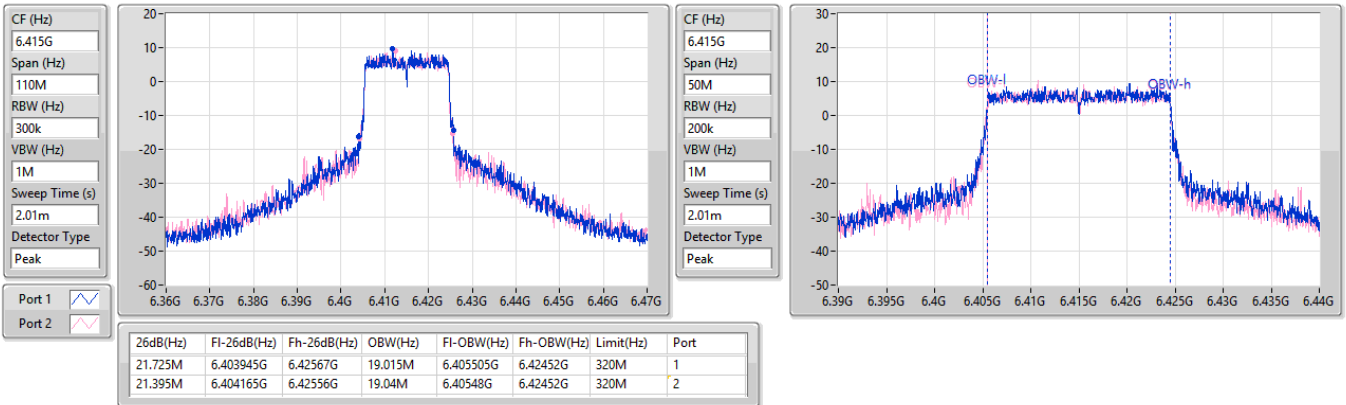

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6535MHz

12/05/2026


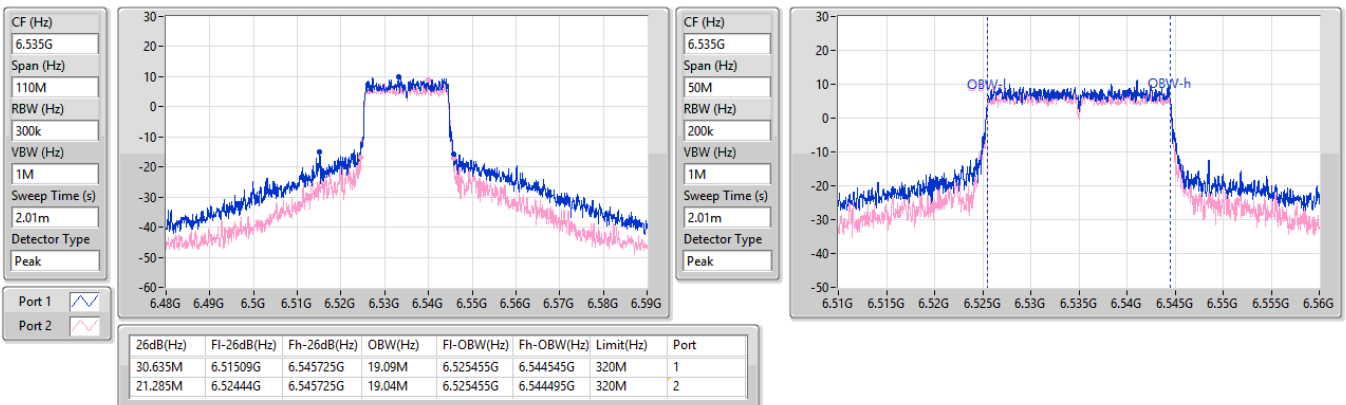


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6695MHz

12/05/2026

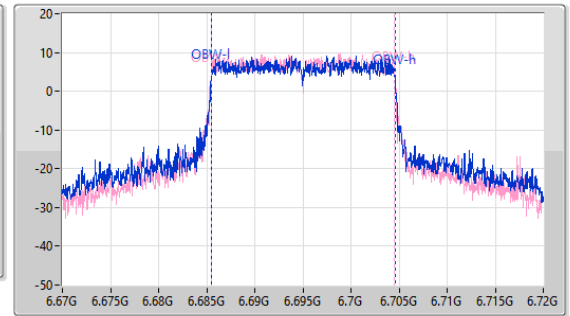
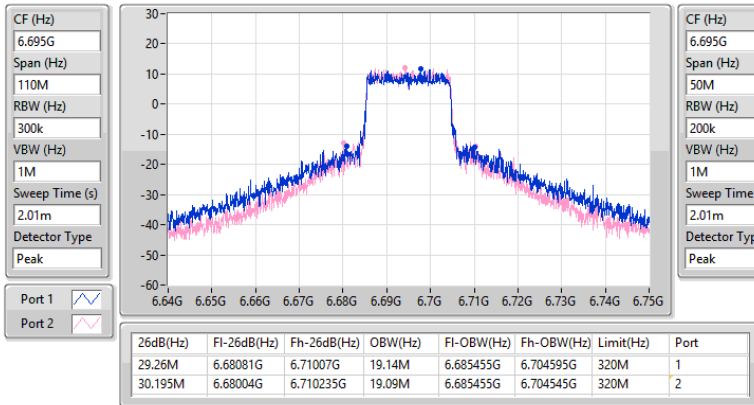

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6855MHz

12/05/2026

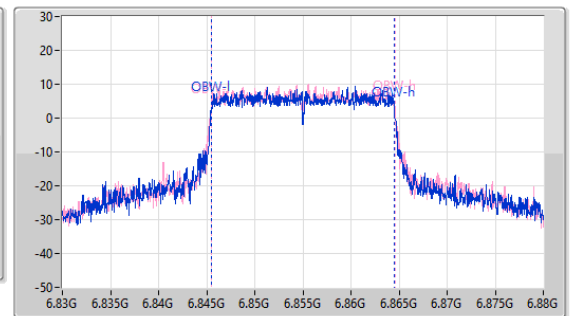
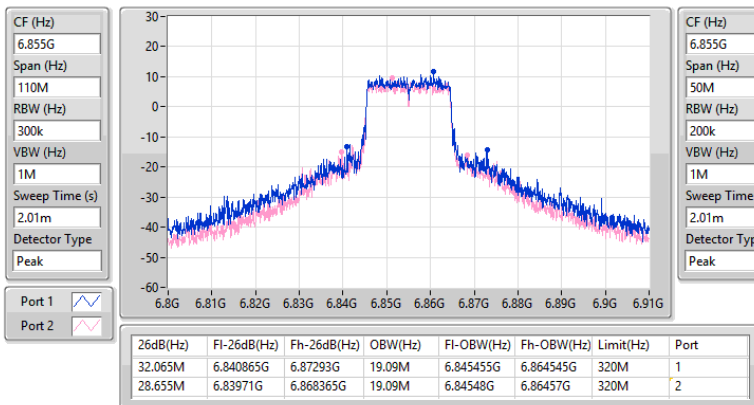


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5965MHz

12/05/2026

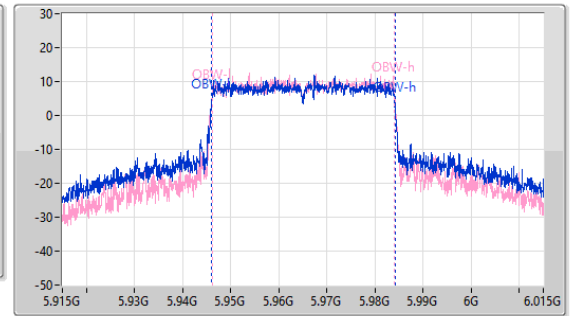
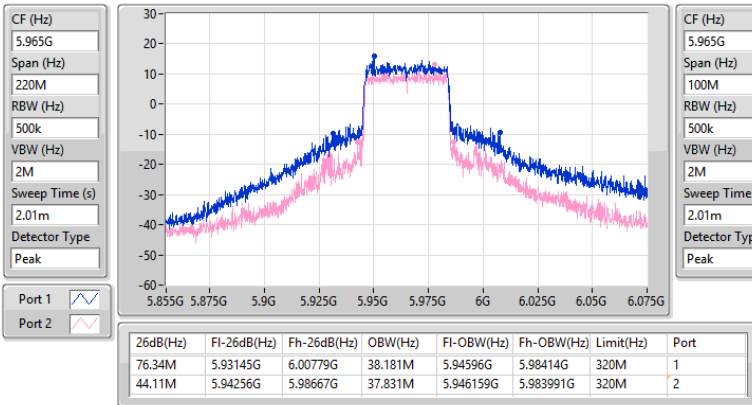

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

12/05/2026

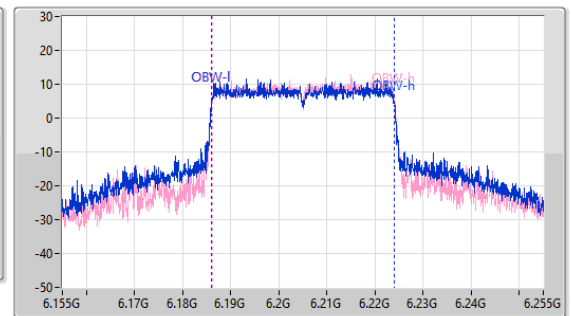
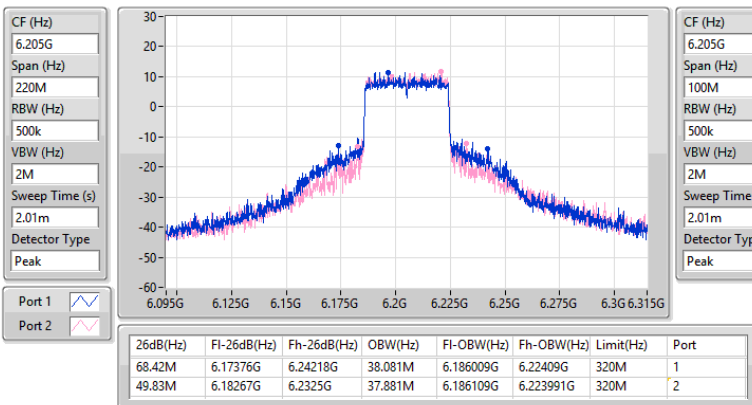


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

12/05/2026

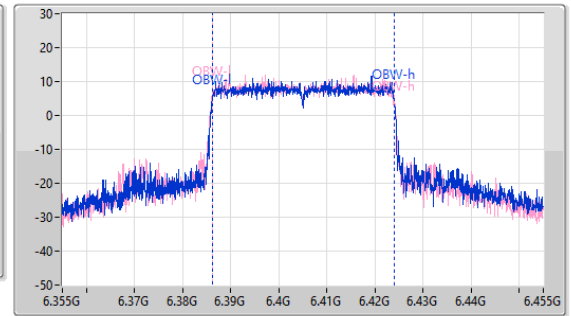
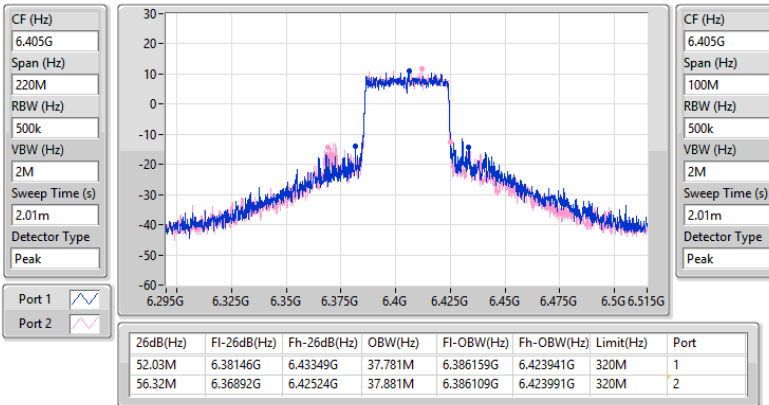

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6565MHz

12/05/2026

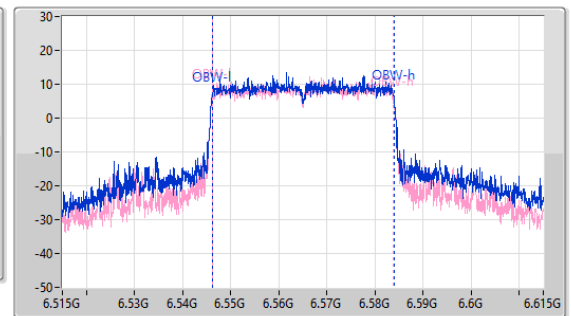
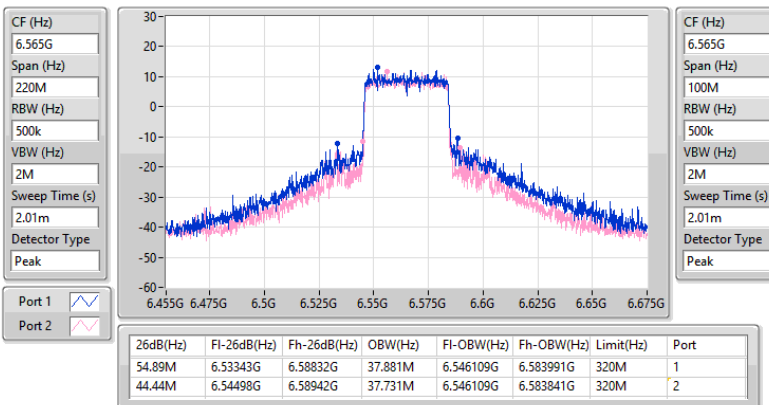


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6685MHz

12/05/2026

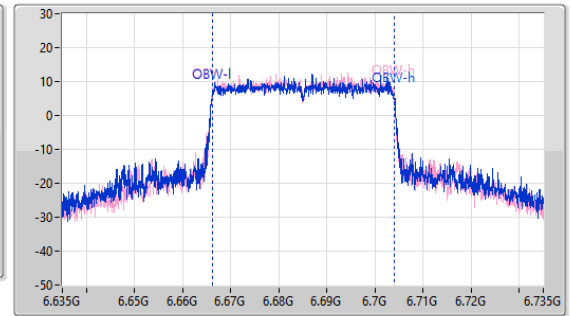
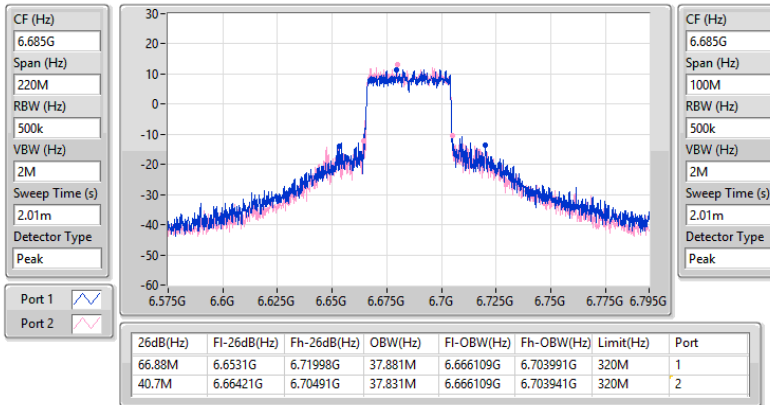

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6845MHz

12/05/2026

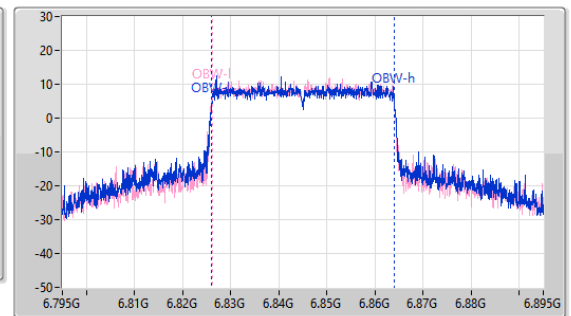
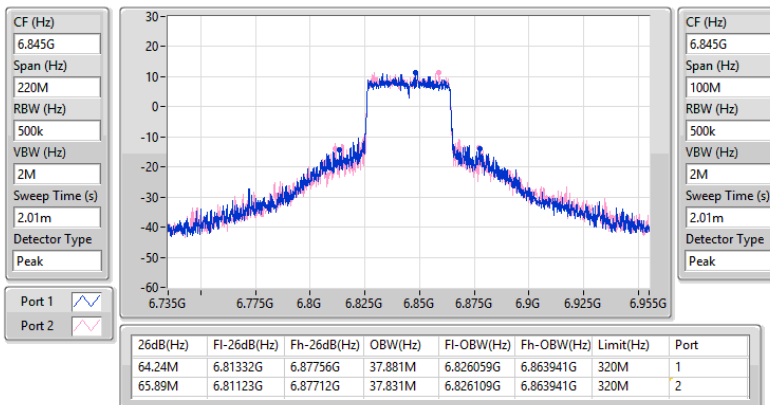


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5985MHz

12/05/2026

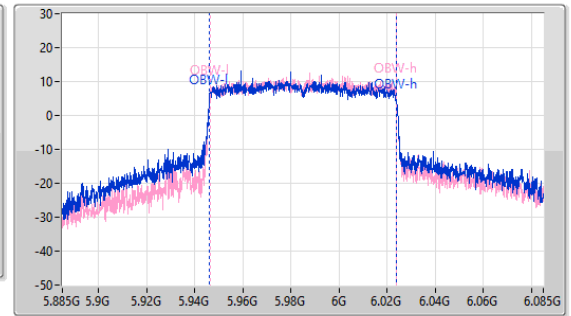
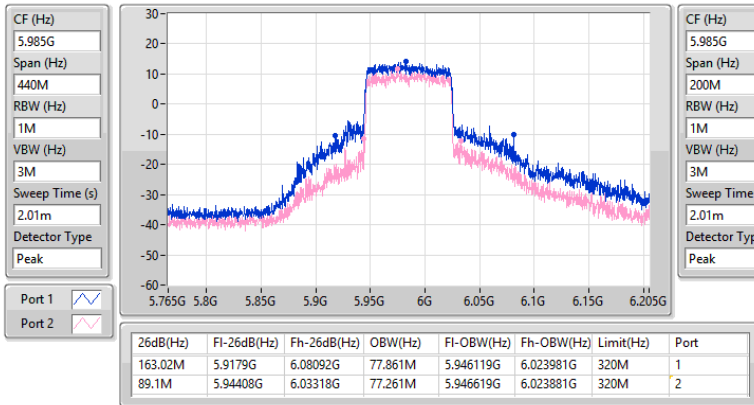

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6225MHz

12/05/2026

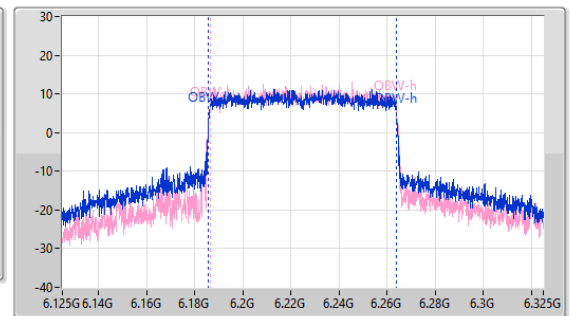
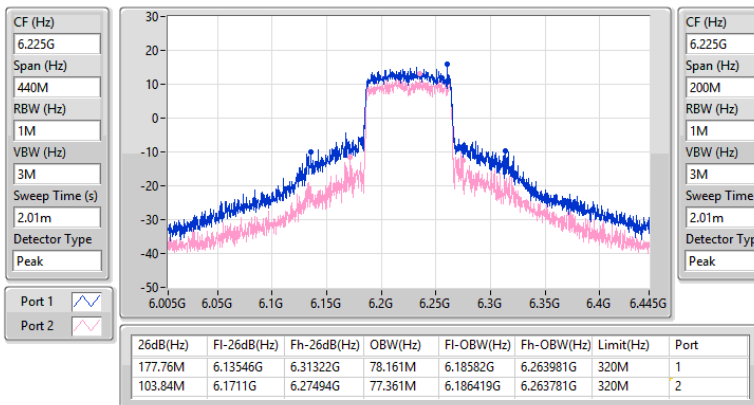


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

12/05/2026

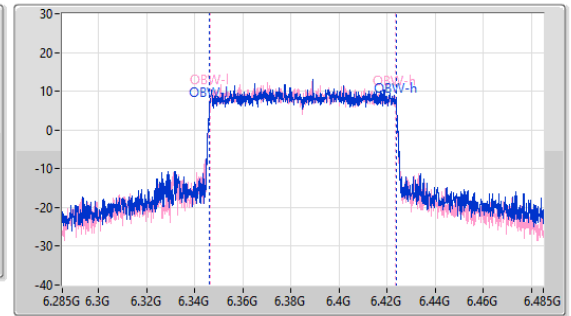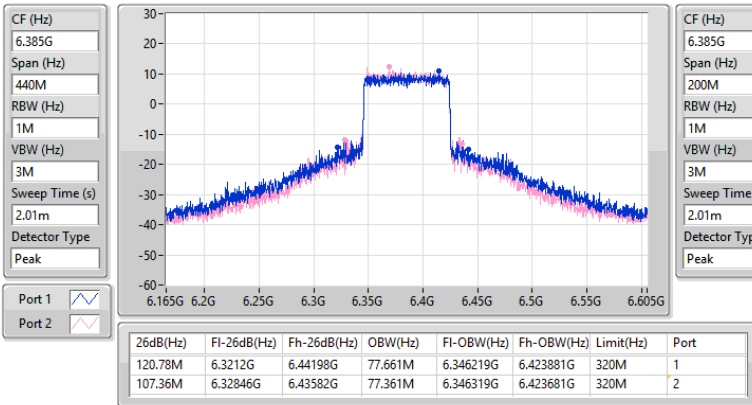

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

12/05/2026

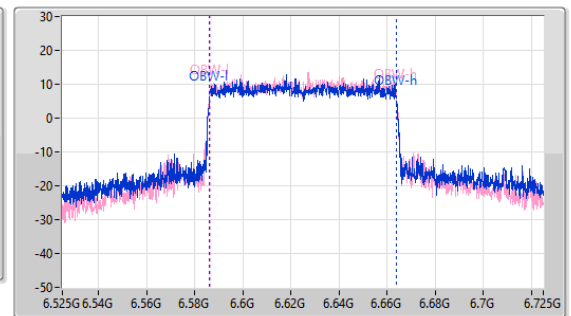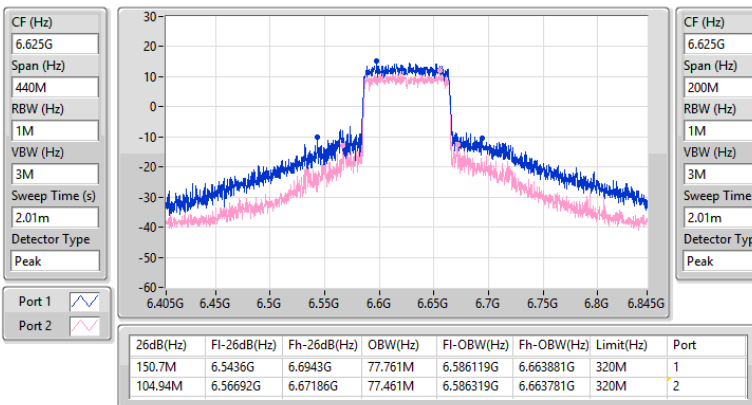


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

12/05/2026


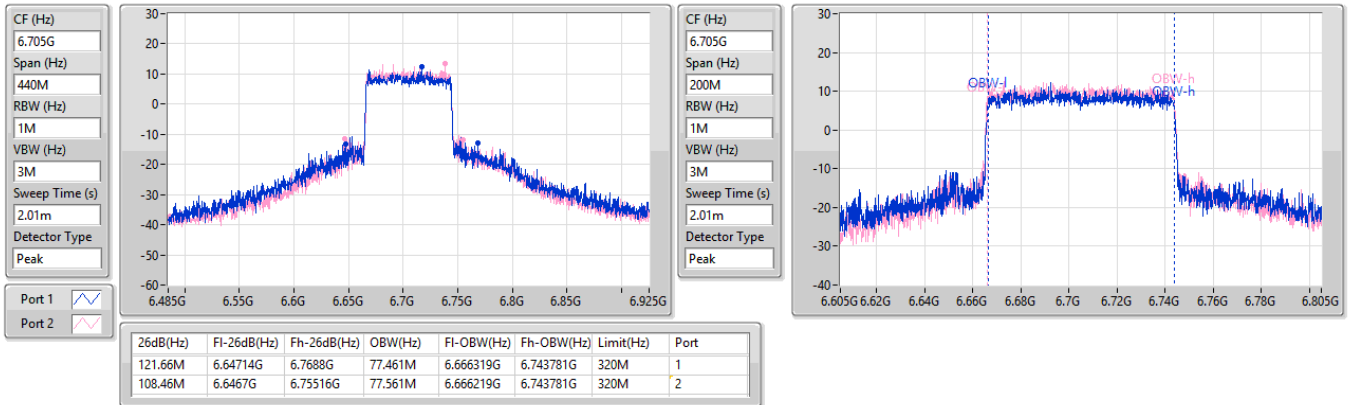

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

12/05/2026


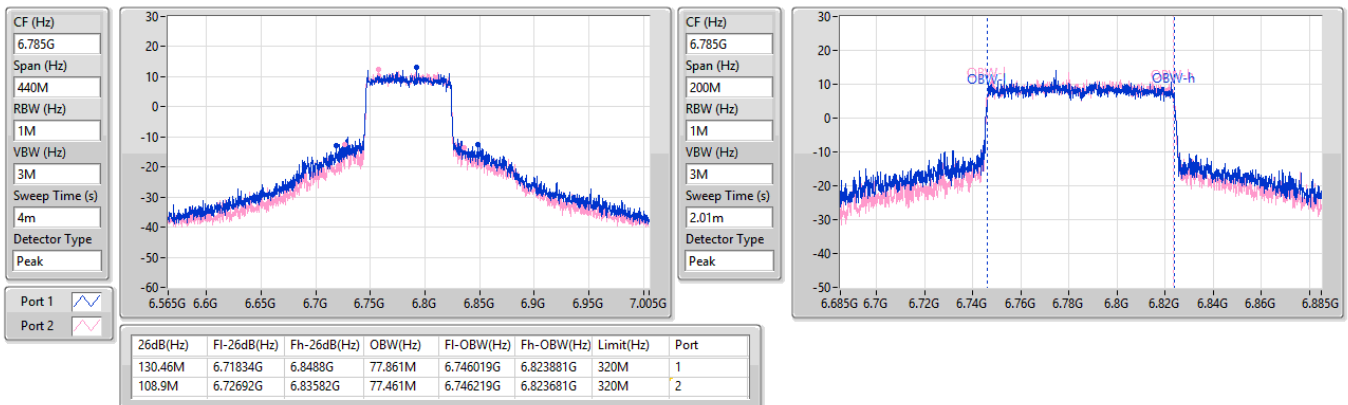


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6025MHz

12/05/2026

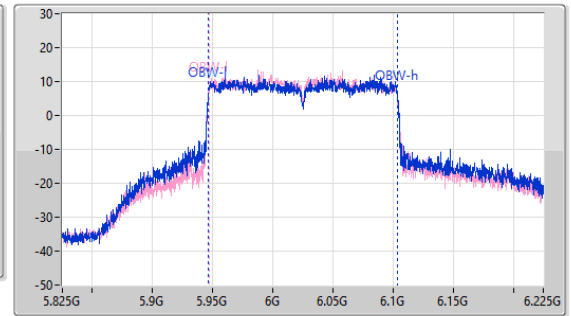
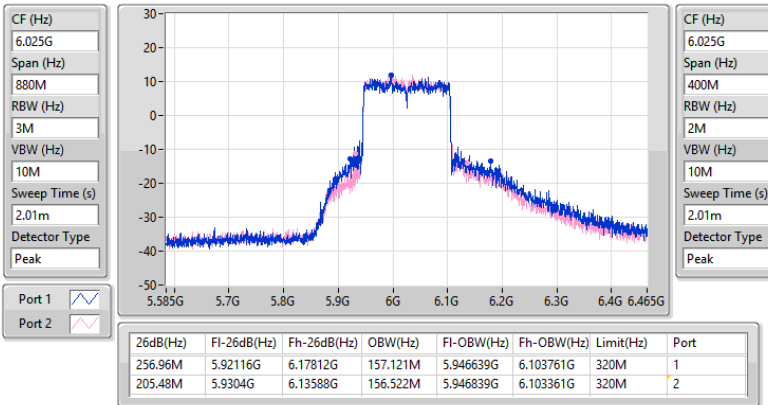

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6185MHz

12/05/2026

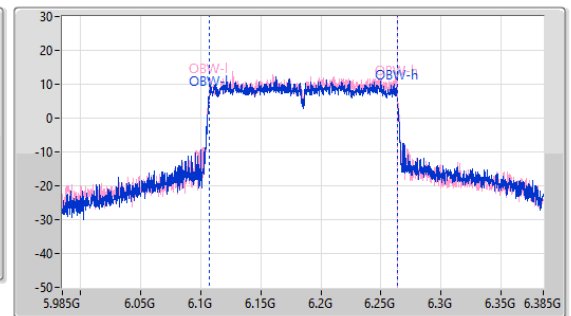
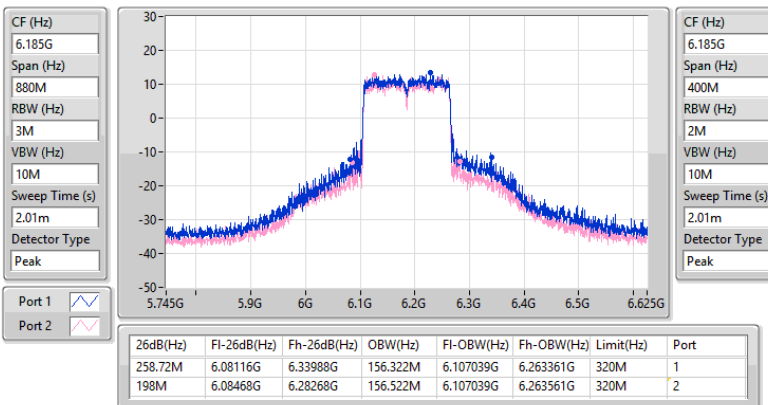


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6345MHz

12/05/2026

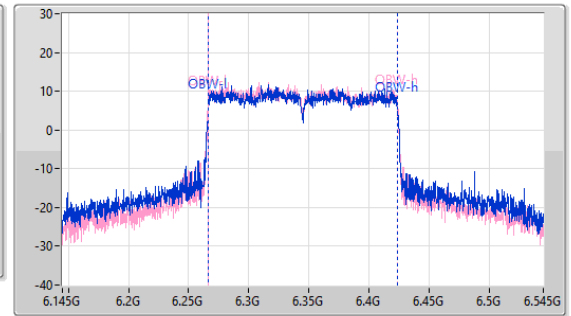
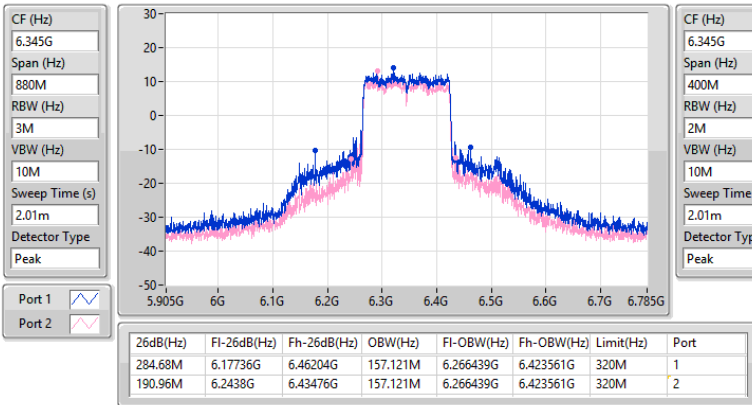

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6665MHz

12/05/2026

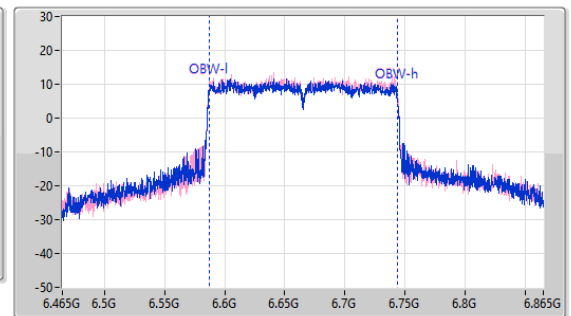
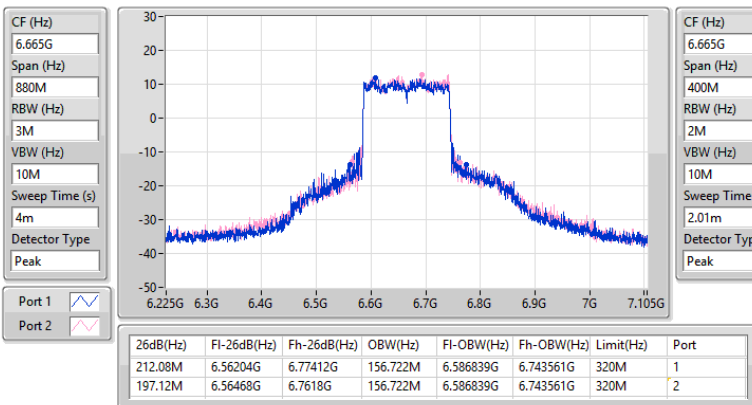


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6105MHz

12/05/2026

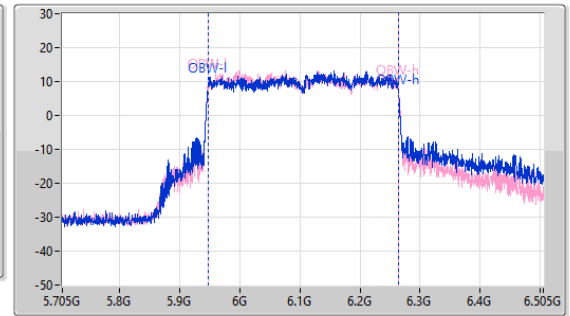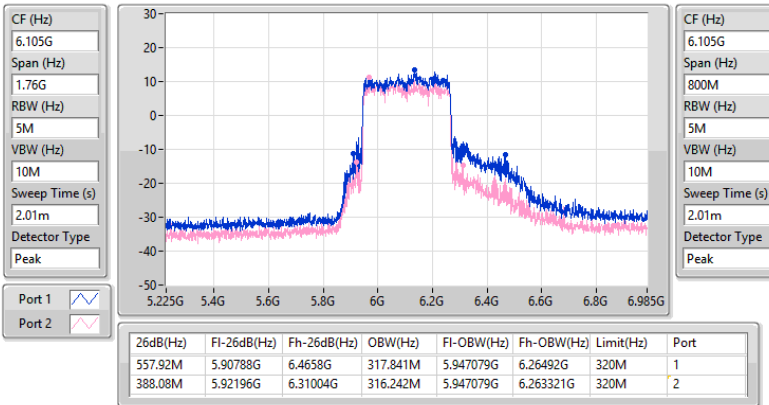
5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6265MHz

12/05/2026

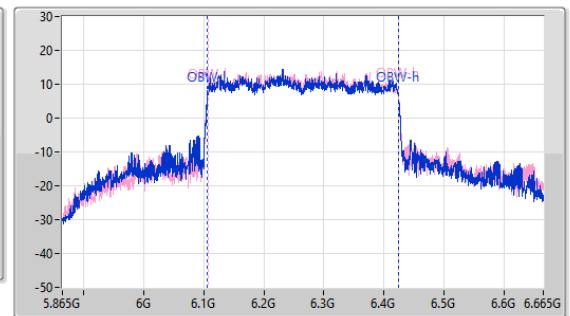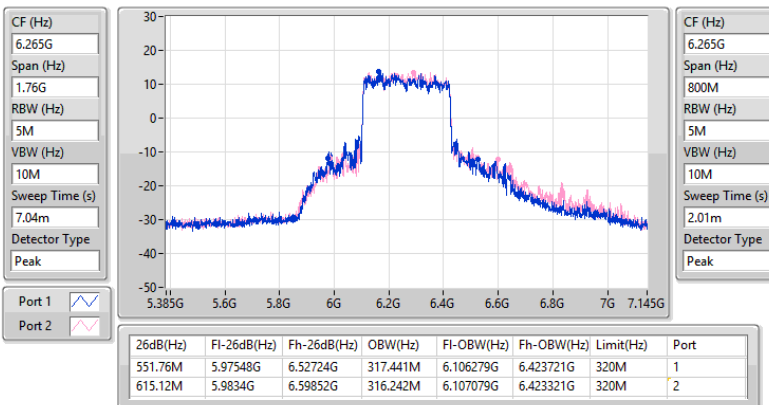

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	36.355M	17.253M	17M3D1D	25.355M	16.749M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	32.45M	17.269M	17M3D1D	26.62M	16.759M

Max-N dB = Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5955MHz	Pass	320M	25.355M	16.749M
6195MHz	Pass	320M	34.705M	16.852M
6415MHz	Pass	320M	36.355M	17.253M
6535MHz	Pass	320M	32.45M	17.269M
6695MHz	Pass	320M	31.625M	16.887M
6855MHz	Pass	320M	26.62M	16.759M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5955MHz

28/04/2026


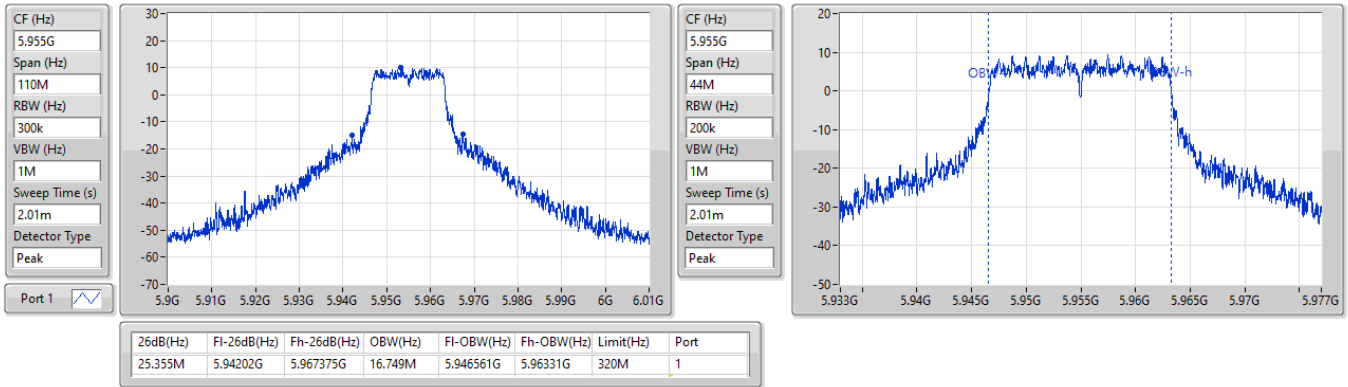

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
6195MHz

28/04/2026


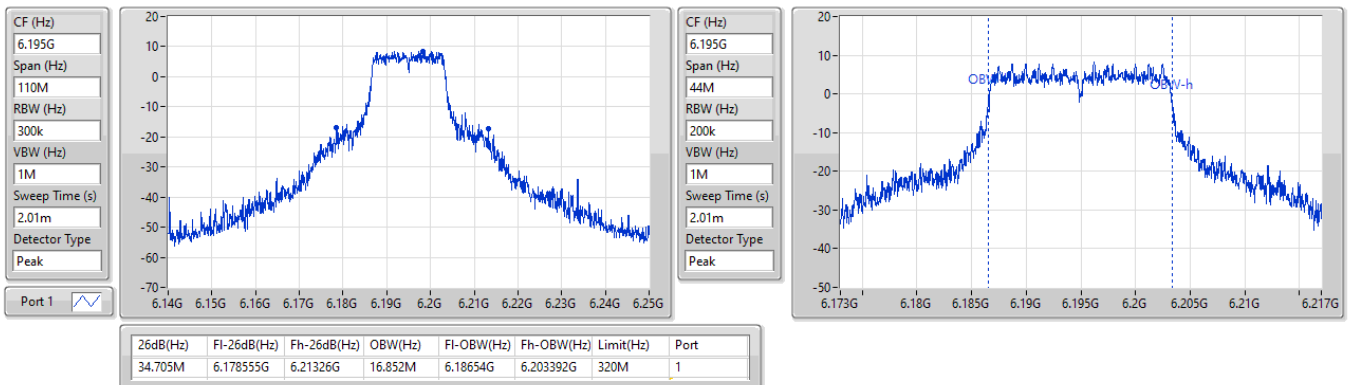


5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
6415MHz

28/04/2026

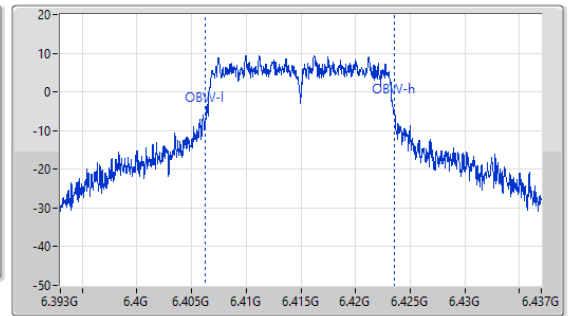
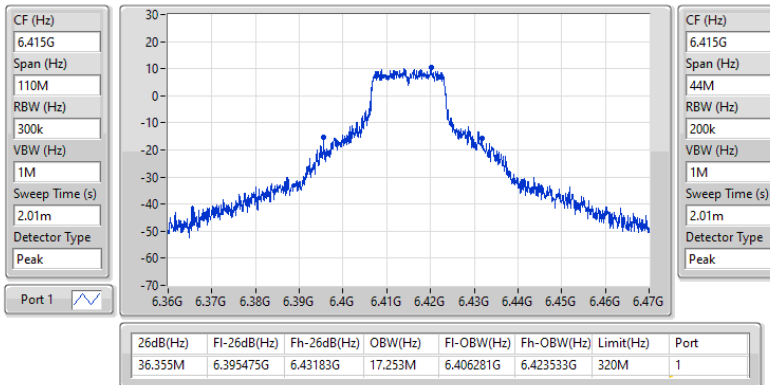

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
6535MHz

28/04/2026

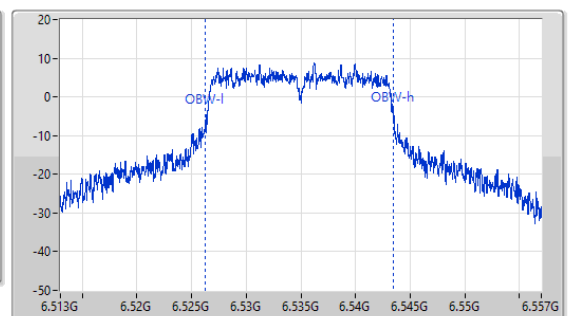
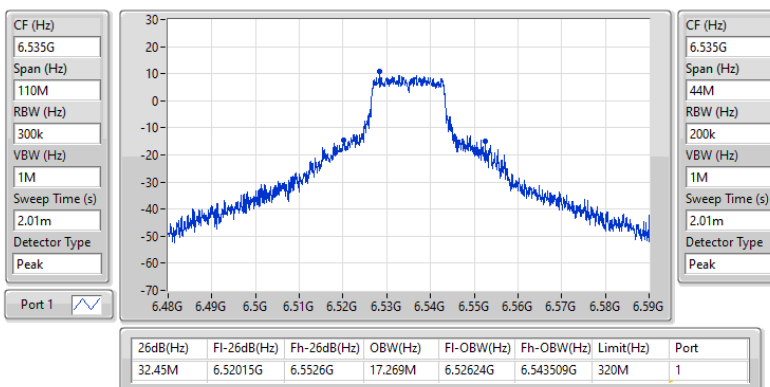


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
6695MHz

28/04/2026

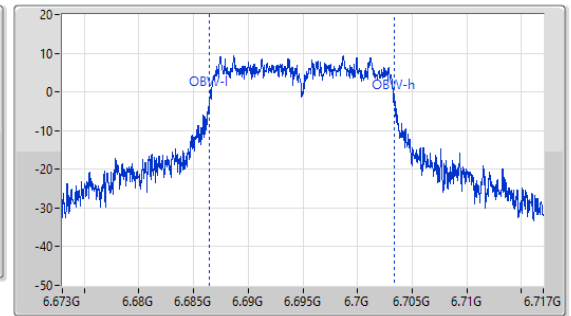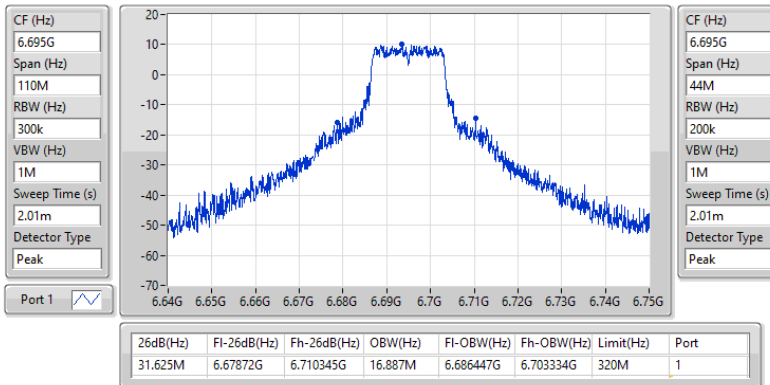
6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
6855MHz

28/04/2026

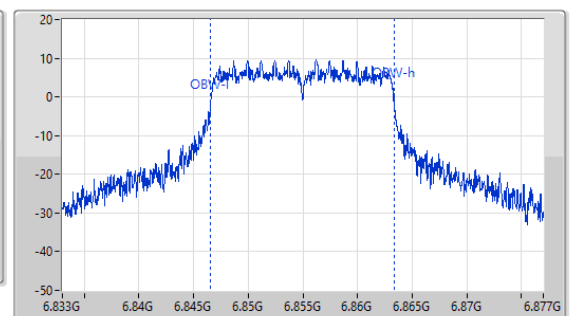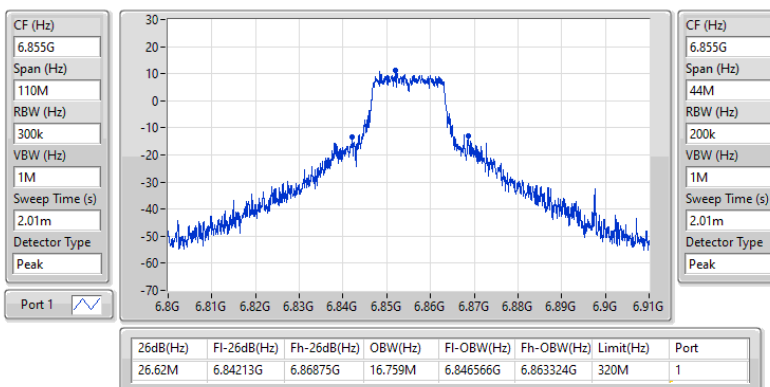

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	43.615M	19.324M	19M3D1D	21.89M	19.014M
802.11be EHT40_Nss1,(MCS0)_2TX	85.91M	38.435M	38M4D1D	50.38M	37.825M
802.11be EHT80_Nss1,(MCS0)_2TX	180.18M	78.813M	78M8D1D	107.14M	77.381M
802.11be EHT160_Nss1,(MCS0)_2TX	311.96M	157.63M	158MD1D	200.2M	156.61M
802.11be EHT320_Nss1,(MCS0)_2TX	652.08M	319.471M	319MD1D	538.56M	316.732M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	37.565M	19.321M	19M3D1D	26.675M	19.064M
802.11be EHT40_Nss1,(MCS0)_2TX	75.9M	38.265M	38M3D1D	41.58M	37.869M
802.11be EHT80_Nss1,(MCS0)_2TX	174.24M	78.024M	78M0D1D	94.16M	77.383M
802.11be EHT160_Nss1,(MCS0)_2TX	279.4M	157.184M	157MD1D	255.2M	156.857M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	40.975M	19.324M	43.615M	19.192M
6195MHz	Pass	320M	39.27M	19.23M	27.72M	19.114M
6415MHz	Pass	320M	21.89M	19.047M	23.32M	19.014M
6535MHz	Pass	320M	35.035M	19.117M	26.785M	19.064M
6695MHz	Pass	320M	37.565M	19.321M	26.675M	19.125M
6855MHz	Pass	320M	36.74M	19.196M	29.645M	19.093M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	85.91M	38.435M	70.07M	37.984M
6205MHz	Pass	320M	78.87M	38.216M	70.62M	37.874M
6405MHz	Pass	320M	50.38M	37.825M	61.71M	37.959M
6565MHz	Pass	320M	73.37M	38.056M	41.58M	37.869M
6685MHz	Pass	320M	75.9M	38.265M	62.15M	37.987M
6845MHz	Pass	320M	54.78M	38.034M	61.49M	38.023M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	160.82M	78.247M	120.78M	77.423M
6225MHz	Pass	320M	180.18M	78.813M	107.14M	77.381M
6385MHz	Pass	320M	118.14M	77.614M	108.24M	77.617M
6625MHz	Pass	320M	123.2M	77.732M	107.36M	77.535M
6705MHz	Pass	320M	174.24M	78.024M	141.9M	77.559M
6785MHz	Pass	320M	167.86M	78M	94.16M	77.383M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	311.96M	157.63M	220.44M	156.61M
6185MHz	Pass	320M	272.36M	157.429M	200.2M	156.781M
6345MHz	Pass	320M	307.56M	157.408M	275.44M	156.74M
6665MHz	Pass	320M	279.4M	157.184M	255.2M	156.857M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	608.08M	319.263M	538.56M	316.732M
6265MHz	Pass	320M	648.56M	319.471M	546.48M	317.183M
6425MHz	Pass	320M	652.08M	319.449M	627.44M	318.639M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

12/05/2026

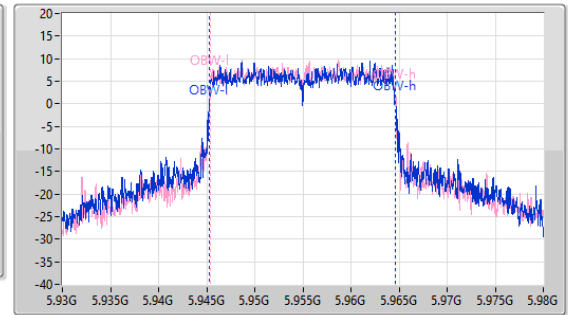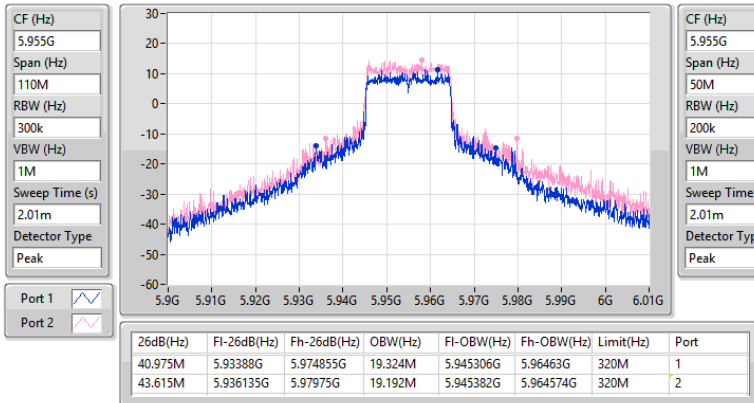
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

12/05/2026

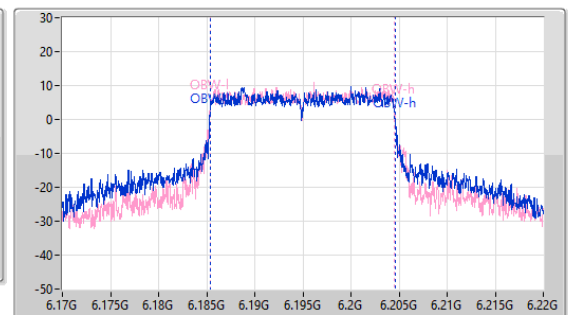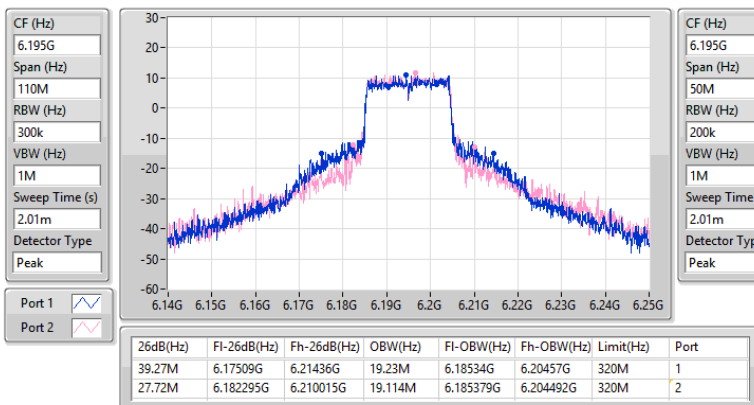


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6415MHz

12/05/2026

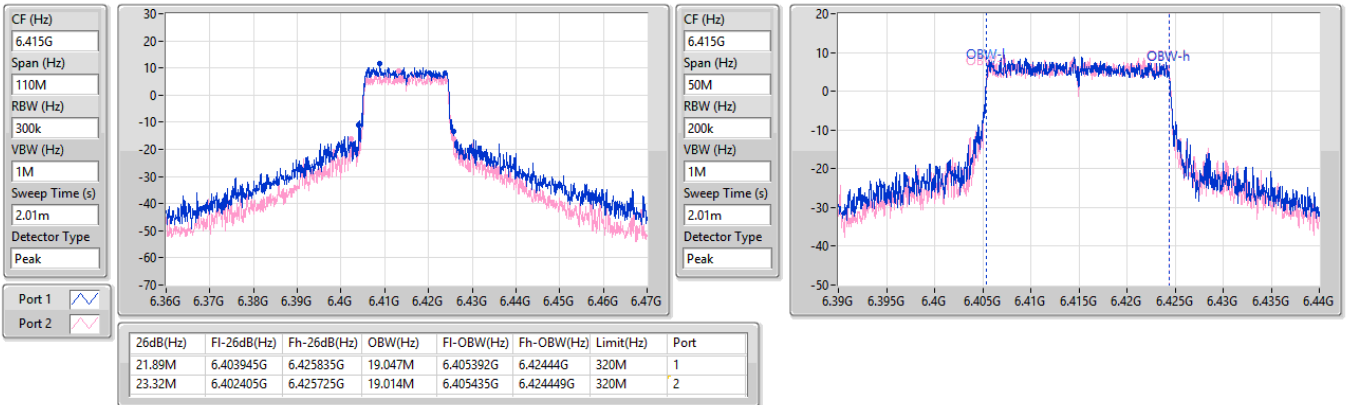


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6535MHz

12/05/2026

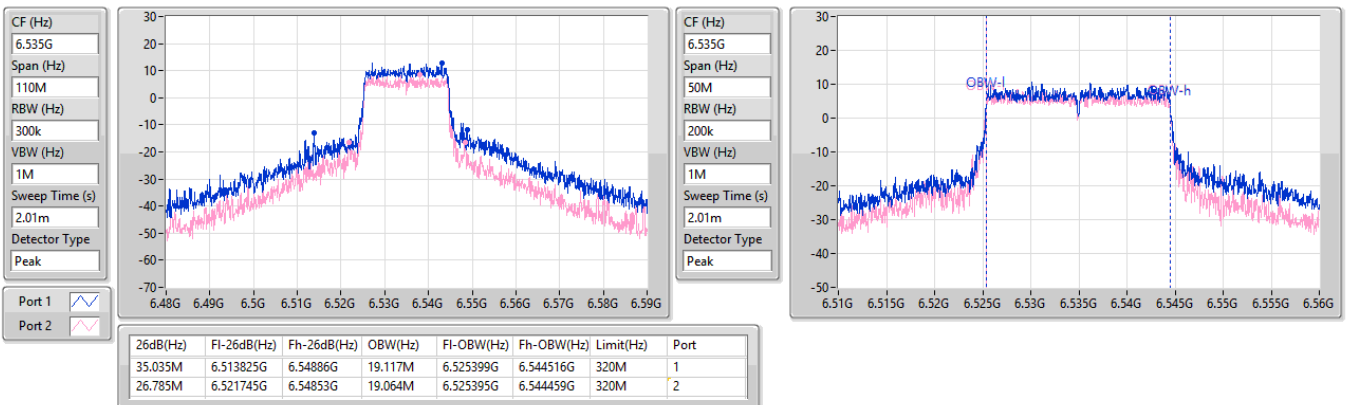


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6695MHz

12/05/2026

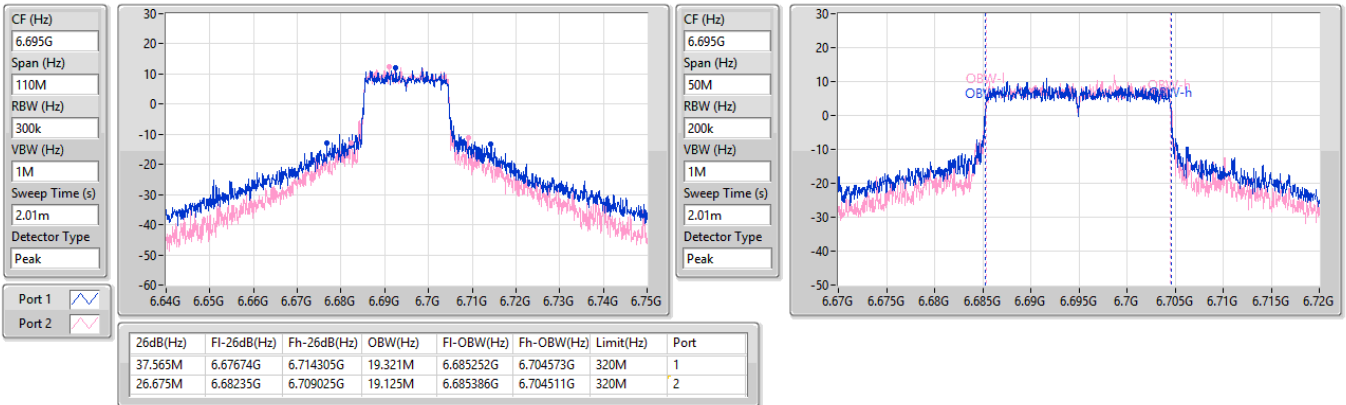


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW



6855MHz

12/05/2026


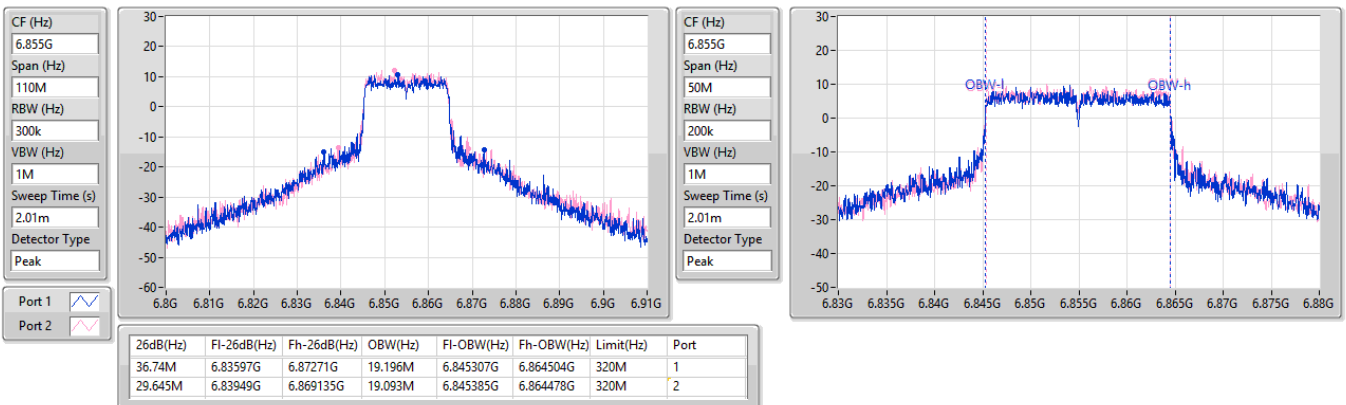


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5965MHz

12/05/2026

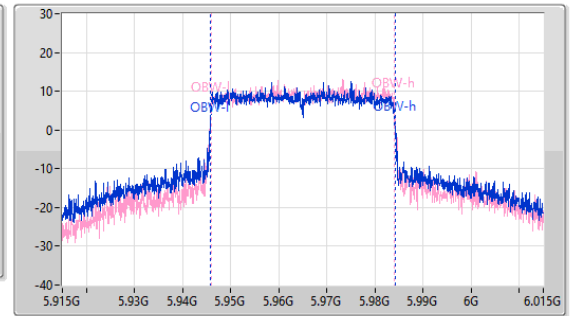
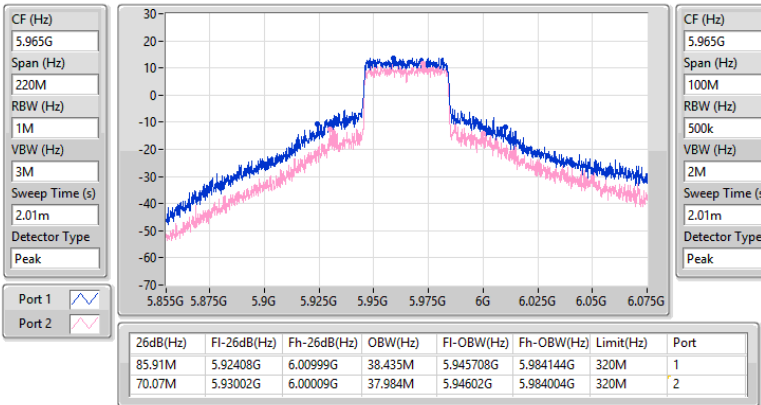

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

12/05/2026

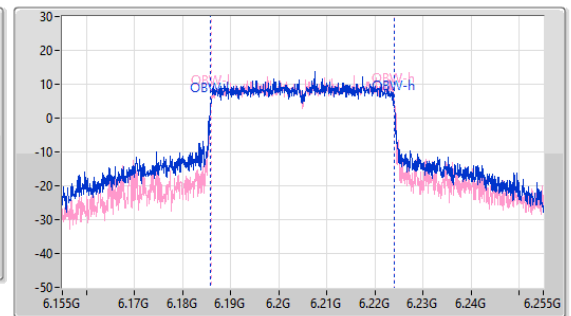
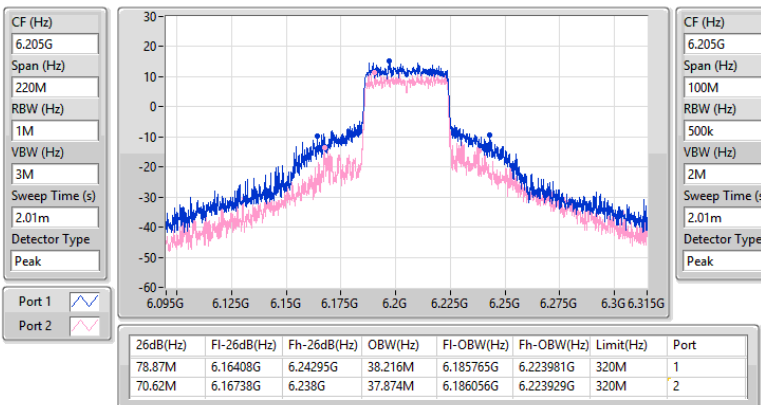


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

12/05/2026

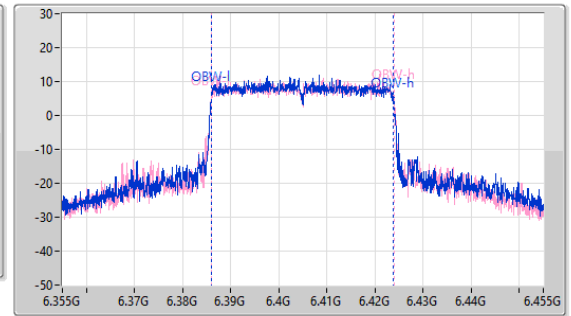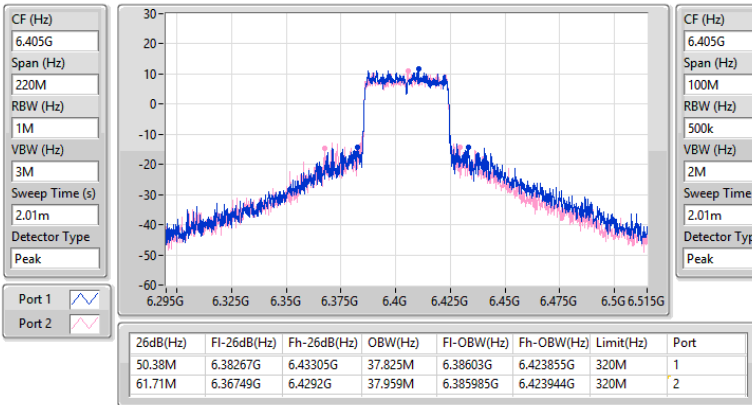

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6565MHz

12/05/2026

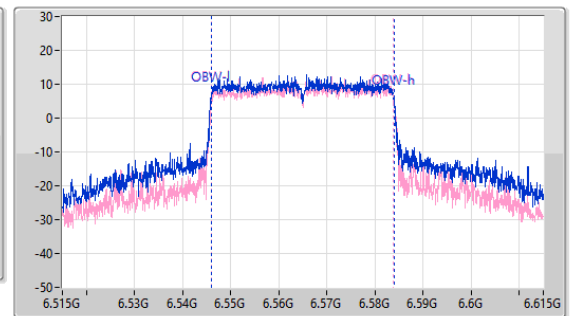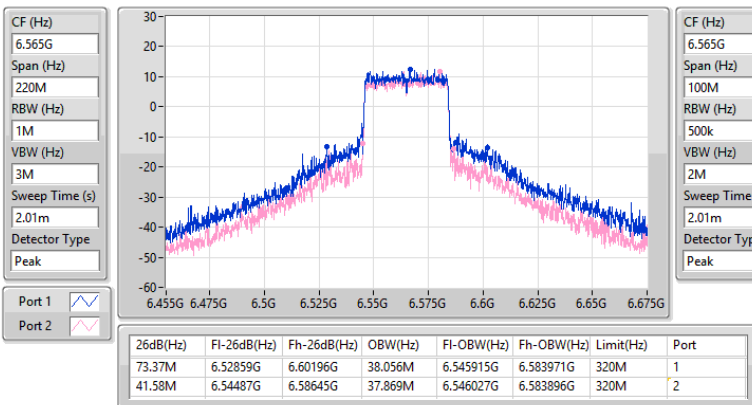


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6685MHz

12/05/2026

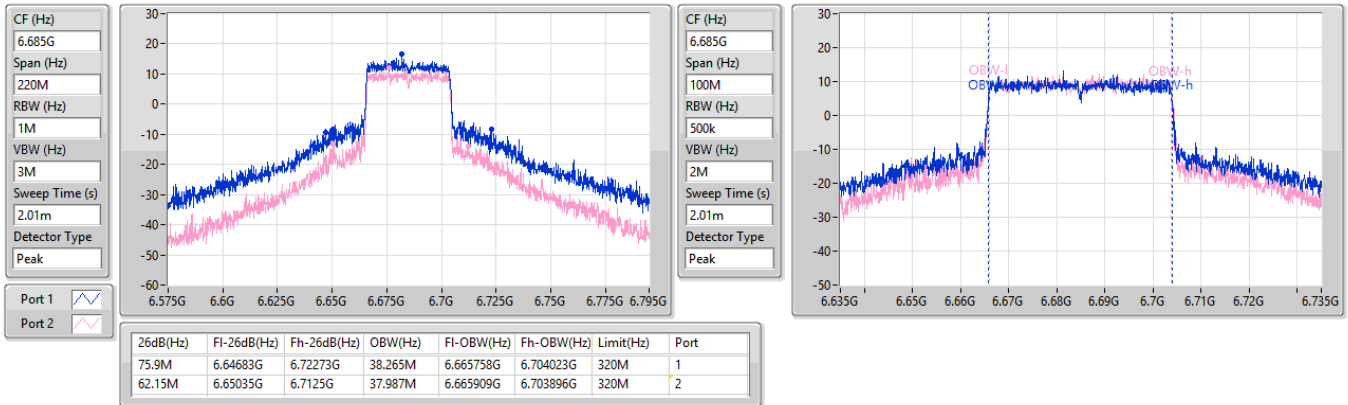

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6845MHz

12/05/2026

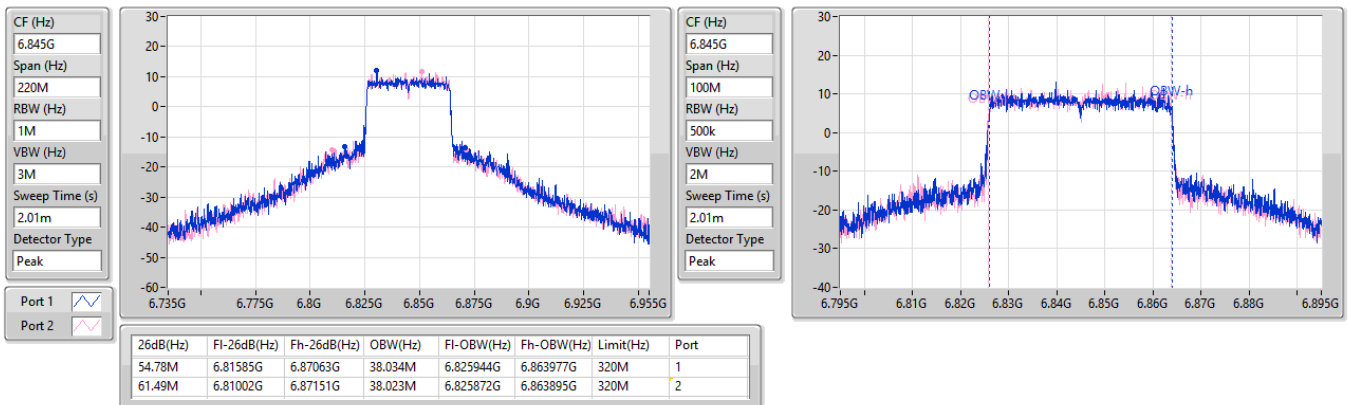


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5985MHz

12/05/2026

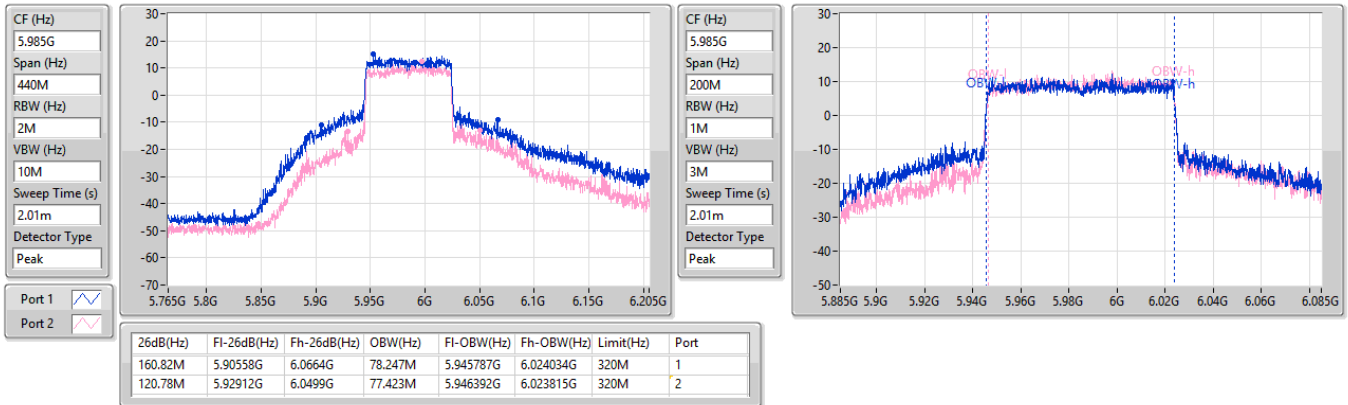

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6225MHz

12/05/2026

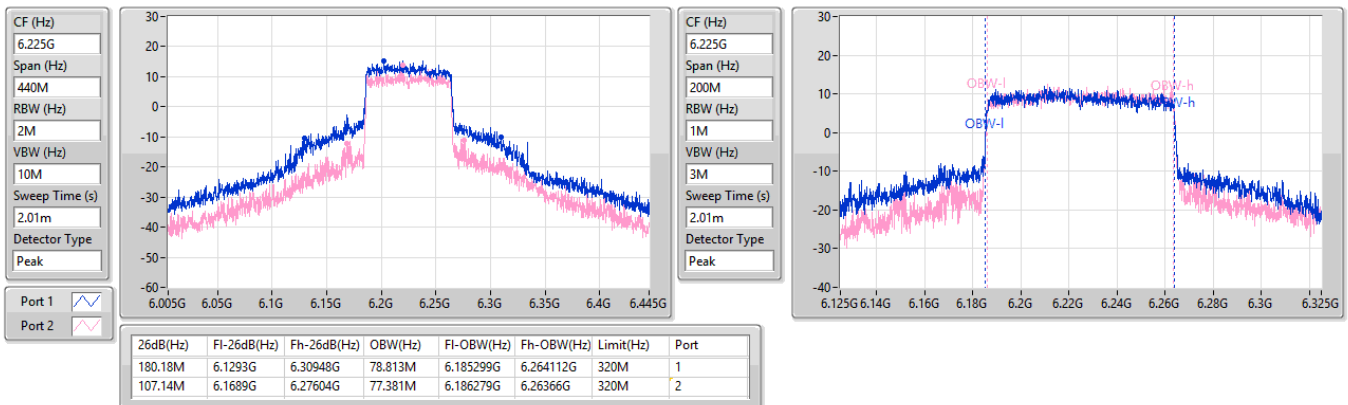


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

12/05/2026

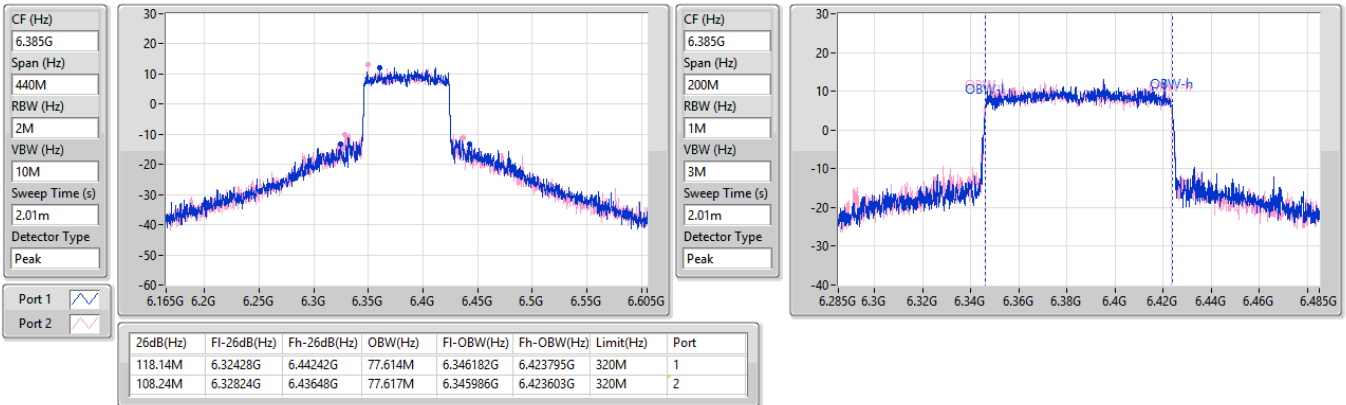

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

12/05/2026

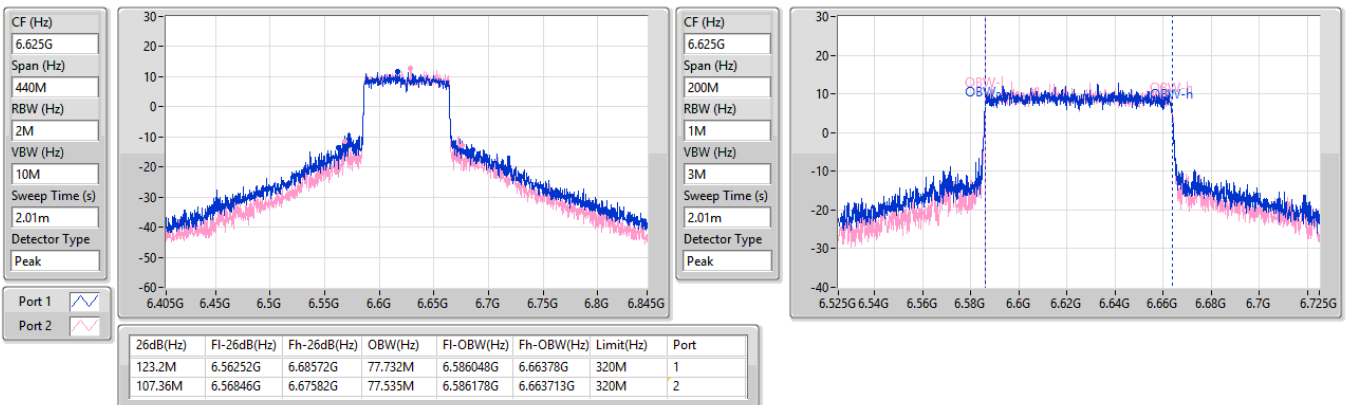


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

12/05/2026


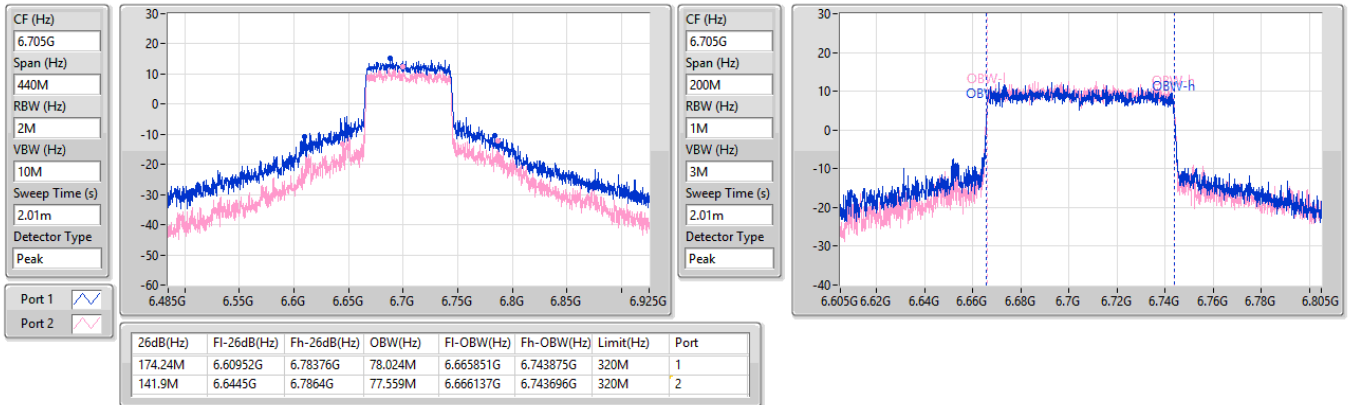

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

12/05/2026


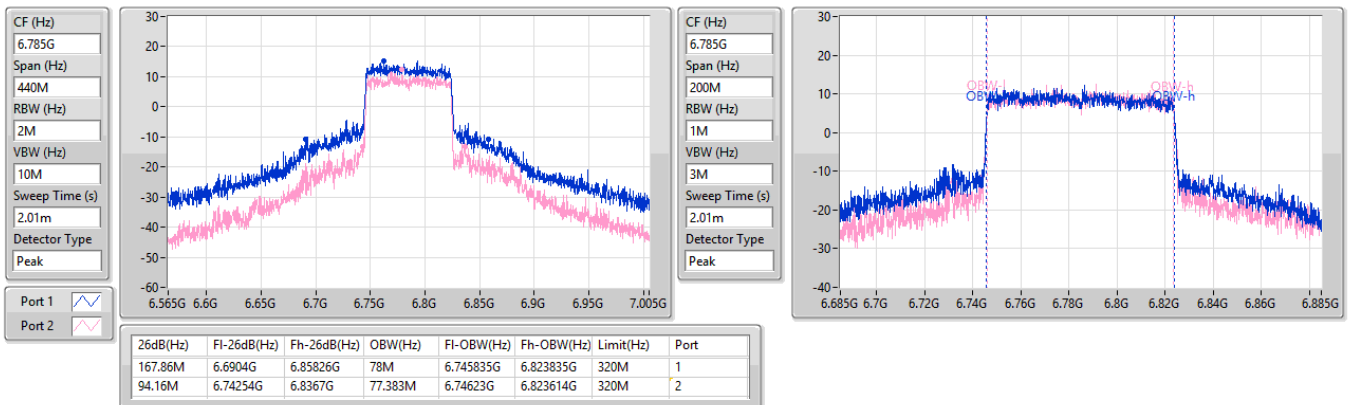


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6025MHz

12/05/2026

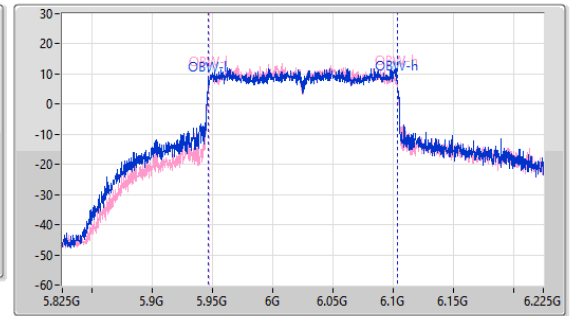
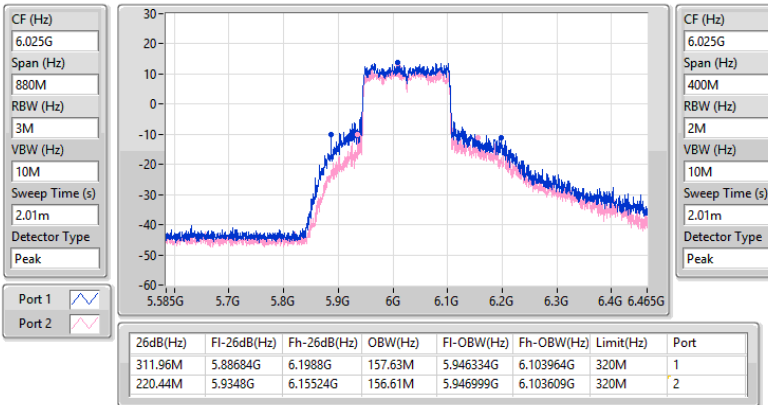

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6185MHz

12/05/2026

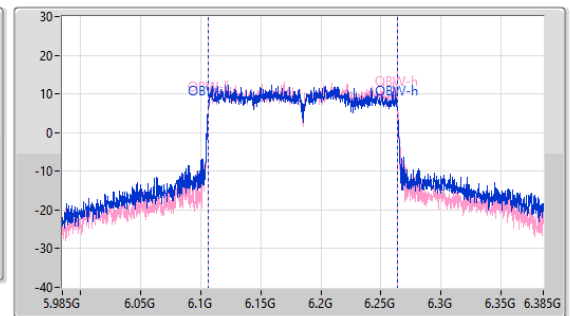
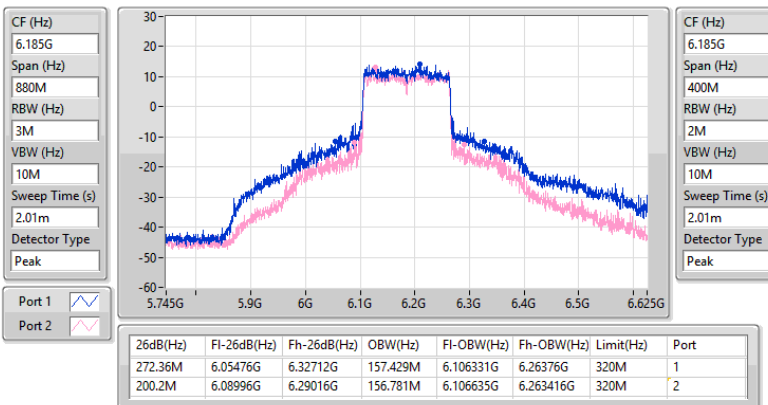


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6345MHz

12/05/2026

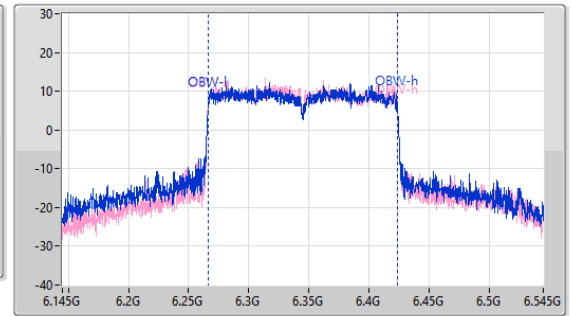
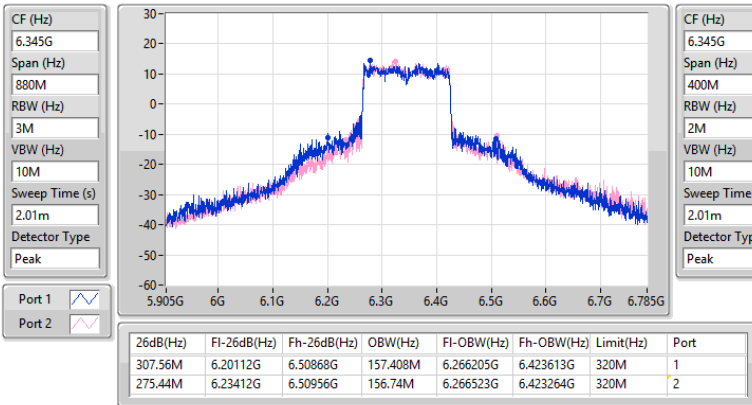

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6665MHz

12/05/2026

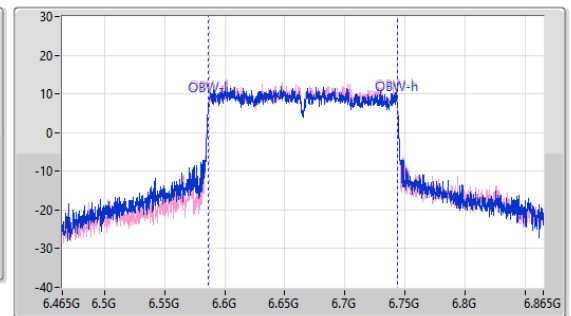
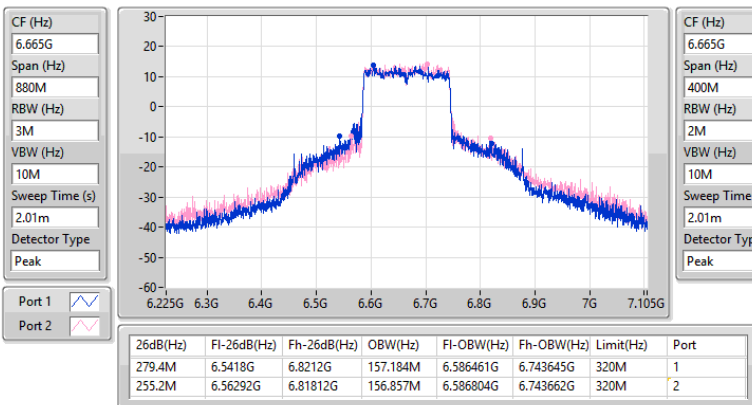


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6105MHz

12/05/2026

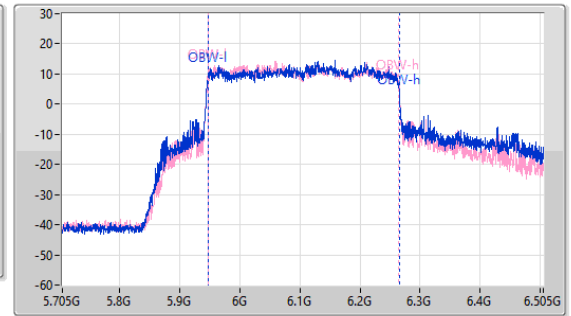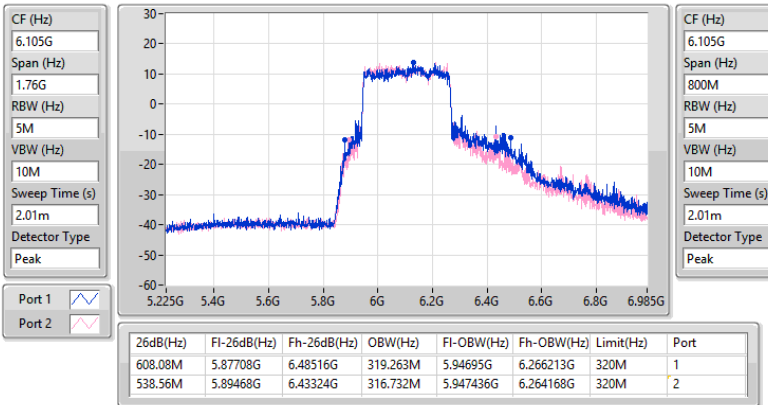
5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6265MHz

12/05/2026

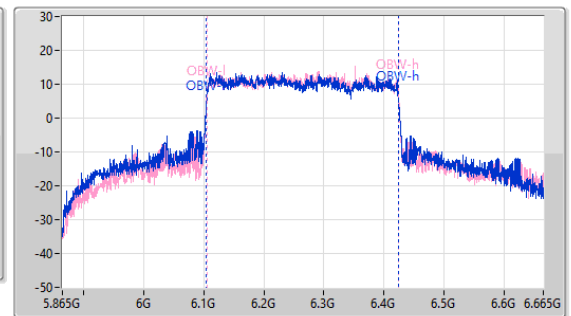
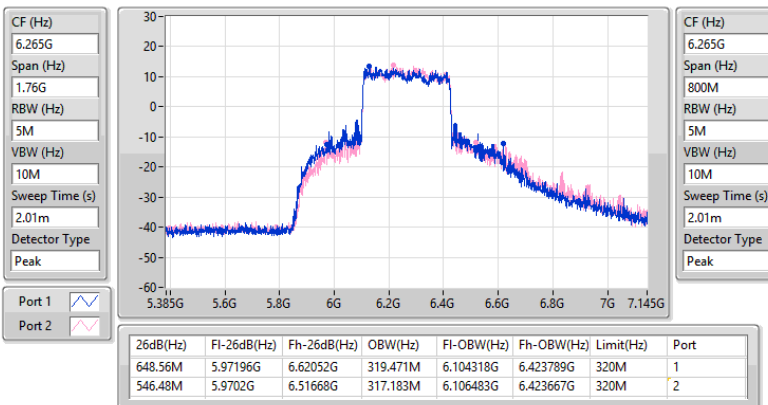


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6425MHz

12/05/2026

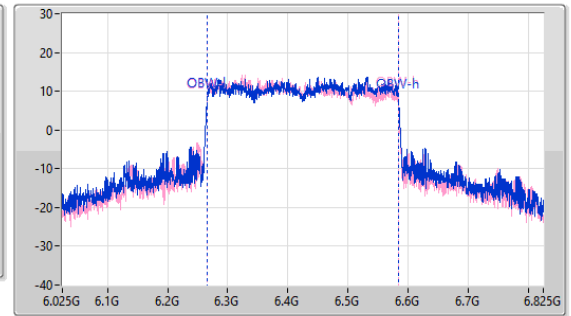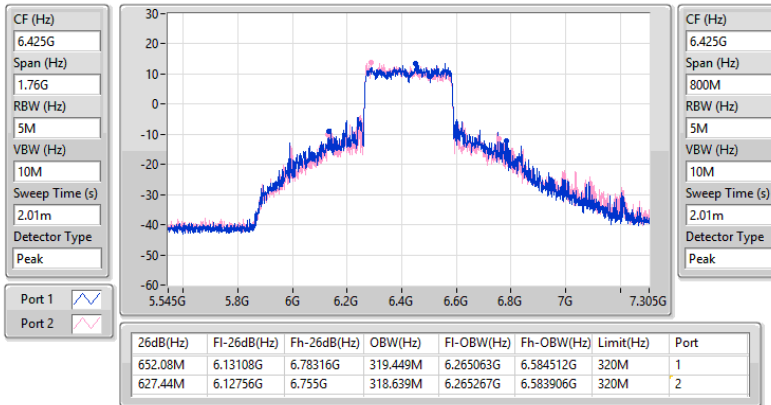

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.86	0.19320	27.19	0.52360
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.86	0.19320	29.58	0.90782
802.11be EHT40_Nss1,(MCS0)_2TX	22.93	0.19634	27.26	0.53211
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.93	0.19634	29.65	0.92257
802.11be EHT80_Nss1,(MCS0)_2TX	23.18	0.20797	27.51	0.56364
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.18	0.20797	29.90	0.97724
802.11be EHT160_Nss1,(MCS0)_2TX	22.66	0.18450	26.99	0.50003
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.66	0.18450	29.38	0.86696
802.11be EHT320_Nss1,(MCS0)_2TX	22.21	0.16634	26.54	0.45082
802.11be EHT320-BF_Nss1,(MCS0)_2TX	22.21	0.16634	28.93	0.78163
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.50	0.22387	27.89	0.61518
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.50	0.22387	30.37	1.08893
802.11be EHT40_Nss1,(MCS0)_2TX	23.35	0.21627	27.74	0.59429
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.35	0.21627	30.22	1.05196
802.11be EHT80_Nss1,(MCS0)_2TX	23.17	0.20749	27.56	0.57016
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.17	0.20749	30.04	1.00925
802.11be EHT160_Nss1,(MCS0)_2TX	22.92	0.19588	27.31	0.53827
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.92	0.19588	29.79	0.95280

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.33	19.43	20.24	22.86	27.19	36.00
6195MHz	Pass	4.33	19.30	20.33	22.86	27.19	36.00
6415MHz	Pass	4.33	19.59	19.65	22.63	26.96	36.00
6535MHz	Pass	4.39	21.06	19.72	23.45	27.84	36.00
6695MHz	Pass	4.39	20.27	20.70	23.50	27.89	36.00
6855MHz	Pass	4.39	19.55	20.48	23.05	27.44	36.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.33	19.20	18.27	21.77	26.10	36.00
6205MHz	Pass	4.33	19.58	20.23	22.93	27.26	36.00
6405MHz	Pass	4.33	19.49	19.70	22.61	26.94	36.00
6565MHz	Pass	4.39	20.68	19.94	23.34	27.73	36.00
6685MHz	Pass	4.39	20.07	20.60	23.35	27.74	36.00
6845MHz	Pass	4.39	19.42	20.04	22.75	27.14	36.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.33	19.14	18.13	21.67	26.00	36.00
6225MHz	Pass	4.33	20.03	20.31	23.18	27.51	36.00
6385MHz	Pass	4.33	19.67	19.83	22.76	27.09	36.00
6625MHz	Pass	4.39	19.71	20.56	23.17	27.56	36.00
6705MHz	Pass	4.39	19.56	20.55	23.09	27.48	36.00
6785MHz	Pass	4.39	19.71	19.96	22.85	27.24	36.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.33	19.47	18.67	22.10	26.43	36.00
6185MHz	Pass	4.33	19.16	20.09	22.66	26.99	36.00
6345MHz	Pass	4.33	19.14	19.50	22.33	26.66	36.00
6665MHz	Pass	4.39	19.71	20.11	22.92	27.31	36.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	4.33	19.10	19.30	22.21	26.54	36.00
6265MHz	Pass	4.33	18.89	19.47	22.20	26.53	36.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	6.72	19.43	20.24	22.86	29.58	36.00
6195MHz	Pass	6.72	19.30	20.33	22.86	29.58	36.00
6415MHz	Pass	6.72	19.59	19.65	22.63	29.35	36.00
6535MHz	Pass	6.87	21.06	19.72	23.45	30.32	36.00
6695MHz	Pass	6.87	20.27	20.70	23.50	30.37	36.00
6855MHz	Pass	6.87	19.55	20.48	23.05	29.92	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	6.72	19.20	18.27	21.77	28.49	36.00
6205MHz	Pass	6.72	19.58	20.23	22.93	29.65	36.00
6405MHz	Pass	6.72	19.49	19.70	22.61	29.33	36.00
6565MHz	Pass	6.87	20.68	19.94	23.34	30.21	36.00
6685MHz	Pass	6.87	20.07	20.60	23.35	30.22	36.00
6845MHz	Pass	6.87	19.42	20.04	22.75	29.62	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	6.72	19.14	18.13	21.67	28.39	36.00
6225MHz	Pass	6.72	20.03	20.31	23.18	29.90	36.00
6385MHz	Pass	6.72	19.67	19.83	22.76	29.48	36.00
6625MHz	Pass	6.87	19.71	20.56	23.17	30.04	36.00
6705MHz	Pass	6.87	19.56	20.55	23.09	29.96	36.00
6785MHz	Pass	6.87	19.71	19.96	22.85	29.72	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	6.72	19.47	18.67	22.10	28.82	36.00
6185MHz	Pass	6.72	19.16	20.09	22.66	29.38	36.00
6345MHz	Pass	6.72	19.14	19.50	22.33	29.05	36.00
6665MHz	Pass	6.87	19.71	20.11	22.92	29.79	36.00



Average Power_Test Mode: Mode 1

Appendix B.1

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	6.72	19.10	19.30	22.21	28.93	36.00
6265MHz	Pass	6.72	18.89	19.47	22.20	28.92	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Test Mode: Mode 2

Appendix B.2

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	19.66	0.09247	24.08	0.25586
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	19.84	0.09638	25.70	0.37154



Average Power_Test Mode: Mode 2

Appendix B.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
5955MHz	Pass	4.42	19.66	19.66	24.08	36.00
6195MHz	Pass	4.42	19.19	19.19	23.61	36.00
6415MHz	Pass	4.42	19.64	19.64	24.06	36.00
6535MHz	Pass	5.86	18.96	18.96	24.82	36.00
6695MHz	Pass	5.86	19.68	19.68	25.54	36.00
6855MHz	Pass	5.86	19.84	19.84	25.70	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

**Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.35	0.21627	32.75	1.88365
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.35	0.21627	32.75	1.88365
802.11be EHT40_Nss1,(MCS0)_2TX	23.42	0.21979	32.82	1.91426
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.42	0.21979	32.82	1.91426
802.11be EHT80_Nss1,(MCS0)_2TX	23.31	0.21429	32.71	1.86638
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.31	0.21429	32.71	1.86638
802.11be EHT160_Nss1,(MCS0)_2TX	22.91	0.19543	32.31	1.70216
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.91	0.19543	32.31	1.70216
802.11be EHT320_Nss1,(MCS0)_2TX	22.72	0.18707	32.12	1.62930
802.11be EHT320-BF_Nss1,(MCS0)_2TX	22.72	0.18707	32.12	1.62930
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	23.77	0.23823	33.07	2.02768
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.77	0.23823	33.07	2.02768
802.11be EHT40_Nss1,(MCS0)_2TX	23.92	0.24660	33.22	2.09894
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.92	0.24660	33.22	2.09894
802.11be EHT80_Nss1,(MCS0)_2TX	23.46	0.22182	32.76	1.88799
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.46	0.22182	32.76	1.88799
802.11be EHT160_Nss1,(MCS0)_2TX	23.22	0.20989	32.52	1.78649
802.11be EHT160-BF_Nss1,(MCS0)_2TX	23.22	0.20989	32.52	1.78649

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	9.40	19.25	19.72	22.50	31.90	36.00
6195MHz	Pass	9.40	20.07	20.59	23.35	32.75	36.00
6415MHz	Pass	9.40	19.79	19.58	22.70	32.10	36.00
6535MHz	Pass	9.30	21.19	19.58	23.47	32.77	36.00
6695MHz	Pass	9.30	20.51	21.00	23.77	33.07	36.00
6855MHz	Pass	9.30	19.87	20.62	23.27	32.57	36.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	9.40	17.75	18.43	21.11	30.51	36.00
6205MHz	Pass	9.40	20.32	20.50	23.42	32.82	36.00
6405MHz	Pass	9.40	19.99	19.69	22.85	32.25	36.00
6565MHz	Pass	9.30	21.32	19.98	23.71	33.01	36.00
6685MHz	Pass	9.30	20.75	21.07	23.92	33.22	36.00
6845MHz	Pass	9.30	20.19	20.26	23.24	32.54	36.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	9.40	17.46	17.62	20.55	29.95	36.00
6225MHz	Pass	9.40	20.25	20.35	23.31	32.71	36.00
6385MHz	Pass	9.40	19.99	19.90	22.96	32.36	36.00
6625MHz	Pass	9.30	20.26	20.45	23.37	32.67	36.00
6705MHz	Pass	9.30	20.20	20.68	23.46	32.76	36.00
6785MHz	Pass	9.30	20.05	19.77	22.92	32.22	36.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	9.40	18.15	18.26	21.22	30.62	36.00
6185MHz	Pass	9.40	19.84	19.95	22.91	32.31	36.00
6345MHz	Pass	9.40	19.58	19.72	22.66	32.06	36.00
6665MHz	Pass	9.30	19.98	20.43	23.22	32.52	36.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	17.44	17.64	20.55	29.95	36.00
6265MHz	Pass	9.40	19.59	19.83	22.72	32.12	36.00
6425MHz	Pass	9.40	19.75	19.62	22.70	32.10	36.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	9.40	19.25	19.72	22.50	31.90	36.00
6195MHz	Pass	9.40	20.07	20.59	23.35	32.75	36.00
6415MHz	Pass	9.40	19.79	19.58	22.70	32.10	36.00
6535MHz	Pass	9.30	21.19	19.58	23.47	32.77	36.00
6695MHz	Pass	9.30	20.51	21.00	23.77	33.07	36.00
6855MHz	Pass	9.30	19.87	20.62	23.27	32.57	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	9.40	17.75	18.43	21.11	30.51	36.00
6205MHz	Pass	9.40	20.32	20.50	23.42	32.82	36.00
6405MHz	Pass	9.40	19.99	19.69	22.85	32.25	36.00
6565MHz	Pass	9.30	21.32	19.98	23.71	33.01	36.00
6685MHz	Pass	9.30	20.75	21.07	23.92	33.22	36.00
6845MHz	Pass	9.30	20.19	20.26	23.24	32.54	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	9.40	17.46	17.62	20.55	29.95	36.00
6225MHz	Pass	9.40	20.25	20.35	23.31	32.71	36.00
6385MHz	Pass	9.40	19.99	19.90	22.96	32.36	36.00
6625MHz	Pass	9.30	20.26	20.45	23.37	32.67	36.00
6705MHz	Pass	9.30	20.20	20.68	23.46	32.76	36.00
6785MHz	Pass	9.30	20.05	19.77	22.92	32.22	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	9.40	18.15	18.26	21.22	30.62	36.00
6185MHz	Pass	9.40	19.84	19.95	22.91	32.31	36.00
6345MHz	Pass	9.40	19.58	19.72	22.66	32.06	36.00



Average Power_Test Mode: Mode 3

Appendix B.3

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6665MHz	Pass	9.30	19.98	20.43	23.22	32.52	36.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	17.44	17.64	20.55	29.95	36.00
6265MHz	Pass	9.40	19.59	19.83	22.72	32.12	36.00
6425MHz	Pass	9.40	19.75	19.62	22.70	32.10	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	9.22	15.94
802.11be EHT40_Nss1,(MCS0)_2TX	6.55	13.27
802.11be EHT80_Nss1,(MCS0)_2TX	4.25	10.97
802.11be EHT160_Nss1,(MCS0)_2TX	1.20	7.92
802.11be EHT320_Nss1,(MCS0)_2TX	-1.64	5.08
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	9.79	16.66
802.11be EHT40_Nss1,(MCS0)_2TX	6.97	13.84
802.11be EHT80_Nss1,(MCS0)_2TX	4.13	11.00
802.11be EHT160_Nss1,(MCS0)_2TX	1.23	8.10

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	6.72	5.84	6.55	9.22	15.94	23.00
6195MHz	Pass	6.72	5.69	6.79	9.21	15.93	23.00
6415MHz	Pass	6.72	5.91	5.86	8.81	15.53	23.00
6535MHz	Pass	6.87	7.37	6.15	9.75	16.62	23.00
6695MHz	Pass	6.87	6.51	7.12	9.79	16.66	23.00
6855MHz	Pass	6.87	5.78	6.71	9.25	16.12	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	6.72	2.72	1.67	5.17	11.89	23.00
6205MHz	Pass	6.72	3.13	3.99	6.55	13.27	23.00
6405MHz	Pass	6.72	3.16	3.30	6.19	12.91	23.00
6565MHz	Pass	6.87	4.36	3.67	6.97	13.84	23.00
6685MHz	Pass	6.87	3.63	4.19	6.89	13.76	23.00
6845MHz	Pass	6.87	3.09	3.56	6.30	13.17	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	6.72	0.26	-1.05	2.66	9.38	23.00
6225MHz	Pass	6.72	1.20	1.50	4.25	10.97	23.00
6385MHz	Pass	6.72	0.73	0.86	3.71	10.43	23.00
6625MHz	Pass	6.87	0.72	1.45	4.10	10.97	23.00
6705MHz	Pass	6.87	0.71	1.50	4.13	11.00	23.00
6785MHz	Pass	6.87	0.78	0.91	3.81	10.68	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	6.72	-1.61	-2.60	0.85	7.57	23.00
6185MHz	Pass	6.72	-2.40	-1.23	1.20	7.92	23.00
6345MHz	Pass	6.72	-2.34	-1.87	0.89	7.61	23.00
6665MHz	Pass	6.87	-1.88	-1.47	1.23	8.10	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.63	-4.70	-1.87	4.85	23.00
6265MHz	Pass	6.72	-4.86	-4.30	-1.64	5.08	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

12/05/2026

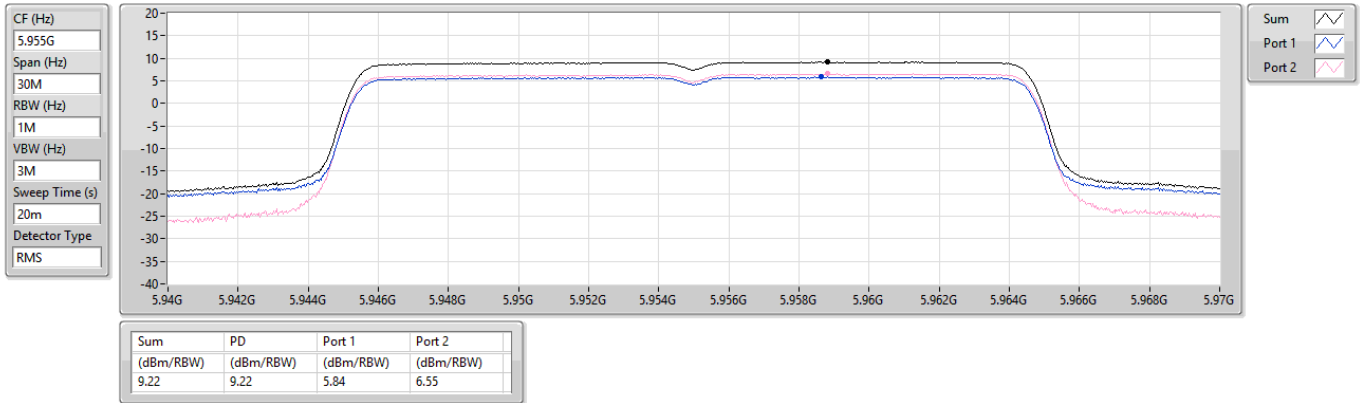


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

12/05/2026

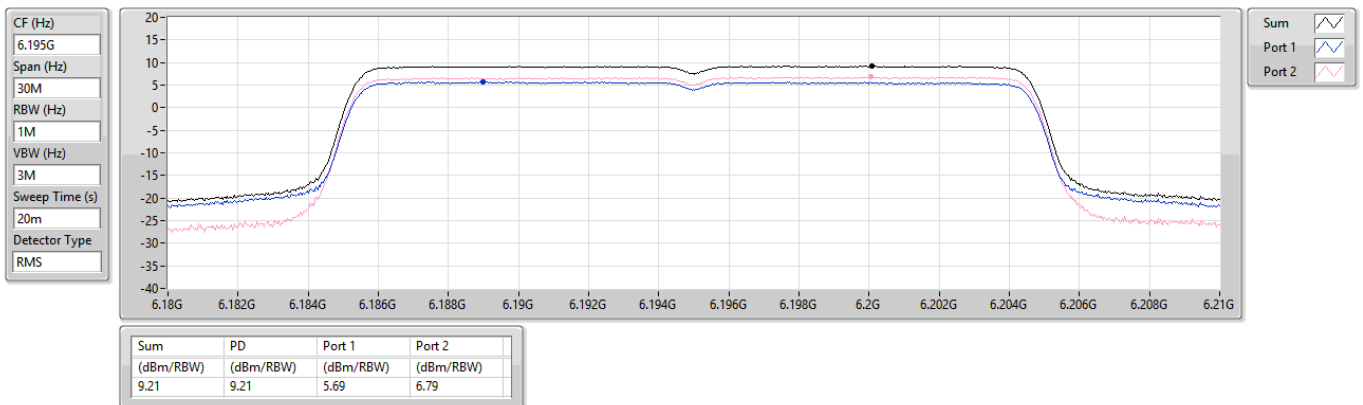


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

12/05/2026

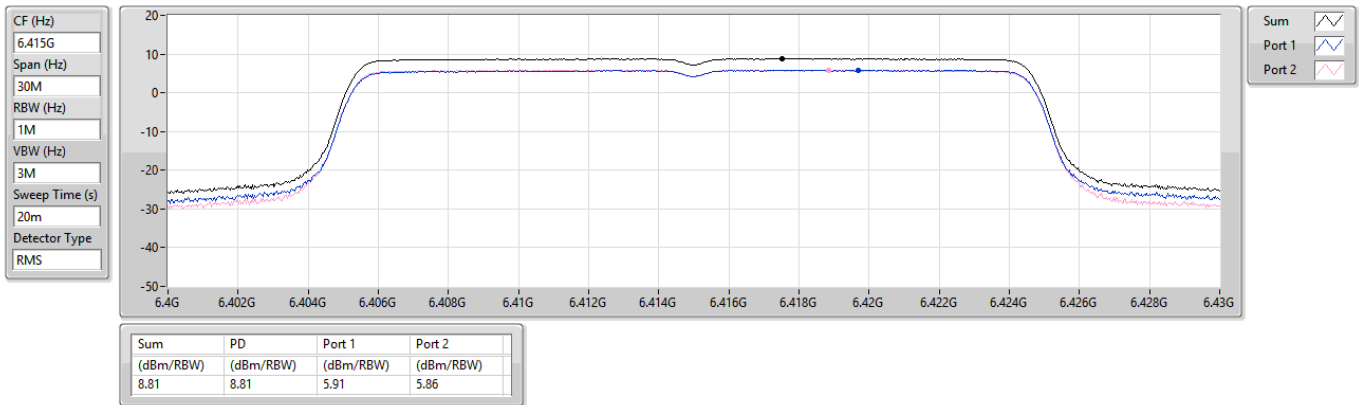


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

12/05/2026

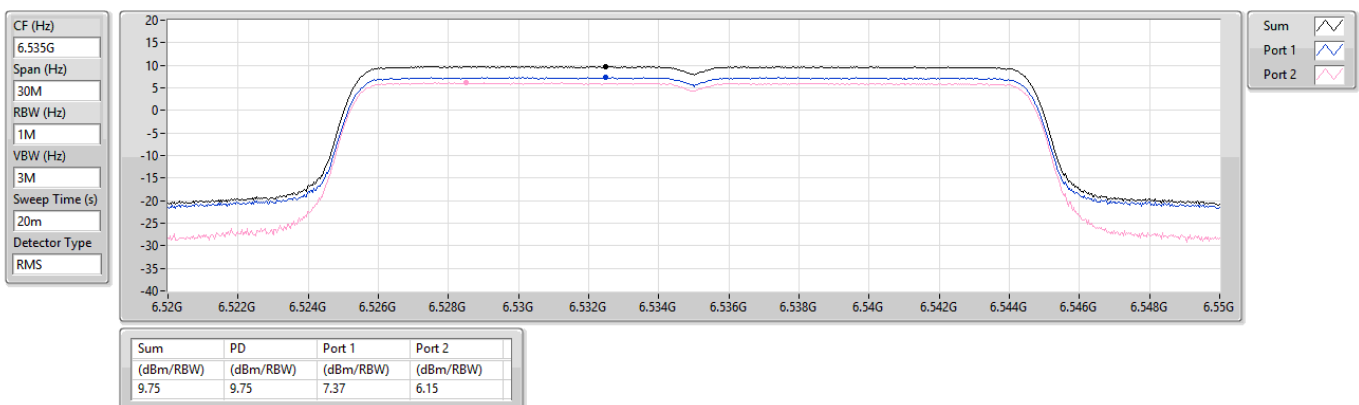

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

12/05/2026

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

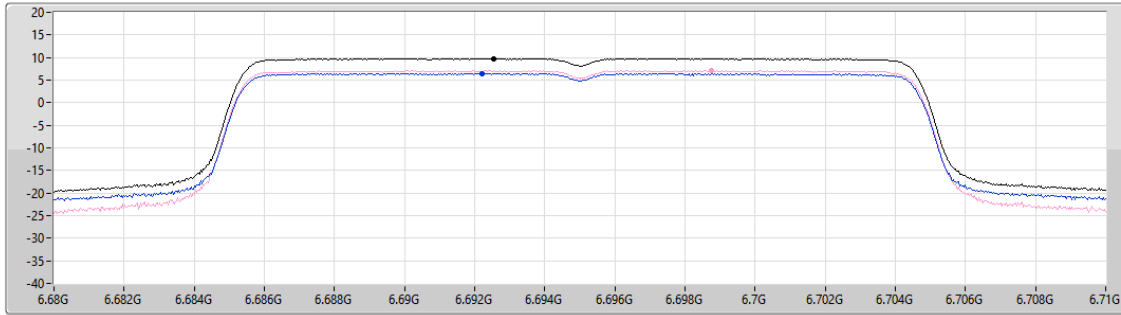

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.79	9.79	6.51	7.12

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

12/05/2026

CF (Hz)
6.855G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

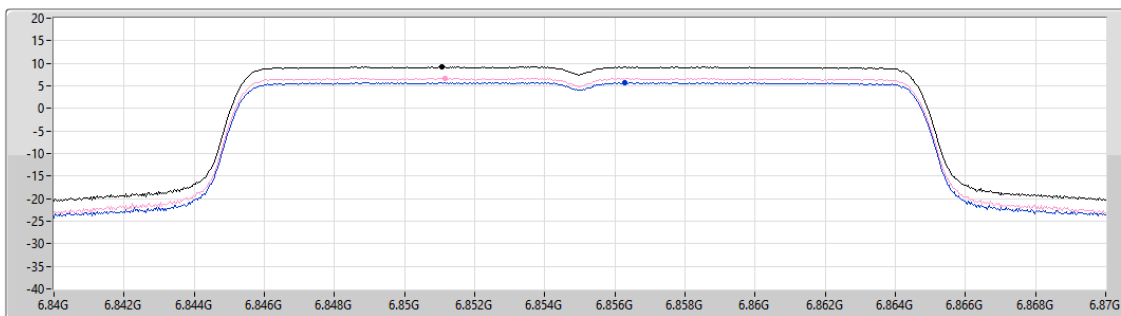

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.25	9.25	5.78	6.71

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

15/05/2026

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

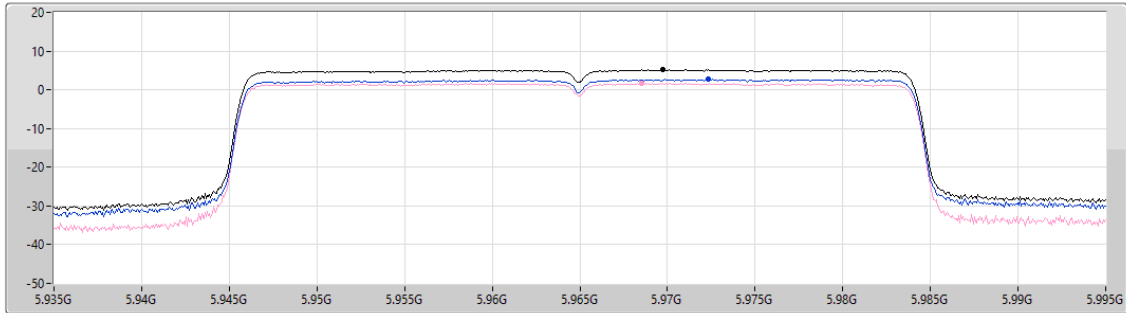

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.17	5.17	2.72	1.67

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

12/05/2026

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

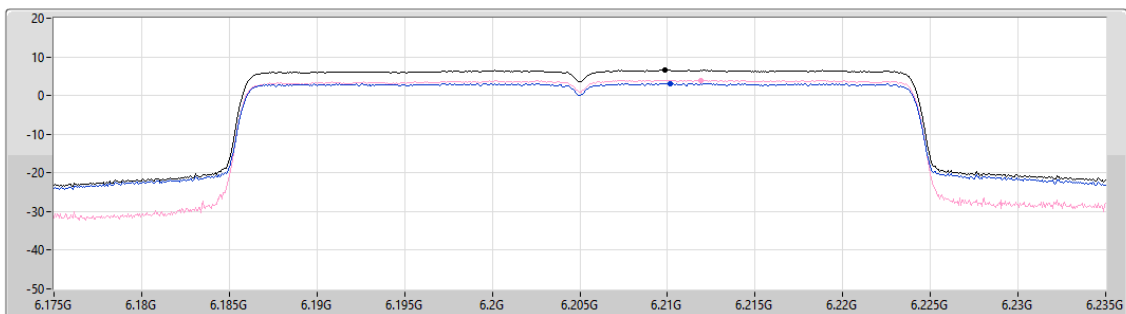

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.55	6.55	3.13	3.99

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

12/05/2026

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

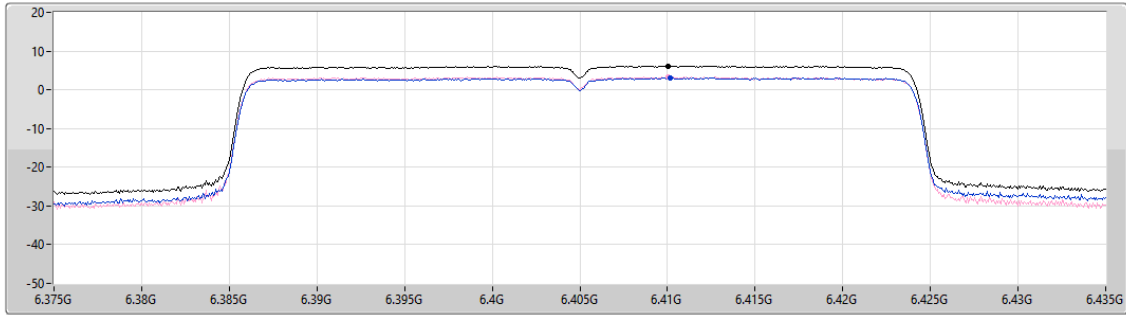

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.19	6.19	3.16	3.30

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

12/05/2026

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

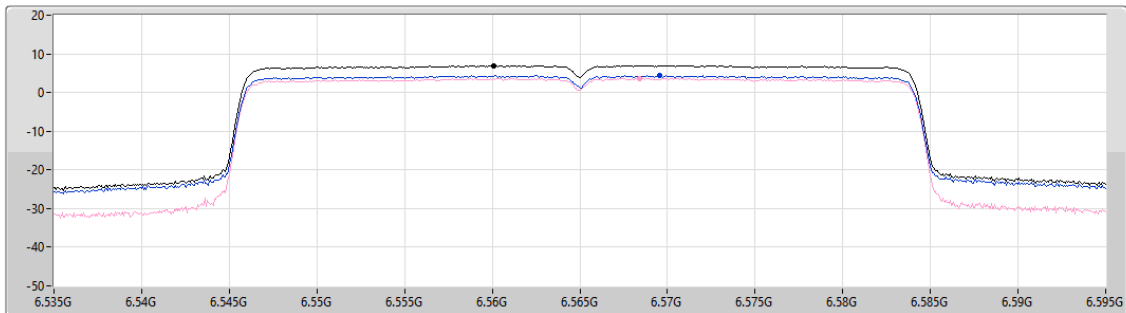

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.97	6.97	4.36	3.67

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

12/05/2026

CF (Hz)
6.685G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

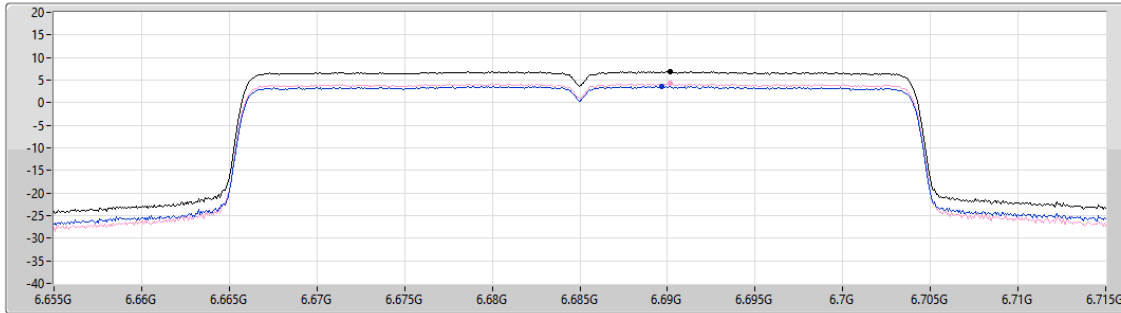

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.89	6.89	3.63	4.19

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

12/05/2026

CF (Hz)
6.845G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

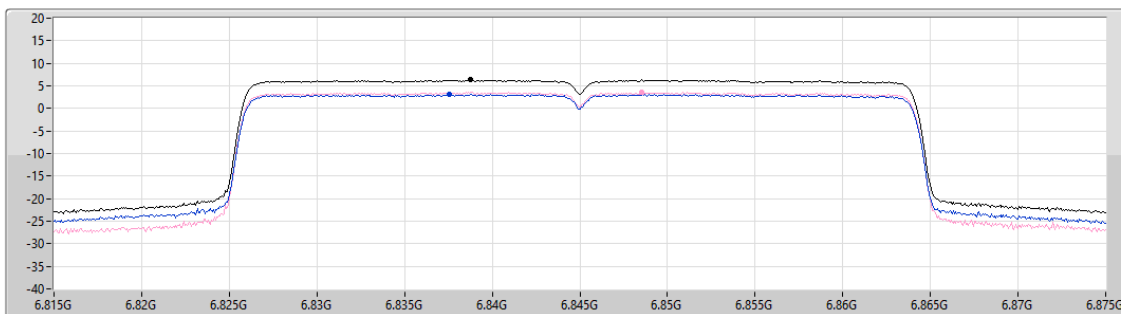

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.30	6.30	3.09	3.56


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

15/05/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

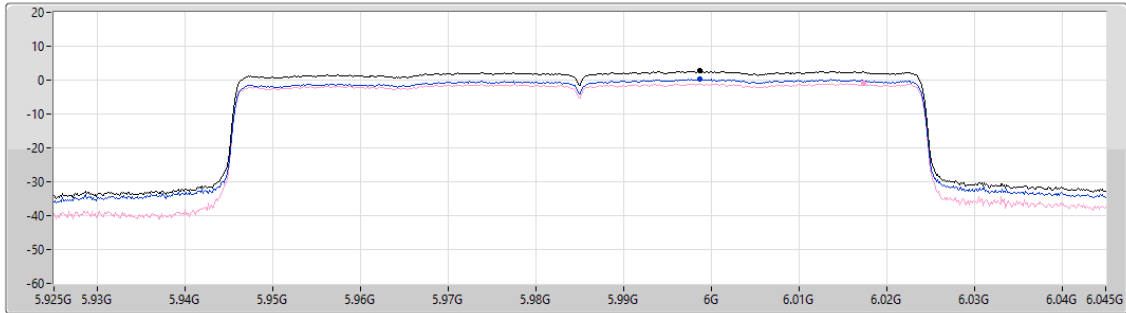

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.66	2.66	0.26	-1.05

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

12/05/2026

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

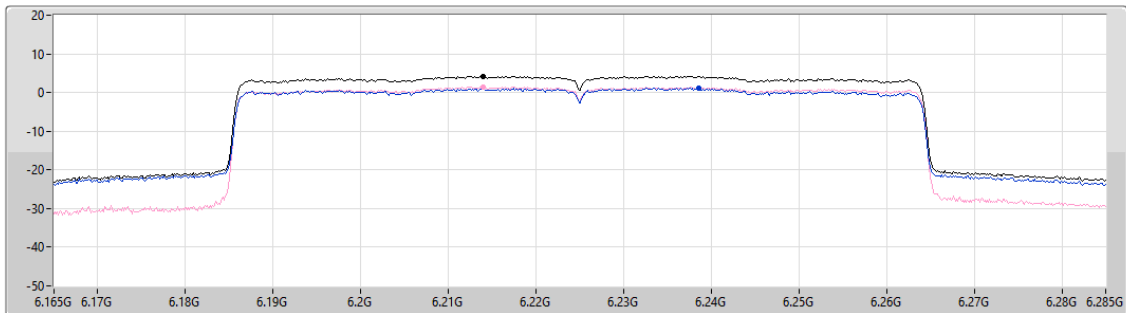

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.25	4.25	1.20	1.50

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

12/05/2026

CF (Hz)
6.385G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

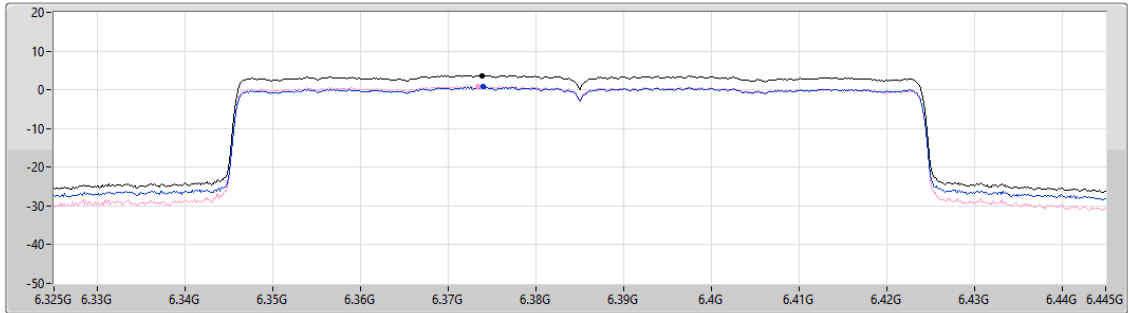

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.71	3.71	0.73	0.86

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

12/05/2026

CF (Hz)
6.625G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

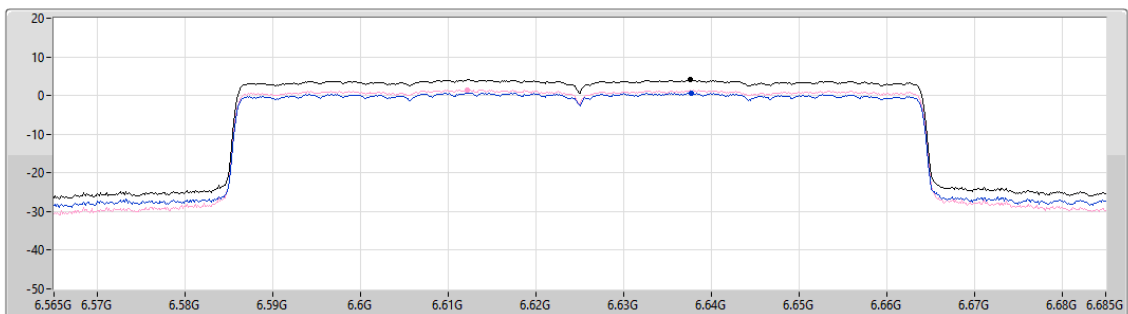

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.10	4.10	0.72	1.45

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

12/05/2026

CF (Hz)
6.705G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

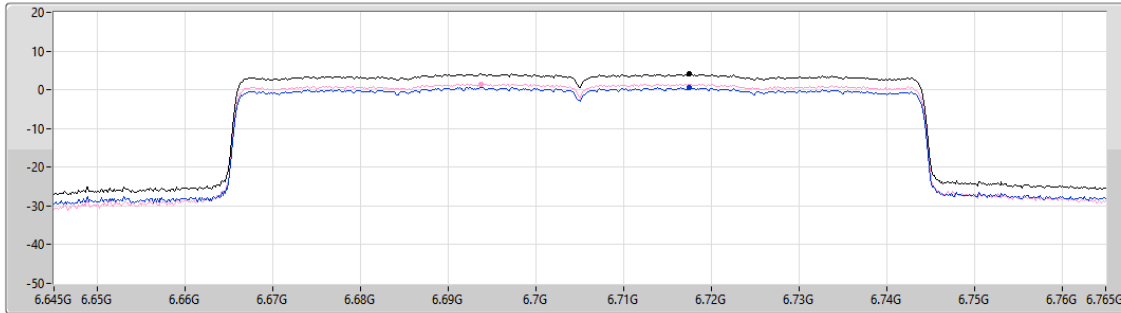

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.13	4.13	0.71	1.50

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

12/05/2026

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

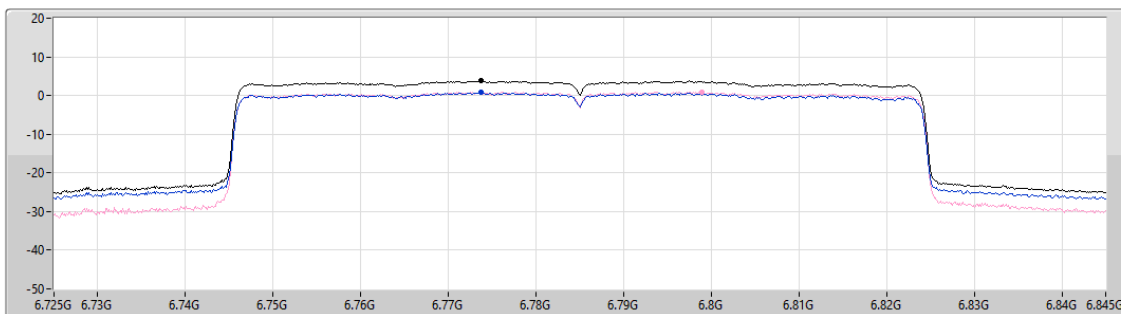

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.81	3.81	0.78	0.91

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

15/05/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

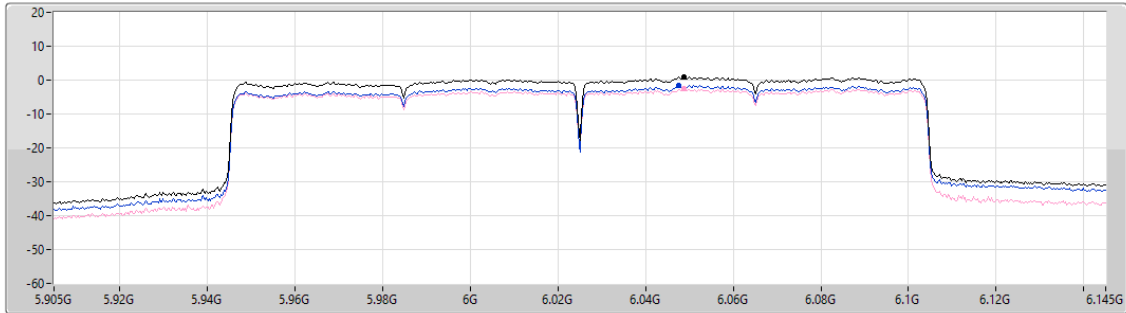

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.85	0.85	-1.61	-2.60

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

12/05/2026

CF (Hz)
6.185G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

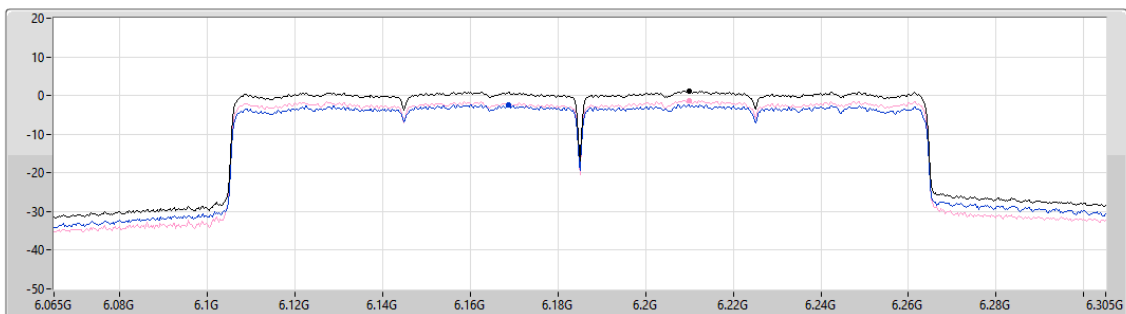

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.20	1.20	-2.40	-1.23

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

12/05/2026

CF (Hz)
6.345G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

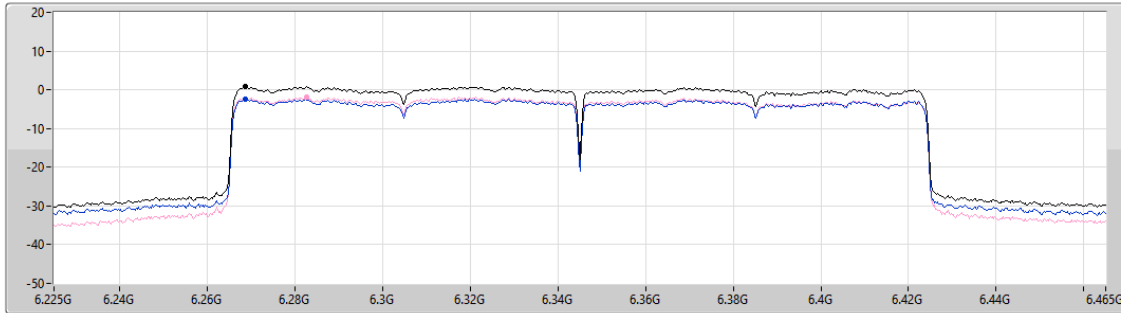

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.89	0.89	-2.34	-1.87

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

12/05/2026

CF (Hz)
6.665G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

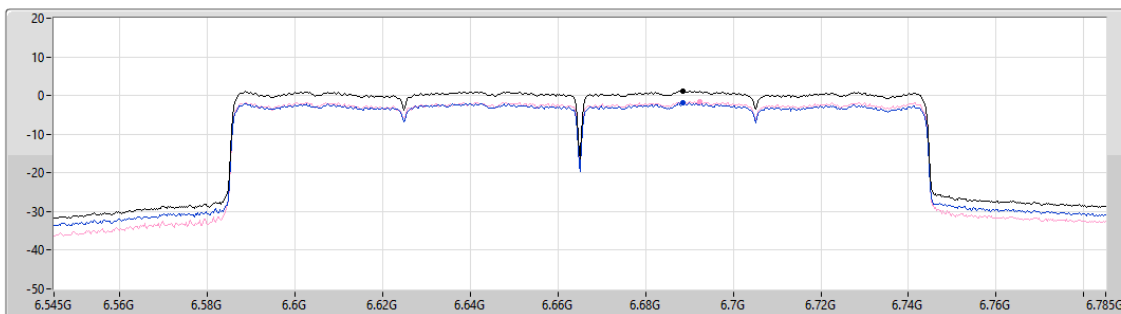

Sum ☐

Port 1 ☐

Port 2 ☐


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.23	1.23	-1.88	-1.47

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

12/05/2026

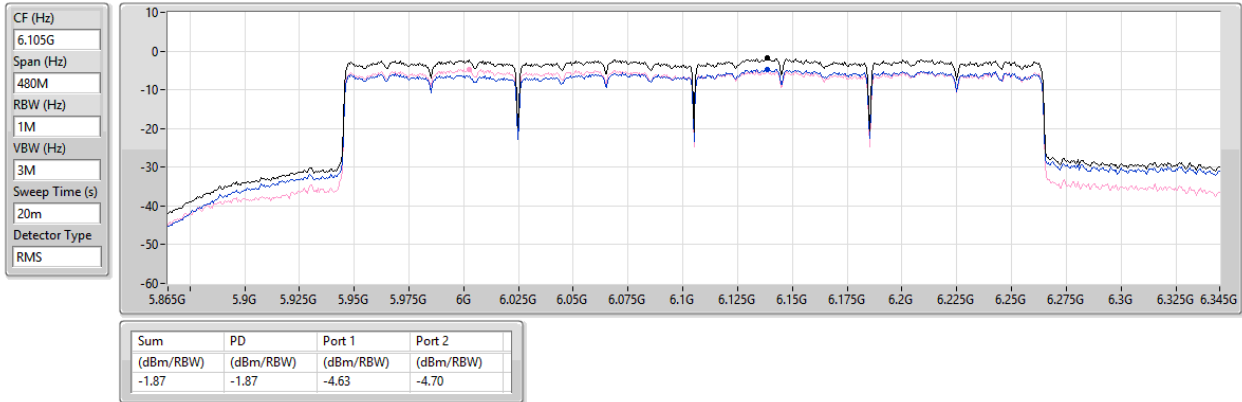


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

12/05/2026

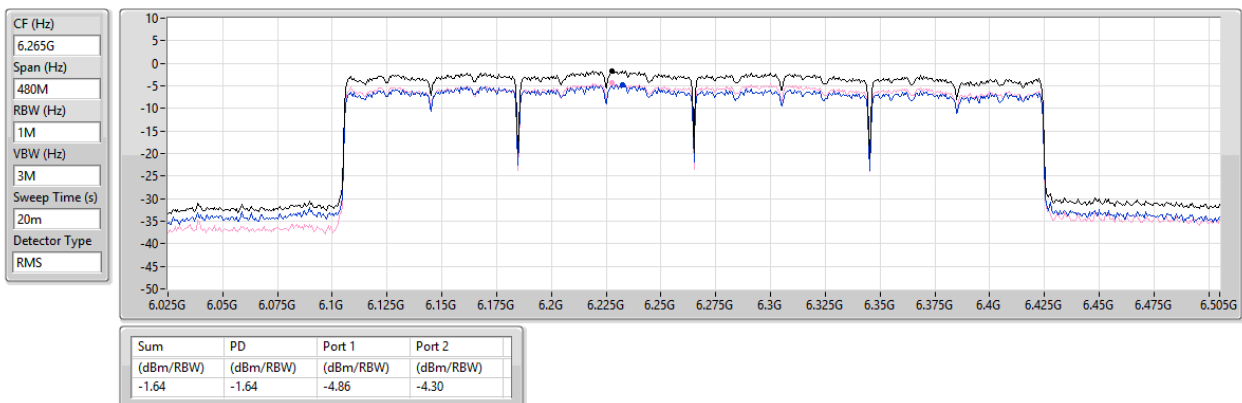



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	6.81	11.23
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	7.11	12.97

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
5955MHz	Pass	4.42	6.78	6.78	11.20	23.00
6195MHz	Pass	4.42	6.53	6.53	10.95	23.00
6415MHz	Pass	4.42	6.81	6.81	11.23	23.00
6535MHz	Pass	5.86	6.48	6.48	12.34	23.00
6695MHz	Pass	5.86	6.99	6.99	12.85	23.00
6855MHz	Pass	5.86	7.11	7.11	12.97	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5955MHz

28/04/2026

CF (Hz)
5.955G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

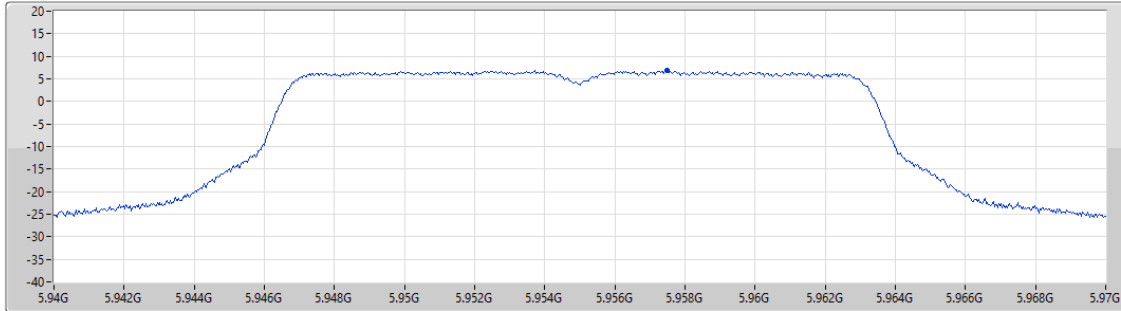

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.78	6.78	6.78

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

6195MHz

28/04/2026

CF (Hz)
6.195G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

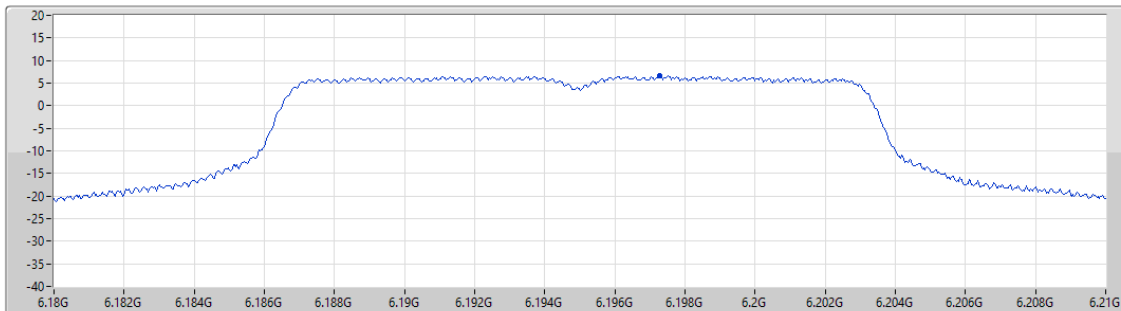

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.53	6.53	6.53


5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

6415MHz

28/04/2026

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

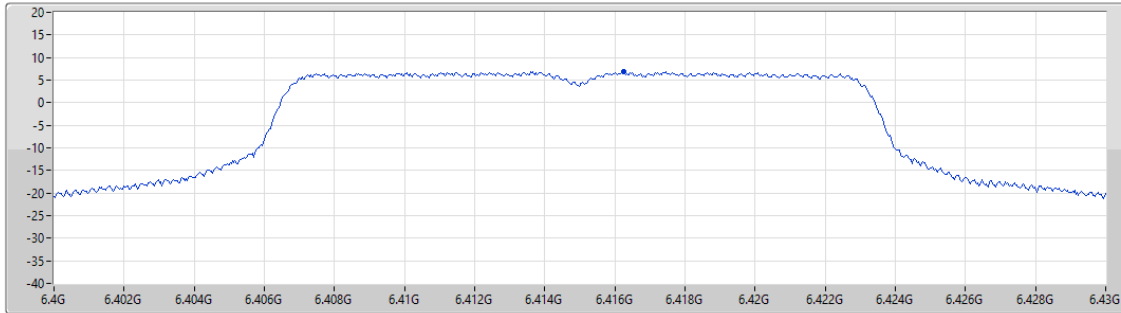

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.81	6.81	6.81


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

6535MHz

28/04/2026

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

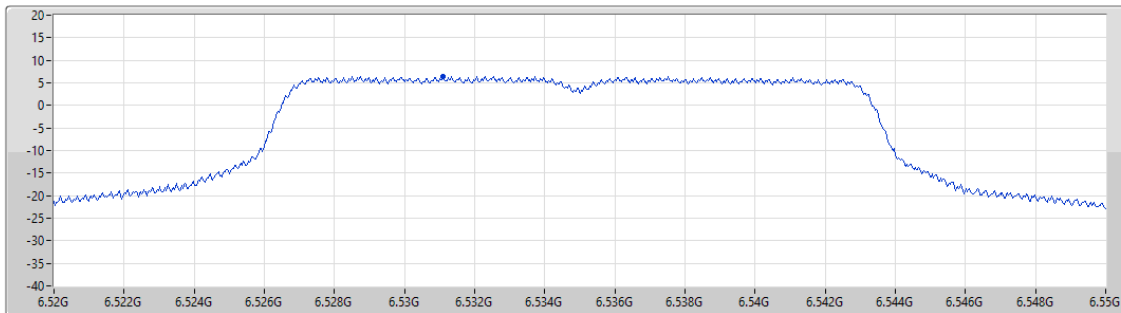

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.48	6.48	6.48

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

6695MHz

28/04/2026

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

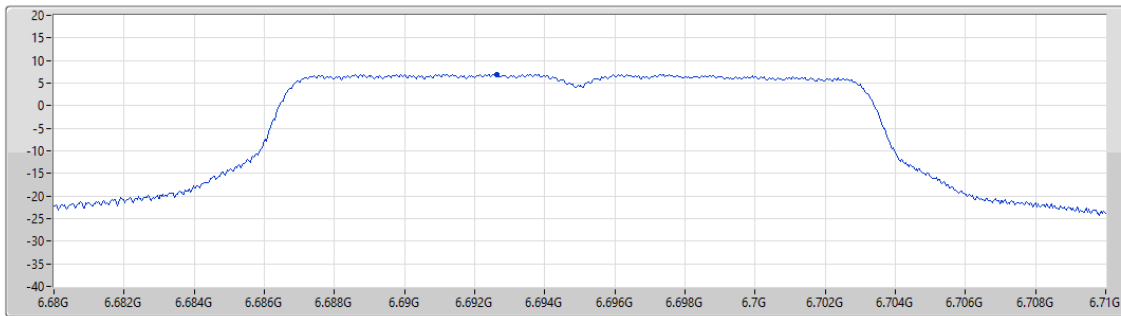

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.99	6.99	6.99

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

6855MHz

28/04/2026

CF (Hz)
6.855G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

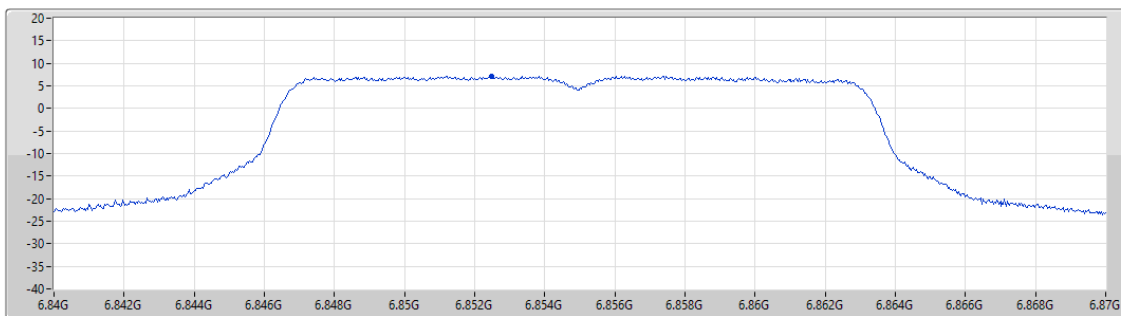

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.11	7.11	7.11

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	9.45	18.85
802.11be EHT40_Nss1,(MCS0)_2TX	6.89	16.29
802.11be EHT80_Nss1,(MCS0)_2TX	4.29	13.69
802.11be EHT160_Nss1,(MCS0)_2TX	1.29	10.69
802.11be EHT320_Nss1,(MCS0)_2TX	-1.36	8.04
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	9.94	19.24
802.11be EHT40_Nss1,(MCS0)_2TX	7.33	16.63
802.11be EHT80_Nss1,(MCS0)_2TX	4.31	13.61
802.11be EHT160_Nss1,(MCS0)_2TX	1.40	10.70

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	9.40	5.38	5.73	8.51	17.91	23.00
6195MHz	Pass	9.40	6.17	6.80	9.45	18.85	23.00
6415MHz	Pass	9.40	6.13	5.85	8.92	18.32	23.00
6535MHz	Pass	9.30	7.15	6.12	9.48	18.78	23.00
6695MHz	Pass	9.30	6.75	7.20	9.94	19.24	23.00
6855MHz	Pass	9.30	6.14	6.79	9.34	18.64	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	9.40	1.25	2.03	4.63	14.03	23.00
6205MHz	Pass	9.40	3.77	4.00	6.89	16.29	23.00
6405MHz	Pass	9.40	3.66	3.13	6.28	15.68	23.00
6565MHz	Pass	9.30	4.80	3.69	7.15	16.45	23.00
6685MHz	Pass	9.30	4.30	4.49	7.33	16.63	23.00
6845MHz	Pass	9.30	3.62	3.59	6.55	15.85	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	9.40	-1.71	-1.03	1.45	10.85	23.00
6225MHz	Pass	9.40	1.35	1.21	4.29	13.69	23.00
6385MHz	Pass	9.40	1.07	0.68	3.88	13.28	23.00
6625MHz	Pass	9.30	1.12	1.32	4.12	13.42	23.00
6705MHz	Pass	9.30	1.04	1.56	4.31	13.61	23.00
6785MHz	Pass	9.30	0.98	0.67	3.73	13.03	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	9.40	-3.87	-3.37	-0.76	8.64	23.00
6185MHz	Pass	9.40	-1.61	-1.61	1.29	10.69	23.00
6345MHz	Pass	9.40	-2.19	-1.62	1.04	10.44	23.00
6665MHz	Pass	9.30	-1.67	-1.13	1.40	10.70	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	-6.20	-5.84	-3.61	5.79	23.00
6265MHz	Pass	9.40	-4.44	-4.17	-1.36	8.04	23.00
6425MHz	Pass	9.40	-4.49	-3.97	-1.67	7.73	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

16/05/2026

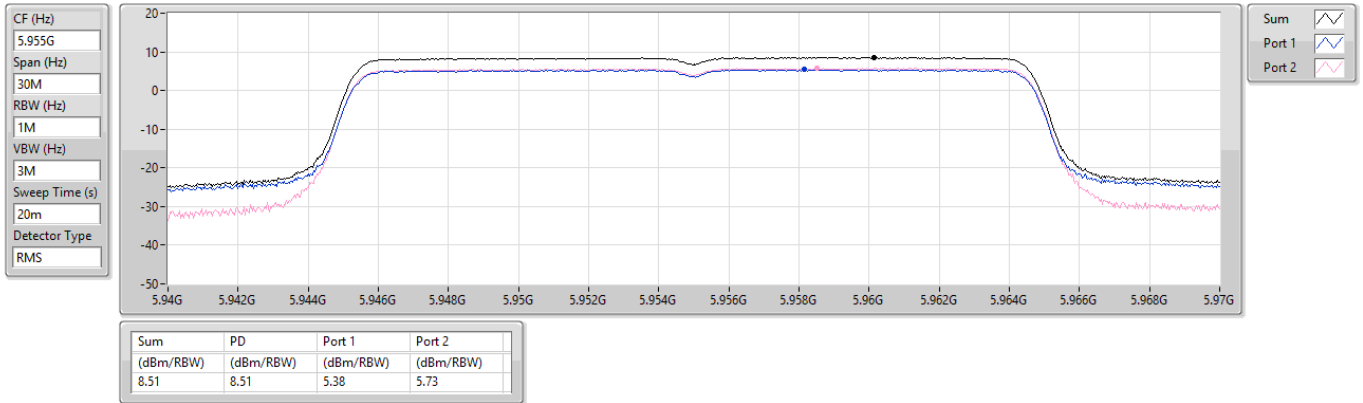


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

12/05/2026

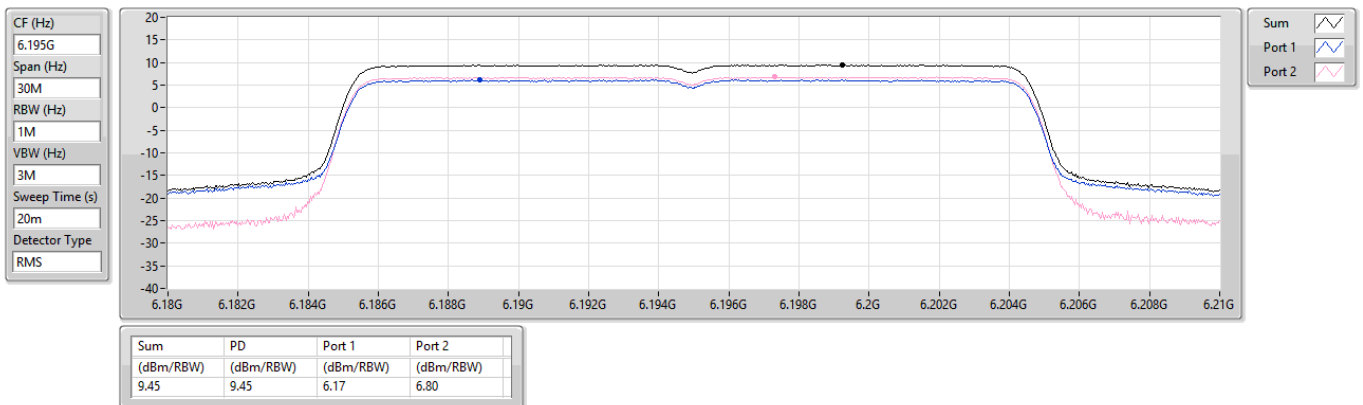

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

12/05/2026

CF (Hz)
6.415G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

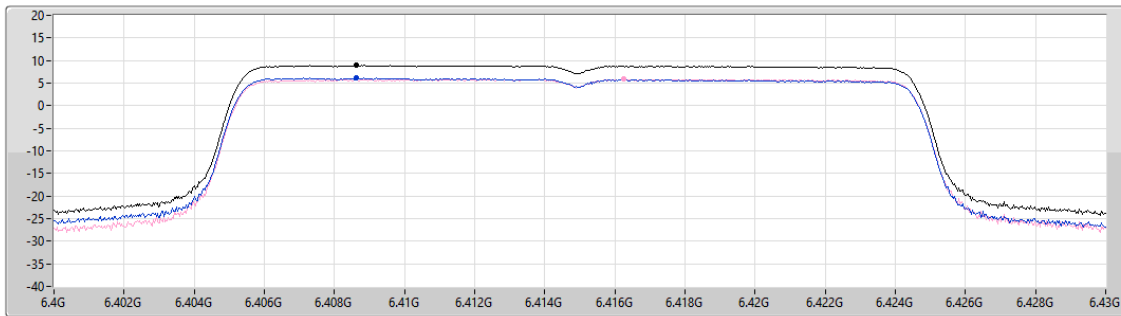

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	6.13	5.85

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

12/05/2026

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

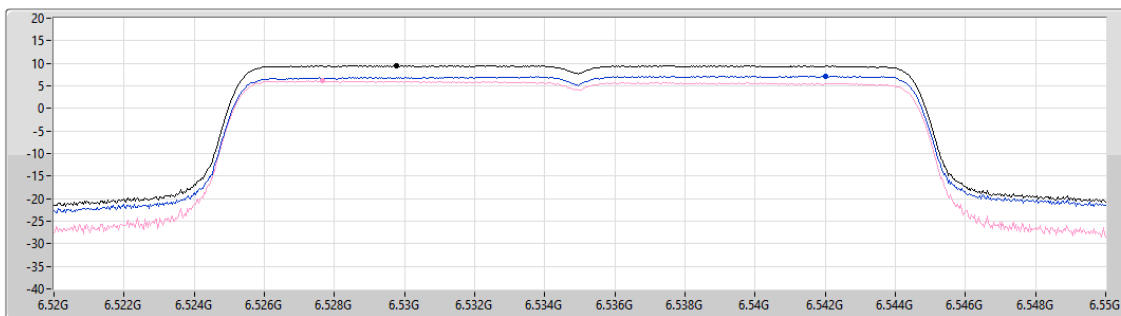

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.48	9.48	7.15	6.12

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

12/05/2026

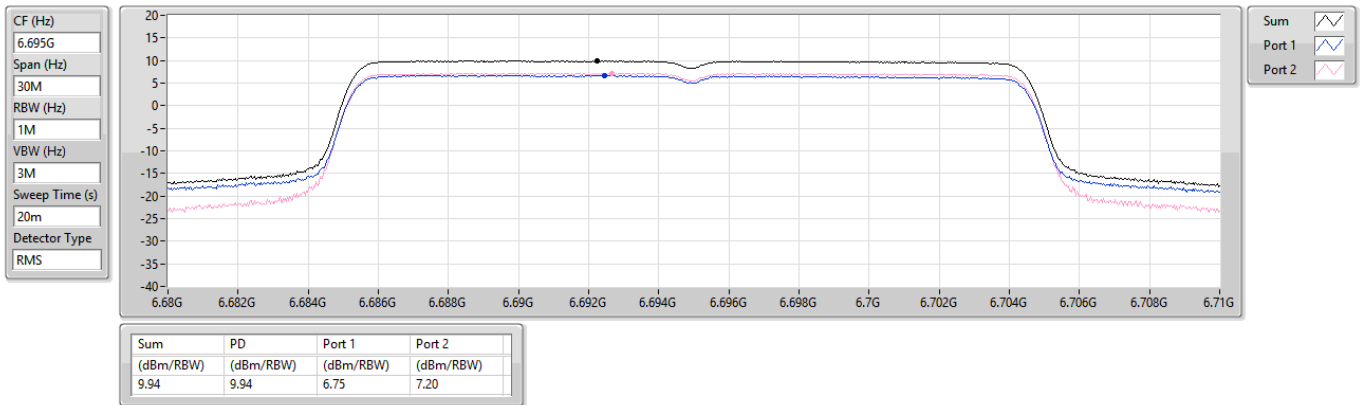


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

12/05/2026

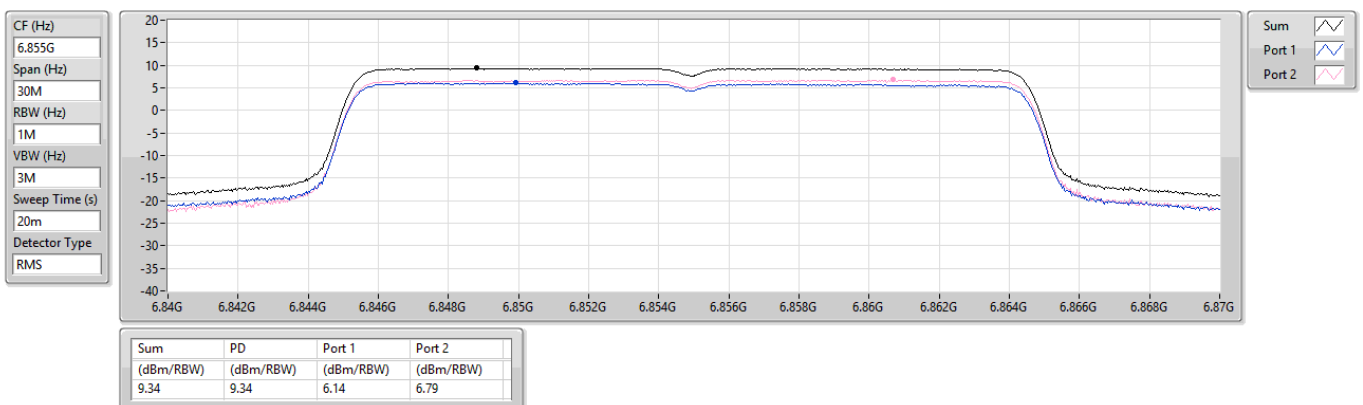

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

16/05/2026

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

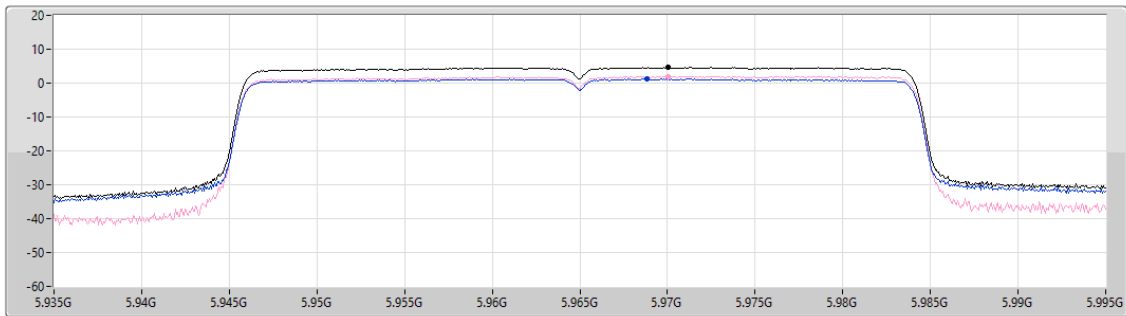

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.63	4.63	1.25	2.03

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

12/05/2026

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

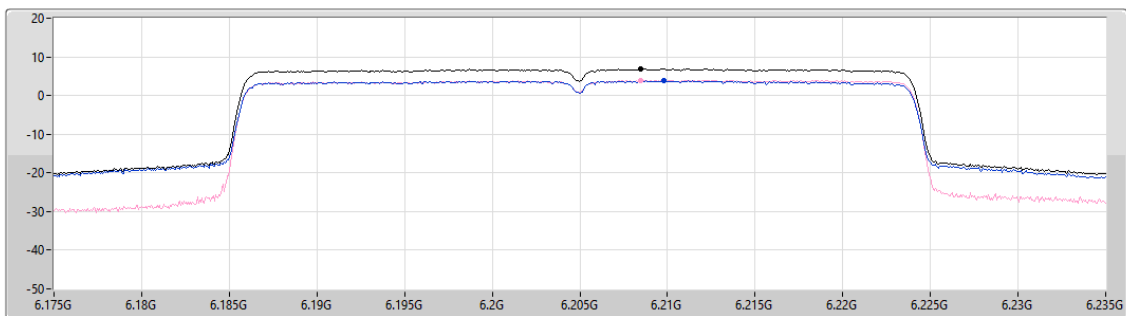

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.89	6.89	3.77	4.00

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

12/05/2026

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

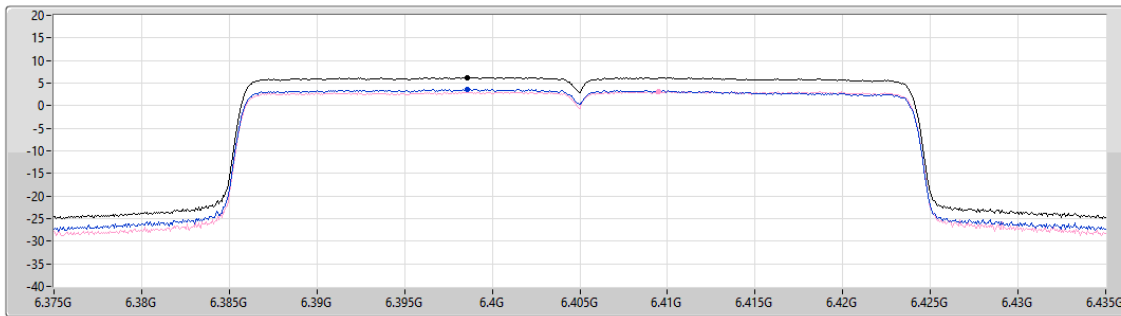

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.28	6.28	3.66	3.13

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

12/05/2026

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

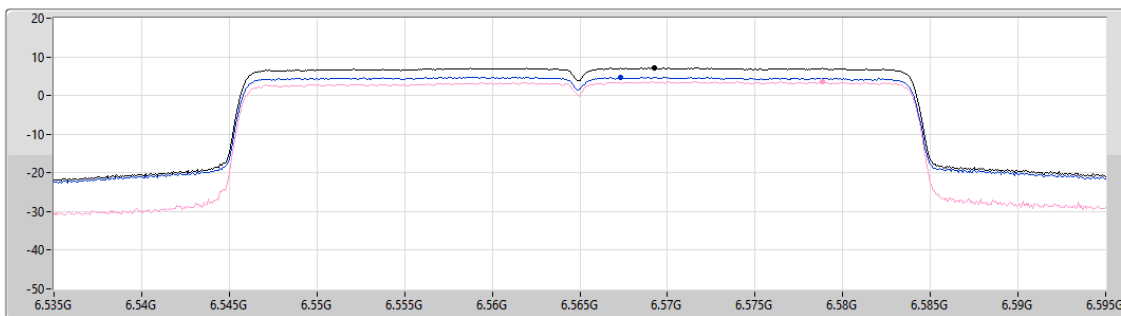

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.15	7.15	4.80	3.69


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

12/05/2026

CF (Hz)
6.685G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

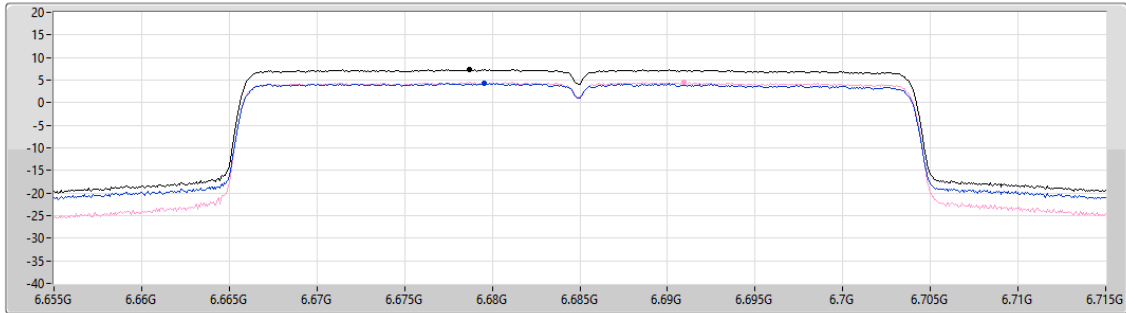

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.33	7.33	4.30	4.49


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

12/05/2026

CF (Hz)
6.845G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

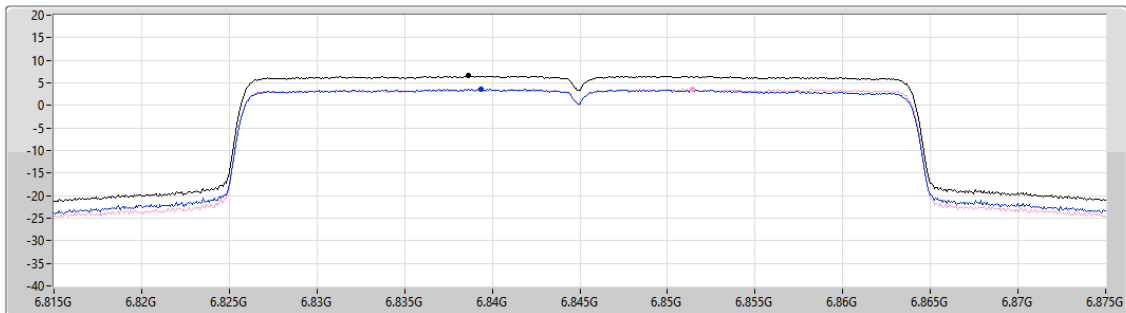

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.55	6.55	3.62	3.59

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

16/05/2026

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

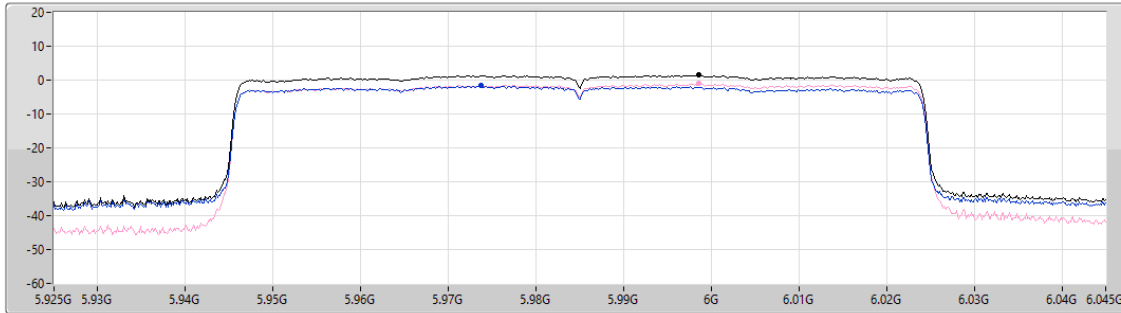

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.45	1.45	-1.71	-1.03

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

12/05/2026

CF (Hz)
6.225G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

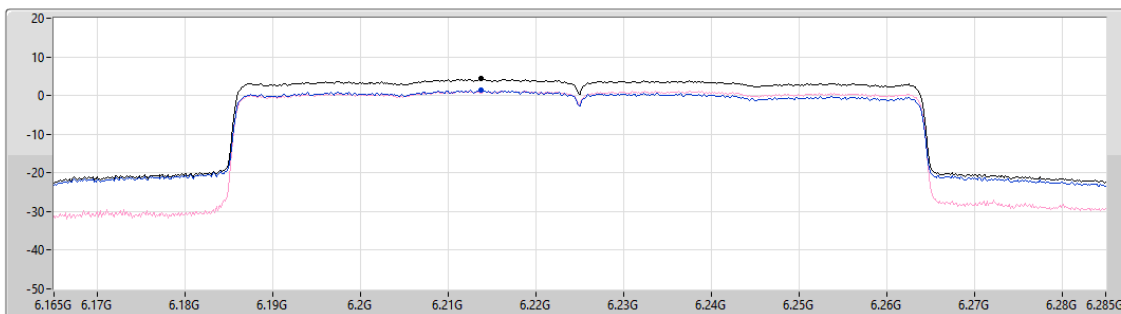

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.29	4.29	1.35	1.21

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

12/05/2026

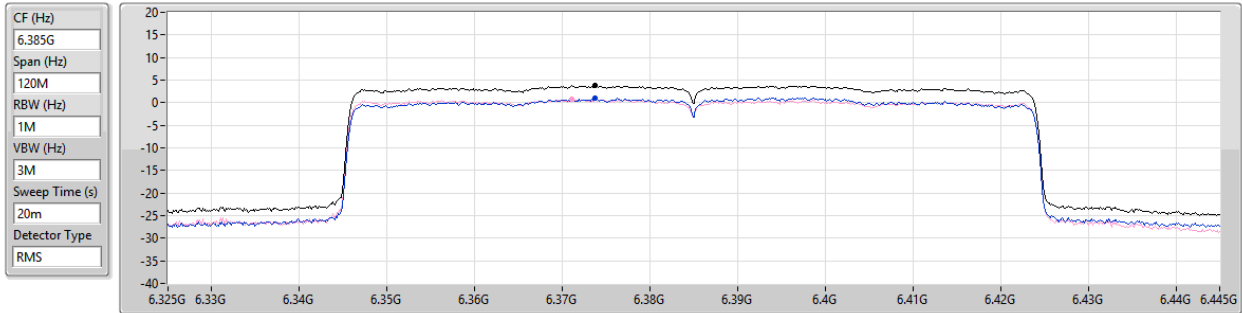


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.88	3.88	1.07	0.68

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

12/05/2026

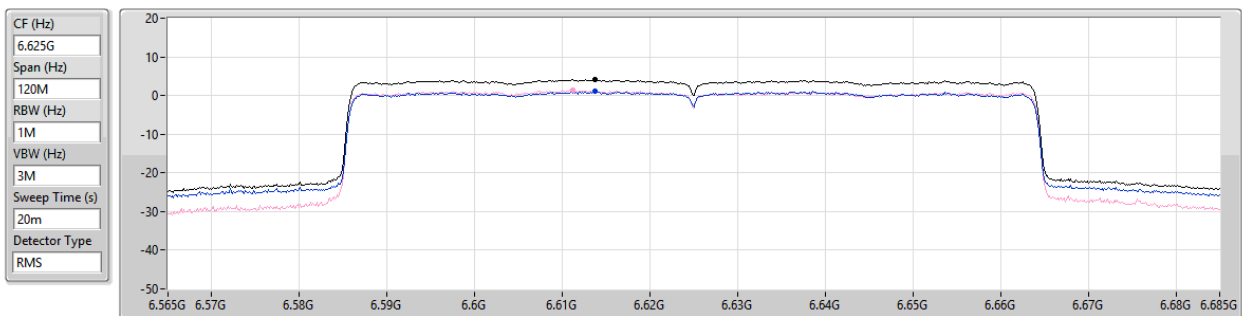

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.12	4.12	1.12	1.32

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

12/05/2026

CF (Hz)
6.705G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

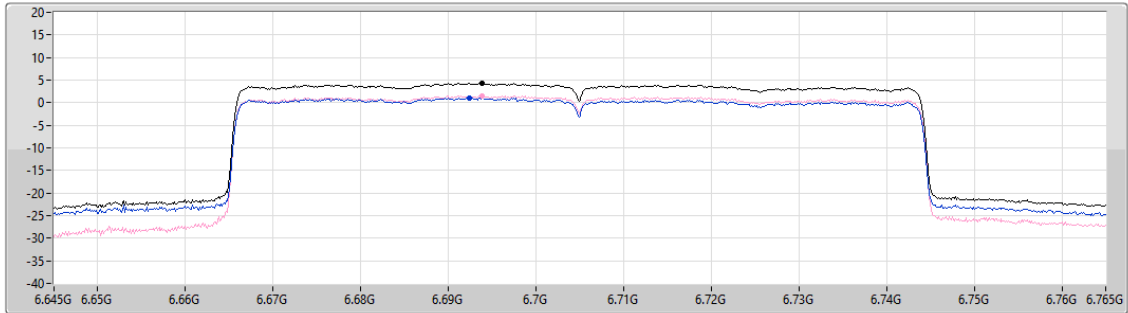

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.31	4.31	1.04	1.56

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

12/05/2026

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

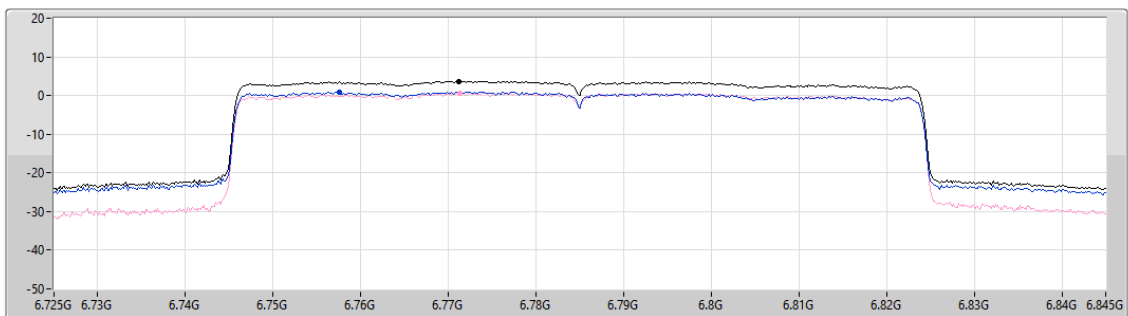

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.73	3.73	0.98	0.67

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

16/05/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

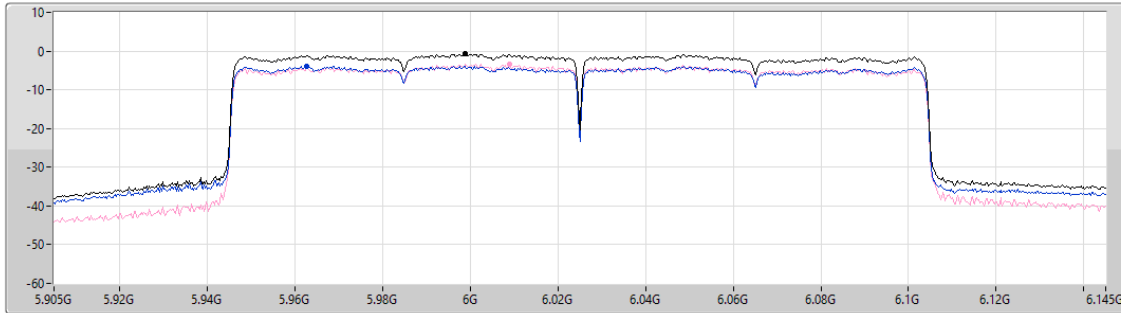

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.76	-0.76	-3.87	-3.37

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

12/05/2026

CF (Hz)
6.185G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

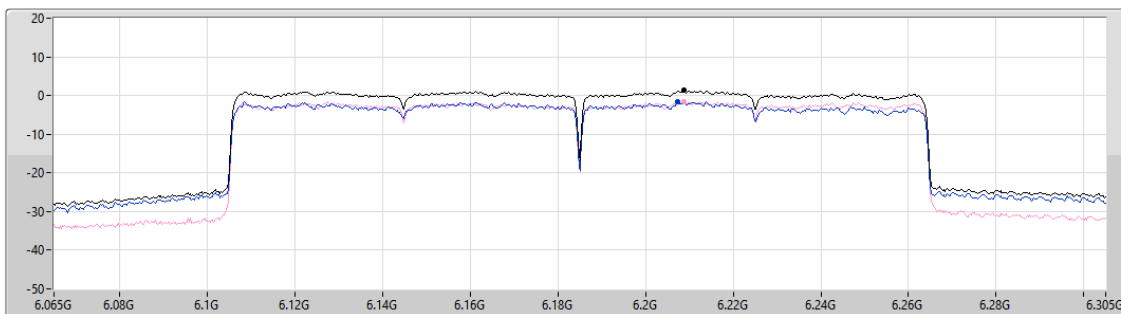

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.29	1.29	-1.61	-1.61

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

12/05/2026

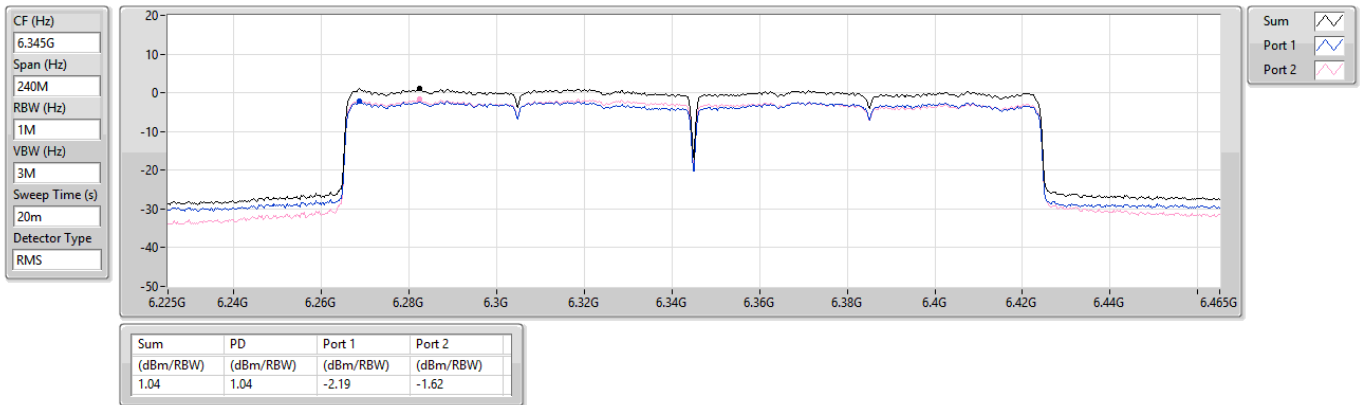


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

12/05/2026

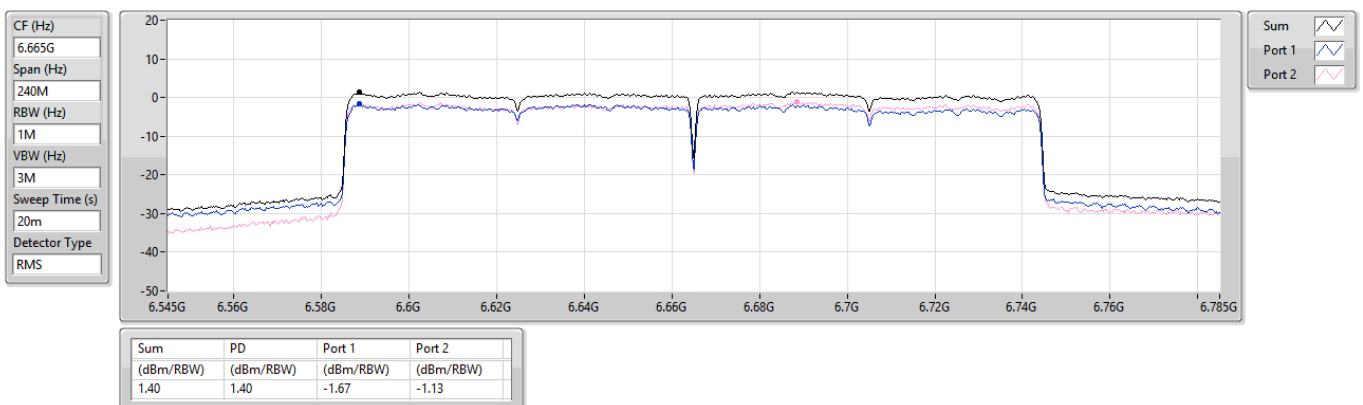


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

16/05/2026

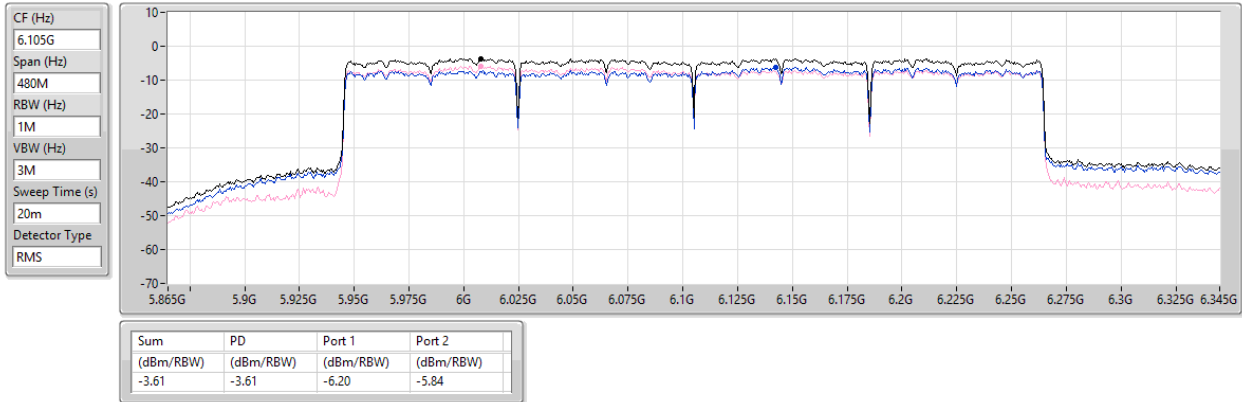


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

12/05/2026

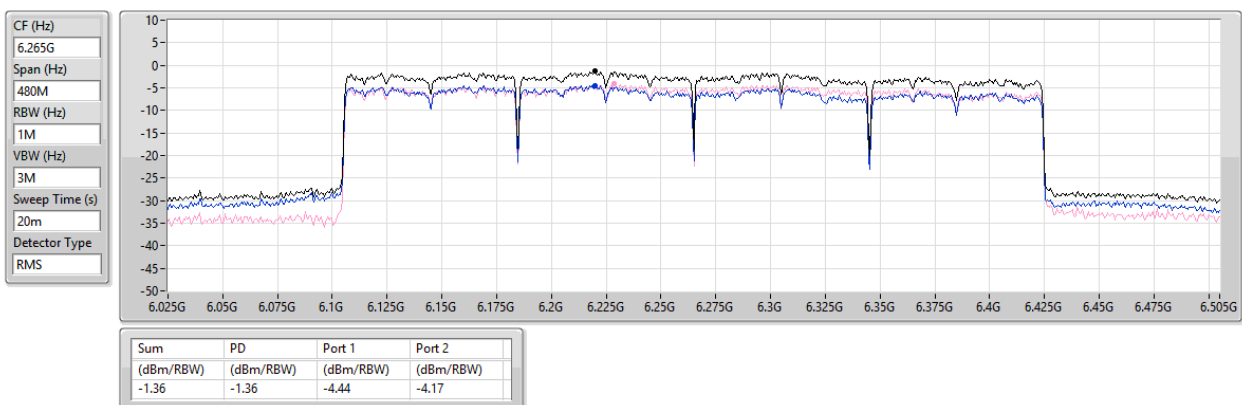


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6425MHz

12/05/2026

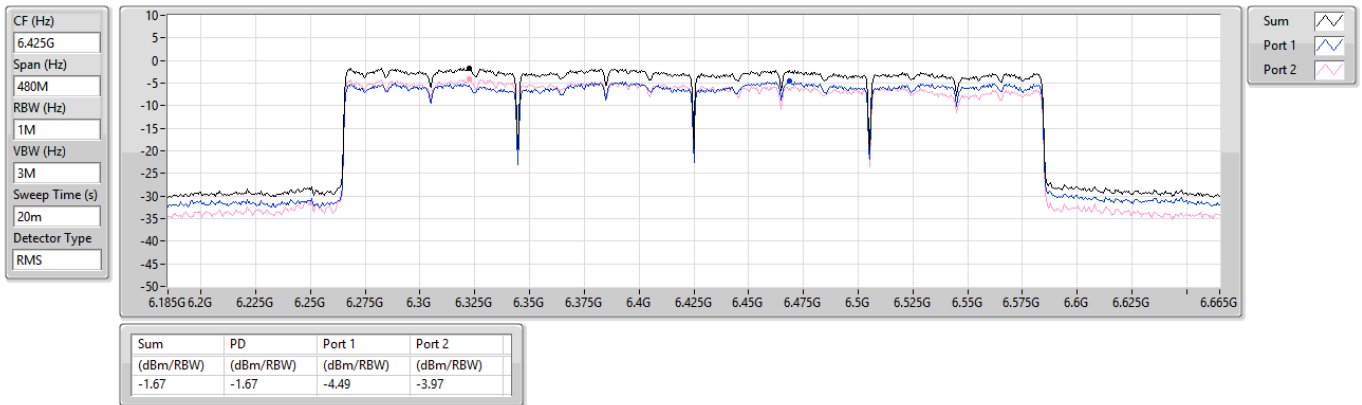



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_2TX	2.39	9.11
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_2TX	0.84	7.56
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX	0.83	7.55
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_2TX	-1.94	4.78
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-2.18	4.54
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_2TX	-1.94	4.78

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_2TX	-	-	-	-	-	-	-
5985MHz	Pass	6.72	-0.12	-0.92	2.39	9.11	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-
6025MHz	Pass	6.72	-1.80	-2.52	0.84	7.56	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX	-	-	-	-	-	-	-
6025MHz	Pass	6.72	-1.93	-2.35	0.83	7.55	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_2TX	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.55	-5.25	-1.94	4.78	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.92	-5.45	-2.18	4.54	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_2TX	-	-	-	-	-	-	-
6105MHz	Pass	6.72	-4.65	-5.23	-1.94	4.78	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_2TX

PSD

5985MHz

12/08/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.332
Detector Type
RMS

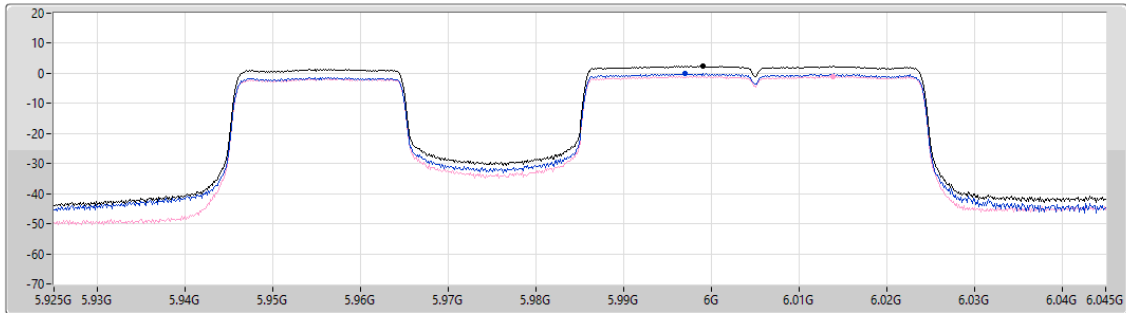

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.39	2.39	-0.12	-0.92


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_2TX

PSD

6025MHz

12/08/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.335
Detector Type
RMS

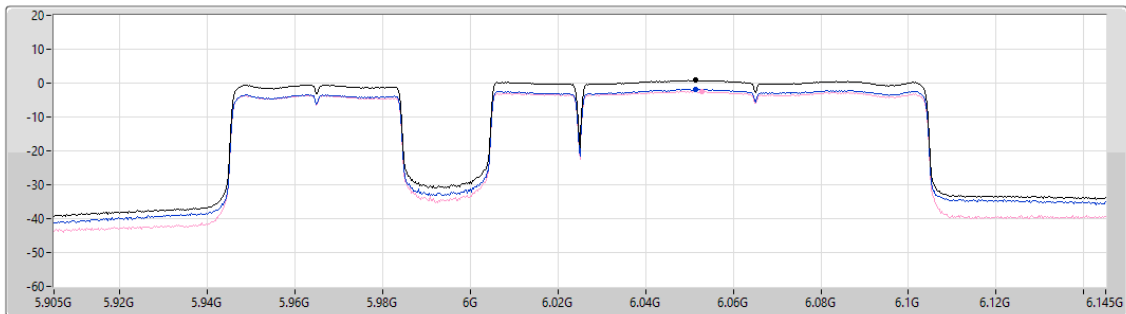

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.84	0.84	-1.80	-2.52

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX

PSD

6025MHz

12/08/2026

CF (Hz)
6.025G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.332

Detector Type
RMS

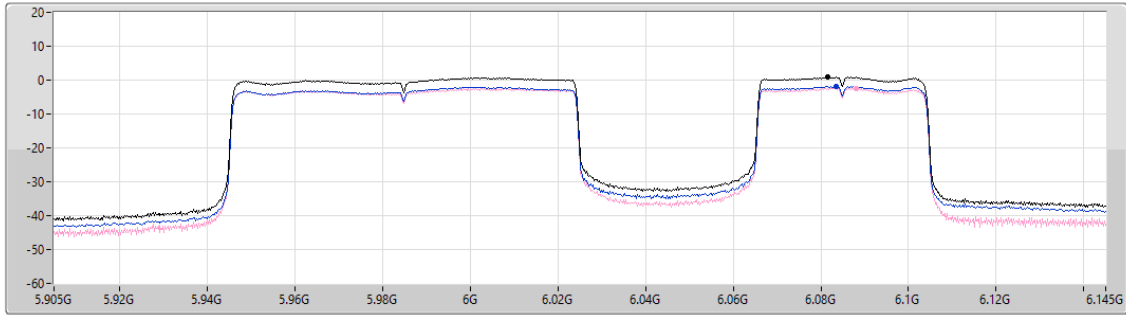

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.83	0.83	-1.93	-2.35

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_2TX

PSD

6105MHz

12/08/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.329

Detector Type
RMS

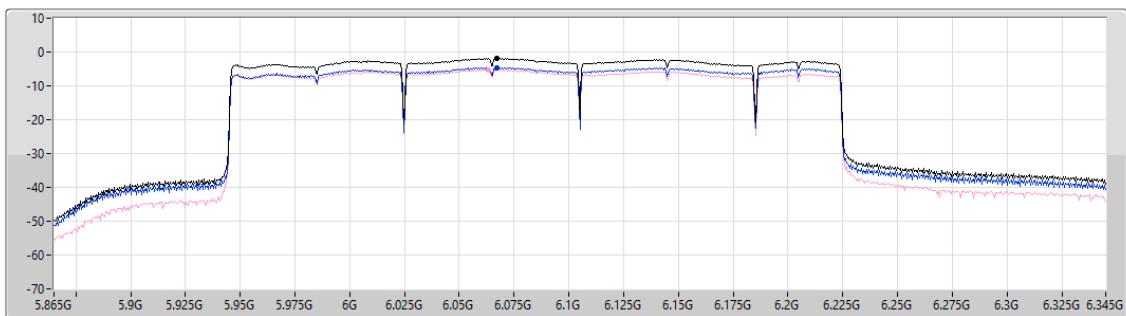

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.94	-1.94	-4.55	-5.25

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_2TX

PSD

6105MHz

12/08/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.325

Detector Type
RMS

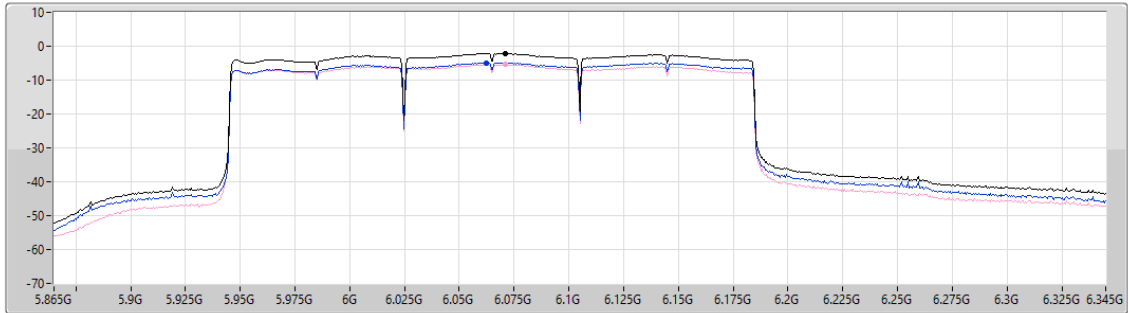

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.18	-2.18	-4.92	-5.45

Sum ☒

Port 1 ☒

Port 2 ☒

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_2TX

PSD

6105MHz

12/08/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.325

Detector Type
RMS

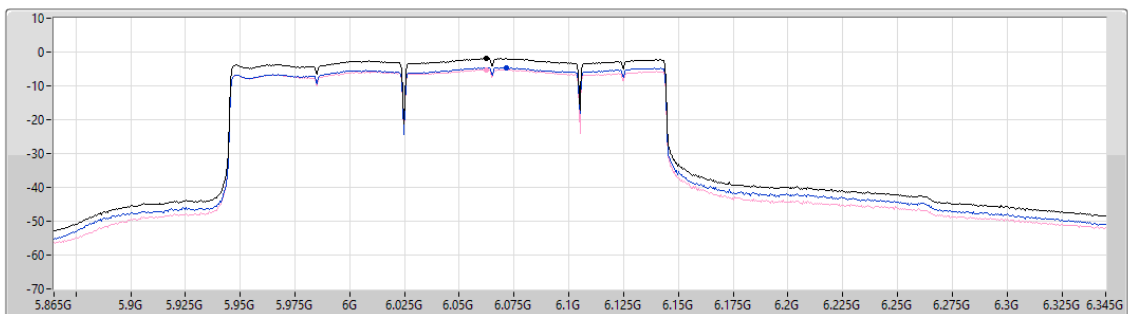

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.94	-1.94	-4.65	-5.23

Sum ☒

Port 1 ☒

Port 2 ☒



Summary

Mode	PD (dBm/RBW)	EIRP PD
		(dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_2TX	0.96	10.36
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_2TX	-1.46	7.94
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX	-0.84	8.56
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_2TX	-3.73	5.67
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 3_2TX	-3.91	5.49
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_2TX	-3.73	5.67

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_2TX	-	-	-	-	-	-	-
5985MHz	Pass	9.40	-1.75	-1.88	0.96	10.36	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_2TX	-	-	-	-	-	-	-
6025MHz	Pass	9.40	-4.14	-4.29	-1.46	7.94	23.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX	-	-	-	-	-	-	-
6025MHz	Pass	9.40	-3.34	-3.66	-0.84	8.56	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	-6.23	-6.57	-3.73	5.67	23.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 3_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	-6.32	-6.87	-3.91	5.49	23.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-
6105MHz	Pass	9.40	-5.86	-6.94	-3.73	5.67	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_2TX

PSD

5985MHz

14/08/2026

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.321
Detector Type
RMS

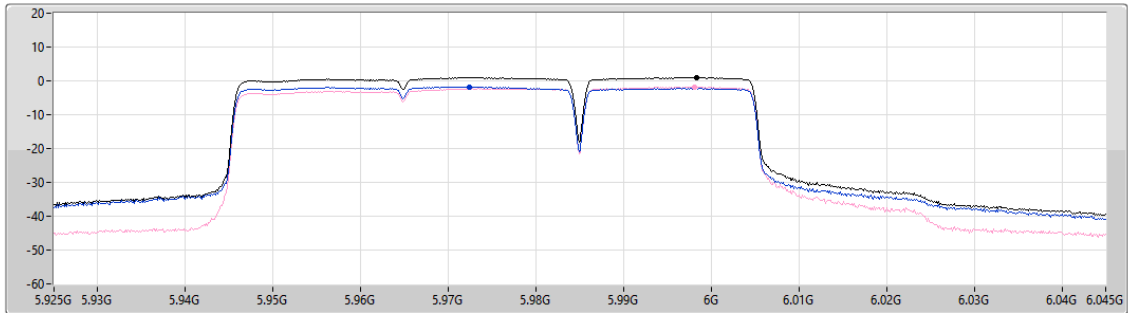

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.96	0.96	-1.75	-1.88


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_2TX

PSD

6025MHz

14/08/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.321
Detector Type
RMS

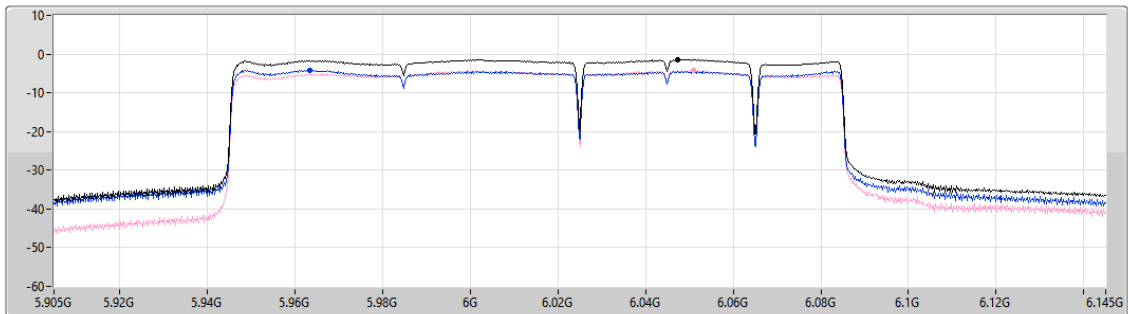

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.46	-1.46	-4.14	-4.29


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_2TX

PSD

6025MHz

14/08/2026

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.321
Detector Type
RMS

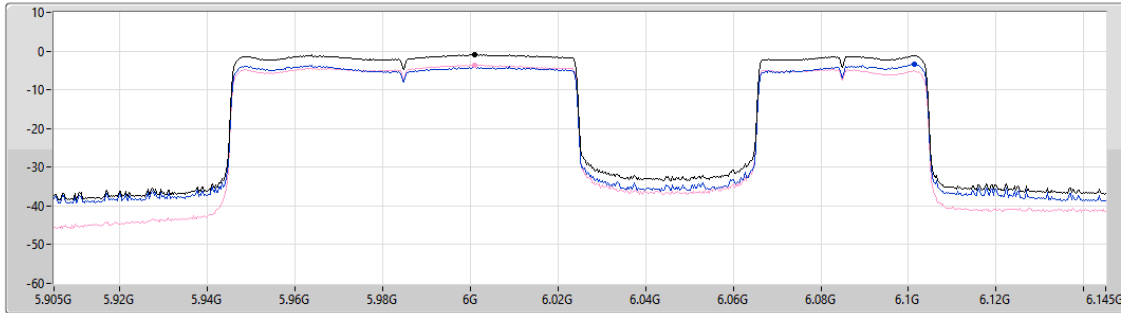

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.84	-0.84	-3.34	-3.66

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_2TX

PSD

6105MHz

14/08/2026

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.321
Detector Type
RMS

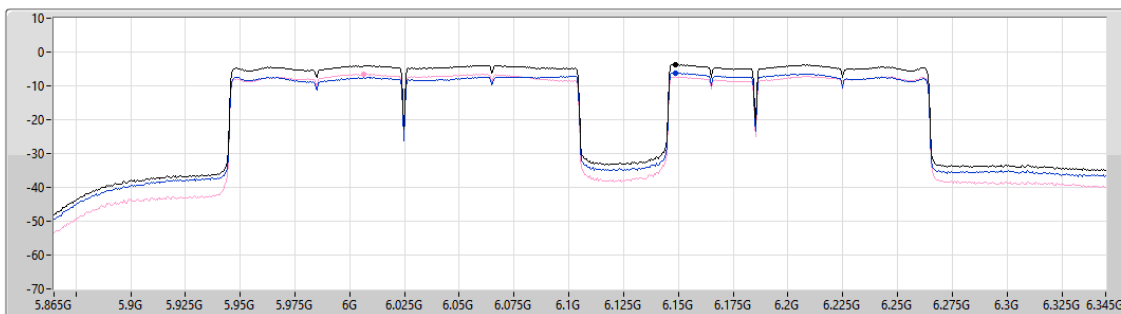

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.73	-3.73	-6.23	-6.57

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 3_2TX

PSD

6105MHz

14/08/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.321

Detector Type
RMS

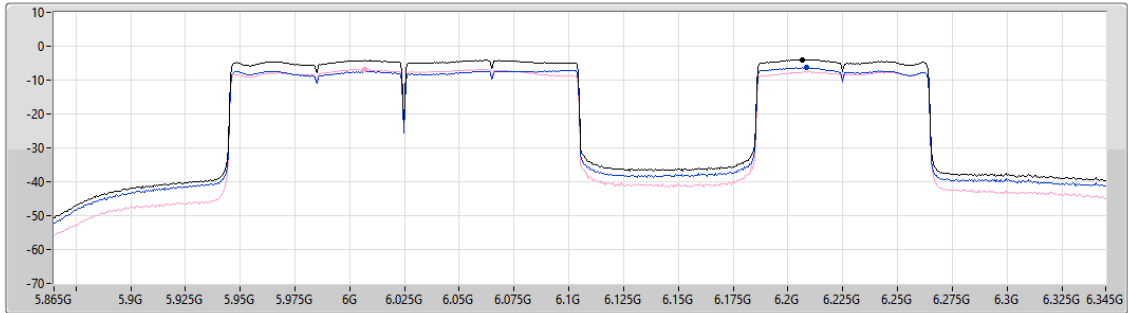

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.91	-3.91	-6.32	-6.87

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_2TX

PSD

6105MHz

14/08/2026

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
10.321

Detector Type
RMS

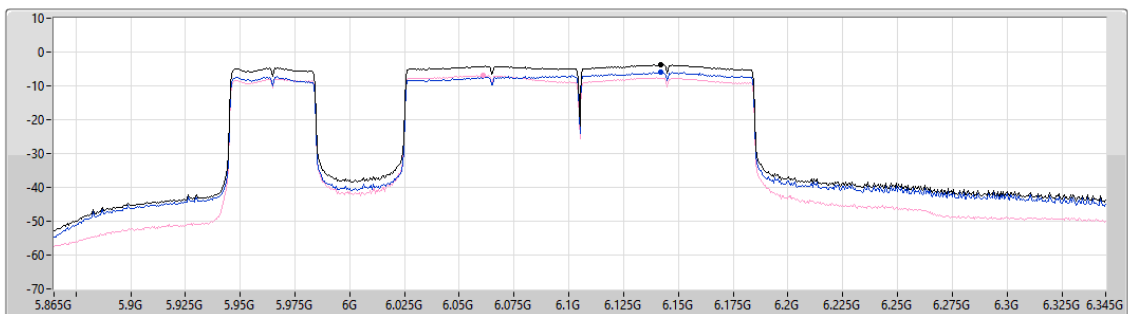

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.73	-3.73	-5.86	-6.94




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	RMS	5.923G	68.11	68.20	-0.09	3	Vertical	325	2.85	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

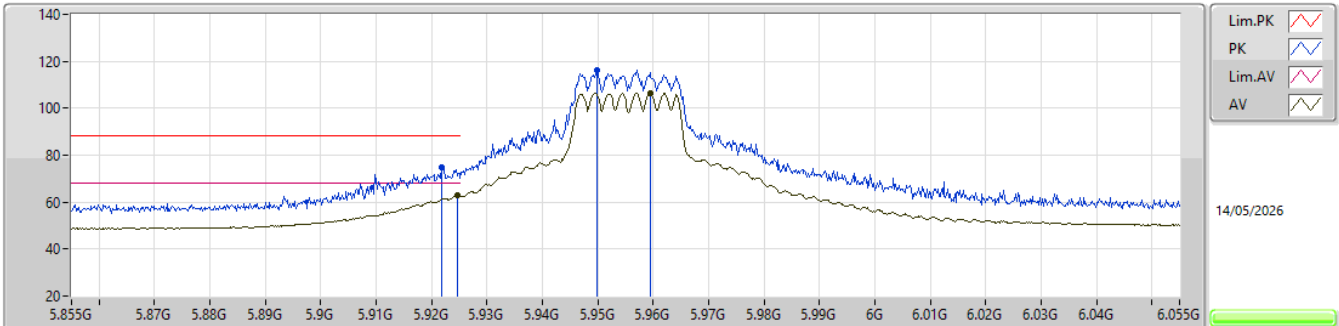


EUT_Z_2TX
Setting 80
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9218G	74.75	88.20	-13.45	67.58	3	Vertical	57	2.43	-	34.64	7.52	34.99			
RMS	5.9246G	62.98	68.20	-5.22	55.80	3	Vertical	57	2.43	-	34.65	7.52	34.99			
PK	5.9498G	115.96	Inf	-Inf	108.73	3	Vertical	57	2.43	-	34.70	7.52	34.99			
RMS	5.9594G	106.54	Inf	-Inf	99.29	3	Vertical	57	2.43	-	34.72	7.53	35.00			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

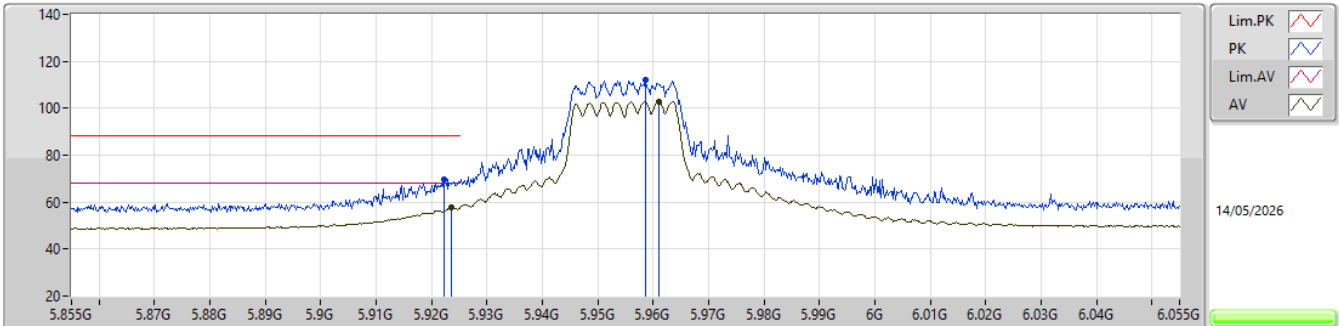


EUT_Z_2TX
Setting 80
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9222G	69.65	88.20	-18.55	62.48	3	Horizontal	190	2.69	-	34.64	7.52	34.99			
RMS	5.9236G	57.91	68.20	-10.29	50.73	3	Horizontal	190	2.69	-	34.65	7.52	34.99			
PK	5.9586G	112.16	Inf	-Inf	104.91	3	Horizontal	190	2.69	-	34.72	7.53	35.00			
RMS	5.961G	102.72	Inf	-Inf	95.47	3	Horizontal	190	2.69	-	34.72	7.53	35.00			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

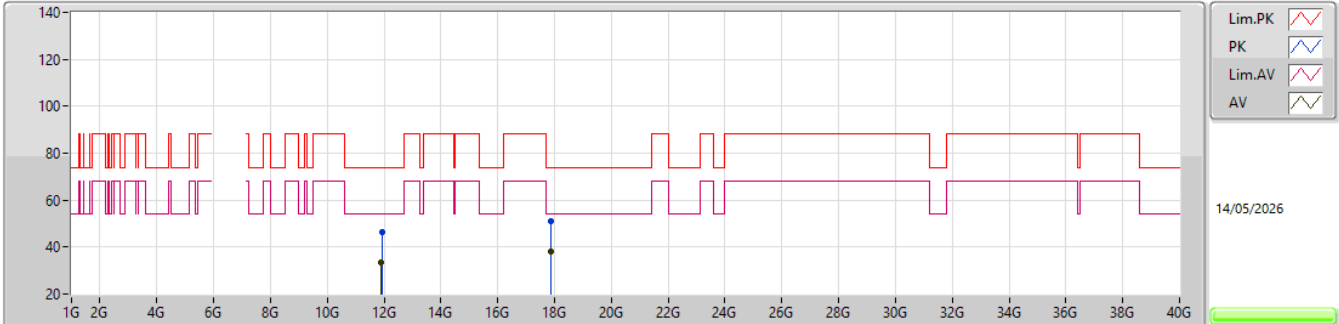


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9219G	46.30	74.00	-27.70	62.55	3	Vertical	182	2.13	-	39.44	10.88	66.57			
AV	11.90675G	33.41	54.00	-20.59	49.68	3	Vertical	182	2.13	-	39.41	10.88	66.56			
PK	17.85285G	51.10	74.00	-22.90	57.18	3	Vertical	210	1.80	-	44.61	13.21	63.90			
AV	17.87365G	38.28	54.00	-15.72	44.25	3	Vertical	210	1.80	-	44.69	13.22	63.88			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

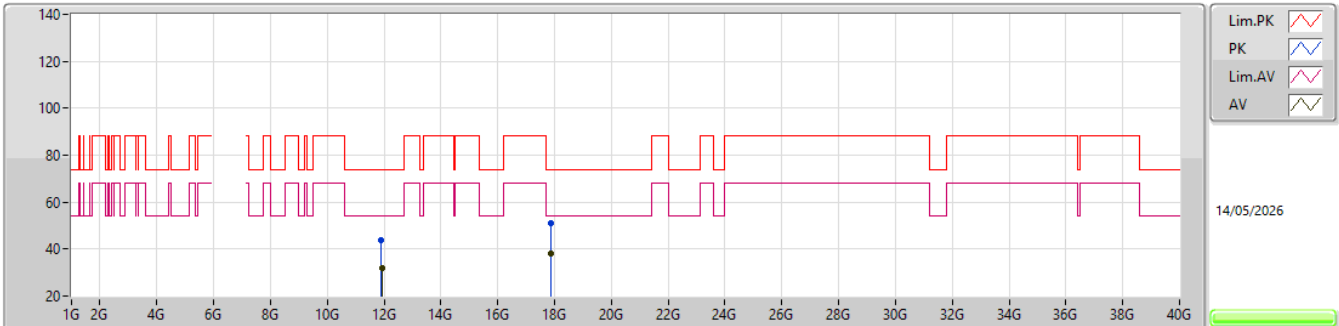


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.8974G	44.00	74.00	-30.00	60.26	3	Horizontal	114	3.00	-	39.41	10.88	66.55			
AV	11.9141G	31.91	54.00	-22.09	48.16	3	Horizontal	114	3.00	-	39.43	10.88	66.56			
PK	17.8546G	51.16	74.00	-22.84	57.23	3	Horizontal	152	1.80	-	44.62	13.21	63.90			
AV	17.86405G	38.25	54.00	-15.75	44.27	3	Horizontal	152	1.80	-	44.66	13.21	63.89			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

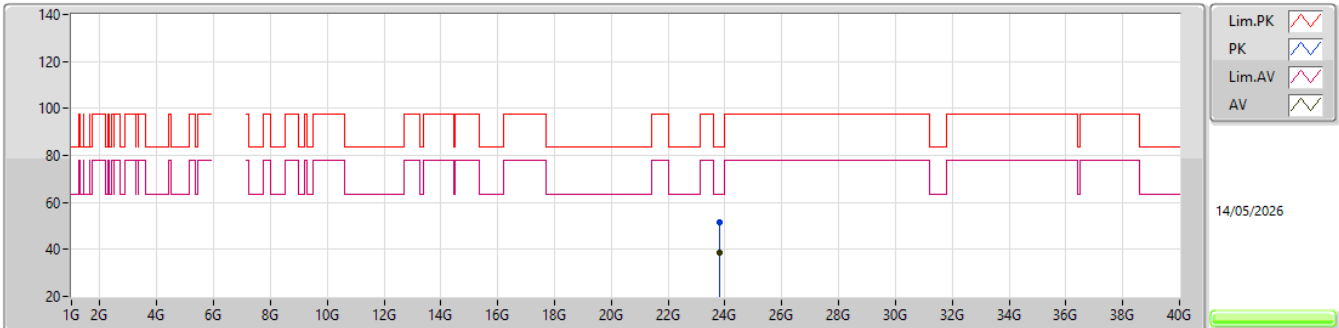


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82894G	51.68	83.54	-31.86	41.34	1	Vertical	96	2.33	-	38.68	18.76	47.10			
AV	23.82039G	38.40	63.54	-25.14	28.02	1	Vertical	96	2.33	-	38.72	18.76	47.10			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

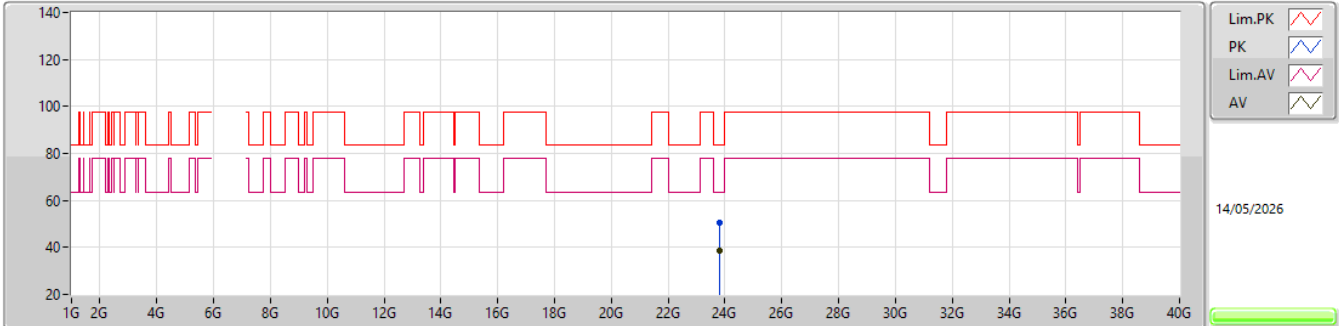


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81757G	50.27	83.54	-33.27	39.88	1	Horizontal	256	2.21	-	38.73	18.76	47.10			
AV	23.8056G	38.43	63.54	-25.11	28.00	1	Horizontal	256	2.21	-	38.78	18.76	47.11			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

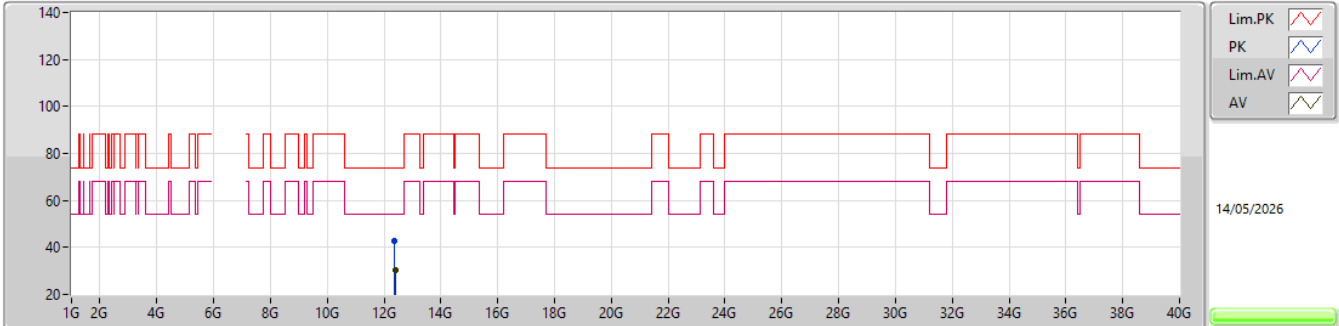


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37761G	42.80	74.00	-31.20	58.89	3	Vertical	142	2.90	-	38.90	11.02	66.01			
AV	12.38646G	30.33	54.00	-23.67	46.40	3	Vertical	142	2.90	-	38.90	11.02	65.99			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

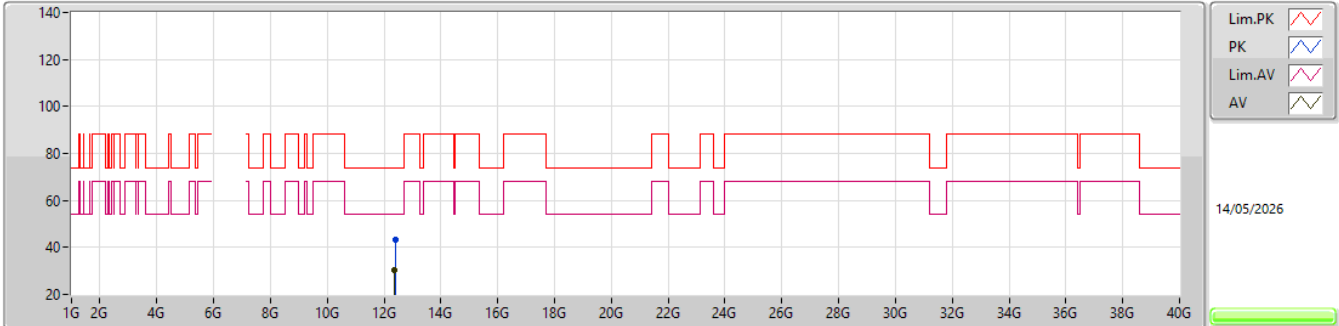


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40332G	43.18	74.00	-30.82	59.21	3	Horizontal	154	2.46	-	38.90	11.03	65.96			
AV	12.37905G	30.25	54.00	-23.75	46.33	3	Horizontal	154	2.46	-	38.90	11.02	66.00			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

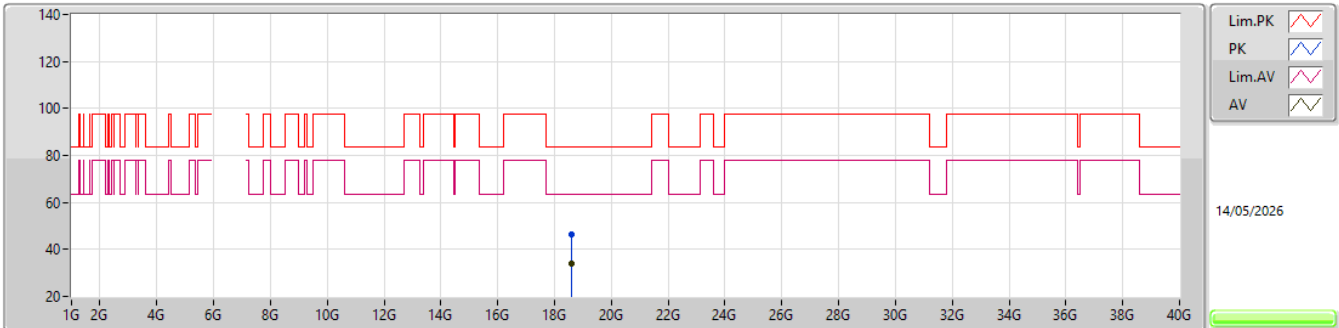


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5988G	46.30	83.54	-37.24	41.68	1	Vertical	173	2.17	-	37.70	16.59	49.67			
AV	18.58731G	33.96	63.54	-29.58	29.39	1	Vertical	173	2.17	-	37.67	16.58	49.68			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

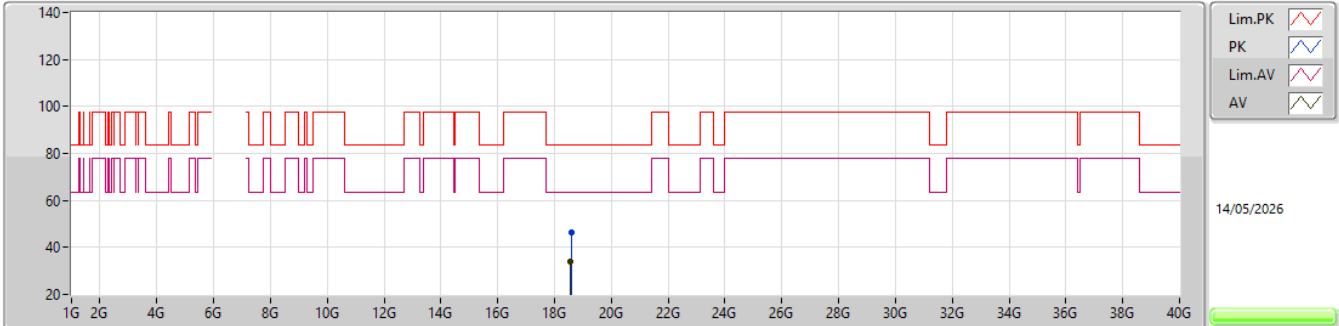


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59157G	46.40	83.54	-37.14	41.82	1	Horizontal	177	1.28	-	37.68	16.58	49.68			
AV	18.5733G	34.13	63.54	-29.41	29.60	1	Horizontal	177	1.28	-	37.65	16.57	49.69			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

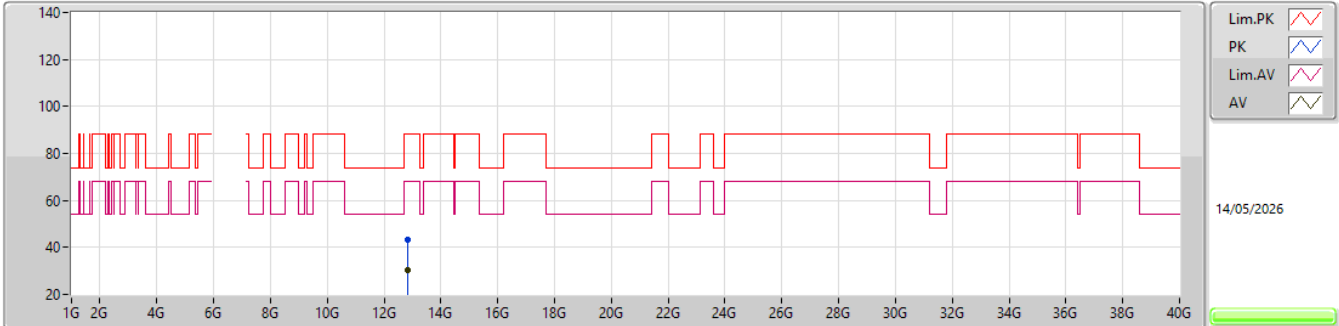


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81956G	43.04	88.20	-45.16	58.43	3	Vertical	284	1.62	-	39.28	11.15	65.82			
RMS	12.84386G	30.60	68.20	-37.60	45.89	3	Vertical	284	1.62	-	39.38	11.15	65.82			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

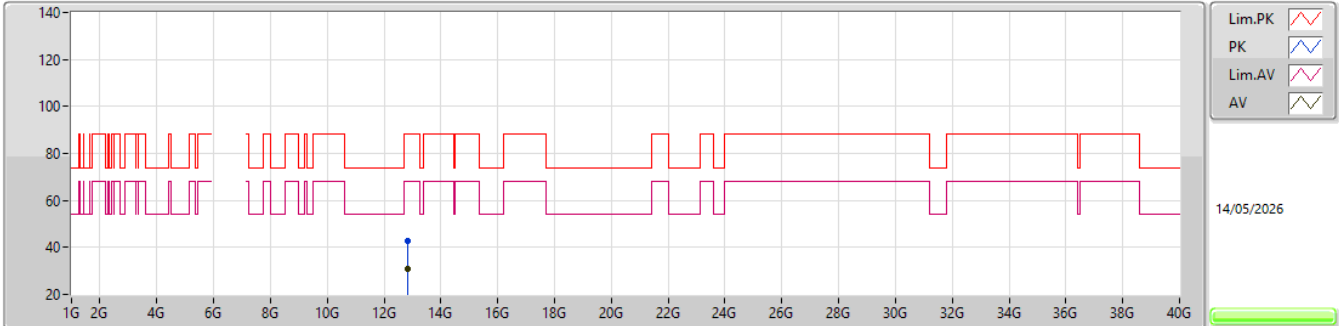


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83987G	42.69	88.20	-45.51	58.00	3	Horizontal	203	2.48	-	39.36	11.15	65.82			
RMS	12.84074G	30.74	68.20	-37.46	46.05	3	Horizontal	203	2.48	-	39.36	11.15	65.82			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

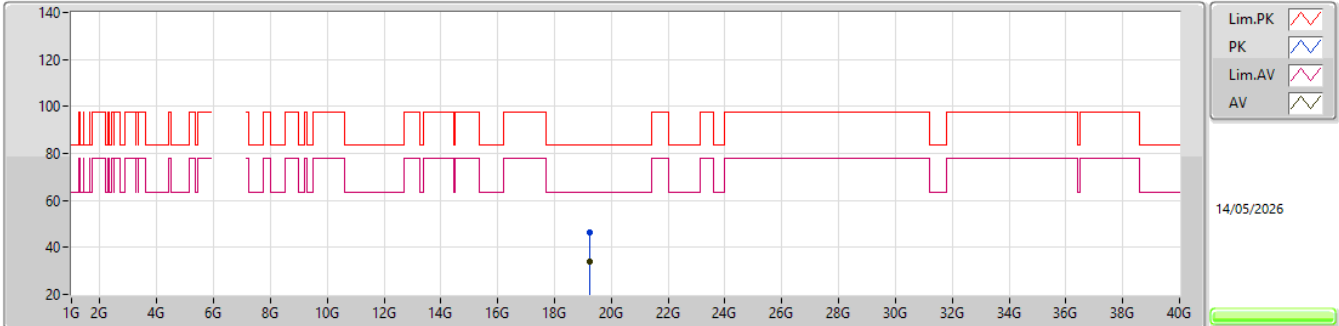


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2342G	46.54	83.54	-37.00	41.24	1	Vertical	10	2.51	-	37.84	16.93	49.47			
AV	19.25253G	34.09	63.54	-29.45	28.74	1	Vertical	10	2.51	-	37.89	16.94	49.48			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

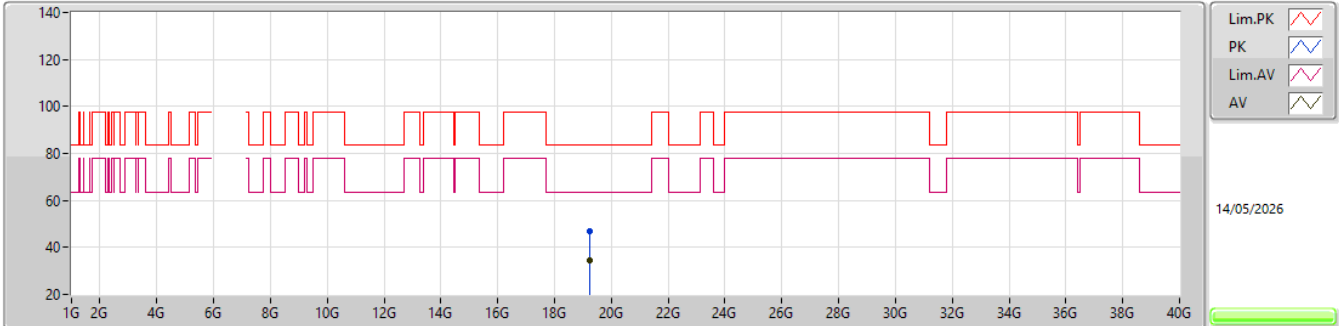


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24725G	46.90	83.54	-36.64	41.56	1	Horizontal	315	1.80	-	37.89	16.93	49.48			
AV	19.25091G	34.24	63.54	-29.30	28.88	1	Horizontal	315	1.80	-	37.90	16.94	49.48			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

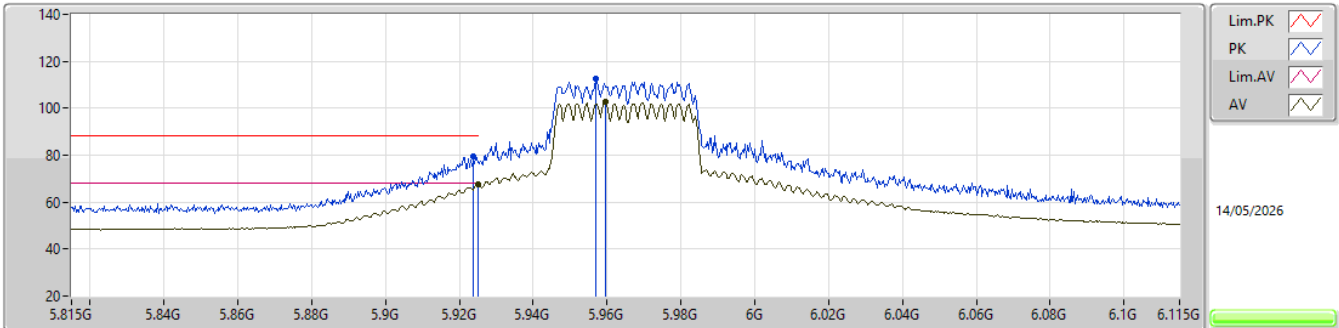


EUT_Z_2TX
Setting 76
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9239G	79.67	88.20	-8.53	72.49	3	Vertical	58	2.52	-	34.65	7.52	34.99			
RMS	5.925G	67.65	68.20	-0.55	60.47	3	Vertical	58	2.52	-	34.65	7.52	34.99			
PK	5.9569G	112.53	Inf	-Inf	105.29	3	Vertical	58	2.52	-	34.71	7.53	35.00			
RMS	5.9596G	102.53	Inf	-Inf	95.28	3	Vertical	58	2.52	-	34.72	7.53	35.00			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

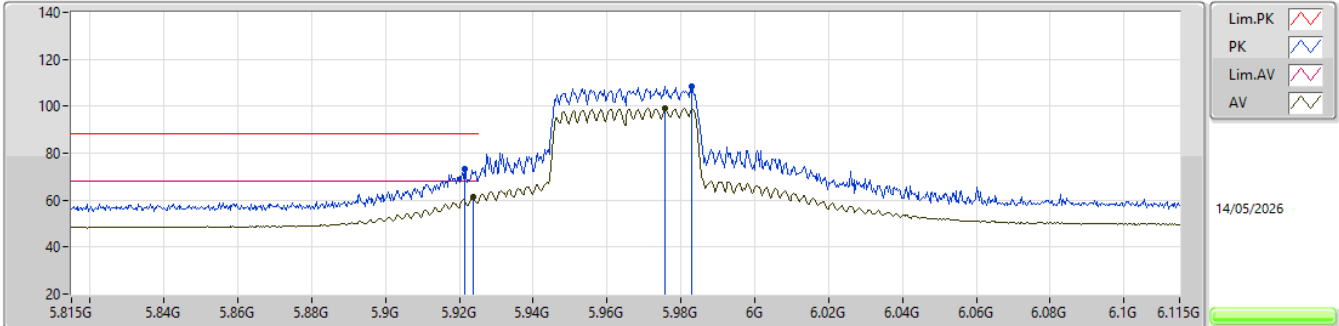


EUT_Z_2TX
Setting 76
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9215G	73.31	88.20	-14.89	66.14	3	Horizontal	190	2.63	-	34.64	7.52	34.99				
RMS	5.9236G	61.29	68.20	-6.91	54.11	3	Horizontal	190	2.63	-	34.65	7.52	34.99				
PK	5.983G	108.66	Inf	-Inf	101.36	3	Horizontal	190	2.63	-	34.77	7.53	35.00				
RMS	5.9758G	99.15	Inf	-Inf	91.87	3	Horizontal	190	2.63	-	34.75	7.53	35.00				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

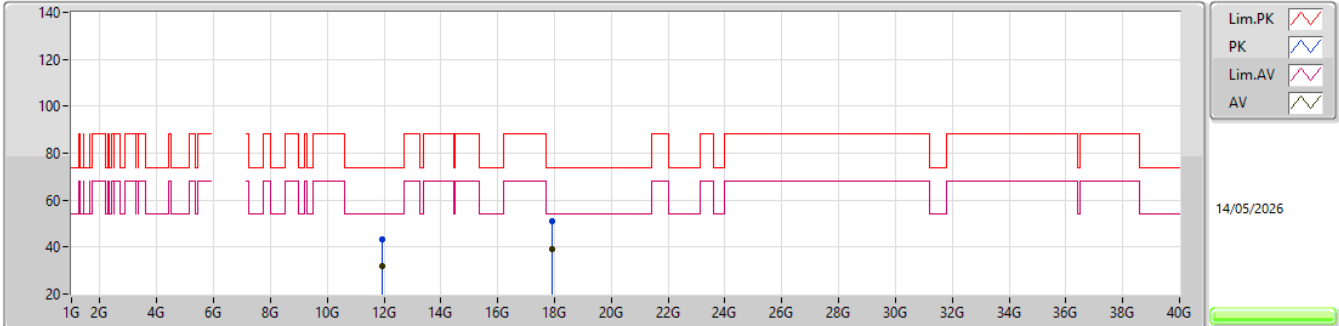


EUT_Z_2TX
Setting 76
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93327G	43.10	74.00	-30.90	59.31	3	Vertical	160	1.32	-	39.47	10.89	66.57			
AV	11.93567G	31.64	54.00	-22.36	47.86	3	Vertical	160	1.32	-	39.47	10.89	66.58			
PK	17.9082G	51.22	74.00	-22.78	57.00	3	Vertical	198	1.11	-	44.82	13.23	63.83			
AV	17.90616G	39.39	54.00	-14.61	45.18	3	Vertical	198	1.11	-	44.81	13.23	63.83			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

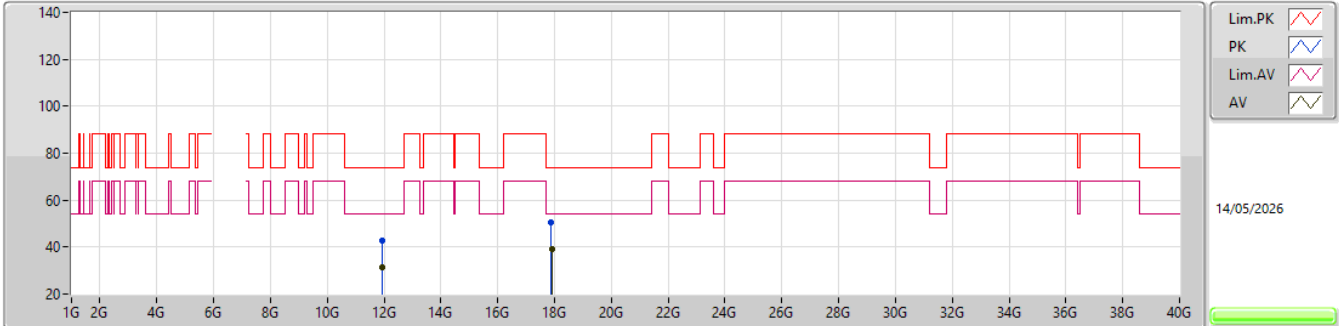


EUT_Z_2TX
Setting 76
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91629G	43.01	74.00	-30.99	59.26	3	Horizontal	296	1.76	-	39.43	10.88	66.56				
AV	11.93579G	31.25	54.00	-22.75	47.47	3	Horizontal	296	1.76	-	39.47	10.89	66.58				
PK	17.89365G	50.43	74.00	-23.57	56.29	3	Horizontal	248	2.73	-	44.77	13.22	63.85				
AV	17.90439G	39.07	54.00	-14.93	44.87	3	Horizontal	248	2.73	-	44.81	13.23	63.84				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

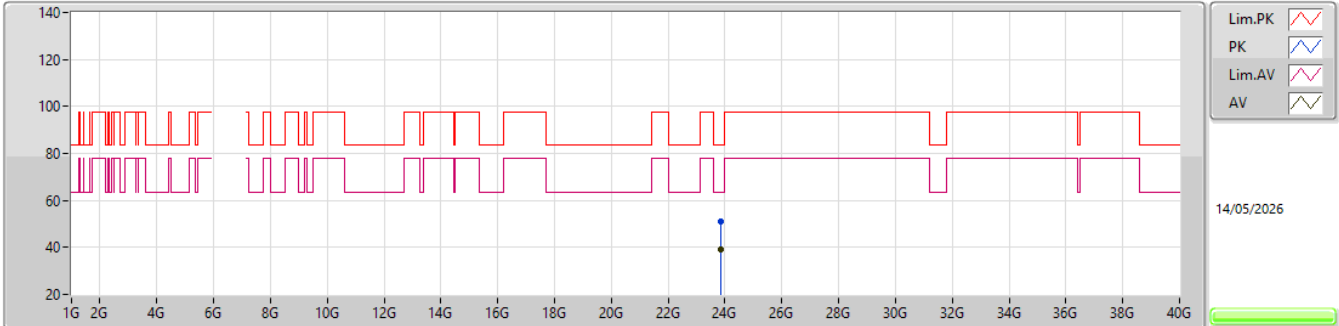


EUT_Z_2TX
Setting 76
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85943G	50.82	83.54	-32.72	40.52	1	Vertical	280	1.93	-	38.62	18.76	47.08			
AV	23.85856G	39.23	63.54	-24.31	28.93	1	Vertical	280	1.93	-	38.62	18.76	47.08			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

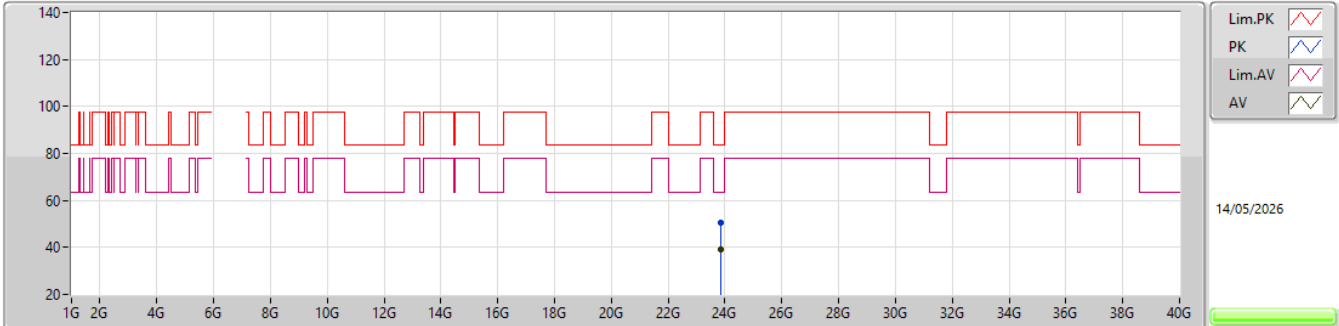


EUT_Z_2TX
Setting 76
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.84992G	50.75	83.54	-32.79	40.48	1	Horizontal	230	2.42	-	38.60	18.76	47.09			
AV	23.86792G	38.98	63.54	-24.56	28.66	1	Horizontal	230	2.42	-	38.64	18.76	47.08			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

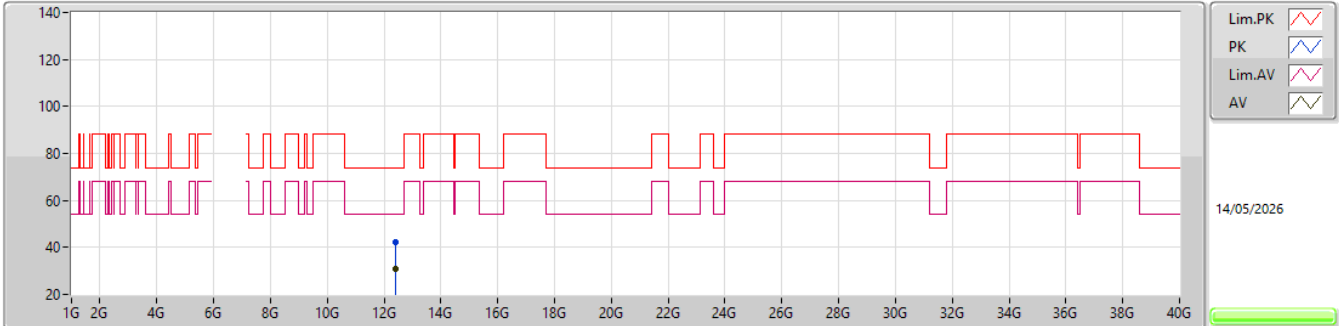


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39923G	42.16	74.00	-31.84	58.20	3	Vertical	59	2.13	-	38.90	11.03	65.97			
AV	12.41624G	30.65	54.00	-23.35	46.66	3	Vertical	59	2.13	-	38.90	11.03	65.94			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

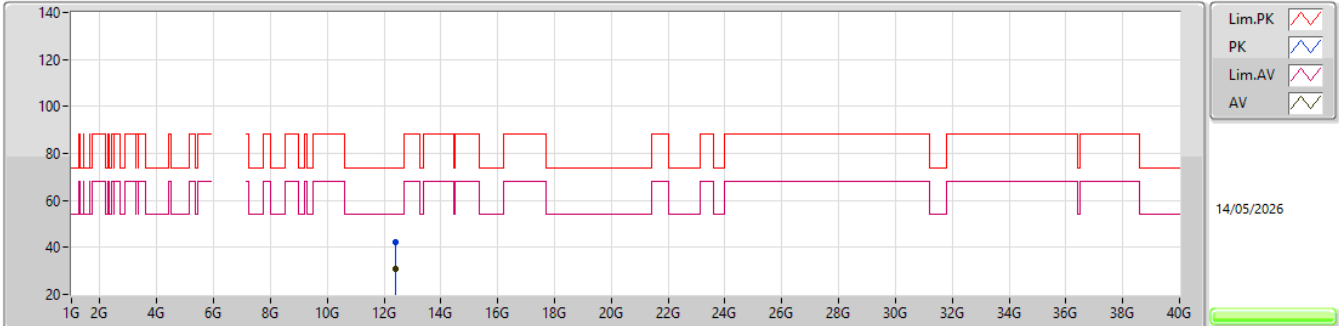


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41666G	42.13	74.00	-31.87	58.14	3	Horizontal	204	2.70	-	38.90	11.03	65.94			
AV	12.39821G	30.67	54.00	-23.33	46.71	3	Horizontal	204	2.70	-	38.90	11.03	65.97			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

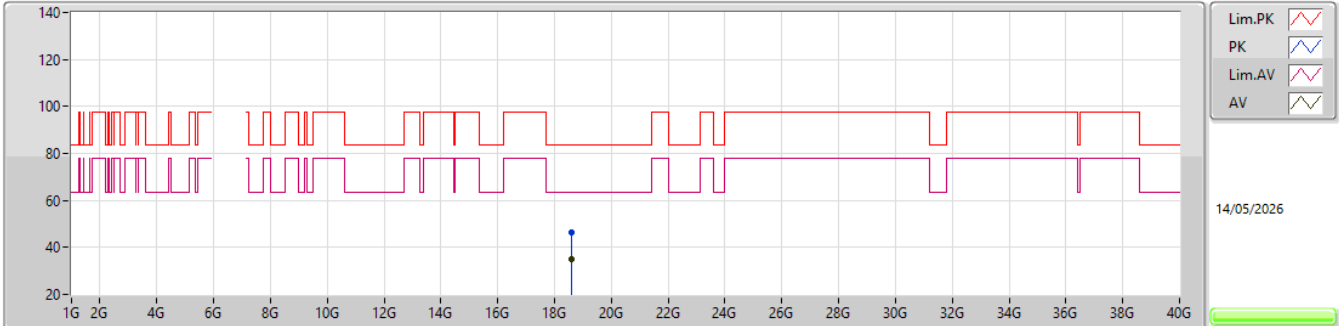


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61086G	46.31	83.54	-37.23	41.68	1	Vertical	79	1.19	-	37.70	16.59	49.66			
AV	18.6144G	34.95	63.54	-28.59	30.32	1	Vertical	79	1.19	-	37.70	16.59	49.66			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

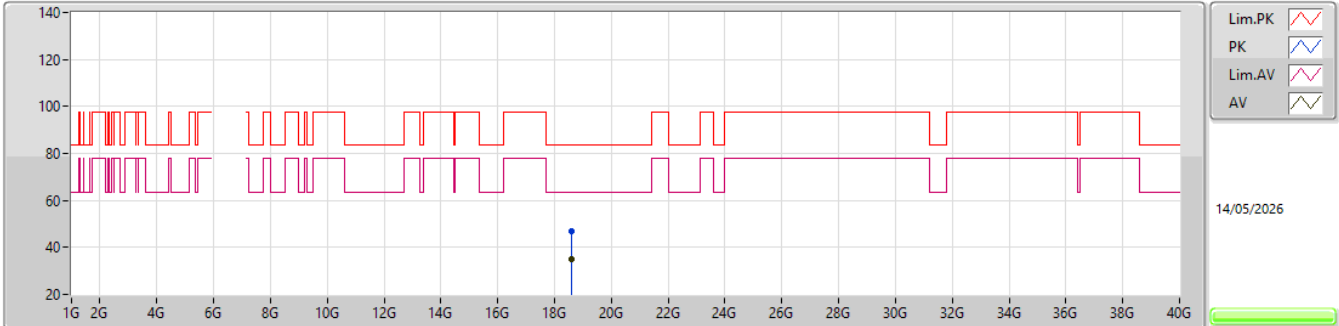


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61767G	46.65	83.54	-36.89	42.01	1	Horizontal	332	1.20	-	37.70	16.60	49.66			
AV	18.60612G	34.88	63.54	-28.66	30.26	1	Horizontal	332	1.20	-	37.70	16.59	49.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

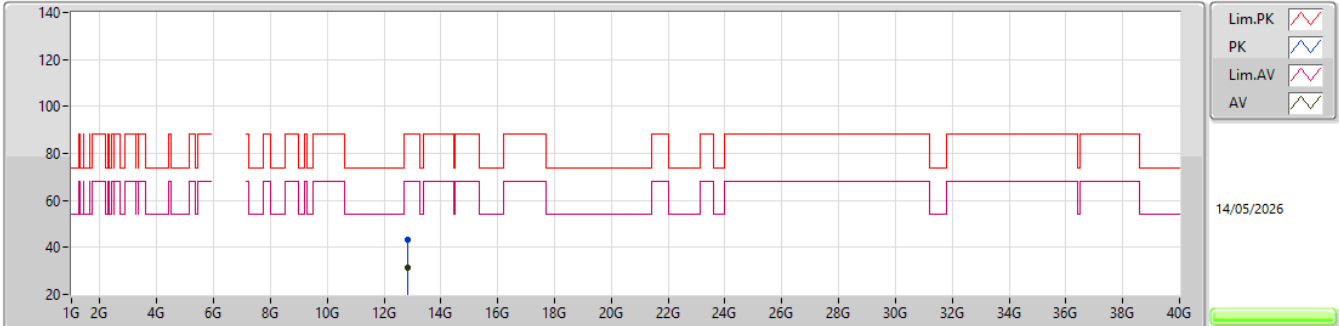


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81735G	43.42	88.20	-44.78	58.82	3	Vertical	160	1.04	-	39.27	11.15	65.82			
RMS	12.82197G	31.23	68.20	-36.97	46.61	3	Vertical	160	1.04	-	39.29	11.15	65.82			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

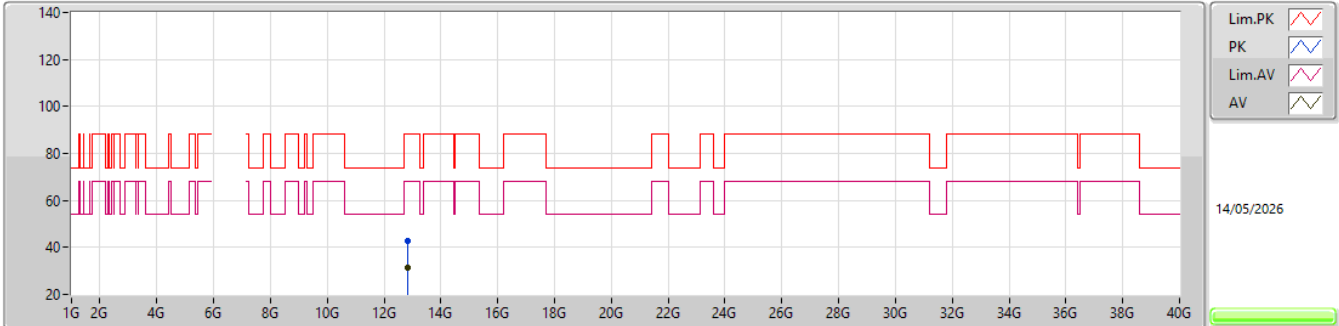


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82233G	42.68	88.20	-45.52	58.06	3	Horizontal	99	2.26	-	39.29	11.15	65.82			
RMS	12.81987G	31.31	68.20	-36.89	46.70	3	Horizontal	99	2.26	-	39.28	11.15	65.82			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

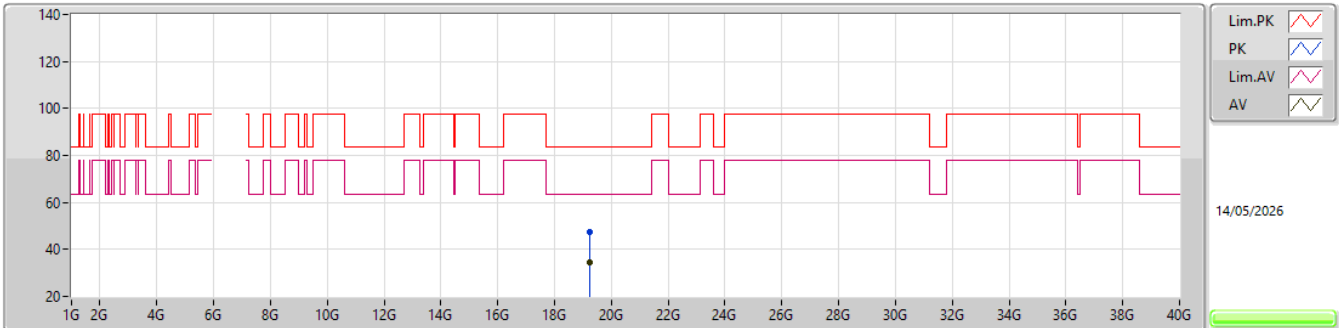


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.22484G	47.27	83.54	-36.27	42.02	1	Vertical	301	2.39	-	37.80	16.92	49.47			
AV	19.22493G	34.62	63.54	-28.92	29.37	1	Vertical	301	2.39	-	37.80	16.92	49.47			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

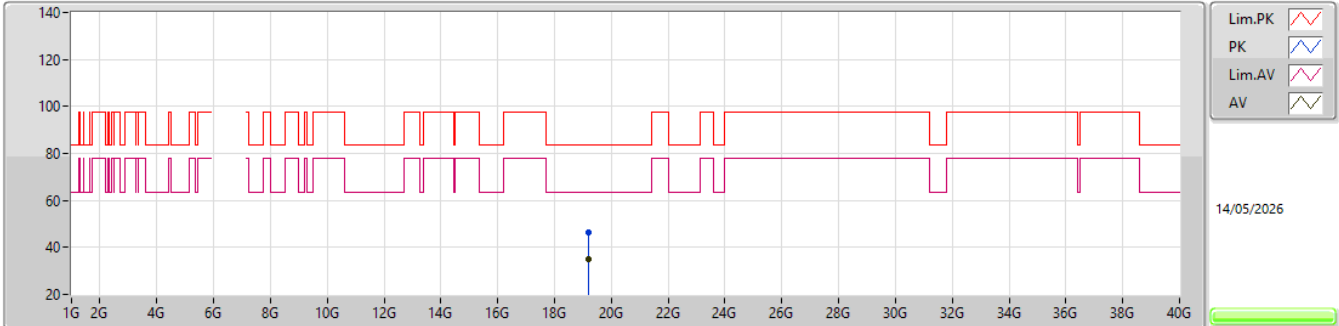


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21389G	46.52	83.54	-37.02	41.31	1	Horizontal	88	2.92	-	37.76	16.91	49.46			
AV	19.21581G	34.76	63.54	-28.78	29.54	1	Horizontal	88	2.92	-	37.76	16.92	49.46			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

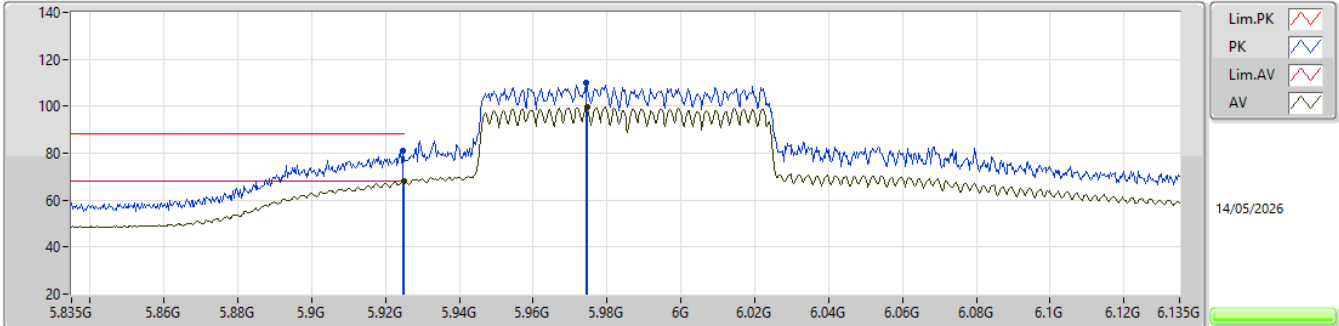


EUT_Z_2TX
Setting 77
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9247G	80.96	88.20	-7.24	73.78	3	Vertical	58	2.47	-	34.65	7.52	34.99			
RMS	5.925G	67.89	68.20	-0.31	60.71	3	Vertical	58	2.47	-	34.65	7.52	34.99			
PK	5.9742G	109.95	Inf	-Inf	102.67	3	Vertical	58	2.47	-	34.75	7.53	35.00			
RMS	5.9745G	99.67	Inf	-Inf	92.39	3	Vertical	58	2.47	-	34.75	7.53	35.00			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

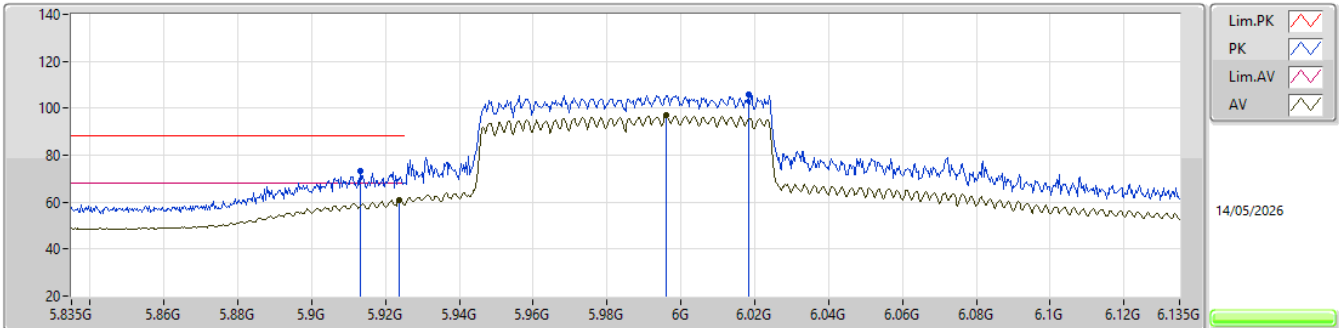


EUT_Z_2TX
Setting 77
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9133G	73.25	88.20	-14.95	66.08	3	Horizontal	189	2.66	-	34.63	7.52	34.98			
RMS	5.9238G	60.97	68.20	-7.23	53.79	3	Horizontal	189	2.66	-	34.65	7.52	34.99			
PK	6.0183G	105.61	Inf	-Inf	98.20	3	Horizontal	189	2.66	-	34.87	7.55	35.01			
RMS	5.9961G	97.02	Inf	-Inf	89.71	3	Horizontal	189	2.66	-	34.79	7.53	35.01			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

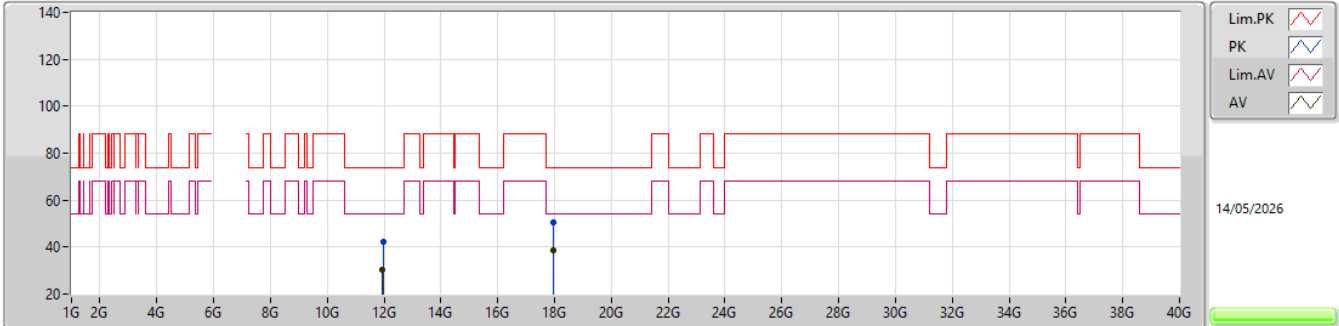


EUT_Z_2TX
Setting 77
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.95932G	42.46	74.00	-31.54	58.69	3	Vertical	46	2.89	-	39.46	10.90	66.59				
AV	11.95527G	30.58	54.00	-23.42	46.79	3	Vertical	46	2.89	-	39.48	10.90	66.59				
PK	17.95959G	50.47	74.00	-23.53	56.06	3	Vertical	206	1.84	-	44.92	13.25	63.76				
AV	17.95155G	38.43	54.00	-15.57	44.05	3	Vertical	206	1.84	-	44.90	13.25	63.77				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

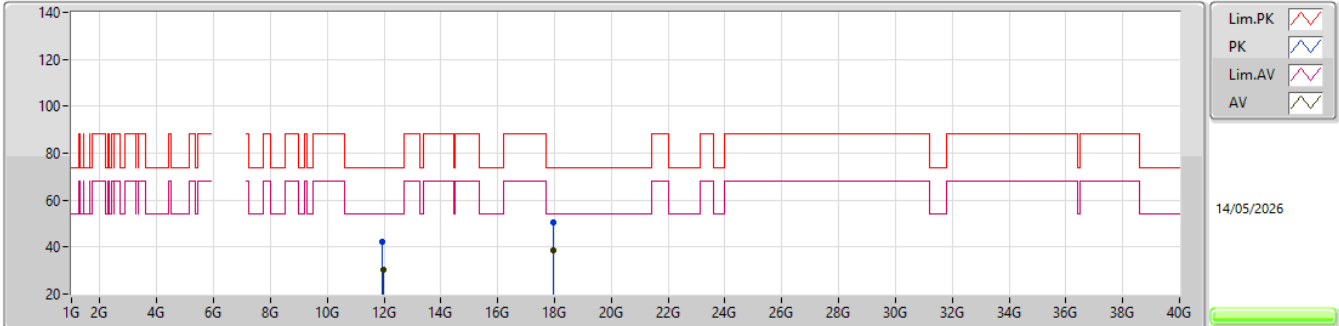


EUT_Z_2TX
Setting 77
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.95548G	42.01	74.00	-31.99	58.22	3	Horizontal	33	2.70	-	39.48	10.90	66.59			
AV	11.97108G	30.58	54.00	-23.42	46.85	3	Horizontal	33	2.70	-	39.42	10.90	66.59			
PK	17.9547G	50.34	74.00	-23.66	55.95	3	Horizontal	337	2.57	-	44.91	13.25	63.77			
AV	17.94528G	38.37	54.00	-15.63	44.01	3	Horizontal	337	2.57	-	44.89	13.25	63.78			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

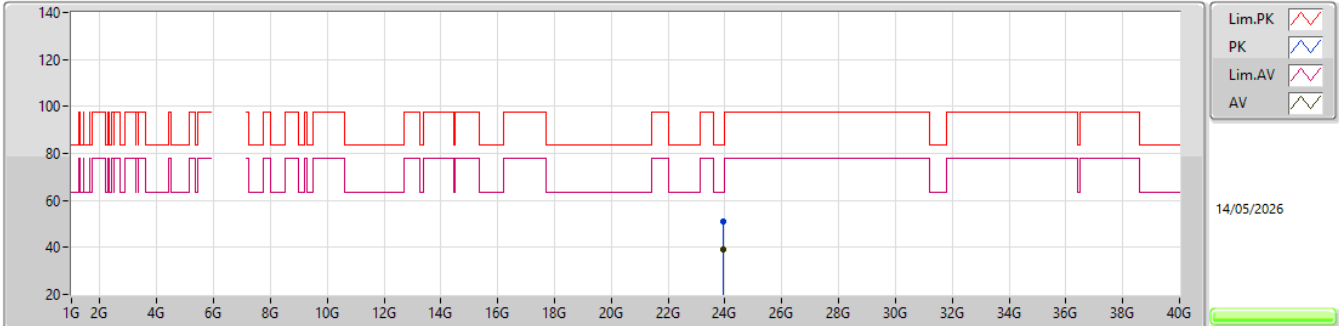


EUT_Z_2TX
Setting 77
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93388G	50.89	83.54	-32.65	40.33	1	Vertical	317	1.86	-	38.84	18.77	47.05			
AV	23.93265G	39.33	63.54	-24.21	28.78	1	Vertical	317	1.86	-	38.83	18.77	47.05			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

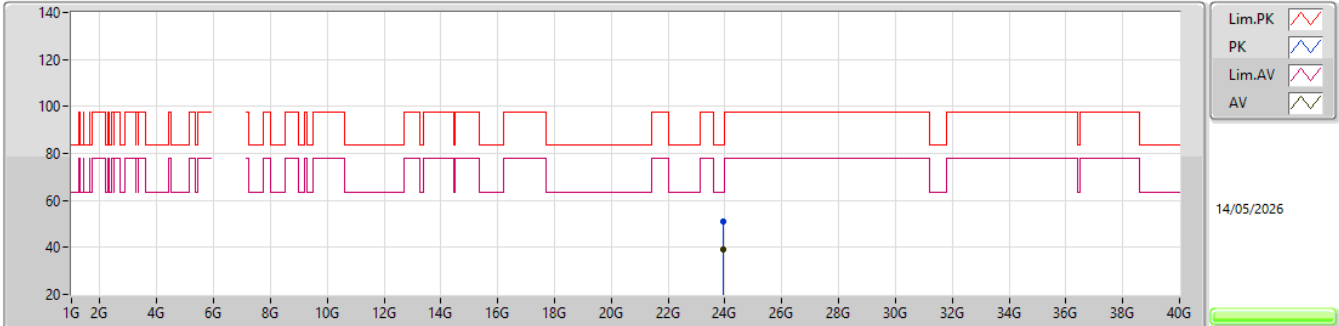


EUT_Z_2TX
Setting 77
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93184G	50.79	83.54	-32.75	40.24	1	Horizontal	286	2.42	-	38.83	18.77	47.05			
AV	23.95359G	39.33	63.54	-24.21	28.71	1	Horizontal	286	2.42	-	38.89	18.77	47.04			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

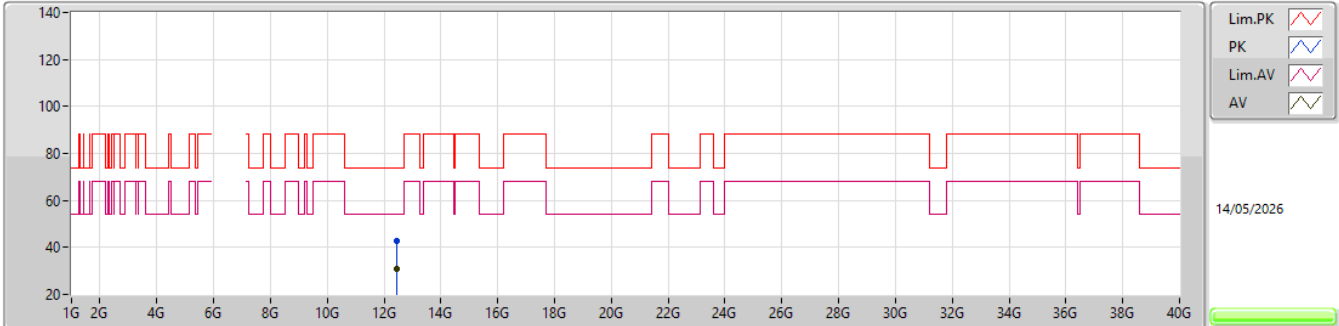


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4371G	42.93	74.00	-31.07	58.90	3	Vertical	244	2.02	-	38.90	11.04	65.91			
AV	12.45477G	31.09	54.00	-22.91	47.03	3	Vertical	244	2.02	-	38.90	11.04	65.88			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

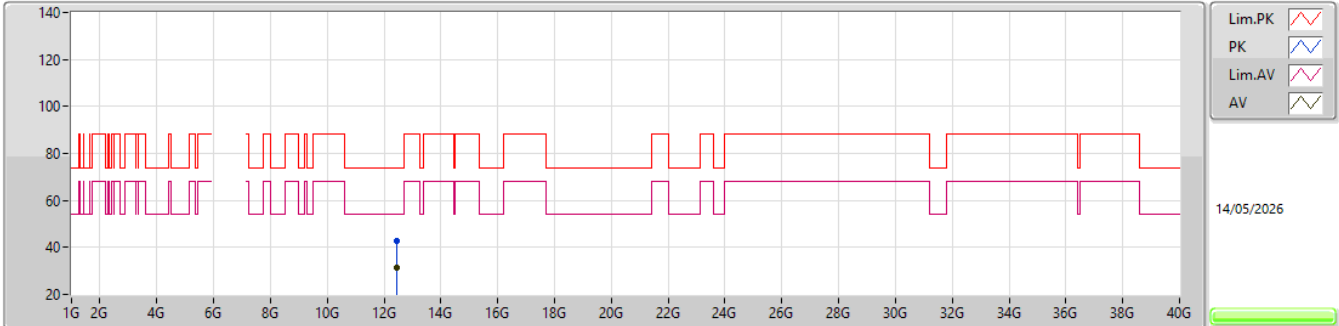


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45339G	42.84	74.00	-31.16	58.78	3	Horizontal	86	1.57	-	38.90	11.04	65.88			
AV	12.4641G	31.27	54.00	-22.73	47.20	3	Horizontal	86	1.57	-	38.90	11.04	65.87			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

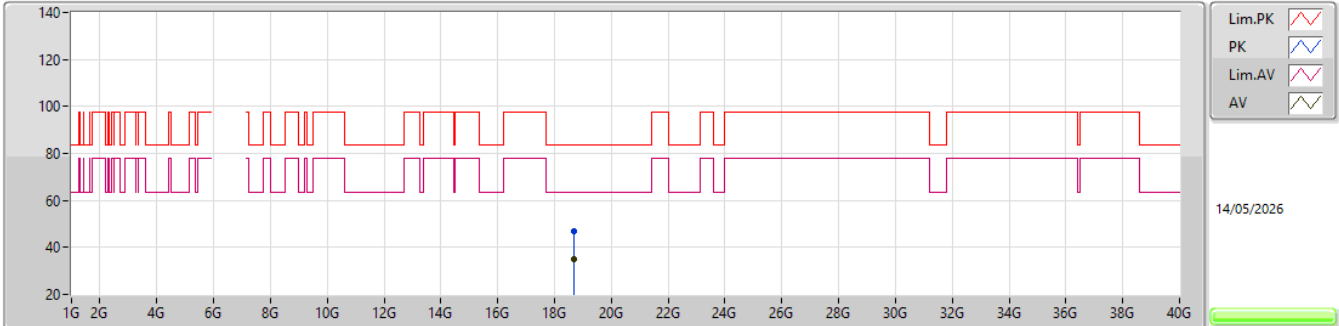


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.68652G	47.03	83.54	-36.51	42.37	1	Vertical	67	2.90	-	37.63	16.63	49.60			
AV	18.67191G	34.89	63.54	-28.65	30.23	1	Vertical	67	2.90	-	37.66	16.62	49.62			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

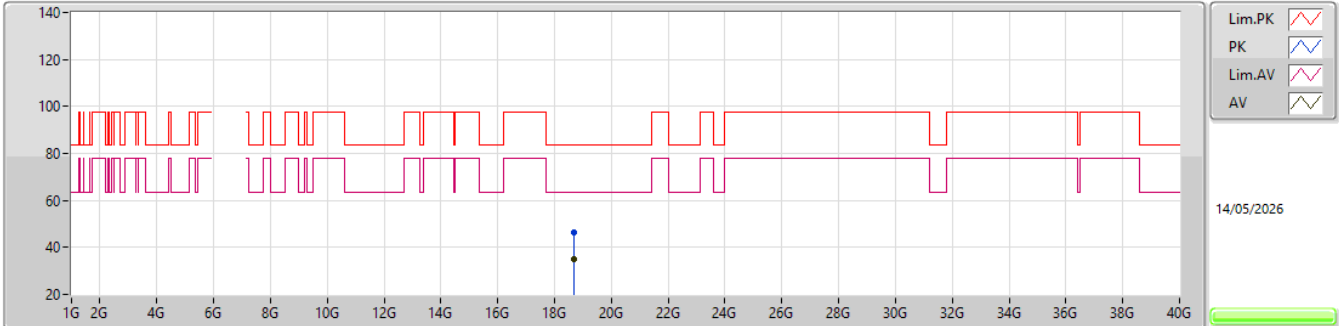


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.68343G	46.41	83.54	-37.13	41.76	1	Horizontal	358	2.88	-	37.63	16.63	49.61			
AV	18.67638G	34.80	63.54	-28.74	30.14	1	Horizontal	358	2.88	-	37.65	16.62	49.61			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

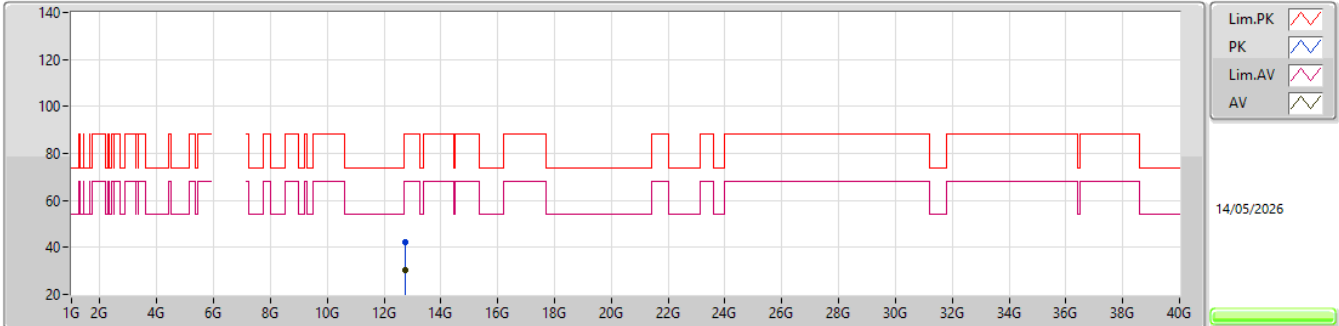


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.76028G	42.44	88.20	-45.76	58.01	3	Vertical	111	1.84	-	39.12	11.13	65.82			
RMS	12.76139G	30.59	68.20	-37.61	46.16	3	Vertical	111	1.84	-	39.12	11.13	65.82			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

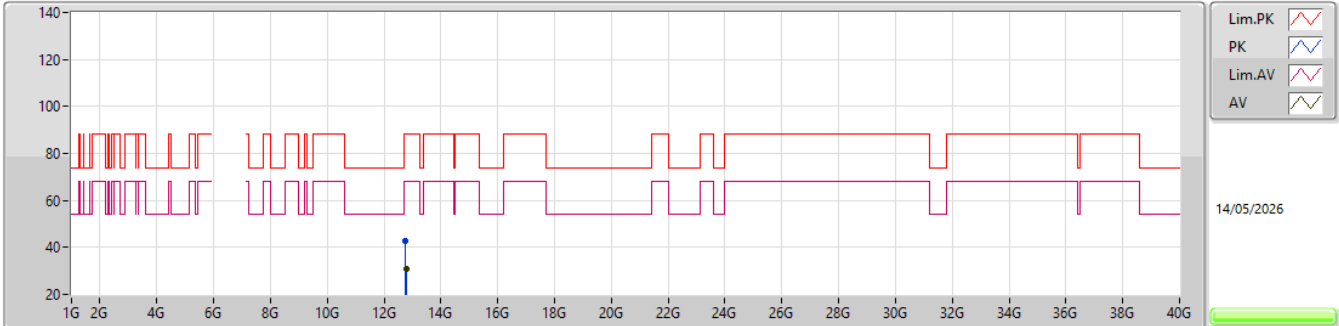


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.76415G	42.68	88.20	-45.52	58.24	3	Horizontal	256	1.86	-	39.13	11.13	65.82			
RMS	12.77012G	30.67	68.20	-37.53	46.22	3	Horizontal	256	1.86	-	39.14	11.13	65.82			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

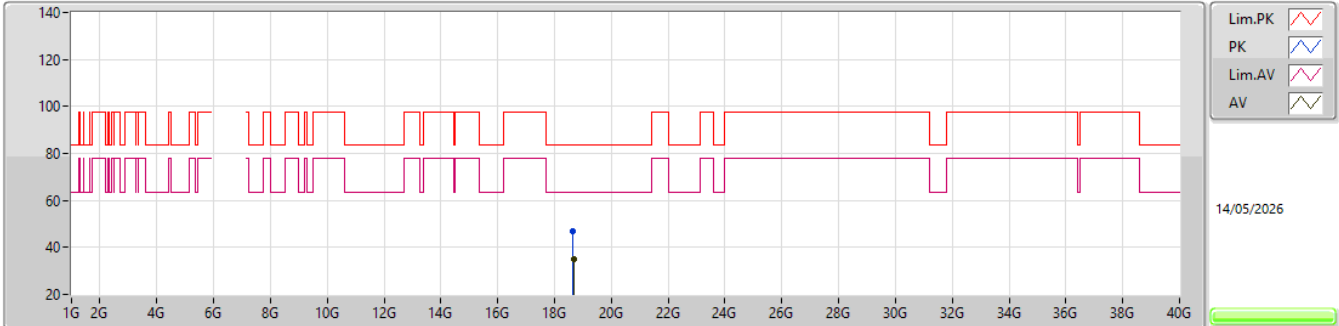


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6606G	47.12	83.54	-36.42	42.44	1	Vertical	122	1.96	-	37.68	16.62	49.62			
AV	18.6744G	35.06	63.54	-28.48	30.40	1	Vertical	122	1.96	-	37.65	16.62	49.61			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

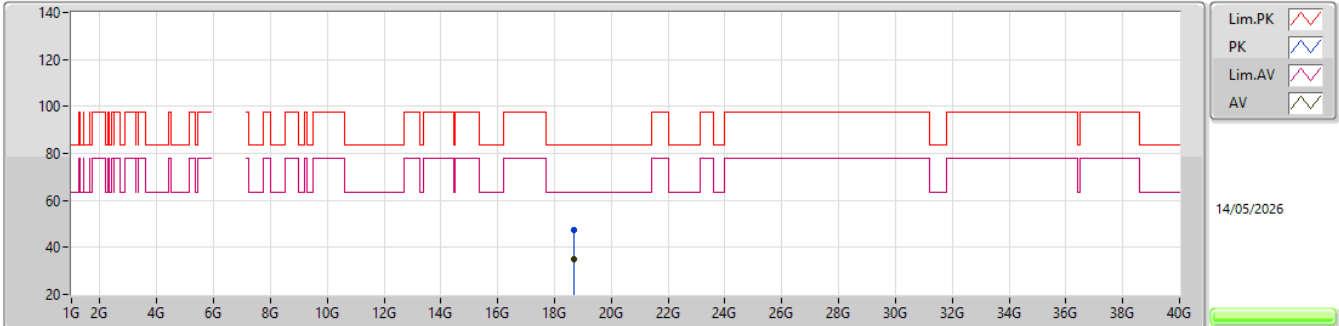


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6693G	47.42	83.54	-36.12	42.76	1	Horizontal	260	2.51	-	37.66	16.62	49.62			
AV	18.6882G	34.84	63.54	-28.70	30.19	1	Horizontal	260	2.51	-	37.62	16.63	49.60			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

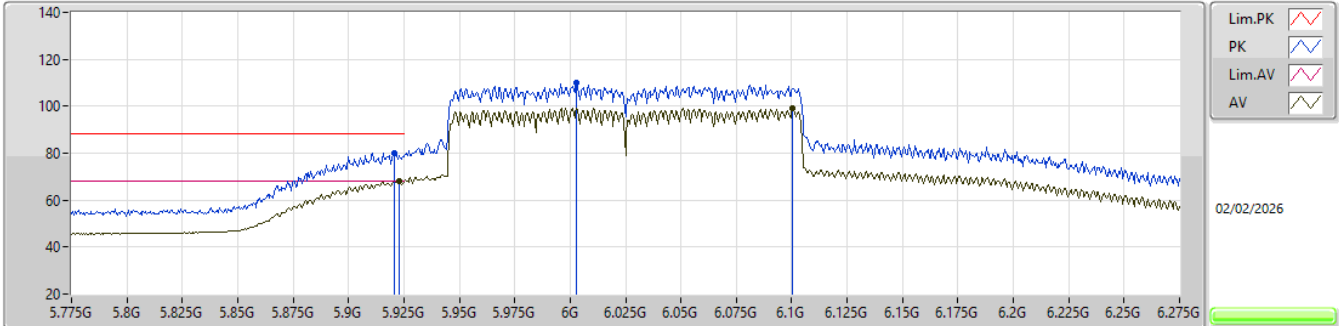


EUT_Z_2TX
Setting 78
04-W-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9205G	80.07	88.20	-8.13	82.02	3	Vertical	325	2.85	-	32.40	9.05	43.40			
RMS	5.923G	68.11	68.20	-0.09	70.06	3	Vertical	325	2.85	-	32.40	9.05	43.40			
PK	6.003G	110.21	Inf	-Inf	112.00	3	Vertical	325	2.85	-	32.41	9.14	43.34			
RMS	6.1005G	99.30	Inf	-Inf	100.88	3	Vertical	325	2.85	-	32.50	9.21	43.29			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

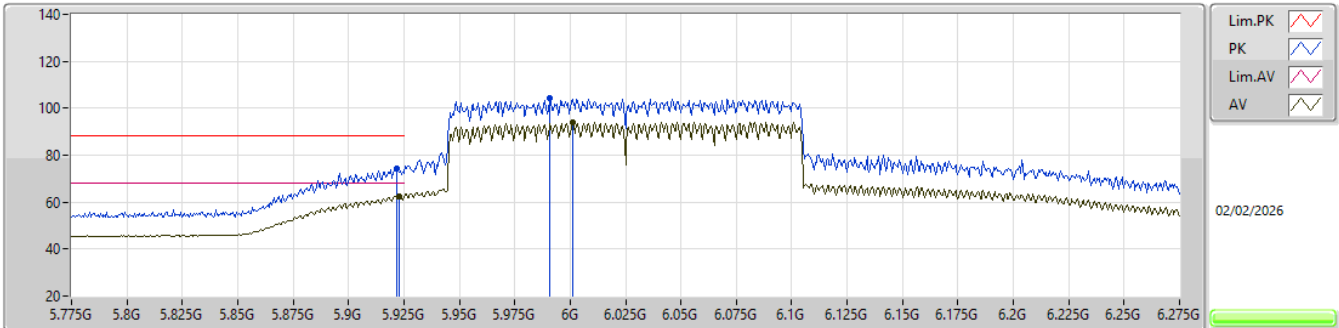


EUT_Z_2TX
Setting 78
04-W-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.922G	74.15	88.20	-14.05	76.10	3	Horizontal	178	3.00	-	32.40	9.05	43.40			
RMS	5.923G	62.67	68.20	-5.53	64.62	3	Horizontal	178	3.00	-	32.40	9.05	43.40			
PK	5.9905G	104.56	Inf	-Inf	106.38	3	Horizontal	178	3.00	-	32.40	9.13	43.35			
RMS	6.001G	94.16	Inf	-Inf	95.96	3	Horizontal	178	3.00	-	32.40	9.14	43.34			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

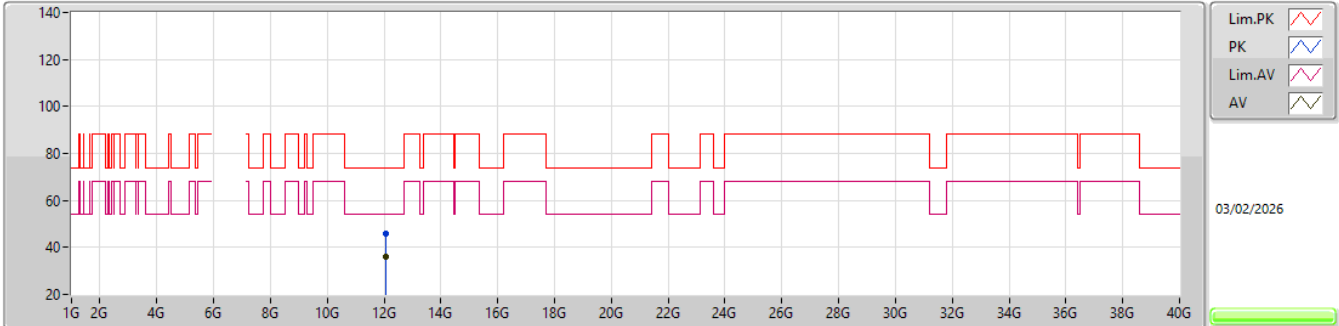


EUT_Z_2TX
Setting 78
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.0569G	45.93	74.00	-28.07	36.38	3	Vertical	317	2.99	-	39.21	13.66	43.32			
AV	12.04634G	35.86	54.00	-18.14	26.35	3	Vertical	317	2.99	-	39.18	13.65	43.32			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

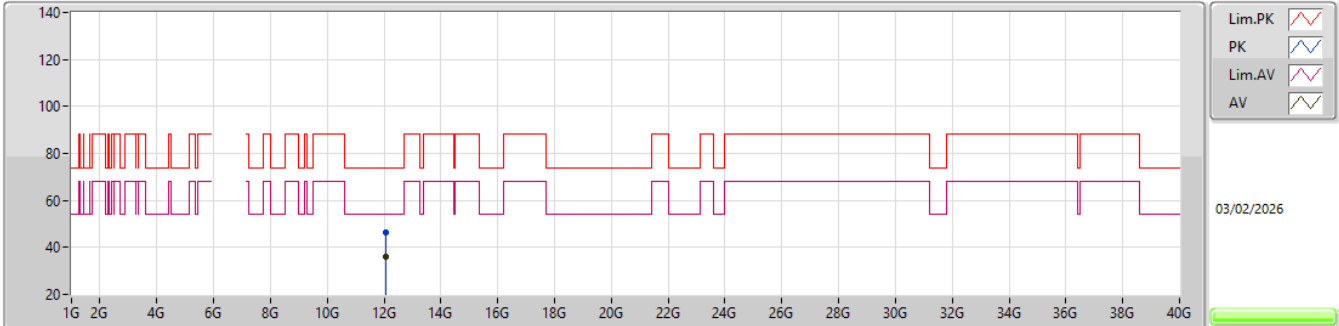


EUT_Z_2TX
Setting 78
04-W-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.06413G	46.63	74.00	-27.37	37.06	3	Horizontal	36	1.36	-	39.23	13.67	43.33			
AV	12.05852G	35.81	54.00	-18.19	26.25	3	Horizontal	36	1.36	-	39.22	13.66	43.32			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

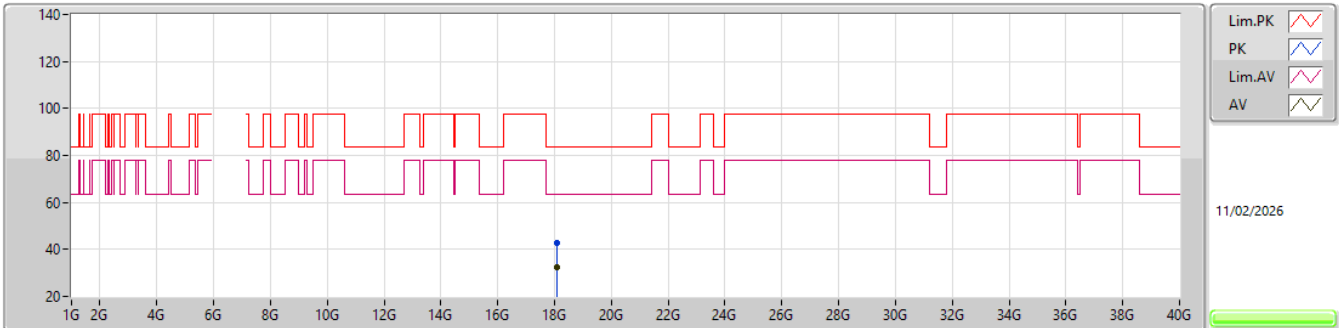EUT_Z_2TX
Setting 78
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.08811G	42.68	83.54	-40.86	37.52	1	Vertical	108	1.67	-	37.28	16.32	48.44			
AV	18.07569G	32.23	63.54	-31.31	27.09	1	Vertical	108	1.67	-	37.25	16.32	48.43			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

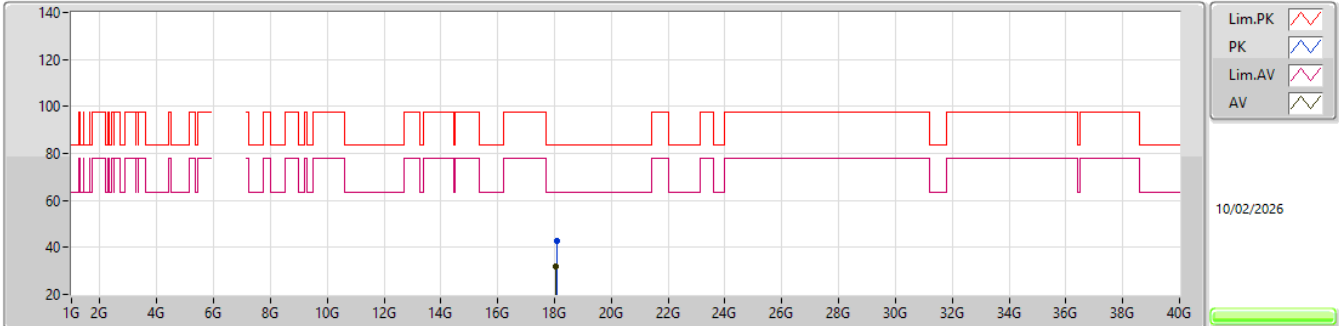


EUT_Z_2TX
Setting 78
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07416G	42.94	74.00	-31.06	37.80	1	Horizontal	130	2.91	-	37.25	16.32	48.43			
AV	18.0615G	31.99	54.00	-22.01	26.88	1	Horizontal	130	2.91	-	37.22	16.31	48.42			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

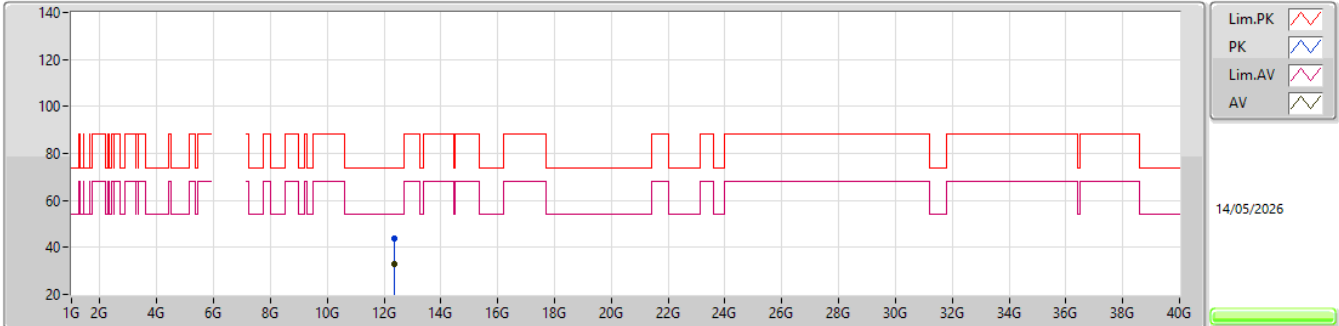EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38272G	43.62	74.00	-30.38	59.70	3	Vertical	42	2.89	-	38.90	11.02	66.00			
AV	12.36823G	32.96	54.00	-21.04	49.06	3	Vertical	42	2.89	-	38.90	11.02	66.02			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

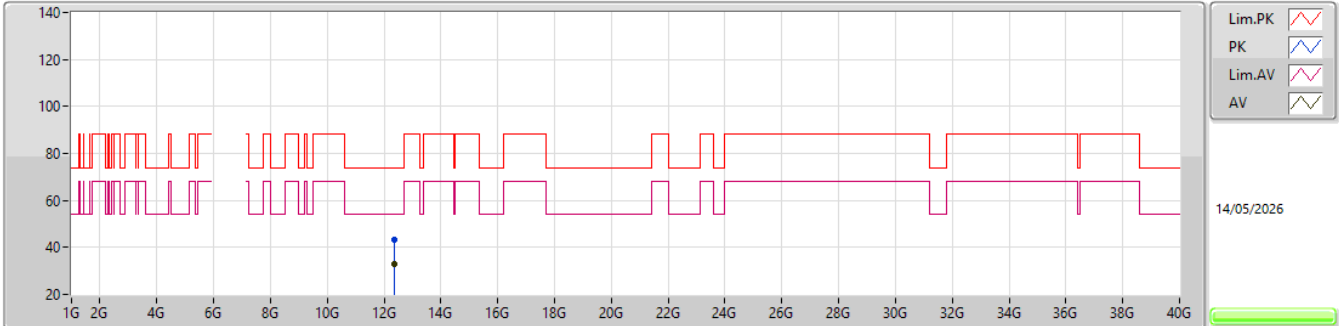


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.37462G	43.25	74.00	-30.75	59.34	3	Horizontal	248	1.10	-	38.90	11.02	66.01			
AV	12.36715G	33.13	54.00	-20.87	49.23	3	Horizontal	248	1.10	-	38.90	11.02	66.02			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

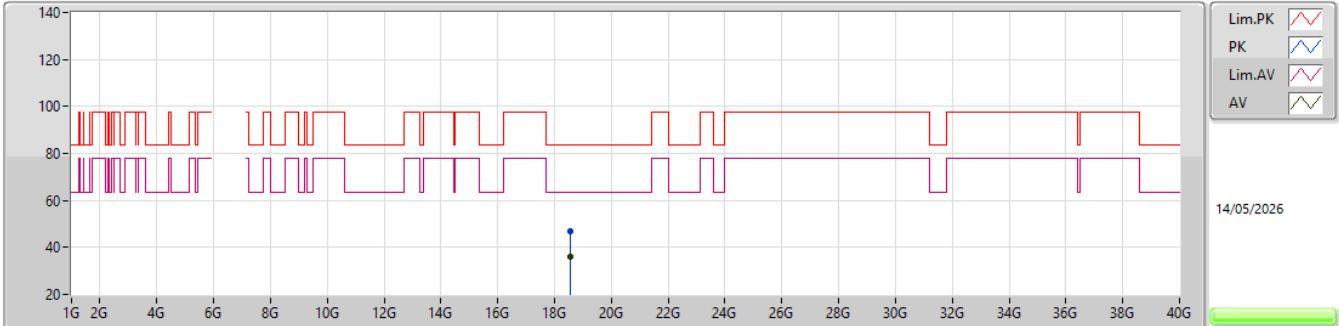


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.54354G	47.14	83.54	-36.40	42.69	1	Vertical	186	1.47	-	37.61	16.56	49.72			
AV	18.5586G	35.90	63.54	-27.64	31.42	1	Vertical	186	1.47	-	37.62	16.56	49.70			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

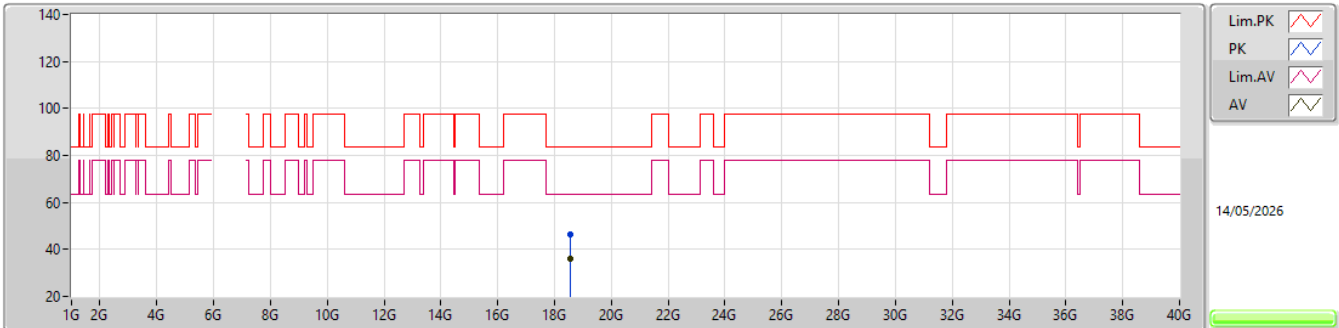


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55683G	46.21	83.54	-37.33	41.75	1	Horizontal	138	1.11	-	37.61	16.56	49.71			
AV	18.56829G	36.24	63.54	-27.30	31.73	1	Horizontal	138	1.11	-	37.64	16.57	49.70			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

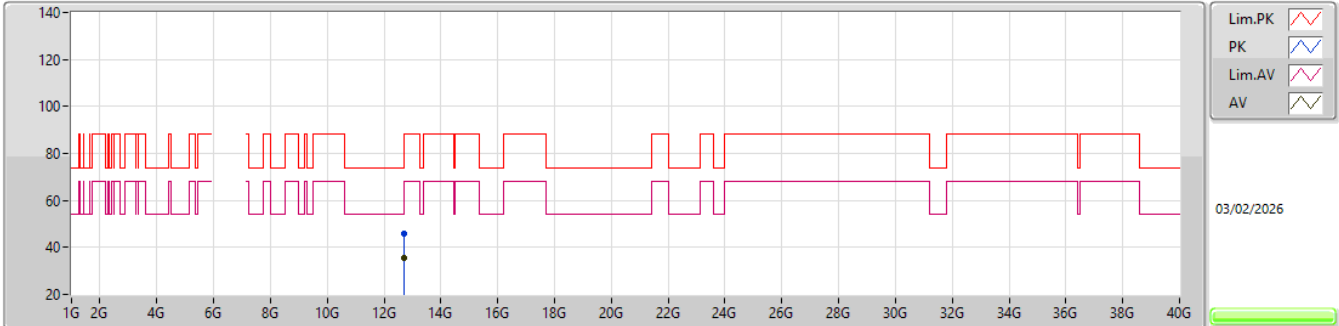


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.693916G	45.74	74.00	-28.26	36.01	3	Vertical	138	1.50	-	38.78	14.45	43.50			
AV	12.693912G	35.53	54.00	-18.47	25.80	3	Vertical	138	1.50	-	38.78	14.45	43.50			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

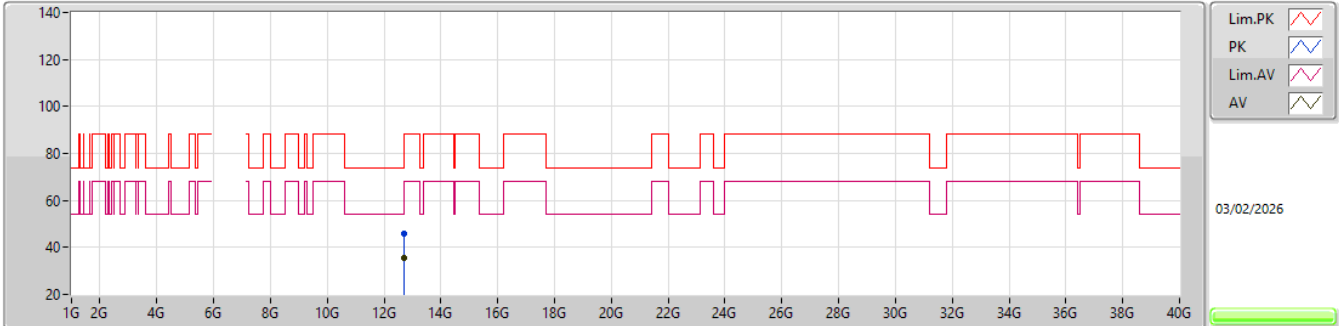


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69039G	45.71	74.00	-28.29	36.00	3	Horizontal	345	2.56	-	38.76	14.45	43.50			
AV	12.69396G	35.69	54.00	-18.31	25.96	3	Horizontal	345	2.56	-	38.78	14.45	43.50			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

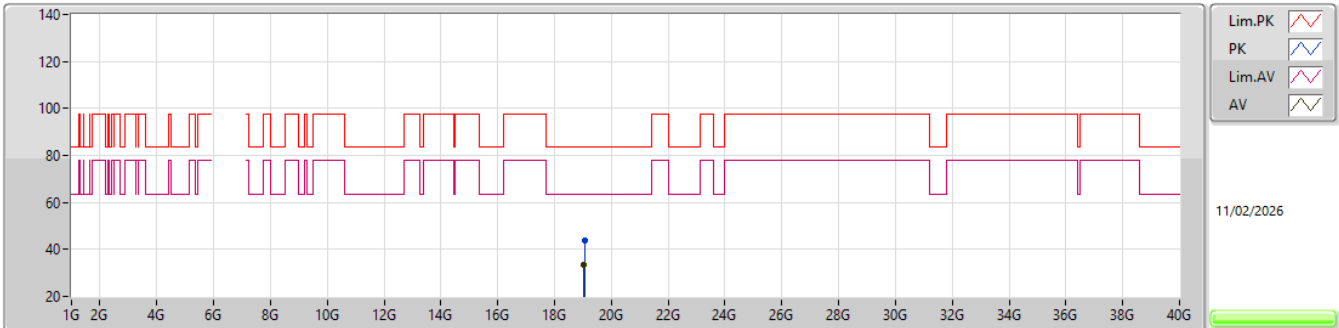


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.04877G	43.99	83.54	-39.55	38.60	1	Vertical	73	2.42	-	37.80	16.48	48.89			
AV	19.03608G	33.63	63.54	-29.91	28.27	1	Vertical	73	2.42	-	37.77	16.48	48.89			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

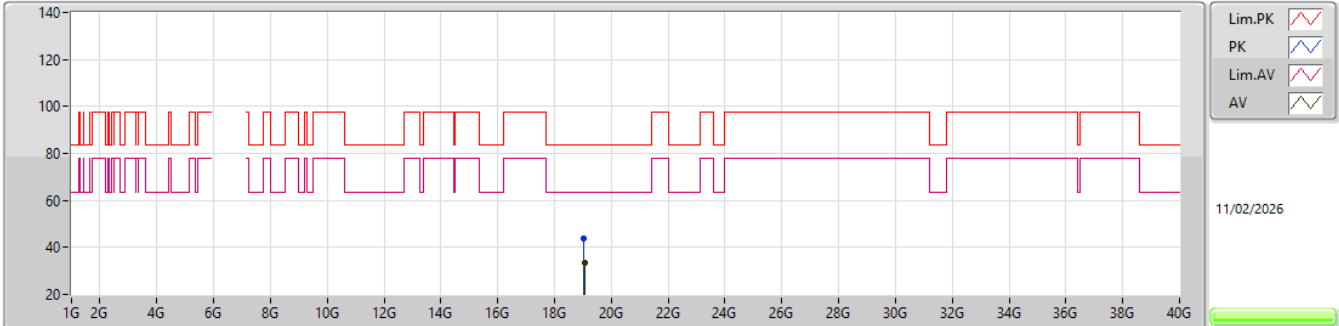


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.02099G	43.68	83.54	-39.86	38.37	1	Horizontal	202	1.25	-	37.74	16.47	48.90			
AV	19.0479G	33.55	63.54	-29.99	28.16	1	Horizontal	202	1.25	-	37.80	16.48	48.89			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

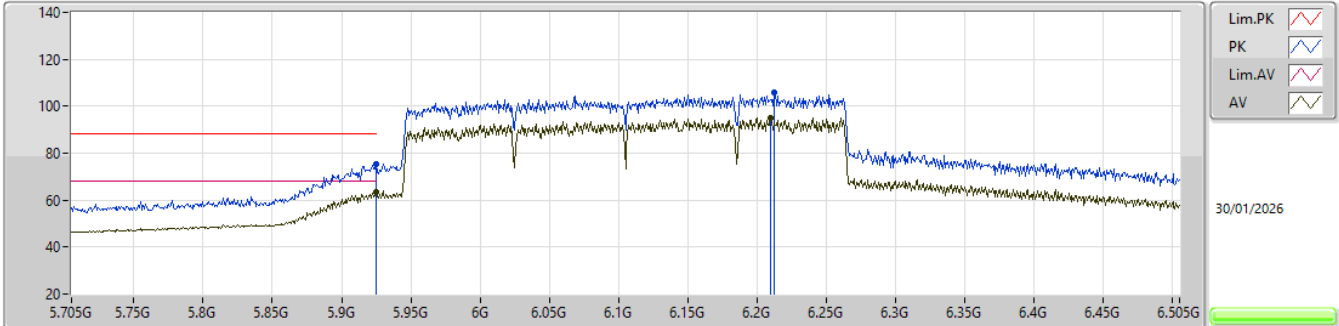


EUT_Z_2TX
Setting 80
04-W-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	75.46	88.20	-12.74	77.41	3	Vertical	21	2.63	-	32.40	9.05	43.40			
RMS	5.925G	63.42	68.20	-4.78	65.37	3	Vertical	21	2.63	-	32.40	9.05	43.40			
PK	6.2122G	105.91	Inf	-Inf	107.09	3	Vertical	21	2.63	-	32.77	9.28	43.23			
RMS	6.2098G	95.07	Inf	-Inf	96.26	3	Vertical	21	2.63	-	32.76	9.28	43.23			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

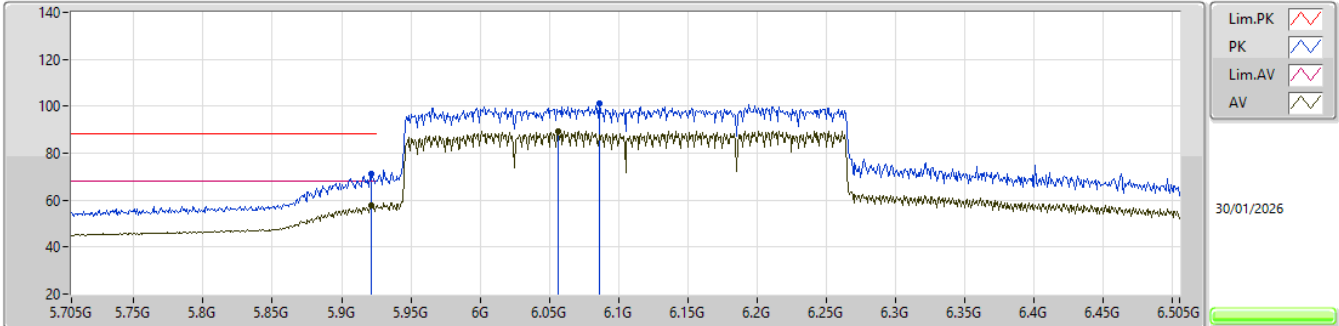


EUT_Z_2TX
Setting 80
04-W-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9218G	71.33	88.20	-16.87	73.28	3	Horizontal	191	3.00	-	32.40	9.05	43.40			
RMS	5.921G	57.92	68.20	-10.28	59.87	3	Horizontal	191	3.00	-	32.40	9.05	43.40			
PK	6.0858G	101.32	Inf	-Inf	102.91	3	Horizontal	191	3.00	-	32.50	9.20	43.29			
RMS	6.0562G	89.42	Inf	-Inf	91.05	3	Horizontal	191	3.00	-	32.50	9.18	43.31			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

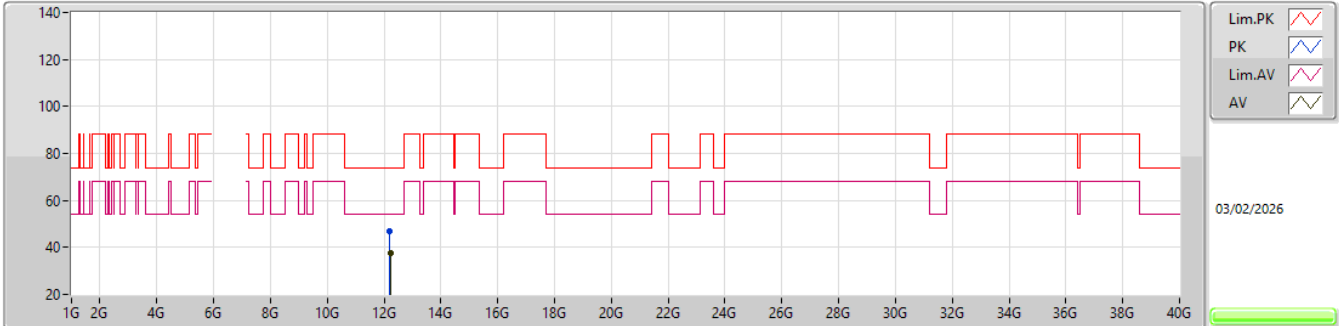


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.20523G	47.00	74.00	-27.00	37.65	3	Vertical	265	1.36	-	38.89	13.85	43.39			
AV	12.21969G	37.80	54.00	-16.20	28.47	3	Vertical	265	1.36	-	38.86	13.86	43.39			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

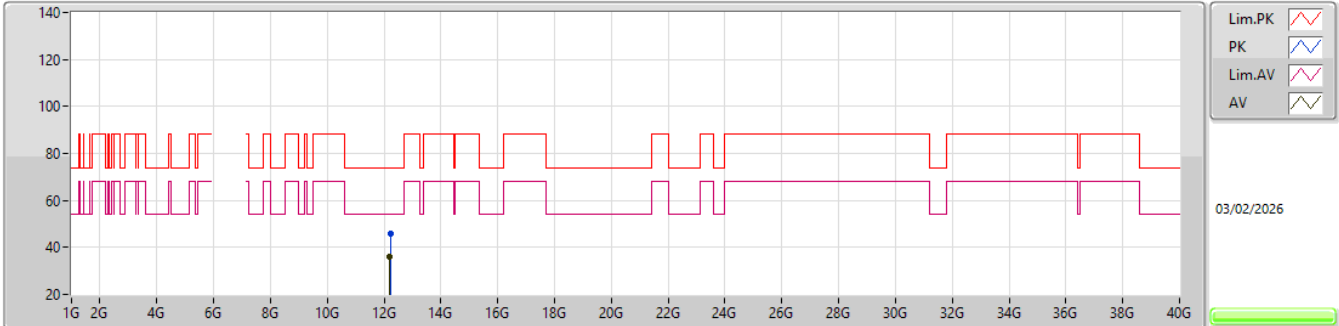


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.22224G	46.04	74.00	-27.96	36.70	3	Horizontal	349	1.90	-	38.86	13.87	43.39			
AV	12.19503G	36.00	54.00	-18.00	26.62	3	Horizontal	349	1.90	-	38.93	13.83	43.38			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

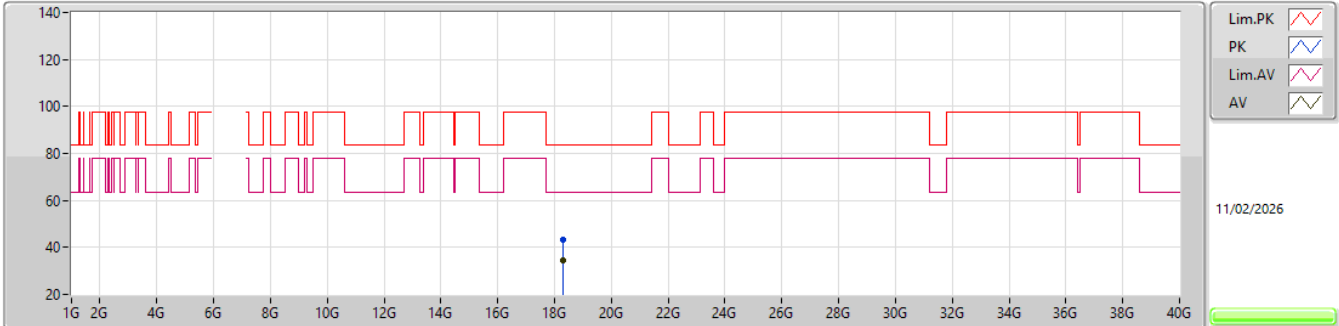


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31902G	43.47	83.54	-40.07	38.18	1	Vertical	233	2.96	-	37.38	16.44	48.53			
AV	18.30321G	34.23	63.54	-29.31	29.01	1	Vertical	233	2.96	-	37.31	16.43	48.52			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

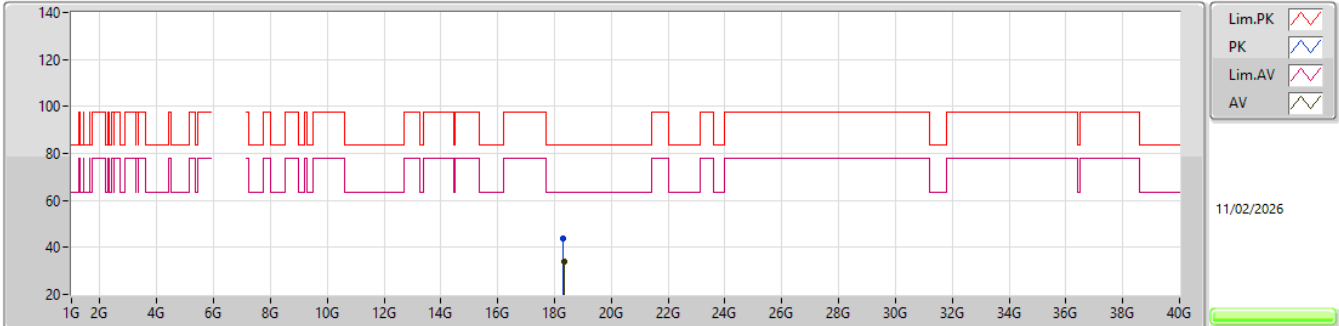


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.31269G	43.73	83.54	-39.81	38.47	1	Horizontal	348	1.65	-	37.35	16.44	48.53			
AV	18.32544G	33.95	63.54	-29.59	28.63	1	Horizontal	348	1.65	-	37.40	16.45	48.53			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

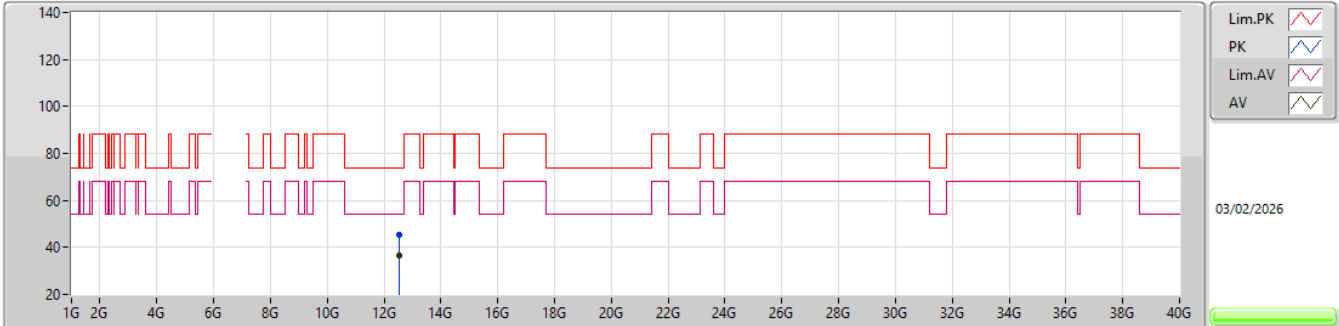


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.54347G	45.19	74.00	-28.81	36.13	3	Vertical	271	1.36	-	38.30	14.27	43.51			
AV	12.5387G	36.55	54.00	-17.45	27.50	3	Vertical	271	1.36	-	38.30	14.26	43.51			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

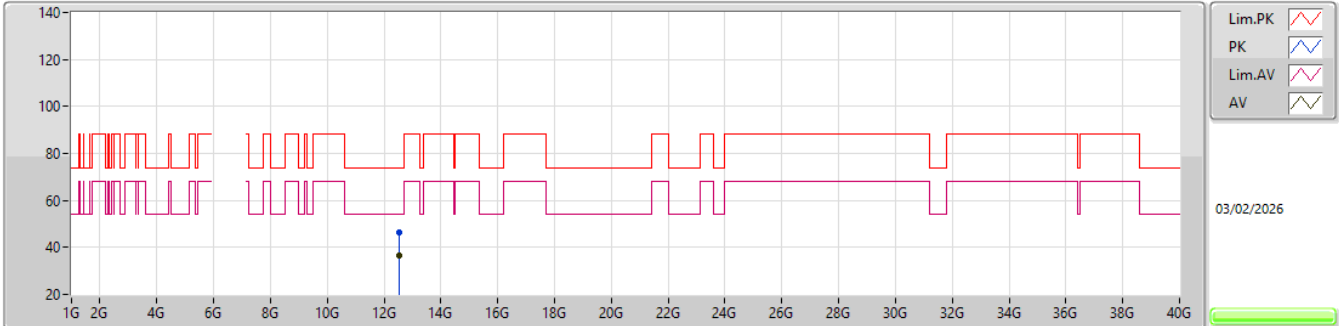


EUT_Z_2TX
Setting 80
04-W-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.52577G	46.14	74.00	-27.86	37.11	3	Horizontal	272	1.36	-	38.30	14.24	43.51			
AV	12.52121G	36.64	54.00	-17.36	27.61	3	Horizontal	272	1.36	-	38.30	14.24	43.51			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

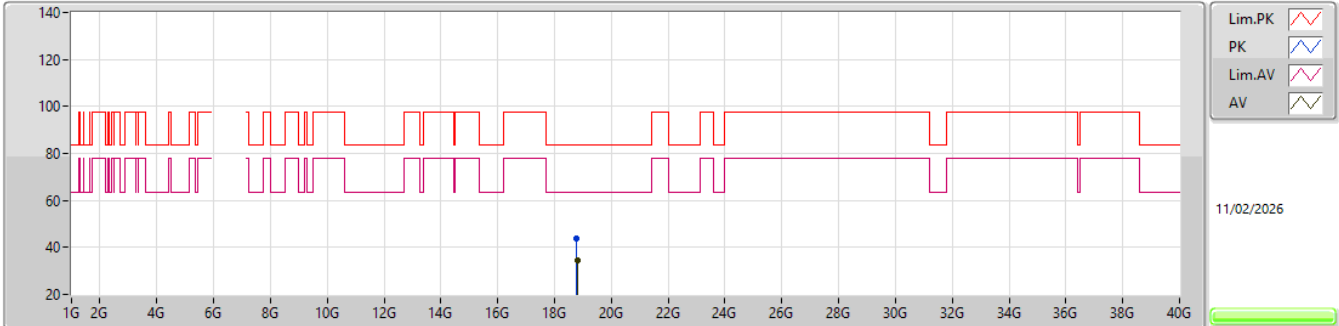


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.78333G	43.70	83.54	-39.84	38.12	1	Vertical	273	1.64	-	37.67	16.68	48.77			
AV	18.80469G	34.46	63.54	-29.08	28.95	1	Vertical	273	1.64	-	37.60	16.69	48.78			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

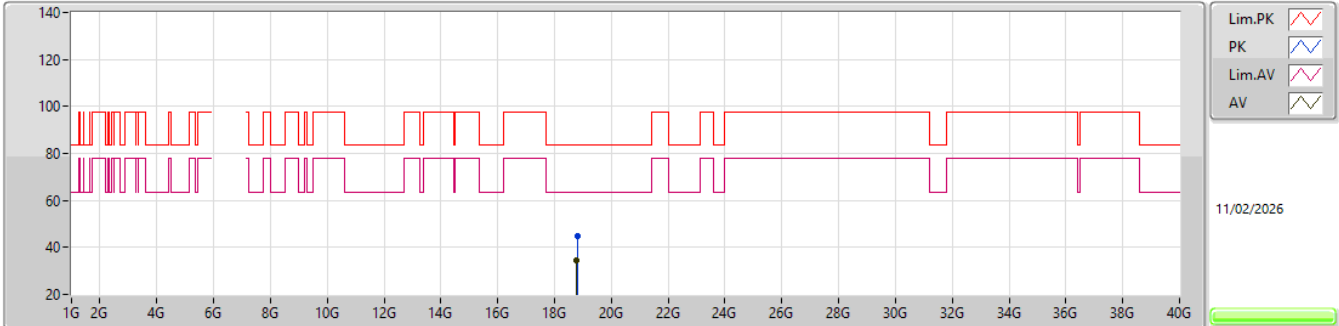


EUT_Z_2TX
Setting 80
04-W-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.80526G	44.61	83.54	-38.93	39.10	1	Horizontal	121	1.57	-	37.60	16.69	48.78			
AV	18.78009G	34.73	63.54	-28.81	29.14	1	Horizontal	121	1.57	-	37.68	16.68	48.77			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

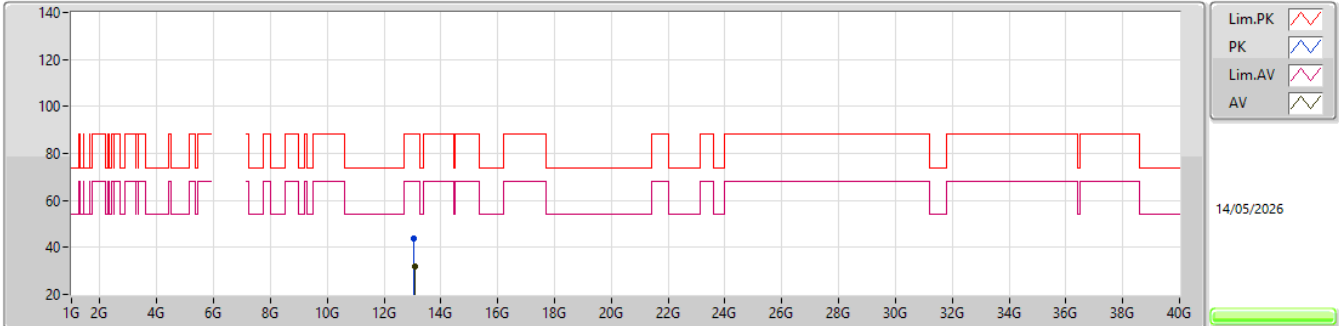


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05587G	43.99	88.20	-44.21	58.85	3	Vertical	83	2.97	-	39.71	11.22	65.79			
AV	13.08059G	32.01	68.20	-36.19	46.80	3	Vertical	83	2.97	-	39.76	11.22	65.77			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

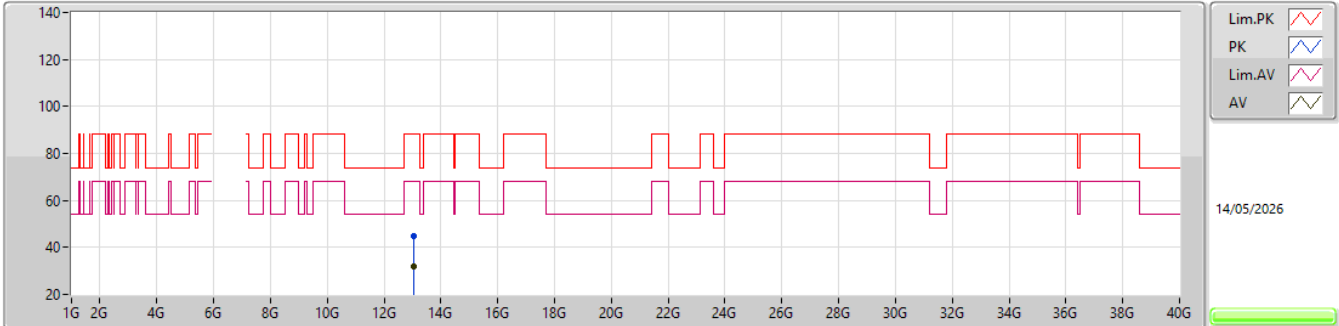


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05695G	44.90	88.20	-43.30	59.76	3	Horizontal	249	2.49	-	39.71	11.22	65.79			
AV	13.05659G	32.13	68.20	-36.07	46.99	3	Horizontal	249	2.49	-	39.71	11.22	65.79			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

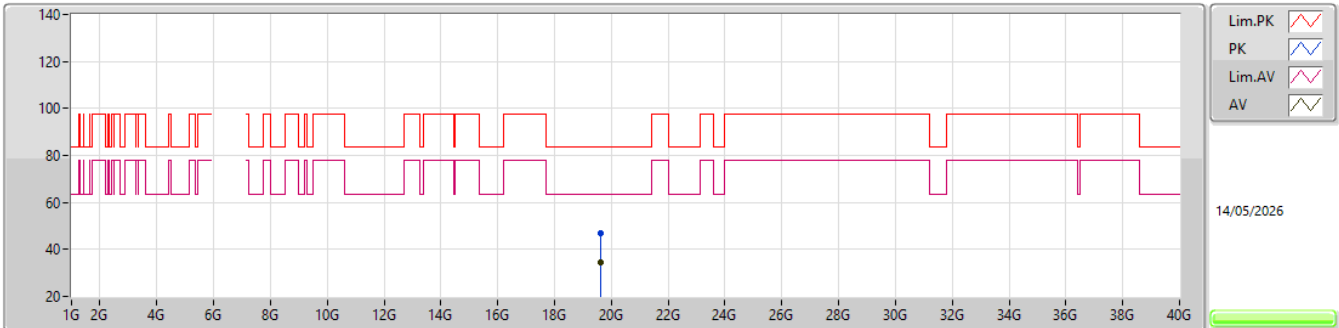


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.614G	46.70	83.54	-36.84	41.40	1	Vertical	72	2.21	-	37.67	17.15	49.52			
AV	19.61604G	34.28	63.54	-29.26	28.98	1	Vertical	72	2.21	-	37.67	17.15	49.52			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

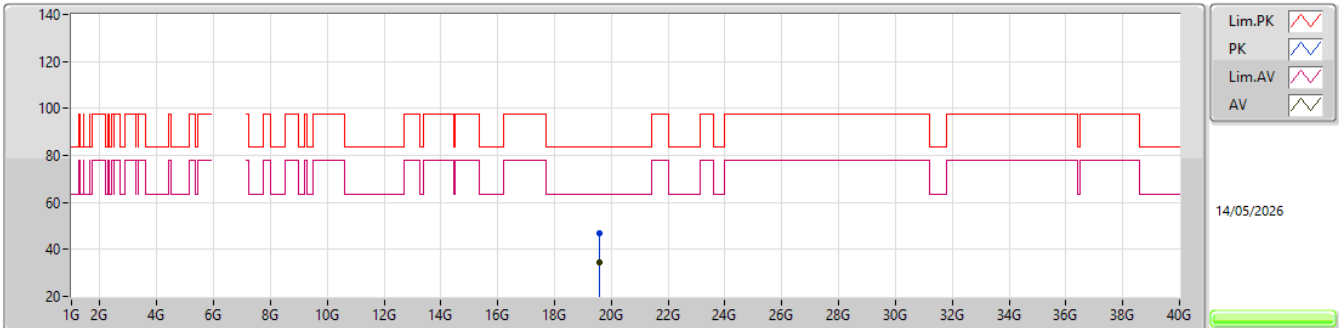


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.59036G	46.87	83.54	-36.67	41.57	1	Horizontal	216	1.57	-	37.70	17.13	49.53			
AV	19.59882G	34.32	63.54	-29.22	29.01	1	Horizontal	216	1.57	-	37.70	17.14	49.53			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

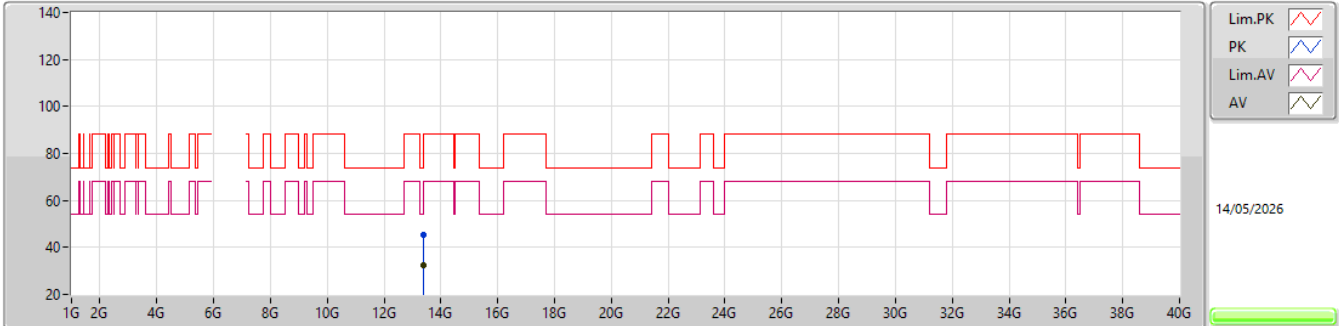


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39939G	45.13	74.00	-28.87	59.00	3	Vertical	348	2.01	-	40.40	11.32	65.59			
AV	13.38856G	32.39	54.00	-21.61	46.32	3	Vertical	348	2.01	-	40.35	11.31	65.59			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

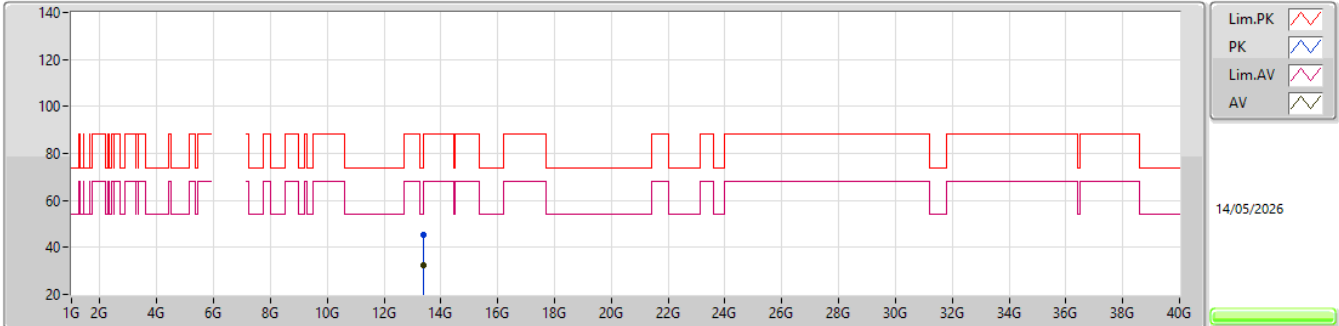


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39375G	45.24	74.00	-28.76	59.15	3	Horizontal	310	1.12	-	40.37	11.31	65.59			
AV	13.38298G	32.34	54.00	-21.66	46.30	3	Horizontal	310	1.12	-	40.33	11.31	65.60			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

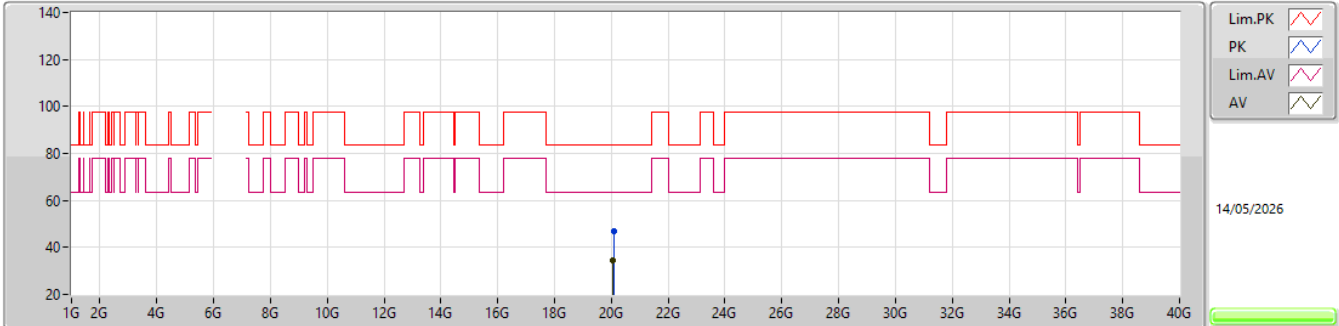


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07954G	46.79	83.54	-36.75	40.99	1	Vertical	207	2.69	-	37.66	17.38	49.24			
AV	20.07264G	34.32	63.54	-29.22	28.53	1	Vertical	207	2.69	-	37.65	17.38	49.24			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

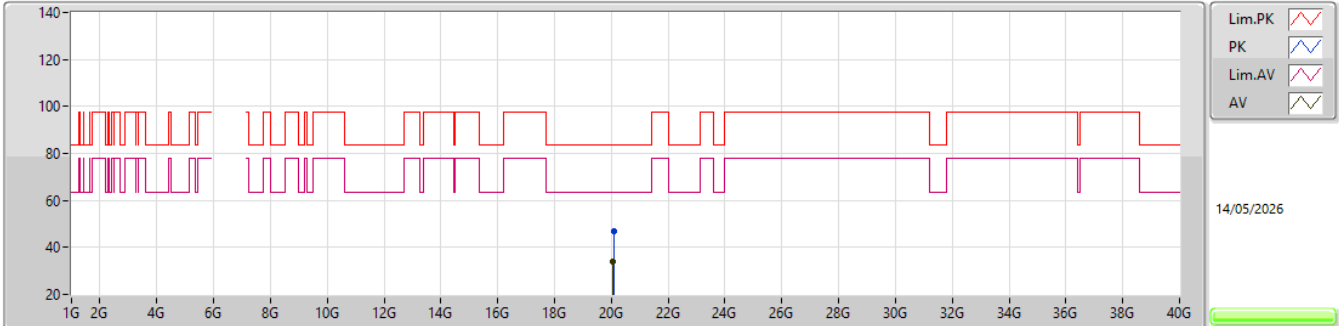


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.09565G	46.92	83.54	-36.62	41.09	1	Horizontal	94	2.48	-	37.69	17.38	49.24			
AV	20.07225G	34.14	63.54	-29.40	28.36	1	Horizontal	94	2.48	-	37.64	17.38	49.24			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

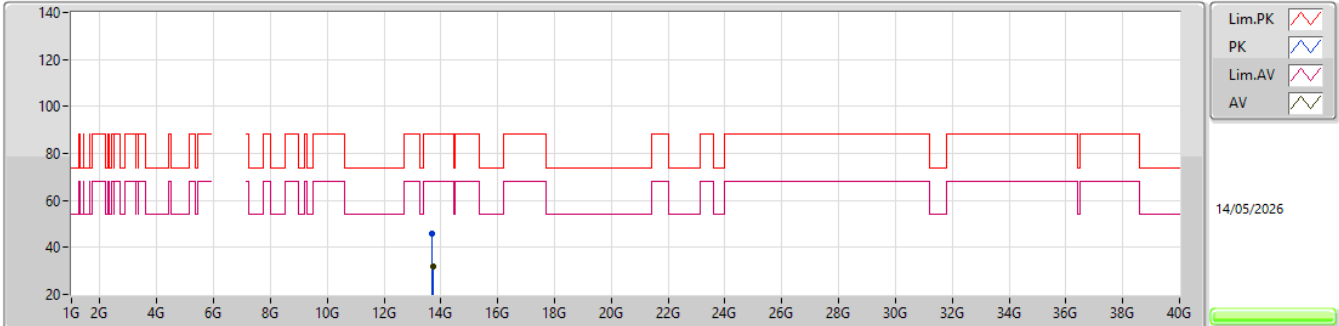


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70328G	45.94	88.20	-42.26	59.14	3	Vertical	95	2.86	-	40.81	11.40	65.41			
RMS	13.71405G	32.09	68.20	-36.11	45.25	3	Vertical	95	2.86	-	40.83	11.41	65.40			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

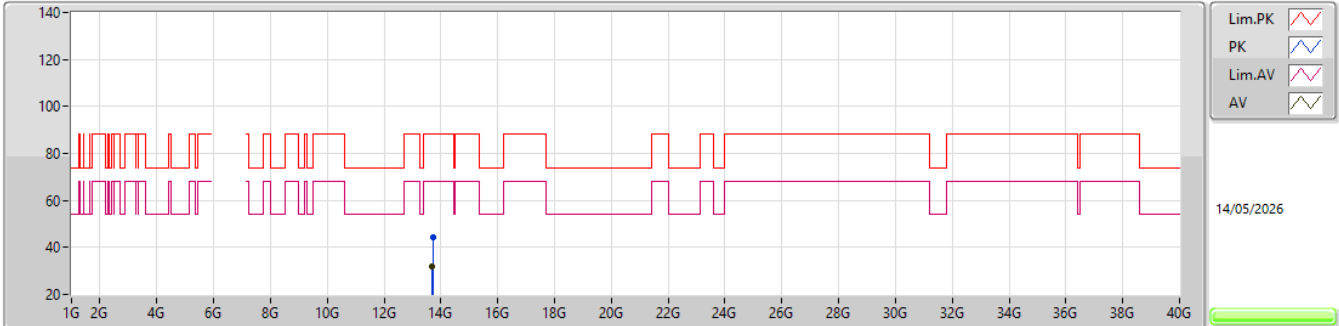


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.72401G	44.48	88.20	-43.72	57.62	3	Horizontal	329	1.30	-	40.85	11.41	65.40			
RMS	13.70541G	32.13	68.20	-36.07	45.33	3	Horizontal	329	1.30	-	40.81	11.40	65.41			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

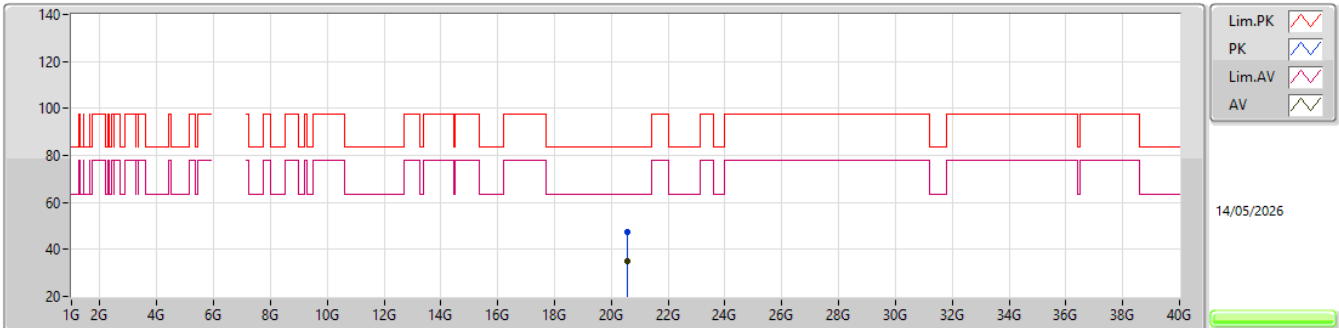


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.56626G	47.29	83.54	-36.25	41.29	1	Vertical	325	2.86	-	37.73	17.45	49.18			
AV	20.55177G	34.85	63.54	-28.69	28.89	1	Vertical	325	2.86	-	37.70	17.45	49.19			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

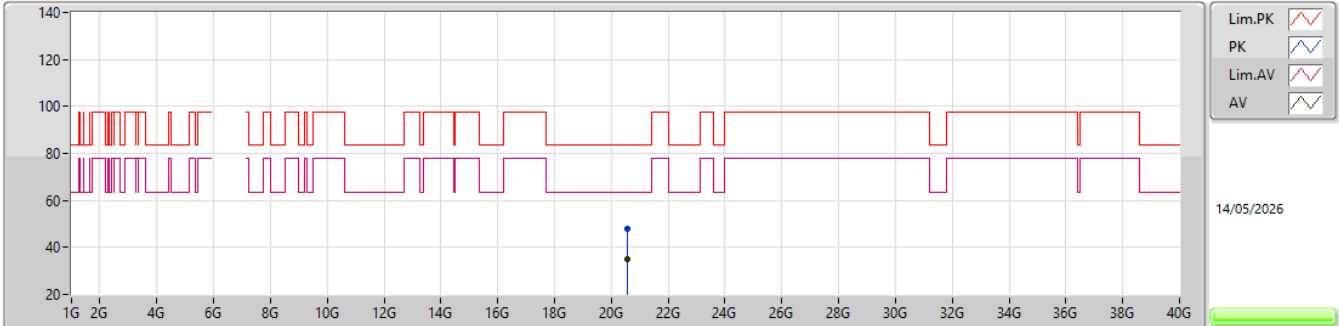


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.57823G	48.17	83.54	-35.37	42.14	1	Horizontal	85	2.37	-	37.76	17.45	49.18			
AV	20.55144G	35.00	63.54	-28.54	29.04	1	Horizontal	85	2.37	-	37.70	17.45	49.19			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

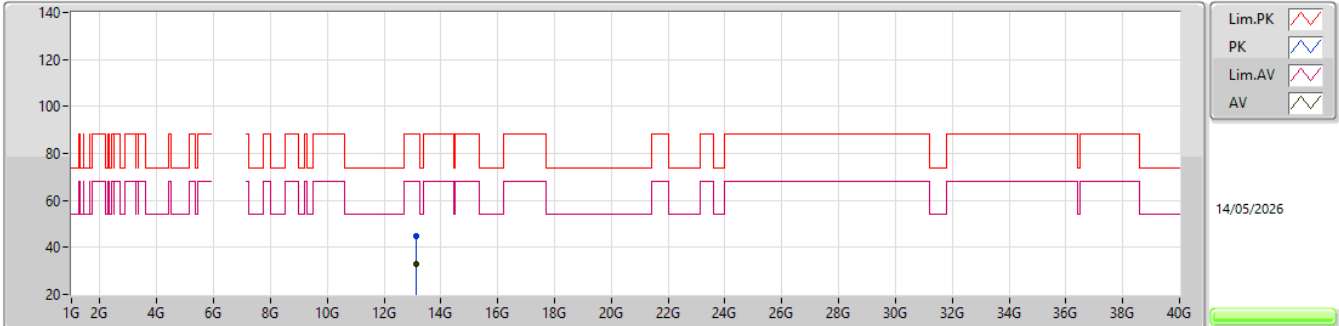


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.14011G	44.70	88.20	-43.50	59.40	3	Vertical	249	1.50	-	39.80	11.24	65.74			
RMS	13.11947G	32.81	68.20	-35.39	47.53	3	Vertical	249	1.50	-	39.80	11.23	65.75			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

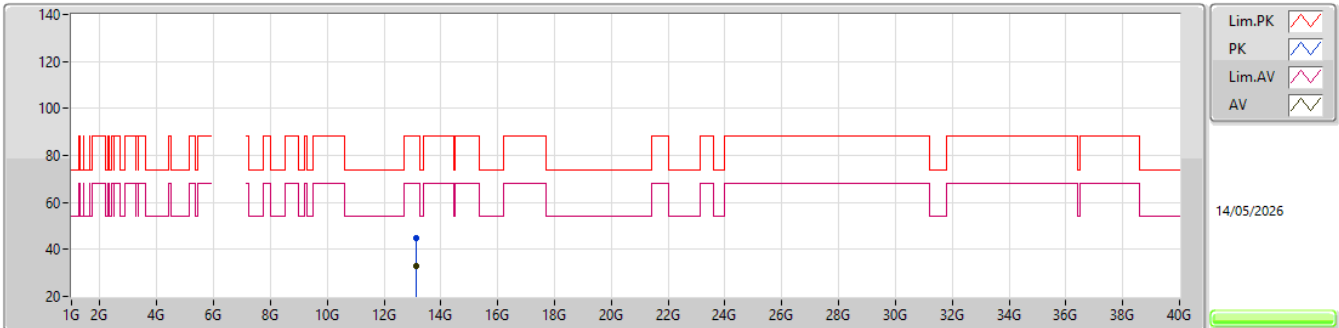


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.11629G	44.57	88.20	-43.63	59.29	3	Horizontal	311	2.58	-	39.80	11.23	65.75			
RMS	13.12154G	32.84	68.20	-35.36	47.55	3	Horizontal	311	2.58	-	39.80	11.24	65.75			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

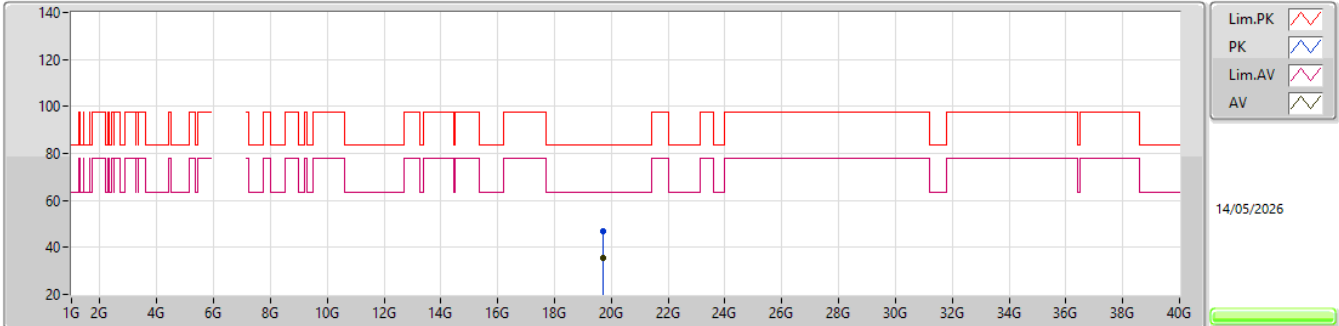


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69464G	46.99	83.54	-36.55	41.48	1	Vertical	56	2.93	-	37.78	17.19	49.46			
AV	19.70409G	35.34	63.54	-28.20	29.81	1	Vertical	56	2.93	-	37.78	17.20	49.45			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

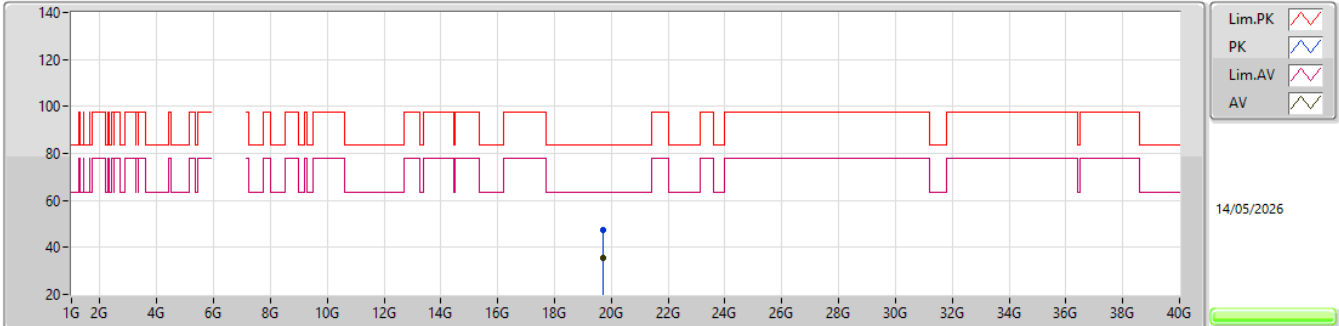


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.69959G	47.22	83.54	-36.32	41.68	1	Horizontal	271	1.72	-	37.80	17.20	49.46			
AV	19.70088G	35.74	63.54	-27.80	30.20	1	Horizontal	271	1.72	-	37.80	17.20	49.46			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

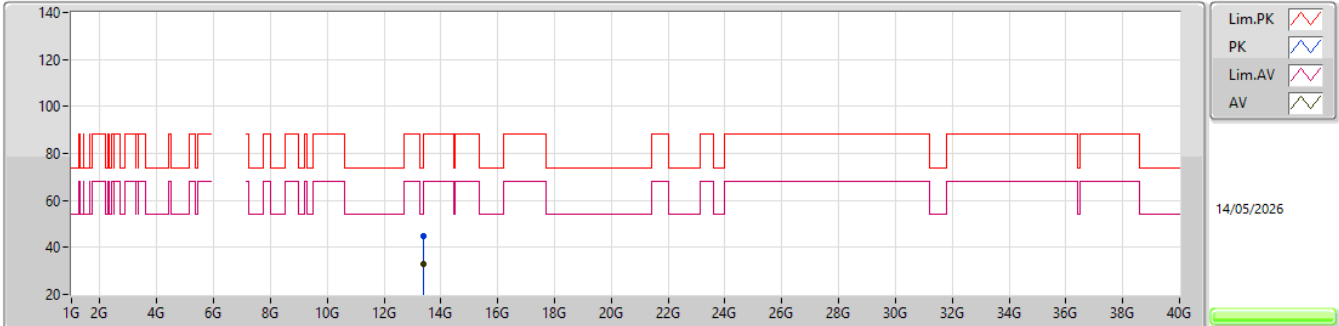


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37918G	45.04	74.00	-28.96	59.01	3	Vertical	244	2.88	-	40.32	11.31	65.60			
AV	13.38245G	32.91	54.00	-21.09	46.87	3	Vertical	244	2.88	-	40.33	11.31	65.60			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

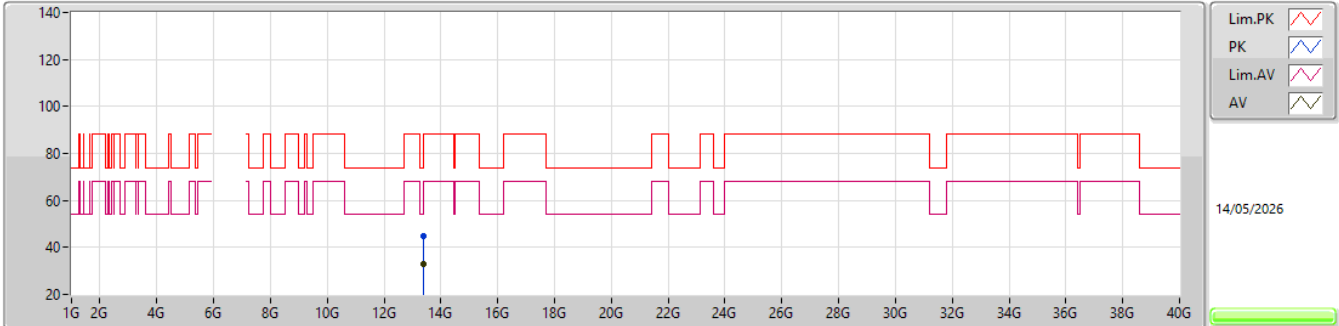


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37963G	44.87	74.00	-29.13	58.84	3	Horizontal	189	1.92	-	40.32	11.31	65.60			
AV	13.38098G	33.09	54.00	-20.91	47.06	3	Horizontal	189	1.92	-	40.32	11.31	65.60			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

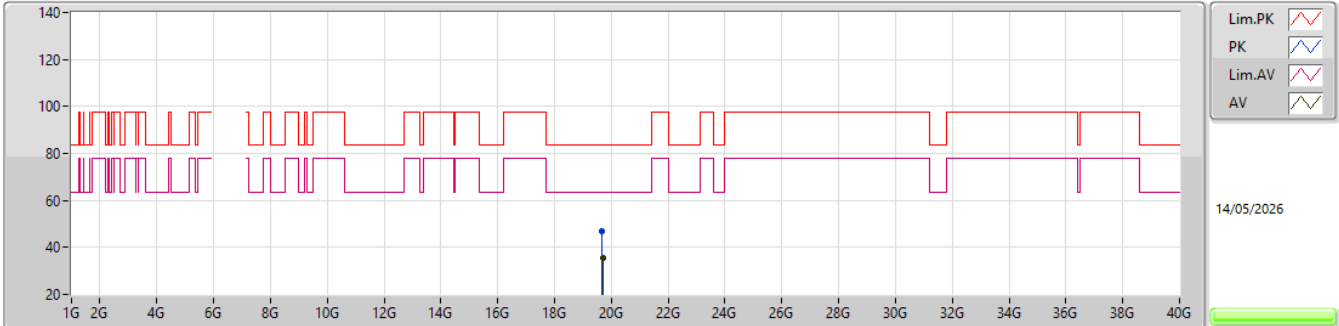


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.68492G	46.91	83.54	-36.63	41.45	1	Vertical	262	2.64	-	37.74	17.19	49.47			
AV	19.69866G	35.49	63.54	-28.05	29.96	1	Vertical	262	2.64	-	37.79	17.20	49.46			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

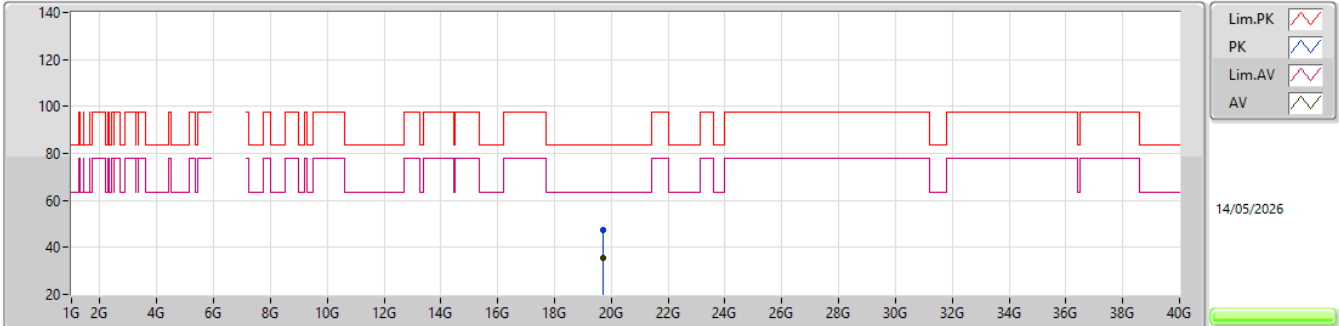


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.70277G	47.64	83.54	-35.90	42.10	1	Horizontal	78	1.80	-	37.79	17.20	49.45			
AV	19.69512G	35.42	63.54	-28.12	29.91	1	Horizontal	78	1.80	-	37.78	17.19	49.46			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

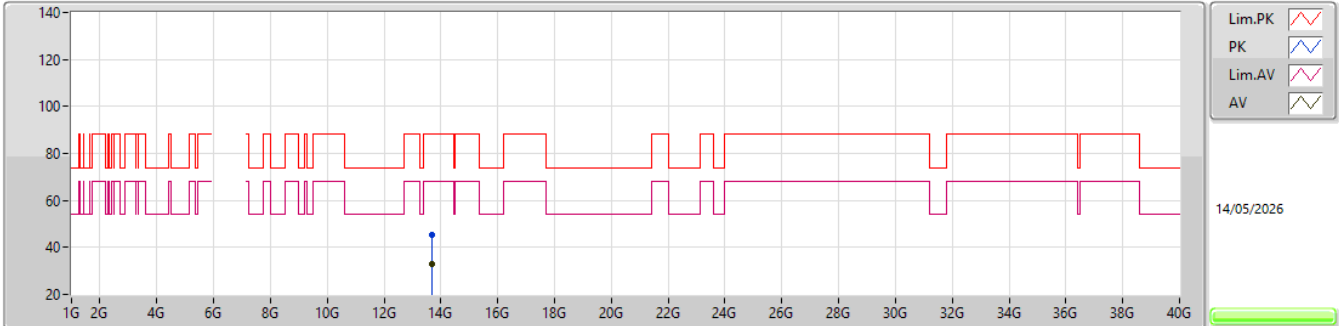


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.67731G	45.27	88.20	-42.93	58.63	3	Vertical	255	1.20	-	40.66	11.40	65.42			
RMS	13.69744G	33.02	68.20	-35.18	46.25	3	Vertical	255	1.20	-	40.78	11.40	65.41			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

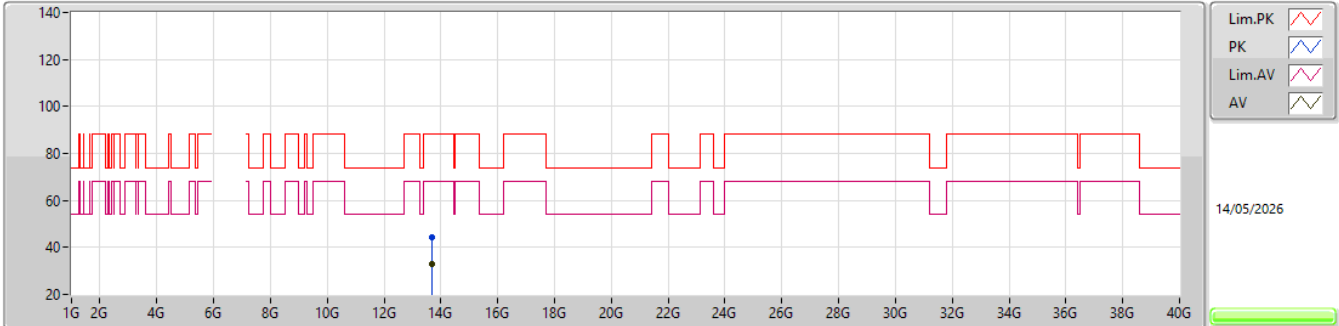


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68937G	44.22	88.20	-43.98	57.50	3	Horizontal	78	2.71	-	40.74	11.40	65.42			
RMS	13.69186G	32.74	68.20	-35.46	46.00	3	Horizontal	78	2.71	-	40.75	11.40	65.41			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

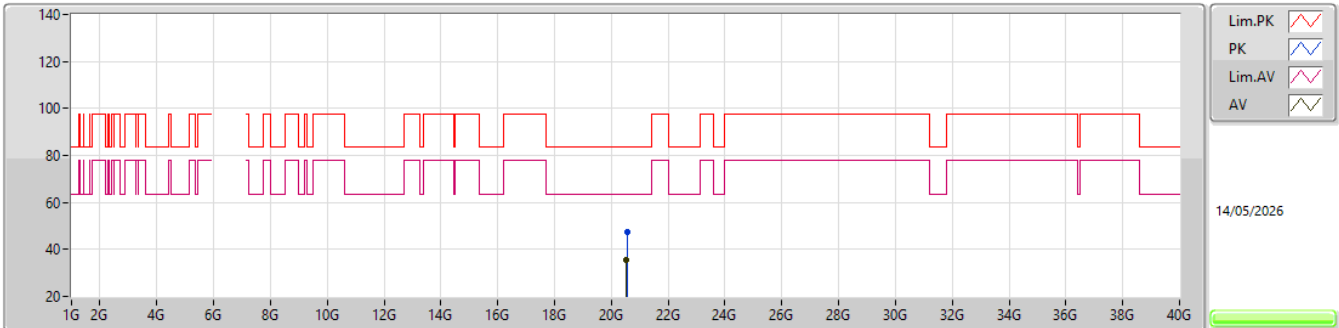


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.54655G	47.57	83.54	-35.97	41.61	1	Vertical	126	2.76	-	37.70	17.45	49.19			
AV	20.53884G	35.75	63.54	-27.79	29.80	1	Vertical	126	2.76	-	37.70	17.45	49.20			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

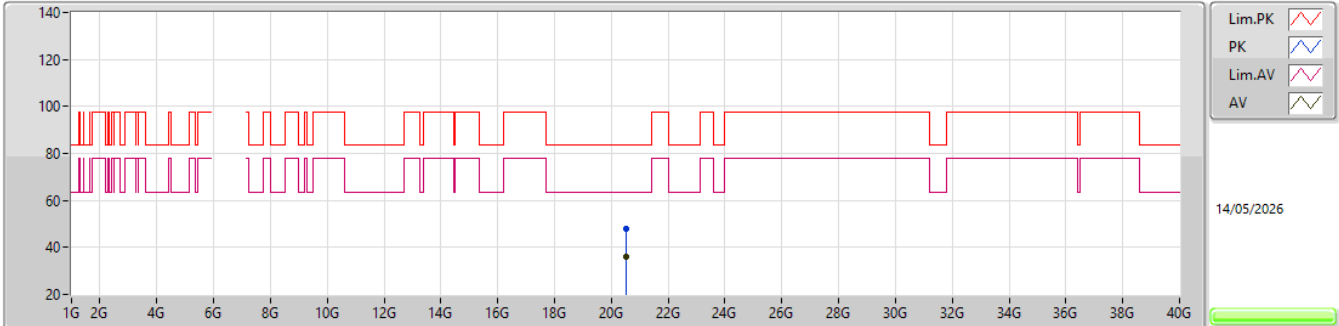


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.52417G	47.88	83.54	-35.66	41.95	1	Horizontal	93	1.68	-	37.70	17.44	49.21			
AV	20.53005G	35.80	63.54	-27.74	29.86	1	Horizontal	93	1.68	-	37.70	17.44	49.20			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

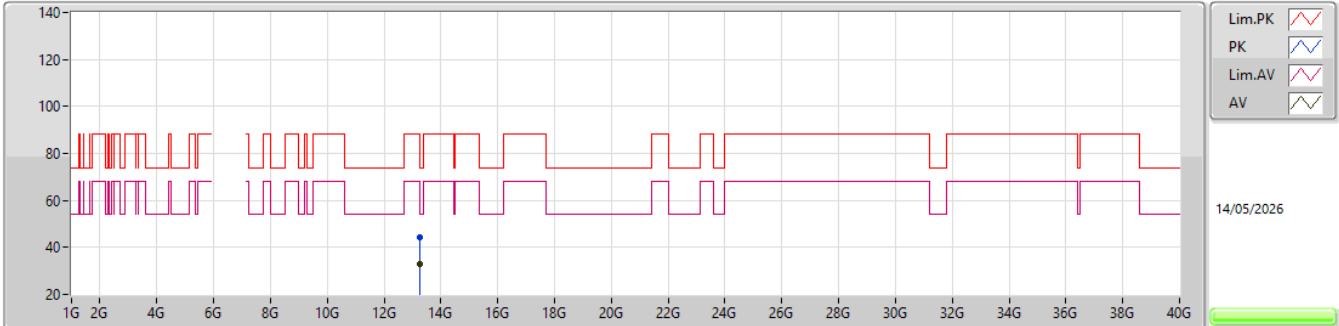


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25882G	44.38	74.00	-29.62	58.63	3	Vertical	242	1.16	-	40.14	11.28	65.67			
AV	13.25282G	32.68	54.00	-21.32	46.97	3	Vertical	242	1.16	-	40.11	11.27	65.67			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

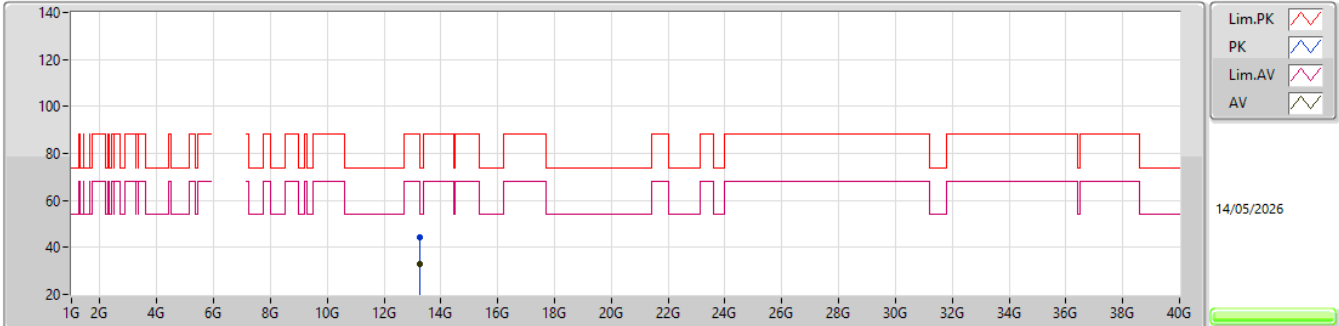


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25588G	44.50	74.00	-29.50	58.78	3	Horizontal	58	1.07	-	40.12	11.27	65.67			
AV	13.25042G	32.68	54.00	-21.32	46.98	3	Horizontal	58	1.07	-	40.10	11.27	65.67			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

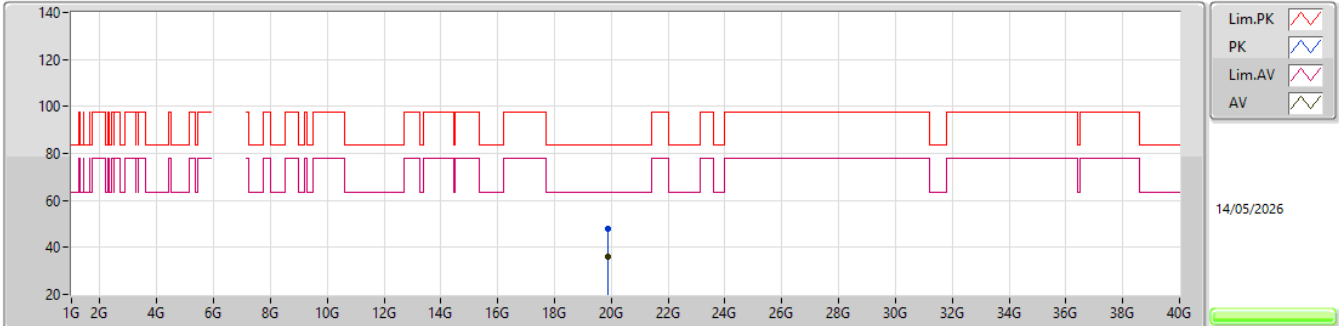


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.8651G	48.17	83.54	-35.37	42.55	1	Vertical	90	2.47	-	37.67	17.29	49.34			
AV	19.8684G	35.94	63.54	-27.60	30.32	1	Vertical	90	2.47	-	37.66	17.29	49.33			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

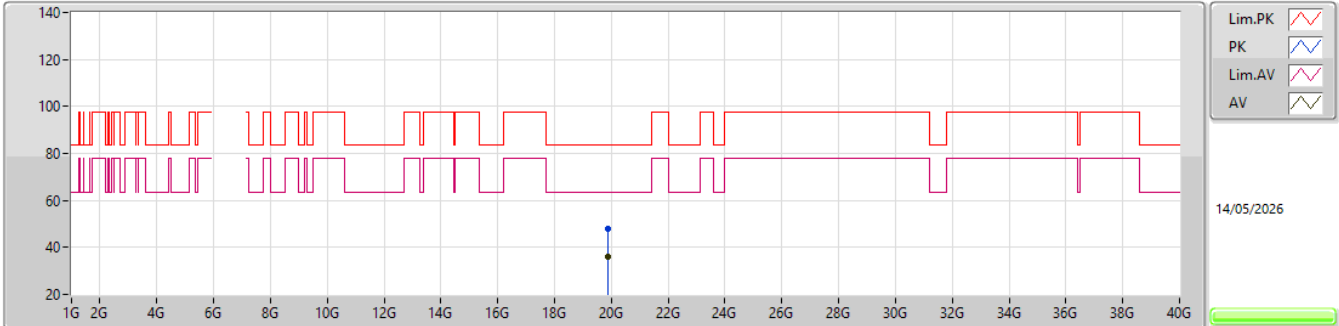


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.86402G	47.80	83.54	-35.74	42.18	1	Horizontal	153	2.95	-	37.67	17.29	49.34			
AV	19.86933G	35.82	63.54	-27.72	30.20	1	Horizontal	153	2.95	-	37.66	17.29	49.33			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

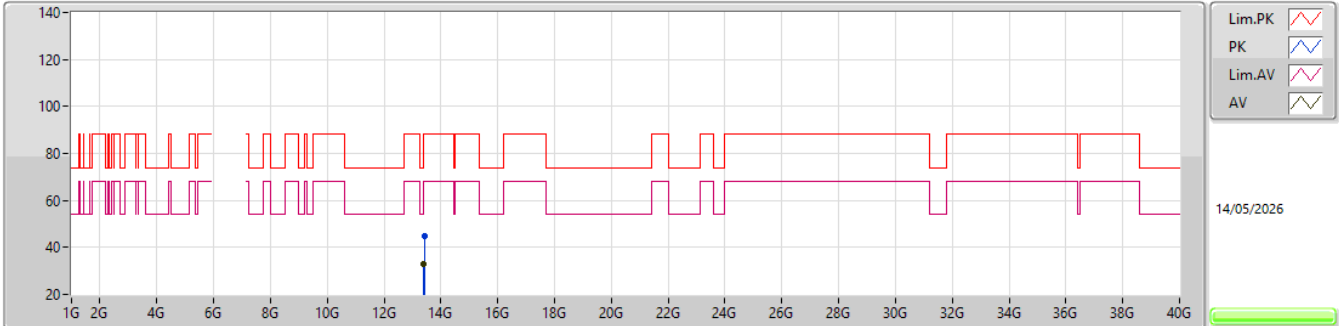


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41426G	44.60	88.20	-43.60	58.43	3	Vertical	256	1.40	-	40.43	11.32	65.58			
RMS	13.40535G	33.12	68.20	-35.08	46.97	3	Vertical	256	1.40	-	40.41	11.32	65.58			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

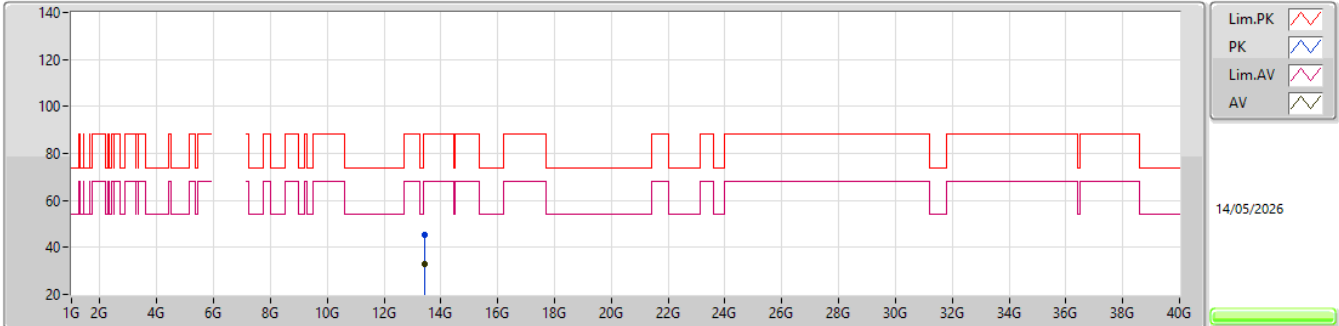


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41924G	45.09	88.20	-43.11	58.91	3	Horizontal	74	2.99	-	40.44	11.32	65.58			
RMS	13.41135G	32.96	68.20	-35.24	46.80	3	Horizontal	74	2.99	-	40.42	11.32	65.58			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

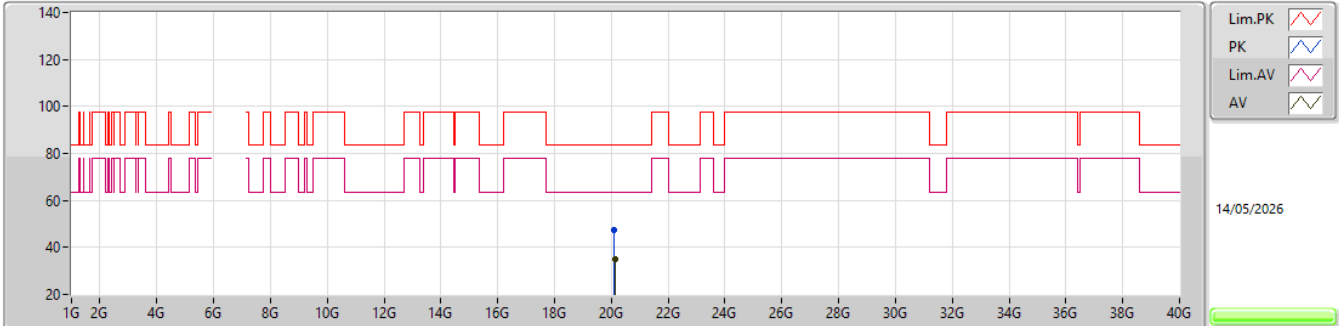


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11335G	47.50	83.54	-36.04	41.65	1	Vertical	291	1.85	-	37.70	17.39	49.24			
AV	20.1225G	35.11	63.54	-28.43	29.26	1	Vertical	291	1.85	-	37.70	17.39	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

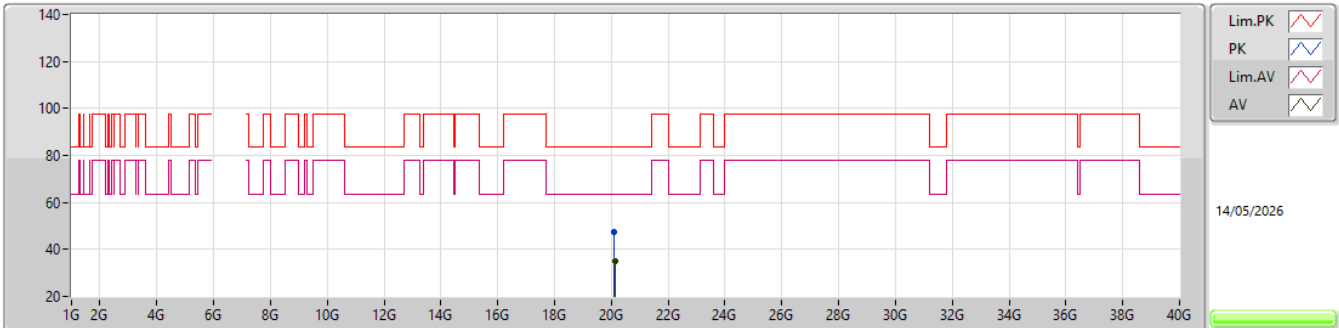


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11134G	47.19	83.54	-36.35	41.34	1	Horizontal	72	1.43	-	37.70	17.39	49.24			
AV	20.12631G	35.10	63.54	-28.44	29.24	1	Horizontal	72	1.43	-	37.70	17.39	49.23			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

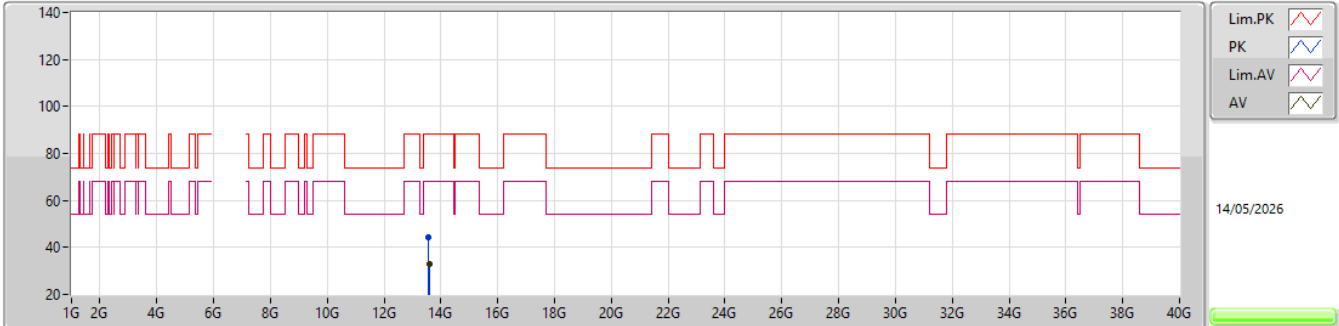


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.57309G	44.44	88.20	-43.76	58.11	3	Vertical	116	1.39	-	40.45	11.37	65.49			
RMS	13.58335G	32.70	68.20	-35.50	46.34	3	Vertical	116	1.39	-	40.47	11.37	65.48			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

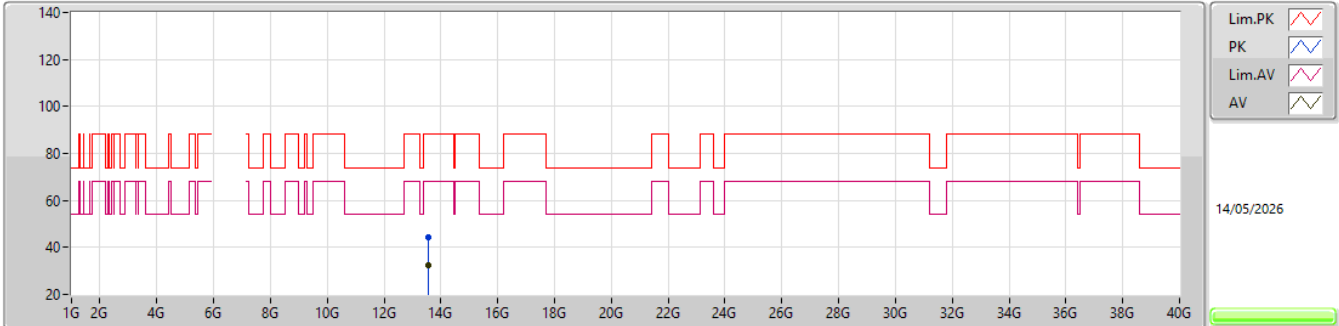


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57627G	44.41	88.20	-43.79	58.07	3	Horizontal	71	2.77	-	40.45	11.37	65.48			
RMS	13.57012G	32.65	68.20	-35.55	46.33	3	Horizontal	71	2.77	-	40.44	11.37	65.49			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

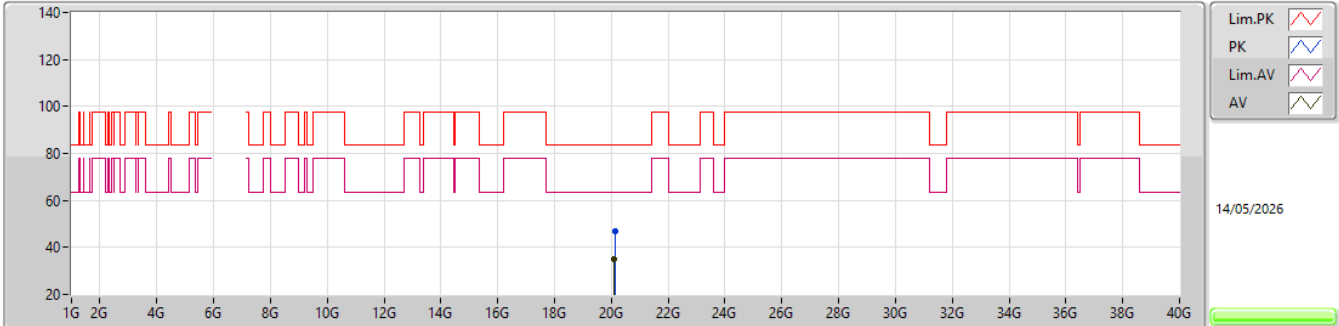EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.12373G	47.03	83.54	-36.51	41.18	1	Vertical	244	2.15	-	37.70	17.39	49.24			
AV	20.10891G	35.17	63.54	-28.37	29.32	1	Vertical	244	2.15	-	37.70	17.39	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

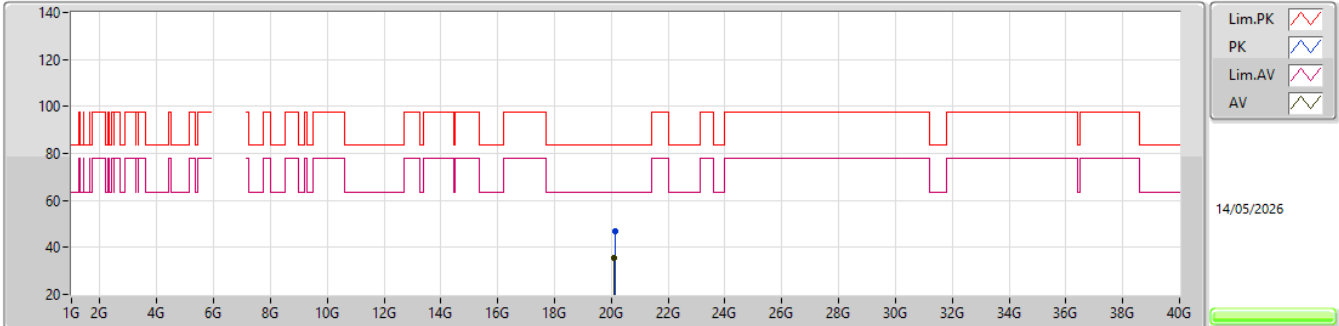


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11977G	46.69	83.54	-36.85	40.84	1	Horizontal	110	2.42	-	37.70	17.39	49.24			
AV	20.10528G	35.27	63.54	-28.27	29.43	1	Horizontal	110	2.42	-	37.70	17.38	49.24			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

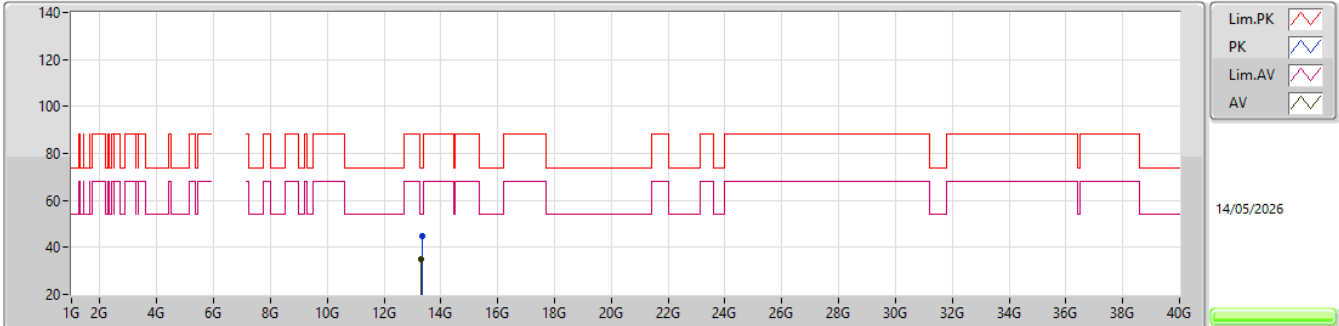


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32496G	44.98	74.00	-29.02	59.07	3	Vertical	288	2.11	-	40.25	11.29	65.63			
AV	13.32136G	35.13	54.00	-18.87	49.21	3	Vertical	288	2.11	-	40.26	11.29	65.63			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

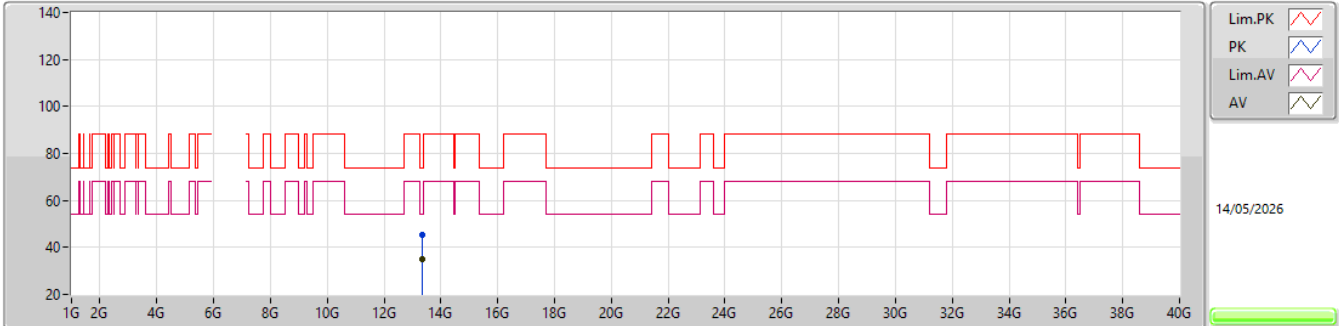


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.33705G	45.53	74.00	-28.47	59.62	3	Horizontal	148	1.26	-	40.23	11.30	65.62			
AV	13.34476G	34.82	54.00	-19.18	48.93	3	Horizontal	148	1.26	-	40.21	11.30	65.62			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

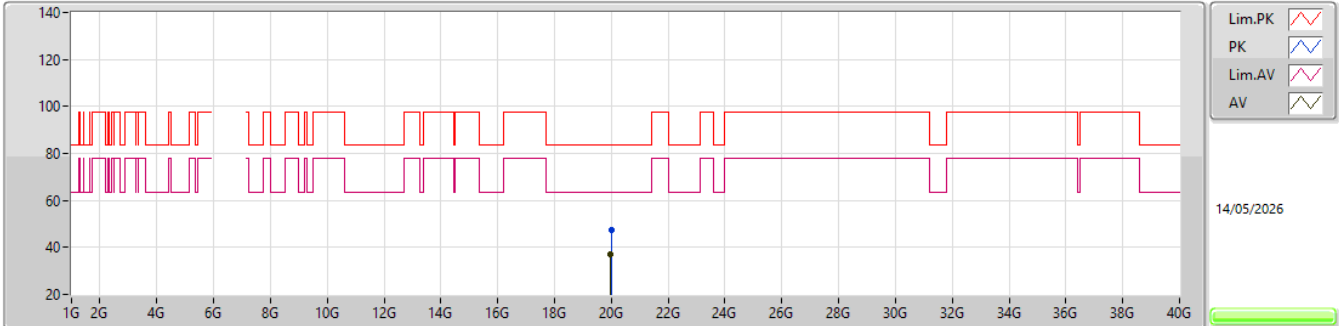


EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.00838G	47.41	83.54	-36.13	41.51	1	Vertical	286	2.57	-	37.77	17.37	49.24			
AV	19.98717G	36.99	63.54	-26.55	31.11	1	Vertical	286	2.57	-	37.77	17.36	49.25			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

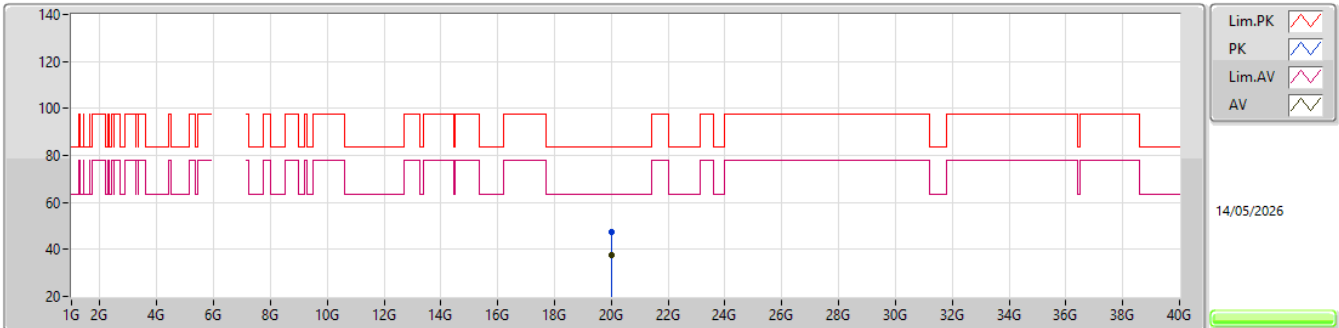

EUT_Z_2TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99092G	47.38	83.54	-36.16	41.49	1	Horizontal	213	1.31	-	37.78	17.36	49.25			
AV	19.99155G	37.42	63.54	-26.12	31.52	1	Horizontal	213	1.31	-	37.78	17.37	49.25			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_1TX	Pass	RMS	5.925G	57.28	68.20	-10.92	3	Vertical	10	2.69	-

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

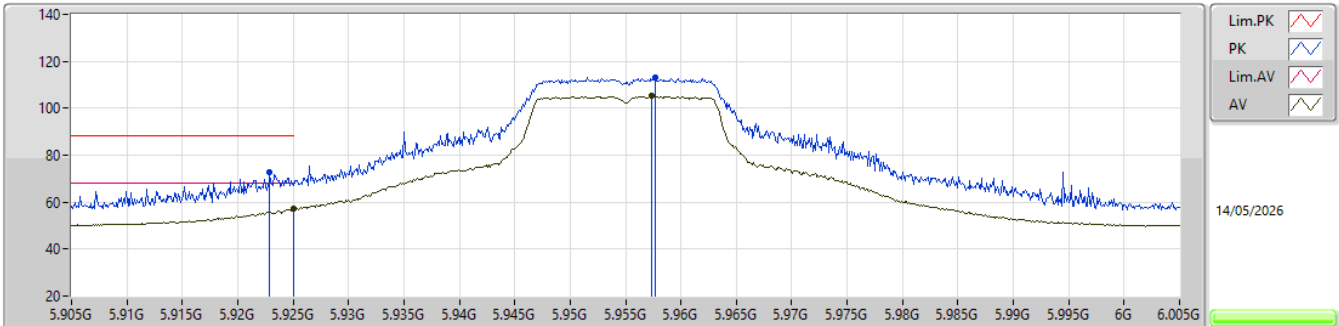


EUT_Z_1TX
Setting 80
03-D-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9229G	72.61	88.20	-15.59	65.43	3	Vertical	10	2.69	-	34.65	7.52	34.99				
RMS	5.925G	57.28	68.20	-10.92	50.10	3	Vertical	10	2.69	-	34.65	7.52	34.99				
PK	5.9577G	112.88	Inf	-Inf	105.63	3	Vertical	10	2.69	-	34.72	7.53	35.00				
RMS	5.9574G	105.11	Inf	-Inf	97.87	3	Vertical	10	2.69	-	34.71	7.53	35.00				

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

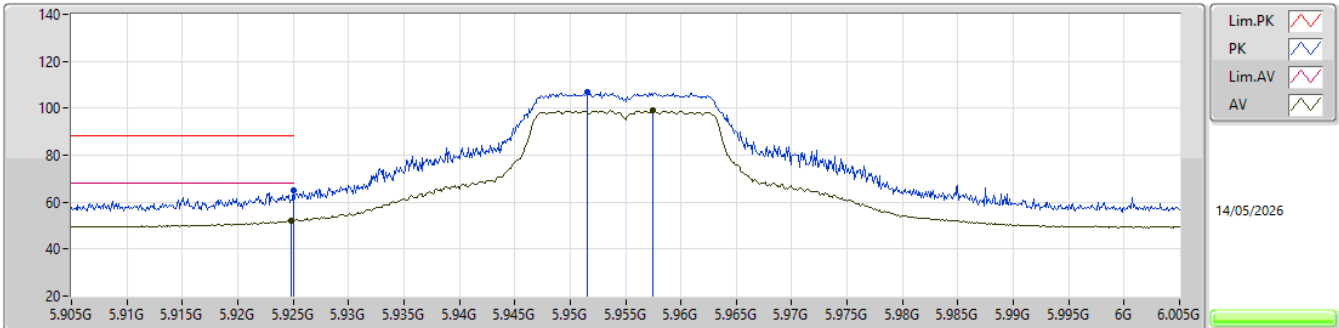


EUT_Z_1TX
Setting 80
03-D-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	64.93	88.20	-23.27	57.75	3	Horizontal	159	2.23	-	34.65	7.52	34.99			
RMS	5.9248G	52.24	68.20	-15.96	45.06	3	Horizontal	159	2.23	-	34.65	7.52	34.99			
PK	5.9515G	106.82	Inf	-Inf	99.59	3	Horizontal	159	2.23	-	34.70	7.53	35.00			
RMS	5.9575G	98.99	Inf	-Inf	91.75	3	Horizontal	159	2.23	-	34.71	7.53	35.00			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

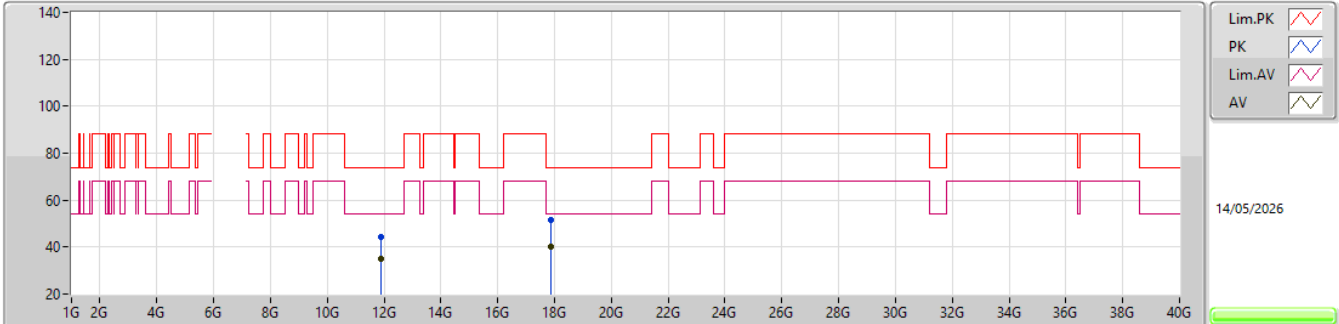


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.90793G	44.15	74.00	-29.85	60.41	3	Vertical	255	2.12	-	39.42	10.88	66.56				
AV	11.90985G	35.15	54.00	-18.85	51.41	3	Vertical	255	2.12	-	39.42	10.88	66.56				
PK	17.86116G	51.33	74.00	-22.67	57.37	3	Vertical	288	1.55	-	44.64	13.21	63.89				
AV	17.87415G	40.28	54.00	-13.72	46.24	3	Vertical	288	1.55	-	44.70	13.22	63.88				

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

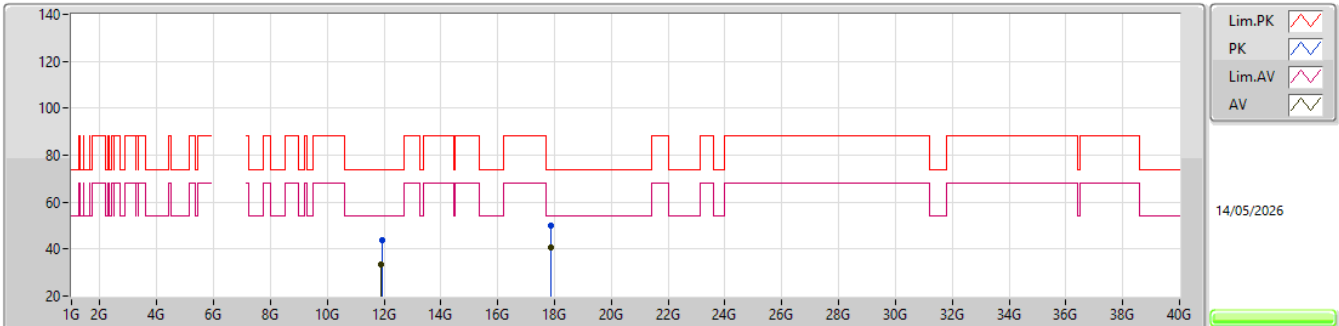


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92074G	43.90	74.00	-30.10	60.15	3	Horizontal	133	1.20	-	39.44	10.88	66.57			
AV	11.91117G	33.26	54.00	-20.74	49.52	3	Horizontal	133	1.20	-	39.42	10.88	66.56			
PK	17.87844G	50.21	74.00	-23.79	56.15	3	Horizontal	178	1.60	-	44.71	13.22	63.87			
AV	17.87424G	40.46	54.00	-13.54	46.42	3	Horizontal	178	1.60	-	44.70	13.22	63.88			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

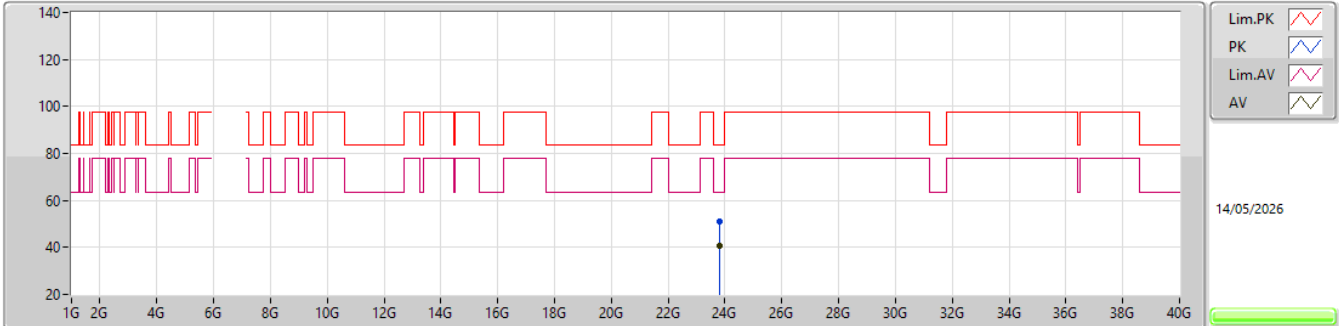


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81901G	51.21	83.54	-32.33	40.83	1	Vertical	124	2.47	-	38.72	18.76	47.10			
AV	23.82609G	40.85	63.54	-22.69	30.49	1	Vertical	124	2.47	-	38.70	18.76	47.10			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

5955MHz_TX

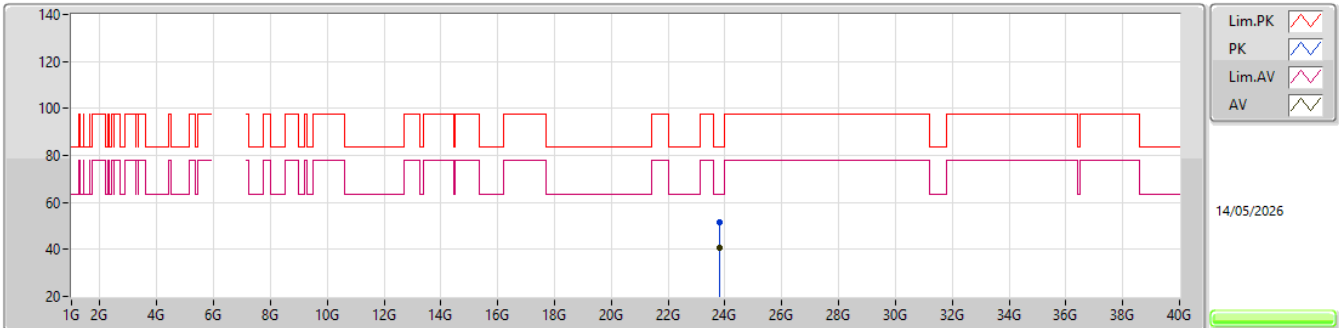


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82414G	51.66	83.54	-31.88	41.30	1	Horizontal	218	1.68	-	38.70	18.76	47.10			
AV	23.82393G	40.78	63.54	-22.76	30.42	1	Horizontal	218	1.68	-	38.70	18.76	47.10			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6195MHz_TX

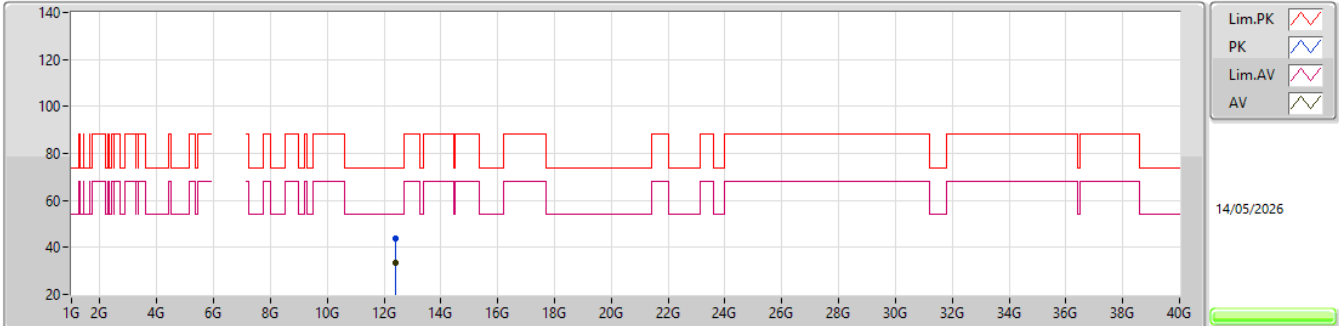


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39024G	43.78	74.00	-30.22	59.85	3	Vertical	191	2.06	-	38.90	11.02	65.99			
AV	12.38979G	33.35	54.00	-20.65	49.42	3	Vertical	191	2.06	-	38.90	11.02	65.99			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6195MHz_TX

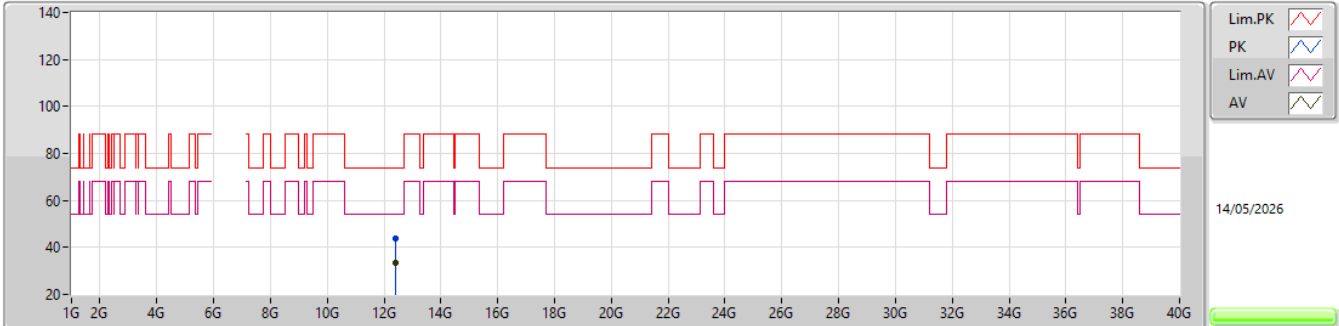


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.399G	43.54	74.00	-30.46	59.58	3	Horizontal	256	2.56	-	38.90	11.03	65.97			
AV	12.39108G	33.19	54.00	-20.81	49.25	3	Horizontal	256	2.56	-	38.90	11.02	65.98			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6195MHz_TX

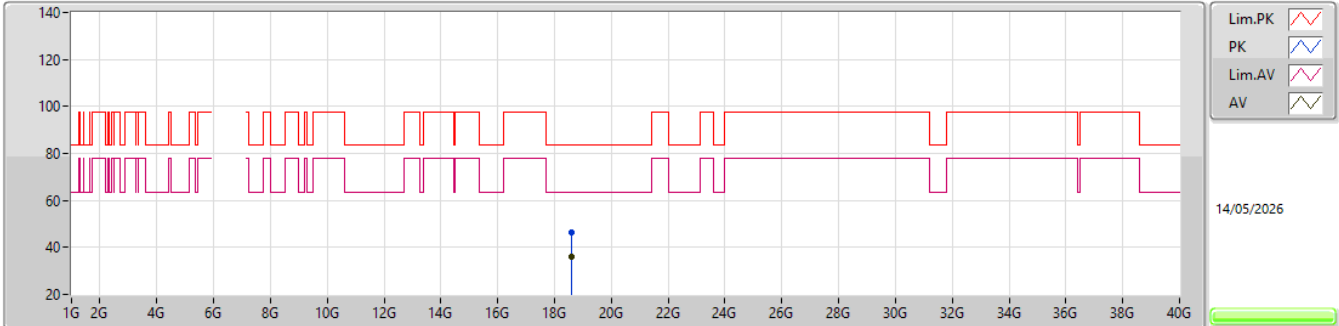


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59241G	46.41	83.54	-37.13	41.83	1	Vertical	150	1.91	-	37.68	16.58	49.68			
AV	18.59808G	36.18	63.54	-27.36	31.56	1	Vertical	150	1.91	-	37.70	16.59	49.67			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6195MHz_TX

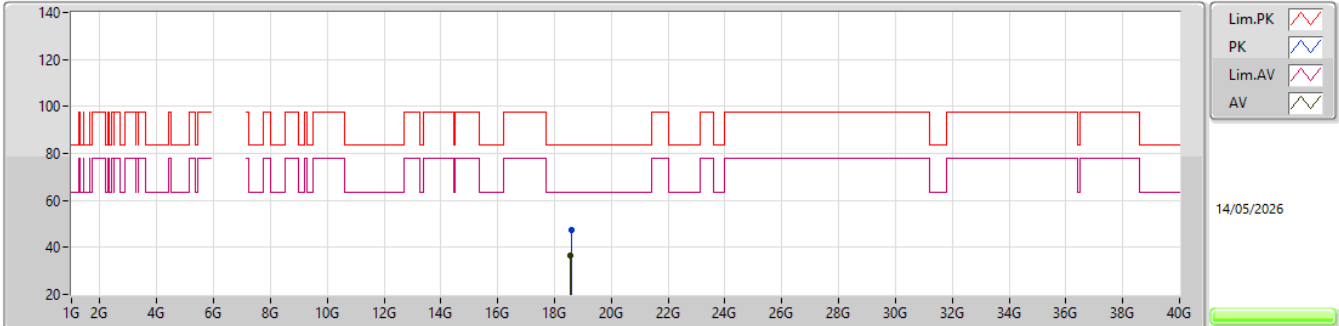


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5901G	47.36	83.54	-36.18	42.78	1	Horizontal	306	2.83	-	37.68	16.58	49.68			
AV	18.57507G	36.51	63.54	-27.03	31.98	1	Horizontal	306	2.83	-	37.65	16.57	49.69			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX


6415MHz_TX

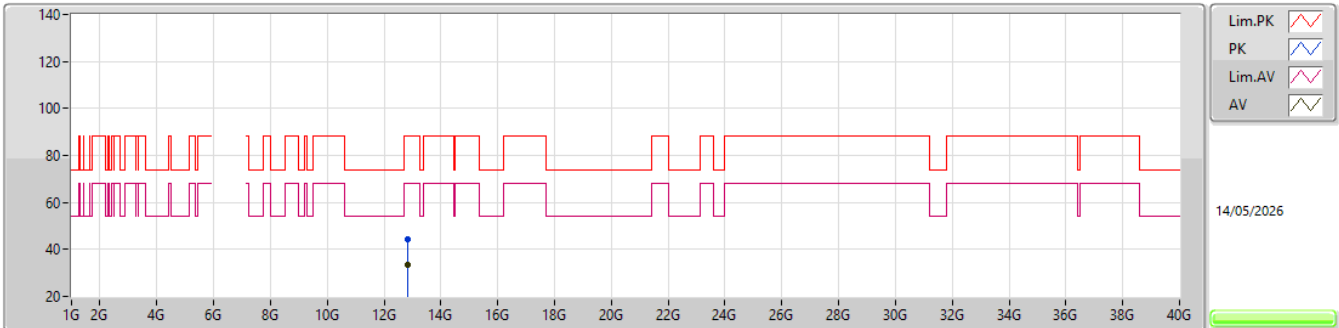EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.84029G	44.39	88.20	-43.81	59.70	3	Vertical	1	2.67	-	39.36	11.15	65.82			
RMS	12.83525G	33.54	68.20	-34.66	48.87	3	Vertical	1	2.67	-	39.34	11.15	65.82			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX


6415MHz_TX

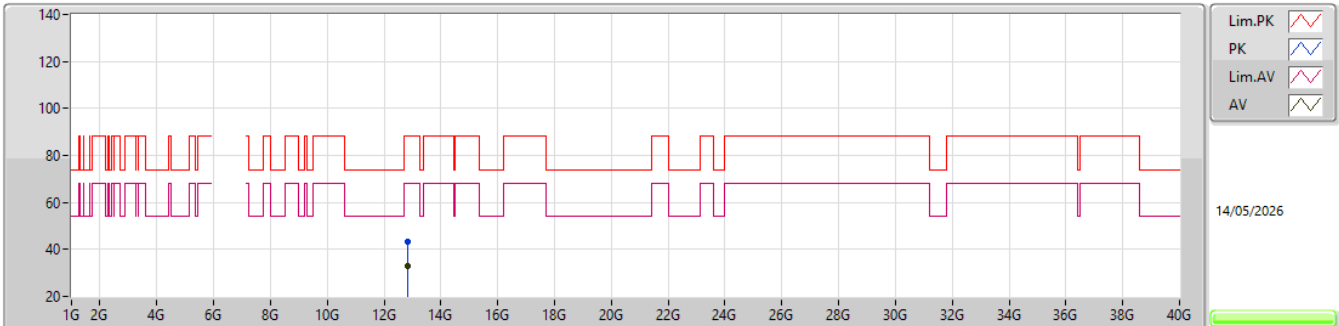EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83897G	43.13	88.20	-45.07	58.44	3	Horizontal	106	2.19	-	39.36	11.15	65.82			
RMS	12.82103G	33.18	68.20	-35.02	48.57	3	Horizontal	106	2.19	-	39.28	11.15	65.82			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6415MHz_TX

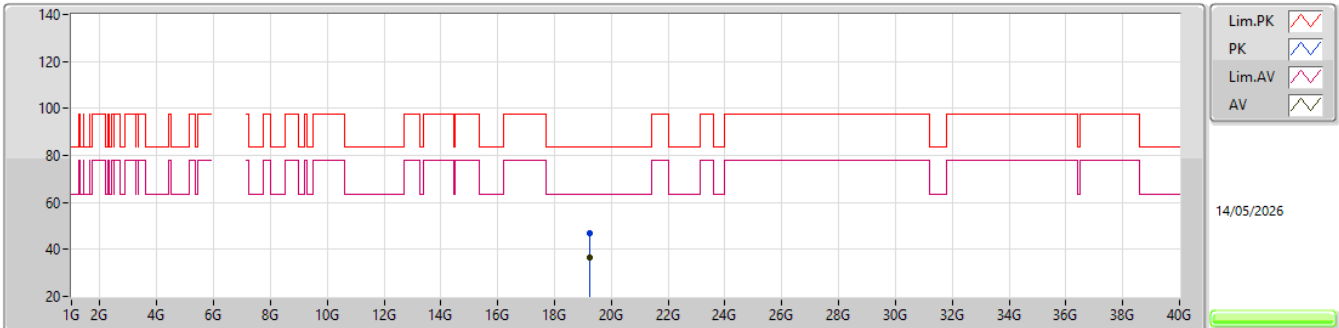


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24821G	46.94	83.54	-36.60	41.60	1	Vertical	103	2.59	-	37.89	16.93	49.48			
AV	19.23735G	36.78	63.54	-26.76	31.47	1	Vertical	103	2.59	-	37.85	16.93	49.47			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_1TX

6415MHz_TX

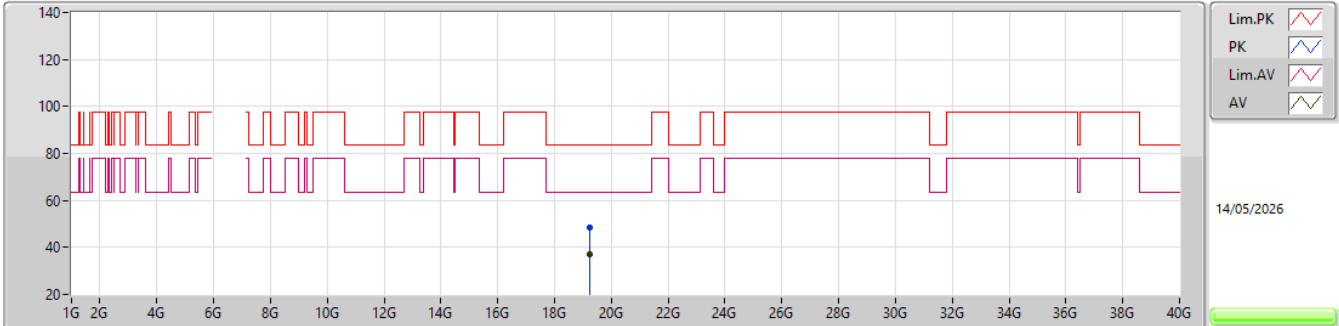


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2438G	48.39	83.54	-35.15	43.06	1	Horizontal	315	2.54	-	37.88	16.93	49.48			
AV	19.23555G	37.31	63.54	-26.23	32.01	1	Horizontal	315	2.54	-	37.84	16.93	49.47			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6535MHz_TX

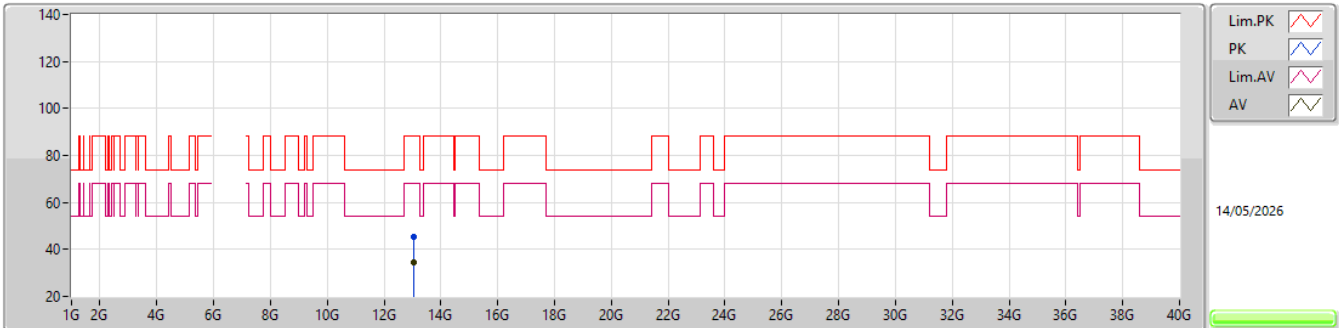


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06106G	45.19	88.20	-43.01	60.03	3	Vertical	99	1.86	-	39.72	11.22	65.78			
RMS	13.0595G	34.53	68.20	-33.67	49.38	3	Vertical	99	1.86	-	39.72	11.22	65.79			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6535MHz_TX

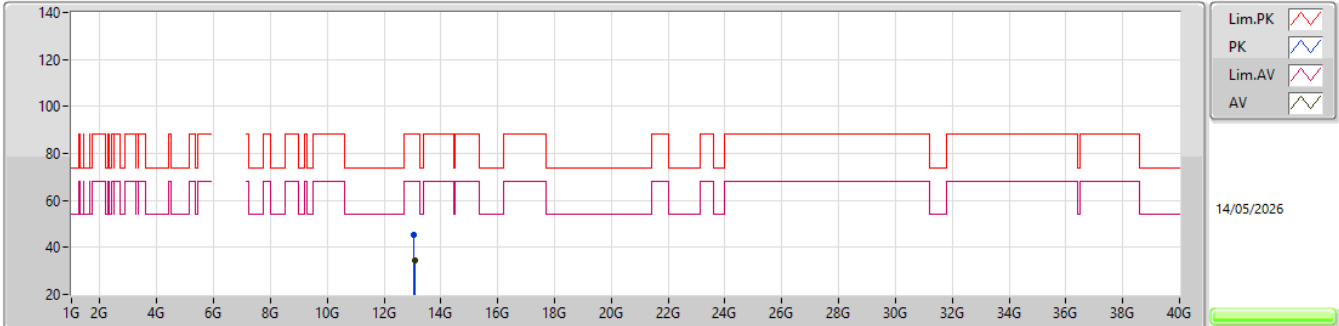


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06412G	45.43	88.20	-42.77	60.26	3	Horizontal	122	2.78	-	39.73	11.22	65.78			
RMS	13.07756G	34.41	68.20	-33.79	49.21	3	Horizontal	122	2.78	-	39.76	11.22	65.78			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6535MHz_TX

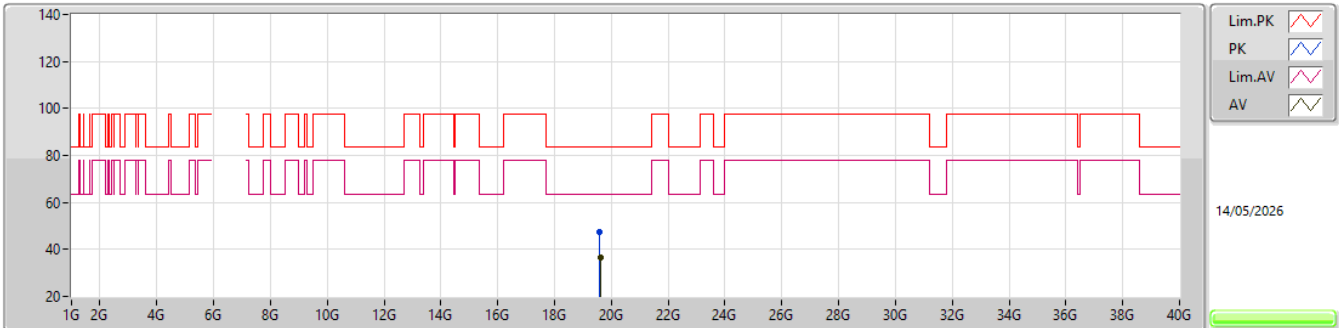


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.59804G	47.27	83.54	-36.27	41.96	1	Vertical	334	2.52	-	37.70	17.14	49.53			
AV	19.60419G	36.58	63.54	-26.96	31.27	1	Vertical	334	2.52	-	37.69	17.14	49.52			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6535MHz_TX

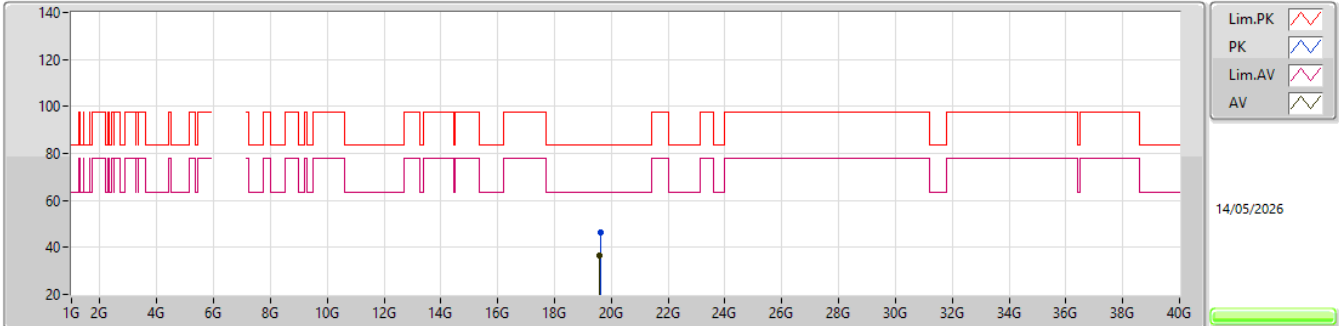


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.617G	46.46	83.54	-37.08	41.16	1	Horizontal	143	2.20	-	37.67	17.15	49.52			
AV	19.59066G	36.53	63.54	-27.01	31.23	1	Horizontal	143	2.20	-	37.70	17.13	49.53			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6695MHz_TX

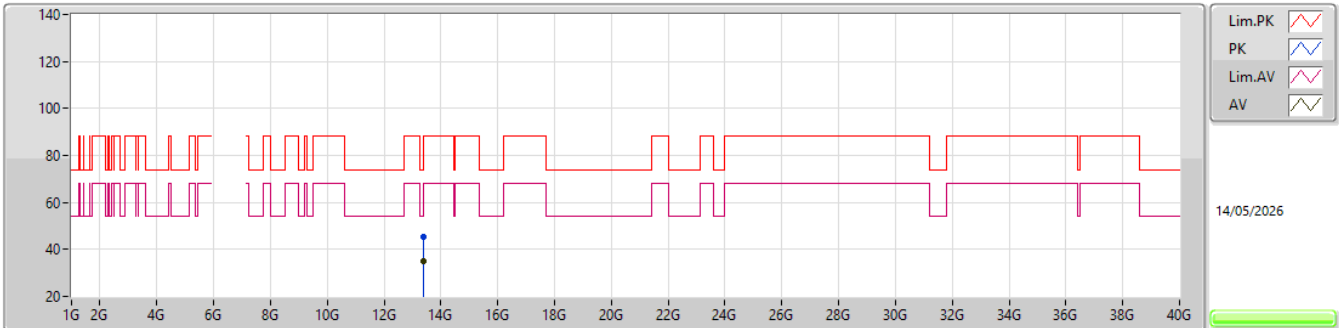


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37524G	45.47	74.00	-28.53	59.46	3	Vertical	180	1.06	-	40.30	11.31	65.60			
AV	13.39072G	35.20	54.00	-18.80	49.12	3	Vertical	180	1.06	-	40.36	11.31	65.59			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6695MHz_TX

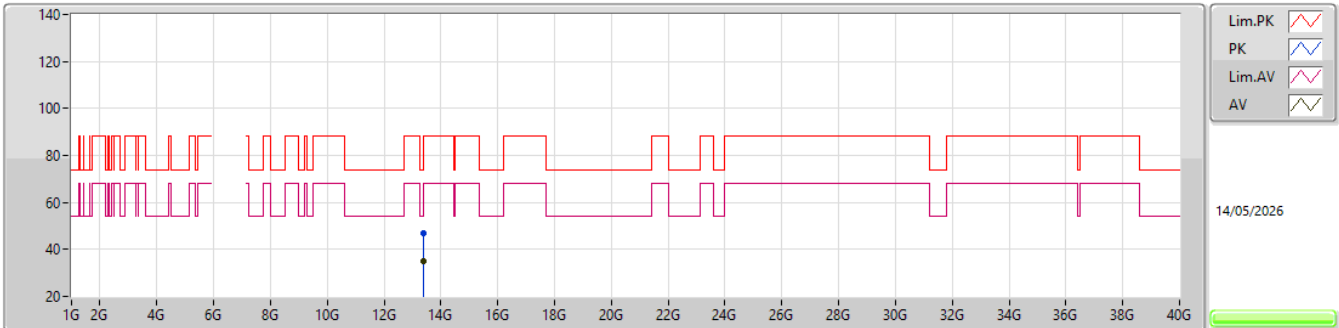


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39684G	46.73	74.00	-27.27	60.61	3	Horizontal	138	2.43	-	40.39	11.32	65.59			
AV	13.39237G	34.87	54.00	-19.13	48.78	3	Horizontal	138	2.43	-	40.37	11.31	65.59			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6695MHz_TX

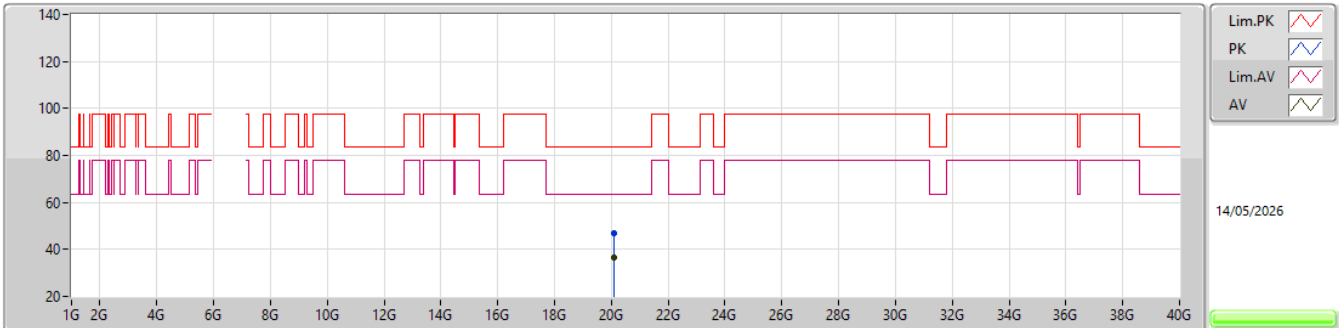


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08734G	46.78	83.54	-36.76	40.97	1	Vertical	237	2.28	-	37.67	17.38	49.24			
AV	20.09052G	36.80	63.54	-26.74	30.98	1	Vertical	237	2.28	-	37.68	17.38	49.24			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6695MHz_TX

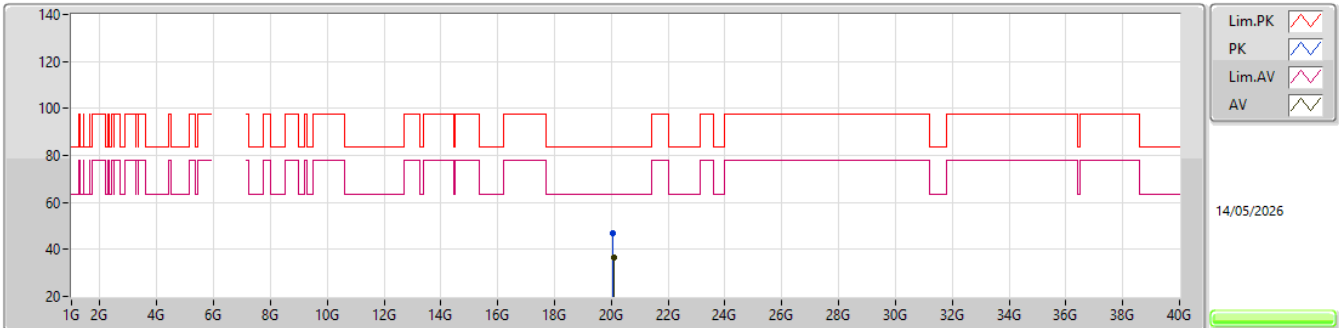


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07153G	47.12	83.54	-36.42	41.34	1	Horizontal	342	2.89	-	37.64	17.38	49.24			
AV	20.07723G	36.34	63.54	-27.20	30.55	1	Horizontal	342	2.89	-	37.65	17.38	49.24			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6855MHz_TX

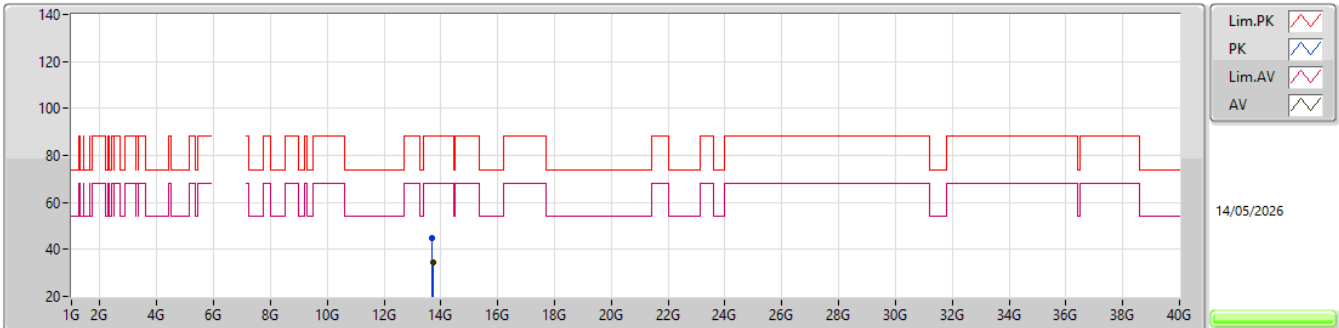


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.69836G	44.96	88.20	-43.24	58.18	3	Vertical	305	2.75	-	40.79	11.40	65.41			
RMS	13.71801G	34.68	68.20	-33.52	47.83	3	Vertical	305	2.75	-	40.84	11.41	65.40			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6855MHz_TX

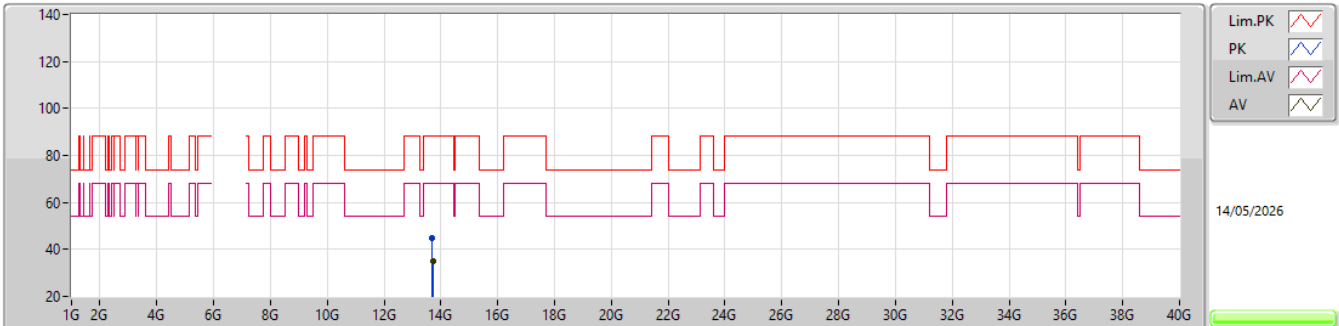


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70154G	44.67	88.20	-43.53	57.88	3	Horizontal	304	2.11	-	40.80	11.40	65.41			
RMS	13.71759G	34.89	68.20	-33.31	48.04	3	Horizontal	304	2.11	-	40.84	11.41	65.40			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6855MHz_TX

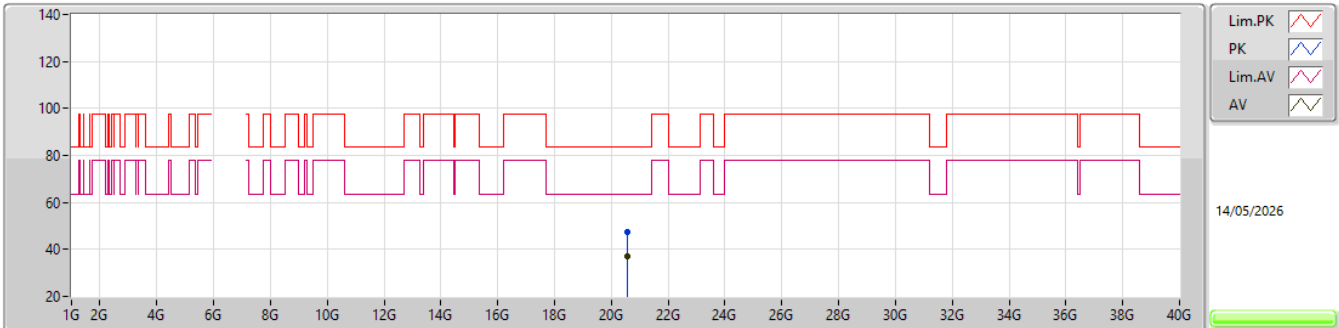


EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.56308G	47.53	83.54	-36.01	41.54	1	Vertical	255	2.60	-	37.73	17.45	49.19			
AV	20.55801G	37.25	63.54	-26.29	31.27	1	Vertical	255	2.60	-	37.72	17.45	49.19			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_1TX

6855MHz_TX

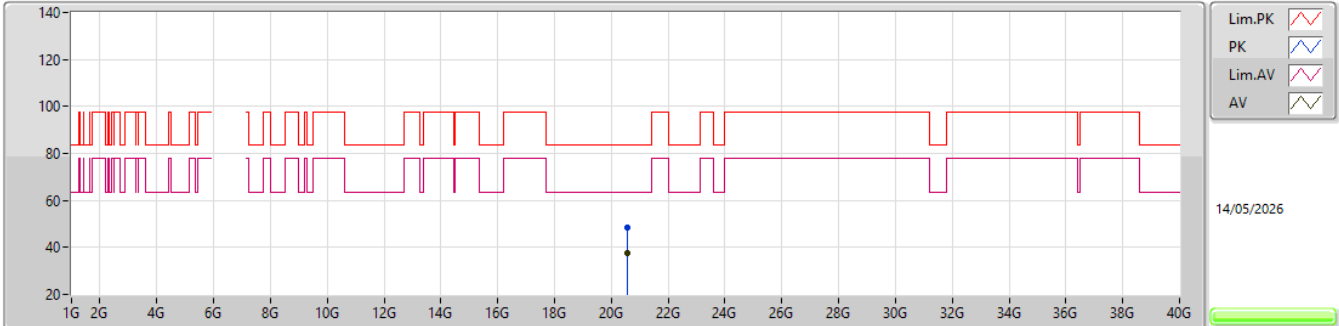

EUT_Z_1TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.55918G	48.24	83.54	-35.30	42.26	1	Horizontal	211	2.68	-	37.72	17.45	49.19			
AV	20.56599G	37.37	63.54	-26.17	31.37	1	Horizontal	211	2.68	-	37.73	17.45	49.18			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1.(MCS0)_2TX	Pass	RMS	5.9242G	67.99	68.20	-0.21	3	Vertical	360	1.80	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

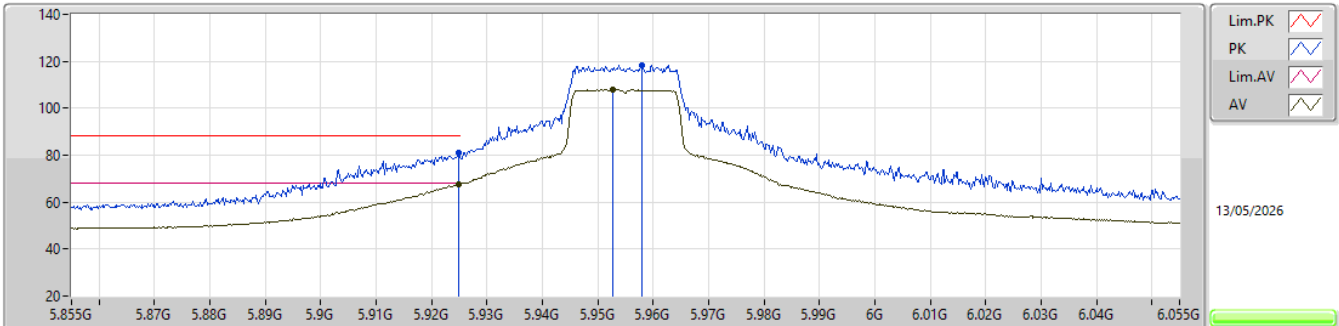


EUT_V_2TX
Setting 76
05-X-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9248G	81.16	88.20	-7.04	72.85	3	Vertical	360	1.80	-	34.15	8.94	34.78			
RMS	5.9248G	67.83	68.20	-0.37	59.52	3	Vertical	360	1.80	-	34.15	8.94	34.78			
PK	5.958G	118.29	Inf	-Inf	109.87	3	Vertical	360	1.80	-	34.20	8.98	34.76			
RMS	5.9526G	107.90	Inf	-Inf	99.48	3	Vertical	360	1.80	-	34.20	8.98	34.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

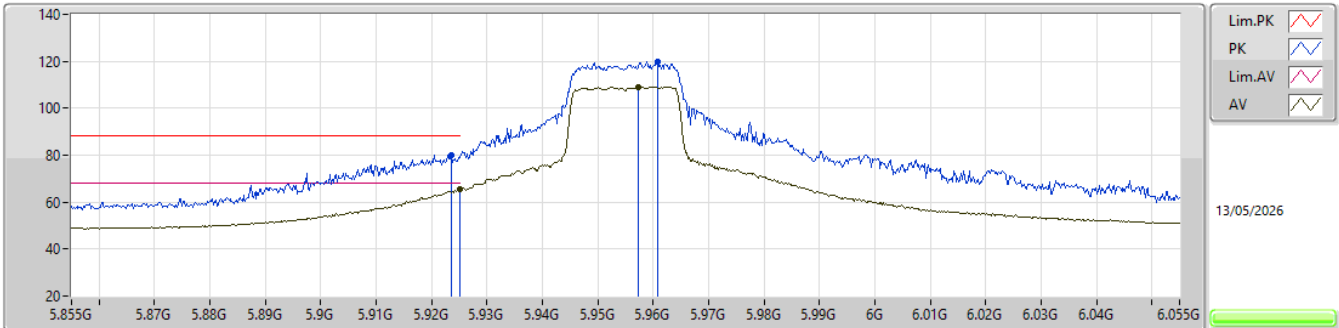


EUT_Y_2TX
Setting 76
05-X-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9236G	80.10	88.20	-8.10	71.79	3	Horizontal	8	1.80	-	34.15	8.94	34.78			
RMS	5.925G	65.49	68.20	-2.71	57.18	3	Horizontal	8	1.80	-	34.15	8.94	34.78			
PK	5.9608G	119.87	Inf	-Inf	111.45	3	Horizontal	8	1.80	-	34.20	8.98	34.76			
RMS	5.9574G	109.14	Inf	-Inf	100.72	3	Horizontal	8	1.80	-	34.20	8.98	34.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

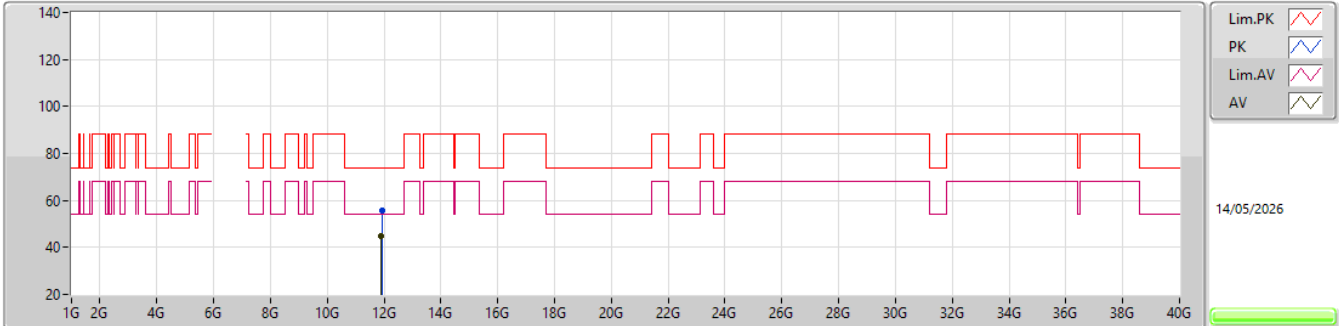


EUT_Y_2TX
Setting 76
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.92059G	55.64	74.00	-18.36	40.43	3	Vertical	321	1.46	-	38.80	11.07	34.66			
AV	11.90775G	44.70	54.00	-9.30	29.49	3	Vertical	321	1.46	-	38.80	11.07	34.66			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5955MHz_TX

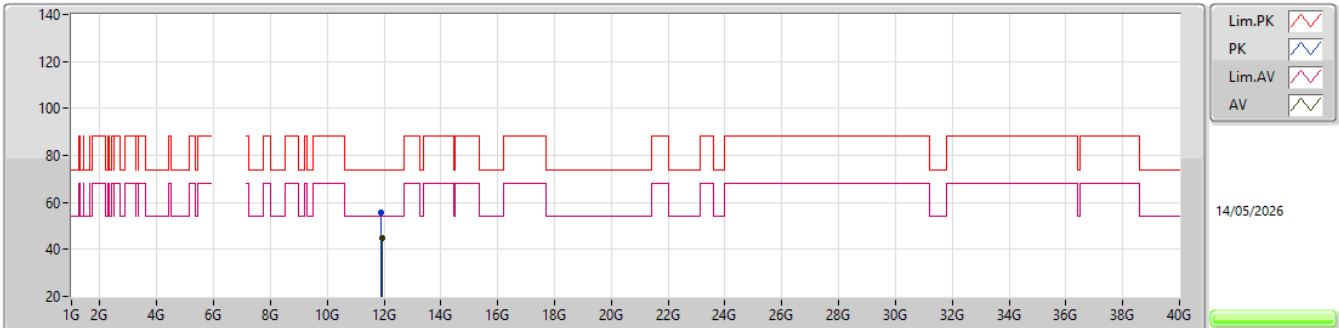EUT_Y_2TX
Setting 76
06-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91084G	55.57	74.00	-18.43	40.36	3	Horizontal	281	2.27	-	38.80	11.07	34.66			
AV	11.91687G	44.72	54.00	-9.28	29.51	3	Horizontal	281	2.27	-	38.80	11.07	34.66			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5955MHz_TX

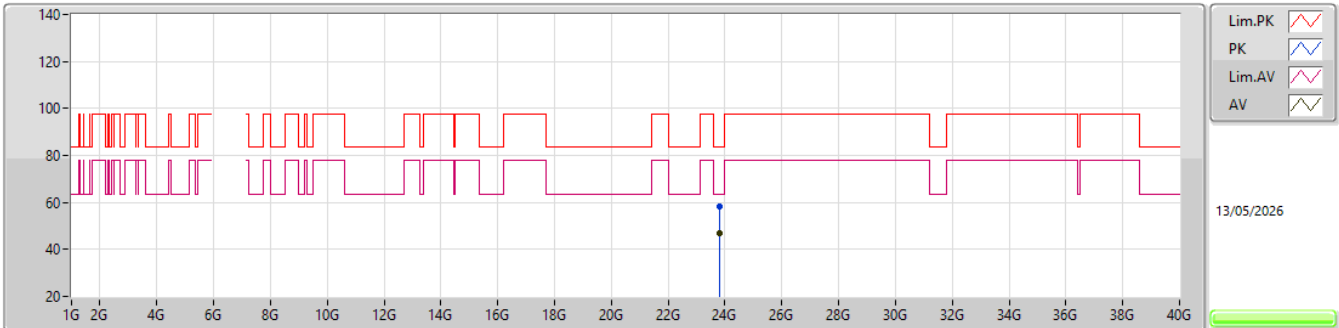EUT_Y_2TX
Setting 76
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82451G	58.13	74.00	-15.87	49.01	1	Vertical	110	1.58	-	38.90	18.12	47.90			
AV	23.82003G	46.94	54.00	-7.06	37.82	1	Vertical	110	1.58	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

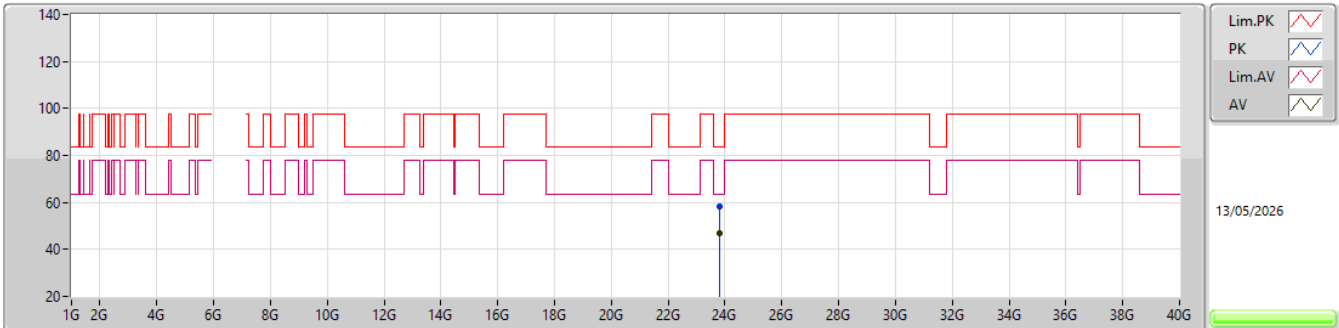


EUT_Y_2TX
Setting 76
06-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81659G	58.30	74.00	-15.70	49.19	1	Horizontal	268	1.06	-	38.90	18.11	47.90			
AV	23.82183G	47.08	54.00	-6.92	37.96	1	Horizontal	268	1.06	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

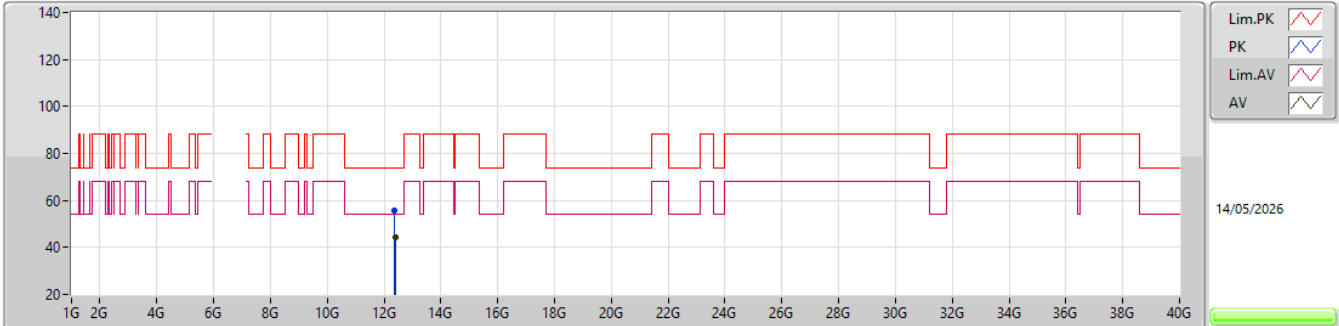


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37692G	55.58	74.00	-18.42	40.39	3	Vertical	262	2.09	-	38.75	11.32	34.88			
AV	12.40023G	44.53	54.00	-9.47	29.38	3	Vertical	262	2.09	-	38.70	11.34	34.89			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

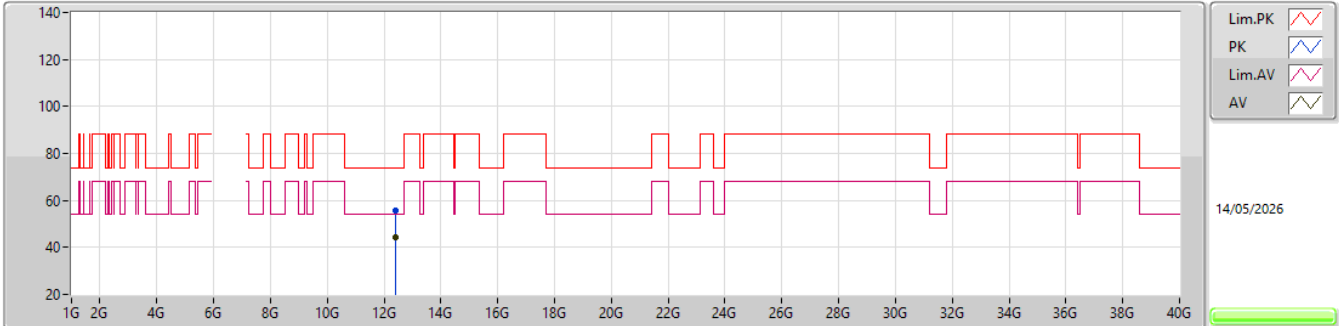


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39867G	55.47	74.00	-18.53	40.32	3	Horizontal	331	1.90	-	38.70	11.34	34.89			
AV	12.39519G	44.56	54.00	-9.44	29.40	3	Horizontal	331	1.90	-	38.71	11.34	34.89			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

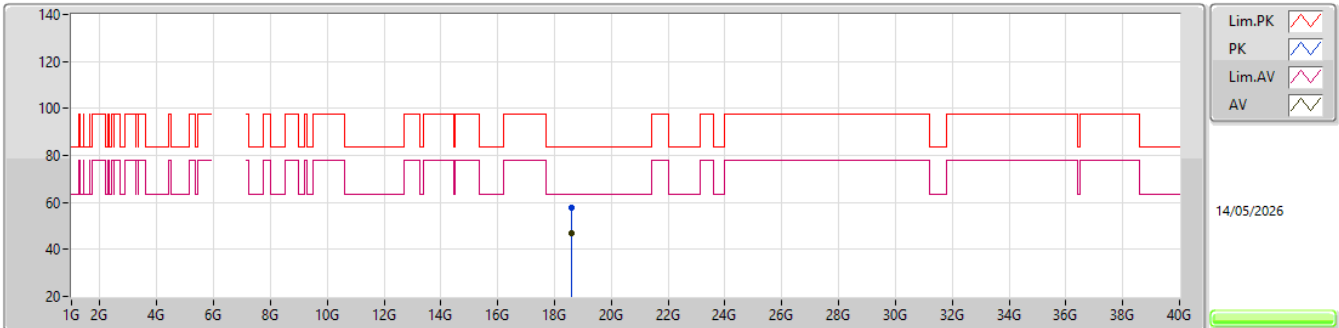


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58306G	57.97	83.54	-25.57	53.25	1	Vertical	320	1.73	-	37.63	15.74	48.65			
AV	18.5878G	46.78	63.54	-16.76	42.04	1	Vertical	320	1.73	-	37.65	15.74	48.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

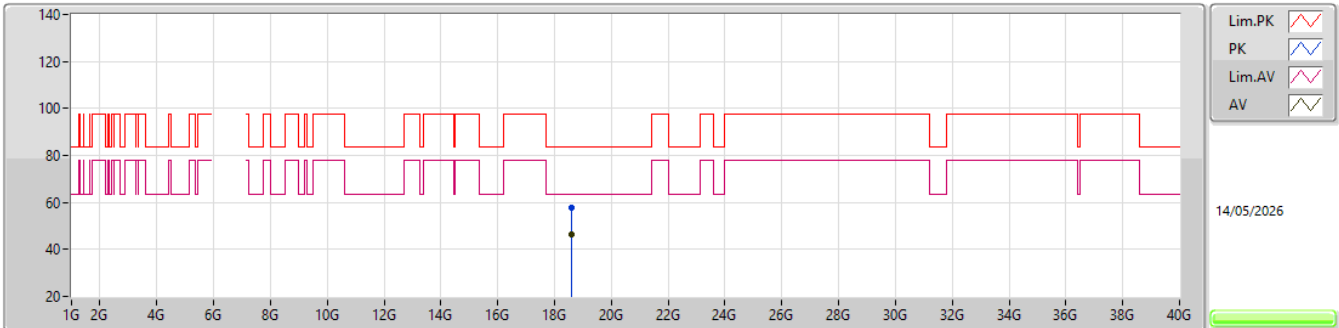


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58794G	57.72	83.54	-25.82	52.98	1	Horizontal	317	1.71	-	37.65	15.74	48.65			
AV	18.58781G	46.57	63.54	-16.97	41.83	1	Horizontal	317	1.71	-	37.65	15.74	48.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

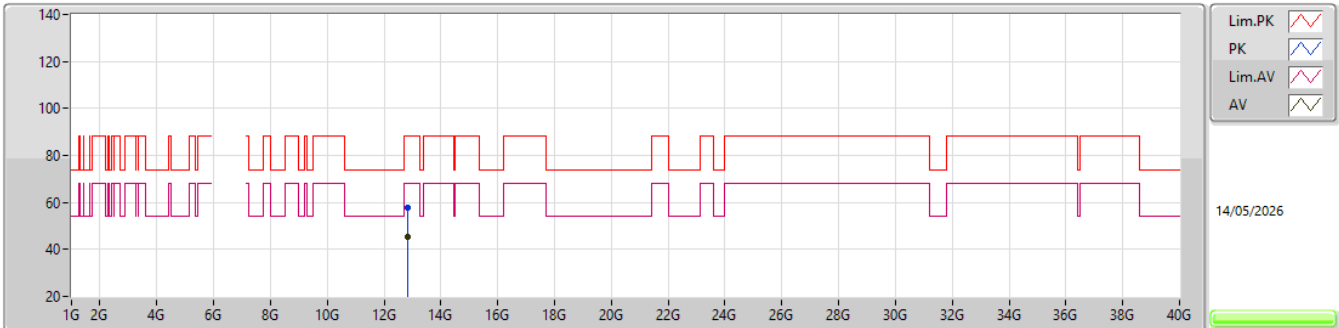


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81689G	57.92	88.20	-30.28	41.85	3	Vertical	55	2.39	-	39.43	11.60	34.96			
RMS	12.81836G	45.52	68.20	-22.68	29.44	3	Vertical	55	2.39	-	39.44	11.60	34.96			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

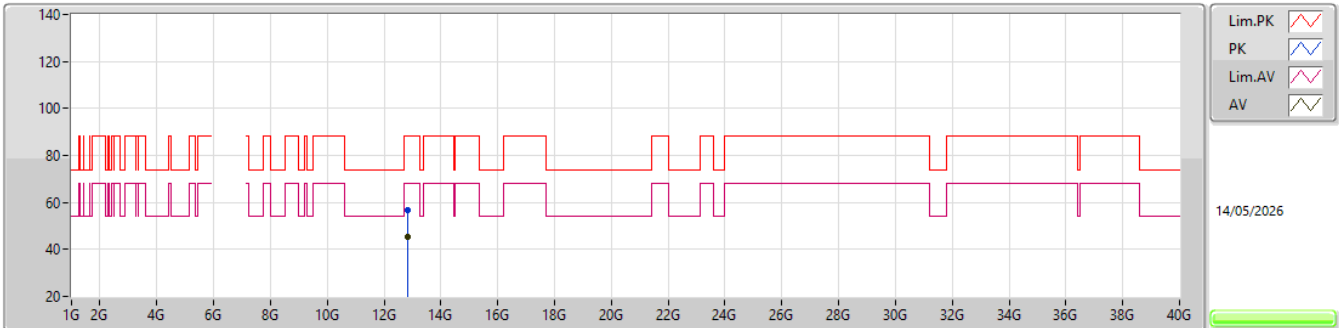


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83594G	56.64	88.20	-31.56	40.52	3	Horizontal	1	1.68	-	39.47	11.61	34.96			
RMS	12.81578G	45.54	68.20	-22.66	29.47	3	Horizontal	1	1.68	-	39.43	11.60	34.96			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

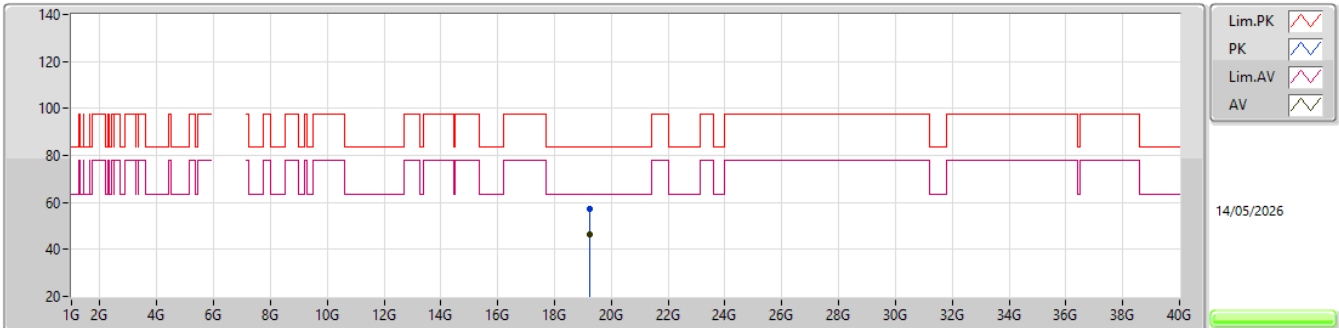


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2478G	57.45	83.54	-26.09	52.36	1	Vertical	325	2.00	-	37.89	16.05	48.85			
AV	19.24293G	46.38	63.54	-17.16	41.33	1	Vertical	325	2.00	-	37.86	16.04	48.85			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

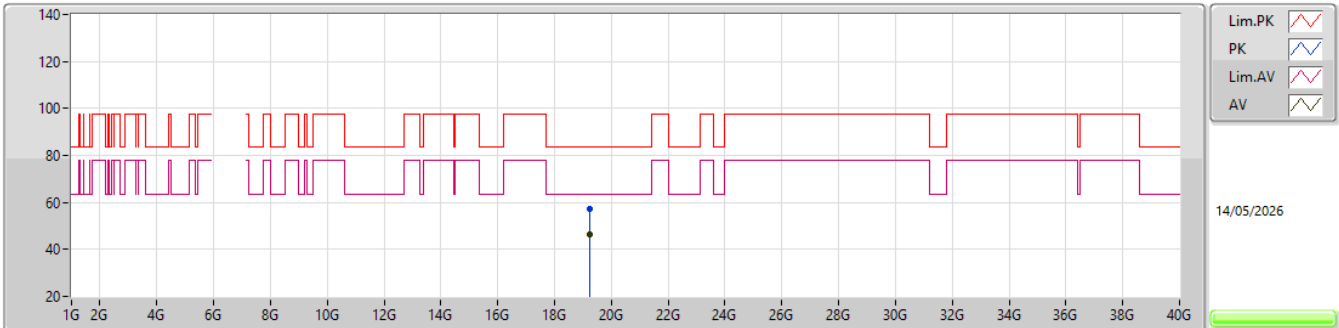


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24332G	57.39	83.54	-26.15	52.34	1	Horizontal	173	1.38	-	37.86	16.04	48.85			
AV	19.24178G	46.30	63.54	-17.24	41.26	1	Horizontal	173	1.38	-	37.85	16.04	48.85			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

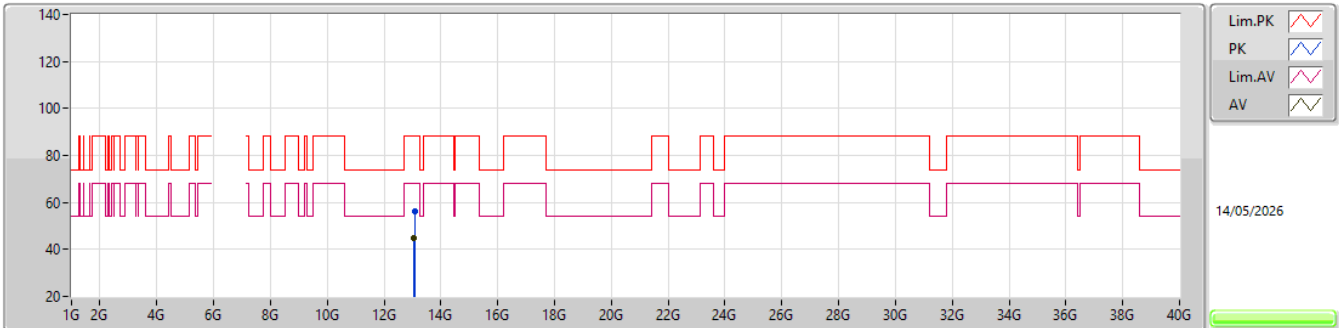


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06976G	55.98	88.20	-32.22	39.87	3	Vertical	79	1.71	-	39.30	11.75	34.94			
RMS	13.05653G	45.07	68.20	-23.13	28.96	3	Vertical	79	1.71	-	39.30	11.75	34.94			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

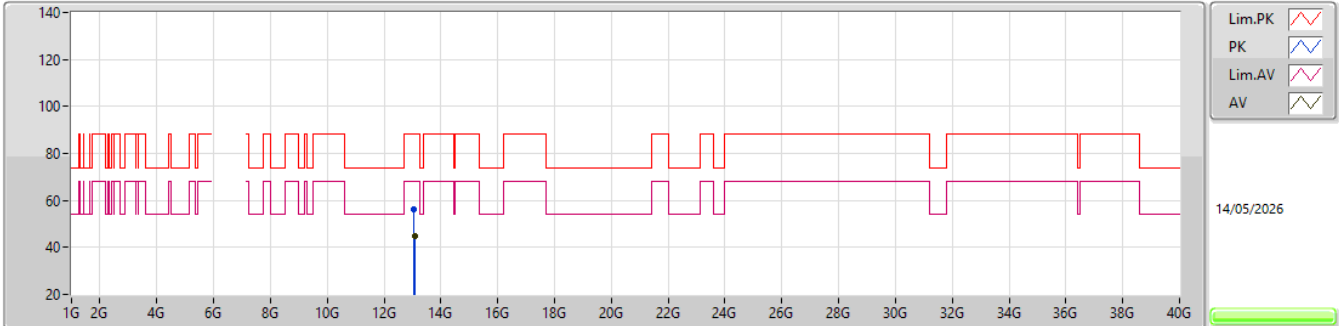


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05716G	56.17	88.20	-32.03	40.06	3	Horizontal	11	2.55	-	39.30	11.75	34.94			
RMS	13.07216G	45.05	68.20	-23.15	28.94	3	Horizontal	11	2.55	-	39.30	11.75	34.94			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

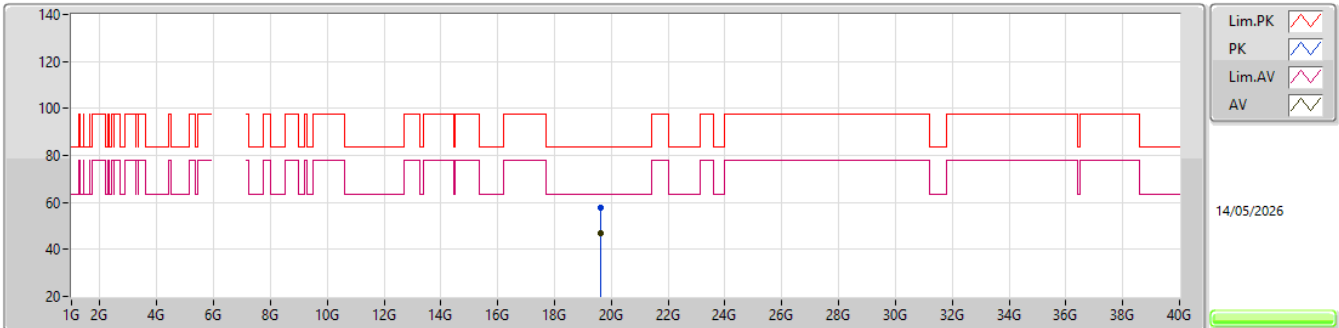


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60347G	57.96	83.54	-25.58	53.01	1	Vertical	356	1.99	-	37.59	16.20	48.84			
AV	19.6036G	46.92	63.54	-16.62	41.97	1	Vertical	356	1.99	-	37.59	16.20	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

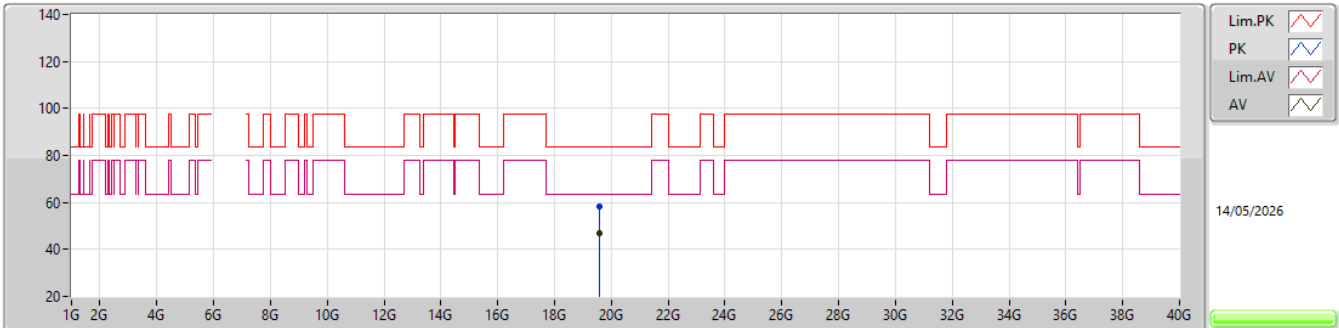


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60238G	58.13	83.54	-25.41	53.17	1	Horizontal	128	2.08	-	37.60	16.20	48.84			
AV	19.60149G	46.95	63.54	-16.59	41.99	1	Horizontal	128	2.08	-	37.60	16.20	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

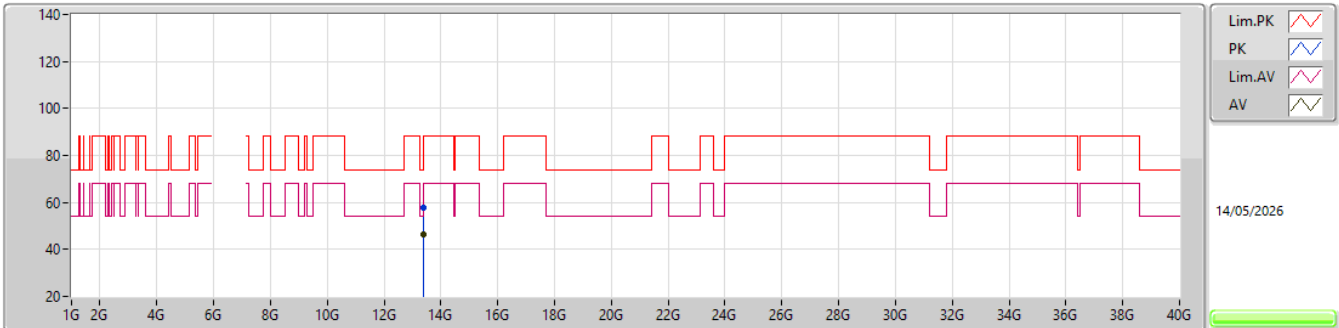


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.40146G	57.80	88.20	-30.40	40.52	3	Vertical	159	2.36	-	40.10	11.96	34.78			
RMS	13.40011G	46.56	68.20	-21.64	29.28	3	Vertical	159	2.36	-	40.10	11.96	34.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

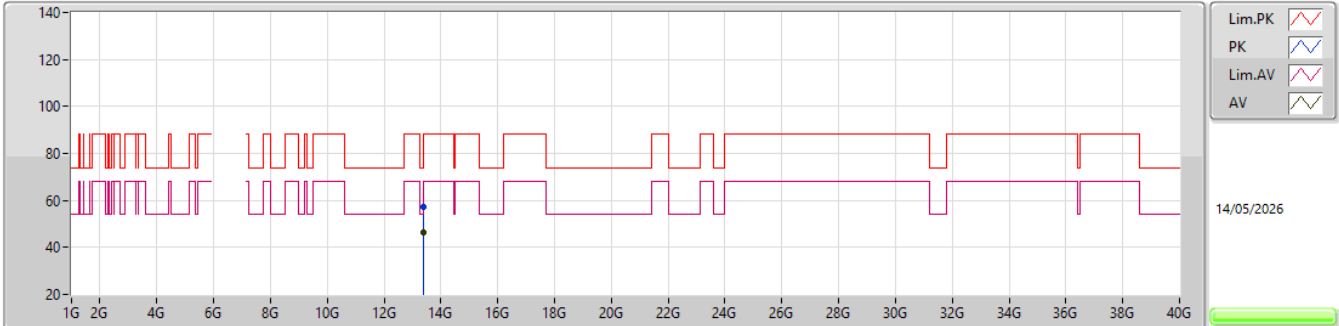


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4038G	57.20	88.20	-31.00	39.92	3	Horizontal	58	2.19	-	40.10	11.96	34.78			
RMS	13.3879G	46.54	54.00	-7.46	29.29	3	Horizontal	58	2.19	-	40.08	11.95	34.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

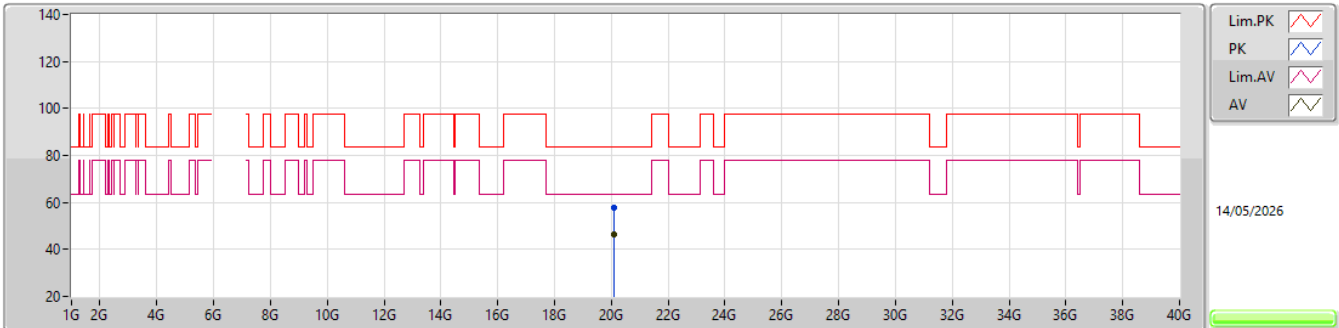


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08203G	57.63	83.54	-25.91	52.94	1	Vertical	134	1.60	-	37.26	16.41	48.98			
AV	20.08312G	46.44	63.54	-17.10	41.74	1	Vertical	134	1.60	-	37.27	16.41	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

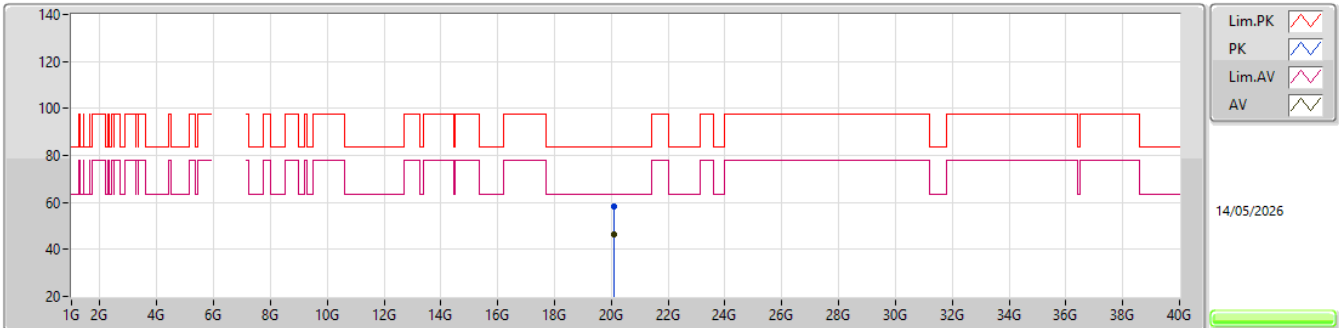


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08028G	58.53	83.54	-25.01	53.84	1	Horizontal	35	1.87	-	37.26	16.41	48.98			
AV	20.08722G	46.45	63.54	-17.09	41.75	1	Horizontal	35	1.87	-	37.27	16.41	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

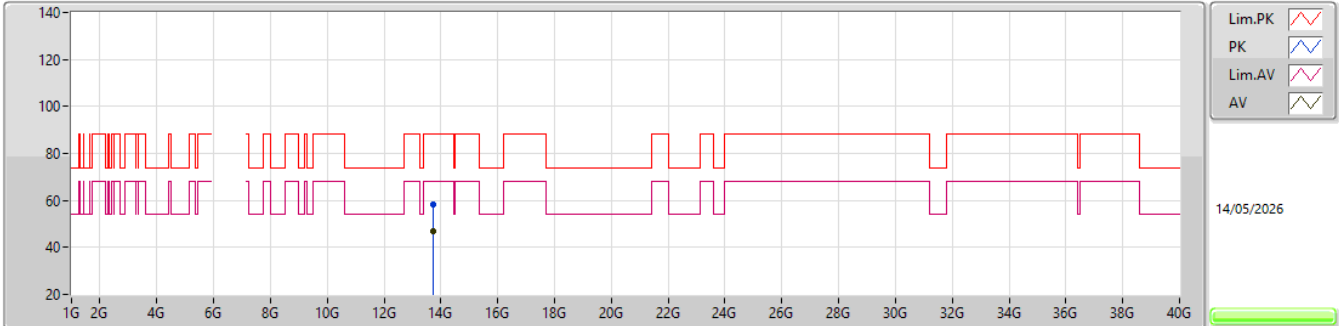


EUT Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7151G	58.53	88.20	-29.67	40.90	3	Vertical	119	2.40	-	40.20	12.15	34.72			
RMS	13.71114G	46.92	68.20	-21.28	29.29	3	Vertical	119	2.40	-	40.20	12.15	34.72			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

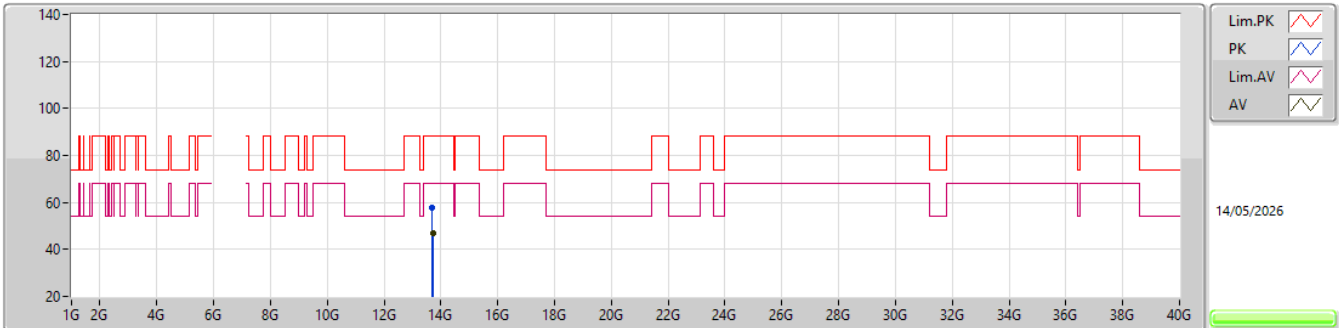


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70496G	57.92	88.20	-30.28	40.29	3	Horizontal	322	2.63	-	40.20	12.15	34.72			
RMS	13.72059G	46.96	68.20	-21.24	29.32	3	Horizontal	322	2.63	-	40.20	12.16	34.72			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

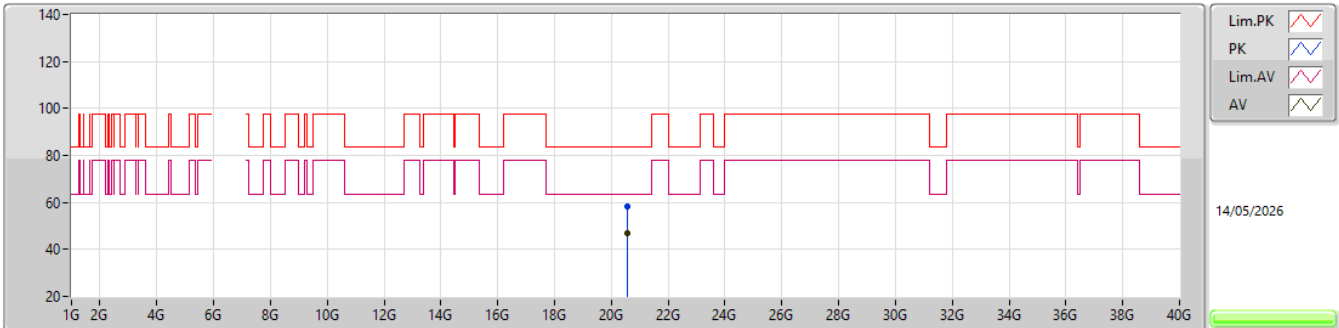


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.567G	58.05	83.54	-25.49	52.74	1	Vertical	286	1.61	-	37.57	16.64	48.90			
AV	20.56755G	46.89	63.54	-16.65	41.58	1	Vertical	286	1.61	-	37.57	16.64	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

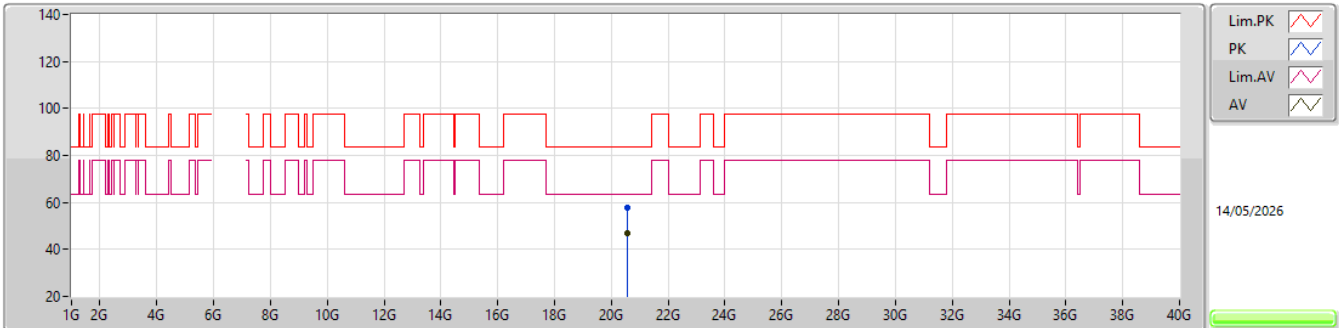


EUT_Y_2TX
Setting 80
05-U-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.56916G	57.95	83.54	-25.59	52.63	1	Horizontal	27	1.90	-	37.58	16.64	48.90			
AV	20.56645G	46.65	63.54	-16.89	41.34	1	Horizontal	27	1.90	-	37.57	16.64	48.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

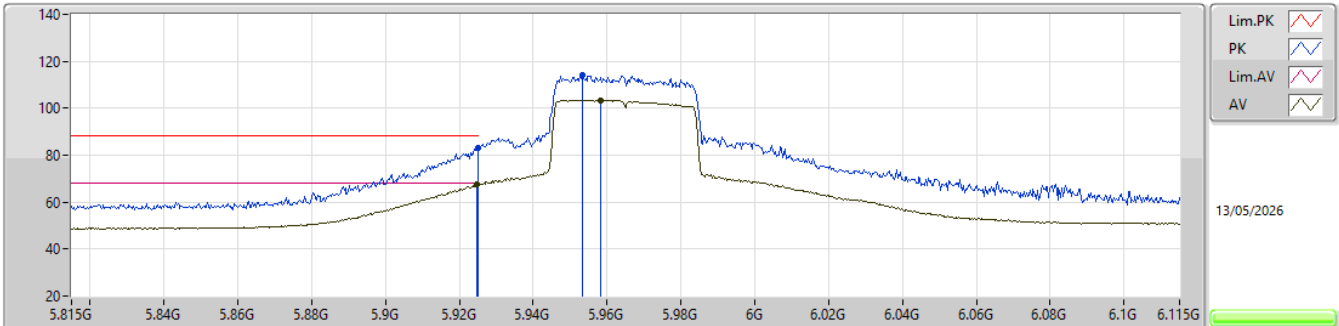


EUT V_2TX
Setting 70
05-X-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	82.97	88.20	-5.23	74.66	3	Vertical	357	1.80	-	34.15	8.94	34.78			
RMS	5.9248G	67.51	68.20	-0.69	59.20	3	Vertical	357	1.80	-	34.15	8.94	34.78			
PK	5.9533G	114.16	Inf	-Inf	105.74	3	Vertical	357	1.80	-	34.20	8.98	34.76			
RMS	5.9584G	103.38	Inf	-Inf	94.96	3	Vertical	357	1.80	-	34.20	8.98	34.76			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

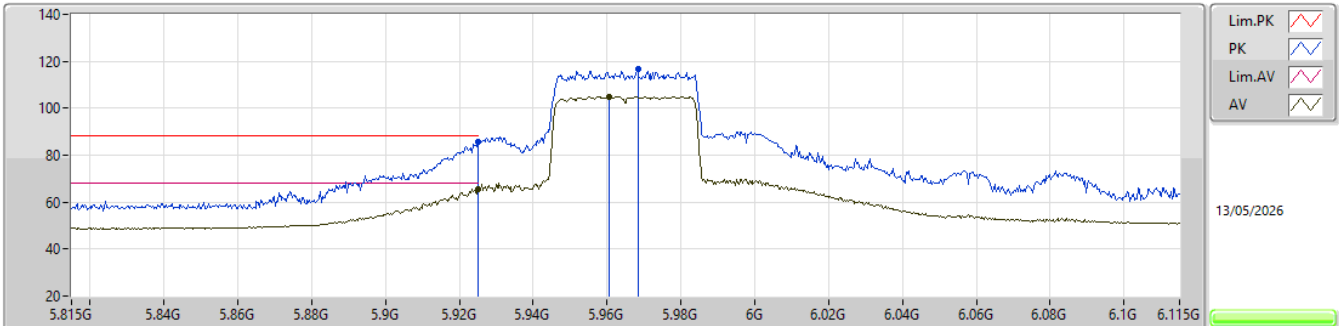

EUT Y_2TX
Setting 70
05-X-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.925G	85.74	88.20	-2.46	77.43	3	Horizontal	4	1.80	-	34.15	8.94	34.78				
RMS	5.925G	65.66	68.20	-2.54	57.35	3	Horizontal	4	1.80	-	34.15	8.94	34.78				
PK	5.9683G	116.68	Inf	-Inf	108.25	3	Horizontal	4	1.80	-	34.20	8.99	34.76				
RMS	5.9605G	104.95	Inf	-Inf	96.53	3	Horizontal	4	1.80	-	34.20	8.98	34.76				