

TEST REPORT

Report Number: 21121291HKG-001

Permissive Change Class Two Application of 47 CFR Part 15 Equipment

Permissive Change Class Two Application of RSS-247 Issue 2 Equipment

FCC ID: 2AHBW6IENA

IC: 21121-6IENA

Prepared and Checked by:

Approved by:

Signed On File
Wong Cheuk Ho, Herbert
Lead Engineer

Wong Kwok Yeung, Kenneth
Assistant Supervisor
Date: March 15, 2022

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Applicant Name:	Warmup PLC
Applicant Address:	704 Tudor Estate, Abbey Road, London, NW10 7UW, United Kingdom
FCC Specification Standard:	FCC Part 15, October 1, 2020 Edition
FCC ID:	2AHBW6IENA
FCC Model(s):	6iE-03-XX-YY-ZZ, 6iE-04-XX-YY-ZZ, 0804-0404-XX-YY
IC Specification Standard:	RSS-247 Issue 2, February 2017 RSS-Gen Issue 5 Amendment 1, March 2019
IC:	21121-6IENA
PMN:	6iE-04-CW-LC, 6iE-03-CW-LC, 0804-0404-TB, 0804-0404-TW
HVIN:	6iE-04-CW-LC, 6iE-03-CW-LC, 0804-0404-TB, 0804-0404-TW
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	Programmable WIFI Thermostat with/without GFCI
Serial Number:	SR0128121
Sample Receipt Date:	February 22, 2022
Date of Test:	March 01, 2022 to March 15, 2022
Report Date:	March 15, 2022
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification.

TEST REPORT

TABLE OF CONTENTS

1.0	TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
	1.1 Summary of Test Results.....	4
	1.2 Statement of Compliance.....	4
2.0	GENERAL DESCRIPTION.....	5
	2.1 Product Description	5
	2.2 Test Methodology	6
	2.3 Test Facility	6
	2.4 Purpose of Change	6
3.0	SYSTEM TEST CONFIGURATION.....	7
	3.1 Justification	7
	3.2 EUT Exercising Software.....	8
	3.3 Details of EUT and Description of Accessories.....	9
	3.4 Measurement Uncertainty	9
4.0	TEST RESULTS	10
	4.1 Maximum Conducted Output Power at Antenna Terminals	10
	4.2 Minimum 6dB RF Bandwidth.....	12
	4.3 Maximum Power Spectral Density	21
	4.4 Out of Band Conducted Emissions	30
	4.5 Field Strength Calculation.....	51
	4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....	52
	4.6.1 Radiated Emission Configuration Photograph	52
	4.6.2 Radiated Emission Data	52
	4.6.3 Radiated Emission Test Setup.....	66
	4.6.4 Transmitter Duty Cycle Calculation	67
	4.7 AC Power Line Conducted Emission	68
	4.7.1 AC Power Line Conducted Emission Configuration Photograph	68
	4.7.2 AC Power Line Conducted Emission Data	68
	4.7.3 Conducted Emission Test Setup	71
5.0	EQUIPMENT LIST	72

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details See Section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density (average)	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2020 Edition
RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 Amendment 1, March 2019

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) 6iE is a Wi-Fi enabled thermostat designed to provide timed regulation of electric underfloor heating systems. The EUT is powered by 110-240VAC.

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels and 2422MHz to 2452MHz with 9 channels.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 150Mbps.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

For FCC, all the models in the series 6iE-03-CW-LC and 6iE-04-CW-LC are declared to be identical in hardware aspect and RF circuitry parameter. The series 6iE-03-CW-LC and 6iE-04-CW-LC means: where -03 means non-GFCl, -04 means GFCl, XX means Lens/Housing Color, YY means decorative band colour, and ZZ means packaging version. The difference in model number serves as marketing strategy as declared by client.

All the models in the series 0804-0404-TW are declared to be identical in hardware aspect. The series 0804-0404-TB means: where XX means Lens/Housing Color and YY means packaging version. The difference in model number serves as marketing strategy as declared by client.

For IC: the models 6iE-03-CW-LC, 0804-0404-TB, 0804-0404-TW are the same as the model 6iE-04-CW-LC in hardware aspect. The difference in model number serves as marketing strategy as declared by client.

The representative model 6iE-04-CW-LC was selected to test.

The circuit description is saved with filename: descri.pdf.

TEST REPORT

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 1, March 2019.

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, Conformity Assessment Body Identifier (CABID) of test facility: HKAP01.

2.4 Purpose of Change

Purpose of Change is saved with filename: "purpose of change.pdf".

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

TEST REPORT

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (T_{eff}) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst-case data is included in this report.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

The EUT is power by 120VAC

Description of Accessories:

N/A

There are no accessories for compliance of this product.

3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level ($k=2$). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


TEST REPORT

4.0 TEST RESULTS

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 3.71 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	16.4	43.7
Middle Channel: 2437	13.8	24.0
High Channel: 2462	12.8	19.1

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 3.71 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	15.4	34.7
Middle Channel: 2437	13.2	20.9
High Channel: 2462	11.6	14.5

TEST REPORT

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 3.71 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	15.8	38.0
Middle Channel: 2437	13.6	22.9
High Channel: 2462	11.8	15.1

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 3.71 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	15.4	34.7
Middle Channel: 2437	13.2	20.9
High Channel: 2452	11.6	14.5

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)

max. conducted (peak) output level = 16.4 dBm

IEEE 802.11g (OFDM, 9 Mbps)

max. conducted (peak) output level = 15.4 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)

max. conducted (peak) output level = 15.8 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)

max. conducted (peak) output level = 15.4 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

TEST REPORT

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412
Middle Channel:	2437
High Channel:	2462

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412
Middle Channel:	2437
High Channel:	2462

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2412
Middle Channel:	2437
High Channel:	2462

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel:	2422
Middle Channel:	2437
High Channel:	2452

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11b, Lowest Channel

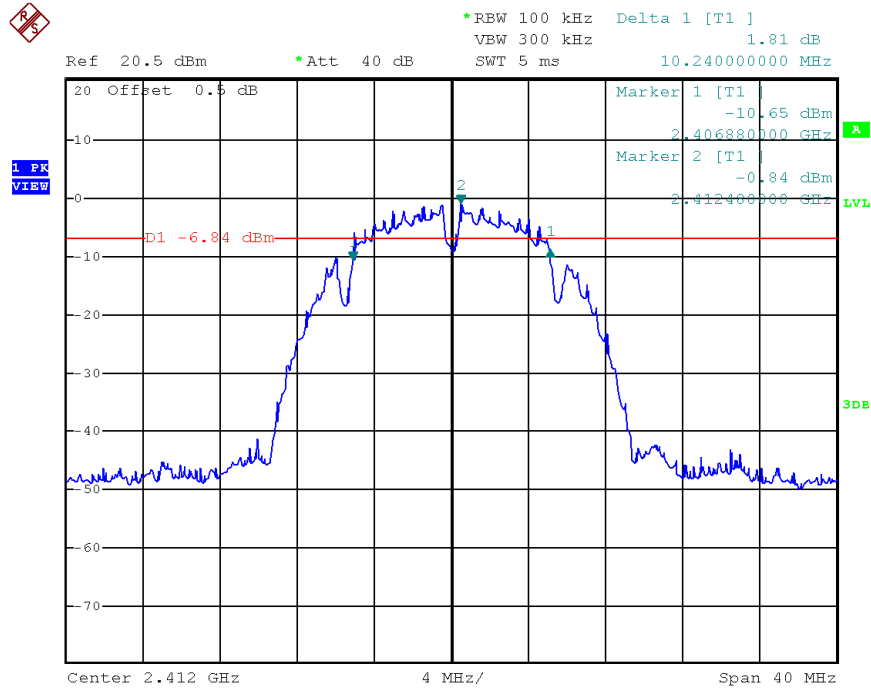


802.11b, Middle Channel

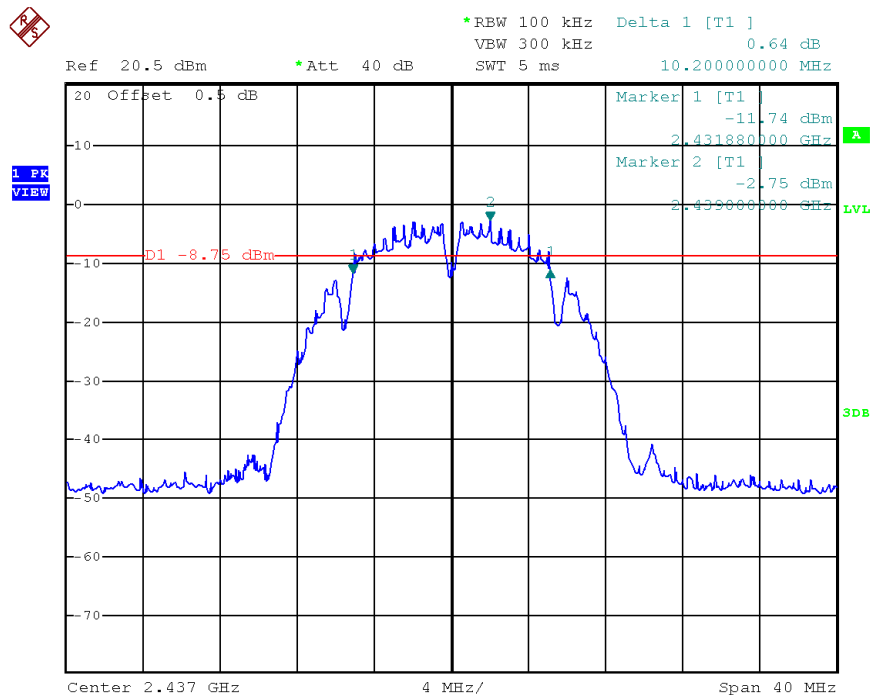

TEST REPORT


PLOTS OF 6dB RF BANDWIDTH
802.11b, Highest Channel

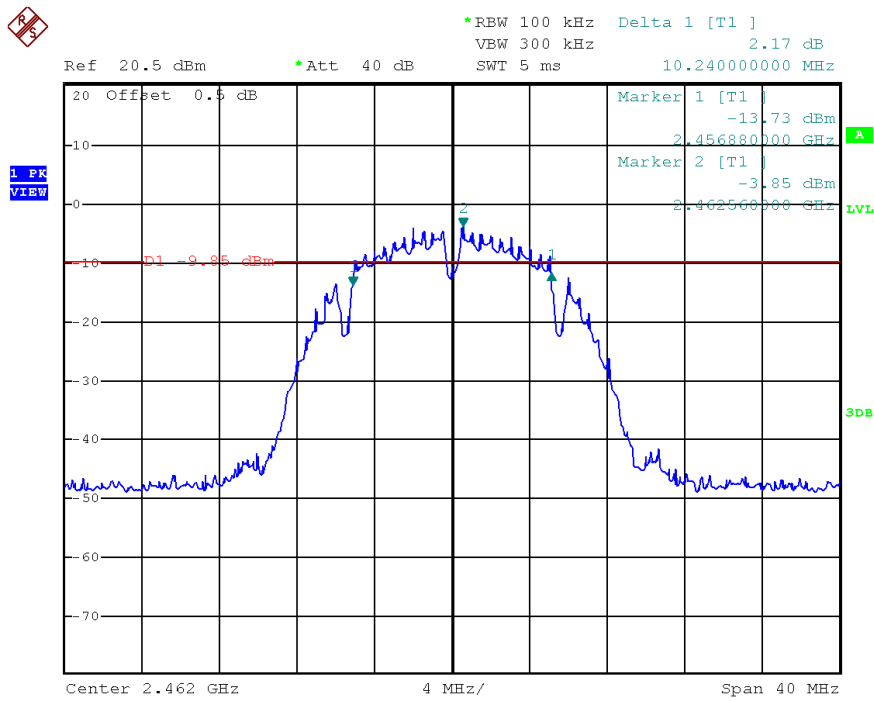


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11g, Lowest Channel

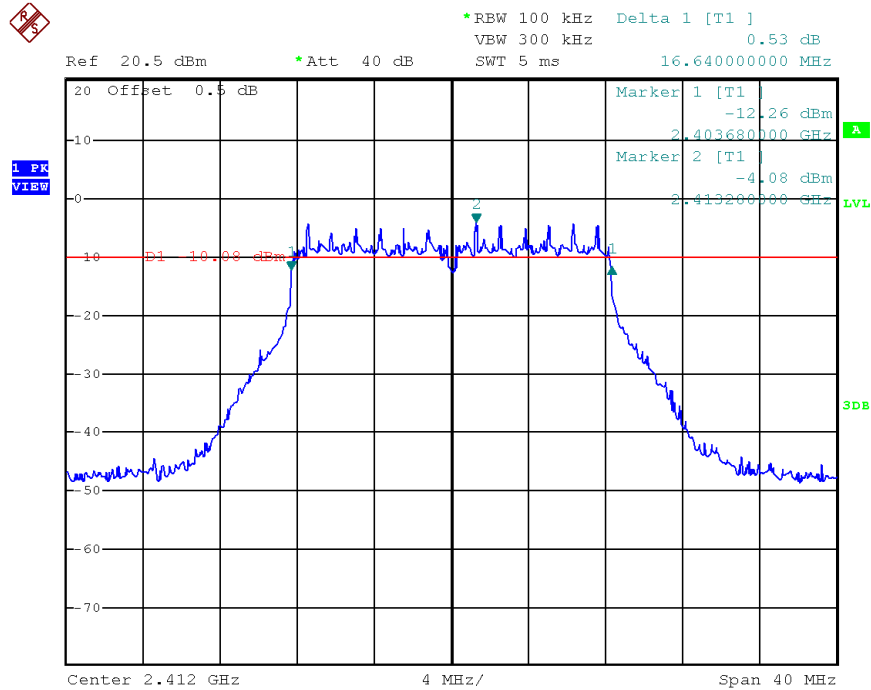


802.11g, Middle Channel

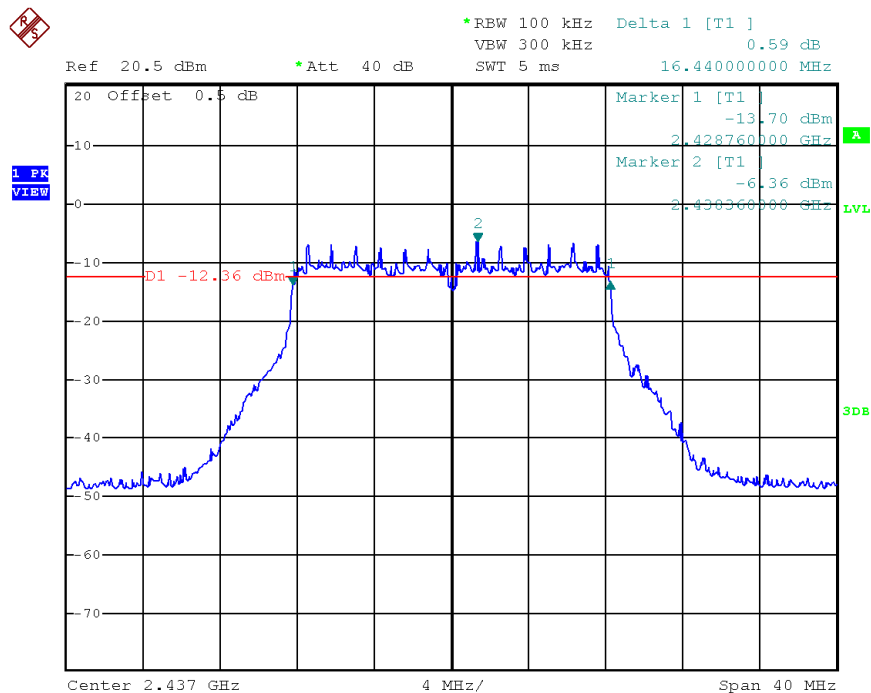

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH


802.11g, Highest Channel

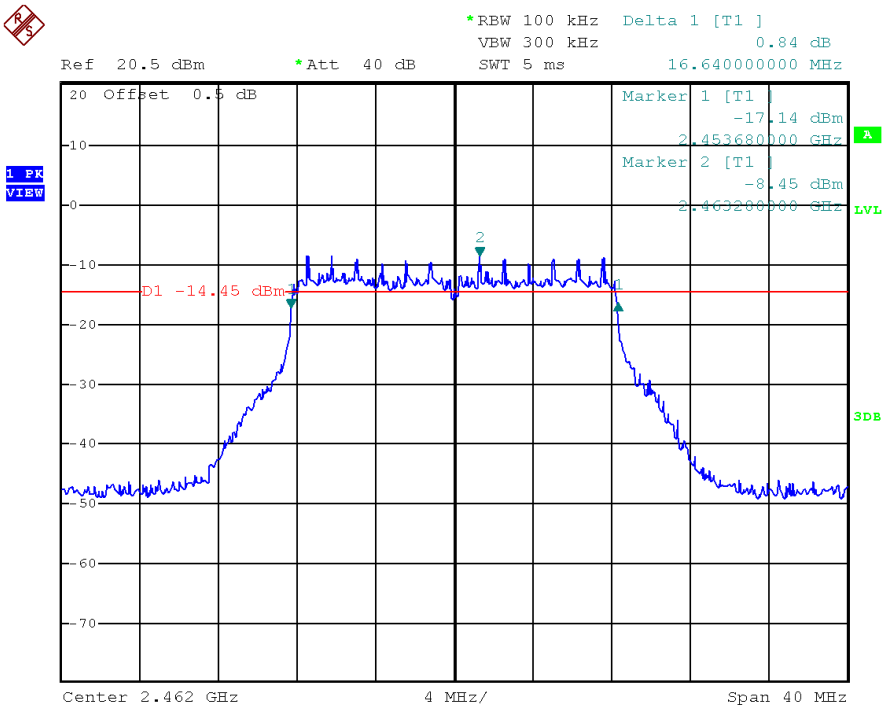


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Lowest Channel

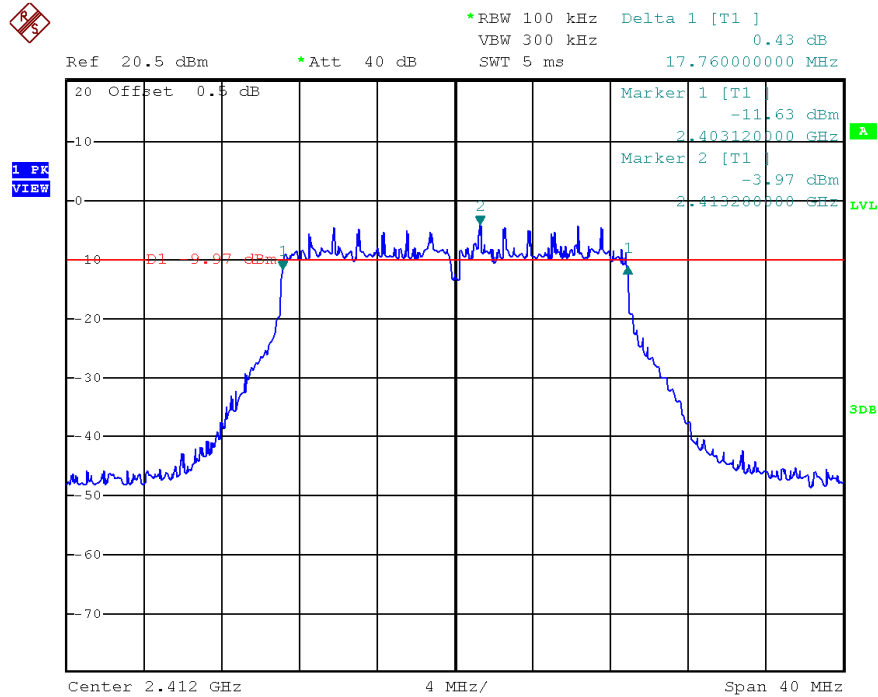


802.11n (20MHz), Middle Channel

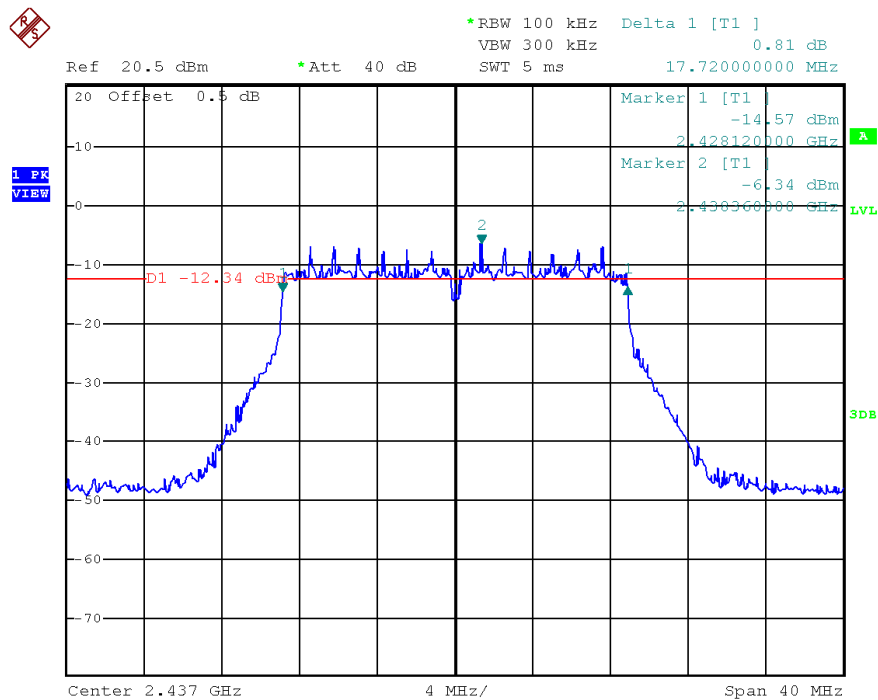

TEST REPORT


PLOTS OF 6dB RF BANDWIDTH
802.11n (20MHz), Highest Channel

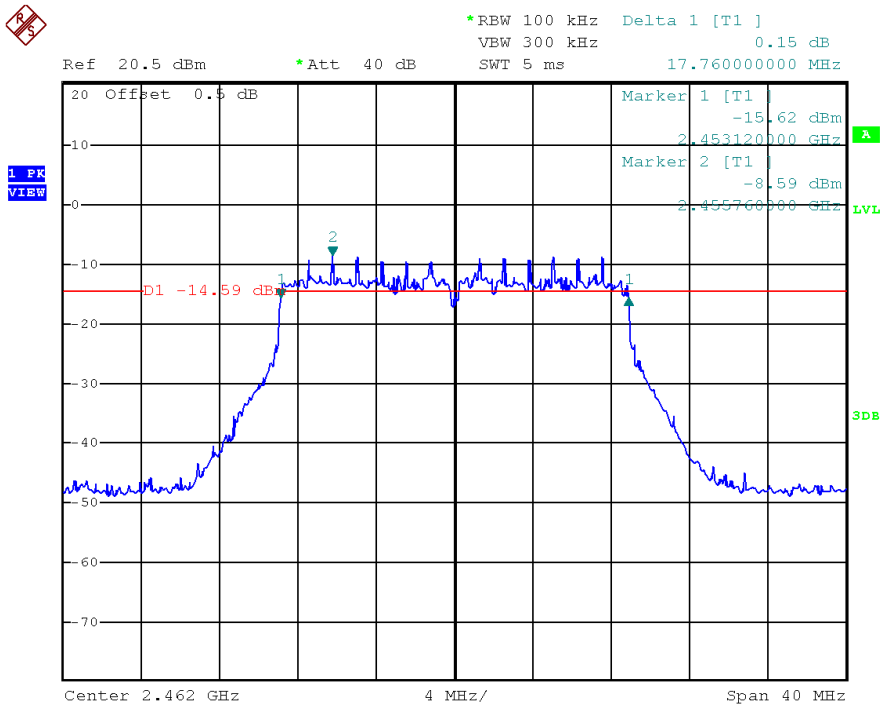


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (40MHz), Lowest Channel

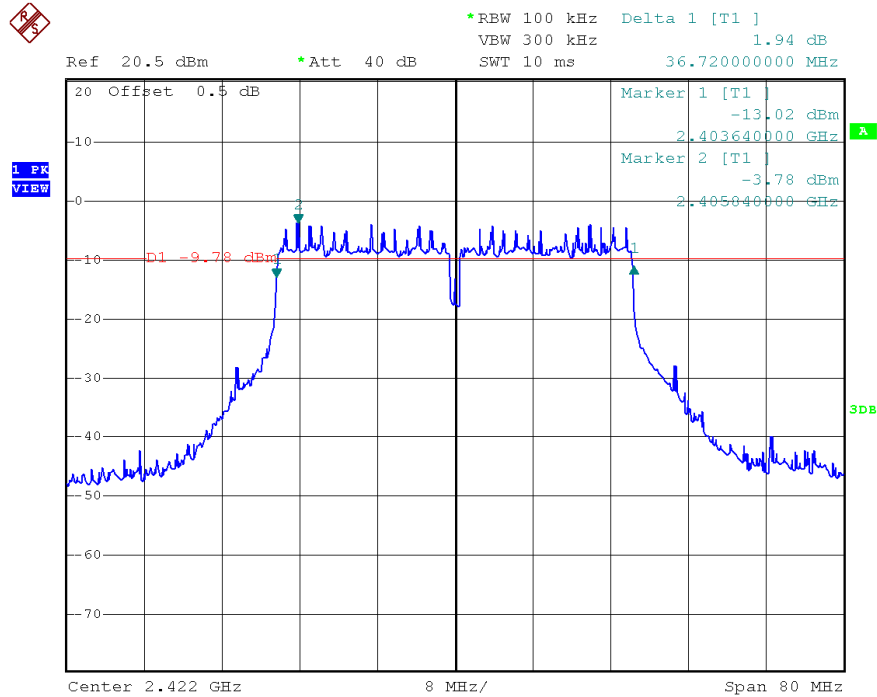


802.11n (40MHz), Middle Channel

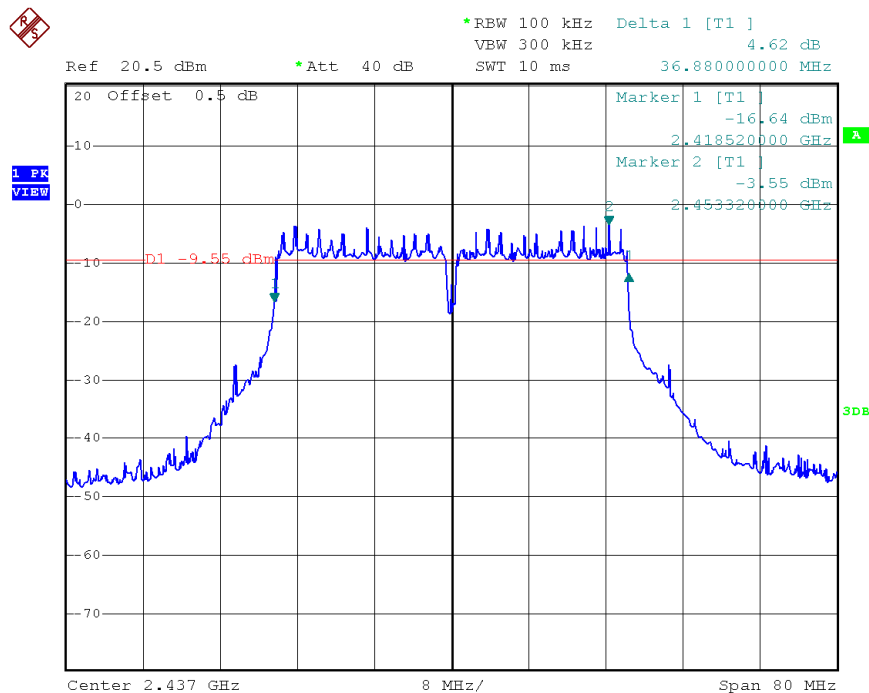

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH
802.11n (40MHz), Highest Channel

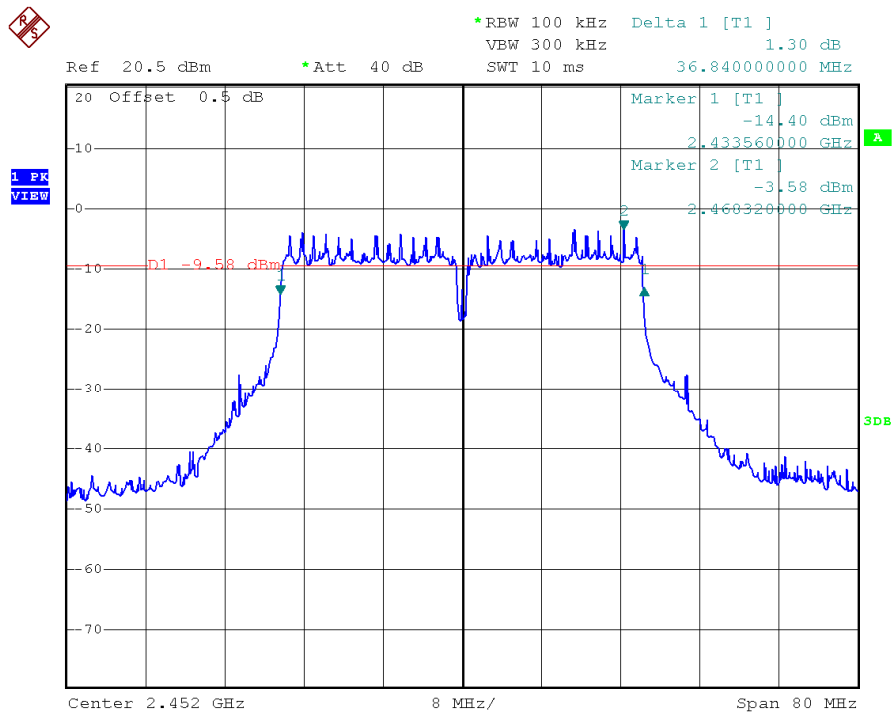

TEST REPORT

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-0.01
Middle Channel:	2437	-2.80
High Channel:	2462	-3.51

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-3.78
Middle Channel:	2437	-6.47
High Channel:	2462	-8.20

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2412	-3.99
Middle Channel:	2437	-6.69
High Channel:	2462	-8.35

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)		PSD in 100kHz (dBm)
Low Channel:	2422	-3.58
Middle Channel:	2437	-3.58
High Channel:	2452	-3.82

Cable Loss: 0.5 dB

Limit:
8dBm


The plots of power spectral density are as below.

.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11b, Lowest channel

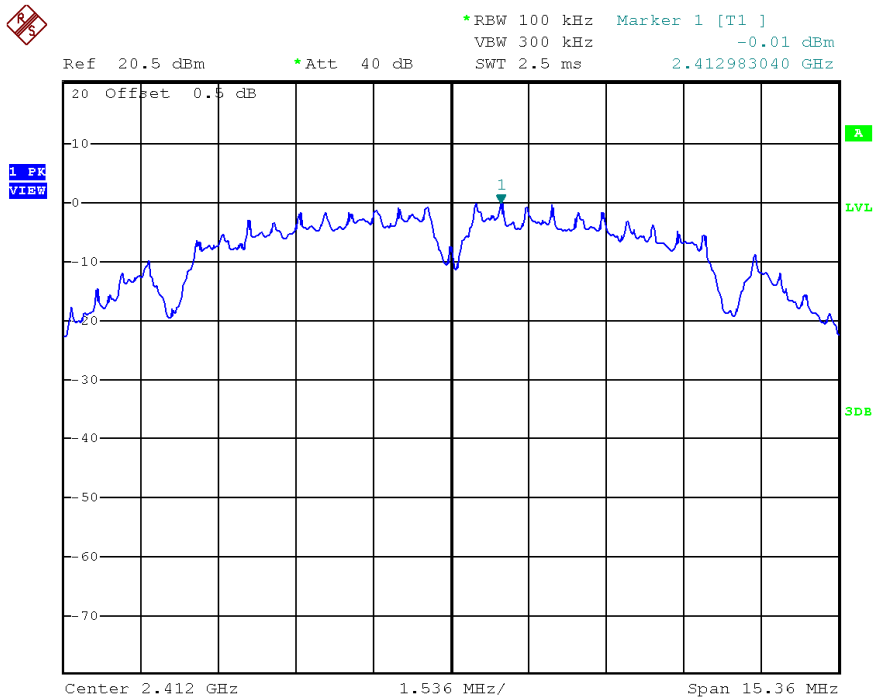


802.11b, Middle channel

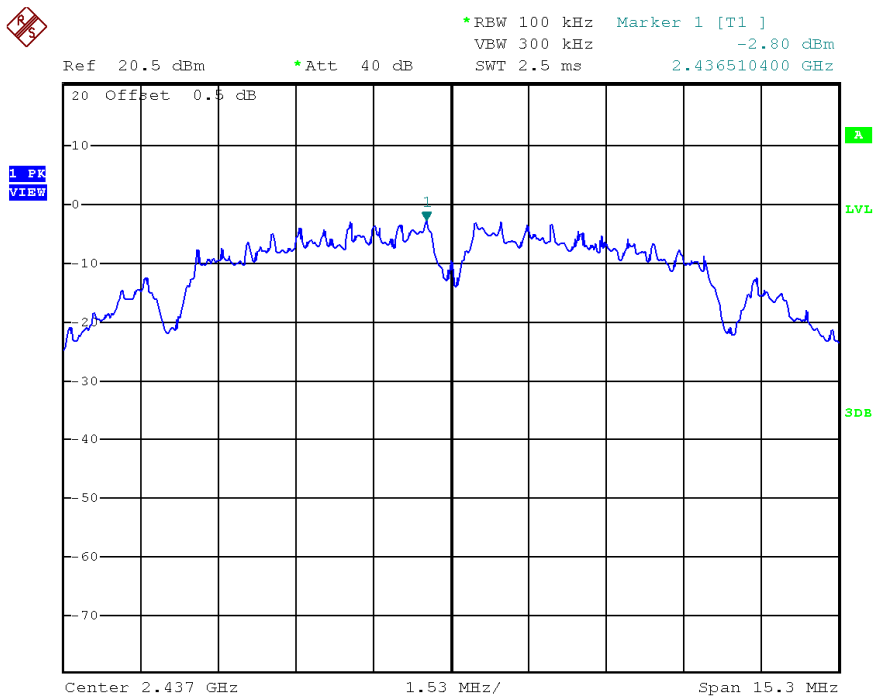

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11b, Highest channel

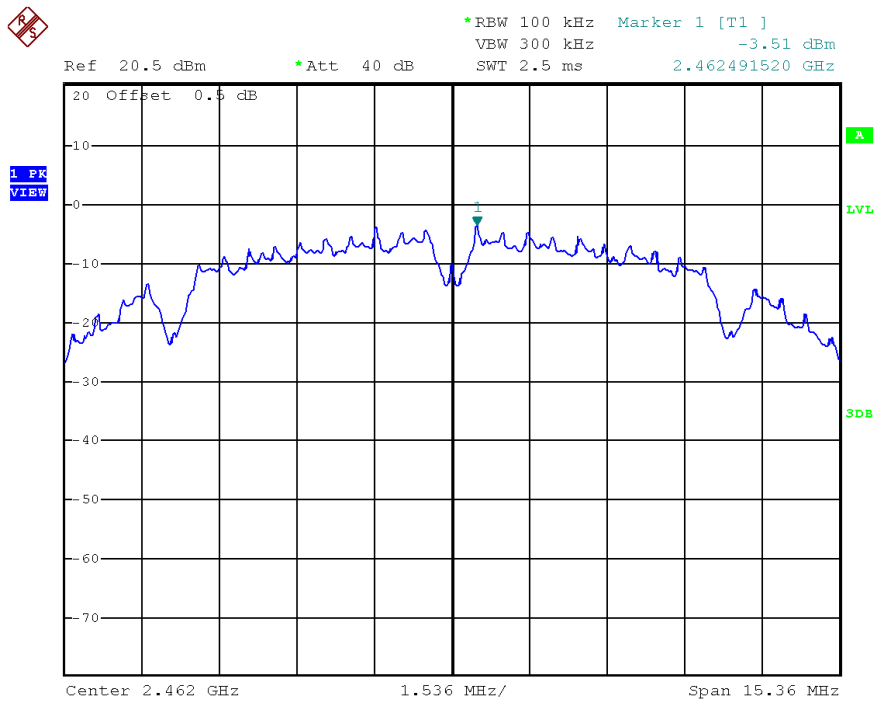


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11g, Lowest channel

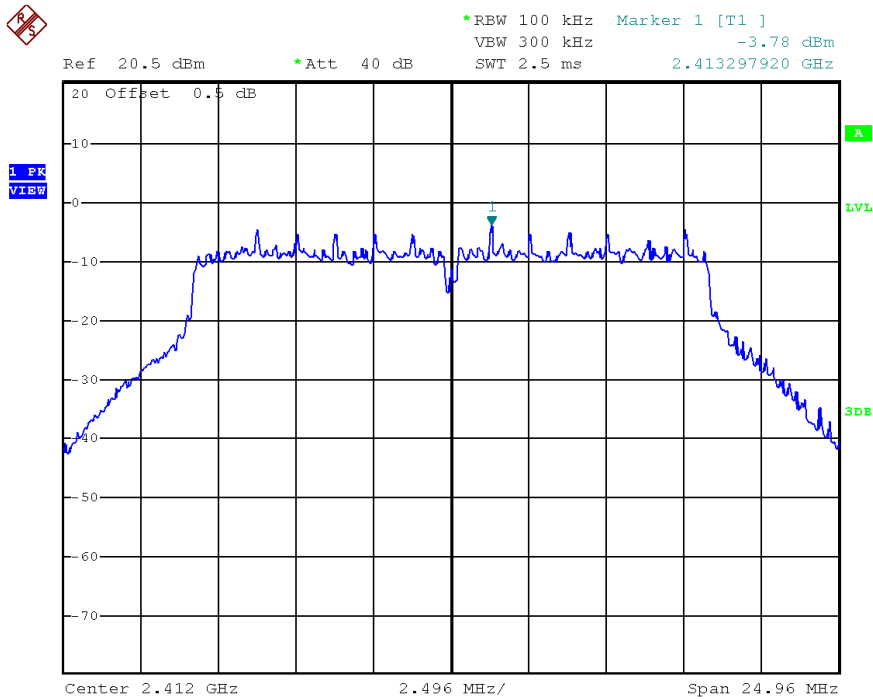


802.11g, Middle channel

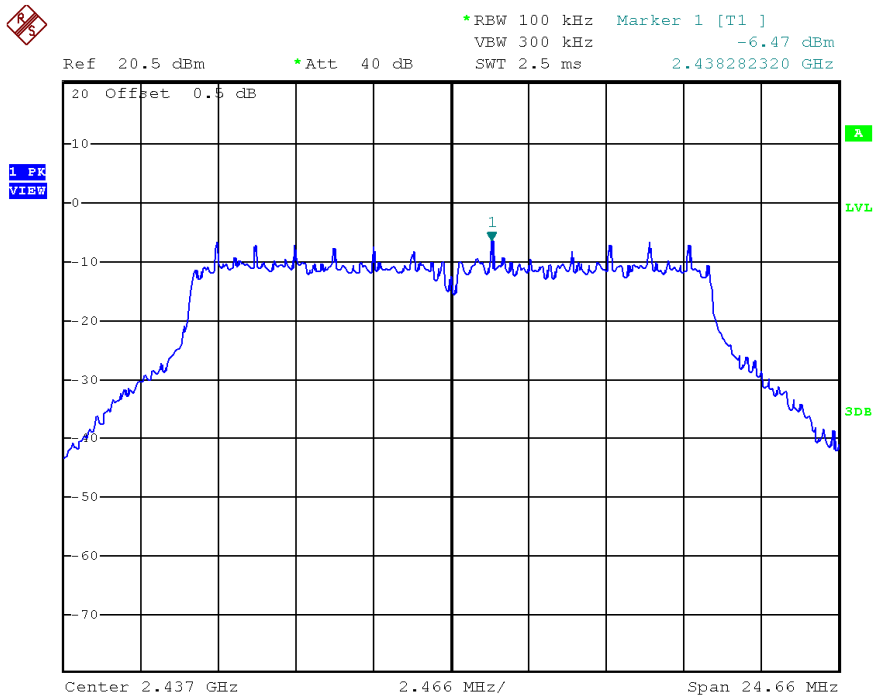

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11g, Highest channel

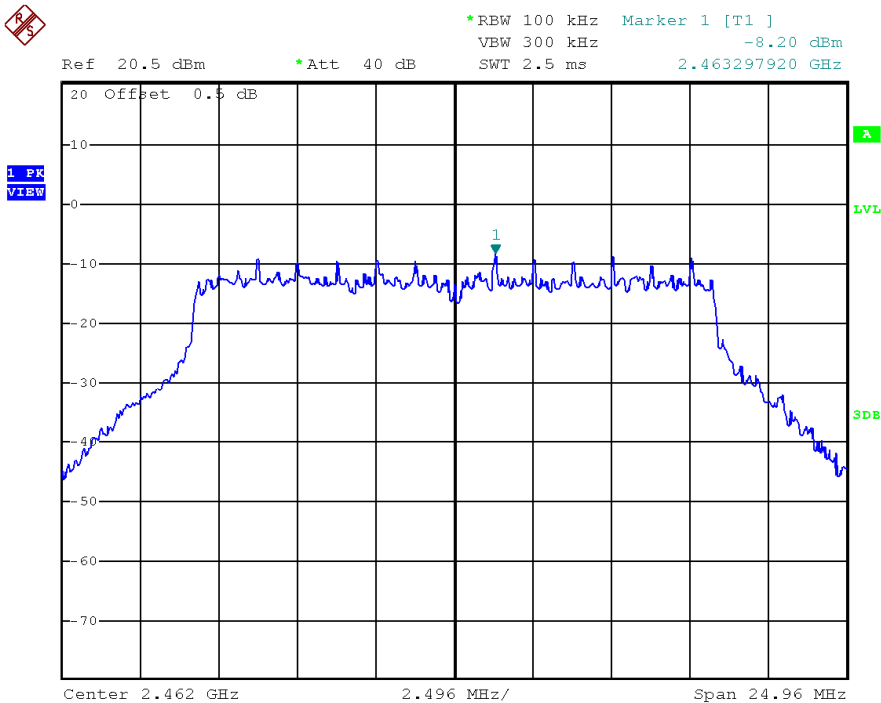


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Lowest channel

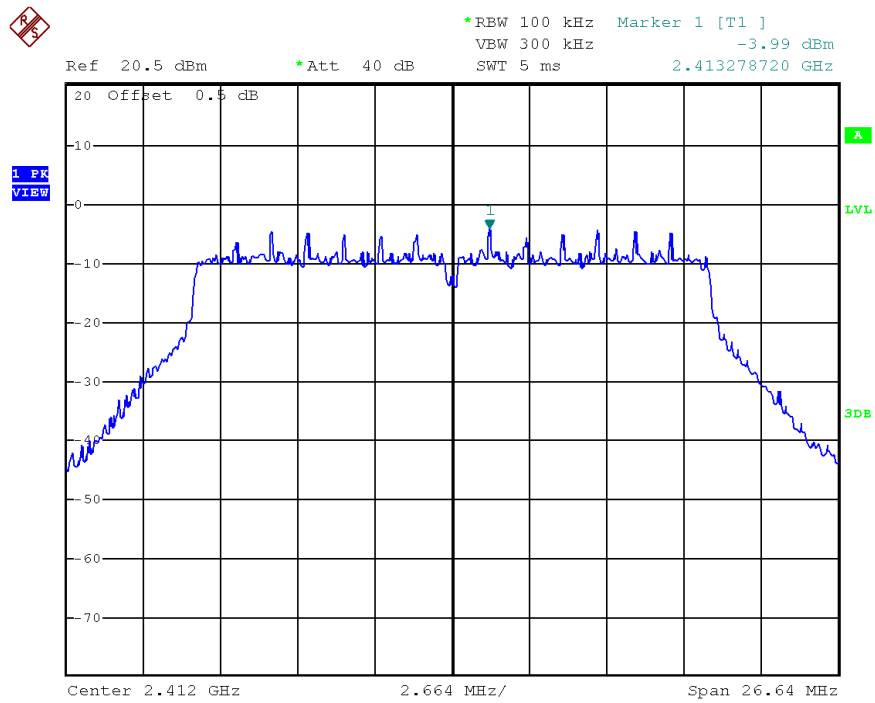


802.11n (20MHz), Middle channel

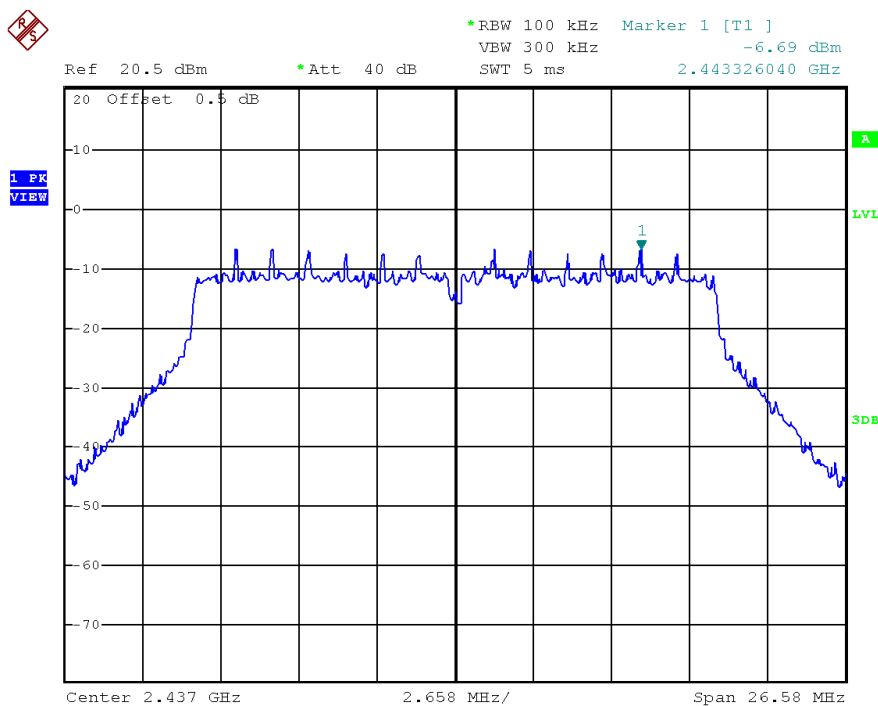

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (20MHz), Highest channel

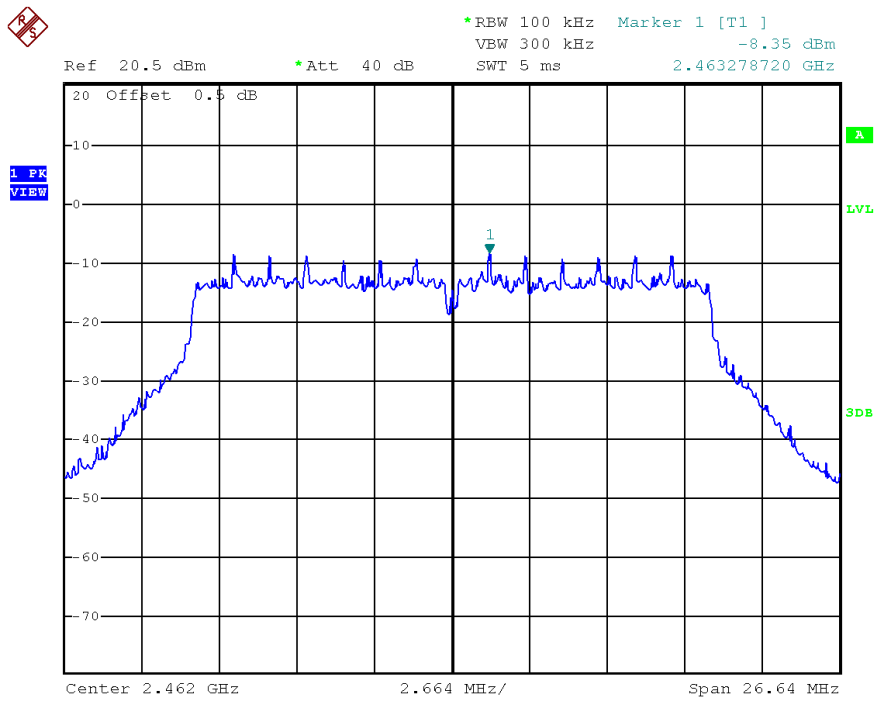


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Lowest channel

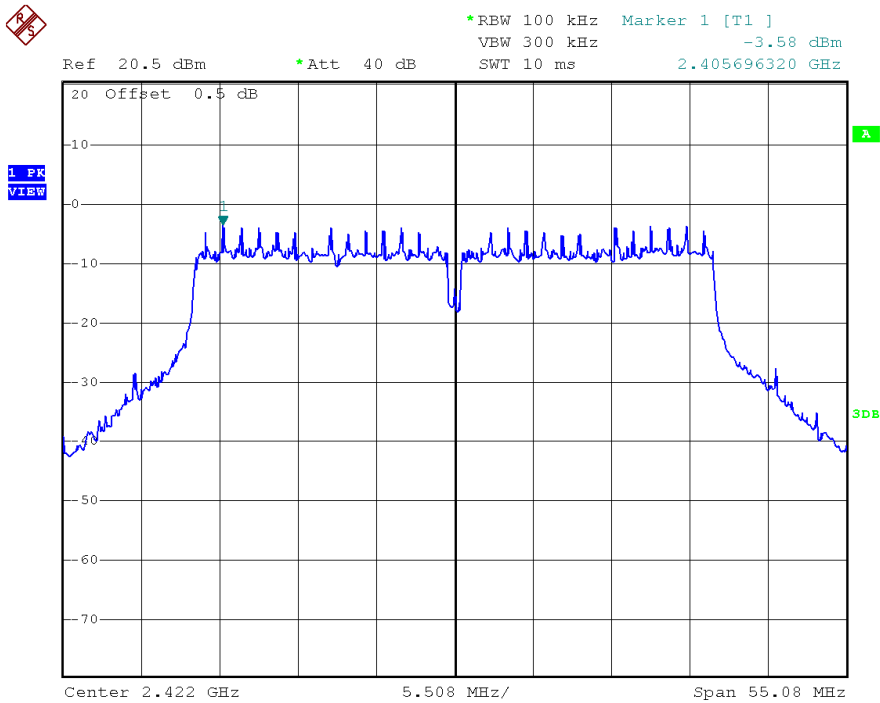


802.11n (40MHz), Middle channel

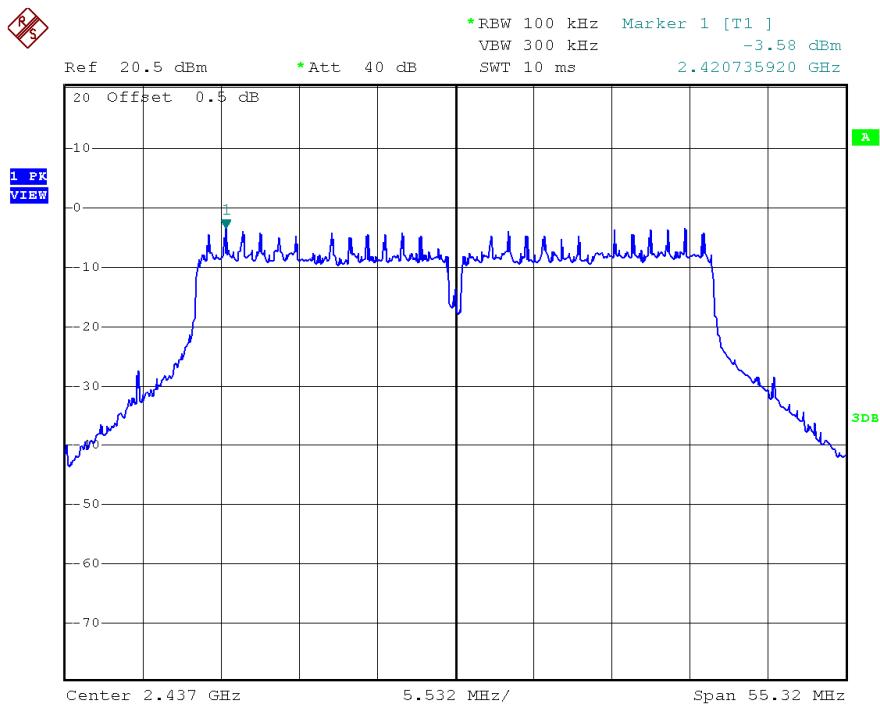

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Highest channel

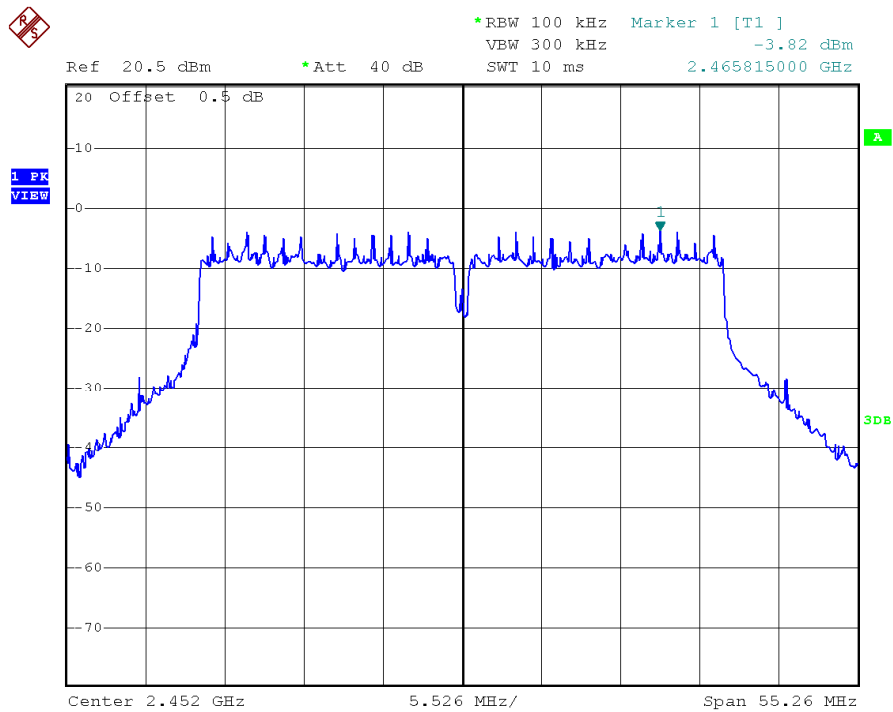

TEST REPORT

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20MHz/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at least 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20MHz/n40MHz.

The measurement procedures under sections 11 of No.558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Bandedge

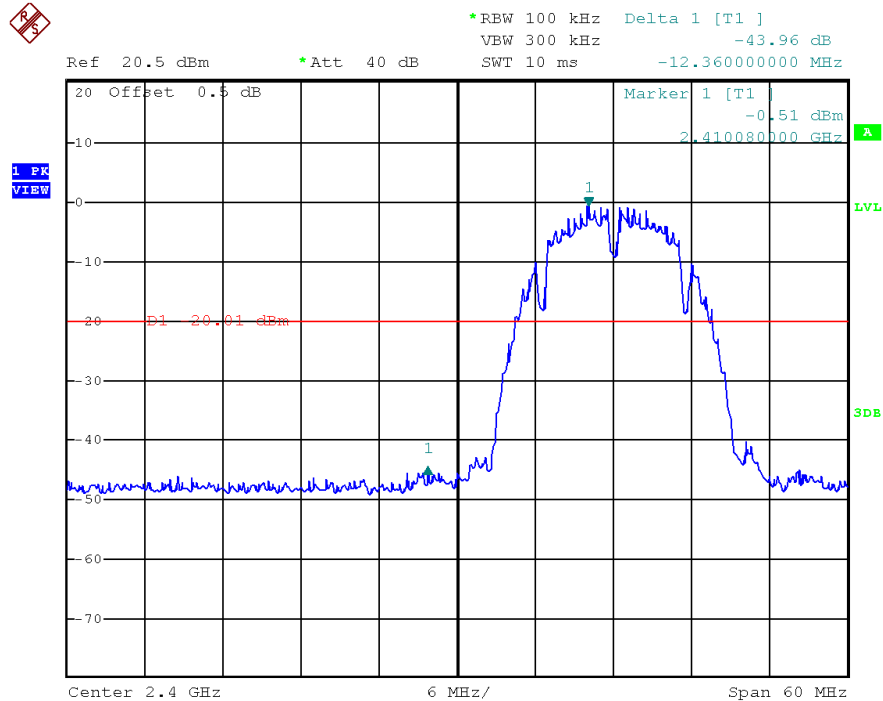


802.11b, Highest Channel, Bandedge

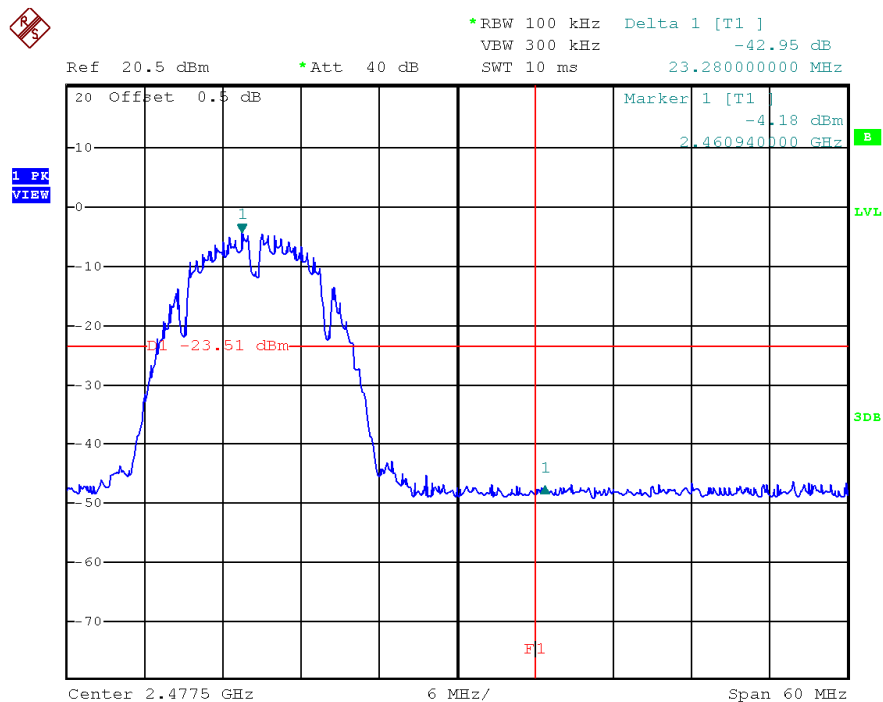


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Plot A

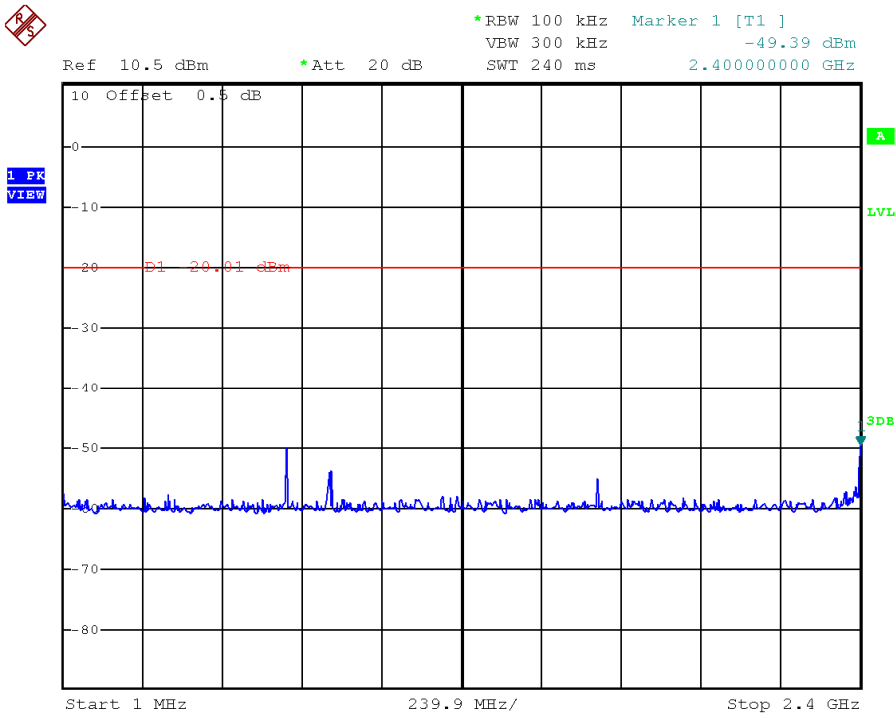


802.11b, Lowest Channel, Plot B

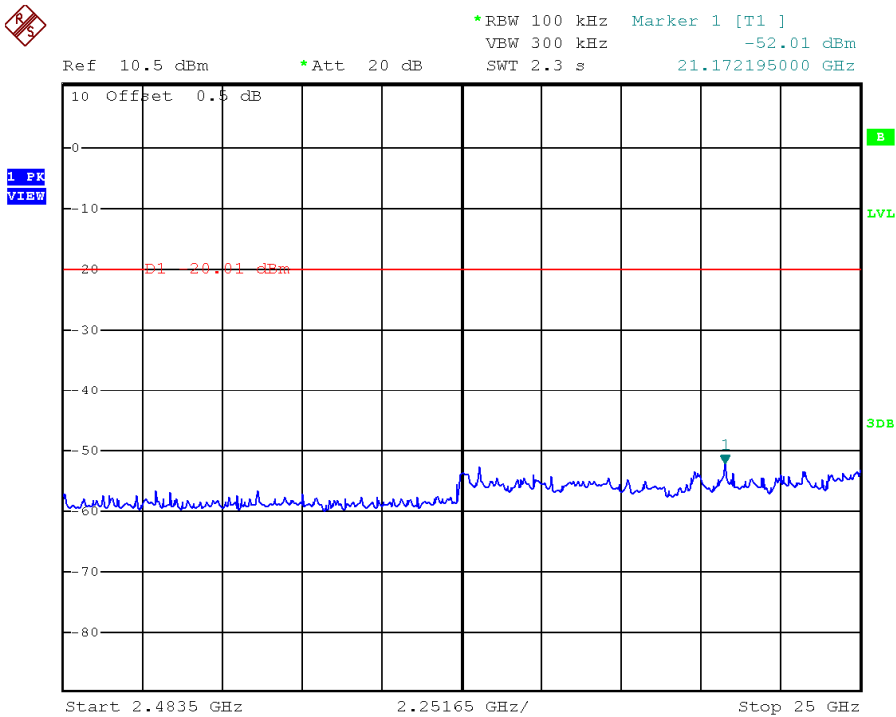


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Middle Channel, Plot A

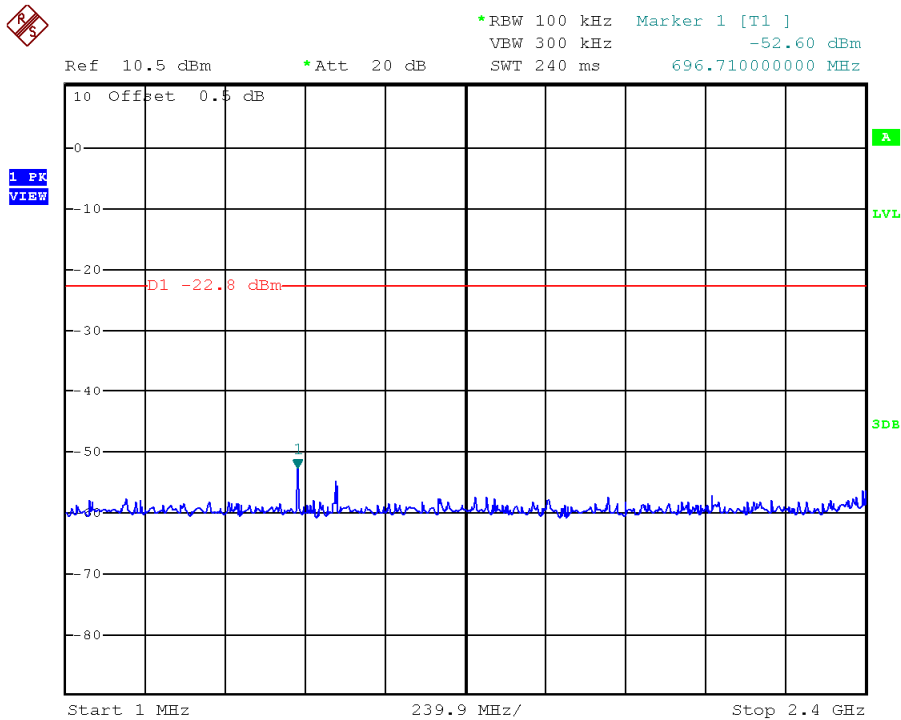


802.11b, Middle Channel, Plot B

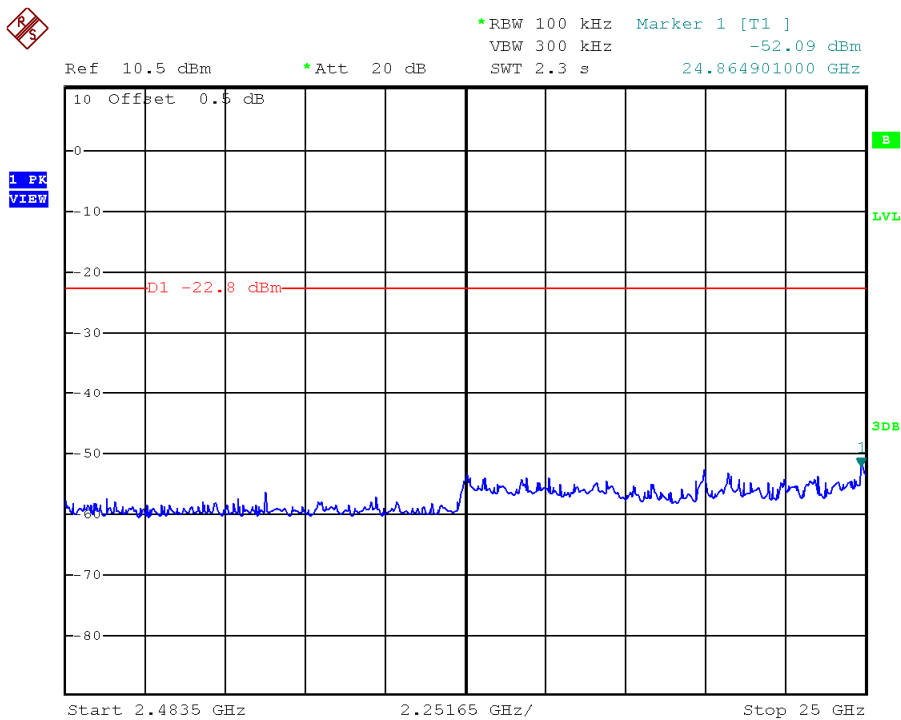


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Highest Channel, Plot A

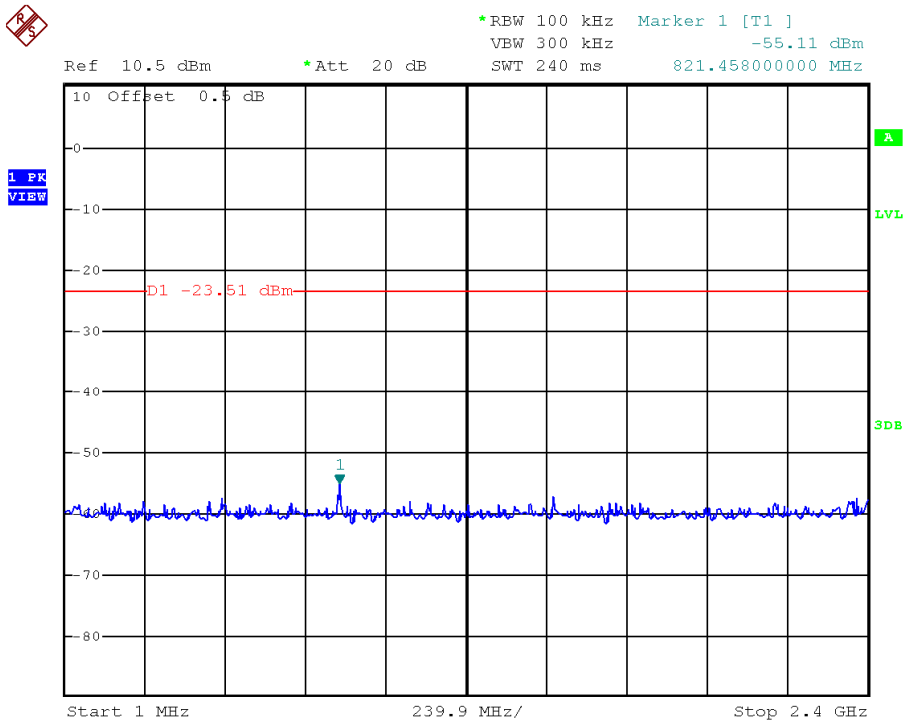


802.11b, Highest Channel, Plot B

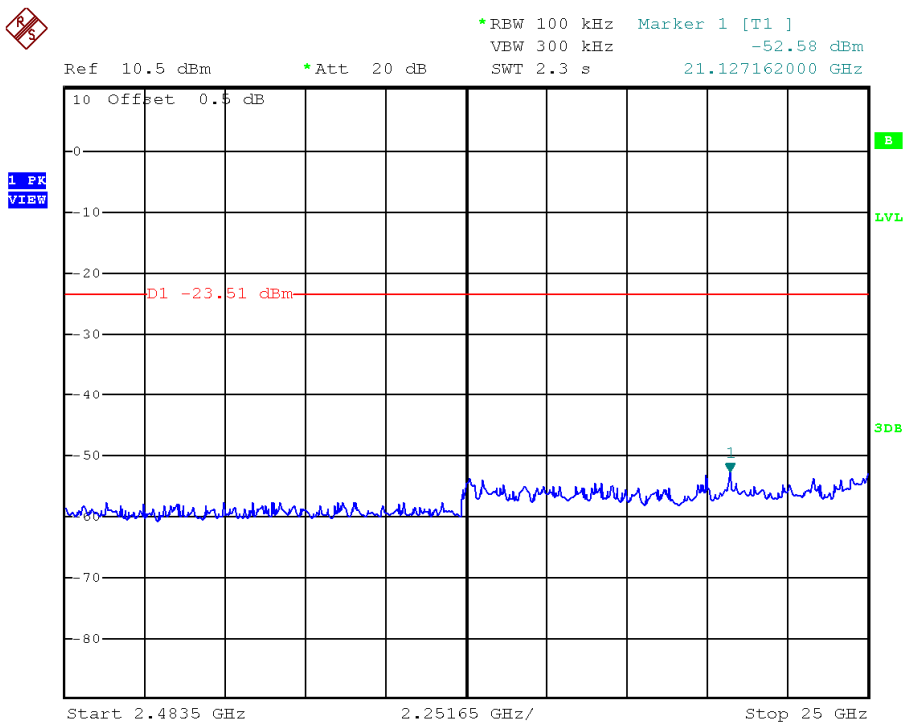


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Bandedge

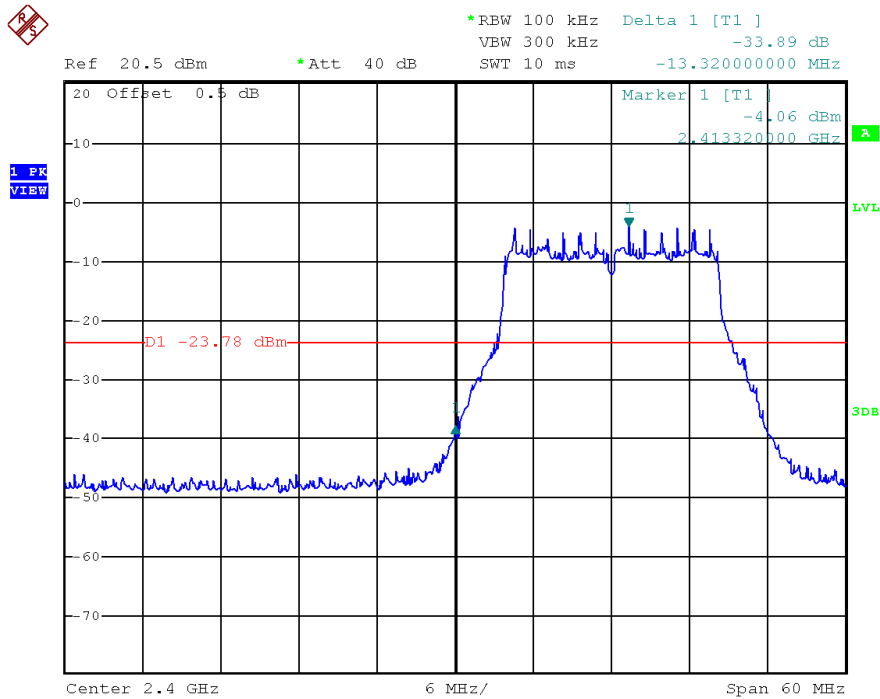


802.11g, Highest Channel, Bandedge

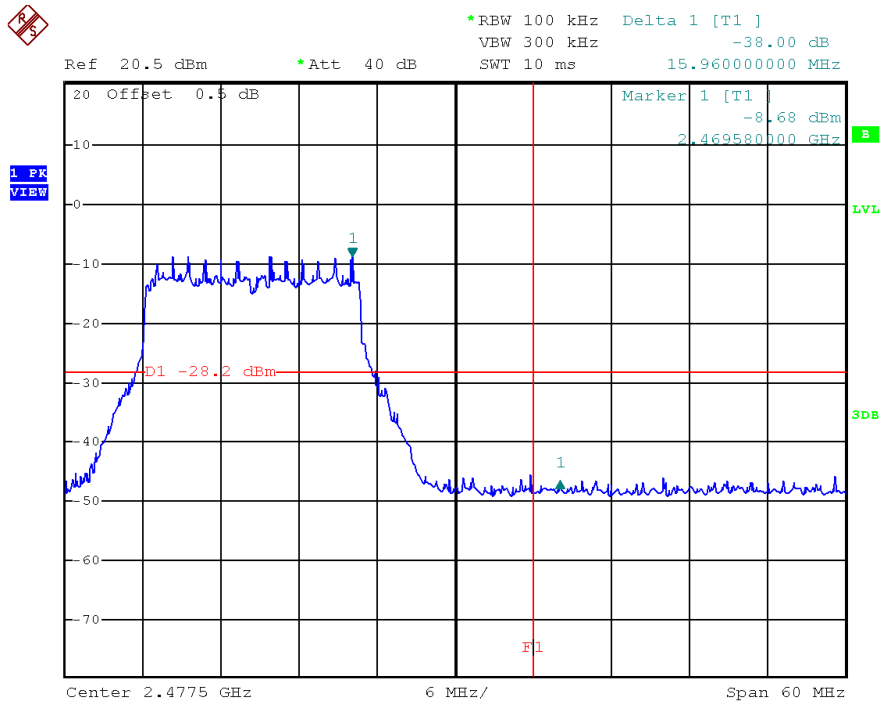


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Plot A

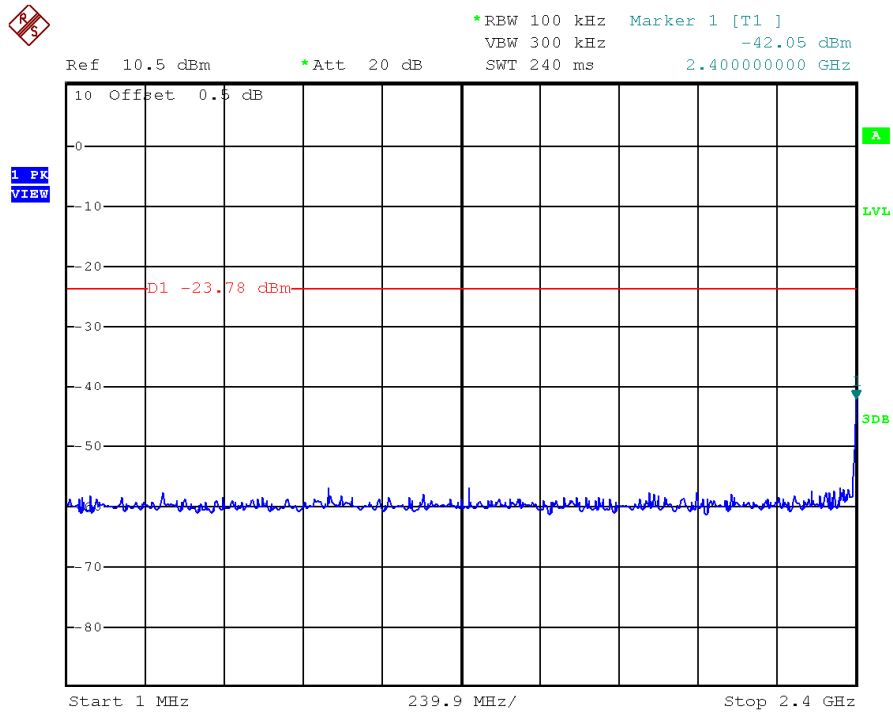


802.11g, Lowest Channel, Plot B

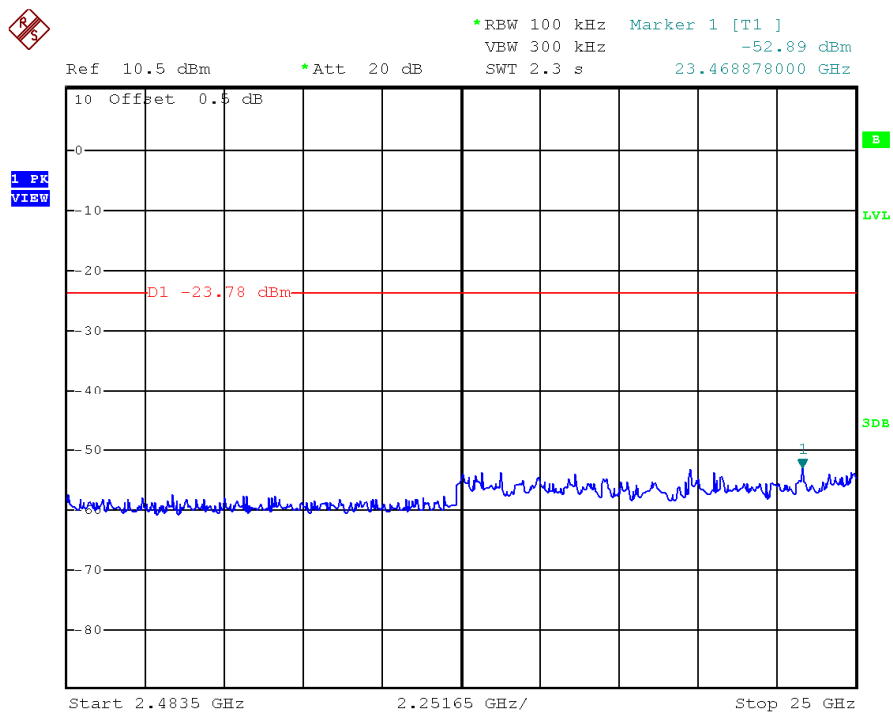


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Middle Channel, Plot A

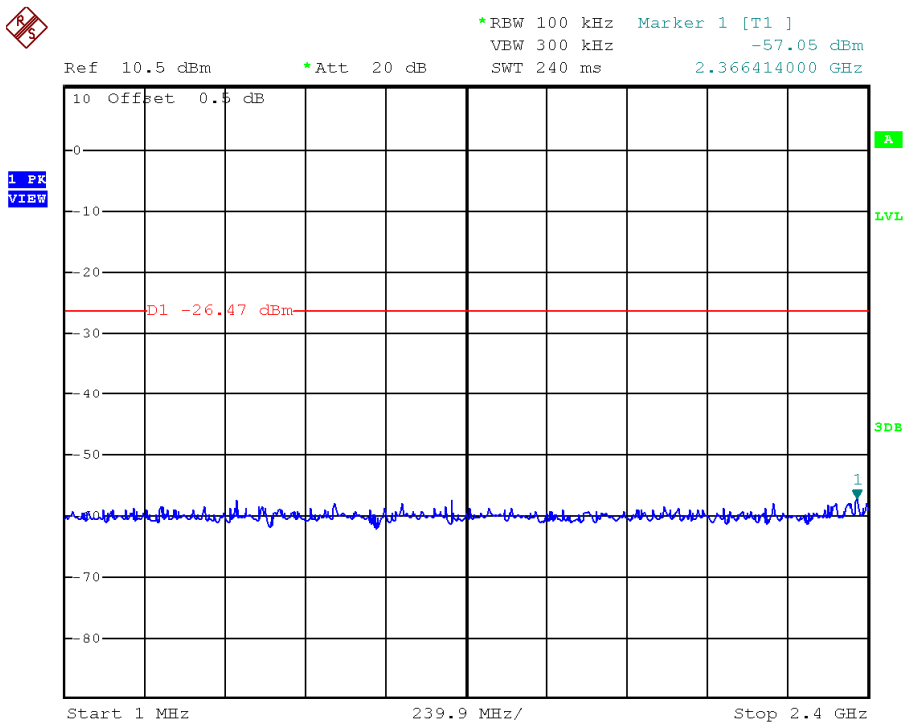


802.11g, Middle Channel, Plot B

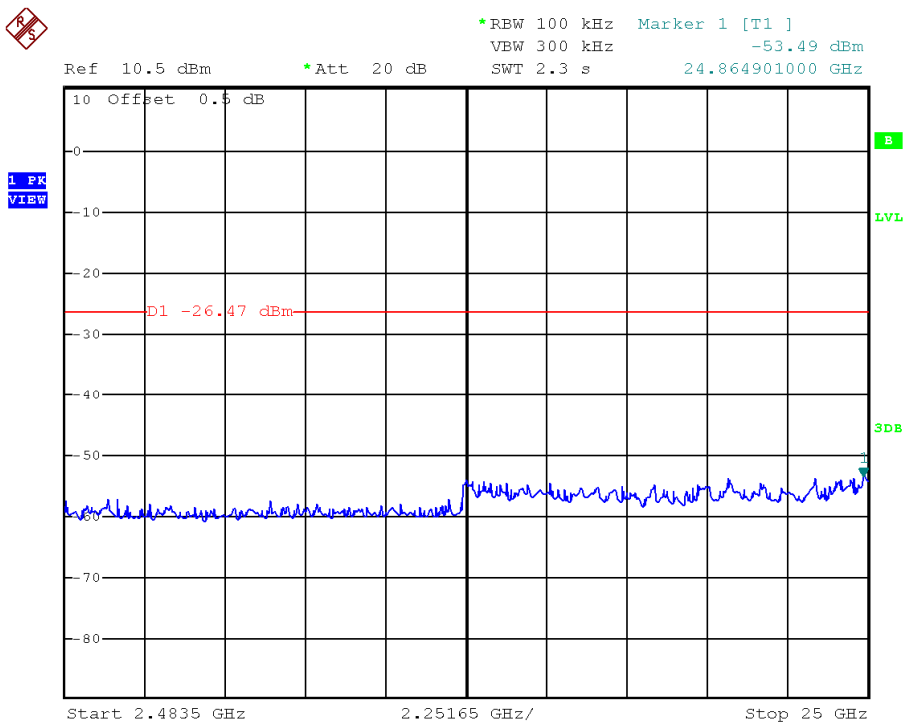


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Highest Channel, Plot A

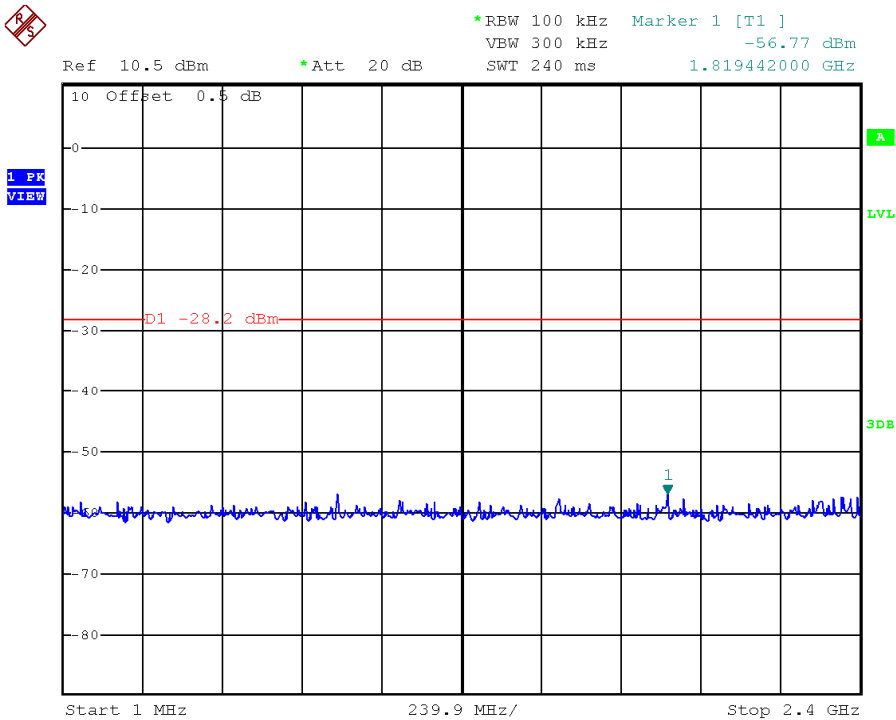


802.11g, Highest Channel, Plot B

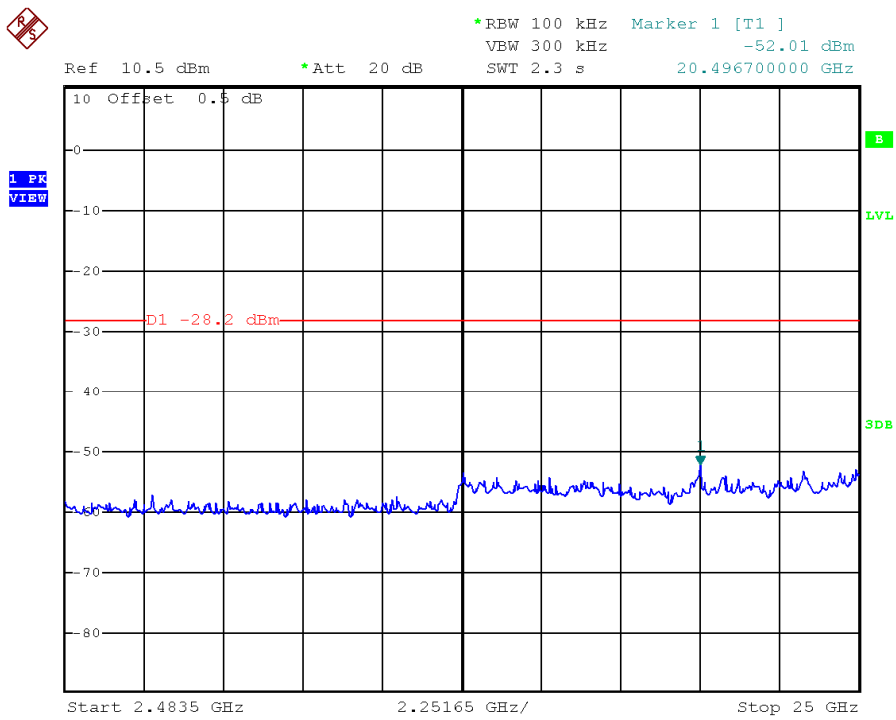


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Bandedge

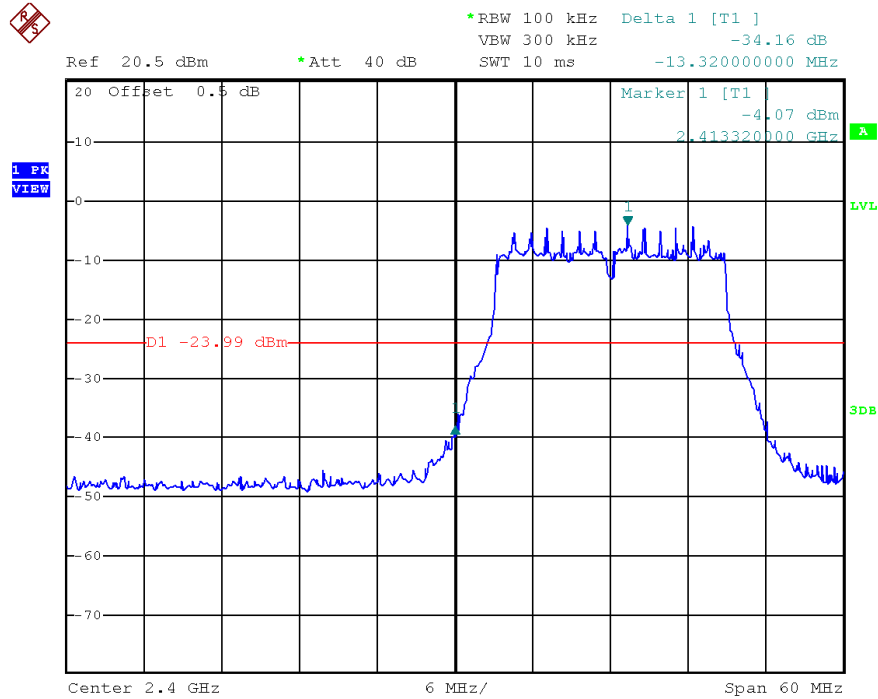


802.11n (20MHz), Highest Channel, Bandedge

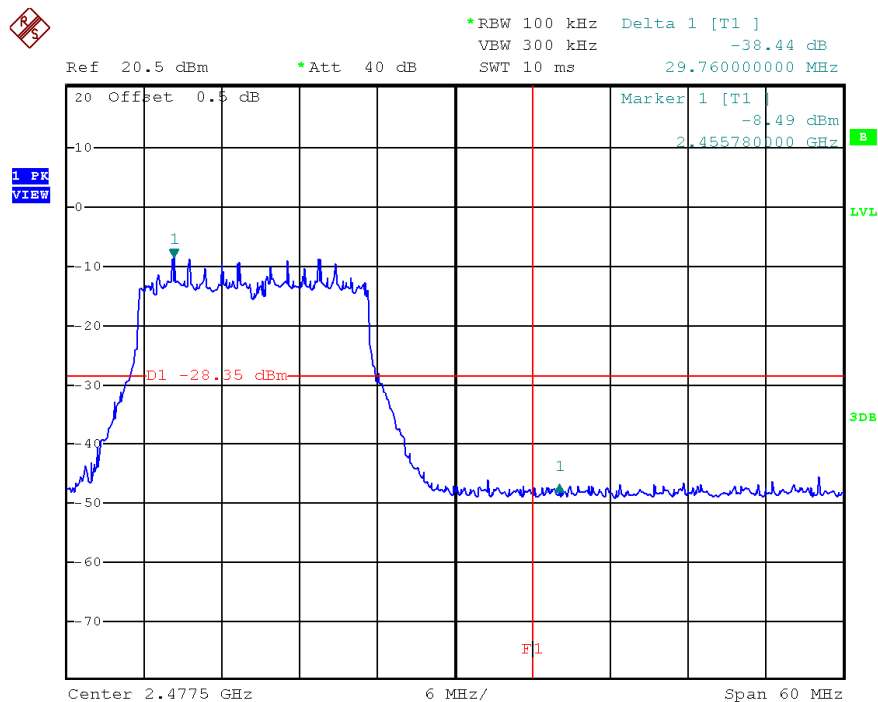


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

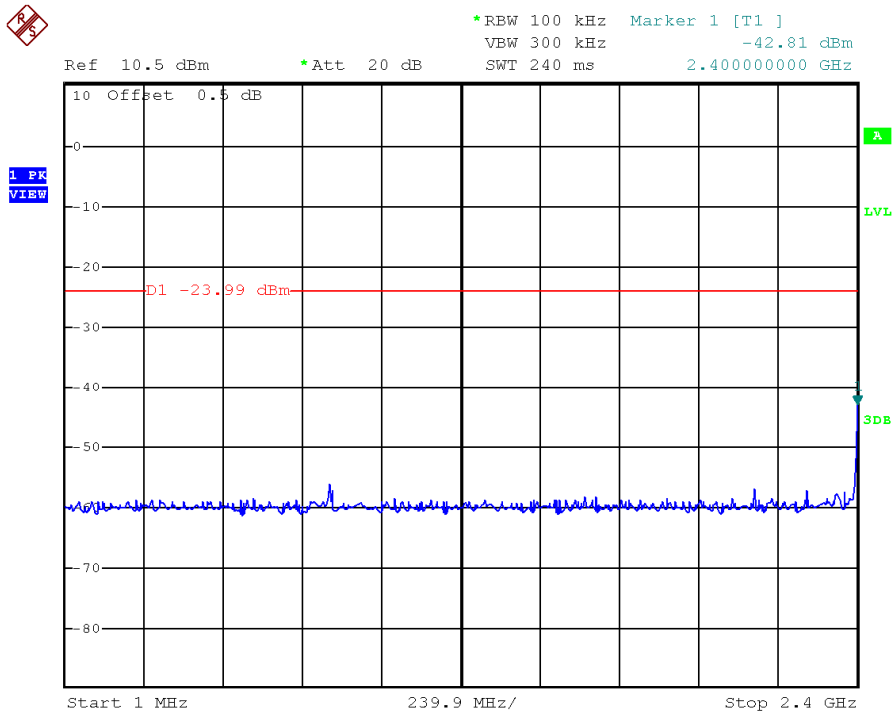


802.11n (20MHz), Lowest Channel, Plot B

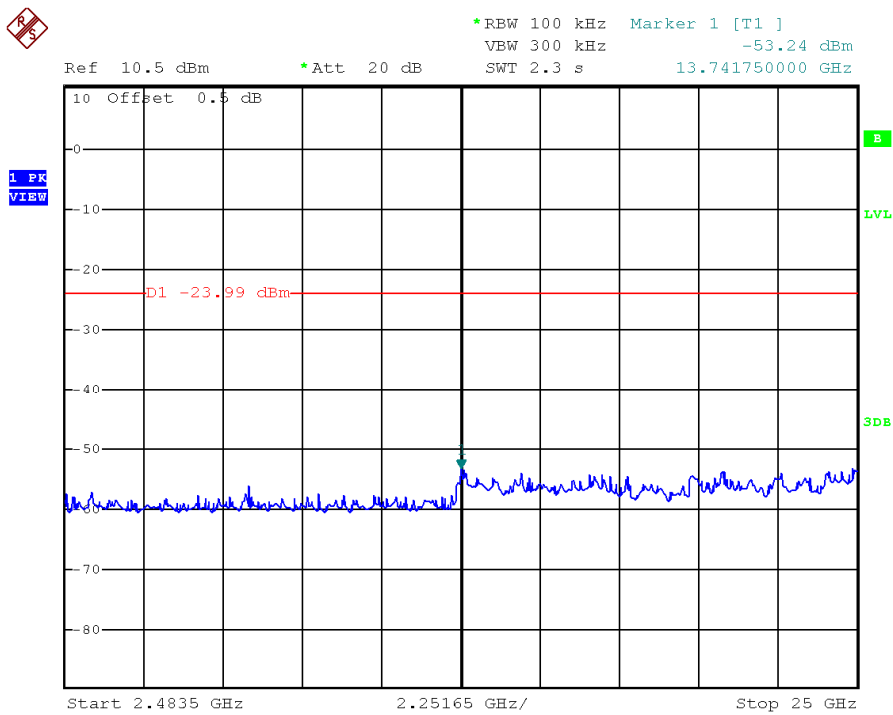


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Middle Channel, Plot A

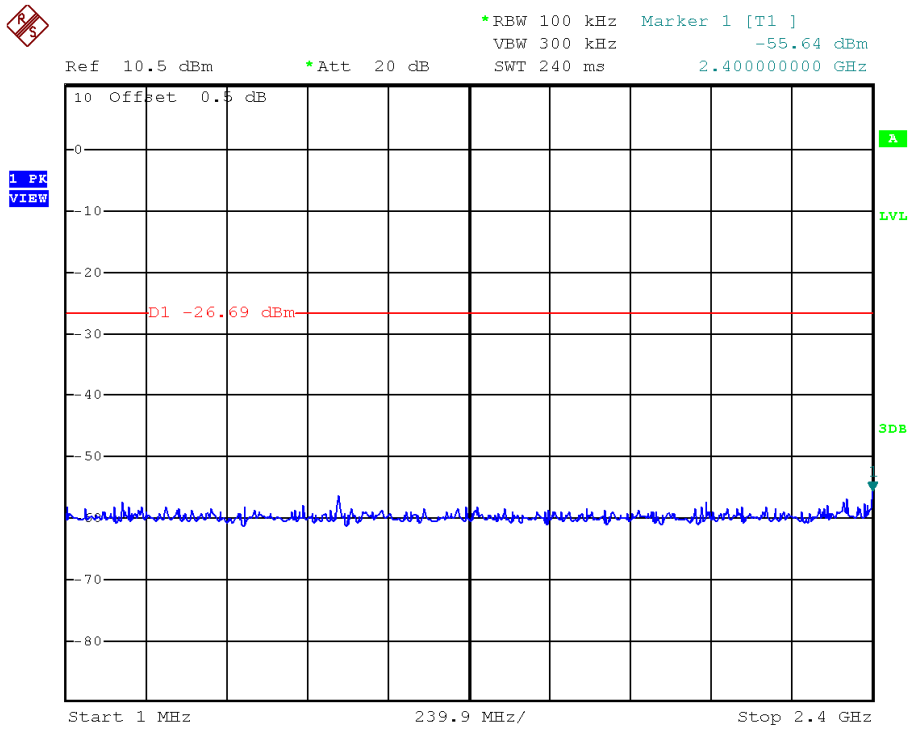


802.11n (20MHz), Middle Channel, Plot B

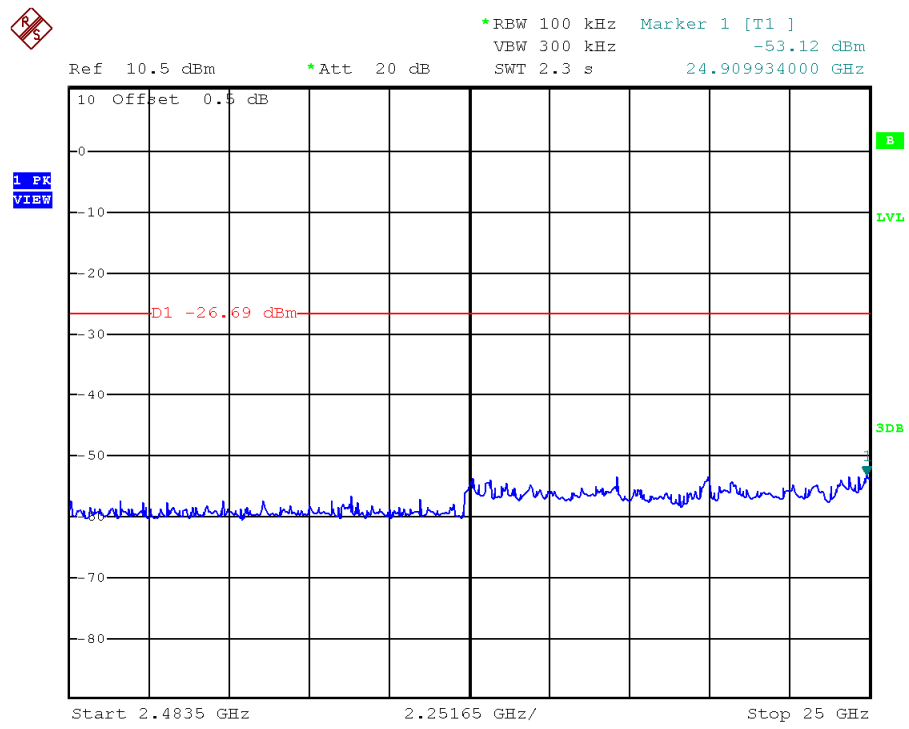


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Highest Channel, Plot A

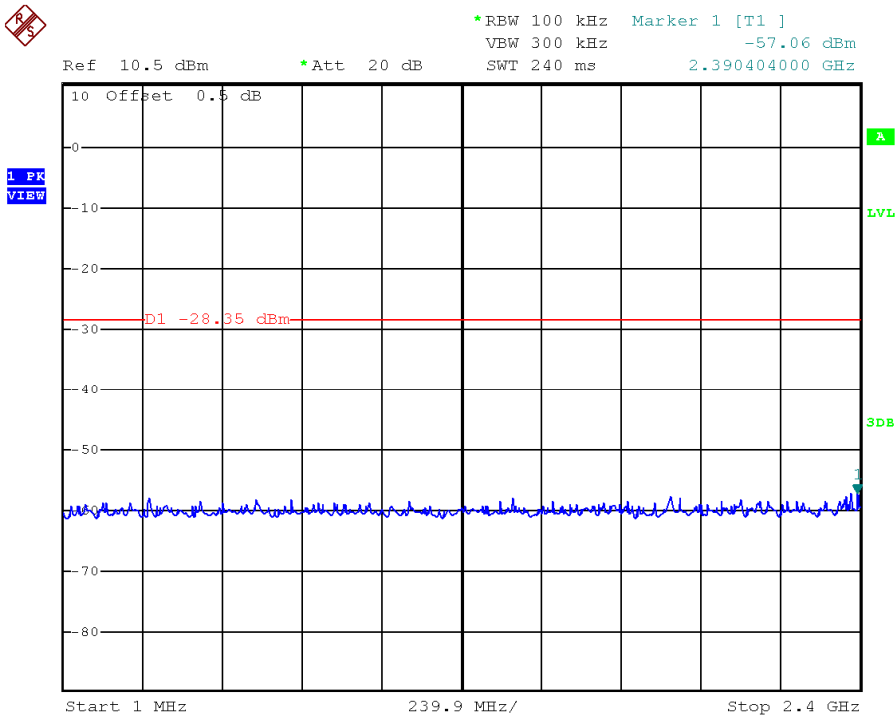


802.11n (20MHz), Highest Channel, Plot B

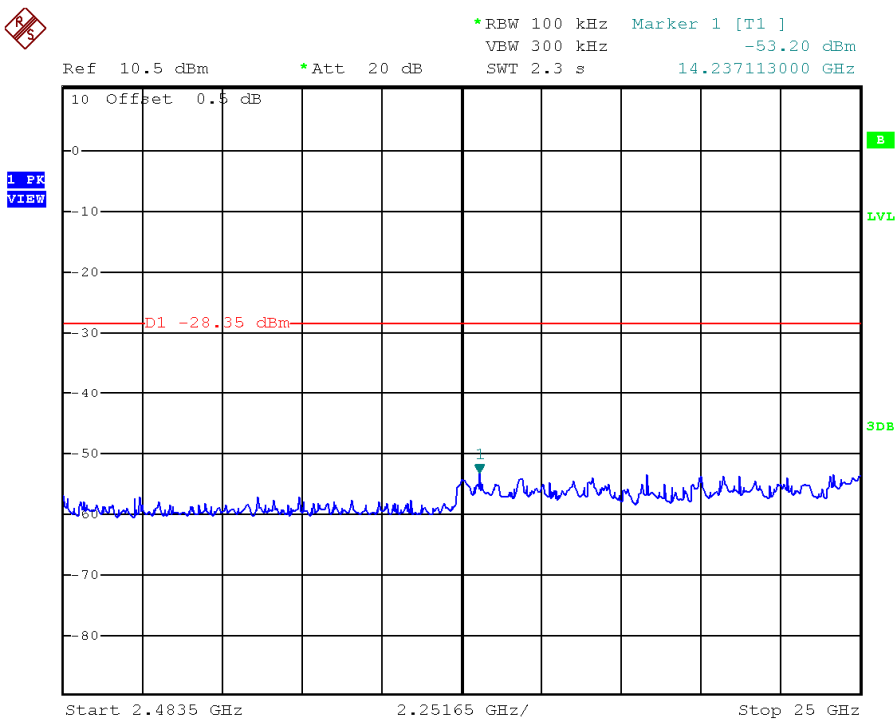


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Bandedge

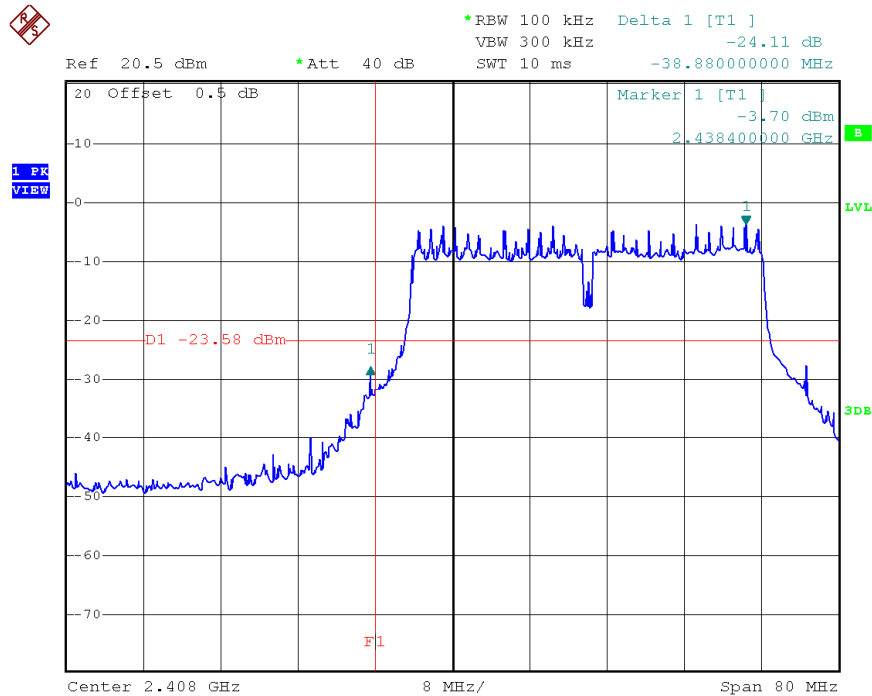


802.11n (40MHz), Highest Channel, Bandedge

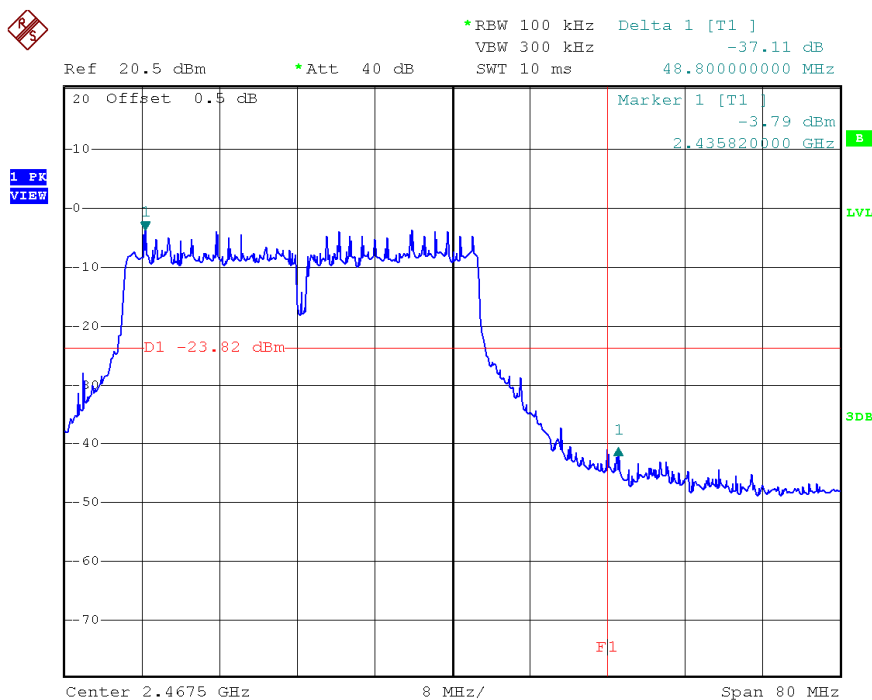


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Plot A

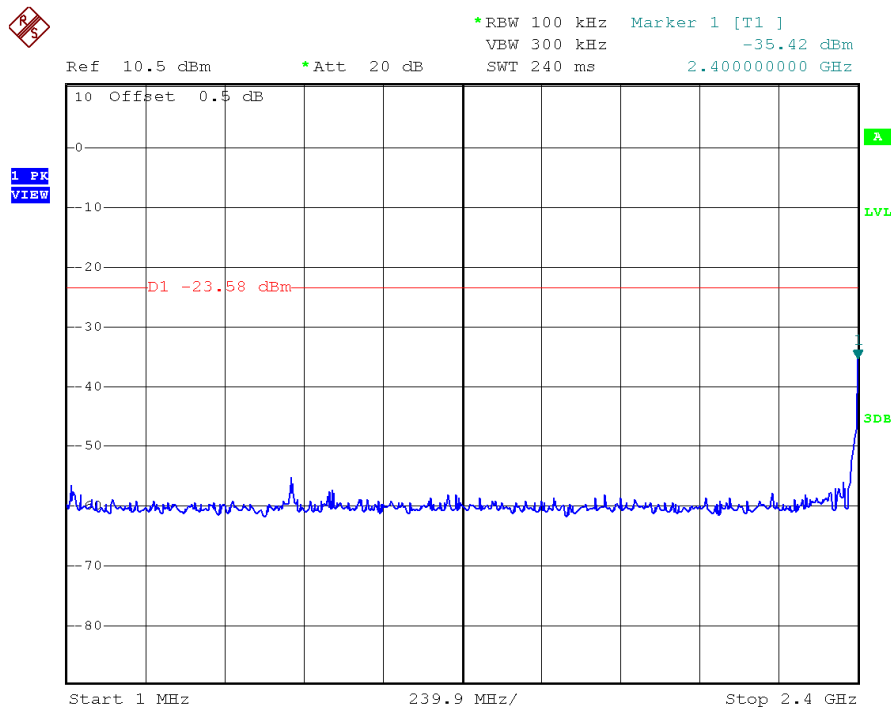


802.11n (40MHz), Lowest Channel, Plot B

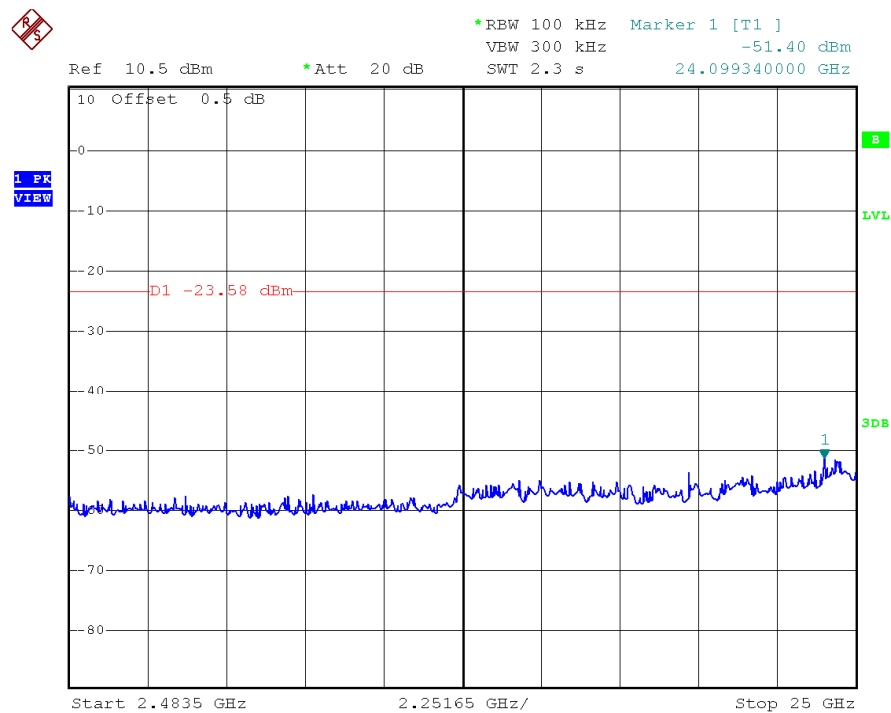


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Middle Channel, Plot A

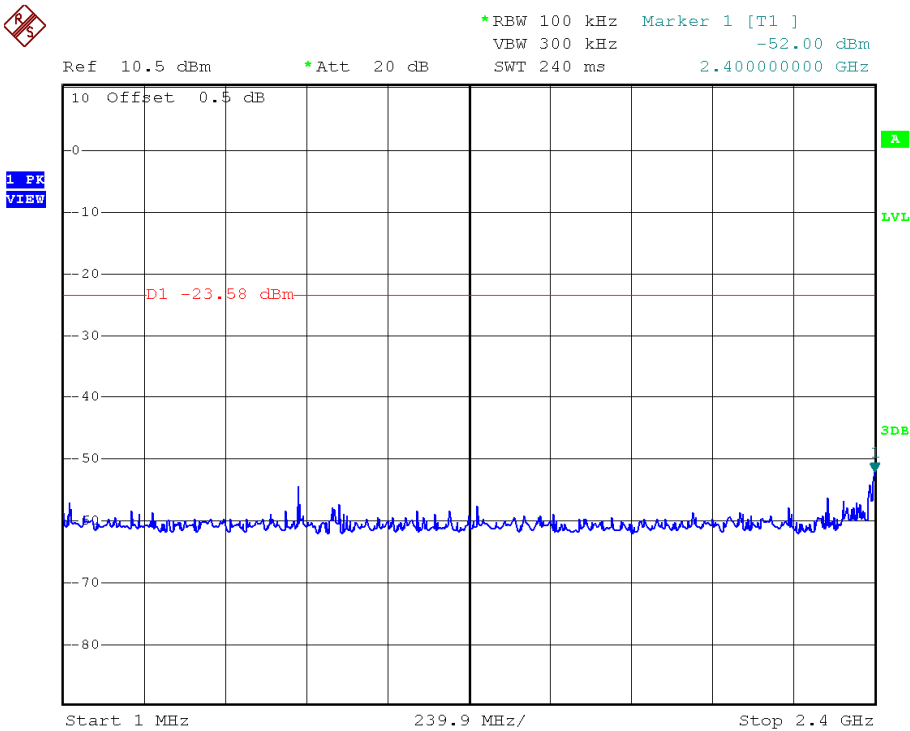


802.11n (40MHz), Middle Channel, Plot B

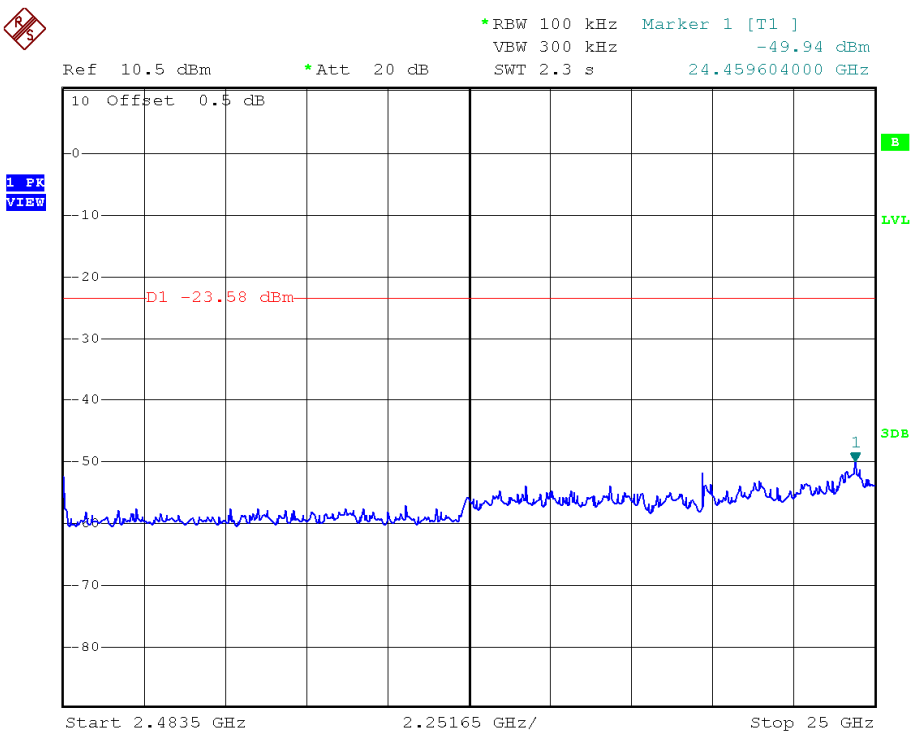


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Highest Channel, Plot A

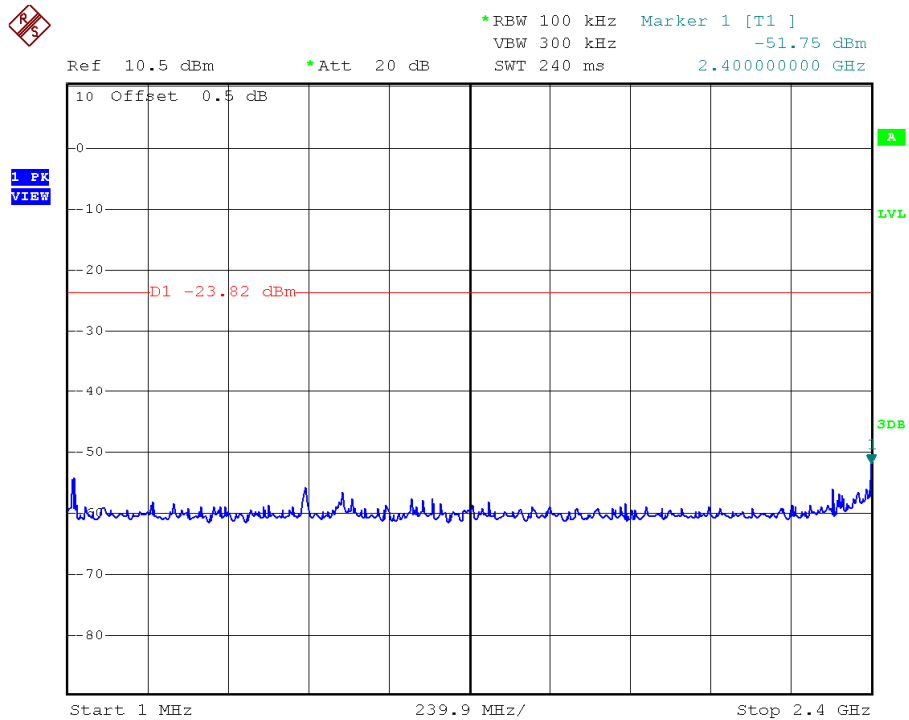

802.11n (40MHz), Highest Channel, Plot B

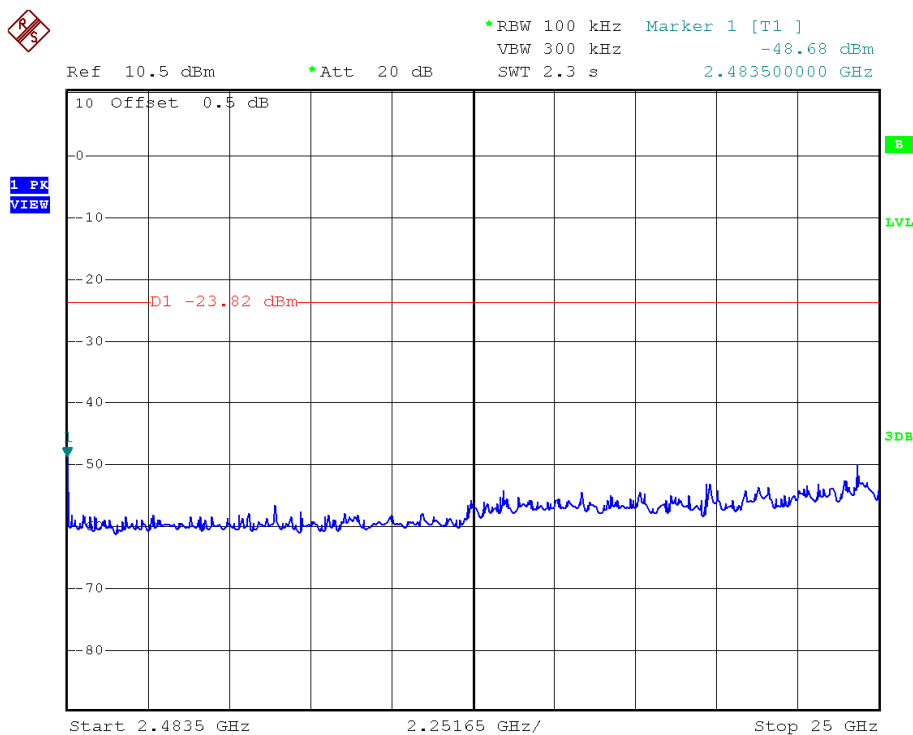

TEST REPORT

Occupied Bandwidth Results: (802.11b)


(802.11b) Occupied Bandwidth (MHz)

Low Channel: 2412 13.36

Middle Channel: 2437 13.28

High Channel: 2462 13.36

The worst case is shown as below

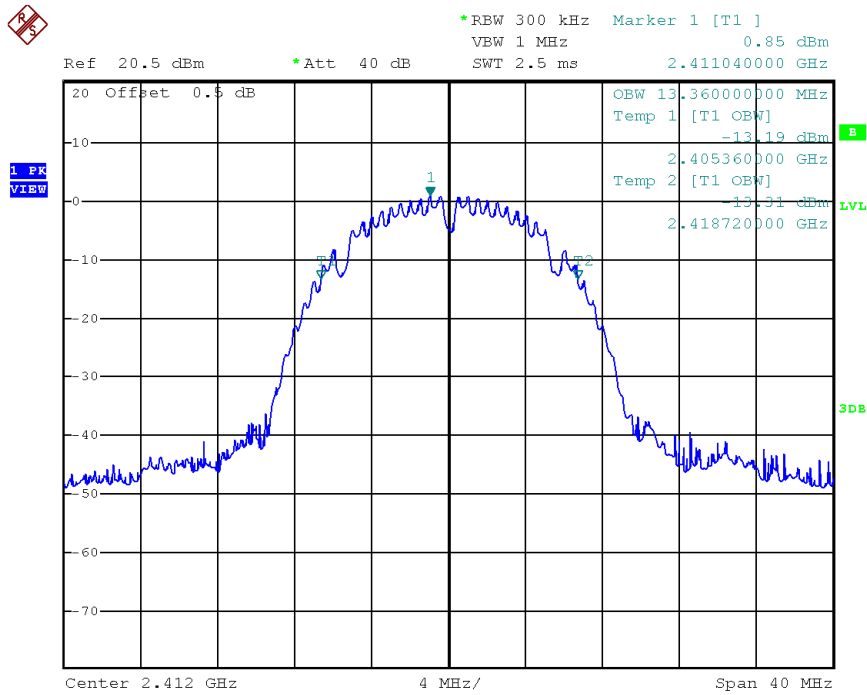

TEST REPORT

Occupied Bandwidth Results: (802.11g)


(802.11g) Occupied Bandwidth (MHz)

Low Channel: 2412 17.52

Middle Channel: 2437 17.52

High Channel: 2462 17.36

The worst case is shown as below

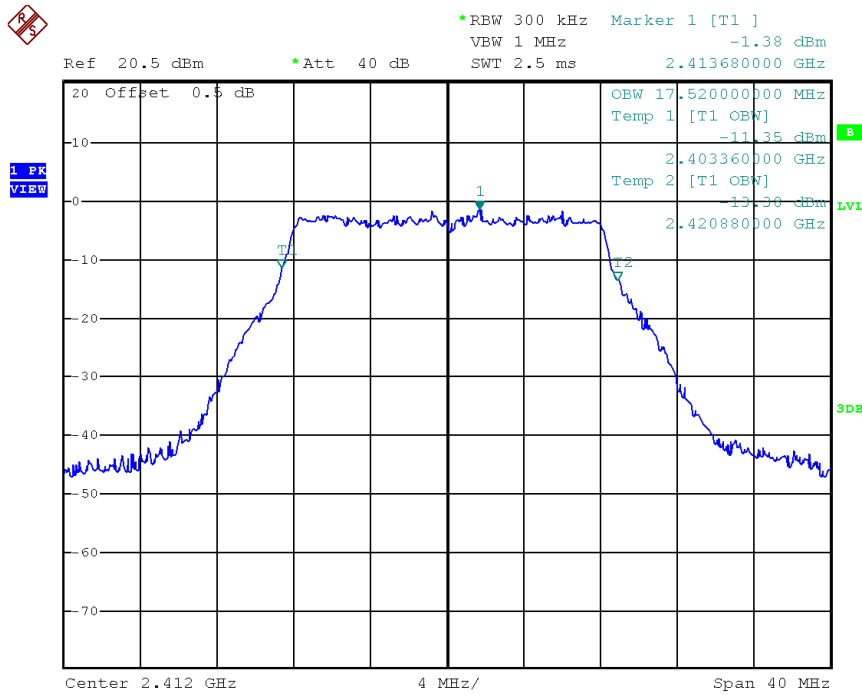


TEST REPORT

Occupied Bandwidth Results: (802.11n HT20)

(802.11n HT20)	Occupied Bandwidth (MHz)
Low Channel: 2412	18.4
Middle Channel: 2437	18.4
High Channel: 2462	18.4

The worst case is shown as below

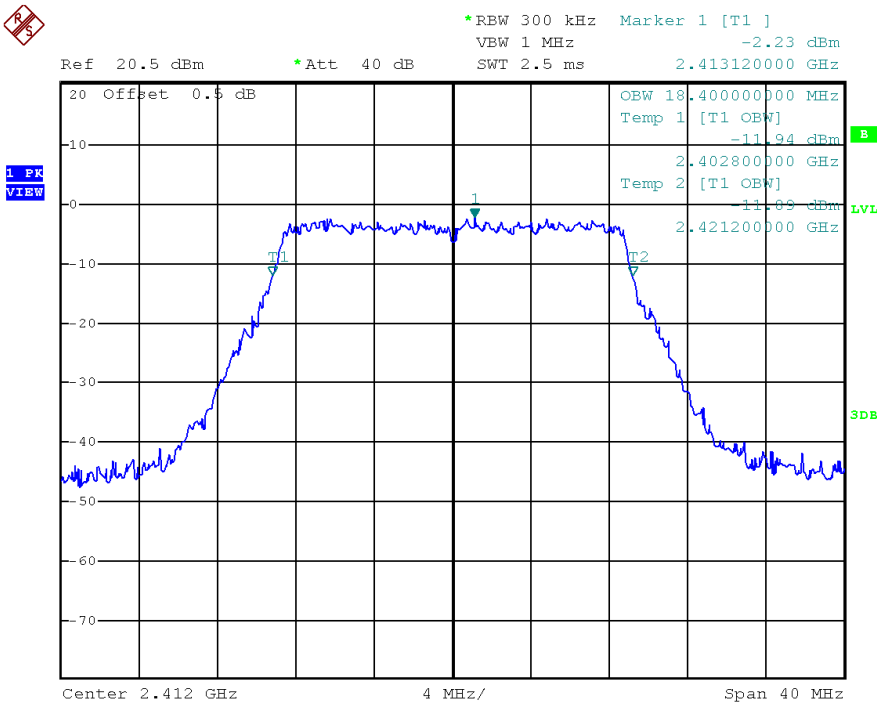

TEST REPORT

Occupied Bandwidth Results: (802.11n HT40)


(802.11n HT20) Occupied Bandwidth (MHz)

Low Channel: 2422 39.20

Middle Channel: 2437 39.20

High Channel: 2452 39.36

The worst case is shown as below

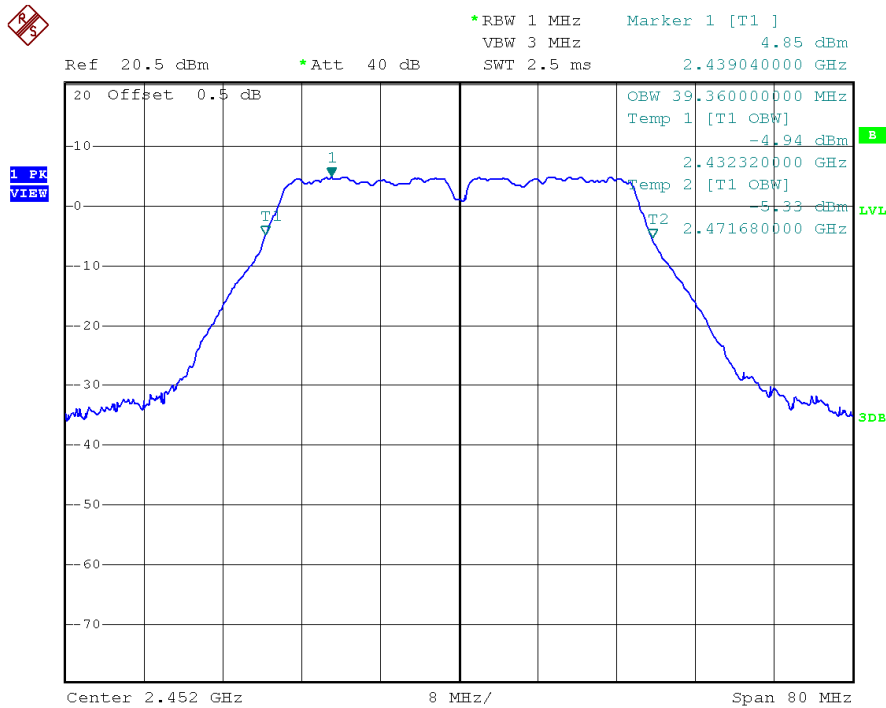

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0.0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2483.500 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.6 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	42.3	33	29.4	38.7	54.0	-15.3
V	4824.000	45.3	33	34.9	47.2	54.0	-6.8
H	12060.000	29.2	33	40.5	36.7	54.0	-17.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	56.3	33	29.4	52.7	74.0	-21.3
V	4824.000	48.1	33	34.9	50.0	74.0	-24.0
H	12060.000	37.8	33	40.5	45.3	74.0	-28.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	46.0	33	34.9	47.9	54.0	-6.1
V	7311.000	26.2	33	37.9	31.1	54.0	-22.9
H	12185.000	29.4	33	40.5	36.9	54.0	-17.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	49.2	33	34.9	51.1	74.0	-22.9
V	7311.000	37.3	33	37.9	42.2	74.0	-31.8
H	12185.000	36.3	33	40.5	43.8	74.0	-30.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	49.8	33	29.4	46.2	54.0	-7.8
V	4924.000	46.6	33	34.9	48.5	54.0	-5.5
V	7386.000	26.9	33	37.9	31.8	54.0	-22.2
H	12310.000	29.3	33	40.5	36.8	54.0	-17.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	62.4	33	29.4	58.8	74.0	-15.2
V	4924.000	49.9	33	34.9	51.8	74.0	-22.2
V	7386.000	37.9	33	37.9	42.8	74.0	-31.2
H	12310.000	38.7	33	40.5	46.2	74.0	-27.8

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	42.0	33	29.4	38.4	54.0	-15.6
V	4824.000	42.2	33	34.9	44.1	54.0	-9.9
H	12060.000	27.4	33	40.5	34.9	54.0	-19.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	58.0	33	29.4	54.4	74.0	-19.6
V	4824.000	46.1	33	34.9	48.0	74.0	-26.0
H	12060.000	39.7	33	40.5	47.2	74.0	-26.8

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	44.3	33	34.9	46.2	54.0	-7.8
V	7311.000	26.5	33	37.9	31.4	54.0	-22.6
H	12185.000	27.1	33	40.5	34.6	54.0	-19.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	48.4	33	34.9	50.3	74.0	-23.7
V	7311.000	38.1	33	37.9	43.0	74.0	-31.0
H	12185.000	39.7	33	40.5	47.2	74.0	-26.8

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	57.0	33	29.4	53.4	54.0	-0.6
V	4924.000	43.5	33	34.9	45.4	54.0	-8.6
V	7386.000	26.2	33	37.9	31.1	54.0	-22.9
H	12310.000	27.0	33	40.5	34.5	54.0	-19.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	71.6	33	29.4	68.0	74.0	-6.0
V	4924.000	47.7	33	34.9	49.6	74.0	-24.4
V	7386.000	38.9	33	37.9	43.8	74.0	-30.2
H	12310.000	40.8	33	40.5	48.3	74.0	-25.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	46.0	33	29.4	42.4	54.0	-11.6
V	4824.000	39.3	33	34.9	41.2	54.0	-12.8
H	12060.000	28.9	33	40.5	36.4	54.0	-17.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	57.8	33	29.4	54.2	74.0	-19.8
V	4824.000	48.9	33	34.9	50.8	74.0	-23.2
H	12060.000	38.8	33	40.5	46.3	74.0	-27.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	38.8	33	34.9	40.7	54.0	-13.3
V	7311.000	28.6	33	37.9	33.5	54.0	-20.5
H	12185.000	27.9	33	40.5	35.4	54.0	-18.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	48.5	33	34.9	50.4	74.0	-23.6
V	7311.000	39.8	33	37.9	44.7	74.0	-29.3
H	12185.000	38.8	33	40.5	46.3	74.0	-27.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	56.9	33	29.4	53.3	54.0	-0.7
V	4924.000	38.3	33	34.9	40.2	54.0	-13.8
V	7386.000	28.8	33	37.9	33.7	54.0	-20.3
H	12310.000	27.7	33	40.5	35.2	54.0	-18.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	72.0	33	29.4	68.4	74.0	-5.6
V	4924.000	48.2	33	34.9	50.1	74.0	-23.9
V	7386.000	39.4	33	37.9	44.3	74.0	-29.7
H	12310.000	39.2	33	40.5	46.7	74.0	-27.3

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 03

Table 10
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	45.0	33	29.4	41.4	54.0	-12.6
V	4844.000	30.3	33	34.9	32.2	54.0	-21.8
H	12110.000	29.3	33	40.5	36.8	54.0	-17.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	57.6	33	29.4	54.0	74.0	-20.0
V	4844.000	38.8	33	34.9	40.7	74.0	-33.3
H	12110.000	38.7	33	40.5	46.2	74.0	-27.8

- NOTES:
1. Peak detector is used for the emission measurement.
 6. Average detector is used for the average data of emission measurement
 7. All measurements were made at 3 meters.
 8. Negative value in the margin column shows emission below limit.
 9. Horn antenna is used for the emission over 1000MHz.
 7. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 06

Table 11
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	30.1	33	34.9	32.0	54.0	-22.0
V	7311.000	30.3	33	37.9	35.2	54.0	-18.8
H	12185.000	29.0	33	40.5	36.5	54.0	-17.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	38.9	33	34.9	40.8	74.0	-33.2
V	7311.000	38.2	33	37.9	43.1	74.0	-30.9
H	12185.000	37.9	33	40.5	45.4	74.0	-28.6

- NOTES:
1. Peak detector is used for the emission measurement.
 6. Average detector is used for the average data of emission measurement
 7. All measurements were made at 3 meters.
 8. Negative value in the margin column shows emission below limit.
 9. Horn antenna is used for the emission over 1000MHz.
 7. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 09

Table 12
IEEE 802.11n (40MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	55.6	33	29.4	52.0	54.0	-2.0
V	4904.000	30.7	33	34.9	32.6	54.0	-21.4
V	7356.000	30.5	33	37.9	35.4	54.0	-18.6
H	12260.000	29.4	33	40.5	36.9	54.0	-17.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	70.0	33	29.4	66.4	74.0	-7.6
V	4904.000	38.4	33	34.9	40.3	74.0	-33.7
V	7356.000	38.7	33	37.9	43.6	74.0	-30.4
H	12260.000	37.7	33	40.5	45.2	74.0	-28.8

- NOTES:
1. Peak detector is used for the emission measurement.
 6. Average detector is used for the average data of emission measurement
 7. All measurements were made at 3 meters.
 8. Negative value in the margin column shows emission below limit.
 9. Horn antenna is used for the emission over 1000MHz.
 7. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: WIFI Operating

Table 13


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	31.091	27.4	16	10.0	21.4	40.0	-18.6
V	41.276	23.8	16	10.0	17.8	40.0	-22.2
H	101.780	23.5	16	13.0	20.5	43.5	-23.0
V	131.244	23.6	16	14.0	21.6	43.5	-21.9
V	159.980	37.5	16	16.0	37.5	43.5	-6.0
H	187.625	21.5	16	16.0	21.5	43.5	-22.0
H	218.908	21.5	16	17.0	22.5	46.0	-23.5
H	319.909	14.8	16	23.0	21.8	46.0	-24.2
V	399.934	20.2	16	25.0	29.2	46.0	-16.8
V	479.959	17.5	16	26.0	27.5	46.0	-18.5
V	640.009	18.4	16	29.0	31.4	46.0	-14.6

- NOTES:
1. Quasi-Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

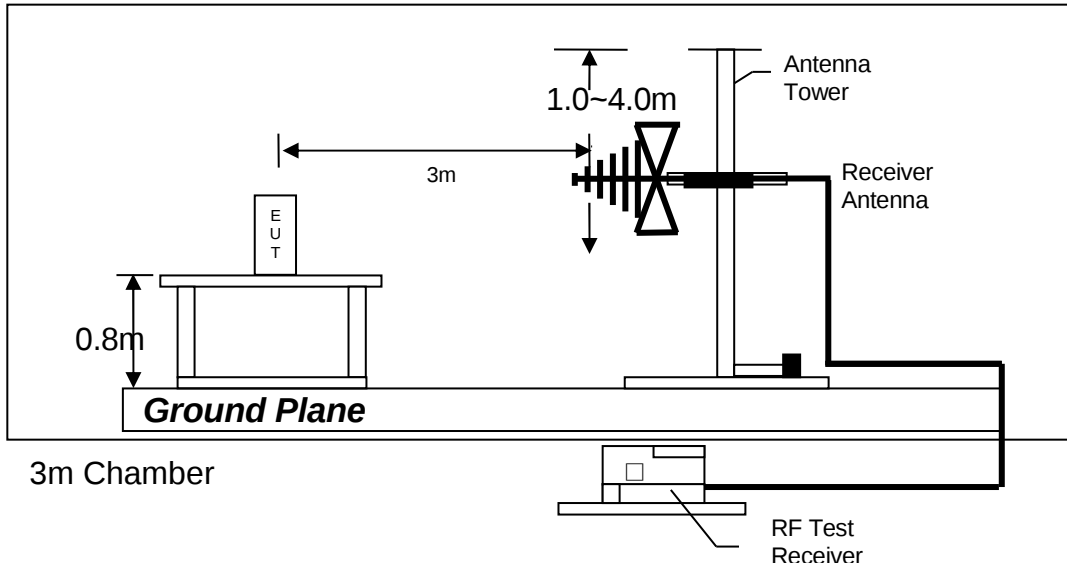

Test setup of radiated emissions up to 1GHz

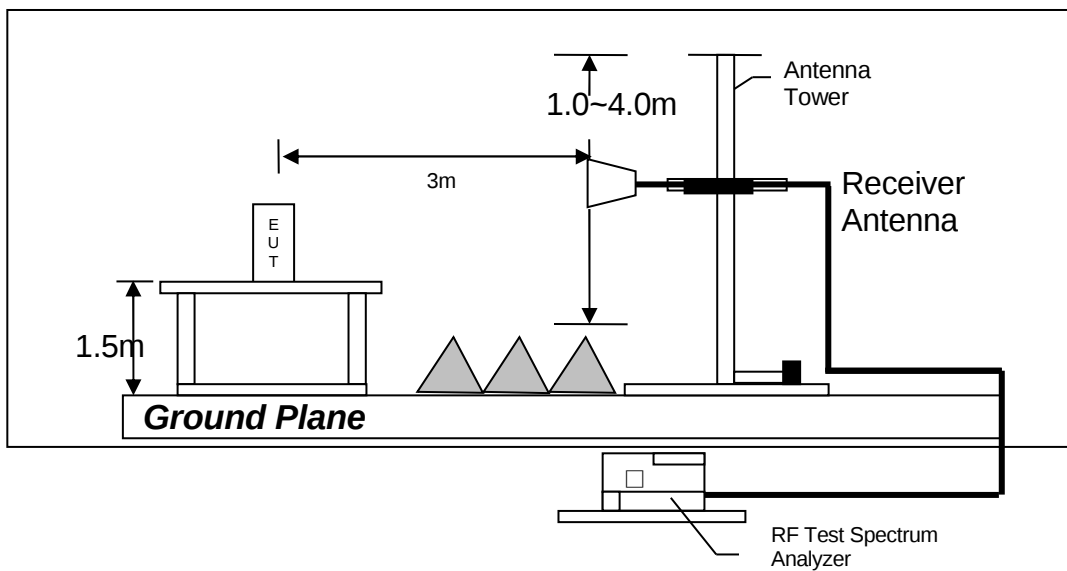

Test setup of radiated emissions above 1GHz

TEST REPORT

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

TEST REPORT

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

0.578 MHz

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 7.2 dB margin

TEST REPORT

AC POWER LINE CONDUCTED EMISSION


Worst Case: wifi operating



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

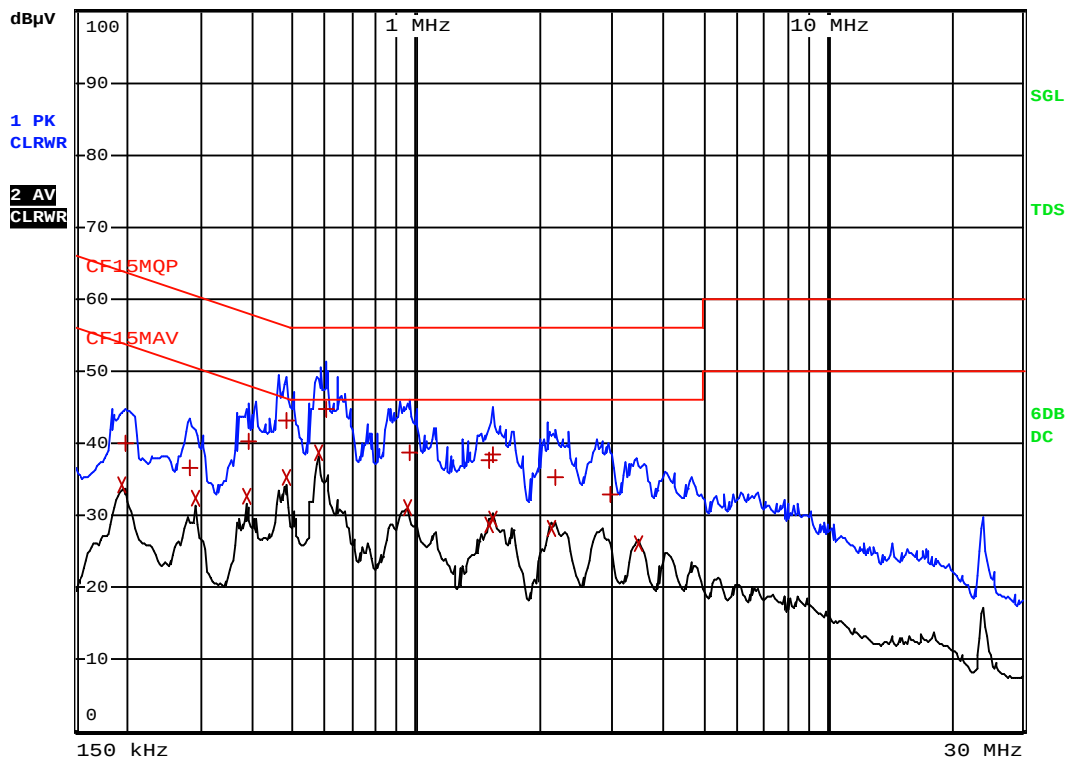

Date: 3.MAR.2022 14:22:10

TEST REPORT


Worst Case: wifi operating

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
2 CISPR Average	195 kHz	34.29	N	-19.52
1 Quasi Peak	199.5 kHz	40.13	N	-23.49
1 Quasi Peak	280.5 kHz	36.64	N	-24.16
2 CISPR Average	289.5 kHz	32.32	N	-18.21
2 CISPR Average	384 kHz	32.63	N	-15.55
1 Quasi Peak	388.5 kHz	40.17	L1	-17.92
1 Quasi Peak	483 kHz	43.14	L1	-13.13
2 CISPR Average	483 kHz	35.23	N	-11.05
2 CISPR Average	577.5 kHz	38.84	N	-7.15
1 Quasi Peak	604.5 kHz	44.87	L1	-11.12
2 CISPR Average	955.5 kHz	31.02	N	-14.97
1 Quasi Peak	964.5 kHz	38.79	L1	-17.20
2 CISPR Average	1.5135 MHz	28.66	L1	-17.33
1 Quasi Peak	1.518 MHz	37.75	L1	-18.24
1 Quasi Peak	1.5315 MHz	38.43	L1	-17.56
2 CISPR Average	1.5315 MHz	29.41	L1	-16.58
2 CISPR Average	2.1435 MHz	28.08	L1	-17.91
1 Quasi Peak	2.1885 MHz	35.22	L1	-20.77
1 Quasi Peak	2.9805 MHz	32.99	L1	-23.00
2 CISPR Average	3.4845 MHz	26.07	L1	-19.92

Date: 3.MAR.2022 14:21:46

TEST REPORT

4.7.3 Conducted Emission Test Setup

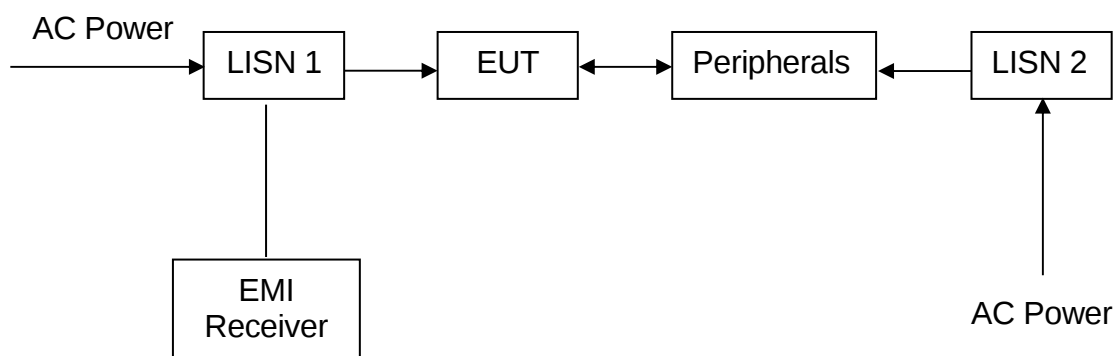

TEST REPORT

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna (20MHz to 200MHz)
Registration No.	EW-2500	EW-2466	EW-2512
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	EMCO
Model No.	ESCI	FSP30	3104C
Calibration Date	March 29, 2021	November 18, 2019	June 03, 2020
Calibration Due Date	March 29, 2022	August 18, 2022	December 03, 2022

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3243	EW-1133	EW-2781
Manufacturer	EMCO	EMCO	GREATBILLION
Model No.	3148B	3115	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	June 30, 2021	June 03, 2021	November 24, 2020
Calibration Due Date	December 30, 2022	June 03, 2022	November 24, 2022

Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2074
Manufacturer	SCHWARZBECK	MICROWAVE	RADIAL
Model No.	BBV9718	N0324413	N(m)-RG142-BNC(m) L=14M
Calibration Date	November 25, 2019	November 16, 2019	November 14, 2019
Calibration Due Date	June 25, 2022	June 16, 2022	August 14, 2022

Equipment	Pyramidal Horn Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-0905	EW-3302
Manufacturer	EMCO	EMCO
Model No.	3160-09	6502
Calibration Date	July 23, 2019	December 13, 2021
Calibration Due Date	June 23, 2022	June 13, 2023

TEST REPORT

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-2500
Manufacturer	RADIAL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESCI
Calibration Date	November 10, 2020	September 11, 2021	March 29, 2021
Calibration Due Date	May 10, 2022	September 11, 2022	March 29, 2022

TEST REPORT

3) Conductive Measurement Test

Equipment	5m RF Cable (40GHz)	Wideband power sensor 2 pcs 50MHz to 18GHz	Spectrum Analyzer
Registration No.	EW-2701	EW-3309	EW-2466
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	Sma m-m 5m 40G	NRP-Z81	FSP30
Calibration Date	November 24, 2020	December 01, 2021	November 18, 2019
Calibration Due Date	November 24, 2022	December 01, 2022	August 18, 2022

4) Bandedge & Bandwidth Measurement

Equipment	Spectrum Analyzer	5m RF Cable (40GHz)
Registration No.	EW-2466	EW-2701
Manufacturer	ROHDESCHWARZ	RADIALL
Model No.	FSP30	Sma m-m 5m 40G
Calibration Date	November 18, 2019	November 24, 2020
Calibration Due Date	August 18, 2022	November 24, 2022

END OF TEST REPORT