

## TEST REPORT

**Report No.: 26070454HKG-006**

Warmup plc

Application For Original Grant of 47 CFR Part 15 Certification

New Family of RSS-247 Issue 4 Certification

Programmable Thermostat

**FCC ID: 2AHBWRSWNAP**

**IC: 21121-RSWNAP**

This report contains the data of 2.4GHz Wi-Fi portion only

**Prepared and Checked by:**

**Approved by:**

Signed on File  
Leung Chun Ning, Peter  
Engineer

 Digitally signed  
by Herbert Wong  
Location: Intertek  
Testing Services  
Hong Kong  
Limited

**Wong Cheuk Ho, Herbert**  
Assistant Manager  
Date: August 24, 2026

## TEST REPORT

### GENERAL INFORMATION

|                                    |                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Grantee:</b>                    | Warmup plc                                                                                                                                                                                                                |
| <b>Grantee Address:</b>            | 704 Tudor Estate, Abbey Road<br>London NW10 7UW<br>United Kingdom                                                                                                                                                         |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2024 Edition                                                                                                                                                                                      |
| <b>FCC ID:</b>                     | 2AHBWRSWNAP                                                                                                                                                                                                               |
| <b>FCC Model(s):</b>               | RSW-04-WH-LC, 0804-0403-TW, 0804-0403-TB                                                                                                                                                                                  |
| <b>IC Specification Standard:</b>  | RSS-247 Issue 4, July 2025<br>RSS-Gen Issue 5 Amendment 2, February 2021                                                                                                                                                  |
| <b>IC:</b>                         | 21121-RSWNAP                                                                                                                                                                                                              |
| <b>HVIN:</b>                       | RSW-04-WH-LC(P), 0804-0403-TW(P), 0804-0403-TB(P)                                                                                                                                                                         |
| <b>PMN:</b>                        | RSW-04-WH-LC, 0804-0403-TW, 0804-0403-TB                                                                                                                                                                                  |
| <b>Type of EUT:</b>                | Spread Spectrum Transmitter                                                                                                                                                                                               |
| <b>Description of EUT:</b>         | Programmable Thermostat                                                                                                                                                                                                   |
| <b>Brand Name:</b>                 | Warmup, Laticrete                                                                                                                                                                                                         |
| <b>Sample Receipt Date:</b>        | August 06, 2026                                                                                                                                                                                                           |
| <b>Date of Test:</b>               | August 06, 2026 to August 17, 2026                                                                                                                                                                                        |
| <b>Report Date:</b>                | August 24, 2026                                                                                                                                                                                                           |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Relative Humidity: 10 to 90%                                                                                                                                                                  |
| <b>Conclusion:</b>                 | Test was conducted by client submitted sample.<br>The submitted sample as received complied with the 47 CFR Part 15 /<br>RSS-247 Issue 4 Certification.<br><br>This report contains the data of 2.4GHz Wi-Fi portion only |

## TEST REPORT

### SUMMARY OF TEST RESULT

| Test Items                                                   | FCC Part 15 Section        | RSS-247 / RSS-Gen <sup>#</sup> Section | Results  |
|--------------------------------------------------------------|----------------------------|----------------------------------------|----------|
| Antenna Requirement                                          | 15.203                     | 6.8 <sup>#</sup>                       | Complied |
| Max. Conducted Output Power (Peak)                           | 15.247(b)(3)&(4)           | 5.4(d)                                 | Complied |
| Min. 6dB RF Bandwidth                                        | 15.247(a)(2)               | 5.2(a)                                 | Complied |
| Max. Power Density (Average)                                 | 15.247(e)                  | 5.2(b)                                 | Complied |
| Out of Band Antenna Conducted Emission                       | 15.247(d)                  | 5.5                                    | Complied |
| Radiated Emission in Restricted Bands and Spurious Emissions | 15.247(d), 15.209 & 15.109 | 5.5                                    | Complied |
| AC Power Line Conducted Emission                             | 15.207 & 15.107            | 7.2 <sup>#</sup>                       | Complied |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

For all technical data, which can be referred to Annex B – Report cover sheet.

For electronic filing, the Annex B – Report cover sheet is saved with filename: Annex B.pdf.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2024 Edition

RSS-247 Issue 4, July 2025

RSS-Gen Issue 5 Amendment 2, February 2021

## TEST REPORT

### TABLE OF CONTENTS

|                  |                                                                                 |           |
|------------------|---------------------------------------------------------------------------------|-----------|
| <b>EXHIBIT 1</b> | <b>GENERAL DESCRIPTION .....</b>                                                | <b>5</b>  |
| 1.1              | Product Description .....                                                       | 5         |
| 1.2              | Test Methodology .....                                                          | 5         |
| 1.3              | Test Facility.....                                                              | 6         |
| 1.4              | Related Submittal(s) Grants .....                                               | 6         |
| <b>EXHIBIT 2</b> | <b>SYSTEM TEST CONFIGURATION .....</b>                                          | <b>7</b>  |
| 2.1              | Justification .....                                                             | 7         |
| 2.2              | EUT Exercising Software.....                                                    | 8         |
| 2.3              | Details of EUT and Description of Accessories .....                             | 8         |
| 2.4              | Measurement Uncertainty.....                                                    | 8         |
| <b>EXHIBIT 3</b> | <b>TEST RESULTS.....</b>                                                        | <b>9</b>  |
| 3.1              | Maximum Conducted (Peak) Output Power at Antenna Terminals.....                 | 9         |
| 3.2              | Minimum 6dB RF Bandwidth .....                                                  | 11        |
| 3.3              | Minimum Power Spectral Density .....                                            | 12        |
| 3.4              | Out of Band Conducted Emissions.....                                            | 13        |
| 3.5              | Field Strength Calculation .....                                                | 15        |
| 3.6              | Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions ..... | 16        |
| 3.7              | Transmitter Duty Cycle Calculation .....                                        | 39        |
| 3.8              | AC Power Line Conducted Emission .....                                          | 39        |
| <b>EXHIBIT 4</b> | <b>EQUIPMENT LIST .....</b>                                                     | <b>43</b> |

## TEST REPORT

### EXHIBIT 1 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Wi-Fi and Bluetooth Classic enabled thermostat designed to provide timed regulation of electric underfloor heating systems.

The Equipment Under Test (EUT) operates at frequency range of 2412 MHz to 2462 MHz with 11 channels.

For IEEE 802.11b mode, it operates at frequency range of 2412.000 MHz to 2462.000 MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For IEEE 802.11g mode, it operates at frequency range of 2412.000 MHz to 2462.000 MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For IEEE 802.11n (with 20 MHz bandwidth) mode, it operates at frequency range of 2412.000 MHz to 2462.000 MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 72.2Mbps.

For IEEE 802.11n (with 40 MHz bandwidth) mode, it operates at frequency range of 2422.000 MHz to 2452.000 MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 150Mbps.

The EUT is powered by 120VAC.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.  
Peak Antenna Gain: 3.71dBi

The Model(s): RSW-04-WH-LC and 0804-0403-TB are the same as the Model: 0804-0403-TW in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure. The only differences between these models are color, exterior casing, packaging, trade name and model number to be sold for marketing purpose as declared by client.

The circuit description is saved with filename: descri.pdf.

#### 1.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024. Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

Antenna port conducted measurements were performed according to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 and KDB Publication No. 558074 D01 v05r02 (April 02, 2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 2, February 2021.

## TEST REPORT

### 1.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, CABID is "HKAP01".

### 1.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (2.4GHz Wi-Fi Portion).

## TEST REPORT

### EXHIBIT 2 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable at 0.8m height from the ground plane for emission testing at or below 1GHz and 1.5m for emission measurements above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

For maximizing emissions below 30MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

## TEST REPORT

### 2.1 Justification (Cont'd)

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC power line-conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst-case data is included in this report.

All data rates were tested under normal mode of Wi-Fi. Only the worst-case data is shown in the report for DSSS and OFDM.

For simultaneous transmission, both Wi-Fi and Bluetooth Classic portions are also switched on when taking radiated emission for determining worst-case spurious emission.

### 2.2 EUT Exercising Software

The EUT exercise program (EspRFTTestTool v4.6) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

### 2.3 Details of EUT and Description of Accessories

Not Applicable.

### 2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.


## TEST REPORT

### EXHIBIT 3 TEST RESULTS

#### 3.1 Maximum Conducted (Peak) Output Power at Antenna Terminals

##### RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 8.3.2.3 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Peak Antenna Gain = 3.71 dBi (Refer to Test Data1.pdf)

| Frequency (MHz)             | Output in dBm | Output in mW |
|-----------------------------|---------------|--------------|
| Low Channel: 2412 (P.6)     | 16.90         | 48.98        |
| Middle Channel: 2437 (P.18) | 17.23         | 52.84        |
| High Channel: 2462 (P.27)   | 16.43         | 43.95        |

IEEE 802.11g (OFDM, 6 Mbps) Peak Antenna Gain = 3.71dBi (Refer to Test Data2.pdf)

| Frequency (MHz)             | Output in dBm | Output in mW |
|-----------------------------|---------------|--------------|
| Low Channel: 2412 (P.6)     | 13.95         | 24.83        |
| Middle Channel: 2437 (P.18) | 14.72         | 29.65        |
| High Channel: 2462 (P.27)   | 14.04         | 25.35        |

IEEE 802.11n (20MHz) (OFDM, MCS0) Peak Antenna Gain = 3.71 dBi (Refer to Test Data3.pdf)

| Frequency (MHz)             | Output in dBm | Output in mW |
|-----------------------------|---------------|--------------|
| Low Channel: 2412 (P.6)     | 13.58         | 22.80        |
| Middle Channel: 2437 (P.18) | 14.34         | 27.16        |
| High Channel: 2462 (P.27)   | 13.64         | 23.12        |

IEEE 802.11n (40MHz) (OFDM, MCS0) Peak Antenna Gain = 3.71 dBi (Refer to Test Data4.pdf)

| Frequency (MHz)             | Output in dBm | Output in mW |
|-----------------------------|---------------|--------------|
| Low Channel: 2422 (P.6)     | 15.06         | 32.06        |
| Middle Channel: 2437 (P.18) | 15.03         | 31.84        |
| High Channel: 2452 (P.27)   | 14.56         | 28.58        |

## TEST REPORT

### 3.1 Maximum Conducted (Peak) Output Power at Antenna Terminals (Cont'd)

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)

Max. Conducted (Peak) Output Level = 17.23 dBm

IEEE 802.11g (OFDM, 6 Mbps)

Max. Conducted (Peak) Output Level = 14.72 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)

Max. Conducted (Peak) Output Level = 14.34 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)

Max. Conducted (Peak) Output Level = 15.06 dBm


Limits:

1W (30dBm) for antennas with gains of 6dBi or less.

## TEST REPORT

### 3.2 Minimum 6dB RF Bandwidth

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

| Frequency (MHz)             | 6dB Bandwidth (MHz) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.3)     | 10.10               |
| Middle Channel: 2437 (P.17) | 9.15                |
| High Channel: 2462 (P.26)   | 8.85                |

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

| Frequency (MHz)             | 6dB Bandwidth (MHz) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.3)     | 16.45               |
| Middle Channel: 2437 (P.17) | 16.55               |
| High Channel: 2462 (P.26)   | 16.50               |

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

| Frequency (MHz)             | 6dB Bandwidth (MHz) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.3)     | 17.15               |
| Middle Channel: 2437 (P.17) | 17.05               |
| High Channel: 2462 (P.26)   | 17.20               |

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

| Frequency (MHz)             | 6dB Bandwidth (MHz) |
|-----------------------------|---------------------|
| Low Channel: 2422 (P.3)     | 32.35               |
| Middle Channel: 2437 (P.17) | 32.85               |
| High Channel: 2452 (P.26)   | 32.65               |


Limits:

6dB bandwidth shall be at least 500kHz.

## TEST REPORT

### 3.3 Minimum Power Spectral Density

The figure below shows the test setup, which is utilized to make these measurements.



Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

| Frequency (MHz)             | PSD in 100kHz (dBm) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.7)     | 2.762               |
| Middle Channel: 2437 (P.19) | 3.747               |
| High Channel: 2462 (P.28)   | 2.736               |

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

| Frequency (MHz)             | PSD in 100kHz (dBm) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.7)     | -5.303              |
| Middle Channel: 2437 (P.19) | -4.674              |
| High Channel: 2462 (P.28)   | -5.019              |

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

| Frequency (MHz)             | PSD in 100kHz (dBm) |
|-----------------------------|---------------------|
| Low Channel: 2412 (P.7)     | -5.269              |
| Middle Channel: 2437 (P.19) | -4.390              |
| High Channel: 2462 (P.28)   | -4.691              |

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

| Frequency (MHz)             | PSD in 100kHz (dBm) |
|-----------------------------|---------------------|
| Low Channel: 2422 (P.7)     | -6.311              |
| Middle Channel: 2437 (P.19) | -6.568              |
| High Channel: 2452 (P.28)   | -6.821              |


Cable Loss: 0.5dB

Limit: 8dBm in 3kHz

## TEST REPORT

### 3.4 Out of Band Conducted Emissions

The figure below shows the test setup, which is utilized to make these measurements.



For IEEE 802.11b/g/n20MHz/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for IEEE 802.11b/g/n20MHz/n40MHz.

The measurement procedures under sections 11 of KDB558074 D01 v05r02 (April 2, 2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level for IEEE 802.11b/g/n20MHz/n40MHz.

IEEE 802.11b (DSSS, 1 Mbps) (Refer to Test Data1.pdf)

| Frequency (MHz)      | Out of Band Conducted Emissions | Band Edge |
|----------------------|---------------------------------|-----------|
| Low Channel: 2412    | P.12                            | P.8       |
| Middle Channel: 2437 | P.21                            | N/A       |
| High Channel: 2462   | P.33                            | P.29      |

IEEE 802.11g (OFDM, 6 Mbps) (Refer to Test Data2.pdf)

| Frequency (MHz)      | Out of Band Conducted Emissions | Band Edge |
|----------------------|---------------------------------|-----------|
| Low Channel: 2412    | P.12                            | P.8       |
| Middle Channel: 2437 | P.21                            | N/A       |
| High Channel: 2462   | P.33                            | P.29      |

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data3.pdf)

| Frequency (MHz)      | Out of Band Conducted Emissions | Band Edge |
|----------------------|---------------------------------|-----------|
| Low Channel: 2412    | P.12                            | P.8       |
| Middle Channel: 2437 | P.21                            | N/A       |
| High Channel: 2462   | P.33                            | P.29      |

## TEST REPORT

IEEE 802.11n (40MHz) (OFDM, MCS0) (Refer to Test Data4.pdf)

| Frequency (MHz)      | Out of Band Conducted Emissions | Band Edge |
|----------------------|---------------------------------|-----------|
| Low Channel: 2422    | P.12                            | P.8       |
| Middle Channel: 2437 | P.21                            | N/A       |
| High Channel: 2452   | P.33                            | P.29      |

## TEST REPORT

### 3.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

|       |    |   |                                                           |
|-------|----|---|-----------------------------------------------------------|
| Where | FS | = | Field Strength in dB $\mu$ V/m                            |
|       | RA | = | Receiver Amplitude (including preamplifier) in dB $\mu$ V |
|       | CF | = | Cable Attenuation Factor in dB                            |
|       | AF | = | Antenna Factor in dB                                      |
|       | AG | = | Amplifier Gain in dB                                      |
|       | PD | = | Pulse Desensitization in dB                               |
|       | AV | = | Average Factor in -dB                                     |

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned}
 RA &= 62.0 \text{ dB}\mu\text{V} \\
 AF &= 7.4 \text{ dB} \\
 CF &= 1.6 \text{ dB} \\
 AG &= 29.0 \text{ dB} \\
 PD &= 0.0 \text{ dB} \\
 AV &= -10.0 \text{ dB} \\
 FS &= 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}
 \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## TEST REPORT

### 3.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 3.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission at 4824 MHz.

The worst case radiated emission configuration photographs are saved with filename:  
Setup Photos.pdf

#### 3.6.2 Radiated Emission Data


The data in tables 1-15 list the significant emission frequencies, the limit and the margin of compliance.

Judgement – Passed by 0.1 dB margin


## TEST REPORT

### 3.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

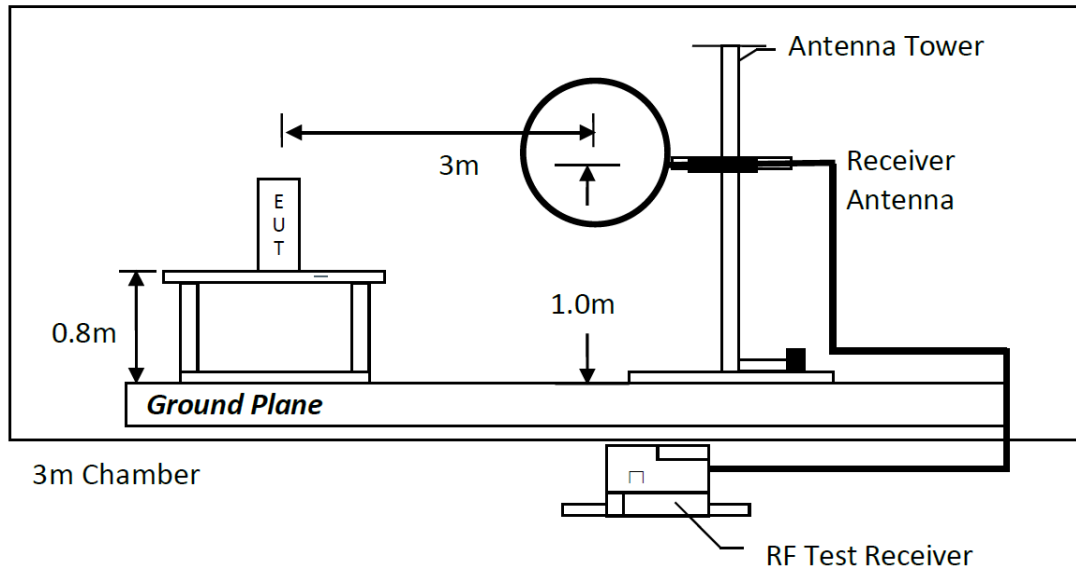


Test setup of radiated emissions 9kHz to 30MHz

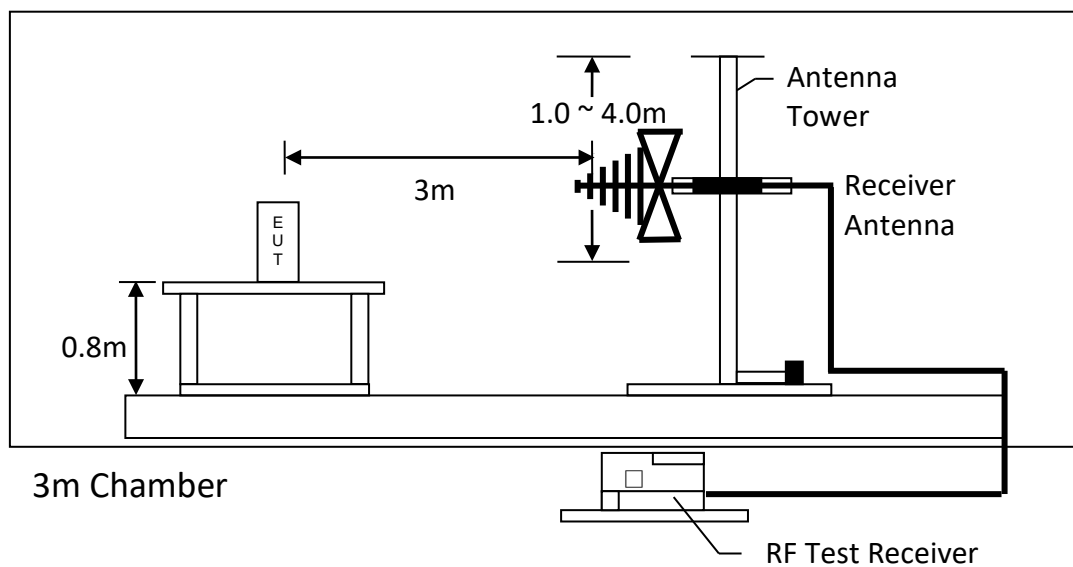

Test setup of radiated emissions up to 1GHz

## TEST REPORT

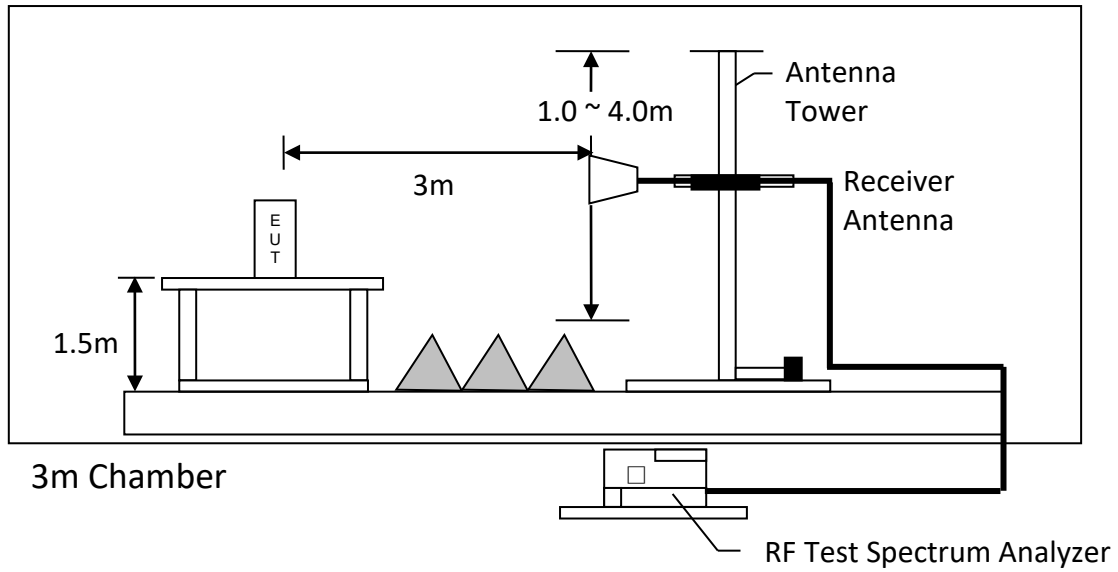

Test setup of radiated emissions above 1GHz

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1, IEEE 802.11b DSSS 1Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2390.000        | 49.4           | 33                | 29.4                | 45.8                         | 54.0                         | -8.2        |
| V            | 4824.000        | 52.0           | 33                | 34.9                | 53.9                         | 54.0                         | -0.1        |
| H            | 7236.000        | 31.0           | 33                | 37.9                | 35.9                         | 54.0                         | -18.1       |
| H            | 9648.000        | 32.8           | 33                | 40.4                | 40.2                         | 54.0                         | -13.8       |
| V            | 12060.000       | 36.5           | 33                | 40.5                | 44.0                         | 54.0                         | -10.0       |
| H            | 14472.000       | 37.5           | 33                | 40.0                | 44.5                         | 54.0                         | -9.5        |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2390.000        | 63.0           | 33                | 29.4                | 59.4                      | 74.0                      | -14.6       |
| V            | 4824.000        | 57.7           | 33                | 34.9                | 59.6                      | 74.0                      | -14.4       |
| H            | 7236.000        | 44.1           | 33                | 37.9                | 49.0                      | 74.0                      | -25.0       |
| H            | 9648.000        | 45.7           | 33                | 40.4                | 53.1                      | 74.0                      | -20.9       |
| V            | 12060.000       | 50.1           | 33                | 40.5                | 57.6                      | 74.0                      | -16.4       |
| H            | 14472.000       | 51.2           | 33                | 40.0                | 58.2                      | 74.0                      | -15.8       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 2, IEEE 802.11b DSSS 1Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 4874.000        | 51.8           | 33                | 34.9                | 53.7                         | 54.0                         | -0.3        |
| H            | 7311.000        | 30.6           | 33                | 37.9                | 35.5                         | 54.0                         | -18.5       |
| V            | 9748.000        | 35.6           | 33                | 40.4                | 43.0                         | 54.0                         | -11.0       |
| V            | 12185.000       | 37.8           | 33                | 40.5                | 45.3                         | 54.0                         | -8.7        |
| H            | 14622.000       | 37.8           | 33                | 38.4                | 43.2                         | 54.0                         | -10.8       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 4874.000        | 57.1           | 33                | 34.9                | 59.0                      | 74.0                      | -15.0       |
| H            | 7311.000        | 43.8           | 33                | 37.9                | 48.7                      | 74.0                      | -25.3       |
| V            | 9748.000        | 48.0           | 33                | 40.4                | 55.4                      | 74.0                      | -18.6       |
| V            | 12185.000       | 51.0           | 33                | 40.5                | 58.5                      | 74.0                      | -15.5       |
| H            | 14622.000       | 51.6           | 33                | 38.4                | 57.0                      | 74.0                      | -17.0       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 3, IEEE 802.11b DSSS 1Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2483.500        | 49.8           | 33                | 29.4                | 46.2                         | 54.0                         | -7.8        |
| V            | 4924.000        | 50.8           | 33                | 34.9                | 52.7                         | 54.0                         | -1.3        |
| V            | 7386.000        | 30.7           | 33                | 37.9                | 35.6                         | 54.0                         | -18.4       |
| H            | 9848.000        | 33.2           | 33                | 40.4                | 40.6                         | 54.0                         | -13.4       |
| V            | 12310.000       | 38.1           | 33                | 40.5                | 45.6                         | 54.0                         | -8.4        |
| V            | 14772.000       | 36.9           | 33                | 38.4                | 42.3                         | 54.0                         | -11.7       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2483.500        | 63.3           | 33                | 29.4                | 59.7                      | 74.0                      | -14.3       |
| V            | 4924.000        | 58.7           | 33                | 34.9                | 60.6                      | 74.0                      | -13.4       |
| V            | 7386.000        | 43.9           | 33                | 37.9                | 48.8                      | 74.0                      | -25.2       |
| H            | 9848.000        | 46.3           | 33                | 40.4                | 53.7                      | 74.0                      | -20.3       |
| V            | 12310.000       | 51.7           | 33                | 40.5                | 59.2                      | 74.0                      | -14.8       |
| V            | 14772.000       | 50.3           | 33                | 38.4                | 55.7                      | 74.0                      | -18.3       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 4, IEEE 802.11g OFDM, 6 Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2390.000        | 49.7           | 33                | 29.4                | 46.1                         | 54.0                         | -7.9        |
| H            | 4824.000        | 38.5           | 33                | 34.9                | 40.4                         | 54.0                         | -13.6       |
| V            | 7236.000        | 30.4           | 33                | 37.9                | 35.3                         | 54.0                         | -18.7       |
| H            | 9648.000        | 32.7           | 33                | 40.4                | 40.1                         | 54.0                         | -13.9       |
| H            | 12060.000       | 36.6           | 33                | 40.5                | 44.1                         | 54.0                         | -9.9        |
| H            | 14472.000       | 37.1           | 33                | 40.0                | 44.1                         | 54.0                         | -9.9        |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2390.000        | 65.5           | 33                | 29.4                | 61.9                      | 74.0                      | -12.1       |
| H            | 4824.000        | 51.3           | 33                | 34.9                | 53.2                      | 74.0                      | -20.8       |
| V            | 7236.000        | 43.5           | 33                | 37.9                | 48.4                      | 74.0                      | -25.6       |
| H            | 9648.000        | 45.7           | 33                | 40.4                | 53.1                      | 74.0                      | -20.9       |
| H            | 12060.000       | 50.2           | 33                | 40.5                | 57.7                      | 74.0                      | -16.3       |
| H            | 14472.000       | 50.7           | 33                | 40.0                | 57.7                      | 74.0                      | -16.3       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 5, IEEE 802.11g OFDM, 6 Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 4874.000        | 38.6           | 33                | 34.9                | 40.5                         | 54.0                         | -13.5       |
| H            | 7311.000        | 30.3           | 33                | 37.9                | 35.2                         | 54.0                         | -18.8       |
| V            | 9748.000        | 32.8           | 33                | 40.4                | 40.2                         | 54.0                         | -13.8       |
| V            | 12185.000       | 37.5           | 33                | 40.5                | 45.0                         | 54.0                         | -9.0        |
| V            | 14622.000       | 37.3           | 33                | 38.4                | 42.7                         | 54.0                         | -11.3       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 4874.000        | 51.4           | 33                | 34.9                | 53.3                      | 74.0                      | -20.7       |
| H            | 7311.000        | 44.0           | 33                | 37.9                | 48.9                      | 74.0                      | -25.1       |
| V            | 9748.000        | 46.2           | 33                | 40.4                | 53.6                      | 74.0                      | -20.4       |
| V            | 12185.000       | 51.2           | 33                | 40.5                | 58.7                      | 74.0                      | -15.3       |
| V            | 14622.000       | 51.2           | 33                | 38.4                | 56.6                      | 74.0                      | -17.4       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 6, IEEE 802.11g OFDM, 6 Mbps

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2483.500        | 50.9           | 33                | 29.4                | 47.3                         | 54.0                         | -6.7        |
| V            | 4924.000        | 39.5           | 33                | 34.9                | 41.4                         | 54.0                         | -12.6       |
| V            | 7386.000        | 30.6           | 33                | 37.9                | 35.5                         | 54.0                         | -18.5       |
| V            | 9848.000        | 33.0           | 33                | 40.4                | 40.4                         | 54.0                         | -13.6       |
| V            | 12310.000       | 37.6           | 33                | 40.5                | 45.1                         | 54.0                         | -8.9        |
| H            | 14772.000       | 36.9           | 33                | 38.4                | 42.3                         | 54.0                         | -11.7       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2483.500        | 68.1           | 33                | 29.4                | 64.5                      | 74.0                      | -9.5        |
| V            | 4924.000        | 52.1           | 33                | 34.9                | 54.0                      | 74.0                      | -20.0       |
| V            | 7386.000        | 43.7           | 33                | 37.9                | 48.6                      | 74.0                      | -25.4       |
| V            | 9848.000        | 47.2           | 33                | 40.4                | 54.6                      | 74.0                      | -19.4       |
| V            | 12310.000       | 50.9           | 33                | 40.5                | 58.4                      | 74.0                      | -15.6       |
| H            | 14772.000       | 50.3           | 33                | 38.4                | 55.7                      | 74.0                      | -18.3       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 7, IEEE 802.11n (20MHz) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2390.000        | 50.6           | 33                | 29.4                | 47.0                         | 54.0                         | -7.0        |
| V            | 4824.000        | 39.0           | 33                | 34.9                | 40.9                         | 54.0                         | -13.1       |
| V            | 7236.000        | 30.1           | 33                | 37.9                | 35.0                         | 54.0                         | -19.0       |
| V            | 9648.000        | 32.2           | 33                | 40.4                | 39.6                         | 54.0                         | -14.4       |
| V            | 12060.000       | 36.5           | 33                | 40.5                | 44.0                         | 54.0                         | -10.0       |
| H            | 14472.000       | 37.0           | 33                | 40.0                | 44.0                         | 54.0                         | -10.0       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2390.000        | 68.5           | 33                | 29.4                | 64.9                      | 74.0                      | -9.1        |
| V            | 4824.000        | 52.6           | 33                | 34.9                | 54.5                      | 74.0                      | -19.5       |
| V            | 7236.000        | 43.3           | 33                | 37.9                | 48.2                      | 74.0                      | -25.8       |
| V            | 9648.000        | 45.7           | 33                | 40.4                | 53.1                      | 74.0                      | -20.9       |
| V            | 12060.000       | 50.8           | 33                | 40.5                | 58.3                      | 74.0                      | -15.7       |
| H            | 14472.000       | 50.2           | 33                | 40.0                | 57.2                      | 74.0                      | -16.8       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 8, IEEE 802.11n (20MHz) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| V            | 4874.000        | 39.0           | 33                | 34.9                | 40.9                         | 54.0                         | -13.1       |
| H            | 7311.000        | 30.2           | 33                | 37.9                | 35.1                         | 54.0                         | -18.9       |
| H            | 9748.000        | 32.8           | 33                | 40.4                | 40.2                         | 54.0                         | -13.8       |
| V            | 12185.000       | 37.4           | 33                | 40.5                | 44.9                         | 54.0                         | -9.1        |
| V            | 14622.000       | 37.5           | 33                | 38.4                | 42.9                         | 54.0                         | -11.1       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| V            | 4874.000        | 53.0           | 33                | 34.9                | 54.9                      | 74.0                      | -19.1       |
| H            | 7311.000        | 44.6           | 33                | 37.9                | 49.5                      | 74.0                      | -24.5       |
| H            | 9748.000        | 46.3           | 33                | 40.4                | 53.7                      | 74.0                      | -20.3       |
| V            | 12185.000       | 50.8           | 33                | 40.5                | 58.3                      | 74.0                      | -15.7       |
| V            | 14622.000       | 50.7           | 33                | 38.4                | 56.1                      | 74.0                      | -17.9       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 11

Table 9, IEEE 802.11n (20MHz) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2483.500        | 51.8           | 33                | 29.4                | 48.2                         | 54.0                         | -5.8        |
| V            | 4924.000        | 39.2           | 33                | 34.9                | 41.1                         | 54.0                         | -12.9       |
| H            | 7386.000        | 30.5           | 33                | 37.9                | 35.4                         | 54.0                         | -18.6       |
| V            | 9848.000        | 32.5           | 33                | 40.4                | 39.9                         | 54.0                         | -14.1       |
| H            | 12310.000       | 37.8           | 33                | 40.5                | 45.3                         | 54.0                         | -8.7        |
| H            | 14772.000       | 36.9           | 33                | 38.4                | 42.3                         | 54.0                         | -11.7       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2483.500        | 68.8           | 33                | 29.4                | 65.2                      | 74.0                      | -8.8        |
| V            | 4924.000        | 52.6           | 33                | 34.9                | 54.5                      | 74.0                      | -19.5       |
| H            | 7386.000        | 43.8           | 33                | 37.9                | 48.7                      | 74.0                      | -25.3       |
| V            | 9848.000        | 46.6           | 33                | 40.4                | 54.0                      | 74.0                      | -20.0       |
| H            | 12310.000       | 51.0           | 33                | 40.5                | 58.5                      | 74.0                      | -15.5       |
| H            | 14772.000       | 50.7           | 33                | 38.4                | 56.1                      | 74.0                      | -17.9       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 03

Table 10, IEEE 802.11n (HT40) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2390.000        | 50.4           | 33                | 29.4                | 46.8                         | 54.0                         | -7.2        |
| H            | 4844.000        | 37.6           | 33                | 34.9                | 39.5                         | 54.0                         | -14.5       |
| V            | 7266.000        | 30.2           | 33                | 37.9                | 35.1                         | 54.0                         | -18.9       |
| H            | 9688.000        | 32.4           | 33                | 40.4                | 39.8                         | 54.0                         | -14.2       |
| H            | 12110.000       | 36.8           | 33                | 40.5                | 44.3                         | 54.0                         | -9.7        |
| V            | 14532.000       | 38.3           | 33                | 38.4                | 43.7                         | 54.0                         | -10.3       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2390.000        | 67.0           | 33                | 29.4                | 63.4                      | 74.0                      | -10.6       |
| H            | 4844.000        | 49.5           | 33                | 34.9                | 51.4                      | 74.0                      | -22.6       |
| V            | 7266.000        | 43.6           | 33                | 37.9                | 48.5                      | 74.0                      | -25.5       |
| H            | 9688.000        | 45.8           | 33                | 40.4                | 53.2                      | 74.0                      | -20.8       |
| H            | 12110.000       | 49.8           | 33                | 40.5                | 57.3                      | 74.0                      | -16.7       |
| V            | 14532.000       | 51.6           | 33                | 38.4                | 57.0                      | 74.0                      | -17.0       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 06

Table 11, IEEE 802.11n (HT40) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| V            | 4874.000        | 35.8           | 33                | 34.9                | 37.7                         | 54.0                         | -16.3       |
| H            | 7311.000        | 30.1           | 33                | 37.9                | 35.0                         | 54.0                         | -19.0       |
| H            | 9748.000        | 32.6           | 33                | 40.4                | 40.0                         | 54.0                         | -14.0       |
| H            | 12185.000       | 37.3           | 33                | 40.5                | 44.8                         | 54.0                         | -9.2        |
| H            | 14622.000       | 37.5           | 33                | 38.4                | 42.9                         | 54.0                         | -11.1       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| V            | 4874.000        | 48.1           | 33                | 34.9                | 50.0                      | 74.0                      | -24.0       |
| H            | 7311.000        | 43.4           | 33                | 37.9                | 48.3                      | 74.0                      | -25.7       |
| H            | 9748.000        | 46.2           | 33                | 40.4                | 53.6                      | 74.0                      | -20.4       |
| H            | 12185.000       | 51.2           | 33                | 40.5                | 58.7                      | 74.0                      | -15.3       |
| H            | 14622.000       | 50.6           | 33                | 38.4                | 56.0                      | 74.0                      | -18.0       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX-Channel 09

Table 12, IEEE 802.11n (HT40) OFDM, MCS0

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (average) (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|------------------------------|------------------------------|-------------|
| H            | 2483.500        | 52.2           | 33                | 29.4                | 48.6                         | 54.0                         | -5.4        |
| H            | 4904.000        | 36.2           | 33                | 34.9                | 38.1                         | 54.0                         | -15.9       |
| H            | 7356.000        | 30.2           | 33                | 37.9                | 35.1                         | 54.0                         | -18.9       |
| V            | 9808.000        | 32.8           | 33                | 40.4                | 40.2                         | 54.0                         | -13.8       |
| V            | 12260.000       | 37.0           | 33                | 40.5                | 44.5                         | 54.0                         | -9.5        |
| V            | 14712.000       | 36.9           | 33                | 38.4                | 42.3                         | 54.0                         | -11.7       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| H            | 2483.500        | 68.2           | 33                | 29.4                | 64.6                      | 74.0                      | -9.4        |
| H            | 4904.000        | 48.7           | 33                | 34.9                | 50.6                      | 74.0                      | -23.4       |
| H            | 7356.000        | 43.6           | 33                | 37.9                | 48.5                      | 74.0                      | -25.5       |
| V            | 9808.000        | 46.3           | 33                | 40.4                | 53.7                      | 74.0                      | -20.3       |
| V            | 12260.000       | 51.0           | 33                | 40.5                | 58.5                      | 74.0                      | -15.5       |
| V            | 14712.000       | 50.1           | 33                | 38.4                | 55.5                      | 74.0                      | -18.5       |

- Notes:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.
  8. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  9. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: B Mode TX-Channel 01 Baseband

Table 13

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|-------------|
| V            | 64.799          | 29.5           | 16           | 9.0                 | 22.5               | 40.0                 | -17.5       |
| V            | 123.484         | 25.6           | 16           | 14.0                | 23.6               | 43.5                 | -19.9       |
| H            | 195.749         | 26.8           | 16           | 16.0                | 26.8               | 43.5                 | -16.7       |
| H            | 399.934         | 24.3           | 16           | 25.0                | 33.3               | 46.0                 | -12.7       |
| V            | 640.009         | 23.2           | 16           | 29.0                | 36.2               | 46.0                 | -9.8        |
| H            | 800.059         | 19.7           | 16           | 31.0                | 34.7               | 46.0                 | -11.3       |

- Notes:
1. Peak detector are used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  5. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: N40 Mode TX-Channel 09 Baseband

Table 14

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|-------------|
| V            | 35.093          | 27.0           | 16           | 10.0                | 21.0               | 40.0                 | -19.0       |
| V            | 159.859         | 28.5           | 16           | 16.0                | 28.5               | 43.5                 | -15.0       |
| H            | 399.934         | 21.4           | 16           | 25.0                | 30.4               | 46.0                 | -15.6       |
| H            | 479.959         | 20.1           | 16           | 26.0                | 30.1               | 46.0                 | -15.9       |
| H            | 640.009         | 23.4           | 16           | 29.0                | 36.4               | 46.0                 | -9.6        |
| H            | 720.034         | 19.0           | 16           | 30.0                | 33.0               | 46.0                 | -13.0       |

- Notes:
1. Peak detector are used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  5. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSION DATA

Mode: Wi-Fi and Bluetooth Operating

Table 15

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|-------------|
| V            | 82.138          | 32.9           | 16           | 7.0                 | 23.9               | 40.0                 | -16.1       |
| H            | 320.030         | 27.6           | 16           | 23.0                | 34.6               | 46.0                 | -11.4       |
| V            | 374.956         | 25.2           | 16           | 24.0                | 33.2               | 46.0                 | -12.8       |
| H            | 480.000         | 29.1           | 16           | 26.0                | 39.1               | 46.0                 | -6.9        |
| H            | 559.984         | 24.5           | 16           | 28.0                | 36.5               | 46.0                 | -9.5        |
| H            | 720.034         | 21.7           | 16           | 30.0                | 35.7               | 46.0                 | -10.3       |

- Notes:
1. Peak and Quasi-Peak detector are used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  5. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSION PLOTS

Mode: B Mode TX-Channel 01

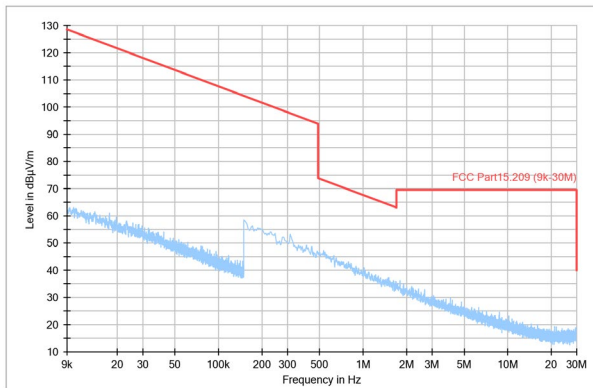


Figure 1. 9k-30MHz

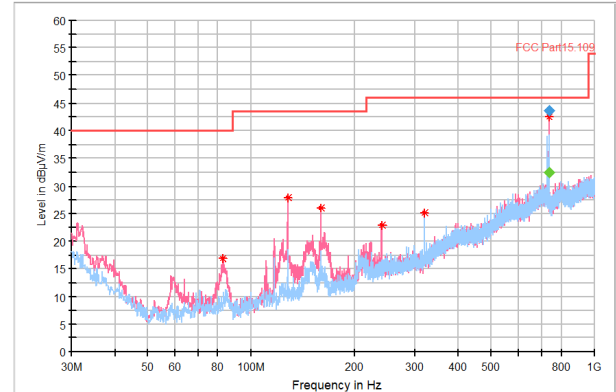


Figure 2. 30M-1GHz

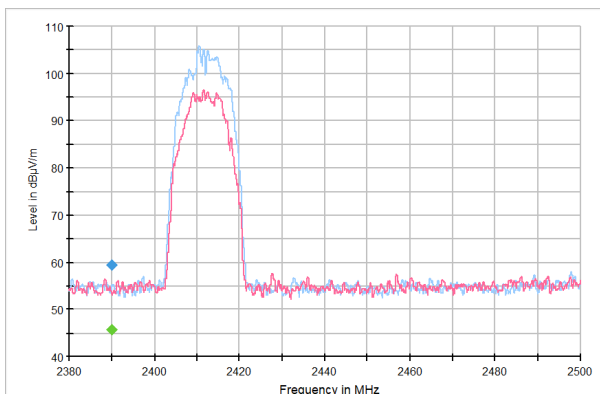


Figure 3. Band Edge

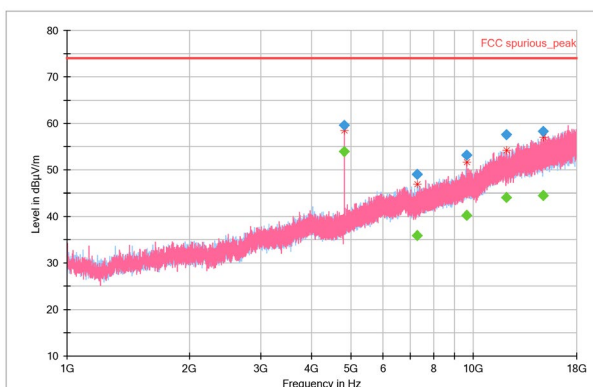


Figure 4. 1-18GHz Peak

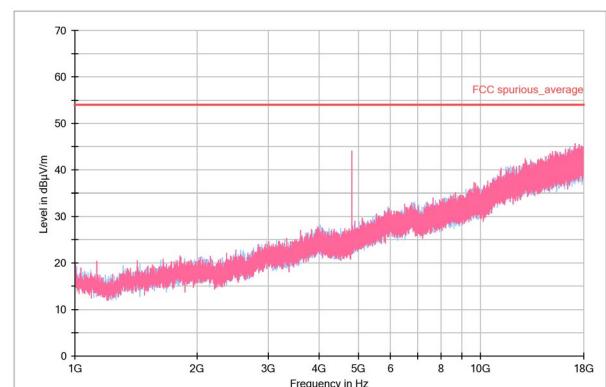


Figure 5. 1-18GHz Average

For Figure 4 and 5, Fundamental emission is filtered out by notch filter during measurement.

## TEST REPORT

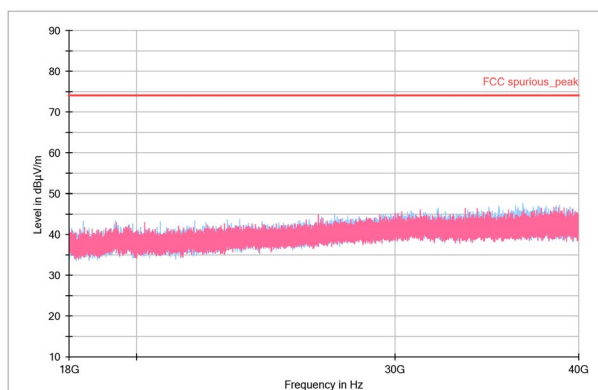


Figure 6. 18-40GHz Peak

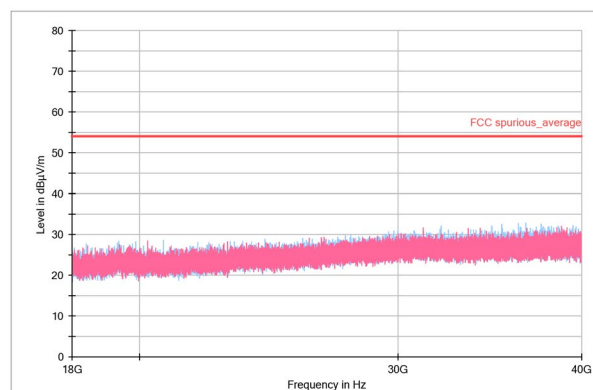


Figure 7. 18-40GHz Average

## TEST REPORT

### RADIATED EMISSION PLOTS

Mode: N40 Mode TX-Channel 09

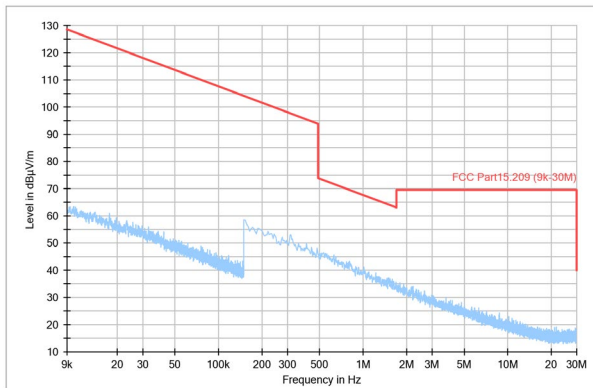


Figure 8. 9k-30MHz

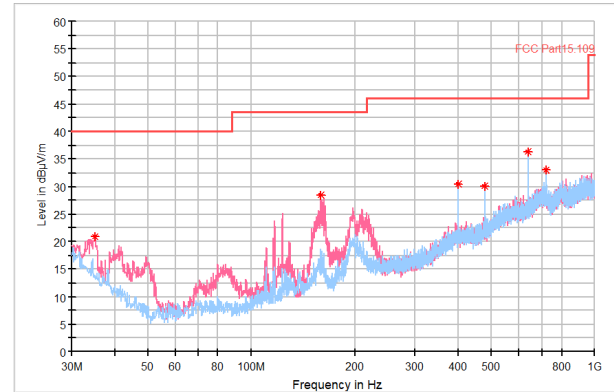


Figure 9. 30M-1GHz

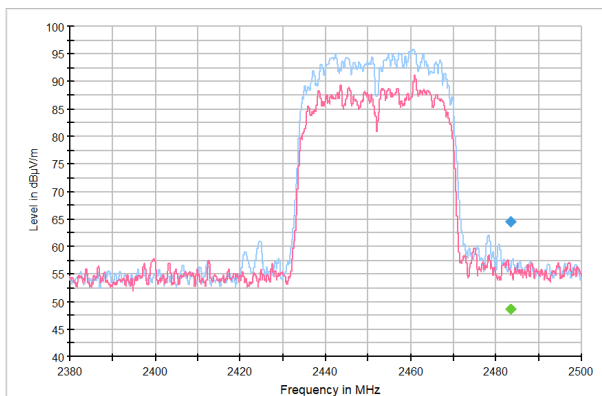


Figure 10. Band Edge

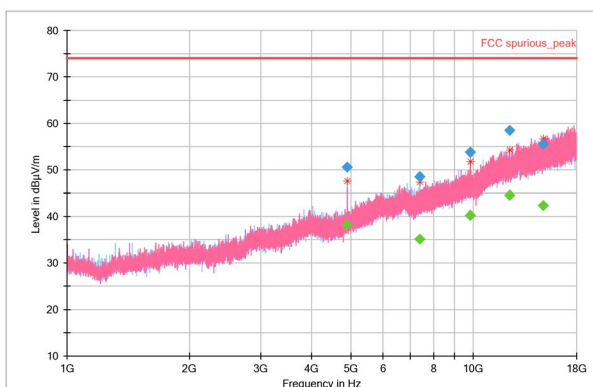


Figure 11. 1-18GHz Peak

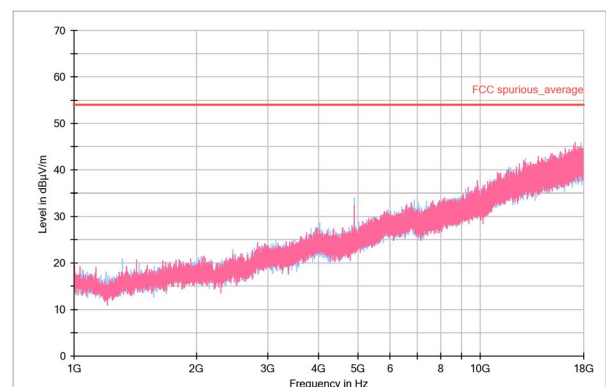


Figure 12. 1-18GHz Average

For Figure 11 and 12, Fundamental emission is filtered out by notch filter during measurement.

## TEST REPORT

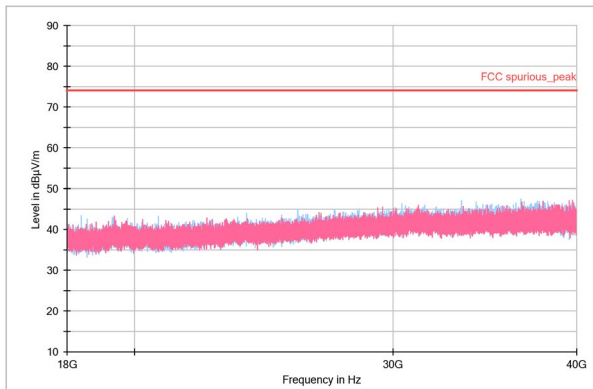


Figure 13. 18-40GHz Peak

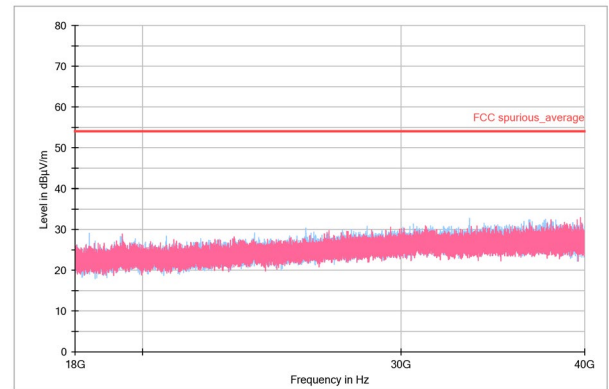


Figure 14. 18-40GHz Average

## TEST REPORT

### RADIATED EMISSION PLOTS

Mode: Wi-Fi and Bluetooth Operating

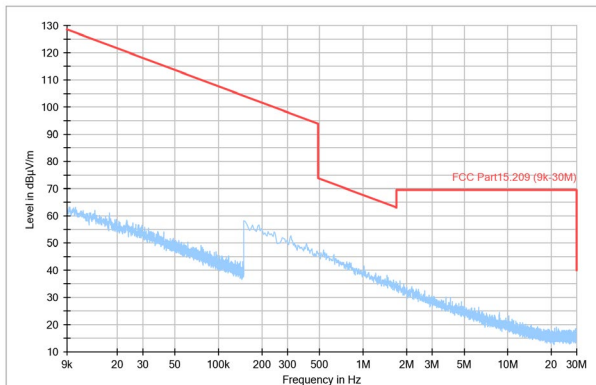


Figure 15. 9k-30MHz

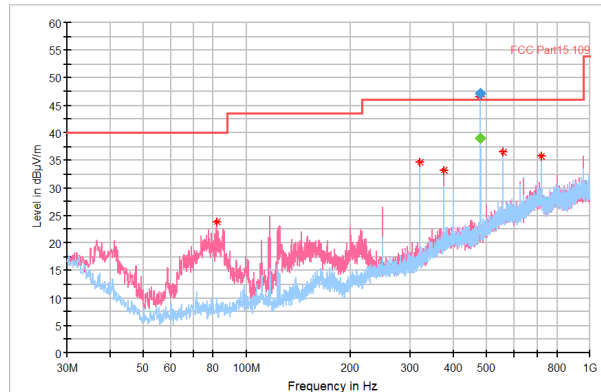


Figure 16. 30M-1GHz

## TEST REPORT

### 3.7 Transmitter Duty Cycle Calculation

Not Applicable – No average factor is required

### 3.8 AC Power Line Conducted Emission

- ☐ Not Applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 3.8.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration at 0.5685 MHz.


The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: Setup Photos.pdf.

#### 3.8.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 3.16 dB margin

#### 3.8.3 Conducted Emission Test Setup

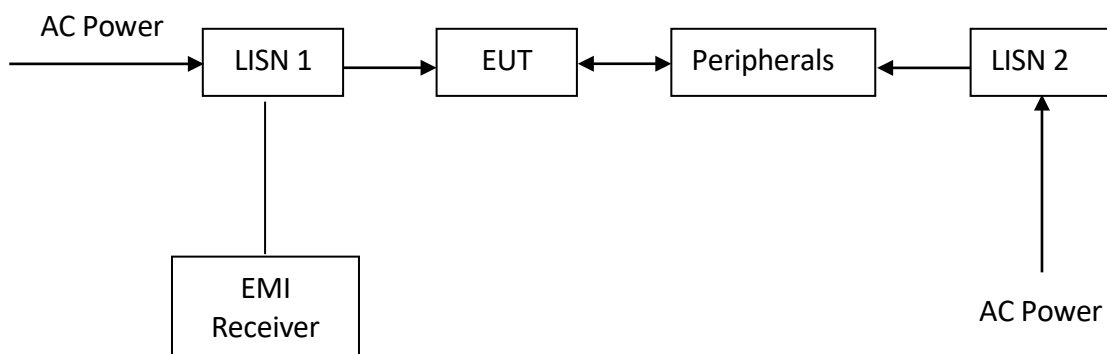

The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

## TEST REPORT

### AC POWER LINE CONDUCTED EMISSION


Worst Case: Wi-Fi and Bluetooth Operating



REW 9 kHz

MT 1 s

Att 10 dB AUTIC PREAMP OFF

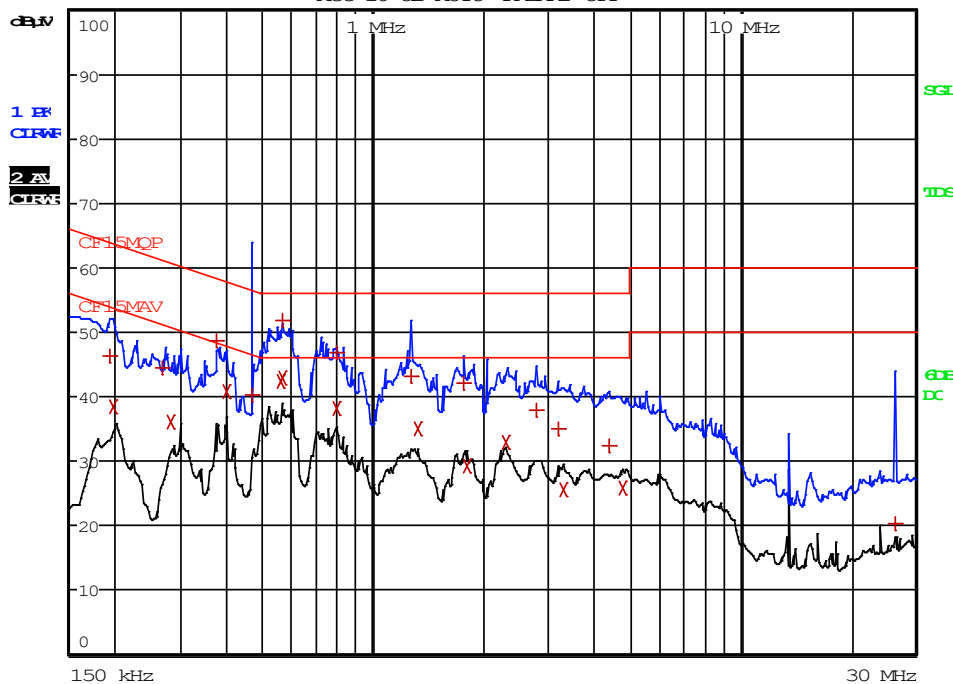

## TEST REPORT

### AC POWER LINE CONDUCTED EMISSION

Worst Case: Wi-Fi and Bluetooth Operating


| EDIT PEAK LIST (Final Measurement Results) |            |            |  |                |
|--------------------------------------------|------------|------------|--|----------------|
| Trace1:                                    | CF15MQP    |            |  |                |
| Trace2:                                    | CF15MAV    |            |  |                |
| Trace3:                                    | ---        |            |  |                |
| TRACE                                      | FREQUENCY  | LEVEL dBµV |  | DELTA LIMIT dB |
| 1 Quasi Peak                               | 195 kHz    | 46.27 N    |  | -17.54         |
| 2 CISPR Average                            | 199.5 kHz  | 38.51 N    |  | -15.11         |
| 1 Quasi Peak                               | 271.5 kHz  | 44.50 N    |  | -16.57         |
| 2 CISPR Average                            | 285 kHz    | 36.07 N    |  | -14.59         |
| 1 Quasi Peak                               | 379.5 kHz  | 48.63 N    |  | -9.65          |
| 2 CISPR Average                            | 397.5 kHz  | 40.68 N    |  | -7.21          |
| 1 Quasi Peak                               | 465 kHz    | 40.18 N    |  | -16.41         |
| 2 CISPR Average                            | 564 kHz    | 42.34 N    |  | -3.65          |
| 1 Quasi Peak                               | 568.5 kHz  | 51.83 N    |  | -4.16          |
| 2 CISPR Average                            | 568.5 kHz  | 42.83 N    |  | -3.16          |
| 1 Quasi Peak                               | 793.5 kHz  | 46.93 N    |  | -9.06          |
| 2 CISPR Average                            | 793.5 kHz  | 38.28 N    |  | -7.72          |
| 1 Quasi Peak                               | 1.275 MHz  | 43.26 N    |  | -12.73         |
| 2 CISPR Average                            | 1.3245 MHz | 34.99 N    |  | -11.00         |
| 1 Quasi Peak                               | 1.761 MHz  | 42.20 N    |  | -13.79         |
| 2 CISPR Average                            | 1.797 MHz  | 29.38 N    |  | -16.61         |
| 2 CISPR Average                            | 2.3145 MHz | 32.82 N    |  | -13.17         |
| 1 Quasi Peak                               | 2.8005 MHz | 37.91 N    |  | -18.08         |
| 1 Quasi Peak                               | 3.2145 MHz | 34.99 N    |  | -21.00         |
| 2 CISPR Average                            | 3.318 MHz  | 25.52 N    |  | -20.47         |

| EDIT PEAK LIST (Final Measurement Results) |             |            |  |                |
|--------------------------------------------|-------------|------------|--|----------------|
| Trace1:                                    | CF15MQP     |            |  |                |
| Trace2:                                    | CF15MAV     |            |  |                |
| Trace3:                                    | ---         |            |  |                |
| TRACE                                      | FREQUENCY   | LEVEL dBµV |  | DELTA LIMIT dB |
| 1 Quasi Peak                               | 4.398 MHz   | 32.35 L1   |  | -23.64         |
| 2 CISPR Average                            | 4.785 MHz   | 25.77 L1   |  | -20.22         |
| 1 Quasi Peak                               | 26.5245 MHz | 20.25 L1   |  | -39.74         |

## TEST REPORT

### OCCUPIED BANDWIDTH

The figure below shows the test setup, which is utilized to make these measurements.



Occupied Bandwidth Results: (IEEE 802.11b) (Refer to Test Data1.pdf)

| Frequency (MHz)             | Occupied Bandwidth (MHz) |
|-----------------------------|--------------------------|
| Low Channel: 2412 (P.4)     | 13.300                   |
| Middle Channel: 2437 (P.15) | 13.400                   |
| High Channel: 2462 (P.24)   | 13.300                   |

Occupied Bandwidth Results: (IEEE 802.11g) (Refer to Test Data2.pdf)

| Frequency (MHz)             | Occupied Bandwidth (MHz) |
|-----------------------------|--------------------------|
| Low Channel: 2412 (P.4)     | 16.400                   |
| Middle Channel: 2437 (P.15) | 16.500                   |
| High Channel: 2462 (P.24)   | 16.300                   |

Occupied Bandwidth Results: (IEEE 802.11n (20MHz)) (Refer to Test Data3.pdf)

| Frequency (MHz)             | Occupied Bandwidth (MHz) |
|-----------------------------|--------------------------|
| Low Channel: 2412 (P.4)     | 17.300                   |
| Middle Channel: 2437 (P.15) | 17.300                   |
| High Channel: 2462 (P.24)   | 17.300                   |

Occupied Bandwidth Results: (IEEE 802.11n (40MHz)) (Refer to Test Data4.pdf)

| Frequency (MHz)             | Occupied Bandwidth (MHz) |
|-----------------------------|--------------------------|
| Low Channel: 2422 (P.4)     | 34.500                   |
| Middle Channel: 2437 (P.15) | 34.750                   |
| High Channel: 2452 (P.24)   | 34.750                   |

## TEST REPORT

### EXHIBIT 4 EQUIPMENT LIST

#### 1) Radiated Emissions Test

| Equipment            | EMI Test Receiver (9kHz to 26.5GHz) | Biconical Antenna (30MHz to 300MHz) | Log Periodic Antenna |
|----------------------|-------------------------------------|-------------------------------------|----------------------|
| Registration No.     | EW-3156                             | EW-3242                             | EW-3243              |
| Manufacturer         | ROHDESCHWARZ                        | EMCO                                | EMCO                 |
| Model No.            | ESR26                               | 3110C                               | 3148B                |
| Calibration Date     | May 02, 2025                        | July 30, 2024                       | July 30, 2024        |
| Calibration Due Date | November 02, 2026                   | October 30, 2026                    | October 30, 2026     |

| Equipment            | Double Ridged Guide Antenna (1GHz - 18GHz) | Active Loop Antenna (H-field) (9kHz to 30MHz) | Solid State Low Noise Preamplifier Assembly (1 - 18)GHz |
|----------------------|--------------------------------------------|-----------------------------------------------|---------------------------------------------------------|
| Registration No.     | EW-1133                                    | EW-2313                                       | EW-3431                                                 |
| Manufacturer         | EMCO                                       | ELECTROMETRI                                  | BONN ELEKTRO                                            |
| Model No.            | 3115                                       | EM-6876                                       | BLMA 0118-5G                                            |
| Calibration Date     | January 23, 2025                           | December 19, 2025                             | December 11, 2025                                       |
| Calibration Due Date | October 23, 2026                           | December 19, 2027                             | December 11, 2026                                       |

| Equipment            | Notch Filter (cutoff frequency 2.4GHz to 2.5GHz) | 14m Double Shield RF Cable (9kHz - 6GHz) | RF Cable 14m (1GHz to 26.5GHz) |
|----------------------|--------------------------------------------------|------------------------------------------|--------------------------------|
| Registration No.     | EW-2213b                                         | EW-2376                                  | EW-2781                        |
| Manufacturer         | MICROTRONICS                                     | RADIAL                                   | GREATBILLION                   |
| Model No.            | BRM50701-02                                      | n m/br56/bnc m 14m                       | SMA m/SHF5MPU /SMA m ra14m,26G |
| Calibration Date     | March 04, 2026                                   | November 06, 2025                        | February 18, 2025              |
| Calibration Due Date | March 04, 2027                                   | November 06, 2026                        | August 18, 2026                |

| Equipment            | 12 metre RF Cable (1-40)GHz | Pyramidal Horn Antenna |
|----------------------|-----------------------------|------------------------|
| Registration No.     | EW-2774                     | EW-0905                |
| Manufacturer         | GREATBILLION                | EMCO                   |
| Model No.            | SMA m-m ra 12m 40G outdoor  | 3160-09                |
| Calibration Date     | February 18, 2025           | November 06, 2025      |
| Calibration Due Date | August 18, 2026             | May 06, 2027           |

## TEST REPORT

### EXHIBIT 4 EQUIPMENT LIST (CONT'D)

#### 2) Conducted Emissions Test

| Equipment            | RF Cable 240cm (RG142)<br>(9kHz to 30MHz) | Artificial Mains<br>Network | EMI Test Receiver<br>(9kHz to 3GHz) |
|----------------------|-------------------------------------------|-----------------------------|-------------------------------------|
| Registration No.     | EW-2454                                   | EW-3360                     | EW-3095                             |
| Manufacturer         | RADIALL                                   | ROHDESCHWARZ                | ROHDESCHWARZ                        |
| Model No.            | Bnc m st / 142 / bnc mra<br>240cm         | ENV-216                     | ESCI                                |
| Calibration Date     | June 12, 2025                             | June 23, 2025               | June 19, 2025                       |
| Calibration Due Date | September 12, 2026                        | September 23, 2026          | September 19, 2026                  |

#### 3) Conductive Measurement Test

| Equipment            | RF Power Meter with<br>Power Sensor (N1921A) | Signal and Spectrum<br>Analyzer (10Hz to 40GHz) |
|----------------------|----------------------------------------------|-------------------------------------------------|
| Registration No.     | EW-3309                                      | EW-3016                                         |
| Manufacturer         | ROHDESCHWARZ                                 | ROHDESCHWARZ                                    |
| Model No.            | NRP-Z81                                      | FSV40                                           |
| Calibration Date     | July 29, 2025                                | November 17, 2025                               |
| Calibration Due Date | October 29, 2026                             | November 17, 2026                               |

#### 4) Control Software for Radiated Emission

| Software Information |              |
|----------------------|--------------|
| Software Name        | EMC32        |
| Manufacturer         | ROHDESCHWARZ |
| Software version     | 10.50.40     |

END OF TEST REPORT