



RF EXPOSURE REPORT

Product Name: Card Reader
FCC ID: 2AHCR-ACRCRM11
Trademark: **Akuvox**
Model Number: ACR-CRM11
Prepared For: AKUVOX (XIAMEN) NETWORKS CO., LTD.
Address: 10/F, No.56 Guanri Road , Software Park II, Xiamen 361009, China
Manufacturer: AKUVOX (XIAMEN) NETWORKS CO., LTD.
Address: 10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Nov. 14, 2024
Sample tested Date: Nov. 14, 2024 to Nov. 21, 2024
Issue Date: Nov. 21, 2024
Report No.: CTB24111401803RF04
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310, 47 CFR§2.1091;
KDB 680106 D01 Wireless Power Transfer v04
Test Results: PASS
Remark: This is wireless charger EMF report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Table of Contents	Page
1 . GENERAL INFORMATION	3
1.1 . Test Supporting System	3
2 .LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2.1 . For conducted emission at the mains terminals test	4
3. METHOD OF MEASUREMENT	5
3. 1.Applicable Standard	5
4. TEST RESULT	6
4.1. Conducted Emission at the Mains Terminals Test	6
4.3. E and H field Strength	7

1. GENERAL INFORMATION

1.1. Test Supporting System

DC power

Description : DC power

Model No. : LONGWEI

Power Input : DC 12V

DC Line : Unshielded, Detachable 1.2m

2.LIST OF TEST AND MEASUREMENT INSTRUMENTS

2.1. For conducted emission at the mains terminals test

Item	Equipment	Brand	Model No.	Serial No.	Last calibration	Calibrated until
1	EMF TESTER	Wavecontrol	SMP600/WP4 00-3	15SN0164/21W P1200029	2024/11/30	2025/11/29


3. METHOD OF MEASUREMENT

3. 1.Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

4. TEST RESULT

4.1. Conducted Emission at the Mains Terminals Test

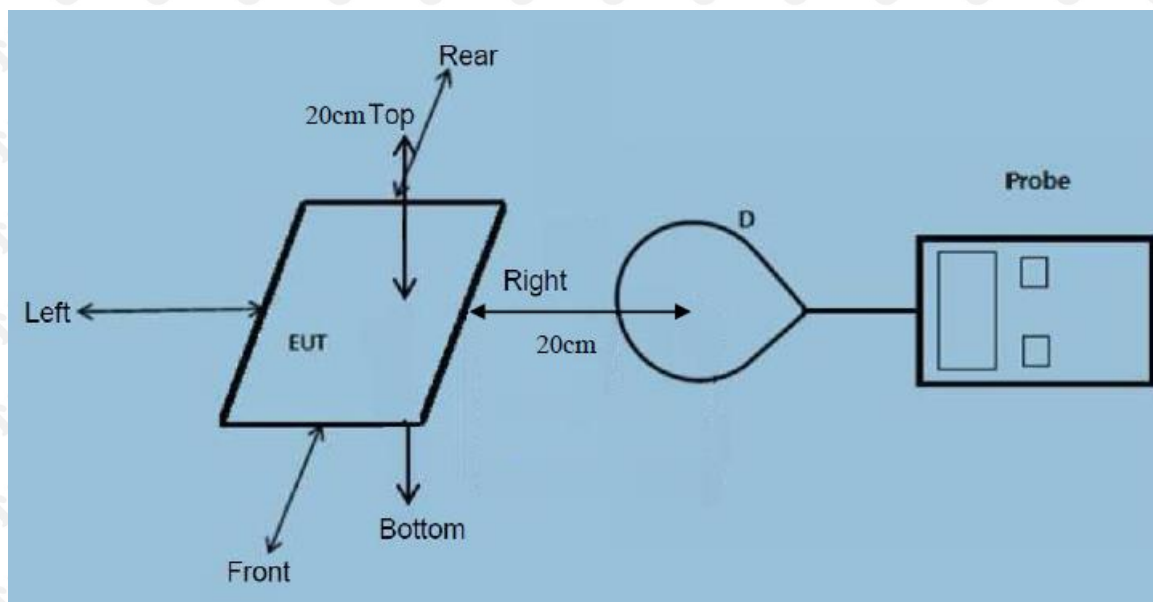

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device

Test Procedure:

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (20cm) which is between the edge of the charger and the geometric centre of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- The EUT were measured according to the dictates of KDB 680106v04

4.3. E and H field Strength Point A

E-Field test results the electric field strength at 20cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (V/m)
1%	125	8.13	7.54	7.66	8.19	8.10	614
50%	125	7.81	7.59	7.40	8.24	7.84	614
99%	125	7.69	7.92	7.43	8.02	7.61	614

H-Field test results the electric field strength at 20cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (A/m)
1%	125	0.26	0.25	0.21	0.34	0.27	1.63
50%	125	0.18	0.17	0.17	0.28	0.25	1.63
99%	125	0.06	0.20	0.13	0.18	0.30	1.63

Point B

E-Field test results the electric field strength at 22cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (V/m)
1%	125	8.06	7.45	7.55	8.09	7.94	614
50%	125	7.80	7.43	7.35	7.95	7.63	614
99%	125	7.65	7.56	7.28	7.86	7.48	614

H-Field test results the electric field strength at 22cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (A/m)
1%	125	0.26	0.23	0.20	0.26	0.23	1.63
50%	125	0.13	0.12	0.12	0.30	0.28	1.63
99%	125	0.04	0.16	0.08	0.15	0.28	1.63

Point C

E-Field test results the electric field strength at 24cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (V/m)
1%	125	8.08	7.44	7.57	8.15	7.96	614
50%	125	7.81	7.47	7.40	7.99	7.68	614
99%	125	7.73	7.59	7.37	7.87	7.49	614

H-Field test results the electric field strength at 24cm around the EUT.

battery level	Frequency Range (kHz)	Test Position Right	Test Position Front	Test Position Rear	Test Position Left	Test Position Top	Limits Test (A/m)
1%	125	0.26	0.24	0.25	0.33	0.25	1.63
50%	125	0.19	0.15	0.16	0.31	0.32	1.63
99%	125	0.10	0.16	0.11	0.18	0.30	1.63

*****THE END*****