



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: AKUVOX (XIAMEN) NETWORKS CO., LTD.

Address: 10/F, No.56, Software Park II , Xiamen, China

FCC ID: 2AHCR-C313XV3

Product Name: Indoor Monitor

Model Number: C313W

Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22010028-00B

Date Of Issue: 2022-05-05

Reviewed By: Sun Zhong *Sun Zhong*

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS	2
1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION	5
1.2.4 Block Diagram of Test Setup	6
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS	10
3.1.1 EUT Setup	10
3.1.2 EMI Test Receiver Setup	10
3.1.3 Test Procedure	11
3.1.4 Corrected Amplitude & Margin Calculation	11
3.2 RADIATION SPURIOUS EMISSIONS	12
3.2.1 EUT Setup	12
3.2.2 EMI Test Receiver Setup	13
3.2.3 Test Procedure	13
3.2.4 Corrected Amplitude & Margin Calculation	13
4. TEST DATA AND RESULTS	14
4.1 AC LINE CONDUCTED EMISSIONS	14
4.2 RADIATION SPURIOUS EMISSIONS	19

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Indoor Monitor
EUT Model:	C313W
Highest Operation Frequency:	2462 MHz
Rated Input Voltage:	DC 12V from adapter or 48V from POE
Serial Number:	CR22010028-RF-S1
EUT Received Date:	2022.1.19
EUT Received Status:	Good

Accessory Information:

No.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Operating
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Adapter	HA65NM130	CN-OFPC2Y-CH200-14M-061U-A07
DELL	Laptop	E6410	GYXJ3 A00 JSD2
HUAWEI	Adapter(POE)	POE35-56A	EMZBPA21103001
RISUNIC	Adapter	RA040-1202000JP	N/A
TOTO LINK	Router	X5000R	X5000RK9T0560
TaoTimeClub	Load	100W40RJ	L03


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	1.5	EUT	Laptop
RJ45 Cable	No	Yes	3	EUT	Router
Cable	No	No	0.3	EUT	Load
Power Cable	No	No	1	EUT	Adapter
RJ45 Cable	No	No	1	EUT	POE Adapter
RJ45 Cable	No	Yes	3	POE Adapter	Router
Power Cable	No	No	1.2	POE Adapter	LISN


1.2.4 Block Diagram of Test Setup

Conducted emissions:

Adapter mode:

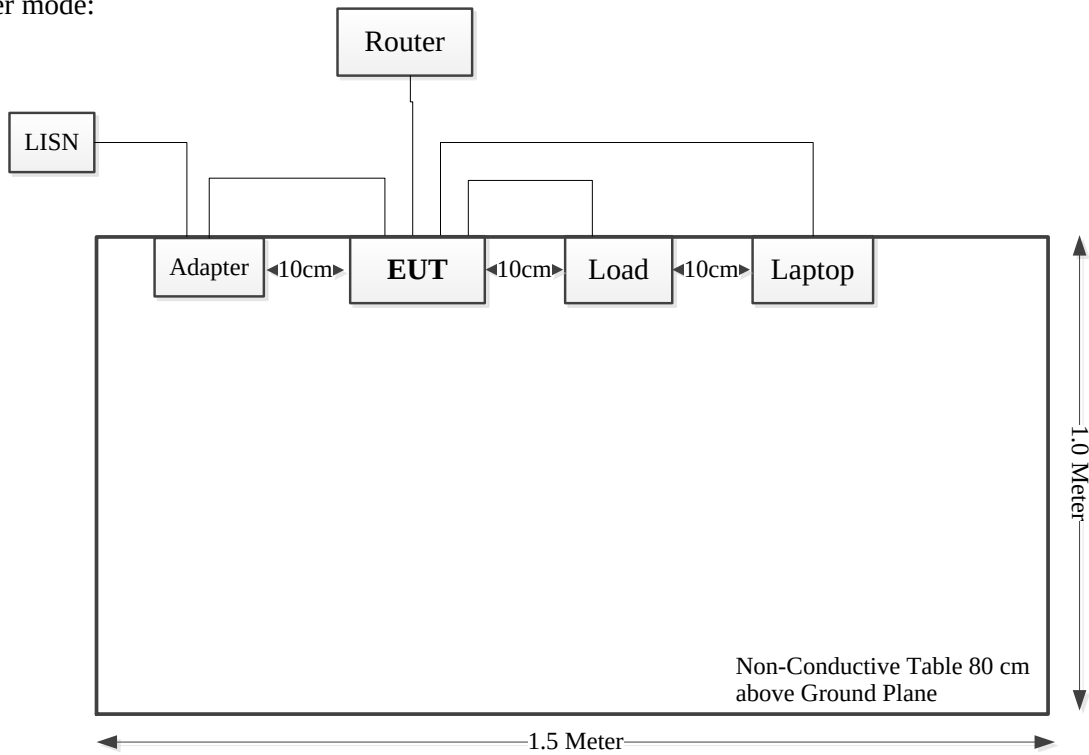


POE adapter mode:

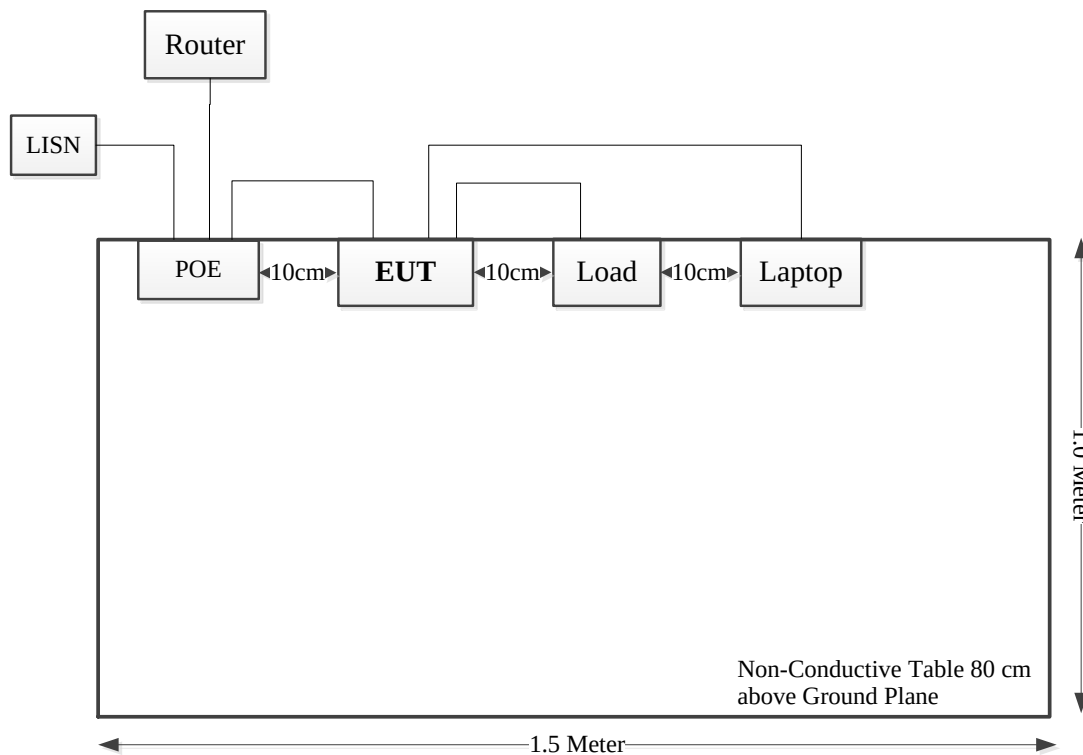


Radiated emissions:

Adapter mode:

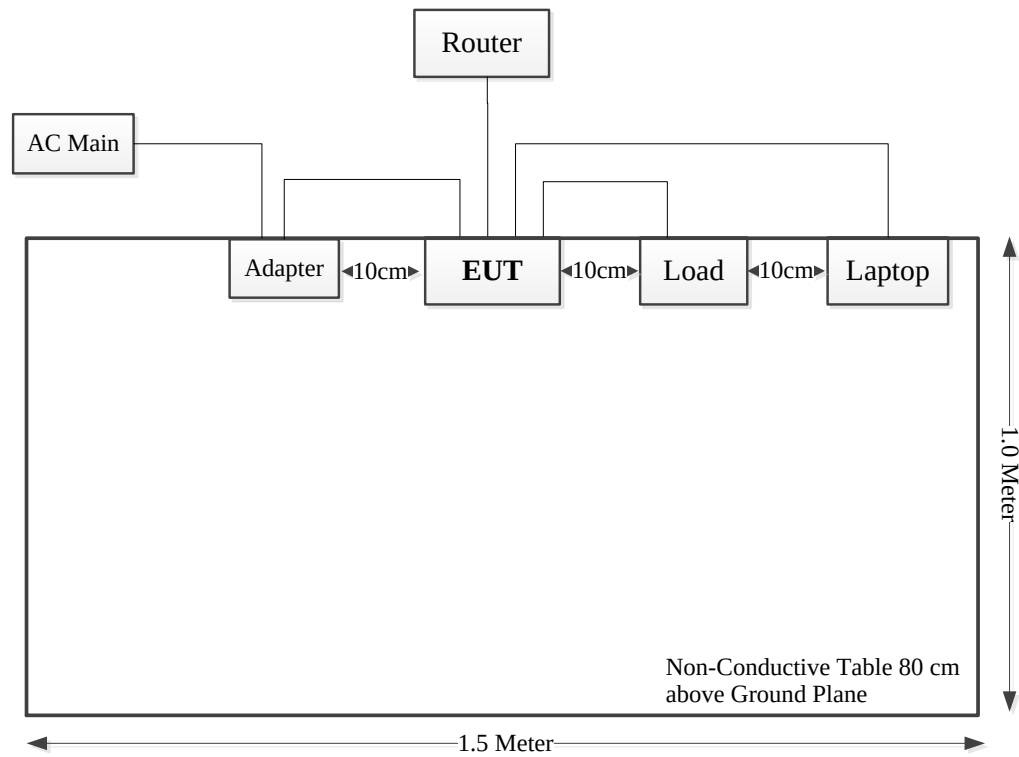

POE adapter mode:

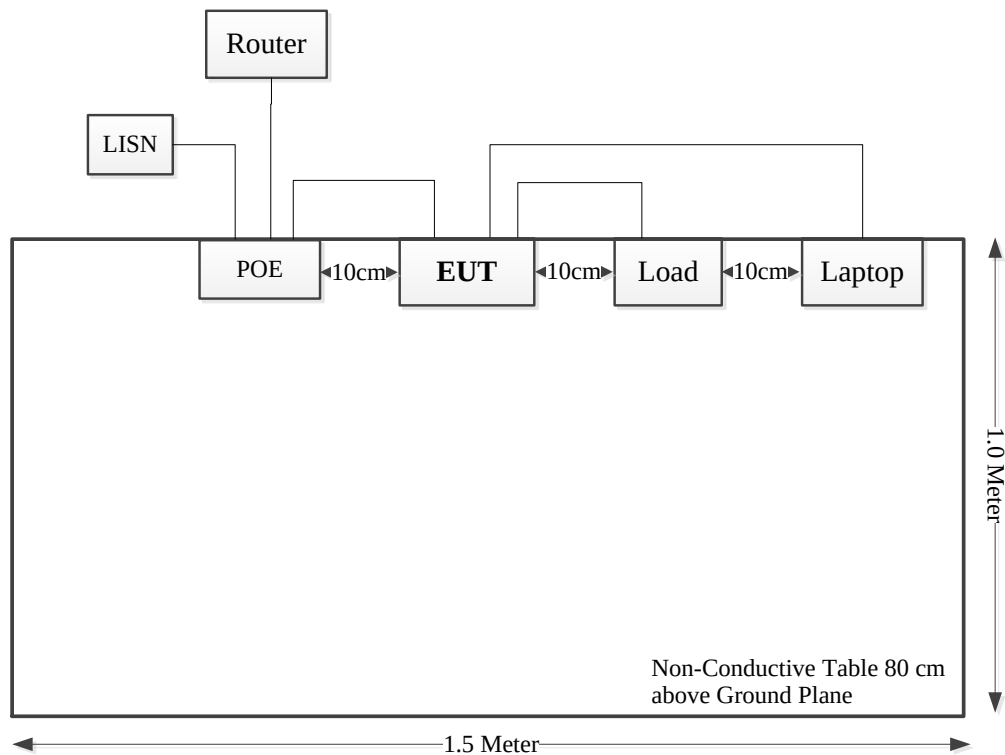

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

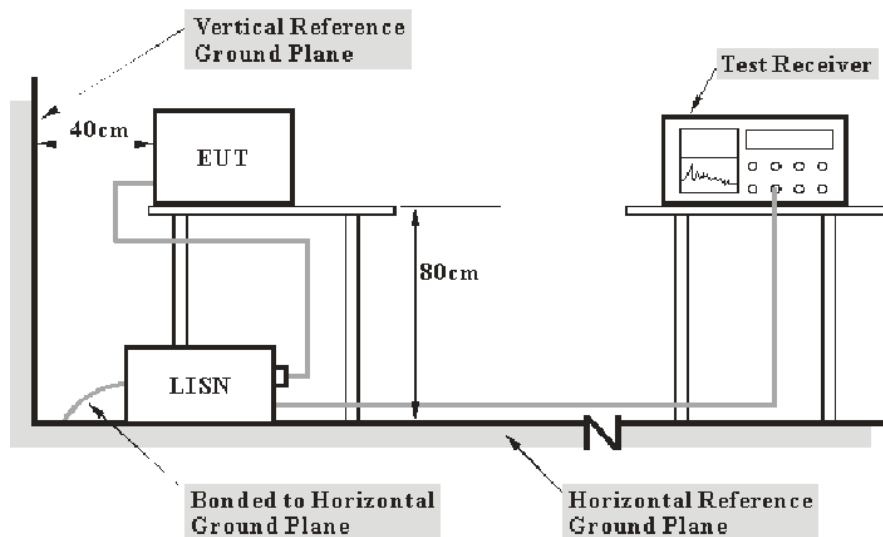

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Spurious Emissions

3.2.1 EUT Setup

Below 1GHz:

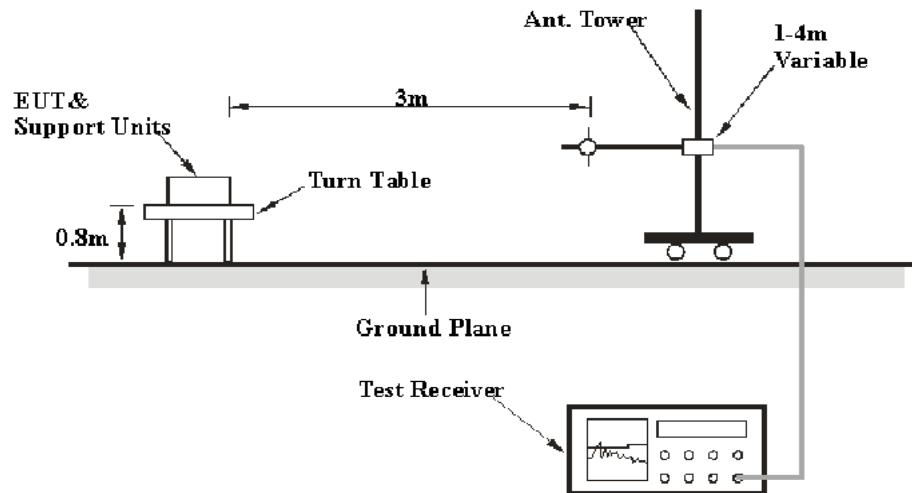

Above 1GHz:

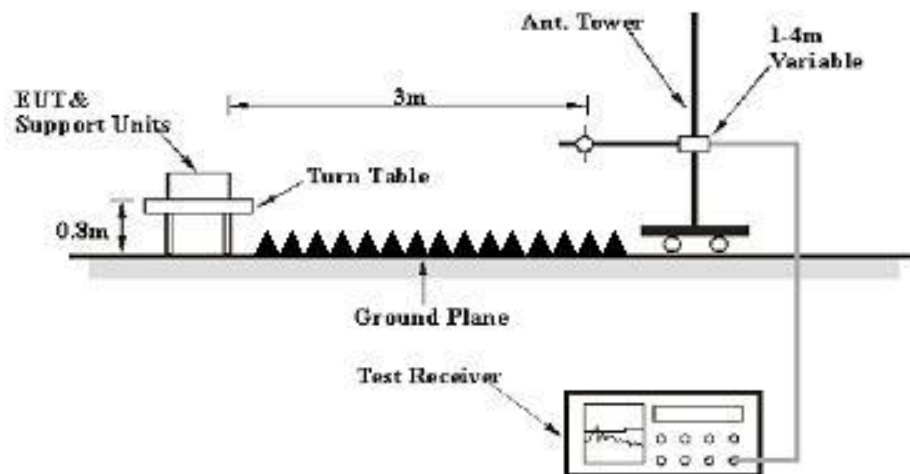

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22010028-RF-S1	Test Date:	2022-02-21~2022-02-22
Test Site:	CE	Test Mode:	Transmitting
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	15.1~15.4	Relative Humidity: (%)	64~67	ATM Pressure: (kPa)	101.7~101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Adapter mode:

Line:

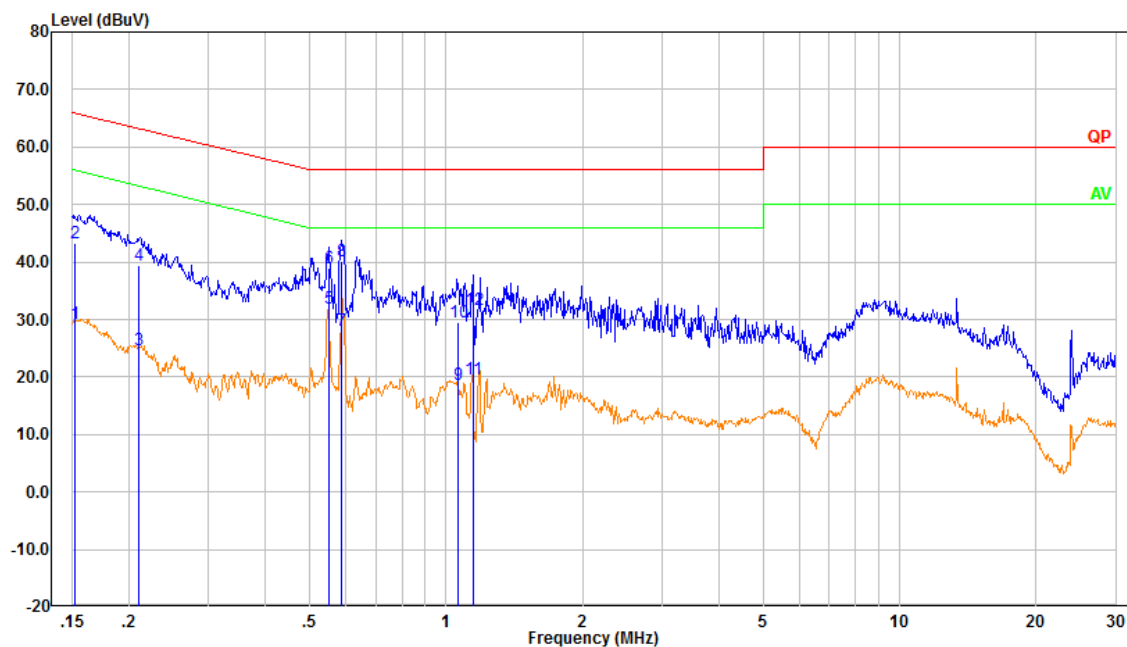

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	19.65	9.61	29.26	55.89	26.63	Average
2	0.152	33.76	9.61	43.37	65.89	22.52	QP
3	0.210	14.96	9.61	24.57	53.21	28.64	Average
4	0.210	29.92	9.61	39.53	63.21	23.68	QP
5	0.551	22.28	9.62	31.90	46.00	14.10	Average
6	0.551	29.25	9.62	38.87	56.00	17.13	QP
7	0.587	18.55	9.62	28.16	46.00	17.84	Average
8	0.587	30.55	9.62	40.17	56.00	15.83	QP
9	1.062	8.95	9.62	18.57	46.00	27.43	Average
10	1.062	19.88	9.62	29.50	56.00	26.50	QP
11	1.147	9.94	9.62	19.56	46.00	26.44	Average
12	1.147	22.07	9.62	31.69	56.00	24.31	QP


Neutral:

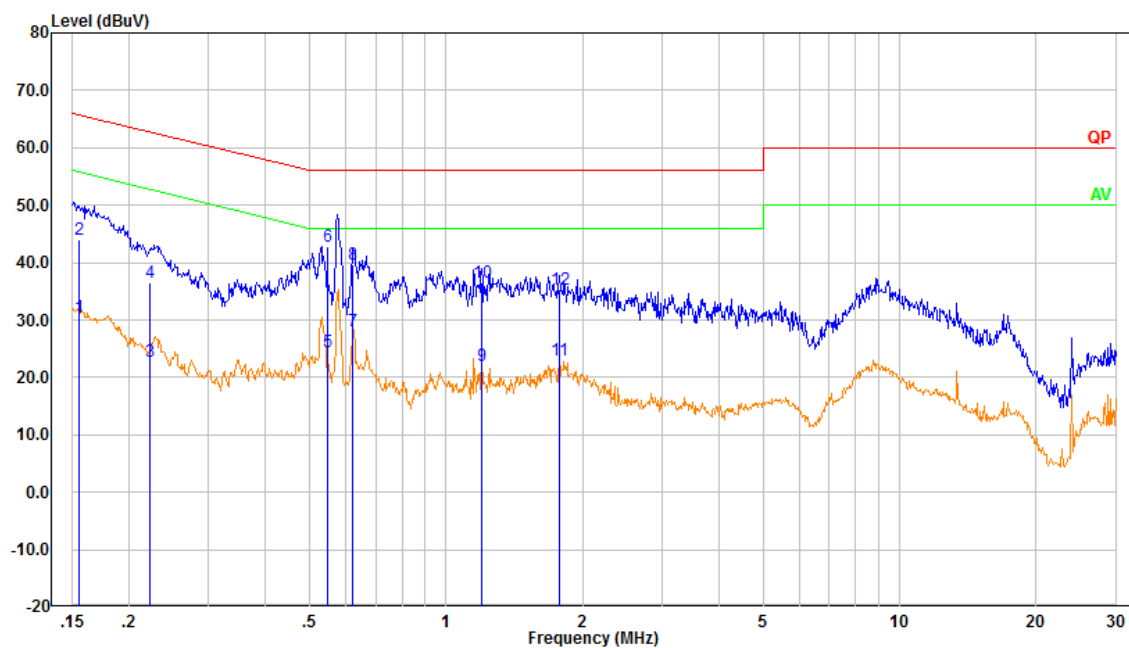

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	20.83	9.61	30.44	55.69	25.25	Average
2	0.156	34.47	9.61	44.08	65.69	21.61	QP
3	0.222	13.15	9.61	22.76	52.75	29.99	Average
4	0.222	26.80	9.61	36.41	62.75	26.34	QP
5	0.547	14.79	9.61	24.41	46.00	21.59	Average
6	0.547	33.24	9.61	42.86	56.00	13.14	QP
7	0.623	18.52	9.62	28.14	46.00	17.86	Average
8	0.623	30.09	9.62	39.71	56.00	16.29	QP
9	1.201	12.34	9.62	21.96	46.00	24.04	Average
10	1.201	26.89	9.62	36.51	56.00	19.49	QP
11	1.778	13.28	9.63	22.91	46.00	23.09	Average
12	1.778	25.58	9.63	35.21	56.00	20.79	QP


POE adapter mode:

Line:

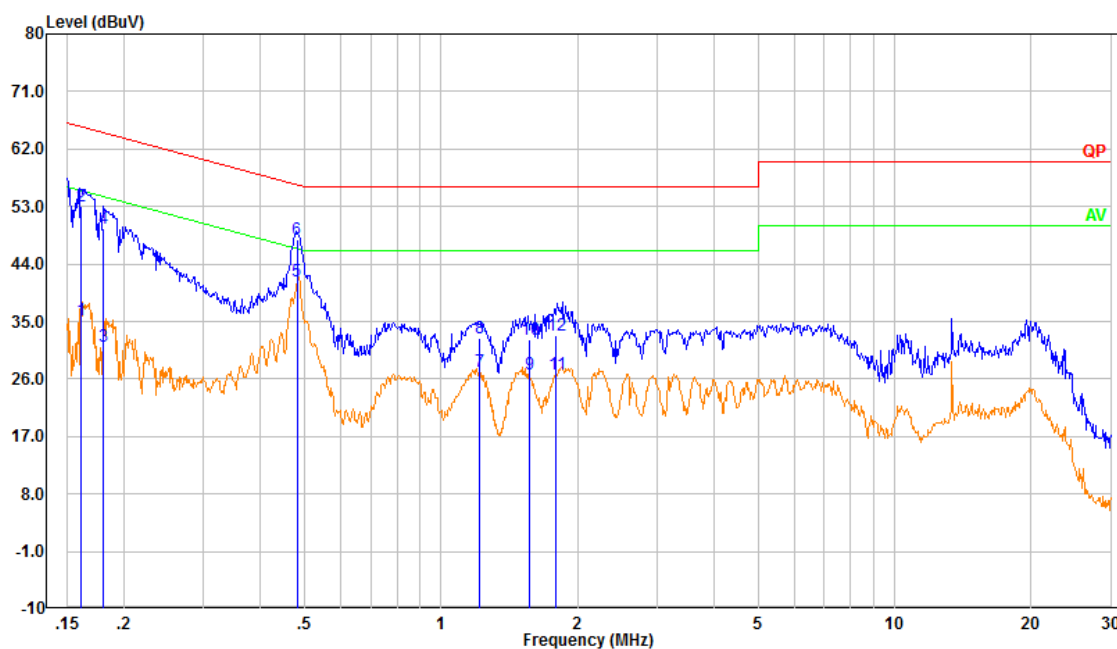

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.161	25.63	9.61	35.24	55.39	20.15	Average
2	0.161	43.52	9.61	53.13	65.39	12.26	QP
3	0.180	21.57	9.61	31.18	54.49	23.31	Average
4	0.180	40.02	9.61	49.63	64.49	14.86	QP
5	0.481	31.64	9.61	41.25	46.31	5.06	Average
6	0.481	38.17	9.61	47.78	56.31	8.53	QP
7	1.217	17.49	9.62	27.11	46.00	18.89	Average
8	1.217	22.76	9.62	32.39	56.00	23.61	QP
9	1.562	17.01	9.63	26.64	46.00	19.36	Average
10	1.562	22.58	9.63	32.21	56.00	23.79	QP
11	1.794	17.12	9.63	26.75	46.00	19.25	Average
12	1.794	23.24	9.63	32.87	56.00	23.13	QP

Neutral:

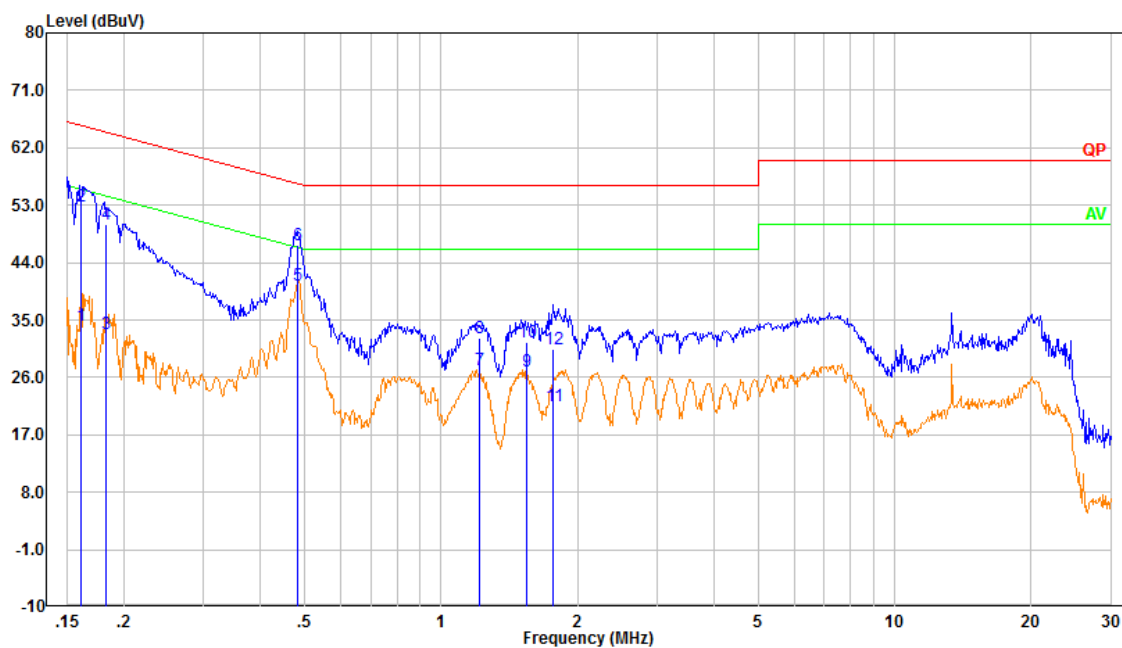

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.161	24.46	9.61	34.07	55.42	21.35	Average
2	0.161	43.24	9.61	52.85	65.42	12.57	QP
3	0.183	23.25	9.61	32.86	54.37	21.51	Average
4	0.183	40.29	9.61	49.90	64.37	14.47	QP
5	0.482	30.87	9.61	40.48	46.30	5.82	Average
6	0.482	37.16	9.61	46.77	56.30	9.53	QP
7	1.219	17.51	9.62	27.13	46.00	18.87	Average
8	1.219	22.52	9.62	32.15	56.00	23.85	QP
9	1.541	17.36	9.63	26.99	46.00	19.01	Average
10	1.541	21.97	9.63	31.60	56.00	24.40	QP
11	1.768	11.91	9.63	21.53	46.00	24.47	Average
12	1.768	20.75	9.63	30.38	56.00	25.62	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR22010028-RF-S1	Test Date:	2022-02-23
Test Site:	966-1, 966-2	Test Mode:	Operating
Tester:	Great Qiao, Tommy Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	14.5~17.5	Relative Humidity: (%)	53~60	ATM Pressure: (kPa)	102.1
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
Audix	Test Software	E3	201021 (V9)	N/A	N/A
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2021-08-08	2022-08-07

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


1) 30MHz-1GHz:

Adapter mode:

Horizontal:

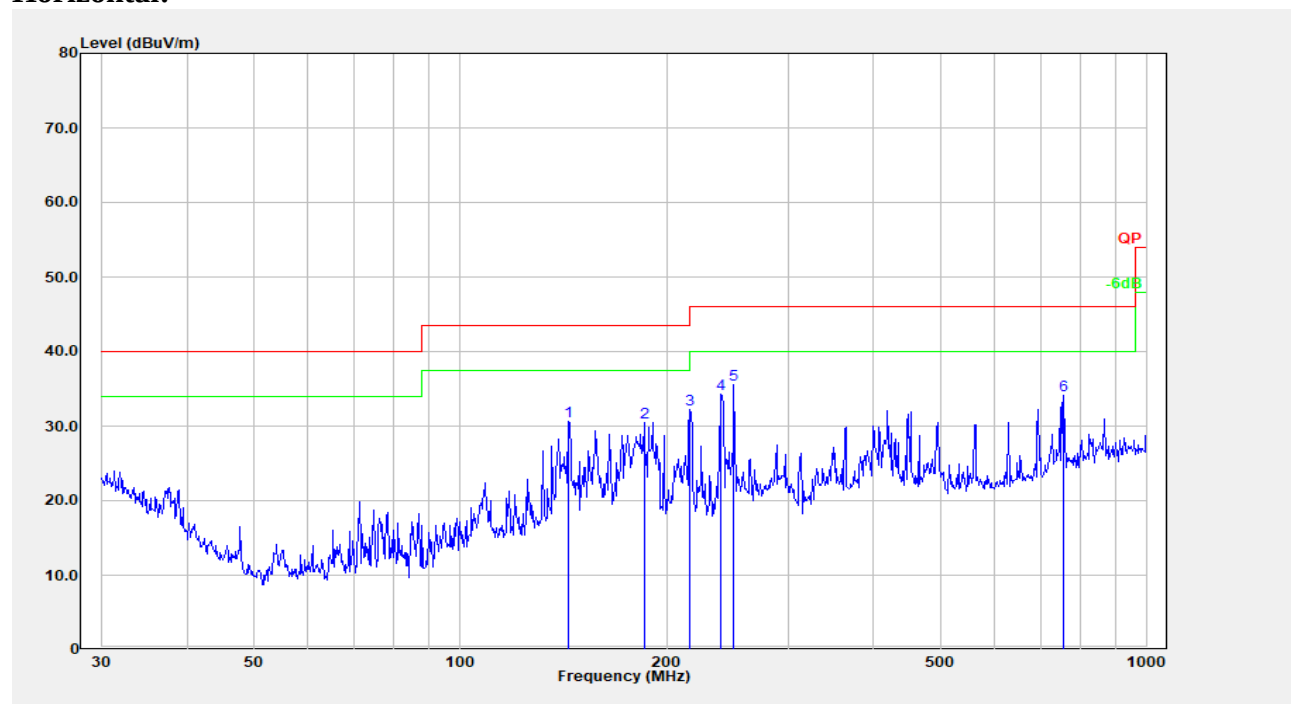


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	143.830	42.80	-12.20	30.59	43.50	12.91	Peak
2	185.138	44.21	-13.71	30.50	43.50	13.00	Peak
3	216.024	45.06	-12.83	32.23	46.00	13.77	Peak
4	239.987	47.48	-13.17	34.31	46.00	11.69	Peak
5	250.301	48.73	-13.25	35.48	46.00	10.52	Peak
6	755.387	37.36	-3.25	34.12	46.00	11.88	Peak

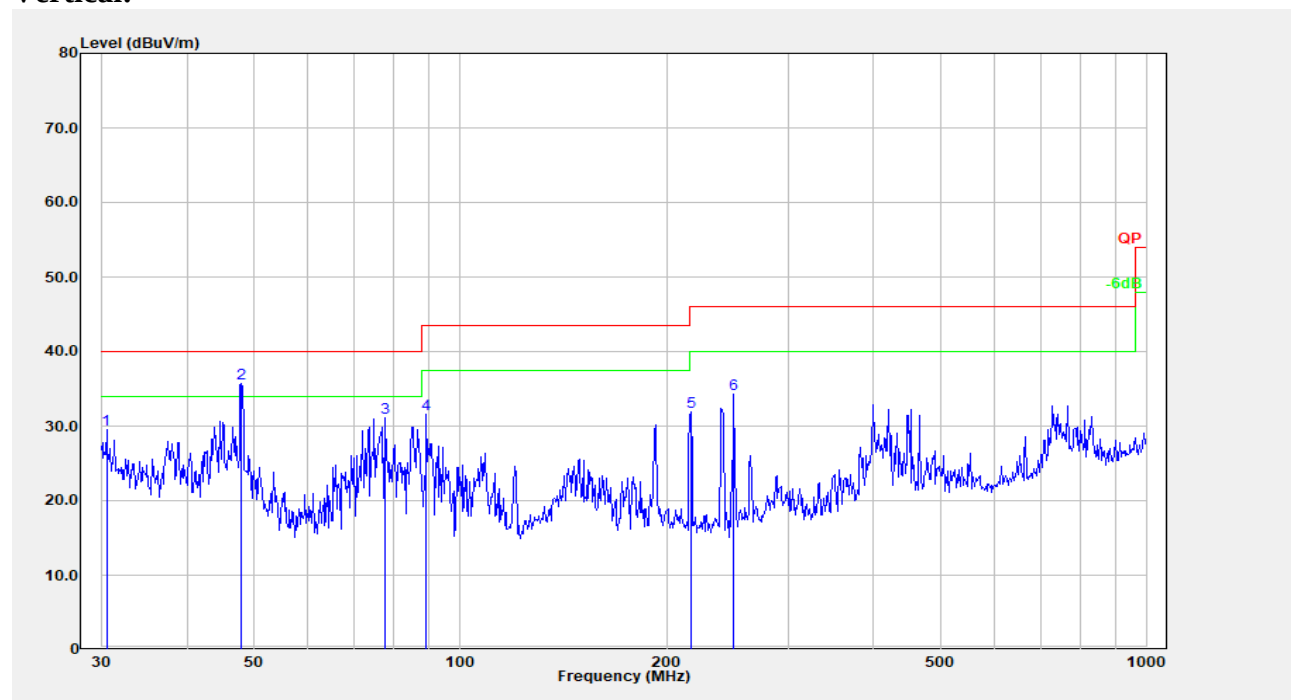Vertical:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.531	33.73	-4.20	29.53	40.00	10.47	Peak
2	47.994	52.00	-16.24	35.76	40.00	4.24	QP
3	77.593	48.58	-17.46	31.12	40.00	8.88	Peak
4	89.276	48.86	-17.23	31.63	43.50	11.87	Peak
5	216.783	44.70	-12.86	31.84	46.00	14.16	Peak
6	250.301	47.49	-13.25	34.23	46.00	11.77	Peak

POE adapter mode:

Horizontal:

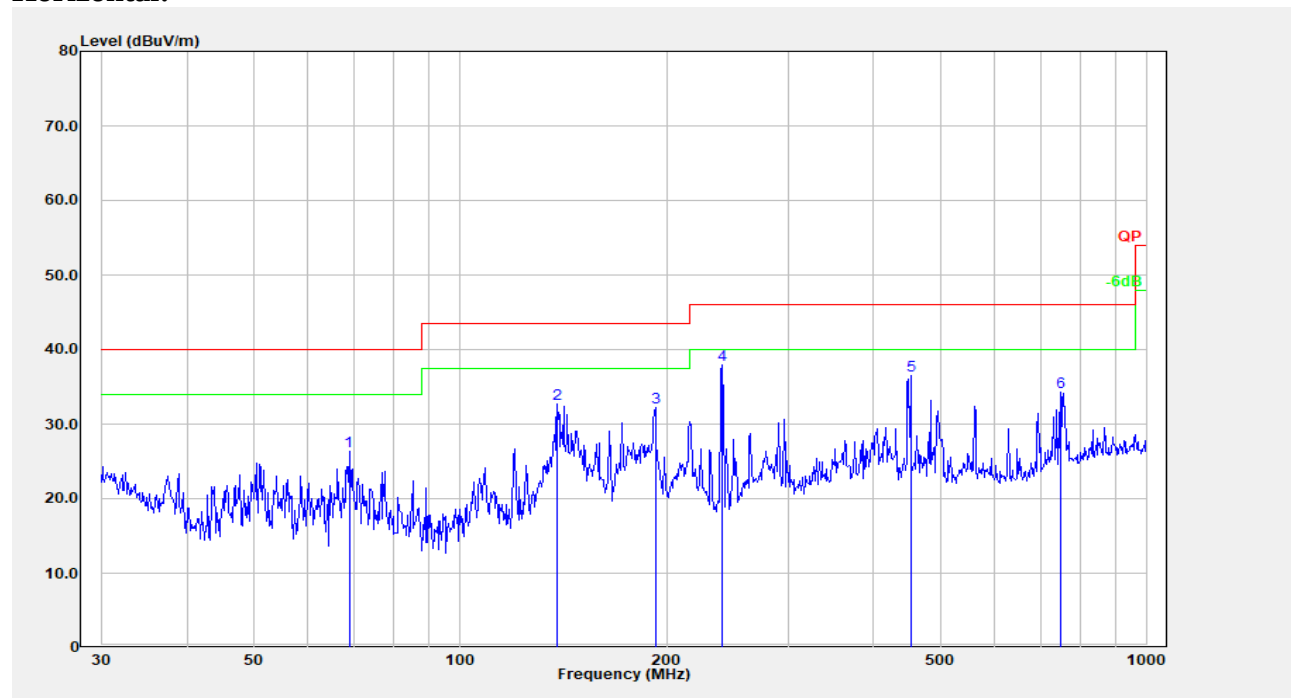

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	68.872	43.20	-16.85	26.35	40.00	13.65	Peak
2	138.387	44.71	-12.06	32.65	43.50	10.85	Peak
3	192.419	45.56	-13.29	32.28	43.50	11.22	Peak
4	240.830	51.06	-13.16	37.90	46.00	8.10	Peak
5	452.720	43.62	-7.08	36.55	46.00	9.45	Peak
6	747.483	37.51	-3.17	34.34	46.00	11.66	Peak

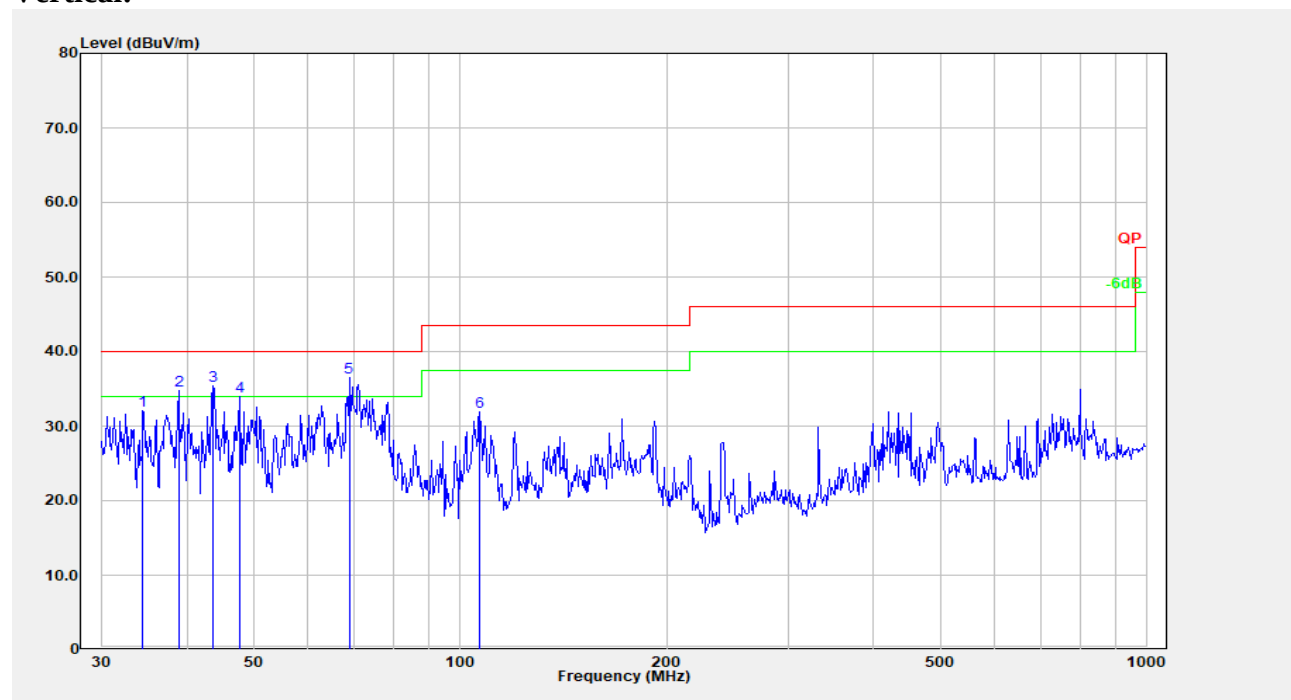
Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	34.517	39.31	-7.28	32.03	40.00	7.97	Peak
2	38.888	45.46	-10.63	34.83	40.00	5.17	QP
3	43.659	49.05	-13.70	35.34	40.00	4.66	QP
4	47.659	50.02	-16.04	33.98	40.00	6.02	Peak
5	68.872	53.42	-16.85	36.57	40.00	3.43	QP
6	106.759	45.20	-13.22	31.98	43.50	11.52	Peak


2) Above 1GHz

Adapter mode:


Horizontal:

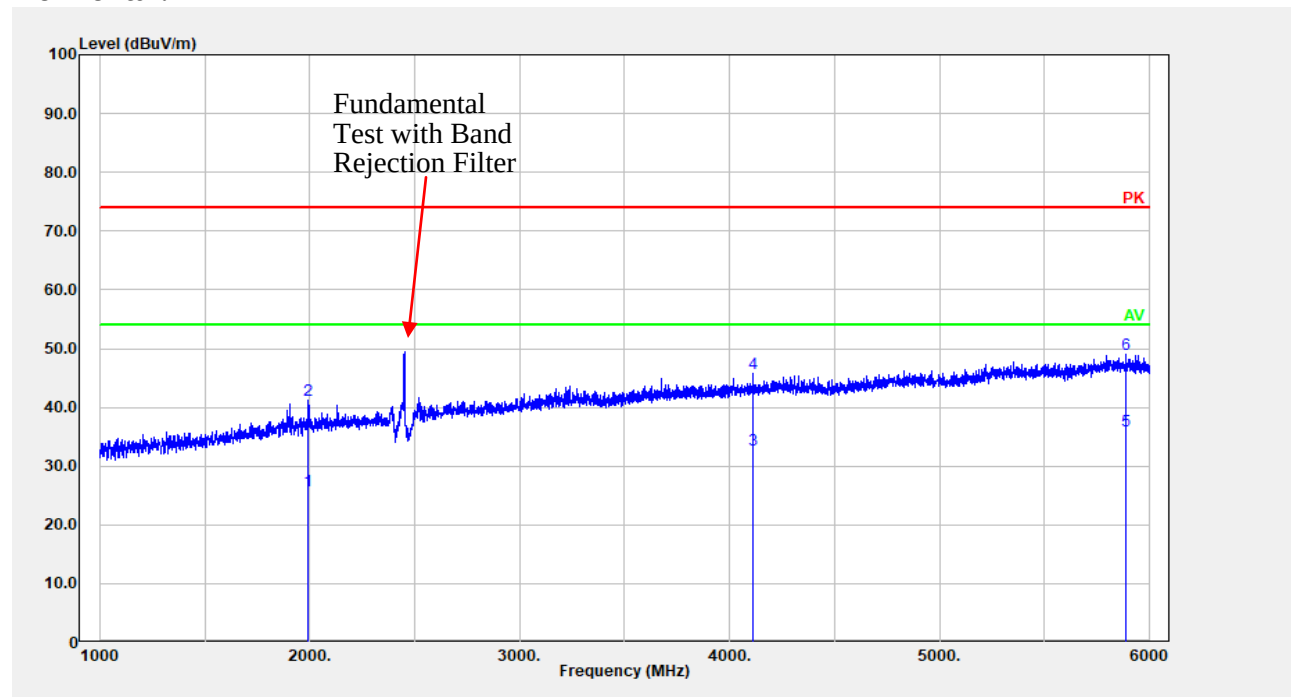


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1991.198	23.52	2.28	25.80	54.00	28.20	Average
2	1991.198	38.83	2.28	41.11	74.00	32.89	Peak
3	4111.623	23.14	9.55	32.69	54.00	21.31	Average
4	4111.623	36.22	9.55	45.77	74.00	28.23	Peak
5	5886.978	22.83	13.19	36.02	54.00	17.98	Average
6	5886.978	35.91	13.19	49.10	74.00	24.90	Peak

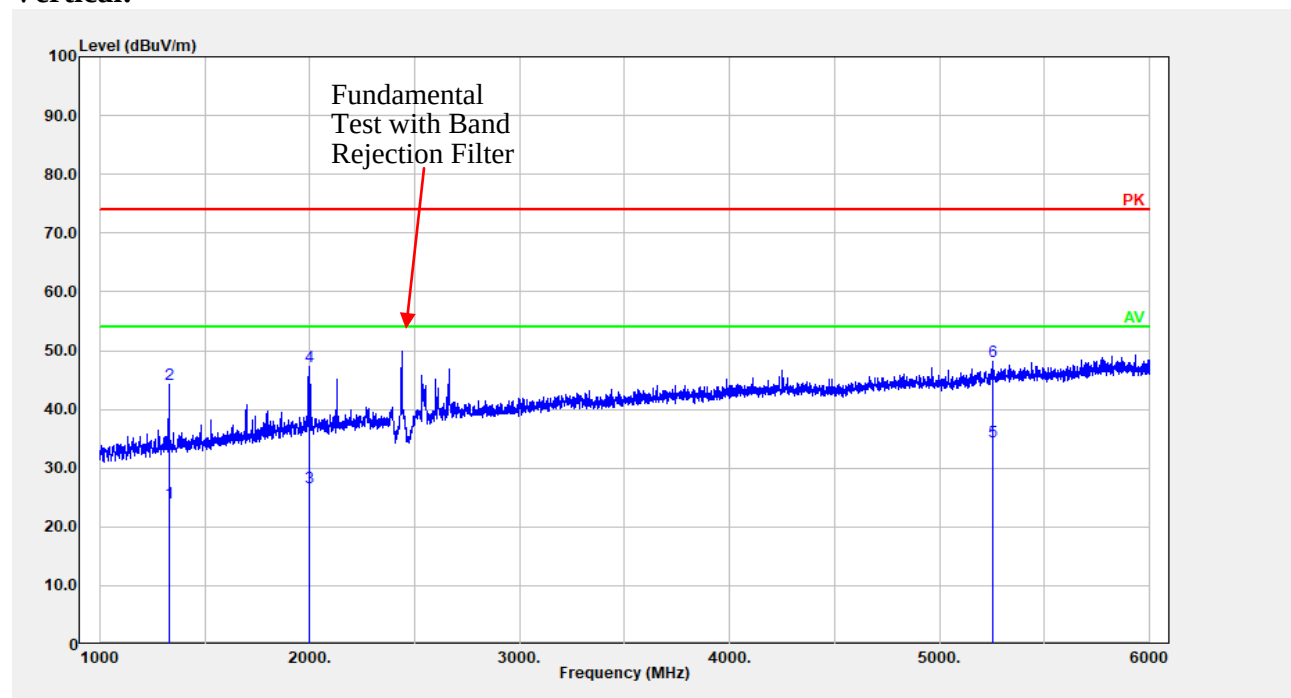Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1327.065	25.63	-1.45	24.18	54.00	29.82	Average
2	1327.065	45.68	-1.45	44.23	74.00	29.77	Peak
3	1999.200	24.36	2.32	26.68	54.00	27.32	Average
4	1999.200	44.91	2.32	47.23	74.00	26.77	Peak
5	5254.851	22.59	11.94	34.53	54.00	19.47	Average
6	5254.851	36.24	11.94	48.18	74.00	25.82	Peak

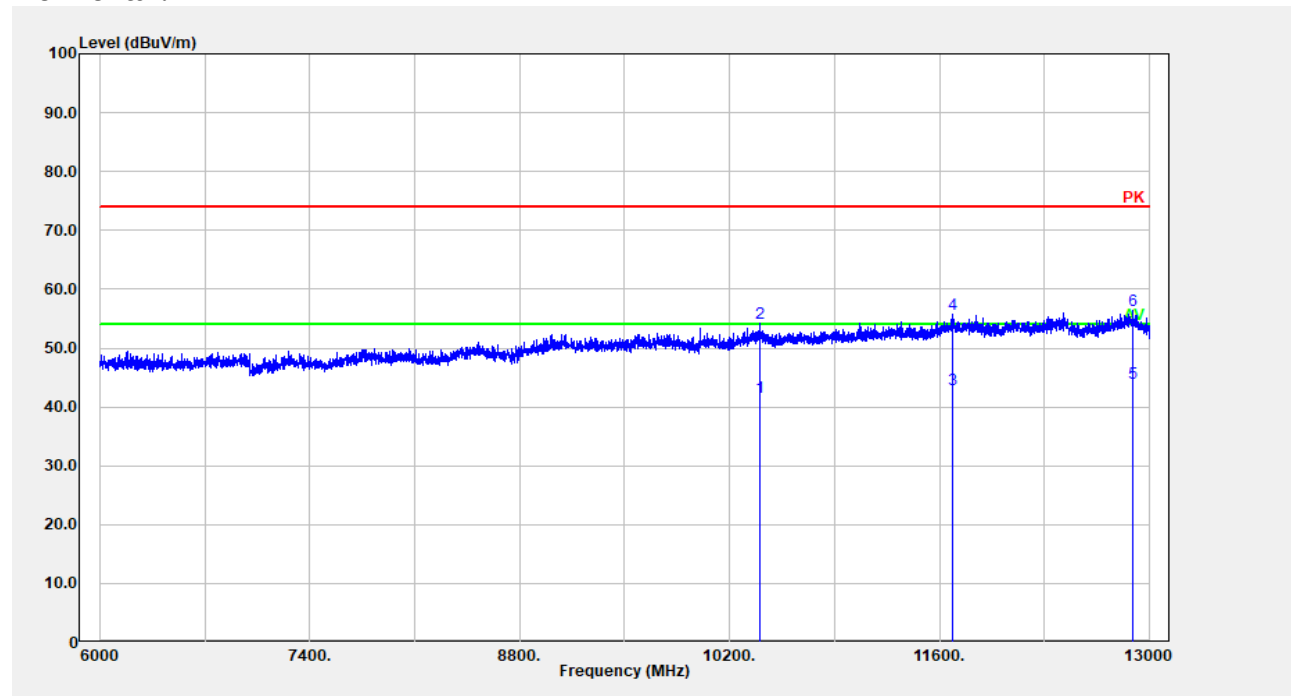Horizontal:


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10401.080	22.43	19.16	41.59	54.00	12.41	Average
2	10401.080	35.06	19.16	54.22	74.00	19.78	Peak
3	11689.340	21.85	21.19	43.04	54.00	10.96	Average
4	11689.340	34.63	21.19	55.82	74.00	18.18	Peak
5	12892.180	21.76	22.27	44.03	54.00	9.97	Average
6	12892.180	34.04	22.27	56.31	74.00	17.69	Peak

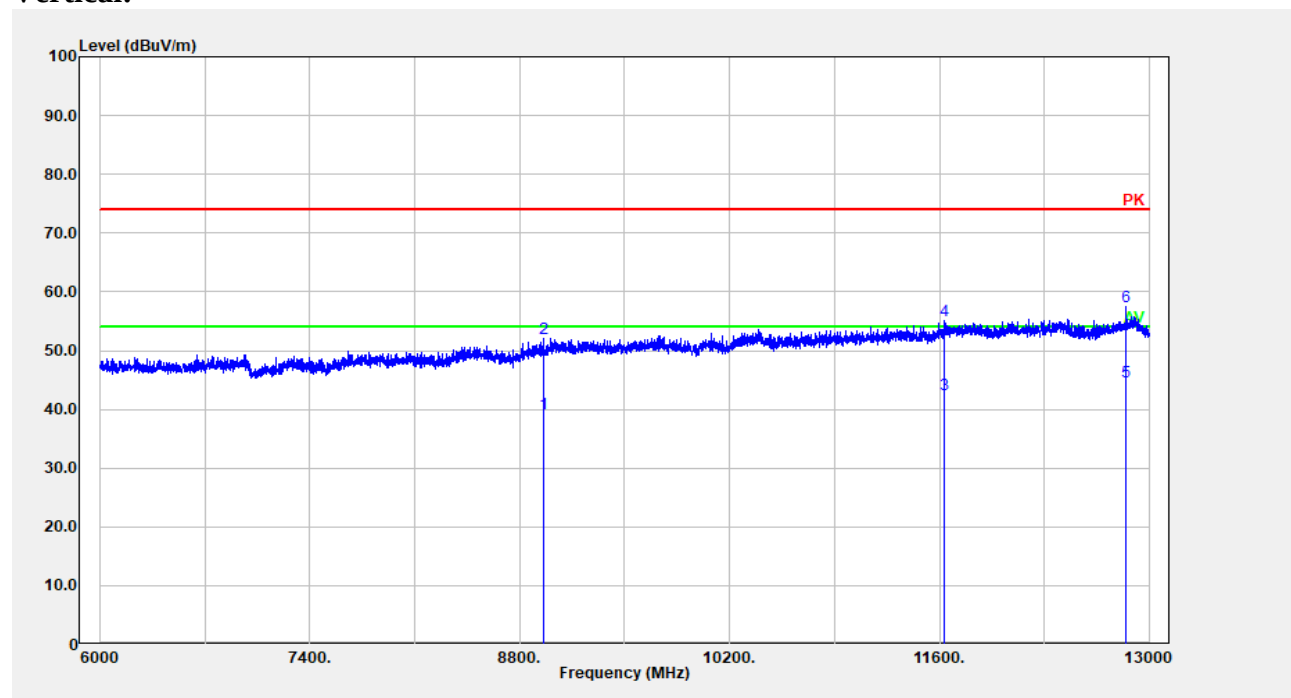Vertical:


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	8955.991	21.93	17.35	39.28	54.00	14.72	Average
2	8955.991	34.72	17.35	52.07	74.00	21.93	Peak
3	11636.130	21.57	21.02	42.59	54.00	11.41	Average
4	11636.130	34.16	21.02	55.18	74.00	18.82	Peak
5	12841.770	22.61	22.06	44.67	54.00	9.33	Average
6	12841.770	35.32	22.06	57.38	74.00	16.62	Peak

POE adapter mode:


Horizontal:

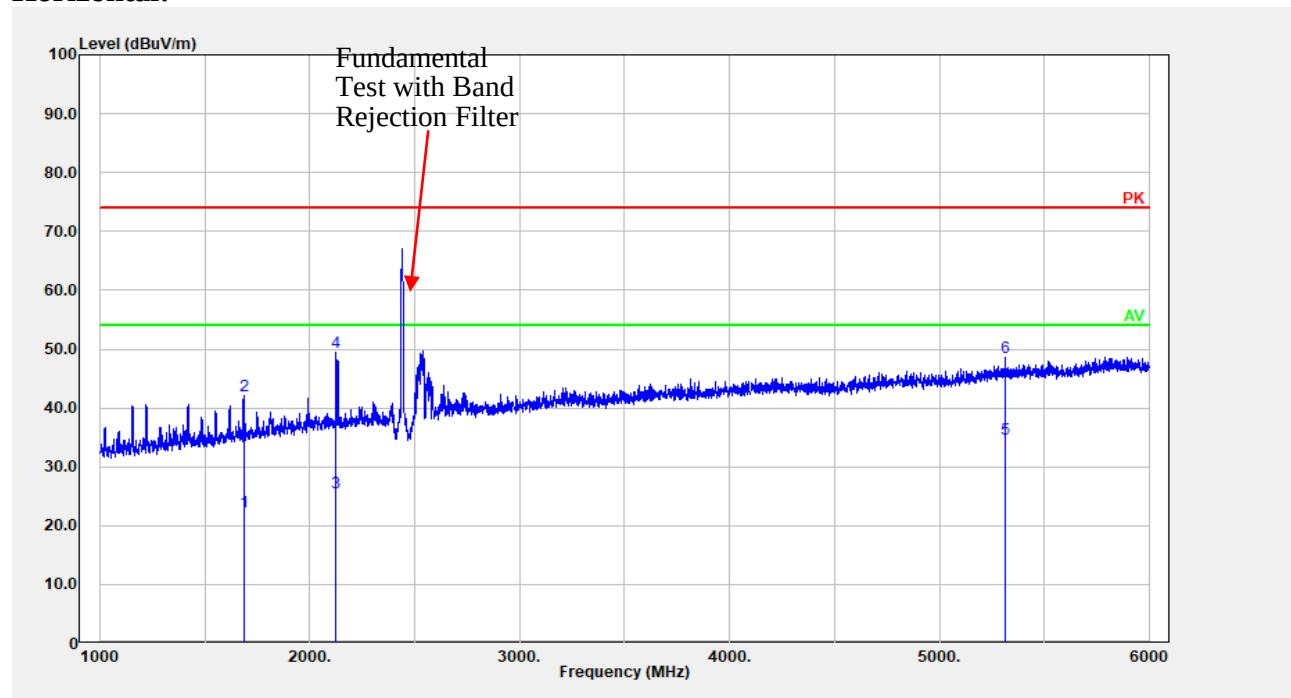


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1684.137	21.69	0.64	22.33	54.00	31.67	Average
2	1684.137	41.45	0.64	42.09	74.00	31.91	Peak
3	2123.225	22.89	2.72	25.61	54.00	28.39	Average
4	2123.225	46.84	2.72	49.56	74.00	24.44	Peak
5	5314.863	22.53	12.16	34.69	54.00	19.31	Average
6	5314.863	36.34	12.16	48.50	74.00	25.50	Peak

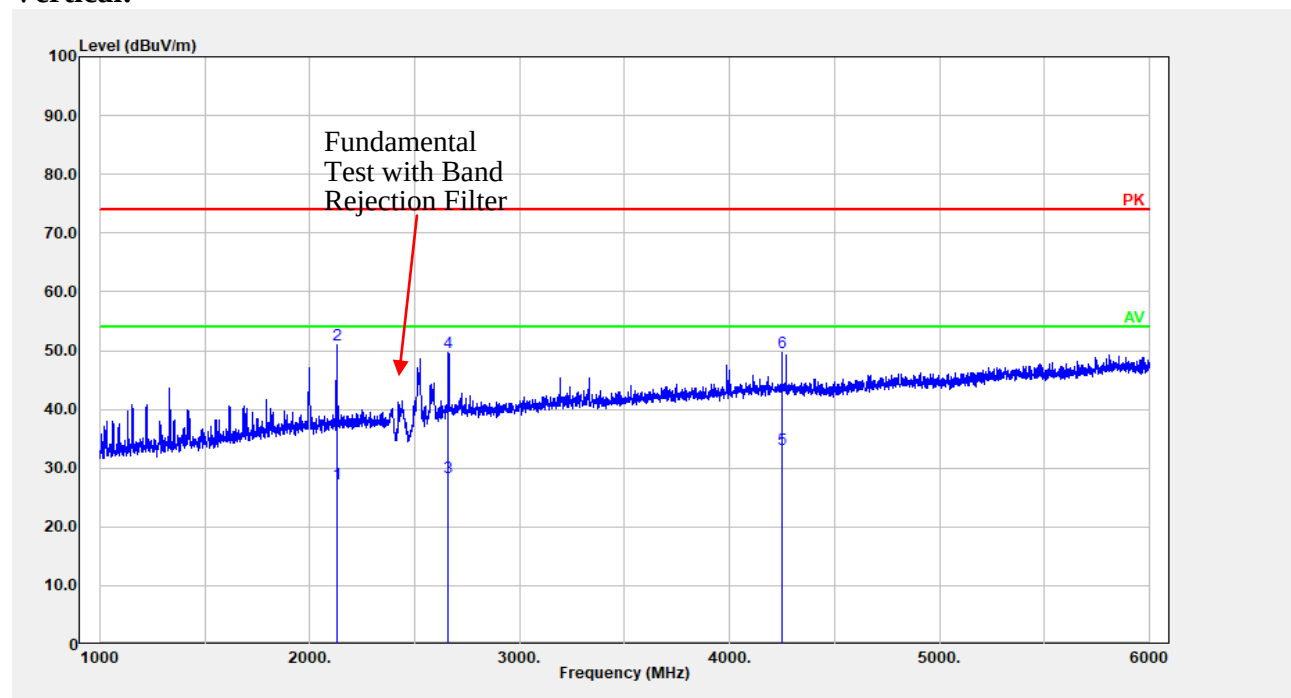Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	2127.225	24.65	2.74	27.39	54.00	26.61	Average
2	2127.225	48.19	2.74	50.93	74.00	23.07	Peak
3	2658.332	23.85	4.49	28.34	54.00	25.66	Average
4	2658.332	45.16	4.49	49.65	74.00	24.35	Peak
5	4250.650	23.56	9.72	33.28	54.00	20.72	Average
6	4250.650	39.85	9.72	49.57	74.00	24.43	Peak

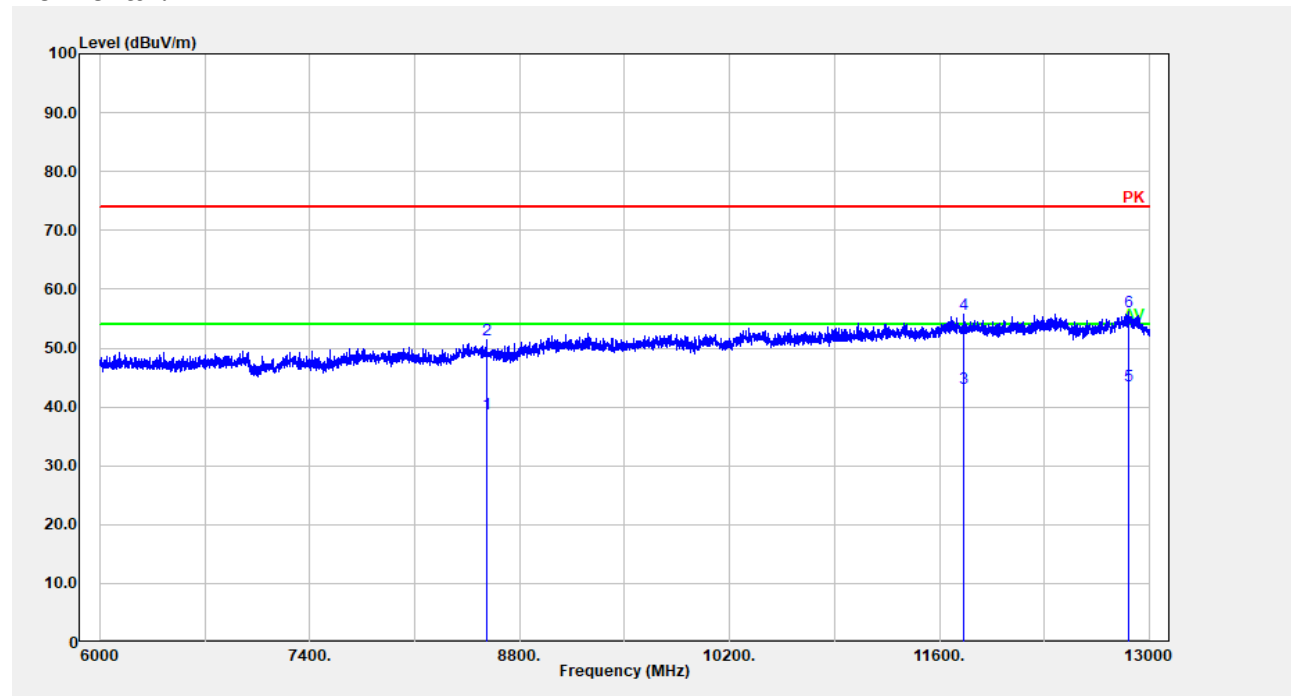Horizontal:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	8576.516	21.84	17.01	38.85	54.00	15.15	Average
2	8576.516	34.33	17.01	51.34	74.00	22.66	Peak
3	11763.550	22.06	21.11	43.17	54.00	10.83	Average
4	11763.550	34.58	21.11	55.69	74.00	18.31	Peak
5	12864.170	21.55	22.15	43.70	54.00	10.30	Average
6	12864.170	34.08	22.15	56.23	74.00	17.77	Peak

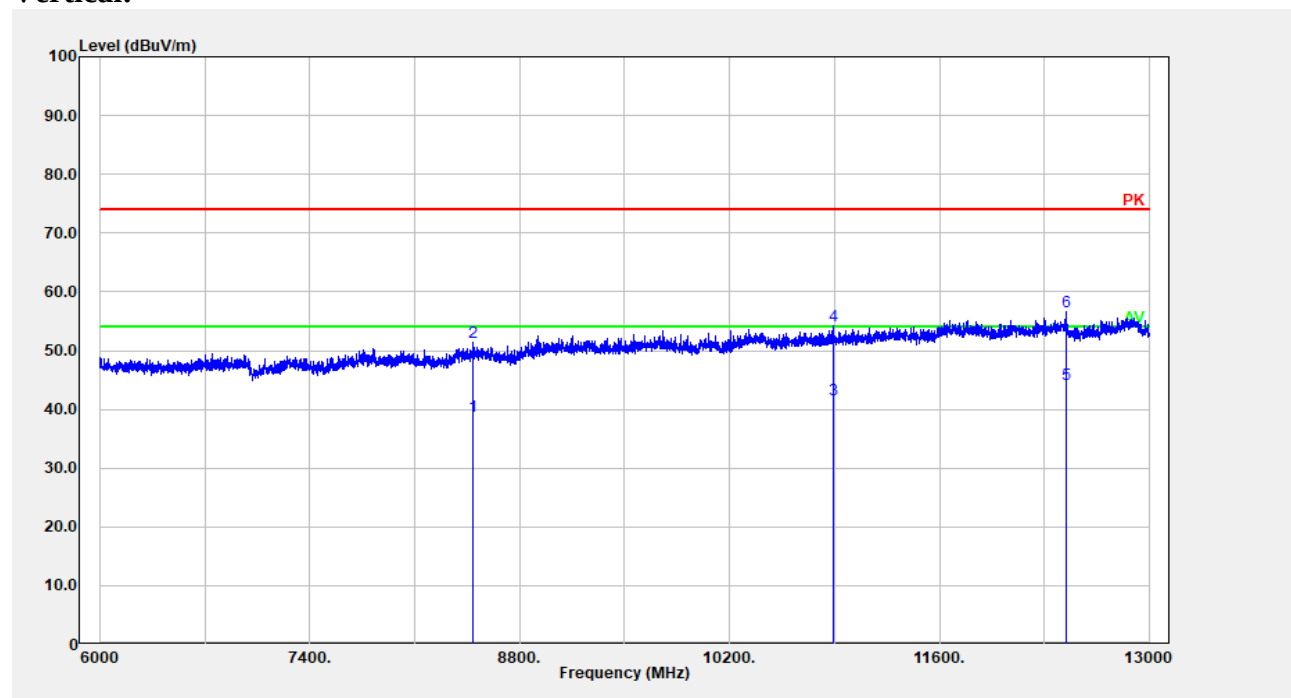Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	8491.099	22.10	16.80	38.90	54.00	15.10	Average
2	8491.099	34.54	16.80	51.34	74.00	22.66	Peak
3	10888.380	21.88	19.85	41.73	54.00	12.27	Average
4	10888.380	34.34	19.85	54.19	74.00	19.81	Peak
5	12445.490	22.74	21.41	44.15	54.00	9.85	Average
6	12445.490	35.30	21.41	56.71	74.00	17.29	Peak

===== END OF REPORT =====