



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

AKUVOX (XIAMEN) NETWORKS CO., LTD.

10/F, No.56, Software Park II , Xiamen, China

FCC ID: 2AHCR-R29XV2

Report Type: Original Report	Product Name: Door Phone
Report Number:	RXM190628052-00C
Report Date:	2019-10-24
Reviewed By:	Gavin Xu RF Engineer
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.247 (I) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE(MPE)	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	32
APPLICABLE STANDARD	32

TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA	41
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47
FCC §15.247(d) - BAND EDGES TESTING	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Door Phone
EUT Model:	R29C
Multiple Models:	R29W
Operation Frequency:	2402-2480MHz
Maximum Peak Output Power (Conducted):	9.80 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	DC 12V from adapter or DC 48V from PoE
External Dimension:	130mm(L)*27mm(W)*324mm(H)
Serial Number:	190628052
EUT Received Date:	2019/8/9
EUT Received Status:	Good

Note: This series products model: R29C and R29W are electrically identical. Model R29C was selected for fully testing and the detailed information can be referred to the declaration.

Objective

This report is prepared on **behalf of AKUVOX (XIAMEN) NETWORKS CO., LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AHCR-R29XV2
FCC Part 15C DXX submissions with FCC ID: 2AHCR-R29XV2

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

Test Mode	M1	Power supply by adapter & Transmitting
	M2	Power supply by PoE & Transmitting

EUT Exercise Software

Software and version: **cmd.exe**

Mode	Packet type	Channel	Frequency (MHz)	Packet length	Power Level
GFSK	DH1	Low	2402	27	dedault
		Middle	2441	27	dedault
		High	2480	27	dedault
	DH3	Low	2402	183	dedault
		Middle	2441	183	dedault
		High	2480	183	dedault
	DH5	Low	2402	339	dedault
		Middle	2441	339	dedault
		High	2480	339	dedault
$\pi/4$ DQPSK	2DH1	Low	2402	54	dedault
		Middle	2441	54	dedault
		High	2480	54	dedault
	2DH3	Low	2402	367	dedault
		Middle	2441	367	dedault
		High	2480	367	dedault
	2DH5	Low	2402	679	dedault
		Middle	2441	679	dedault
		High	2480	679	dedault
8DPSK	3DH1	Low	2402	83	dedault
		Middle	2441	83	dedault
		High	2480	83	dedault
	3DH3	Low	2402	552	dedault
		Middle	2441	552	dedault
		High	2480	552	dedault
	3DH5	Low	2402	1021	dedault
		Middle	2441	1021	dedault
		High	2480	1021	dedault

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Tenda	PoE	O2	/
HUAWEI	Adapter	HW-120200U6W	/
RSD	Button Switch	KCD1	/
Lotus	Entrance guard	L8MF-W	/
Schneider	Relay	RXM2LB2BD	/
TP-LINK	Switch	TL-SF1008P	114A297001782
Huawei	Router	WS5200	2017011608000660

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
RJ45 Cable	No	No	5.00	RJ45 Port of EUT or PoE	Router
Signal Cable	No	No	5.00	DOOR Port of EUT	Button Switch
Signal Cable	No	No	5.00	Wiegand Port of EUT	Entrance guard
Signal Cable	No	No	5.00	RS485 Port of EUT	Switch
Signal Cable	No	No	5.00	Relay Port of EUT	Relay
Power Cable	No	No	1.20	12V Port of EUT	Adapter
RJ45 Cable	No	No	1.00	RJ45 Port of EUT	PoE

Block Diagram of Test Setup

M1

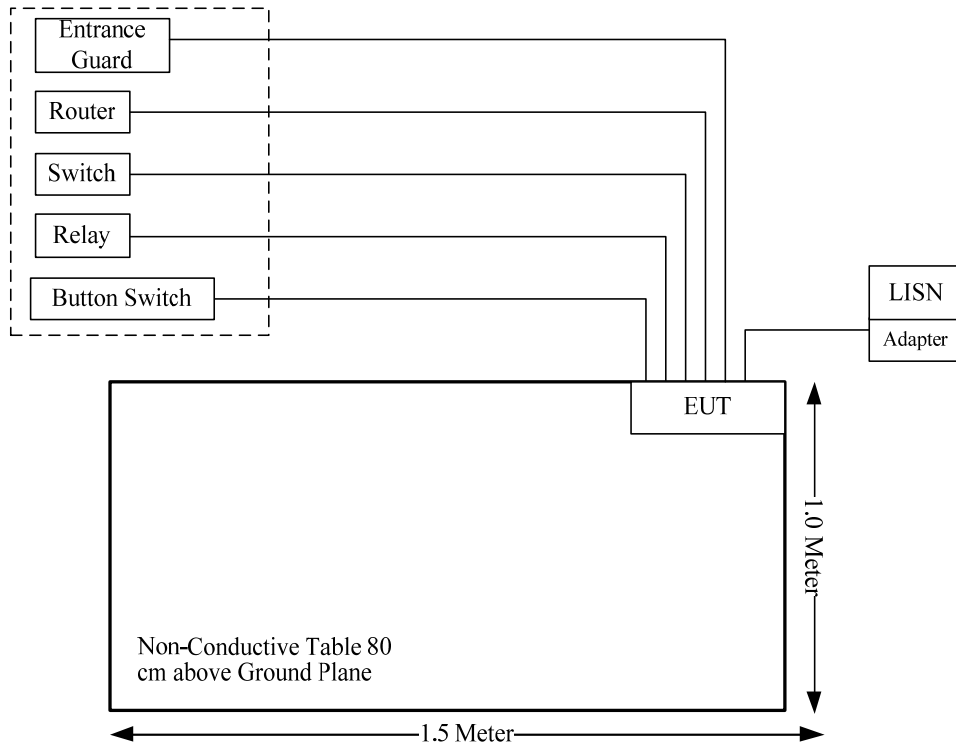

M2

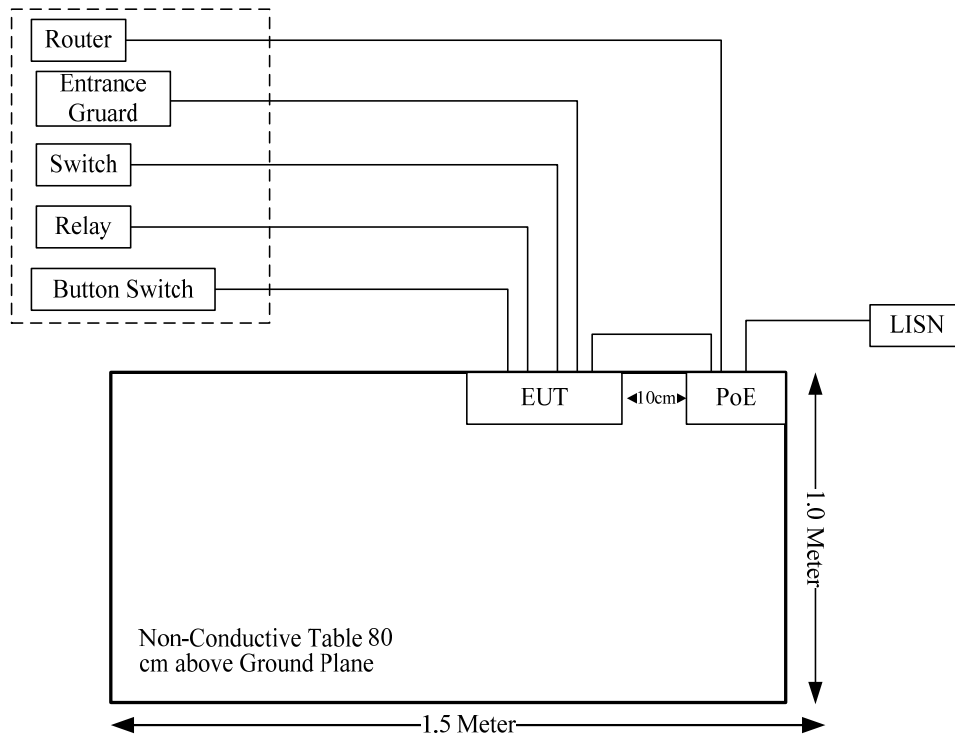

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum permissible exposure(MPE)	Compliance
FCC §15.203	Antenna requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliance
FCC §15.247(a)(1)	Channel separation	Compliance
FCC §15.247(a)(1)	20 dB bandwidth	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
FCC §15.247(b)(1)	Peak output power measurement	Compliance
FCC §15.247(d)	Band edges	Compliance

FCC §15.247 (I) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE(MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1093 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	-2.3	0.59	9.90	9.77	20	0.0011	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	-2.3 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

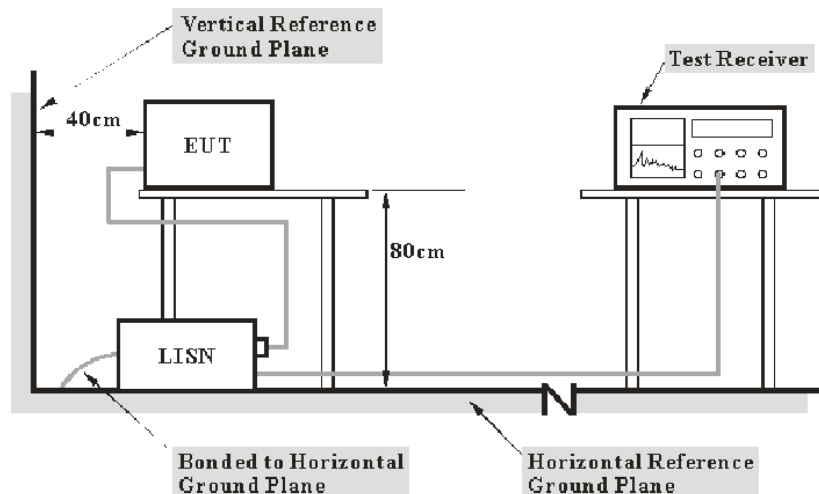

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter (or PoE) was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter (or PoE) was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29 °C
Relative Humidity:	66%
ATM Pressure:	100.1kPa
Test by:	Sem Xiang
Test Date:	2019-09-10


Test Result: Compliance

Test Mode: Transmitting

Pre-scan two models (R29C, R29W) and the worst case is model R29C.

Test Mode: M1 (BDR middle channel was the worst case);

Model Number: R29C
Port: L
Test Mode: M1
Power Source: AC 120V/60Hz
Note:

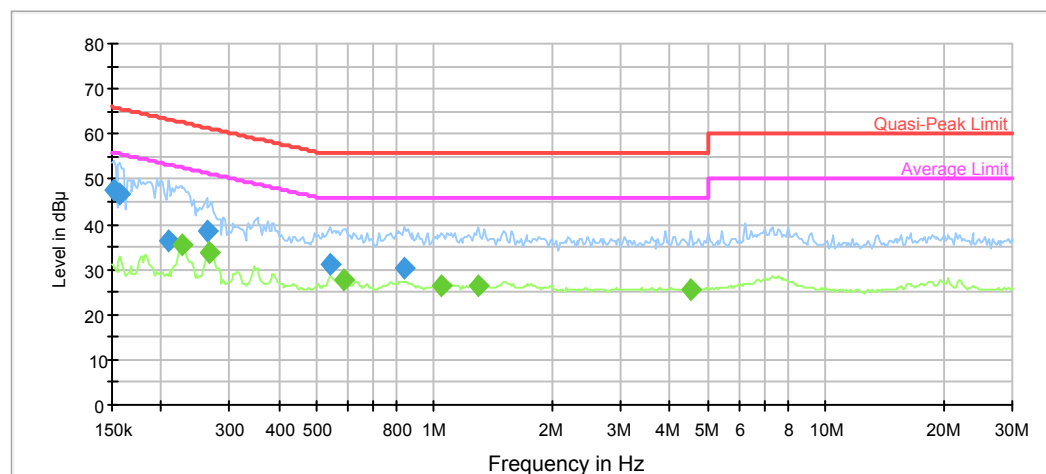


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.151500	47.5	9.000	N	11.1	18.4	65.9
0.157652	46.7	9.000	N	11.1	18.9	65.6
0.208304	36.3	9.000	N	10.6	27.0	63.3
0.261872	38.6	9.000	N	10.3	22.8	61.4
0.541438	31.0	9.000	N	9.8	25.0	56.0
0.838859	30.2	9.000	N	9.8	25.8	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.225563	35.6	9.000	N	10.5	17.0	52.6
0.267135	33.8	9.000	N	10.3	17.4	51.2
0.586300	27.5	9.000	N	9.8	18.5	46.0
1.044142	26.5	9.000	N	9.8	19.5	46.0
1.299660	26.5	9.000	N	9.8	19.5	46.0
4.508181	25.5	9.000	N	9.8	20.5	46.0

Model Number: R29C
Port: N
Test Mode: M1
Power Source: AC 120V/60Hz
Note:

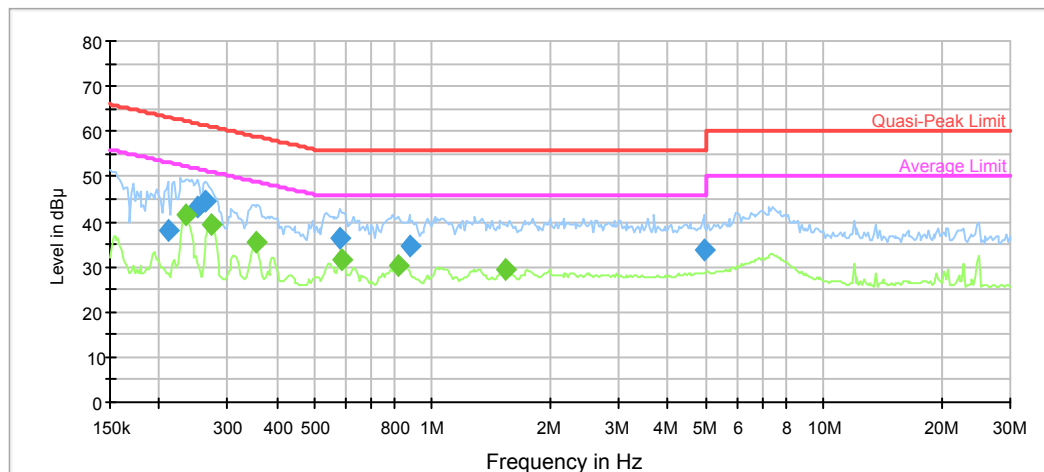

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.210387	38.2	9.000	N	10.5	25.0	63.2
0.251654	43.3	9.000	N	10.3	18.4	61.7
0.261872	44.5	9.000	N	10.3	16.9	61.4
0.580495	36.4	9.000	N	9.8	19.6	56.0
0.872921	34.5	9.000	N	9.8	21.5	56.0
4.930532	33.7	9.000	N	9.8	22.3	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.234722	41.4	9.000	N	10.4	10.9	52.3
0.272505	39.2	9.000	N	10.2	11.8	51.0
0.352963	35.4	9.000	N	10.0	13.5	48.9
0.586300	31.4	9.000	N	9.8	14.6	46.0
0.822331	30.3	9.000	N	9.8	15.7	46.0
1.539193	29.5	9.000	N	9.8	16.5	46.0

Test Mode: M2 (BDR middle channel was the worst case);

Model Number: R29C
Port: L
Test Mode: M2
Power Source: AC 120V/60Hz
Note:

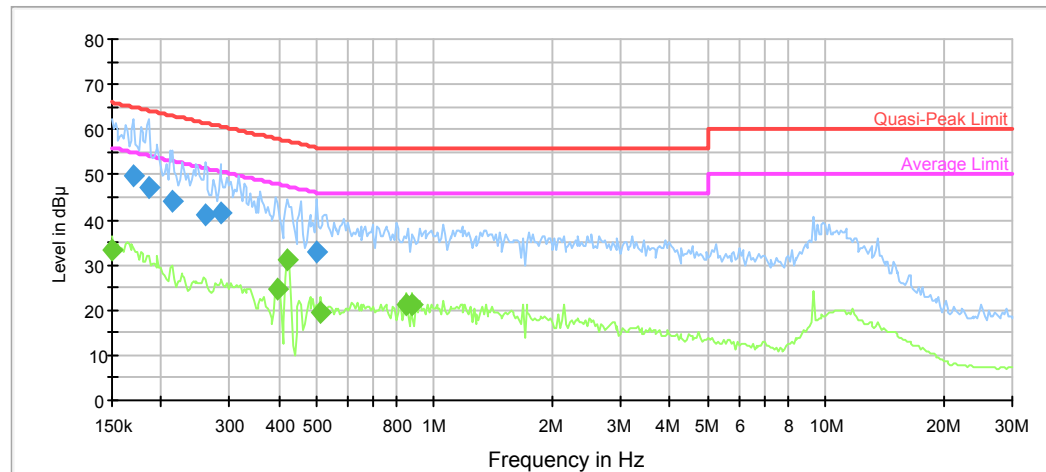


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.170714	49.7	9.000	L1	10.9	15.2	64.9
0.186708	47.3	9.000	L1	10.7	16.9	64.2
0.214615	44.2	9.000	L1	10.5	18.8	63.0
0.259279	41.2	9.000	L1	10.3	20.3	61.5
0.283569	41.5	9.000	L1	10.2	19.2	60.7
0.500009	32.9	9.000	L1	9.9	23.1	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	33.3	9.000	L1	11.2	22.7	56.0
0.397728	24.7	9.000	L1	10.0	23.2	47.9
0.422196	31.1	9.000	L1	9.9	16.3	47.4
0.510059	19.6	9.000	L1	9.9	26.4	46.0
0.847248	21.3	9.000	L1	9.8	24.7	46.0
0.872921	21.2	9.000	L1	9.8	24.8	46.0

Model Number: R29C
Port: N
Test Mode: M2
Power Source: AC 120V/60Hz
Note:

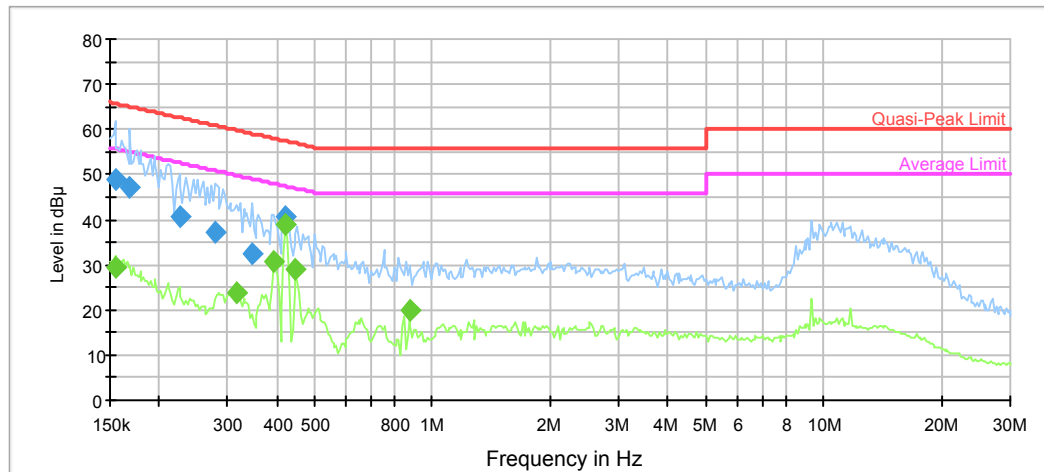

Final Result 1



Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154545	48.9	9.000	N	11.1	16.9	65.8
0.169024	47.1	9.000	N	10.9	17.9	65.0
0.225563	40.6	9.000	N	10.5	22.0	62.6
0.277982	37.0	9.000	N	10.2	23.9	60.9
0.346009	32.6	9.000	N	10.0	26.5	59.1
0.422196	40.5	9.000	N	9.9	16.9	57.4

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154545	29.4	9.000	N	11.1	26.4	55.8
0.316369	23.8	9.000	N	10.1	26.0	49.8
0.393790	30.5	9.000	N	10.0	17.5	48.0
0.422196	38.7	9.000	N	9.9	8.7	47.4
0.448170	28.9	9.000	N	9.9	18.0	46.9
0.872921	19.8	9.000	N	9.8	26.2	46.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

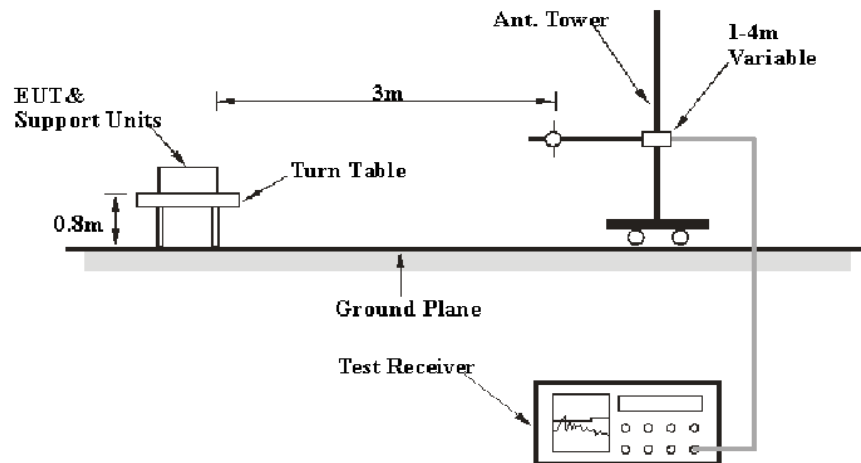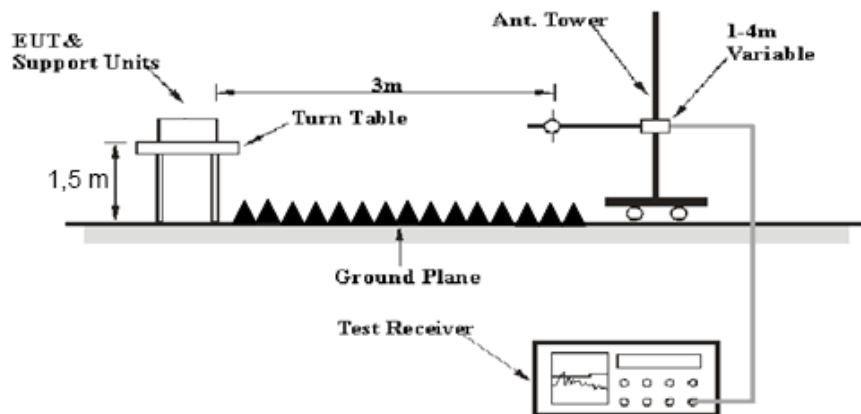EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Radiation Above 1GHz					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	27.1°C	26.6°C
Relative Humidity:	47%	53%
ATM Pressure:	101.5 kPa	101.1 kPa
Tester:	Neil Liao	Tyler Pan
Test Date:	2019-09-27	2019-10-17

Test Mode: Transmitting


Pre-scan two models (R29C, R29W) and two test modes, the worst case is R29C with M1.

1) 30MHz-1GHz (BDR high channel was the worst)

Horizontal:

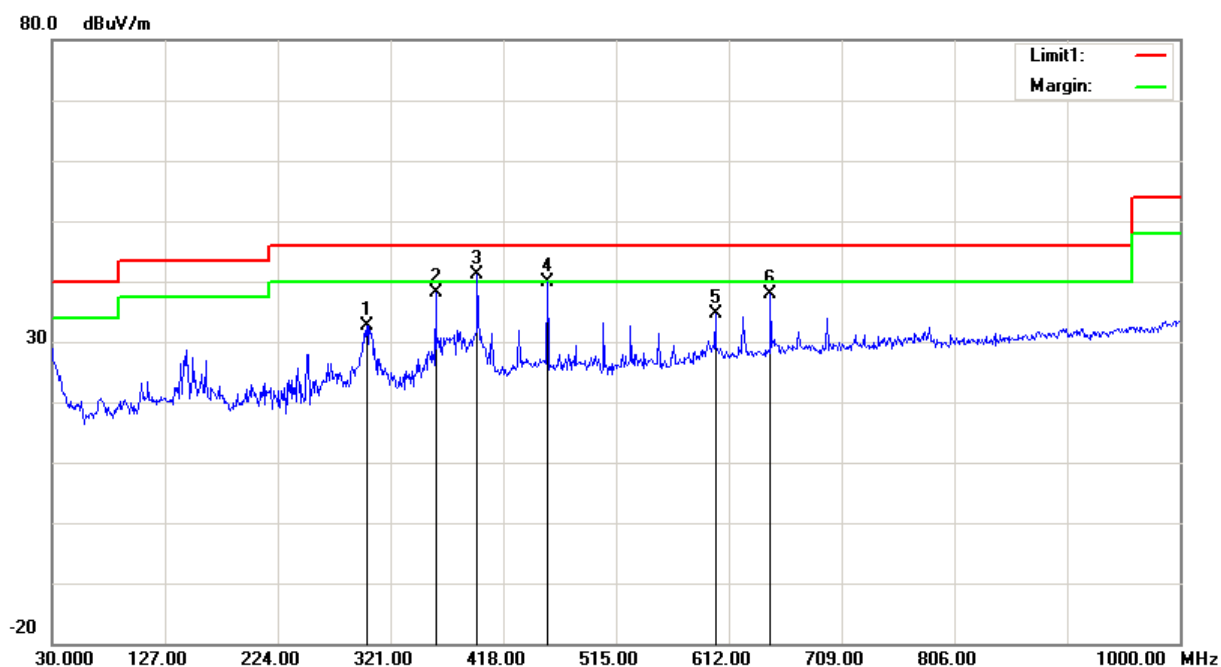

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
300.6300	36.53	peak	-3.79	32.74	46.00	13.26
359.8000	40.88	peak	-2.80	38.08	46.00	7.92
395.6900	43.30	peak	-2.07	41.23	46.00	4.77
455.8300	40.75	peak	-0.97	39.78	46.00	6.22
600.3600	33.67	peak	1.03	34.70	46.00	11.30
647.8900	35.78	peak	2.15	37.93	46.00	8.07

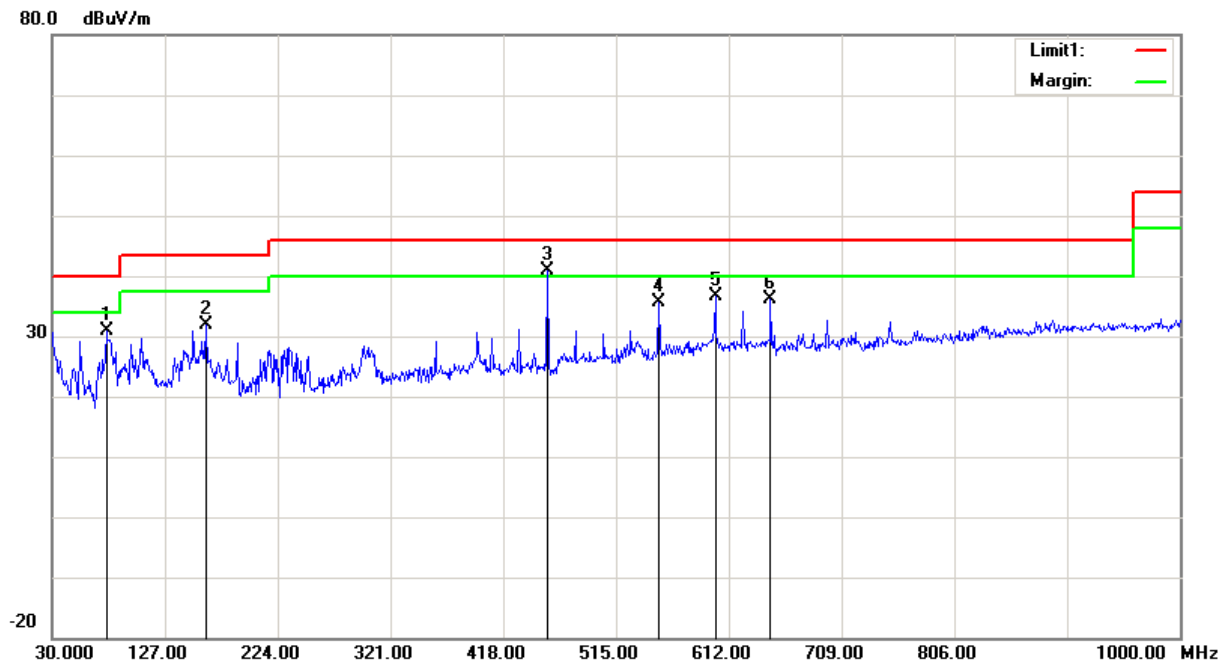Vertical:




Frequency (MHz)	Receiver Reading (dB μ V)	Remark	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
76.5600	42.00	peak	-11.08	30.92	40.00	9.08
161.9200	37.82	peak	-6.06	31.76	43.50	11.74
455.8300	41.85	peak	-0.97	40.88	46.00	5.12
551.8600	35.35	peak	0.35	35.70	46.00	10.30
600.3600	35.57	peak	1.03	36.60	46.00	9.40
647.8900	33.91	peak	2.15	36.06	46.00	9.94

2)1GHz-25GHz (BDR was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	38.09	PK	V	28.08	1.80	0.00	67.97	74.00	6.03
2390.00	13.57	AV	V	28.08	1.80	0.00	43.45	54.00	10.55
4804.00	50.35	PK	V	32.91	3.17	37.20	49.23	74.00	24.77
4804.00	37.86	AV	V	32.91	3.17	37.20	36.74	54.00	17.26
7206.00	46.77	PK	V	35.74	4.82	37.23	50.10	74.00	23.90
7206.00	34.25	AV	V	35.74	4.82	37.23	37.58	54.00	16.42
1188.00	66.65	PK	V	24.14	1.48	35.61	56.66	74.00	17.34
1188.00	48.33	AV	V	24.14	1.48	35.61	38.34	54.00	15.66
1980.00	62.58	PK	V	27.22	1.72	36.18	55.34	74.00	18.66
1980.00	44.76	AV	V	27.22	1.72	36.18	37.52	54.00	16.48
Middle Channel: 2441 MHz									
4882.00	51.33	PK	V	33.06	3.27	37.21	50.45	74.00	23.55
4882.00	38.96	AV	V	33.06	3.27	37.21	38.08	54.00	15.92
7323.00	46.85	PK	V	36.04	4.62	37.38	50.13	74.00	23.87
7323.00	34.41	AV	V	36.04	4.62	37.38	37.69	54.00	16.31
1188.00	66.85	PK	V	24.14	1.48	35.61	56.86	74.00	17.14
1188.00	48.51	AV	V	24.14	1.48	35.61	38.52	54.00	15.48
1980.00	62.75	PK	V	27.22	1.72	36.18	55.51	74.00	18.49
1980.00	44.76	AV	V	27.22	1.72	36.18	37.52	54.00	16.48
High Channel: 2480 MHz									
2483.50	30.77	PK	V	28.27	1.84	0.00	60.88	74.00	13.12
2483.50	19.65	AV	V	28.27	1.84	0.00	49.76	54.00	4.24
4960.00	50.17	PK	V	33.22	3.23	37.25	49.37	74.00	24.63
4960.00	37.82	AV	V	33.22	3.23	37.25	37.02	54.00	16.98
7440.00	46.93	PK	V	36.34	4.41	37.52	50.16	74.00	23.84
7440.00	34.56	AV	V	36.34	4.41	37.52	37.79	54.00	16.21
1188.00	66.20	PK	V	24.14	1.48	35.61	56.21	74.00	17.79
1188.00	47.88	AV	V	24.14	1.48	35.61	37.89	54.00	16.11
1980.00	62.89	PK	V	27.22	1.72	36.18	55.65	74.00	18.35
1980.00	45.10	AV	V	27.22	1.72	36.18	37.86	54.00	16.14




Worst plots (BDR high channel was the worst)
Horizontal

Fundamental
Test with Band
Rejection Filter

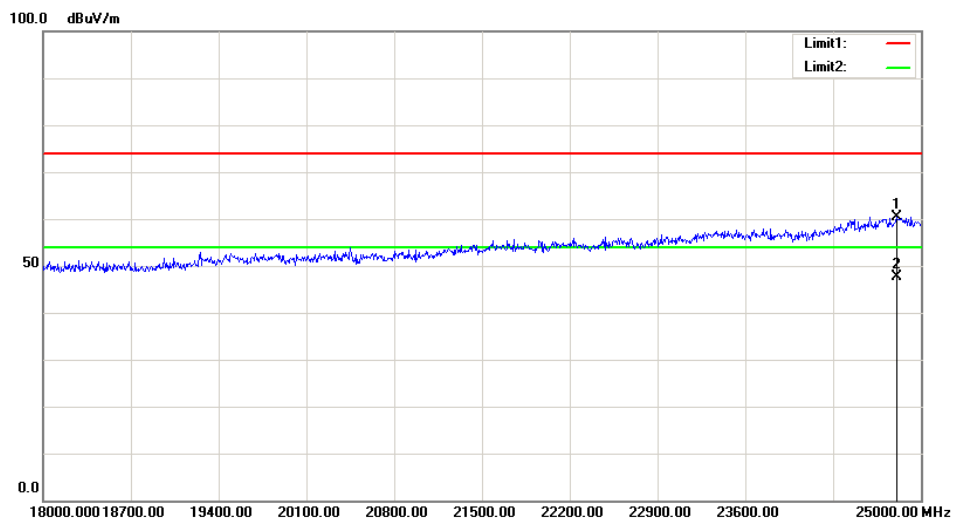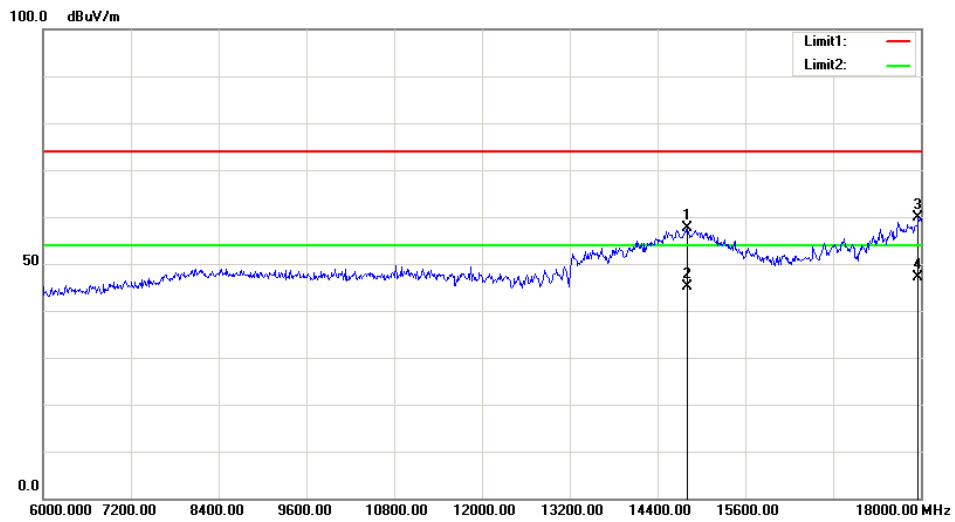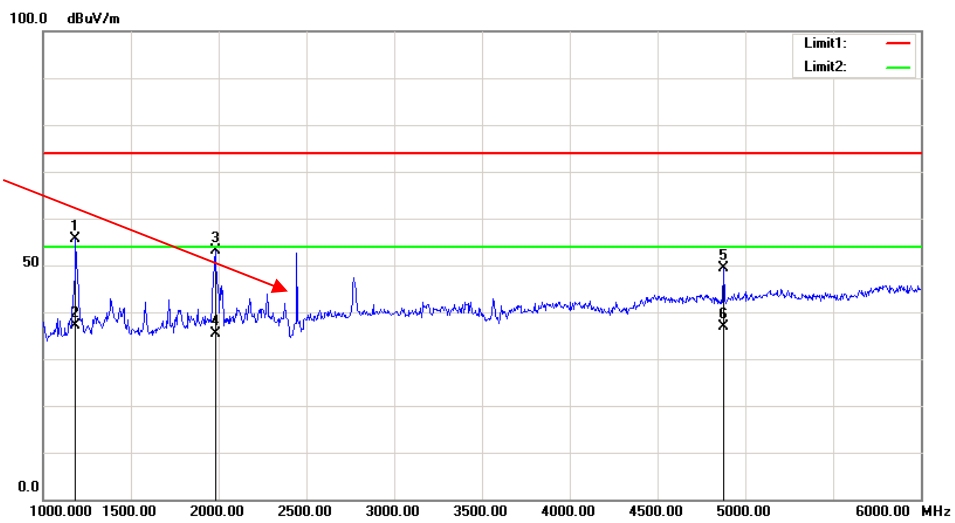

Vertical

Fundamental
Test with Band
Rejection Filter

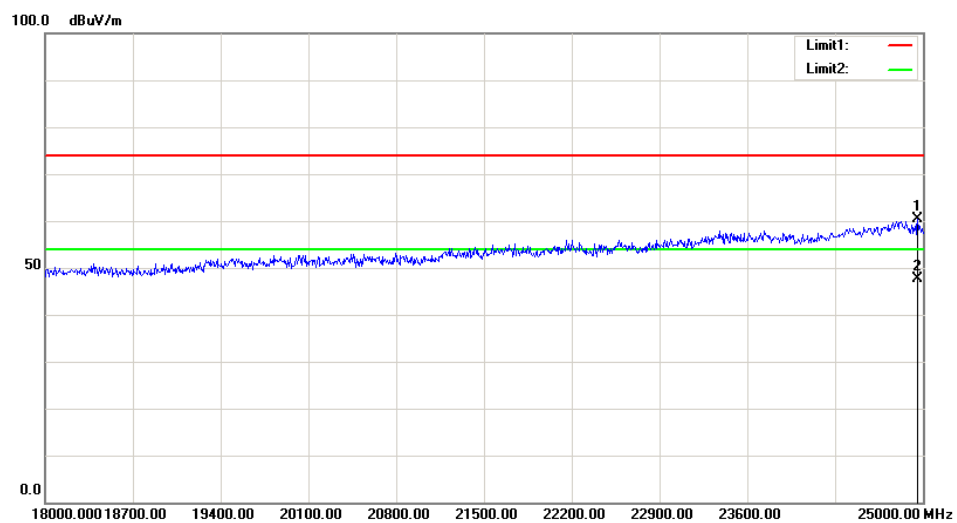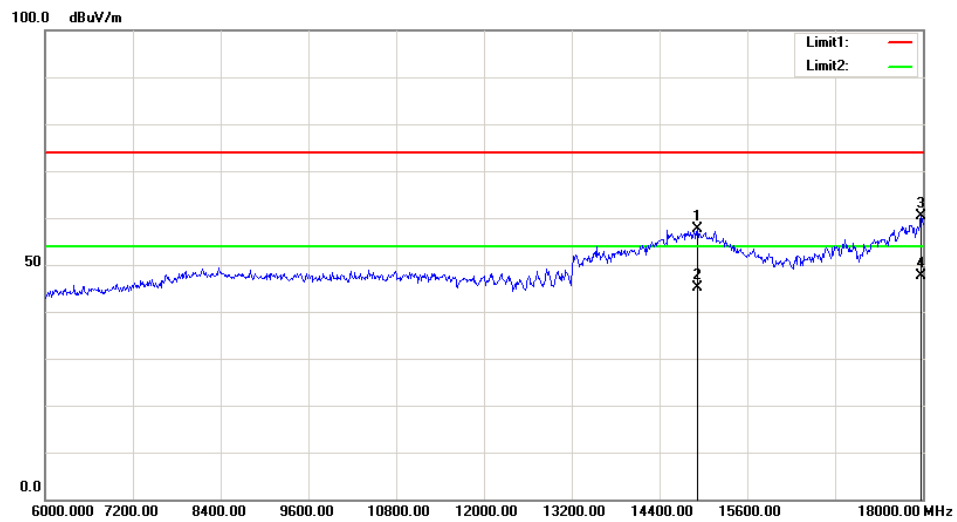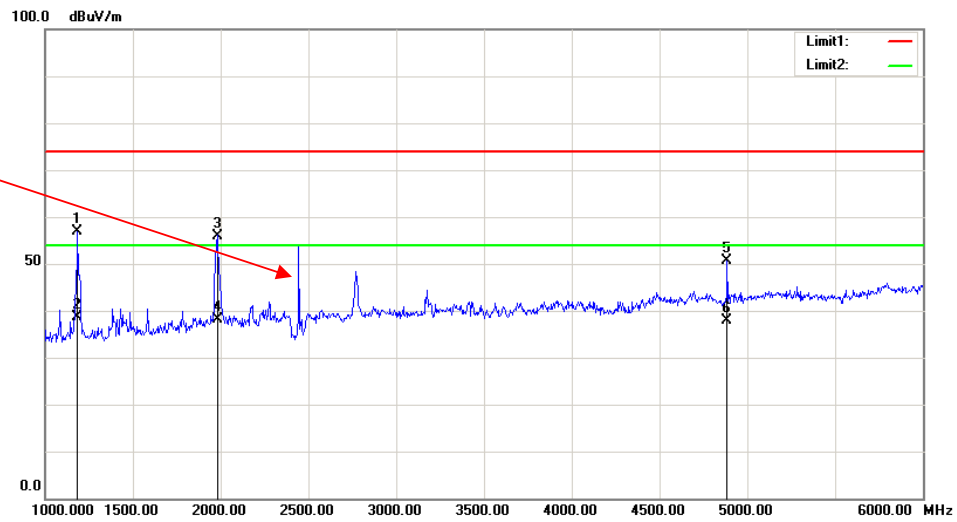

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa
Test by:	Elena Lei
Test Date:	2019-10-13

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402-2403	1.008	0.69
	Middle	2441-2442	1.002	0.69
	High	2480-2479	1.002	0.69
EDR ($\pi/4$ -DQPSK)	Low	2402-2403	1.002	0.86
	Middle	2441-2442	0.996	0.86
	High	2480-2479	1.002	0.86
EDR (8DPSK)	Low	2402-2403	1.002	0.82
	Middle	2441-2442	1.002	0.81
	High	2480-2479	1.002	0.81

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$


BDR Mode (GFSK):

Please refer to following plots:

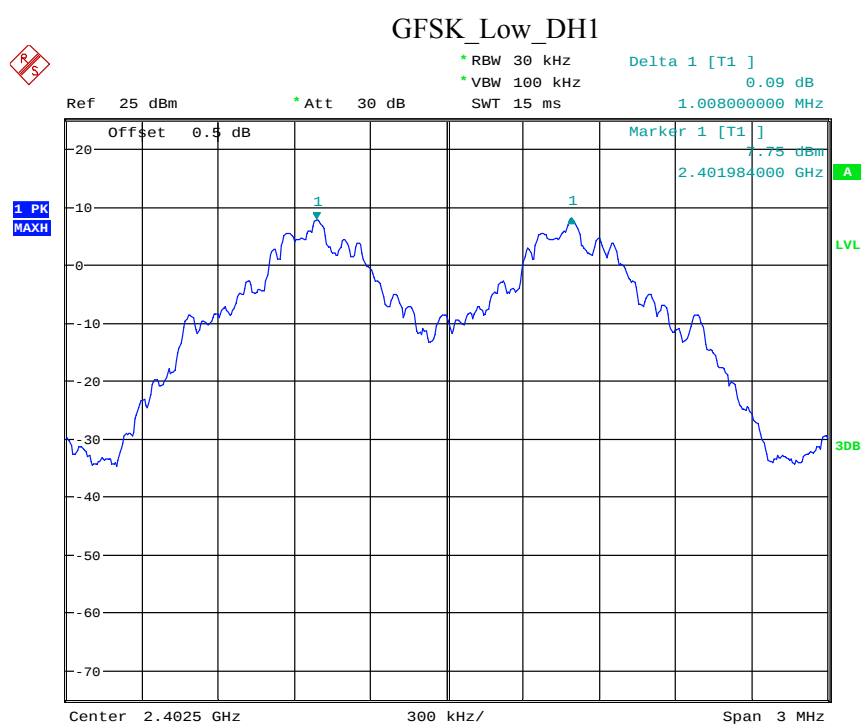


Date: 13.OCT.2019 11:27:39

GFSK_Middle_DH1

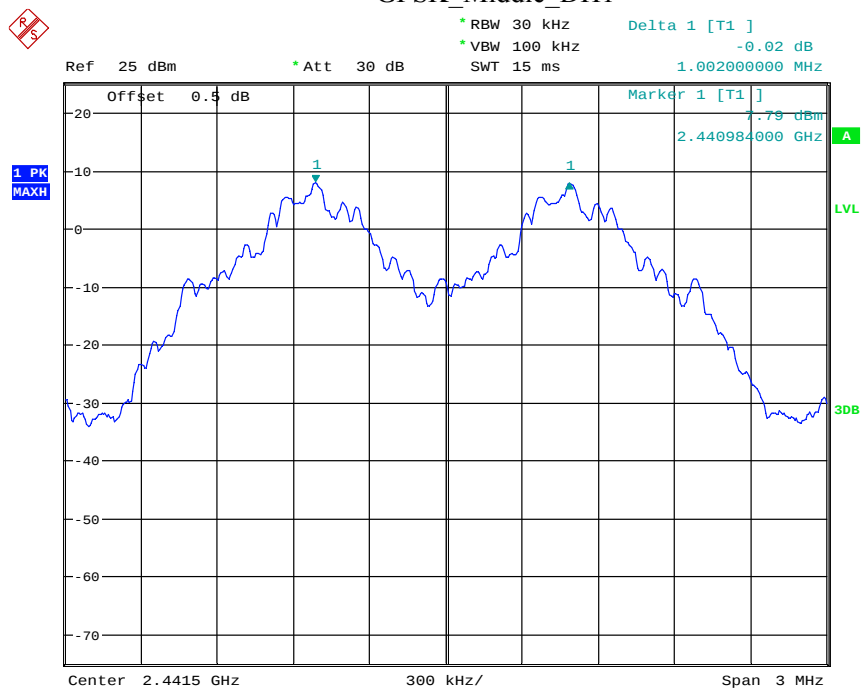


Date: 13.OCT.2019 11:28:37


GFSK_High_DH1

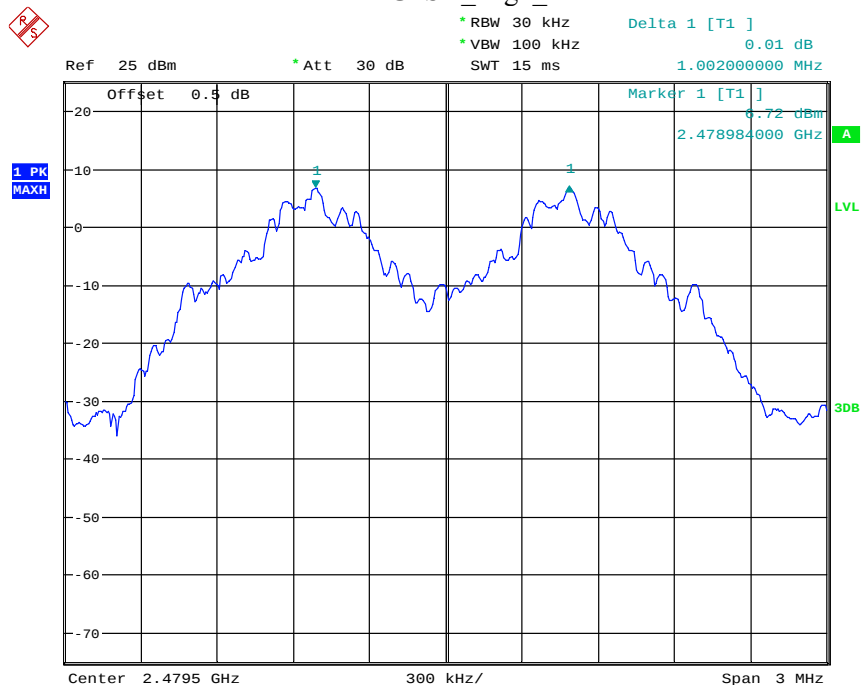


Date: 13.OCT.2019 11:29:17

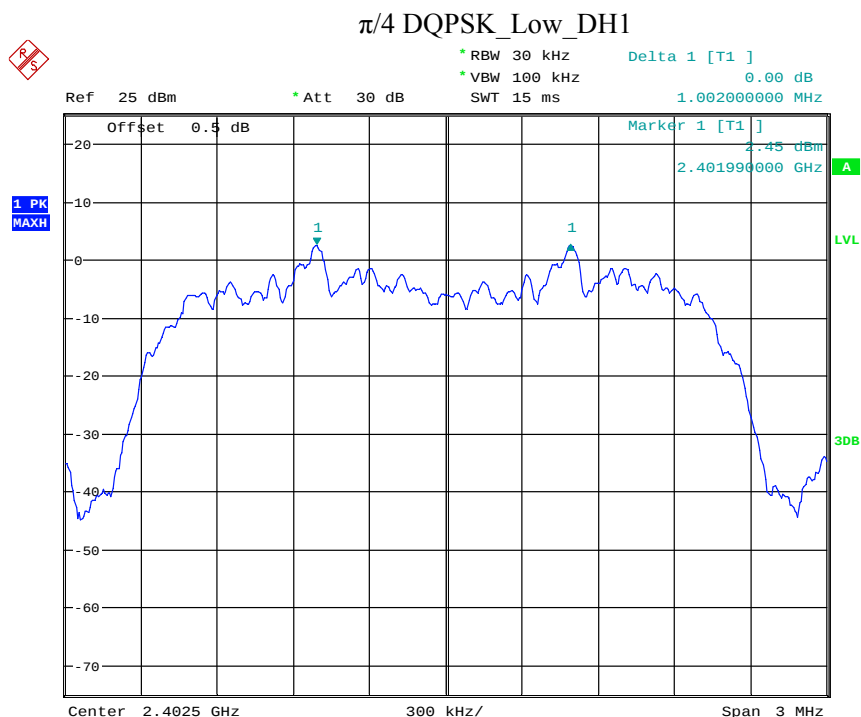


Date: 13.OCT.2019 11:29:52

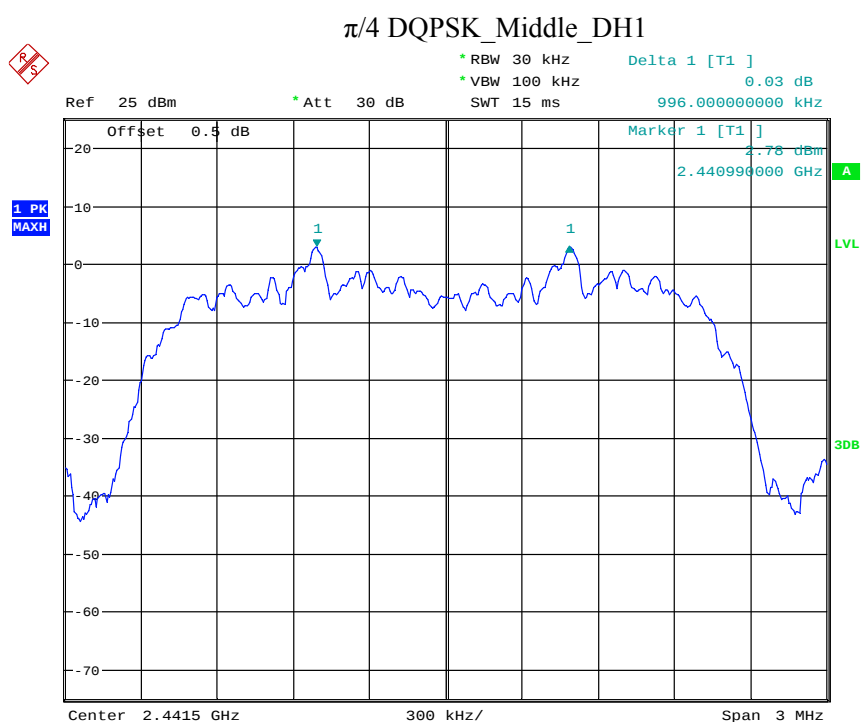

Date: 13.OCT.2019 11:30:26

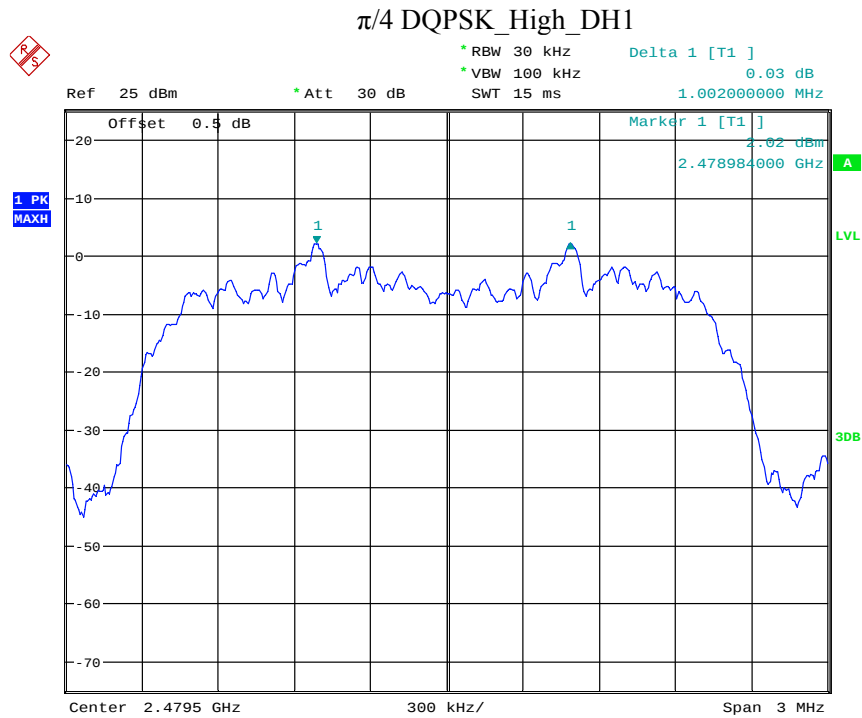


Date: 13.OCT.2019 11:31:04

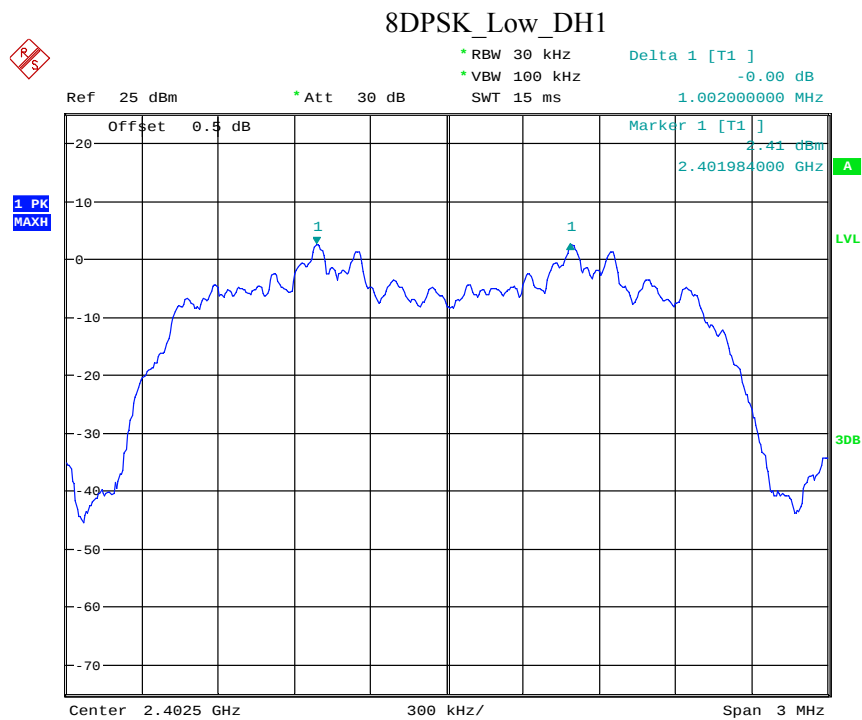


Date: 13.OCT.2019 11:31:38

8DPSK_Middle_DH1

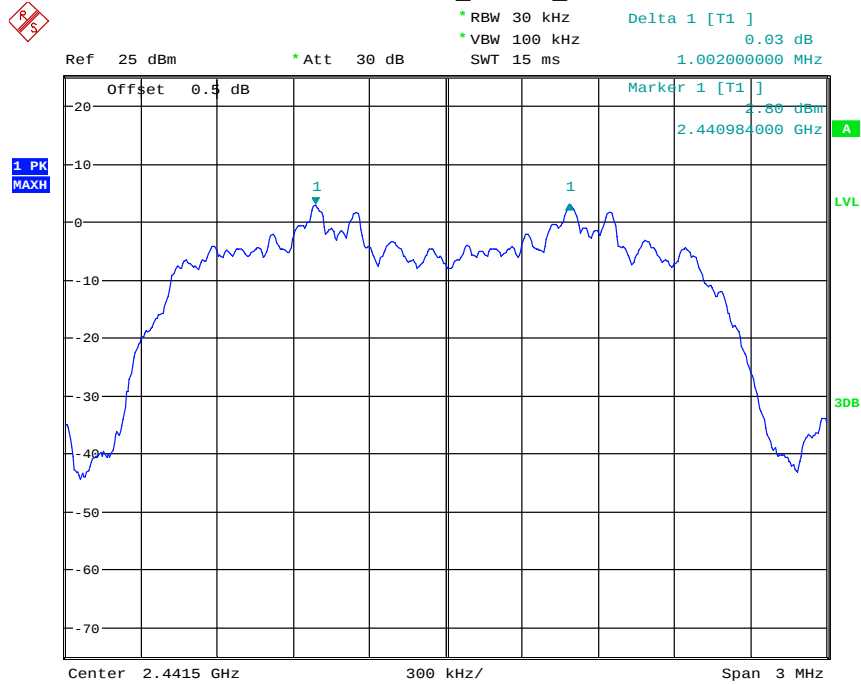

Date: 13.OCT.2019 11:32:14

8DPSK_High_DH1

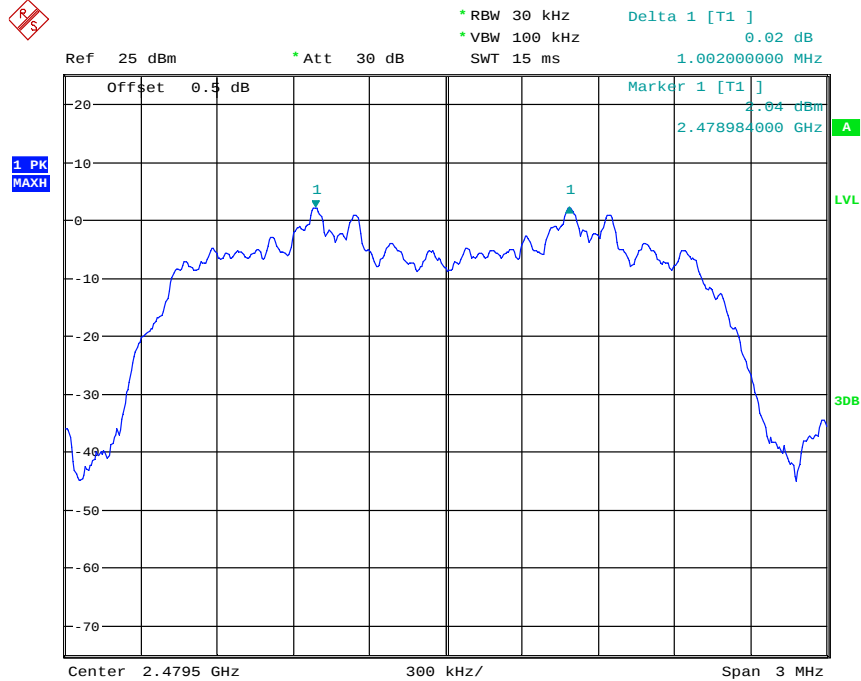

Date: 13.OCT.2019 11:33:00

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa
Test by:	Elena Lei
Test Date:	2019-10-13

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.036
	Middle	2441	1.040
	High	2480	1.036
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.284
	Middle	2441	1.288
	High	2480	1.284
EDR Mode (8DPSK)	Low	2402	1.224
	Middle	2441	1.220
	High	2480	1.216


BDR Mode (GFSK):

Low Channel

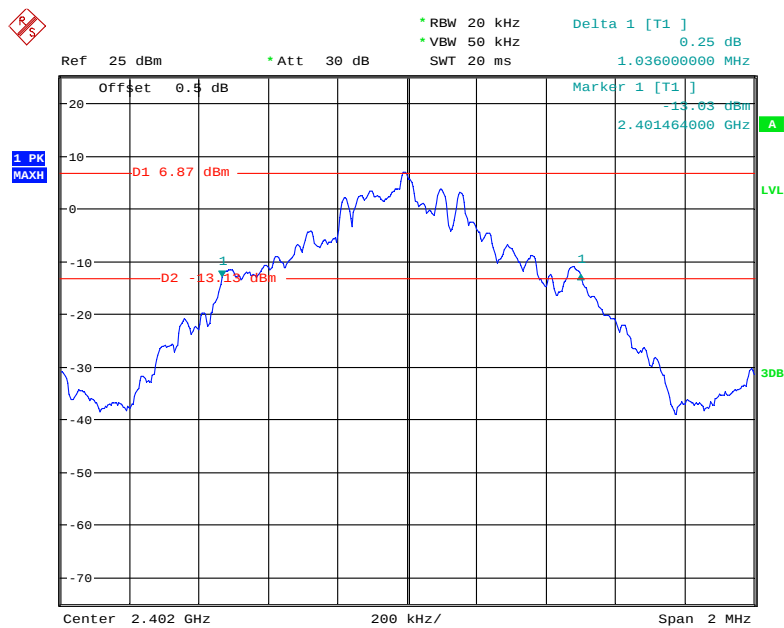

Date: 13.OCT.2019 11:15:48

Middle Channel

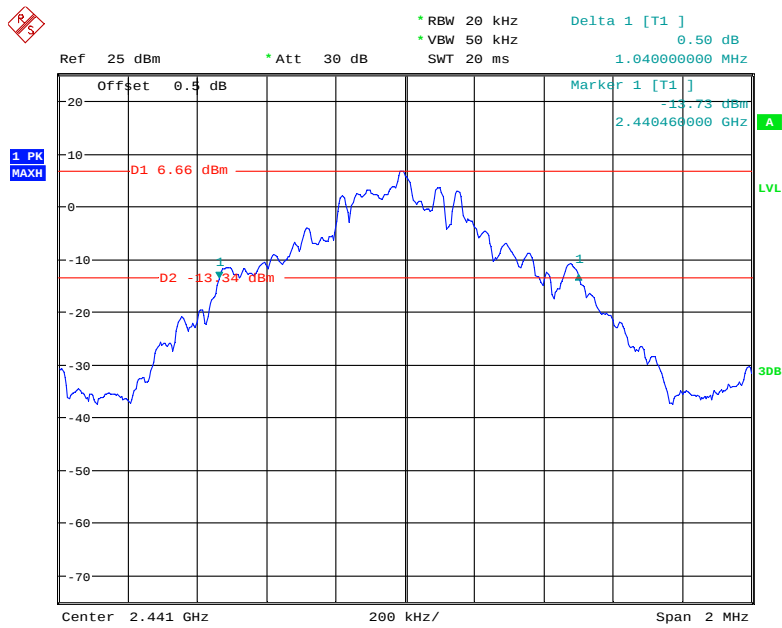


Date: 13.OCT.2019 11:17:29

High Channel




Date: 13.OCT.2019 11:18:20

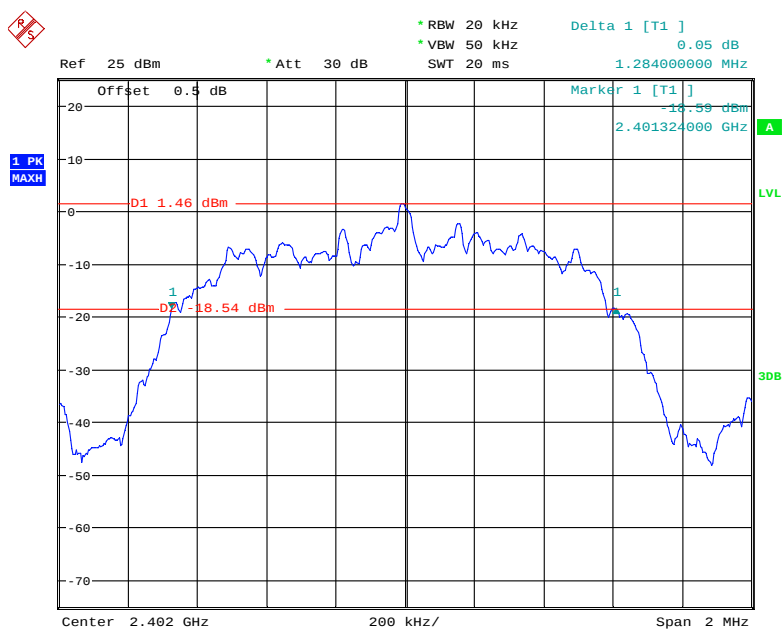*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**


Date: 13.OCT.2019 11:19:39

Middle Channel

Date: 13.OCT.2019 11:20:50

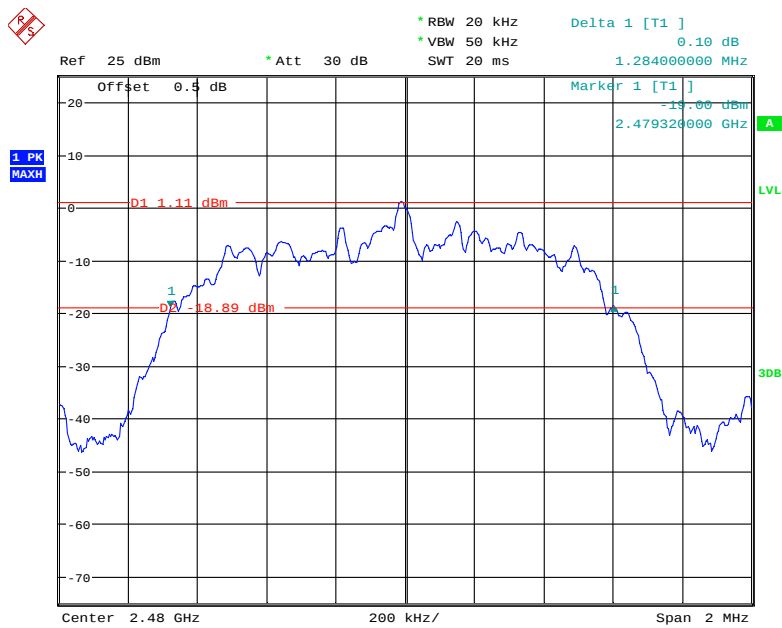
High Channel

Date: 13.OCT.2019 11:21:48

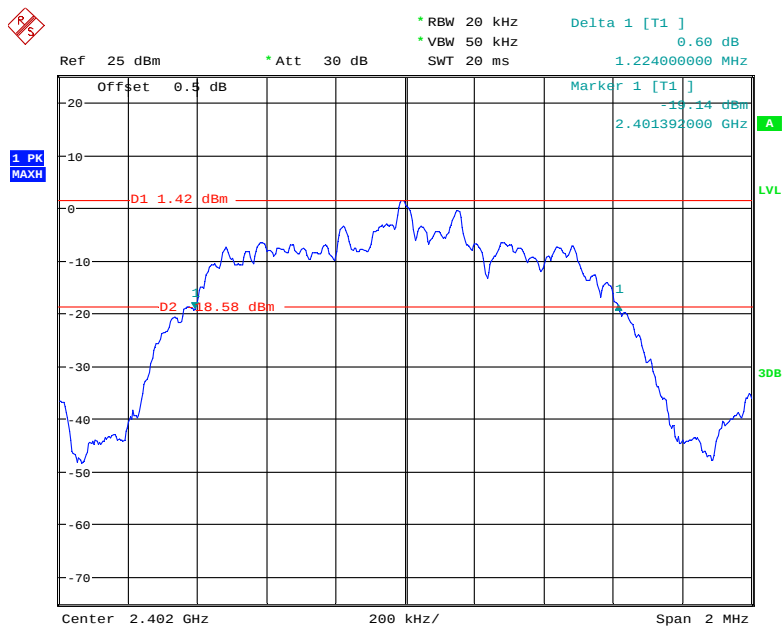*EDR Mode (8DPSK):***Low Channel**


Date: 13.OCT.2019 11:22:59

Middle Channel

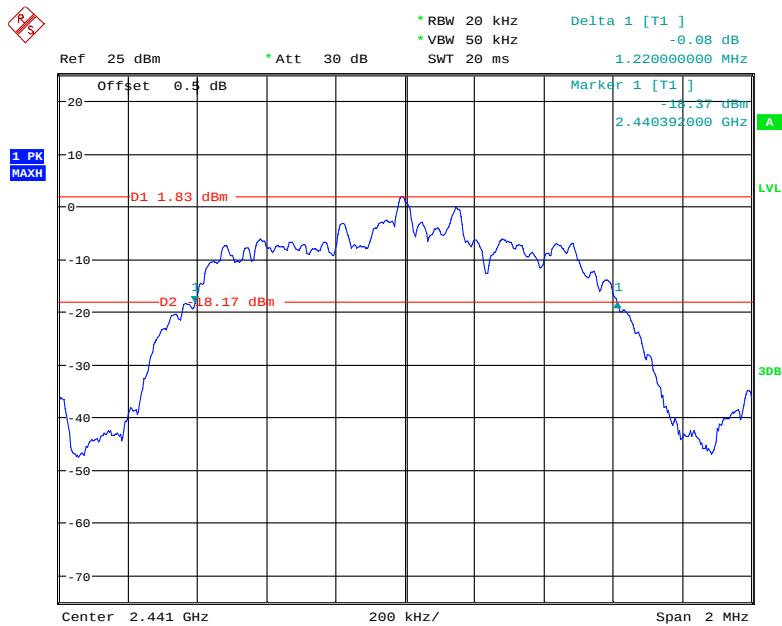

Date: 13.OCT.2019 11:24:01

High Channel

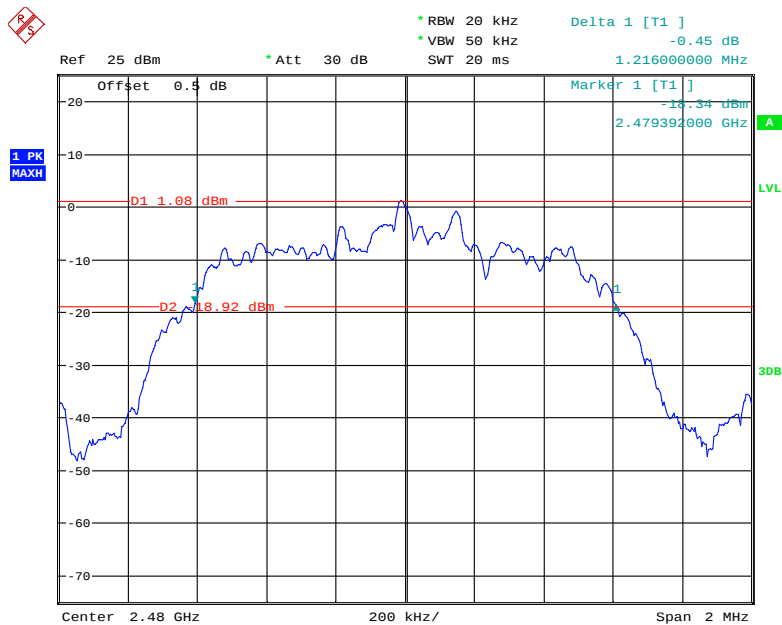

Date: 13.OCT.2019 11:24:52

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa
Test by:	Elena Lei
Test Date:	2019-10-13


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15


BDR Mode (GFSK)

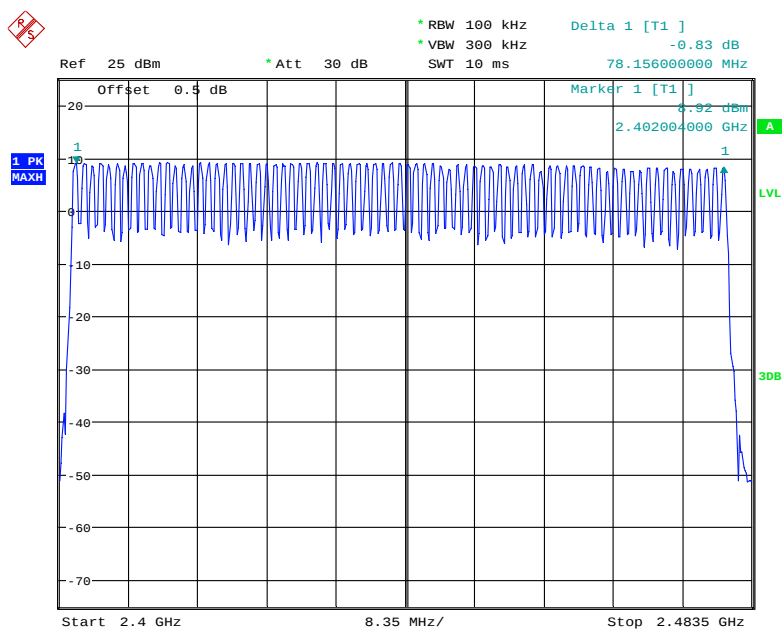

Date: 13.OCT.2019 11:35:48

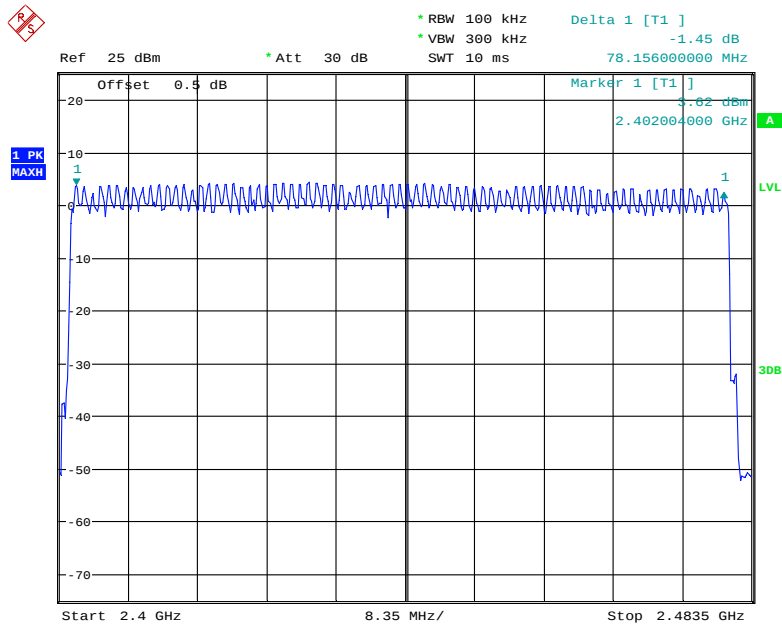EDR Mode ($\pi/4$ -DQPSK)

Date: 13.OCT.2019 11:39:16

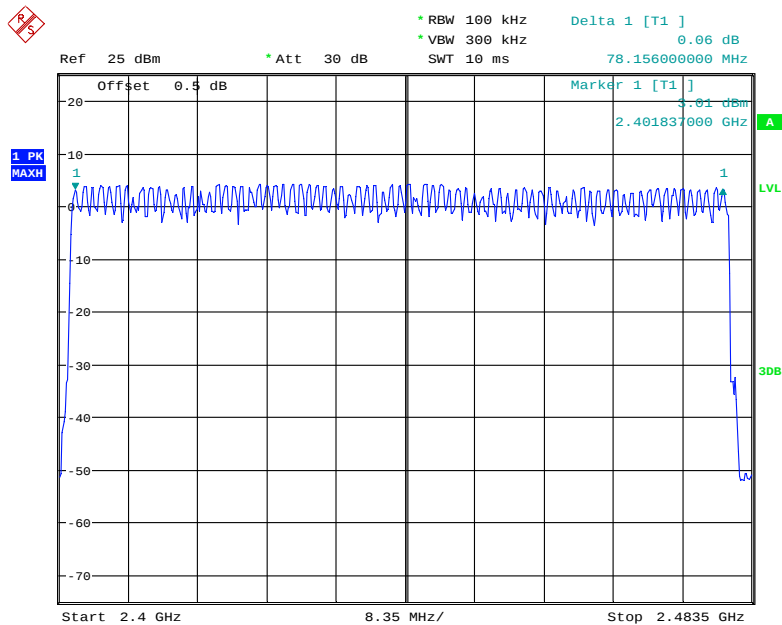EDR Mode (8DPSK)

Date: 13.OCT.2019 11:42:04

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa
Test by:	Elena Lei
Test Date:	2019-10-13


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Packet type	Channel	Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.428	0.137	0.4
	DH3	Middle	2441	1.692	0.271	
	DH5	Middle	2441	2.950	0.315	
$\pi/4$ -DQPSK	DH1	Middle	2441	0.434	0.139	
	DH3	Middle	2441	1.704	0.273	
	DH5	Middle	2441	2.958	0.316	
8DPSK	DH1	Middle	2441	0.432	0.138	
	DH3	Middle	2441	1.698	0.272	
	DH5	Middle	2441	2.960	0.316	

Note:
DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s
DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s
DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s

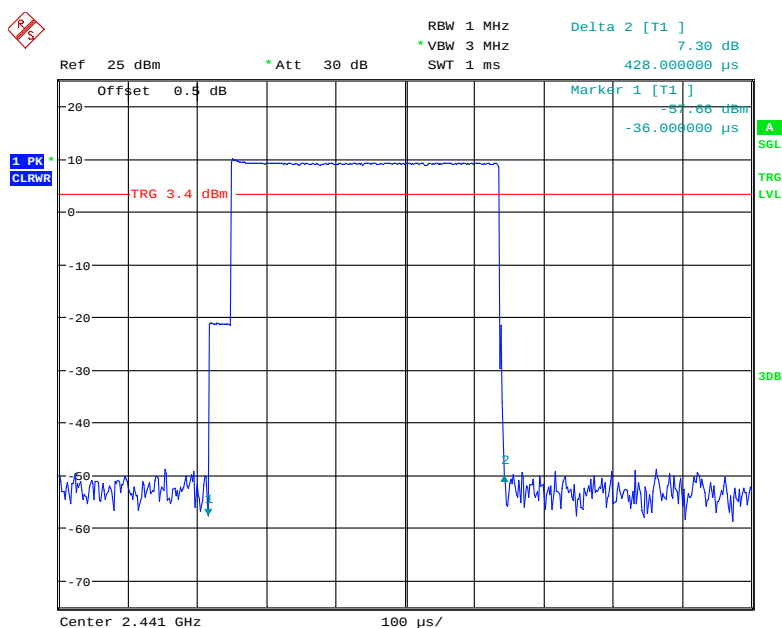*BDR Mode (GFSK):***DH1: Middle Channel**


Date: 13.OCT.2019 11:55:25

DH3: Middle Channel

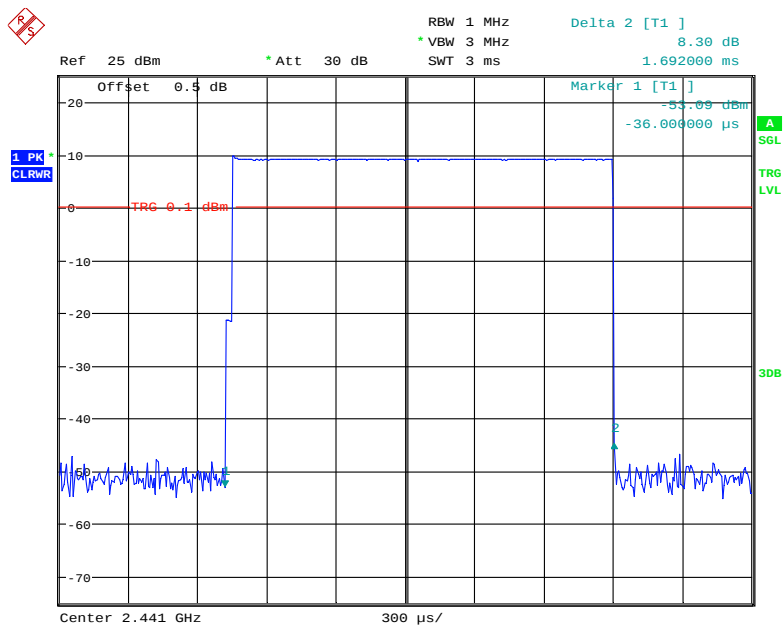


Date: 13.OCT.2019 11:55:40


DH5: Middle Channel

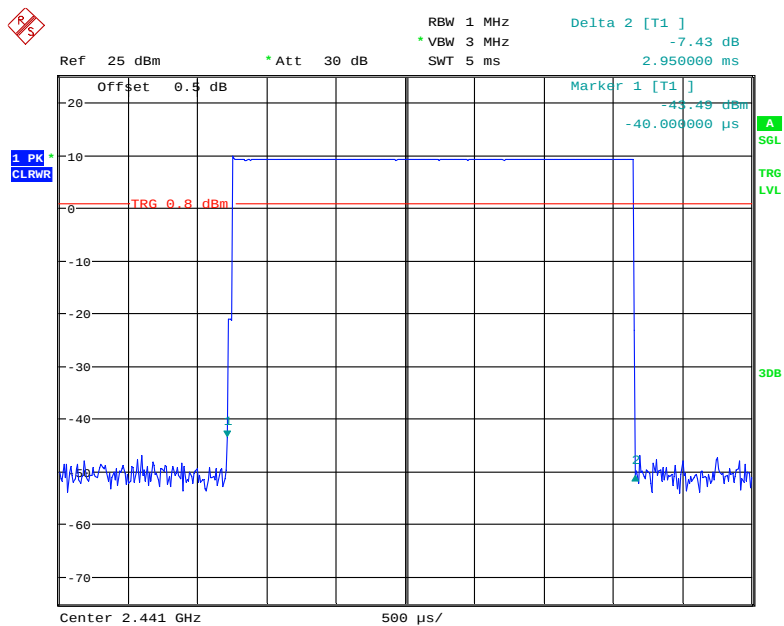

Date: 13.OCT.2019 11:56:00

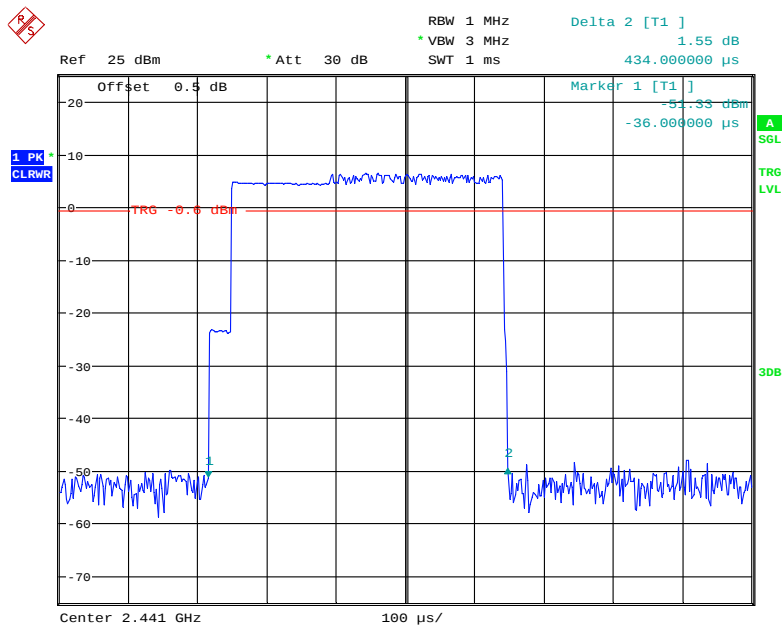
*EDR Mode ($\pi/4$ -DQPSK):***2DH1: Middle Channel**

Date: 13.OCT.2019 11:51:46

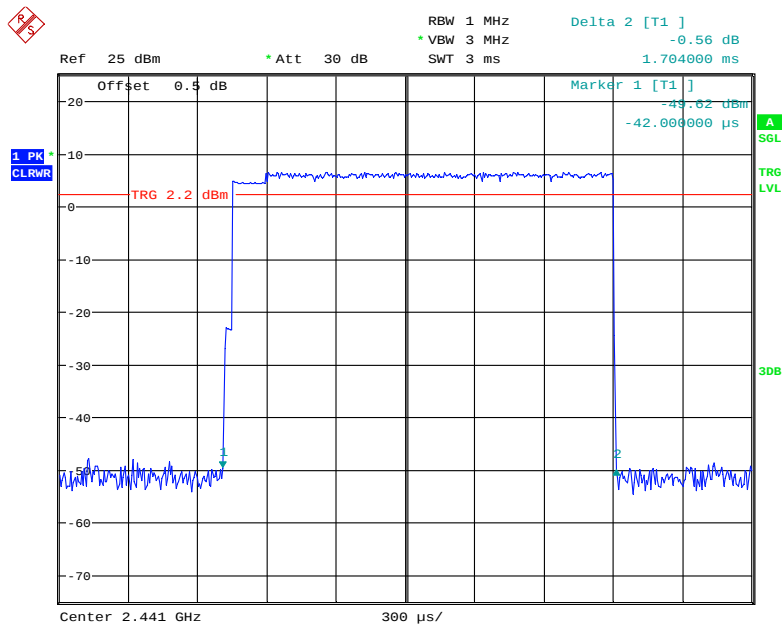2DH3: Middle Channel

Date: 13.OCT.2019 11:53:30


2DH5: Middle Channel

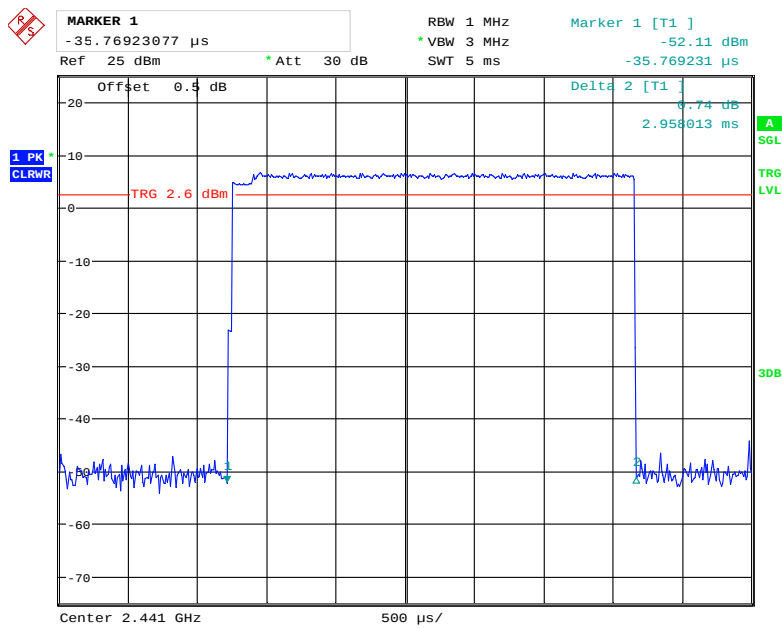

Date: 13.OCT.2019 11:54:08


EDR Mode 8DPSK):

3DH1: Middle Channel

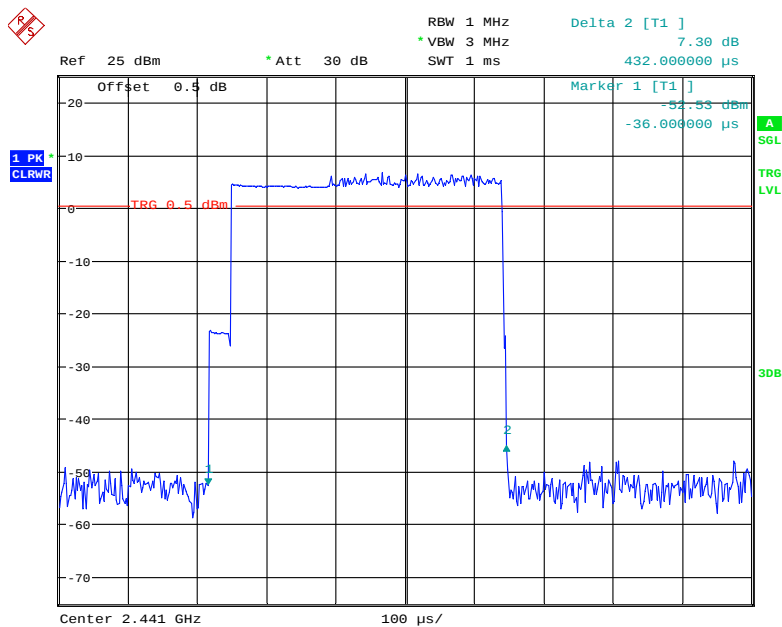


Date: 13.OCT.2019 11:46:44

3DH3: Middle Channel

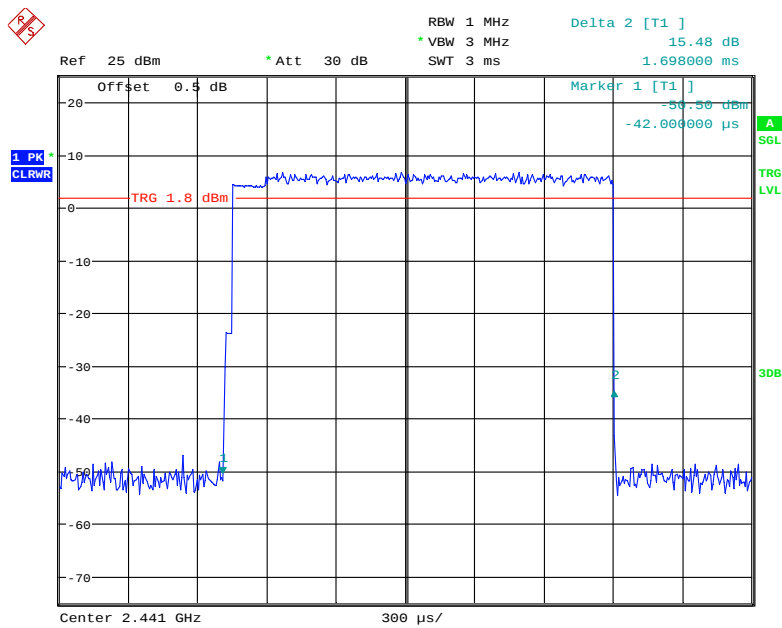

Date: 13.OCT.2019 11:48:21

3DH5: Middle Channel

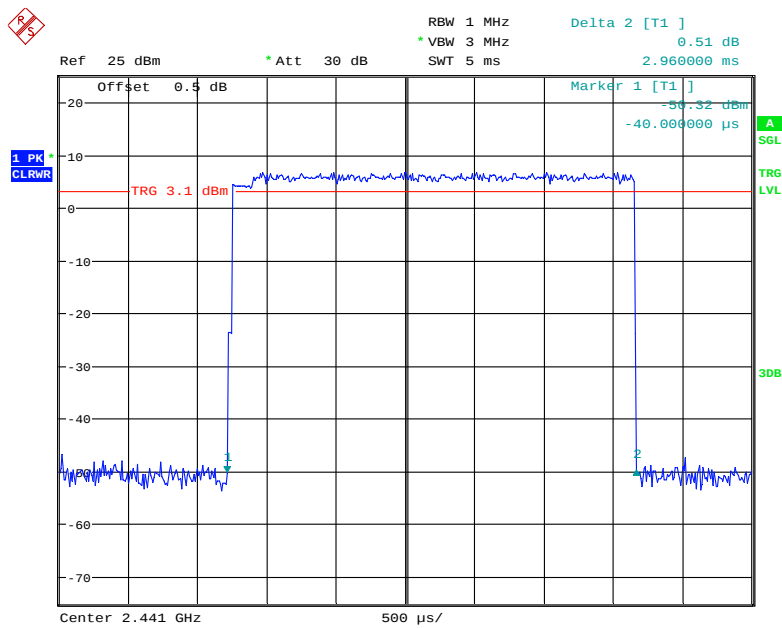

Date: 13.OCT.2019 11:49:29

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2019-09-06	2020-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.8 kPa
Test by:	Elena Lei
Test Date:	2019-10-13

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	9.77	21
	2441	9.80	21
	2480	8.93	21
EDR Mode ($\pi/4$ -DQPSK)	2402	6.42	21
	2441	6.75	21
	2480	6.02	21
EDR Mode (8DPSK)	2402	6.88	21
	2441	7.25	21
	2480	6.45	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




EDR Mode ($\pi/4$ -DQPSK):



Page 51 of 56

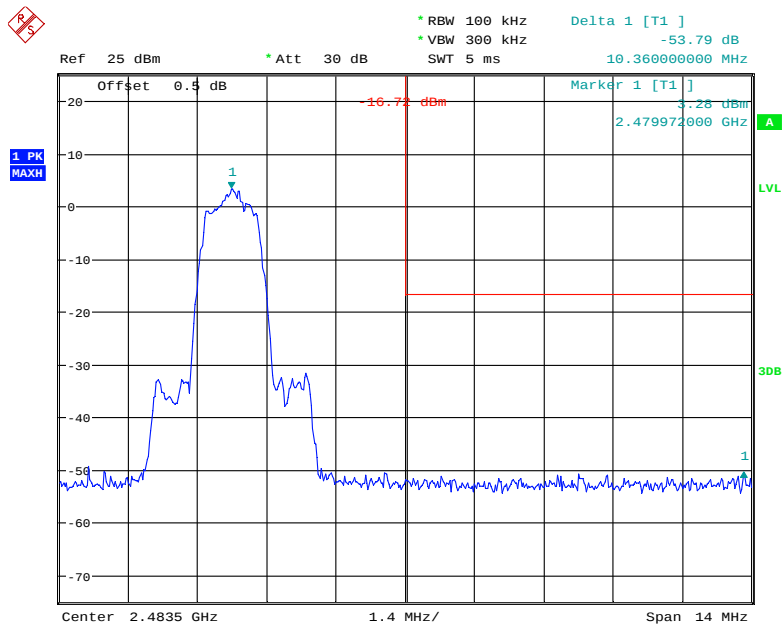
Band Edge, Right Side

Date: 13.OCT.2019 11:22:31

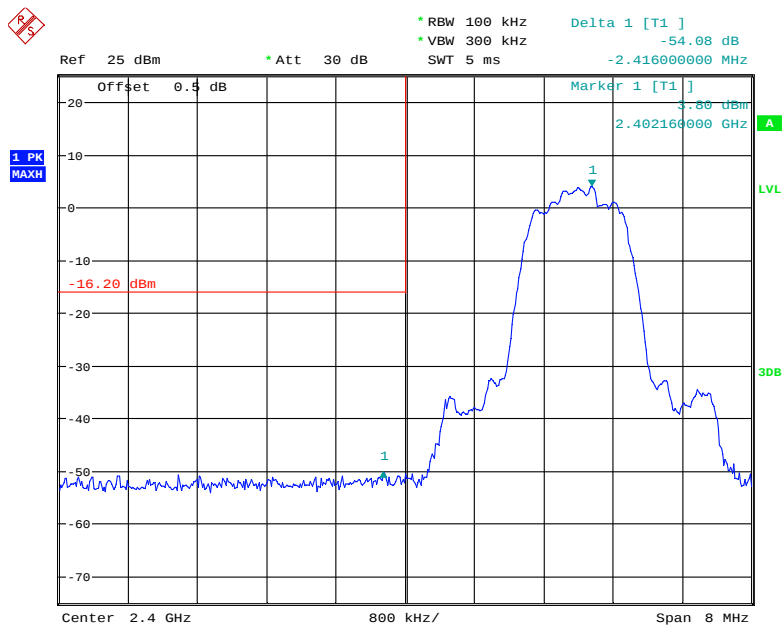*EDR Mode (8DPSK):***Band Edge, Left Side**

Date: 13.OCT.2019 11:23:42


Band Edge, Right Side

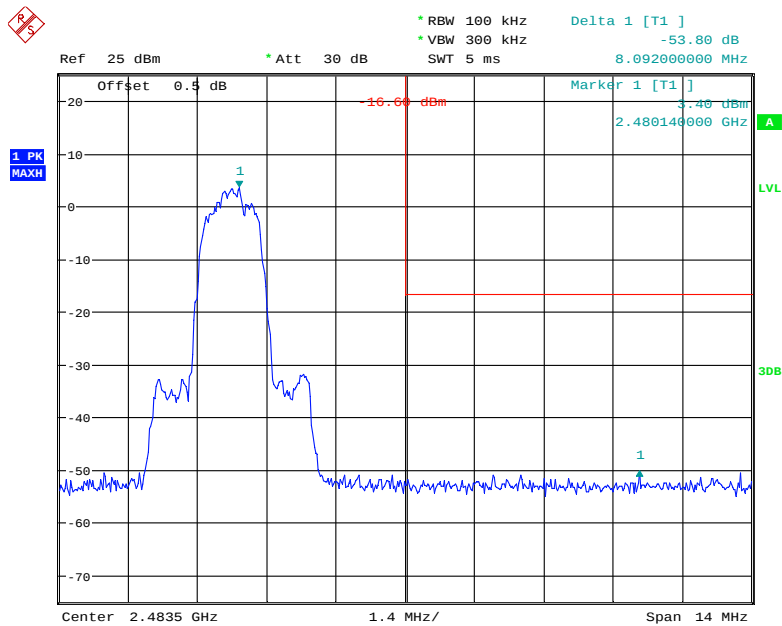

Date: 13.OCT.2019 11:25:35


Hopping Mode,
BDR Mode (GFSK):

Band Edge, Left Side

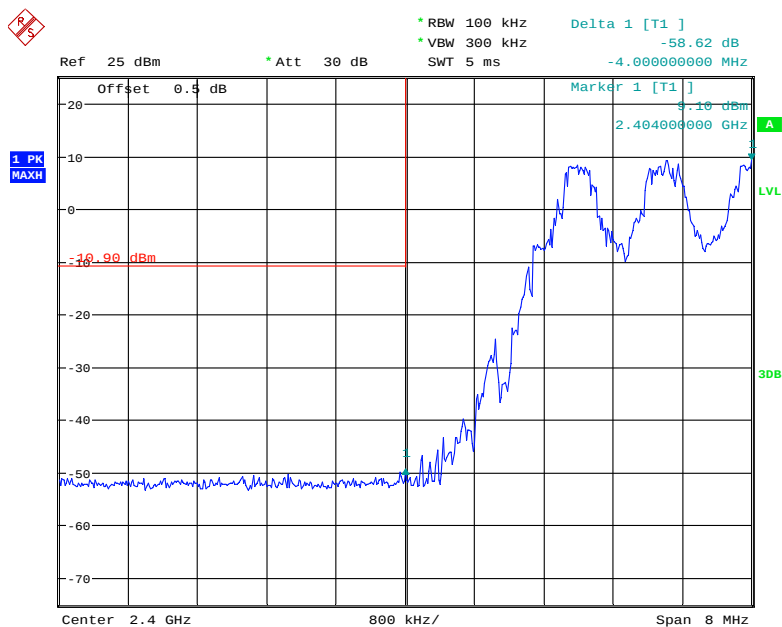

Date: 13.OCT.2019 13:01:33


Band Edge, Right Side

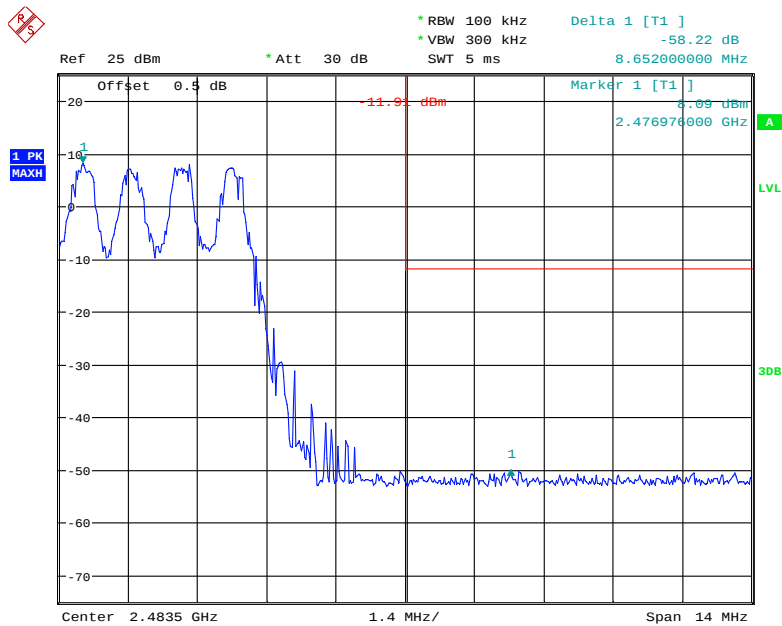

Date: 13.OCT.2019 13:02:43


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

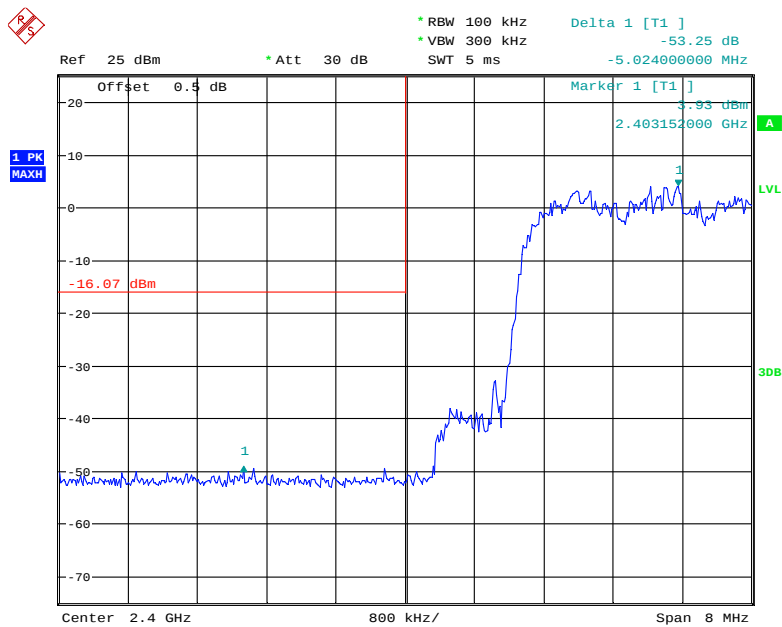

Date: 13.OCT.2019 13:04:16


Band Edge, Right Side

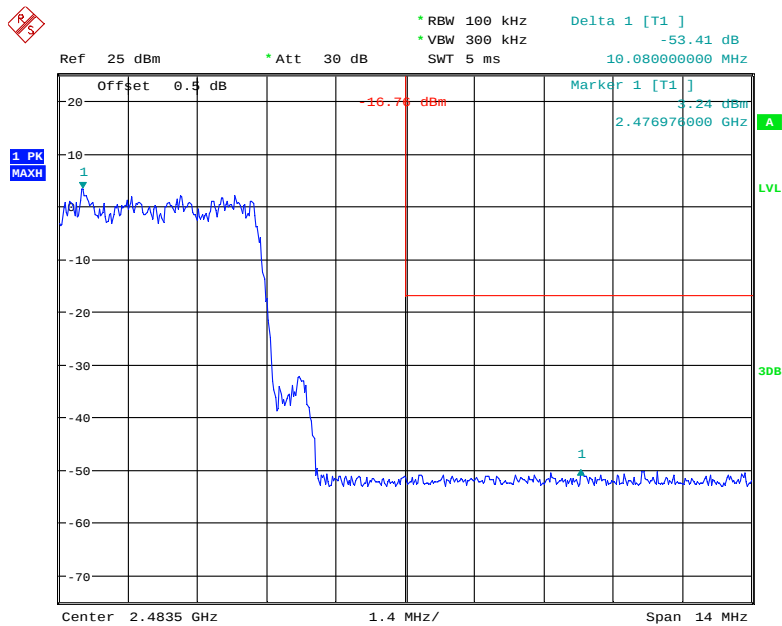

Date: 13.OCT.2019 13:05:15


EDR Mode (8DPSK):

Band Edge, Left Side

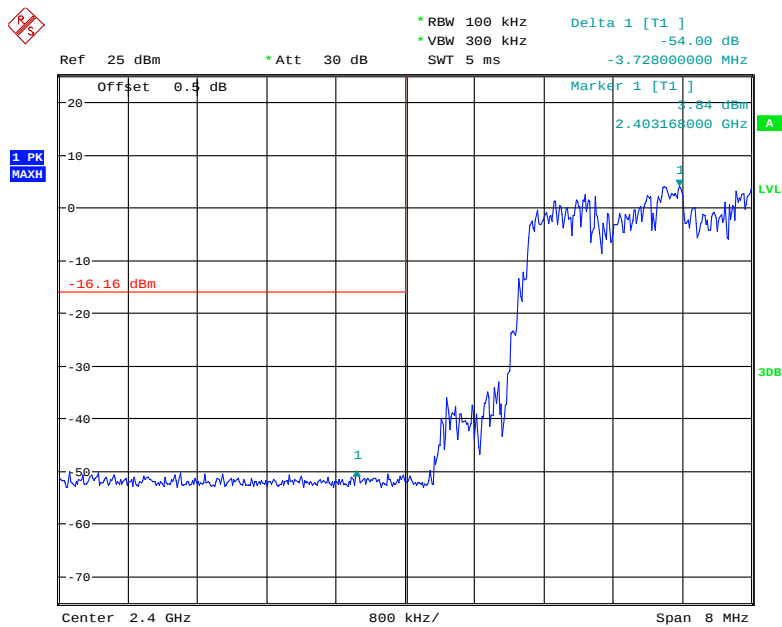

Date: 13.OCT.2019 13:07:20

Band Edge, Right Side

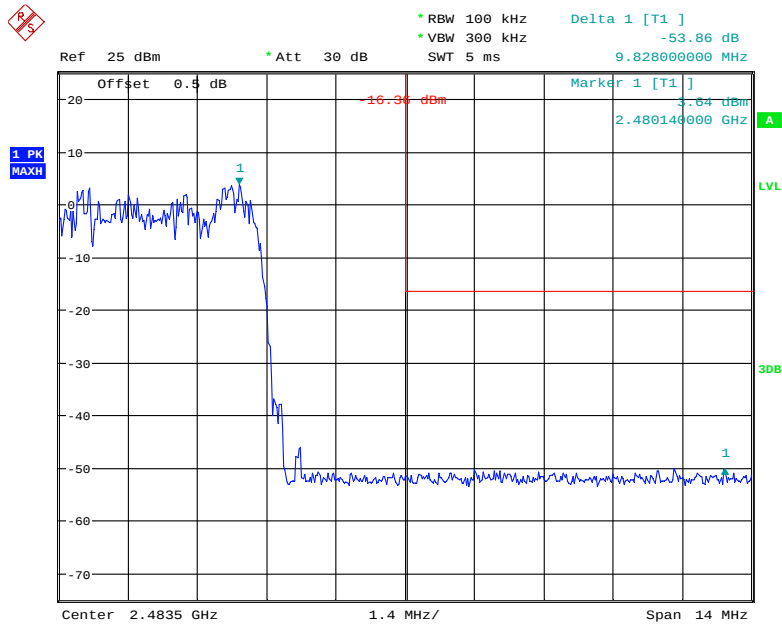

Date: 13.OCT.2019 13:06:18

***** END OF REPORT *****