



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

AKUVOX (XIAMEN) NETWORKS CO., LTD.

10/F, No.56, Software Park II , Xiamen, China

FCC ID: 2AHCR-VPR73G

Report Type: Original Report	Product Name: Video Phone
Report Number: RXM190225051-00E	
Report Date: 2019-09-18	
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39

TEST DATA	39
FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA	42
FCC §15.247(e) - POWER SPECTRAL DENSITY	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Video Phone
EUT Model:		VP-R73G
Multiple Models:		R73G
Operation Frequency:		2412-2462 MHz(802.11b/g/n ht20) 2402-2480MHz(BLE)
Maximum Peak Output Power (Conducted):		21.34 dBm(802.11b/g/n) 4.83 dBm(BLE)
Modulation Type:		DSSS, OFDM(802.11b/g/n ht20) GFSK(BLE)
Rated Input Voltage:		DC 12V from adapter or DC48V from PoE
Adapter Information	Model:	KL-AD3060VA
	Input:	100-240Vac
	Output:	DC 12V 1.5A
External Dimension:		260mm(L)*90mm(W)*230mm(H)
Serial Number:		190225051
EUT Received Date:		2019/3/2

Notes: Model VP-R73G was selected for fully testing, the detailed information about the difference among R73G and model VP-R73G can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of **AKUVOX (XIAMEN) NETWORKS CO., LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: 2AHCR-VPR73G
FCC Part 15C DSS submissions with FCC ID: 2AHCR-VPR73G
FCC Part 15B JAB submissions with FCC ID: 2AHCR-VPR73G

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

The software “RFTestTool” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:


Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
802.11b	Low	2412	1Mbps	Default
	Middle	2437	1Mbps	Default
	High	2462	1Mbps	Default
802.11g	Low	2412	6Mbps	Default
	Middle	2437	6Mbps	Default
	High	2462	6Mbps	Default
802.11n ht20	Low	2412	MCS0	Default
	Middle	2437	MCS0	Default
	High	2462	MCS0	Default

Bluetooth LE mode was configured by the system default setting


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
BLE	0.390	0.630	61.9

802.11b

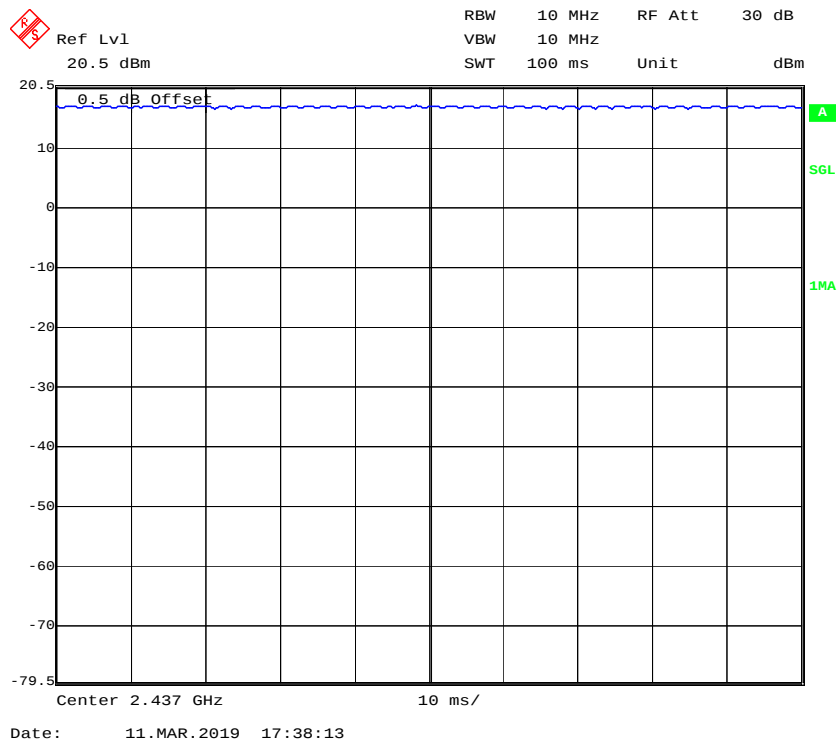


802.11g

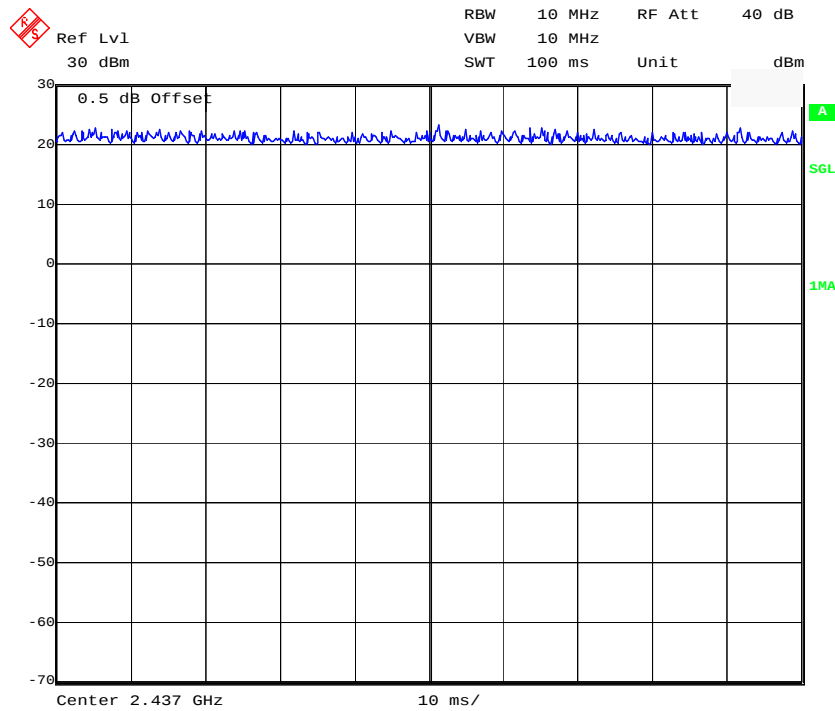


Date: 11.MAR.2019 17:38:40

802.11n ht20

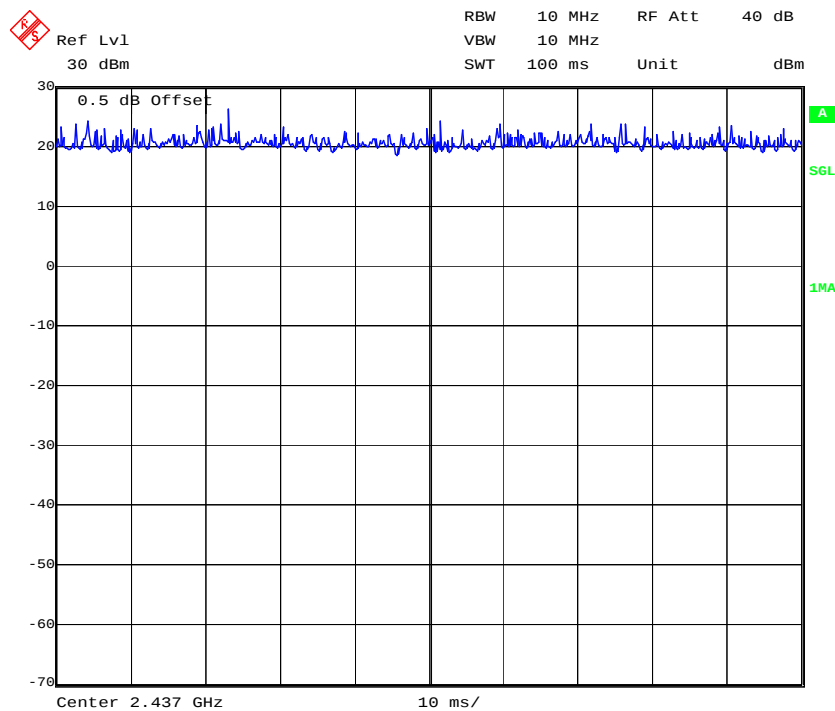

Date: 11.MAR.2019 17:39:05

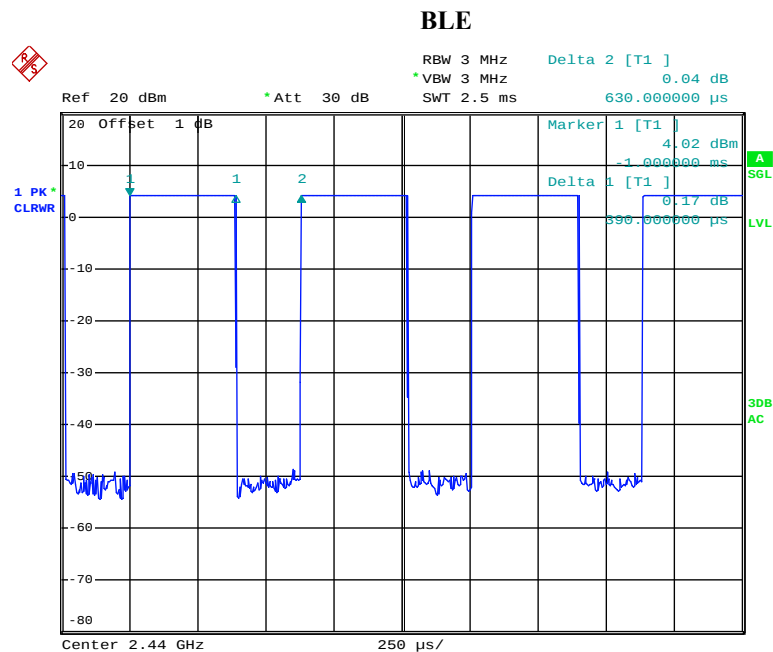

Date: 9.MAR.2019 11:24:05

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
SanDisk	SD Card	CZ36	521253
TOSKIBA	USB-HDD	Un-known	/
TOSKIBA	USB-HDD	Un-known	/
Un-known	Earphone	Un-known	/
SAMSUNG	Monitor	S22C330H	JPTVOB2337
DELL	Laptop	PP11L	QDS-BRCM1017
A Division of Cisco Systems, Inc	POE	SA06-20S48-V	GPSESU-48P401-AM5BH
Huawei	Router	WS5200	2.01701E+15

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone cable	No	No	1	EUT	Earphone
adapter cable	No	No	1.5	adapter	EUT
USB Cable	Yes	No	0.5	EUT	HDD
HDMI Cable	Yes	No	1	EUT	Monitor
RJ45 Cable	No	No	1	Router	EUT
RJ45 Cable	No	No	1	EUT	Laptop

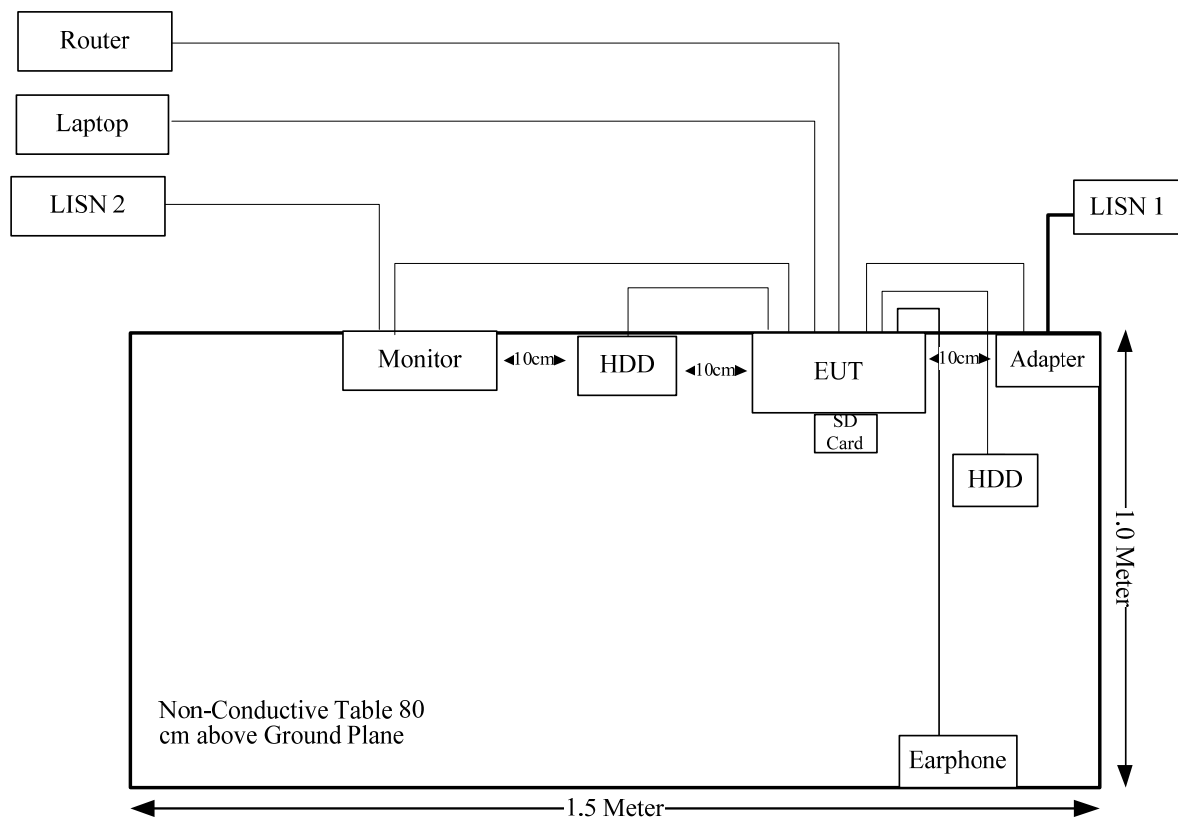Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wifi	2412-2462	2.8	1.91	22	158.49	20.00	0.0601	1.0
Bluetooth BDR/EDR	2402-2480	2.8	1.91	4	2.51	20.00	0.0010	1.0
Bluetooth LE	2402-2480	2.8	1.91	5	3.16	20.00	0.0012	1.0
5G Wifi	5180-5825	6.5	4.47	12	15.85	20.00	0.0141	1.0

Note: The WLAN 2.4G, 5G or Bluetooth can't transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	2.8dBi/2.4~2.5GHz 6.5 dBi/5.15~5.85GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

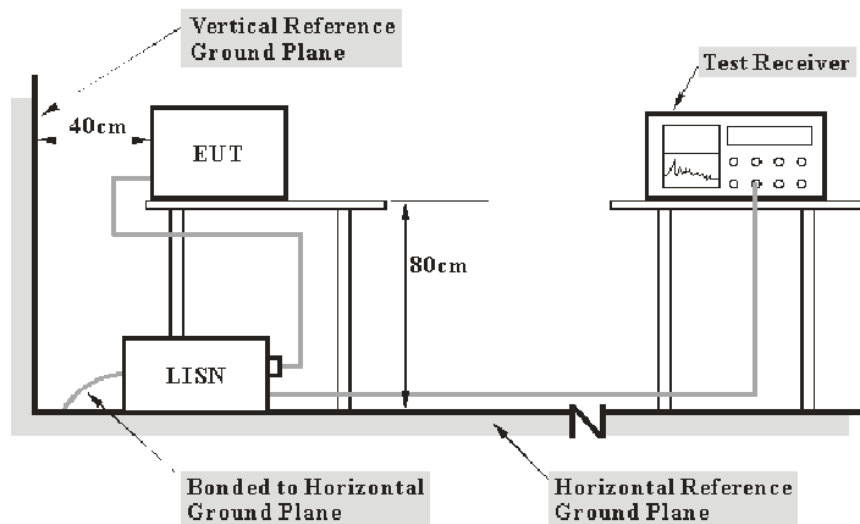

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.1 °C
Relative Humidity:	58%
ATM Pressure:	99.8kPa
Test by:	Lily Xie
Test Date:	2019-05-01


Test Mode: Transmitting (802.11b,middle channel was the worst)

Adapter:
AC120 V, 60 Hz, Line:

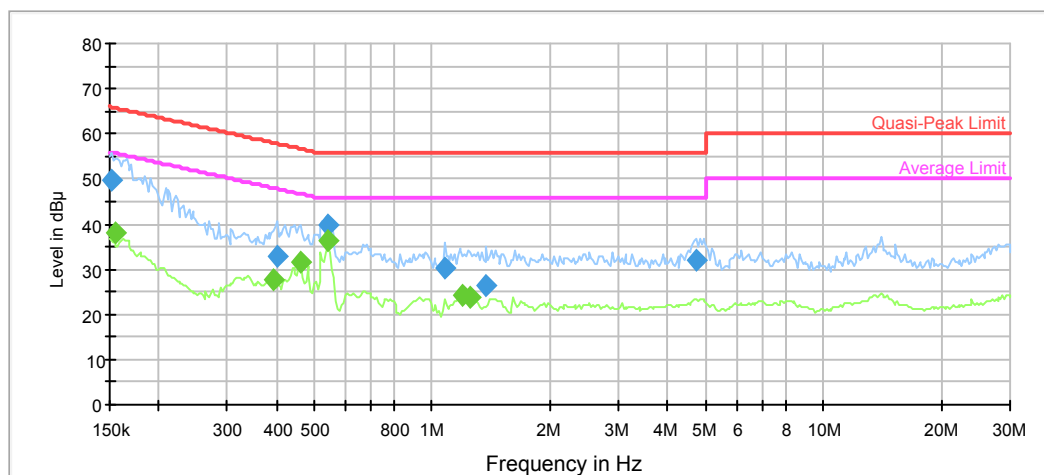

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.151500	49.7	9.000	L1	11.2	16.2	65.9
0.401705	32.9	9.000	L1	10.0	24.9	57.8
0.541438	39.6	9.000	L1	9.9	16.4	56.0
1.075780	30.1	9.000	L1	9.8	25.9	56.0
1.379615	26.5	9.000	L1	9.8	29.5	56.0
4.738144	31.8	9.000	L1	9.8	24.2	56.0


Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154545	38.2	9.000	L1	11.1	17.6	55.8
0.393790	27.9	9.000	L1	10.0	20.1	48.0
0.461750	31.6	9.000	L1	9.9	15.1	46.7
0.541438	36.2	9.000	L1	9.9	9.8	46.0
1.200214	24.0	9.000	L1	9.8	22.0	46.0
1.248947	23.7	9.000	L1	9.8	22.3	46.0

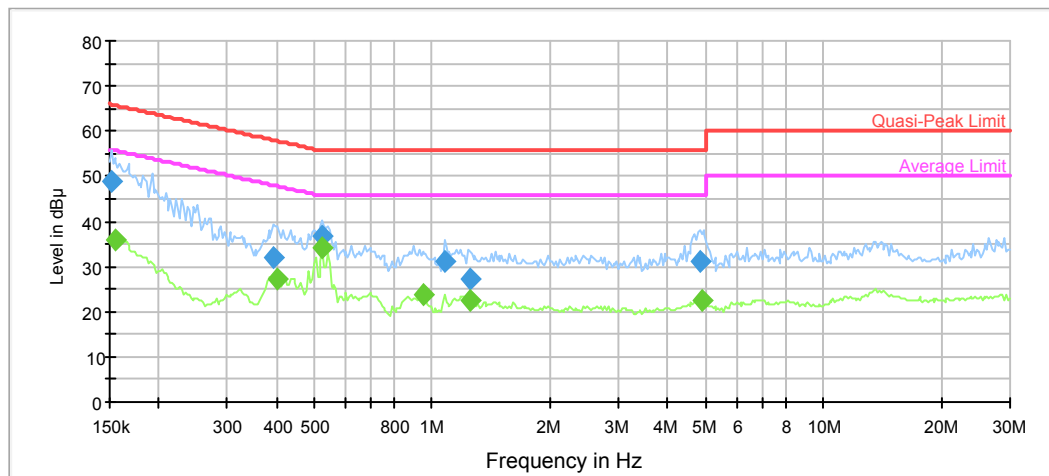AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.151500	48.9	9.000	N	11.1	17.0	65.9
0.393790	32.1	9.000	N	10.0	25.9	58.0
0.525514	36.9	9.000	N	9.9	19.1	56.0
1.075780	31.1	9.000	N	9.8	24.9	56.0
1.248947	27.3	9.000	N	9.8	28.7	56.0
4.833381	31.3	9.000	N	9.8	24.7	56.0


Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154545	35.8	9.000	N	11.1	20.0	55.8
0.401705	27.4	9.000	N	10.0	20.4	47.8
0.525514	34.1	9.000	N	9.9	11.9	46.0
0.945248	23.9	9.000	N	9.8	22.1	46.0
1.248947	22.6	9.000	N	9.8	23.4	46.0
4.881714	22.4	9.000	N	9.8	23.6	46.0

PoE:
AC120 V, 60 Hz, Line:

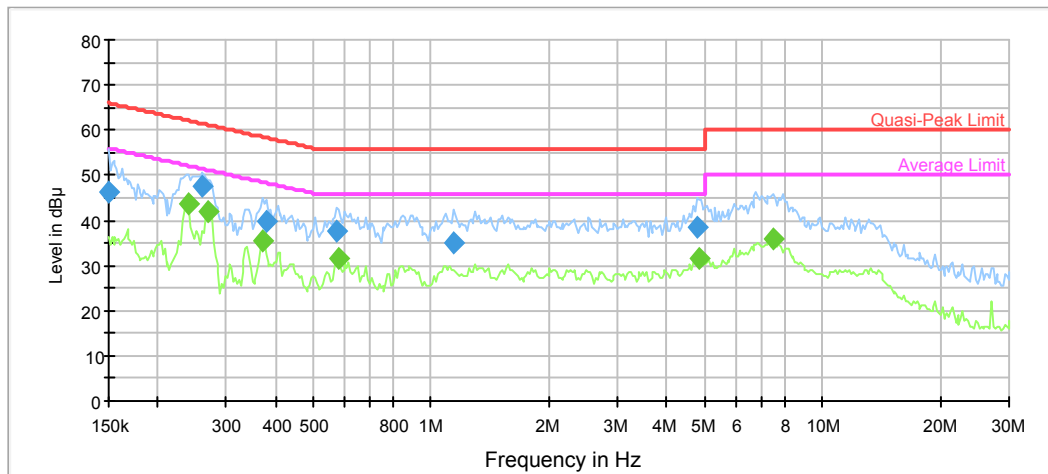

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.1	9.000	L1	11.2	19.9	66.0
0.259279	47.4	9.000	L1	10.3	14.1	61.5
0.378425	40.0	9.000	L1	10.0	18.3	58.3
0.574747	37.8	9.000	L1	9.8	18.2	56.0
1.141962	35.2	9.000	L1	9.8	20.8	56.0
4.785525	38.4	9.000	L1	9.8	17.6	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.239440	43.8	9.000	L1	10.4	8.3	52.1
0.269807	41.9	9.000	L1	10.2	9.2	51.1
0.370968	35.3	9.000	L1	10.0	13.2	48.5
0.580495	31.6	9.000	L1	9.8	14.4	46.0
4.833381	31.6	9.000	L1	9.8	14.4	46.0
7.488442	35.9	9.000	L1	9.8	14.1	50.0


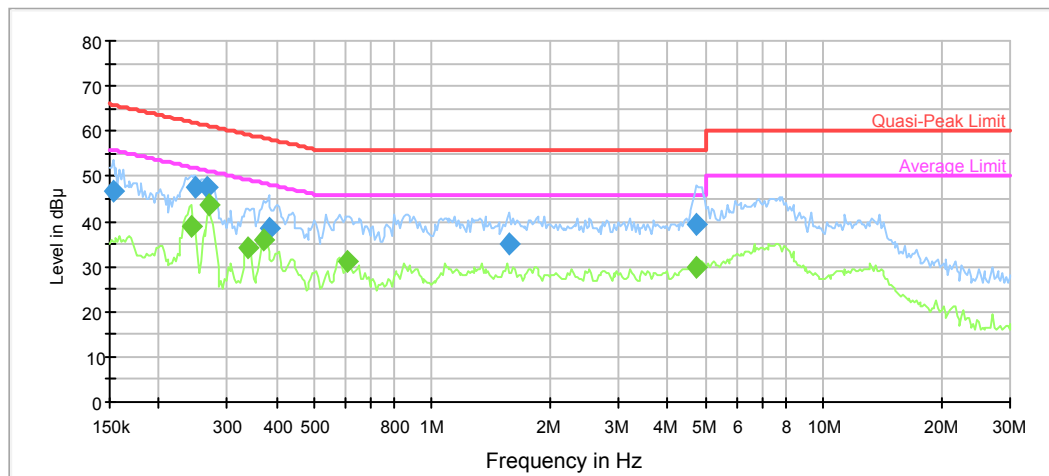
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	46.6	9.000	N	11.1	19.2	65.8
0.249162	47.7	9.000	N	10.3	14.1	61.8
0.267135	47.5	9.000	N	10.3	13.7	61.2
0.382209	38.4	9.000	N	10.0	19.8	58.2
1.570131	35.1	9.000	N	9.8	20.9	56.0
4.738144	39.2	9.000	N	9.8	16.8	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.241834	39.0	9.000	N	10.4	13.0	52.0
0.269807	43.6	9.000	N	10.2	7.5	51.1
0.339191	34.0	9.000	N	10.1	15.2	49.2
0.370968	35.8	9.000	N	10.0	12.7	48.5
0.610106	31.1	9.000	N	9.8	14.9	46.0
4.738144	29.7	9.000	N	9.8	16.3	46.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

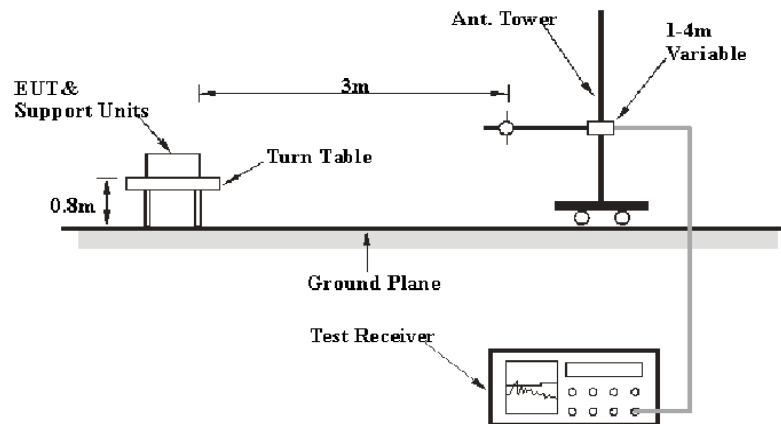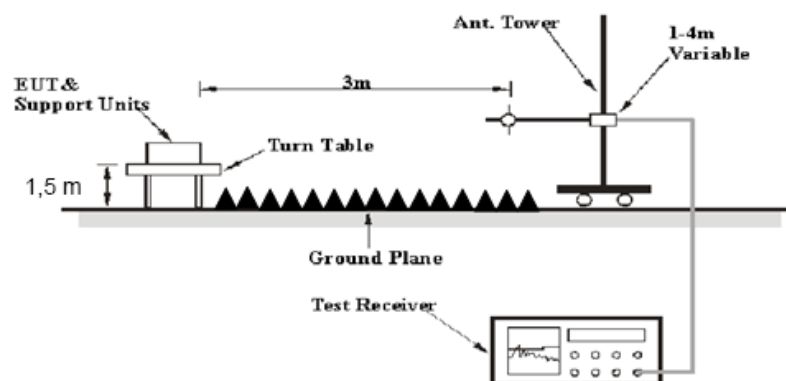EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test items:	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	27°C	23.6°C
Relative Humidity:	50%	61%
ATM Pressure:	100.5 kPa	101.4 kPa
Test by:	Tyler Pan	Tyler Pan
Test Date:	2019-06-23	2019-03-14


Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting


Pre scan Adapter and POE, adapter is the worst case

1) 30MHz-1GHz(802.11b,middle channel was the worst)

Horizontal:

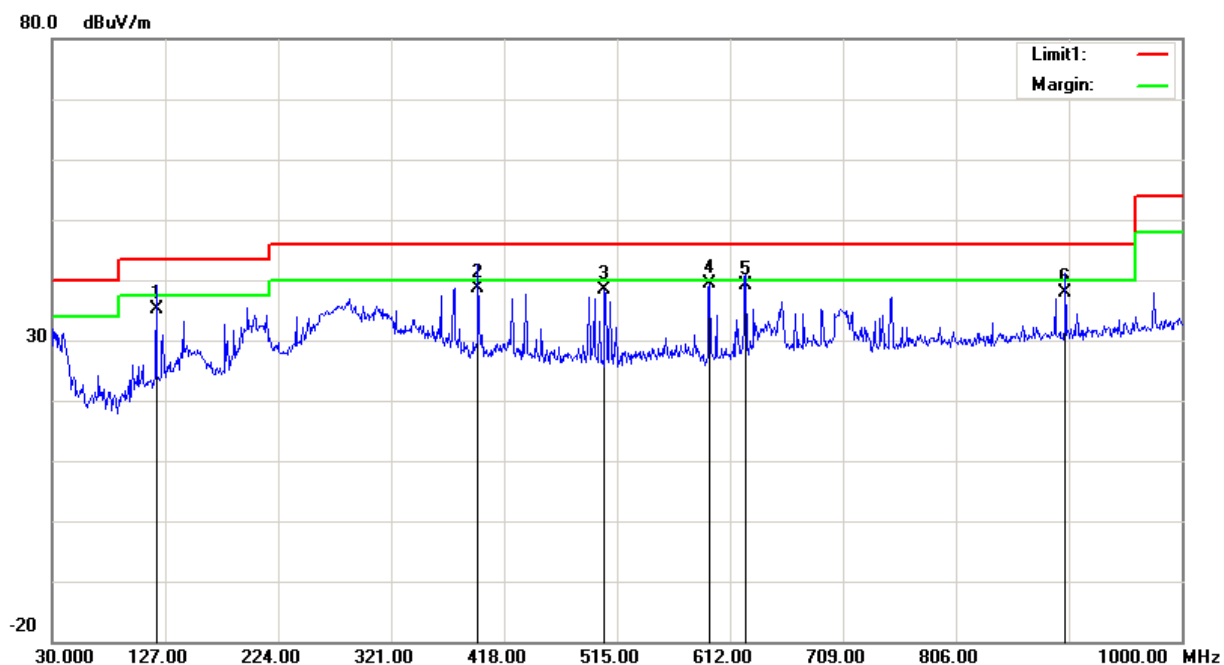

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
119.2400	39.89	QP	-4.84	35.05	43.50	8.45
395.6900	40.77	QP	-2.07	38.70	46.00	7.30
504.3300	38.55	peak	-0.28	38.27	46.00	7.73
594.5400	38.57	peak	0.86	39.43	46.00	6.57
625.5800	37.26	QP	1.79	39.05	46.00	6.95
900.0900	37.80	QP	0.12	37.92	46.00	8.08

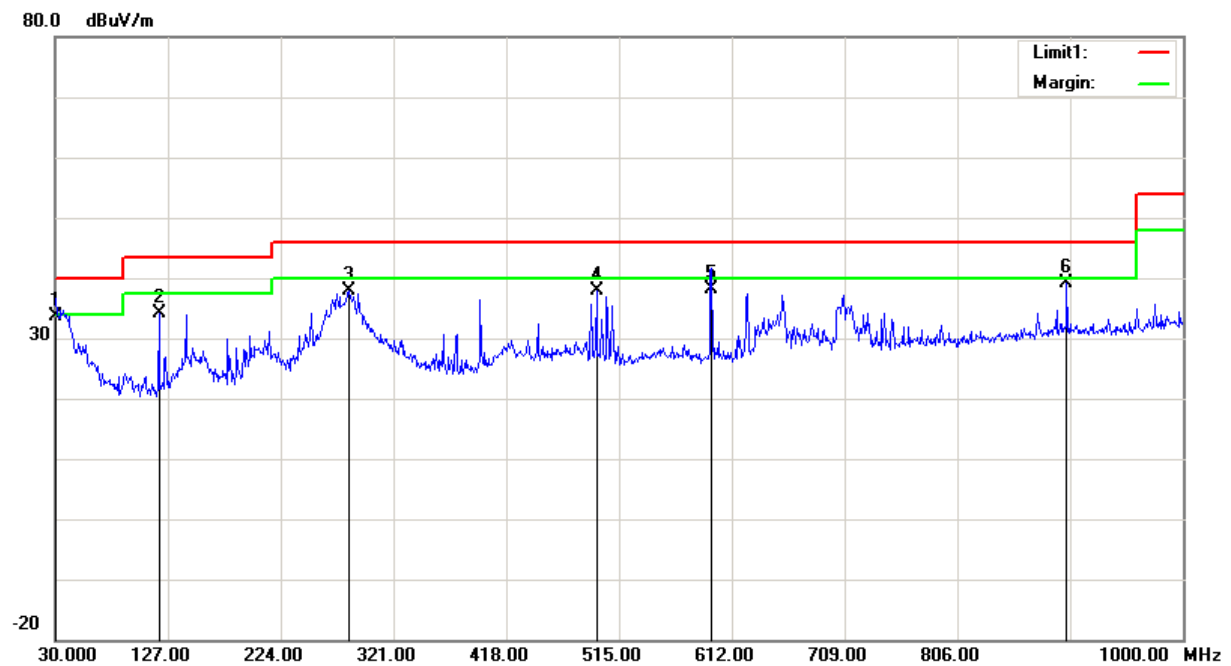Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	31.94	QP	1.72	33.66	40.00	6.34
119.2400	38.96	peak	-4.84	34.12	43.50	9.38
282.2000	41.98	peak	-4.09	37.89	46.00	8.11
495.6000	38.08	peak	-0.26	37.82	46.00	8.18
594.5400	37.36	QP	0.86	38.22	46.00	7.78
900.0900	38.93	peak	0.12	39.05	46.00	6.95

**2) 1-25GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.27	PK	H	28.12	1.81	0.00	103.20	N/A	N/A
2412.00	69.86	AV	H	28.12	1.81	0.00	99.79	N/A	N/A
2412.00	70.57	PK	V	28.12	1.81	0.00	100.50	N/A	N/A
2412.00	67.14	AV	V	28.12	1.81	0.00	97.07	N/A	N/A
2390.00	26.19	PK	H	28.08	1.80	0.00	56.07	74.00	17.93
2390.00	13.34	AV	H	28.08	1.80	0.00	43.22	54.00	10.78
4824.00	48.96	PK	H	32.95	3.19	37.20	47.90	74.00	26.10
4824.00	36.40	AV	H	32.95	3.19	37.20	35.34	54.00	18.66
7236.00	45.66	PK	H	35.81	4.77	37.27	48.97	74.00	25.03
7236.00	33.26	AV	H	35.81	4.77	37.27	36.57	54.00	17.43
1200.00	57.85	PK	H	24.18	1.47	35.61	47.89	74.00	26.11
1200.00	38.95	AV	H	24.18	1.47	35.61	28.99	54.00	25.01
1400.00	59.08	PK	H	24.86	1.63	36.02	49.55	74.00	24.45
1400.00	48.63	AV	H	24.86	1.63	36.02	39.10	54.00	14.90
1800.00	57.90	PK	H	26.46	1.66	35.89	50.13	74.00	23.87
1800.00	46.13	AV	H	26.46	1.66	35.89	38.36	54.00	15.64
Middle Channel: 2437 MHz									
2437.00	73.06	PK	H	28.17	1.82	0.00	103.05	N/A	N/A
2437.00	69.57	AV	H	28.17	1.82	0.00	99.56	N/A	N/A
2437.00	70.36	PK	V	28.17	1.82	0.00	100.35	N/A	N/A
2437.00	66.89	AV	V	28.17	1.82	0.00	96.88	N/A	N/A
4874.00	47.85	PK	H	33.05	3.26	37.21	46.95	74.00	27.05
4874.00	35.21	AV	H	33.05	3.26	37.21	34.31	54.00	19.69
7311.00	45.78	PK	H	36.01	4.64	37.36	49.07	74.00	24.93
7311.00	33.34	AV	H	36.01	4.64	37.36	36.63	54.00	17.37
1200.00	57.63	PK	H	24.18	1.47	35.61	47.67	74.00	26.33
1200.00	38.66	AV	H	24.18	1.47	35.61	28.70	54.00	25.30
1400.00	59.20	PK	H	24.86	1.63	36.02	49.67	74.00	24.33
1400.00	49.56	AV	H	24.86	1.63	36.02	40.03	54.00	13.97
1800.00	57.66	PK	H	26.46	1.66	35.89	49.89	74.00	24.11
1800.00	46.05	AV	H	26.46	1.66	35.89	38.28	54.00	15.72
High Channel: 2462 MHz									
2462.00	73.22	PK	H	28.22	1.83	0.00	103.27	N/A	N/A
2462.00	69.78	AV	H	28.22	1.83	0.00	99.83	N/A	N/A
2462.00	70.14	PK	V	28.22	1.83	0.00	100.19	N/A	N/A
2462.00	66.75	AV	V	28.22	1.83	0.00	96.80	N/A	N/A
2483.50	26.58	PK	H	28.27	1.84	0.00	56.69	74.00	17.31
2483.50	13.40	AV	H	28.27	1.84	0.00	43.51	54.00	10.49
4924.00	47.65	PK	H	33.15	3.27	37.22	46.85	74.00	27.15
4924.00	35.13	AV	H	33.15	3.27	37.22	34.33	54.00	19.67
7386.00	45.79	PK	H	36.20	4.51	37.46	49.04	74.00	24.96
7386.00	33.41	AV	H	36.20	4.51	37.46	36.66	54.00	17.34
1200.00	57.89	PK	H	24.18	1.47	35.61	47.93	74.00	26.07
1200.00	38.70	AV	H	24.18	1.47	35.61	28.74	54.00	25.26
1400.00	59.13	PK	H	24.86	1.63	36.02	49.60	74.00	24.40
1400.00	48.32	AV	H	24.86	1.63	36.02	38.79	54.00	15.21
1800.00	57.81	PK	H	26.46	1.66	35.89	50.04	74.00	23.96
1800.00	46.31	AV	H	26.46	1.66	35.89	38.54	54.00	15.46

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	76.32	PK	H	28.12	1.81	0.00	106.25	N/A	N/A
2412.00	67.10	AV	H	28.12	1.81	0.00	97.03	N/A	N/A
2412.00	72.43	PK	V	28.12	1.81	0.00	102.36	N/A	N/A
2412.00	63.21	AV	V	28.12	1.81	0.00	93.14	N/A	N/A
2390.00	37.10	PK	H	28.08	1.80	0.00	66.98	74.00	7.02
2390.00	18.21	AV	H	28.08	1.80	0.00	48.09	54.00	5.91
4824.00	46.73	PK	H	32.95	3.19	37.20	45.67	74.00	28.33
4824.00	34.21	AV	H	32.95	3.19	37.20	33.15	54.00	20.85
7236.00	45.90	PK	H	35.81	4.77	37.27	49.21	74.00	24.79
7236.00	33.54	AV	H	35.81	4.77	37.27	36.85	54.00	17.15
1200.00	57.65	PK	H	24.18	1.47	35.61	47.69	74.00	26.31
1200.00	38.54	AV	H	24.18	1.47	35.61	28.58	54.00	25.42
1400.00	58.79	PK	H	24.86	1.63	36.02	49.26	74.00	24.74
1400.00	48.14	AV	H	24.86	1.63	36.02	38.61	54.00	15.39
1800.00	57.42	PK	H	26.46	1.66	35.89	49.65	74.00	24.35
1800.00	46.23	AV	H	26.46	1.66	35.89	38.46	54.00	15.54
Middle Channel: 2437 MHz									
2437.00	76.23	PK	H	28.17	1.82	0.00	106.22	N/A	N/A
2437.00	67.16	AV	H	28.17	1.82	0.00	97.15	N/A	N/A
2437.00	72.17	PK	V	28.17	1.82	0.00	102.16	N/A	N/A
2437.00	63.10	AV	V	28.17	1.82	0.00	93.09	N/A	N/A
4874.00	46.77	PK	H	33.05	3.26	37.21	45.87	74.00	28.13
4874.00	34.35	AV	H	33.05	3.26	37.21	33.45	54.00	20.55
7311.00	45.80	PK	H	36.01	4.64	37.36	49.09	74.00	24.91
7311.00	33.26	AV	H	36.01	4.64	37.36	36.55	54.00	17.45
1200.00	57.86	PK	H	24.18	1.47	35.61	47.90	74.00	26.10
1200.00	38.11	AV	H	24.18	1.47	35.61	28.15	54.00	25.85
1400.00	59.32	PK	H	24.86	1.63	36.02	49.79	74.00	24.21
1400.00	48.55	AV	H	24.86	1.63	36.02	39.02	54.00	14.98
1800.00	57.63	PK	H	26.46	1.66	35.89	49.86	74.00	24.14
1800.00	45.77	AV	H	26.46	1.66	35.89	38.00	54.00	16.00
High Channel: 2462 MHz									
2462.00	76.02	PK	H	28.22	1.83	0.00	106.07	N/A	N/A
2462.00	66.95	AV	H	28.22	1.83	0.00	97.00	N/A	N/A
2462.00	71.96	PK	V	28.22	1.83	0.00	102.01	N/A	N/A
2462.00	62.87	AV	V	28.22	1.83	0.00	92.92	N/A	N/A
2483.50	36.13	PK	H	28.27	1.84	0.00	66.24	74.00	7.76
2483.50	16.98	AV	H	28.27	1.84	0.00	47.09	54.00	6.91
4924.00	46.85	PK	H	33.15	3.27	37.22	46.05	74.00	27.95
4924.00	34.36	AV	H	33.15	3.27	37.22	33.56	54.00	20.44
7386.00	46.10	PK	H	36.20	4.51	37.46	49.35	74.00	24.65
7386.00	33.65	AV	H	36.20	4.51	37.46	36.90	54.00	17.10
1200.00	58.10	PK	H	24.18	1.47	35.61	48.14	74.00	25.86
1200.00	38.69	AV	H	24.18	1.47	35.61	28.73	54.00	25.27
1400.00	59.13	PK	H	24.86	1.63	36.02	49.60	74.00	24.40
1400.00	48.35	AV	H	24.86	1.63	36.02	38.82	54.00	15.18
1800.00	57.66	PK	H	26.46	1.66	35.89	49.89	74.00	24.11
1800.00	46.21	AV	H	26.46	1.66	35.89	38.44	54.00	15.56

802.11n ht20 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	76.40	PK	H	28.12	1.81	0.00	106.33	N/A	N/A
2412.00	66.52	AV	H	28.12	1.81	0.00	96.45	N/A	N/A
2412.00	72.56	PK	V	28.12	1.81	0.00	102.49	N/A	N/A
2412.00	62.40	AV	V	28.12	1.81	0.00	92.33	N/A	N/A
2390.00	41.06	PK	H	28.08	1.80	0.00	70.94	74.00	3.06
2390.00	17.86	AV	H	28.08	1.80	0.00	47.74	54.00	6.26
4824.00	47.35	PK	H	32.95	3.19	37.20	46.29	74.00	27.71
4824.00	34.78	AV	H	32.95	3.19	37.20	33.72	54.00	20.28
7236.00	45.69	PK	H	35.81	4.77	37.27	49.00	74.00	25.00
7236.00	33.14	AV	H	35.81	4.77	37.27	36.45	54.00	17.55
1200.00	57.65	PK	H	24.18	1.47	35.61	47.69	74.00	26.31
1200.00	38.34	AV	H	24.18	1.47	35.61	28.38	54.00	25.62
1400.00	58.67	PK	H	24.86	1.63	36.02	49.14	74.00	24.86
1400.00	48.06	AV	H	24.86	1.63	36.02	38.53	54.00	15.47
1800.00	56.77	PK	H	26.46	1.66	35.89	49.00	74.00	25.00
1800.00	45.67	AV	H	26.46	1.66	35.89	37.90	54.00	16.10
Middle Channel: 2437 MHz									
2437.00	76.73	PK	H	28.17	1.82	0.00	106.72	N/A	N/A
2437.00	66.76	AV	H	28.17	1.82	0.00	96.75	N/A	N/A
2437.00	72.54	PK	V	28.17	1.82	0.00	102.53	N/A	N/A
2437.00	62.41	AV	V	28.17	1.82	0.00	92.40	N/A	N/A
4874.00	46.80	PK	H	33.05	3.26	37.21	45.90	74.00	28.10
4874.00	34.31	AV	H	33.05	3.26	37.21	33.41	54.00	20.59
7311.00	45.87	PK	H	36.01	4.64	37.36	49.16	74.00	24.84
7311.00	33.41	AV	H	36.01	4.64	37.36	36.70	54.00	17.30
1200.00	57.43	PK	H	24.18	1.47	35.61	47.47	74.00	26.53
1200.00	37.06	AV	H	24.18	1.47	35.61	27.10	54.00	26.90
1400.00	58.96	PK	H	24.86	1.63	36.02	49.43	74.00	24.57
1400.00	48.25	AV	H	24.86	1.63	36.02	38.72	54.00	15.28
1800.00	56.37	PK	H	26.46	1.66	35.89	48.60	74.00	25.40
1800.00	45.34	AV	H	26.46	1.66	35.89	37.57	54.00	16.43
High Channel: 2462 MHz									
2462.00	76.31	PK	H	28.22	1.83	0.00	106.36	N/A	N/A
2462.00	66.20	AV	H	28.22	1.83	0.00	96.25	N/A	N/A
2462.00	71.91	PK	V	28.22	1.83	0.00	101.96	N/A	N/A
2462.00	62.10	AV	V	28.22	1.83	0.00	92.15	N/A	N/A
2483.50	40.85	PK	H	28.27	1.84	0.00	70.96	74.00	3.04
2483.50	17.11	AV	H	28.27	1.84	0.00	47.22	54.00	6.78
4924.00	46.76	PK	H	33.15	3.27	37.22	45.96	74.00	28.04
4924.00	33.34	AV	H	33.15	3.27	37.22	32.54	54.00	21.46
7386.00	45.86	PK	H	36.20	4.51	37.46	49.11	74.00	24.89
7386.00	33.43	AV	H	36.20	4.51	37.46	36.68	54.00	17.32
1200.00	57.68	PK	H	24.18	1.47	35.61	47.72	74.00	26.28
1200.00	37.56	AV	H	24.18	1.47	35.61	27.60	54.00	26.40
1400.00	59.21	PK	H	24.86	1.63	36.02	49.68	74.00	24.32
1400.00	48.65	AV	H	24.86	1.63	36.02	39.12	54.00	14.88
1800.00	57.06	PK	H	26.46	1.66	35.89	49.29	74.00	24.71
1800.00	45.88	AV	H	26.46	1.66	35.89	38.11	54.00	15.89

BLE:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	69.63	PK	H	28.10	1.80	0.00	99.53	N/A	N/A
2402.00	68.90	AV	H	28.10	1.80	0.00	98.80	N/A	N/A
2402.00	65.25	PK	V	28.10	1.80	0.00	95.15	N/A	N/A
2402.00	64.50	AV	V	28.10	1.80	0.00	94.40	N/A	N/A
2390.00	27.14	PK	H	28.08	1.80	0.00	57.02	74.00	16.98
2390.00	14.47	AV	H	28.08	1.80	0.00	44.35	54.00	9.65
4804.00	49.38	PK	H	32.91	3.17	37.20	48.26	74.00	25.74
4804.00	40.21	AV	H	32.91	3.17	37.20	39.09	54.00	14.91
7206.00	46.32	PK	H	35.74	4.82	37.23	49.65	74.00	24.35
7206.00	33.41	AV	H	35.74	4.82	37.23	36.74	54.00	17.26
1200.00	57.99	PK	H	24.18	1.47	35.61	48.03	74.00	25.97
1200.00	38.87	AV	H	24.18	1.47	35.61	28.91	54.00	25.09
1395.00	52.74	PK	H	24.84	1.63	36.02	43.19	74.00	30.81
1395.00	41.55	AV	H	24.84	1.63	36.02	32.00	54.00	22.00
1800.00	53.24	PK	H	26.46	1.66	35.89	45.47	74.00	28.53
1800.00	41.98	AV	H	26.46	1.66	35.89	34.21	54.00	19.79
Middle Channel: 2440 MHz									
2440.00	71.26	PK	H	28.18	1.82	0.00	101.26	N/A	N/A
2440.00	70.63	AV	H	28.18	1.82	0.00	100.63	N/A	N/A
2440.00	67.87	PK	V	28.18	1.82	0.00	97.87	N/A	N/A
2440.00	67.04	AV	V	28.18	1.82	0.00	97.04	N/A	N/A
4880.00	49.32	PK	H	33.06	3.27	37.21	48.44	74.00	25.56
4880.00	40.25	AV	H	33.06	3.27	37.21	39.37	54.00	14.63
7320.00	45.15	PK	H	36.03	4.62	37.37	48.43	74.00	25.57
7320.00	32.48	AV	H	36.03	4.62	37.37	35.76	54.00	18.24
1200.00	60.23	PK	H	24.18	1.47	35.61	50.27	74.00	23.73
1200.00	41.89	AV	H	24.18	1.47	35.61	31.93	54.00	22.07
1395.00	54.03	PK	H	24.84	1.63	36.02	44.48	74.00	29.52
1395.00	43.21	AV	H	24.84	1.63	36.02	33.66	54.00	20.34
1800.00	50.36	PK	H	26.46	1.66	35.89	42.59	74.00	31.41
1800.00	41.37	AV	H	26.46	1.66	35.89	33.60	54.00	20.40
High Channel: 2480 MHz									
2480.00	71.40	PK	H	28.26	1.84	0.00	101.50	N/A	N/A
2480.00	70.93	AV	H	28.26	1.84	0.00	101.03	N/A	N/A
2480.00	68.99	PK	V	28.26	1.84	0.00	99.09	N/A	N/A
2480.00	68.23	AV	V	28.26	1.84	0.00	98.33	N/A	N/A
2483.50	25.96	PK	H	28.27	1.84	0.00	56.07	74.00	17.93
2483.50	15.35	AV	H	28.27	1.84	0.00	45.46	54.00	8.54
4960.00	50.13	PK	H	33.22	3.23	37.25	49.33	74.00	24.67
4960.00	40.06	AV	H	33.22	3.23	37.25	39.26	54.00	14.74
7440.00	46.31	PK	H	36.34	4.41	37.52	49.54	74.00	24.46
7440.00	33.27	AV	H	36.34	4.41	37.52	36.50	54.00	17.50
1200.00	56.19	PK	H	24.18	1.47	35.61	46.23	74.00	27.77
1200.00	37.20	AV	H	24.18	1.47	35.61	27.24	54.00	26.76
1395.00	56.93	PK	H	24.84	1.63	36.02	47.38	74.00	26.62
1395.00	45.67	AV	H	24.84	1.63	36.02	36.12	54.00	17.88
1800.00	53.29	PK	H	26.46	1.66	35.89	45.52	74.00	28.48
1800.00	42.06	AV	H	26.46	1.66	35.89	34.29	54.00	19.71




Test plots(802.11b middle channel was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

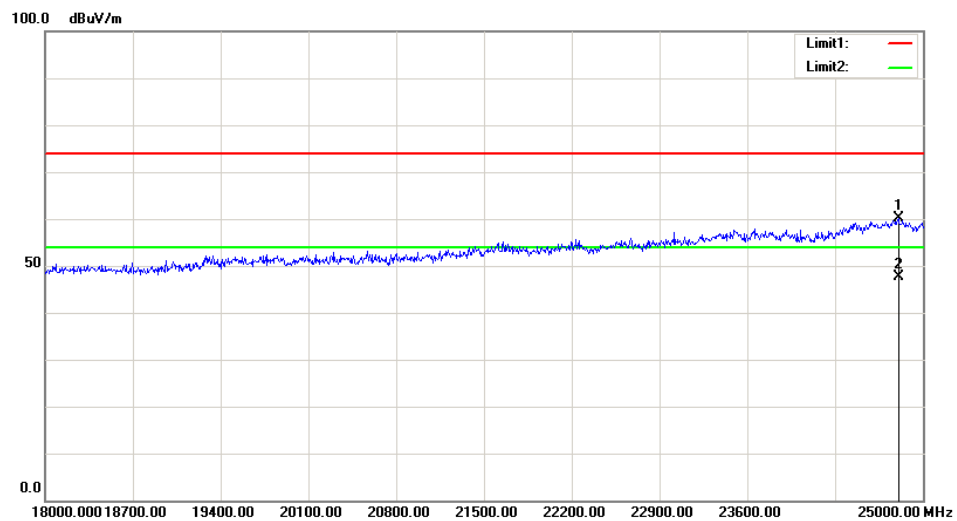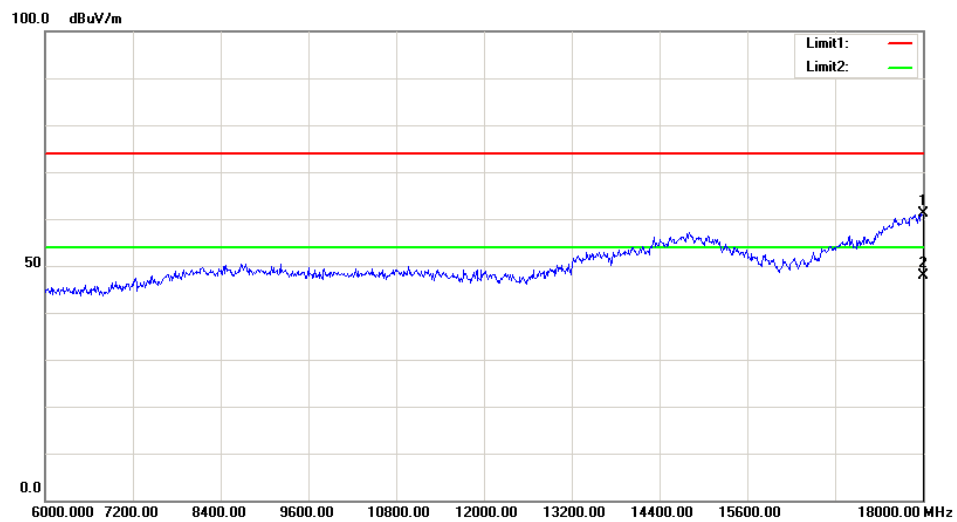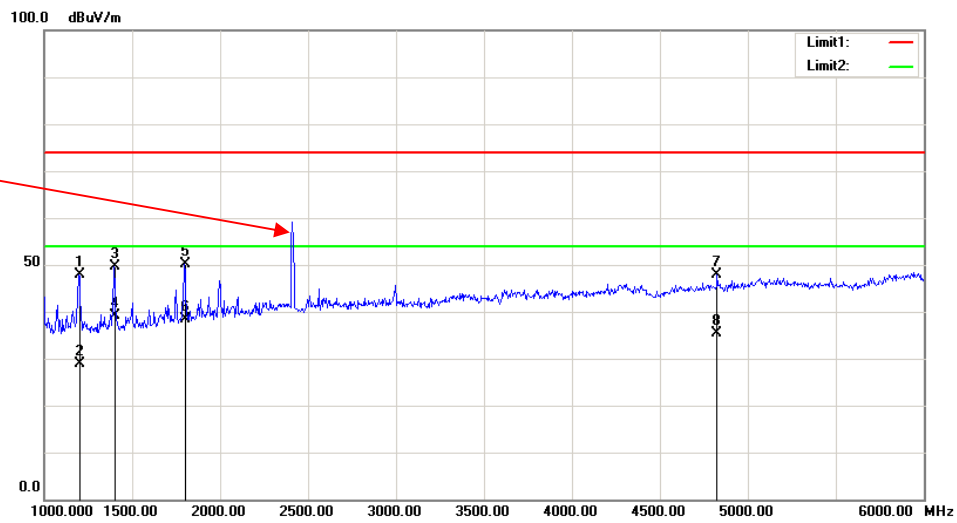

Vertical:

Fundamental
Test with Band
Rejection Filter

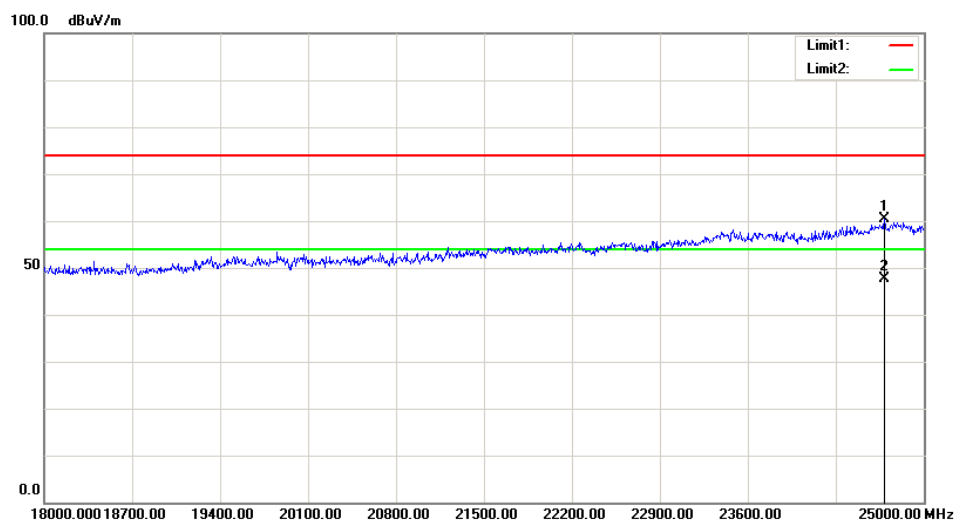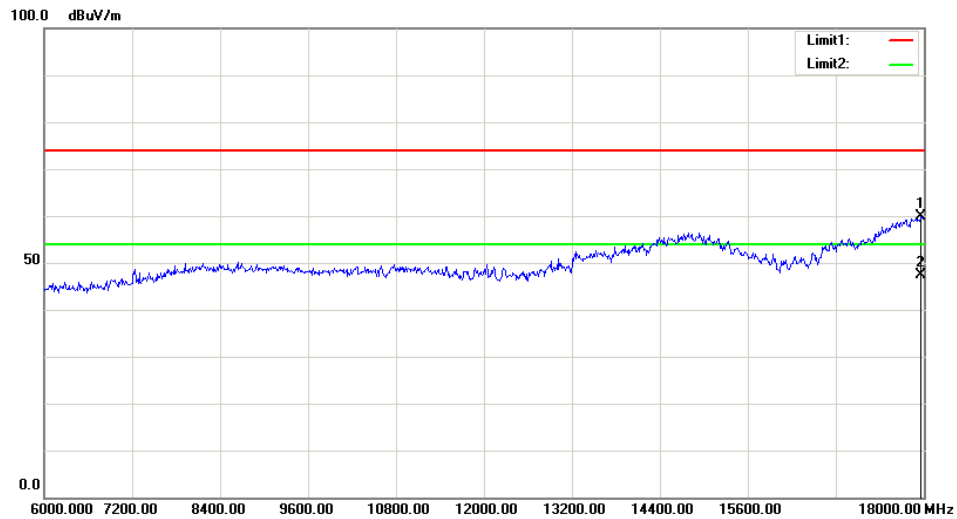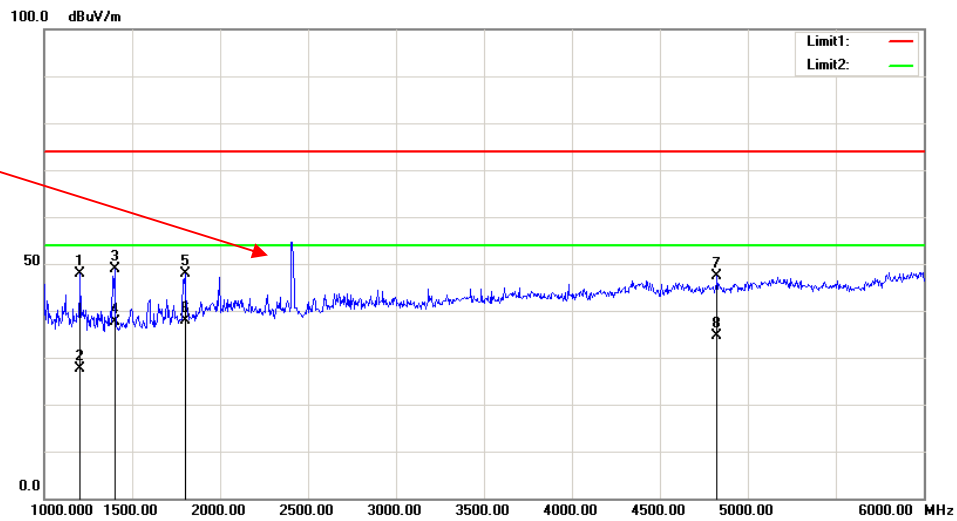


FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH**Applicable Standard**

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	22.1°C ~22.9°C
Relative Humidity:	51%~59%
ATM Pressure:	101kPa~101.2kPa
Test by:	Andy Huang
Test Date:	2019-03-09~2019-03-11

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.



Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.058	≥ 0.5
	Middle	2437	8.657	≥ 0.5
	High	2462	9.058	≥ 0.5
802.11g	Low	2412	16.353	≥ 0.5
	Middle	2437	16.353	≥ 0.5
	High	2462	16.353	≥ 0.5
802.11n ht20	Low	2412	17.234	≥ 0.5
	Middle	2437	17.555	≥ 0.5
	High	2462	17.315	≥ 0.5
BLE	Low	2402	0.716	≥ 0.5
	Middle	2440	0.708	≥ 0.5
	High	2480	0.712	≥ 0.5



802.11b Low Channel

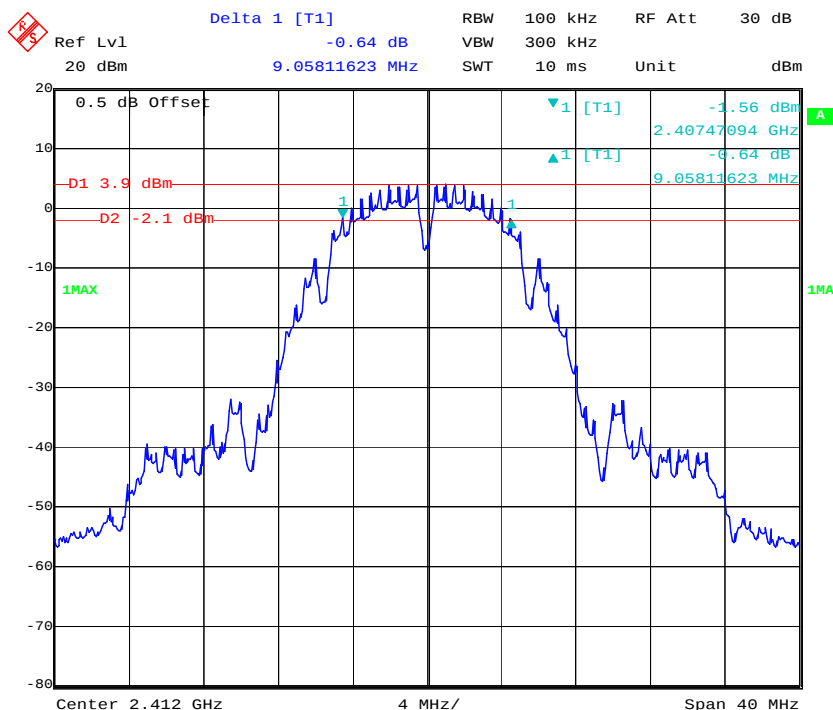


802.11b Middle Channel

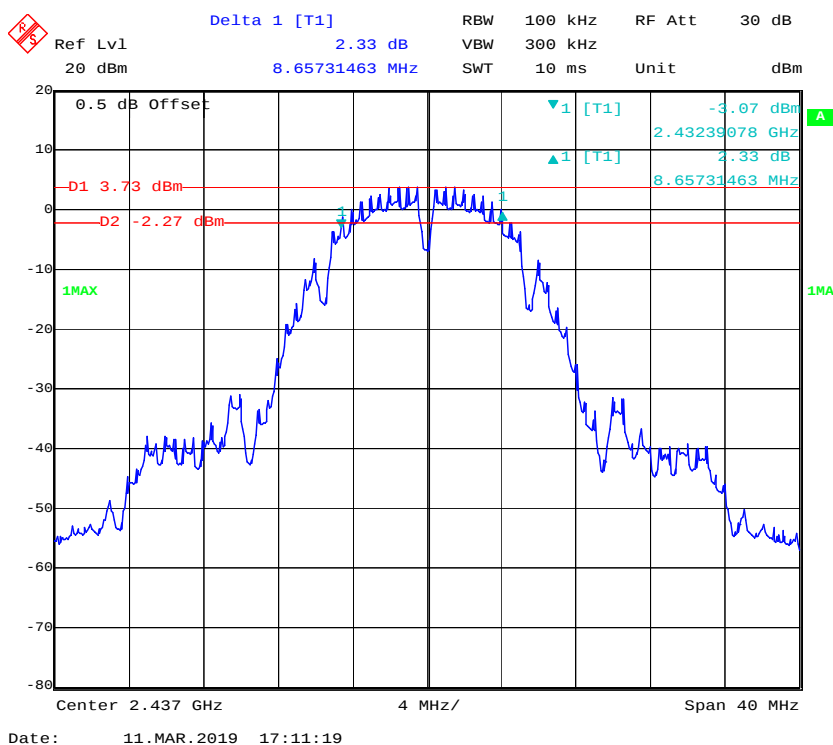

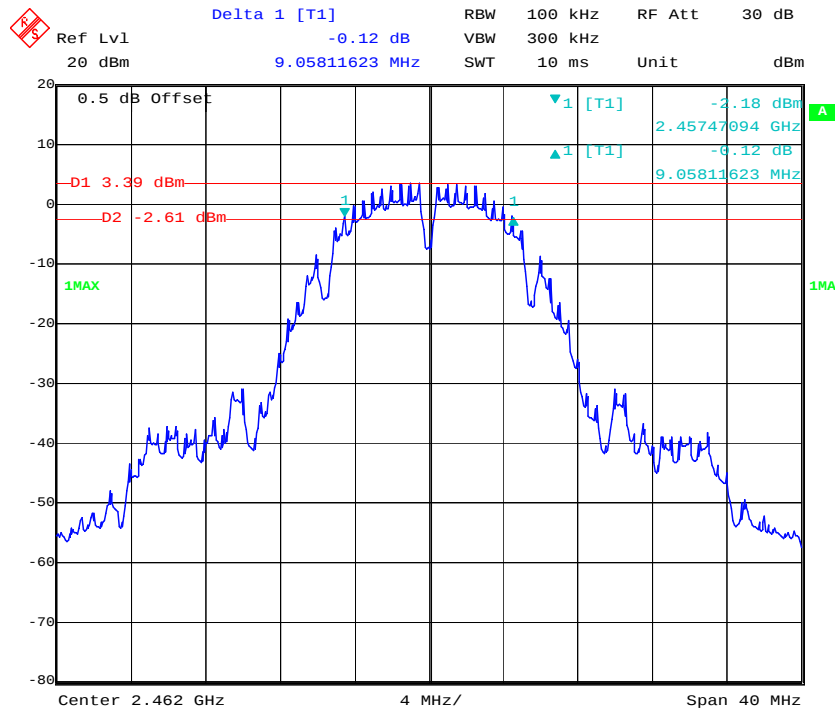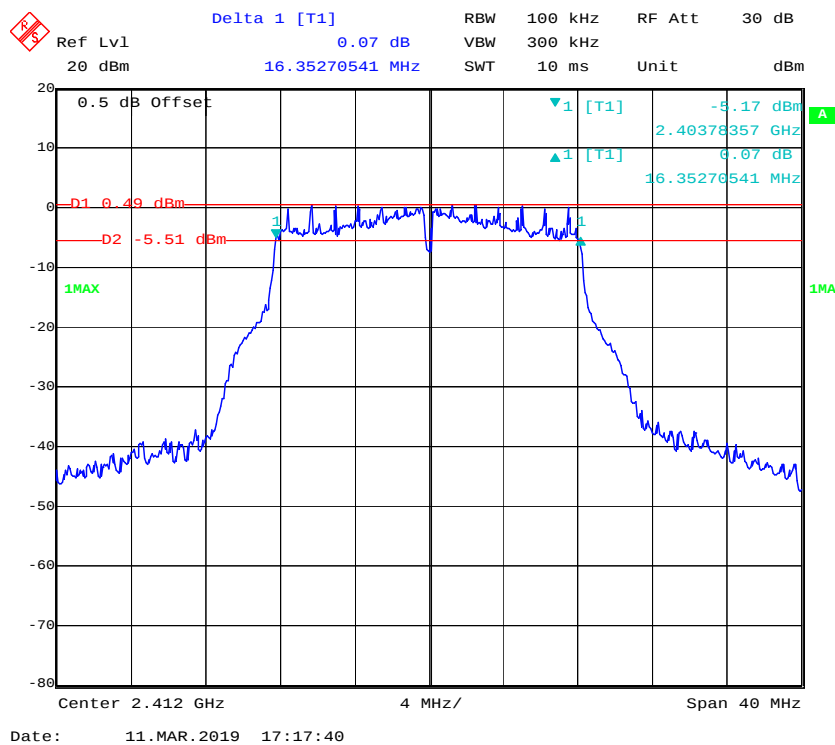
802.11b High Channel**802.11g Low Channel**

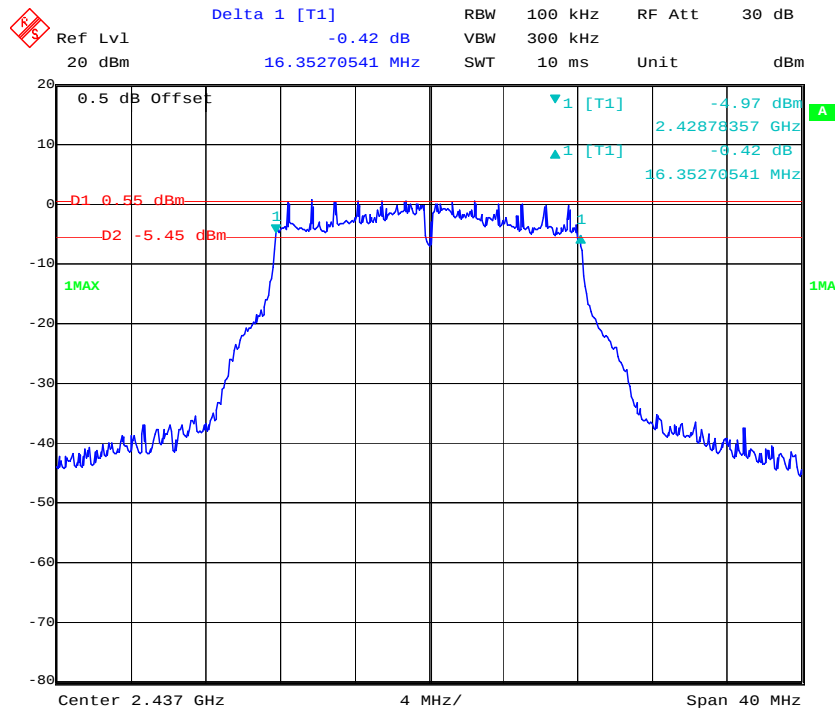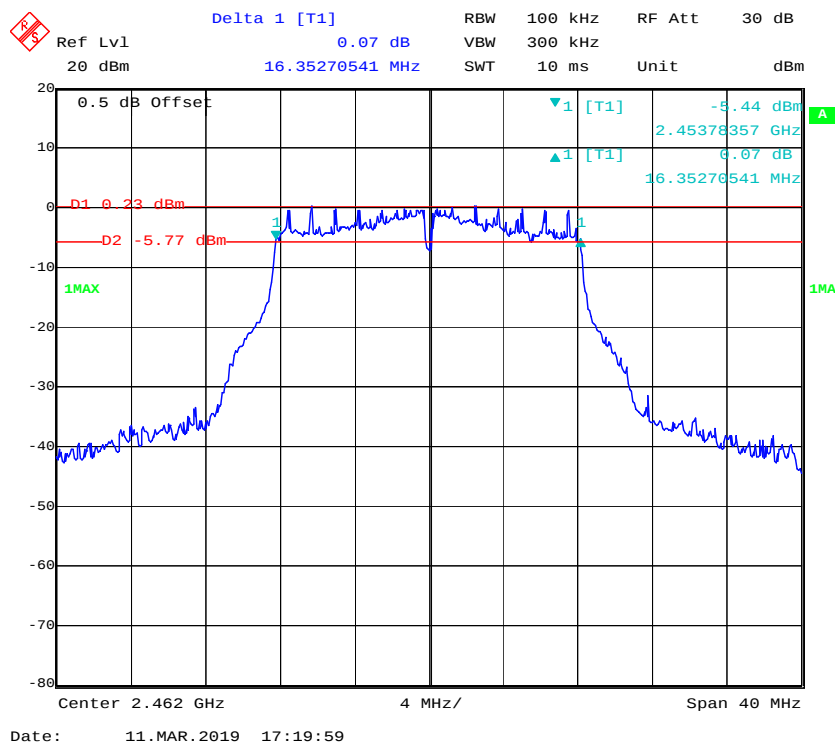802.11g Middle Channel**802.11g High Channel**


802.11n ht20 Low Channel

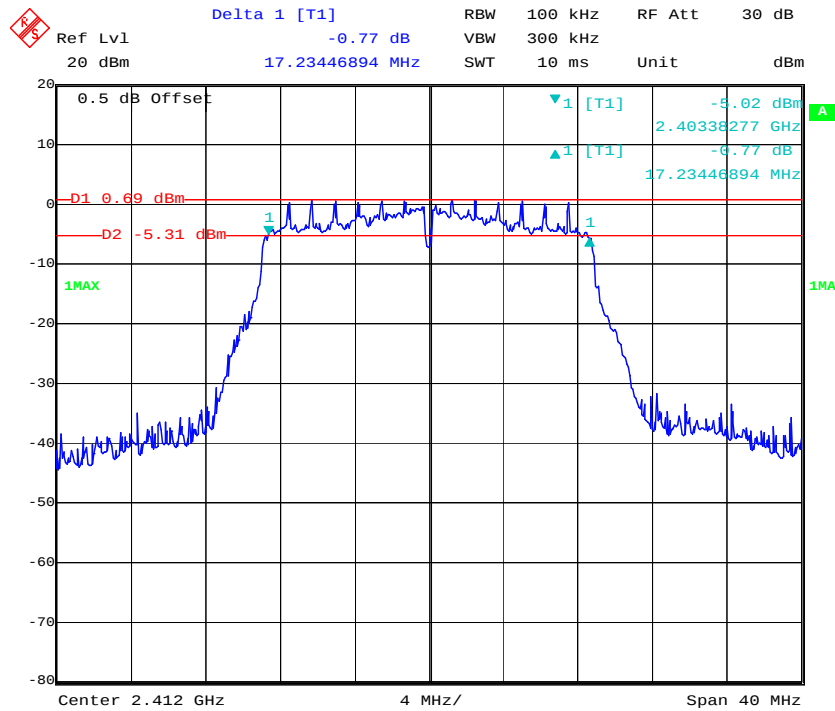

802.11n ht20 Middle Channel

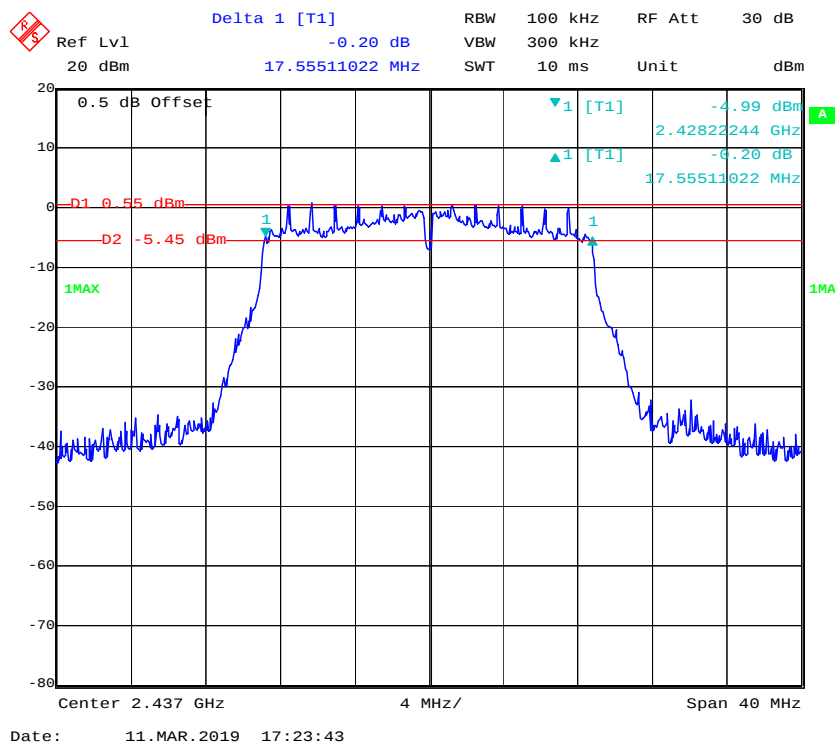


802.11n ht20 High Channel

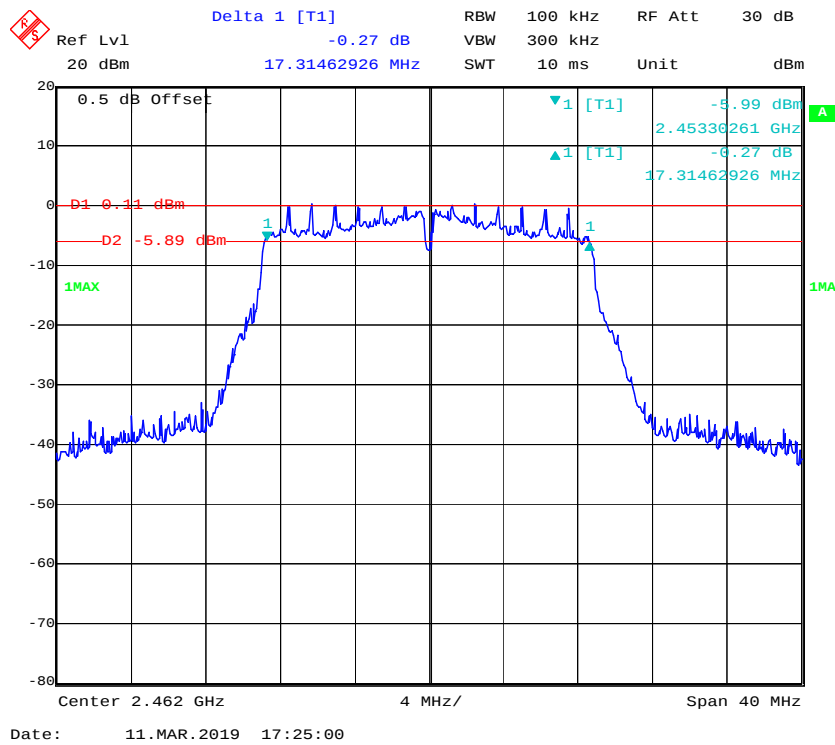


BLE:

Low Channel

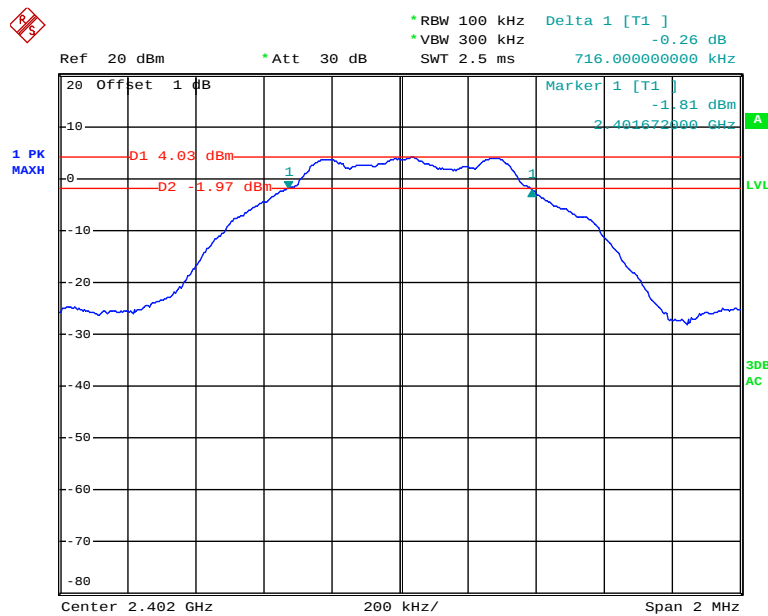


Date: 9.MAR.2019 11:19:02

Middle Channel

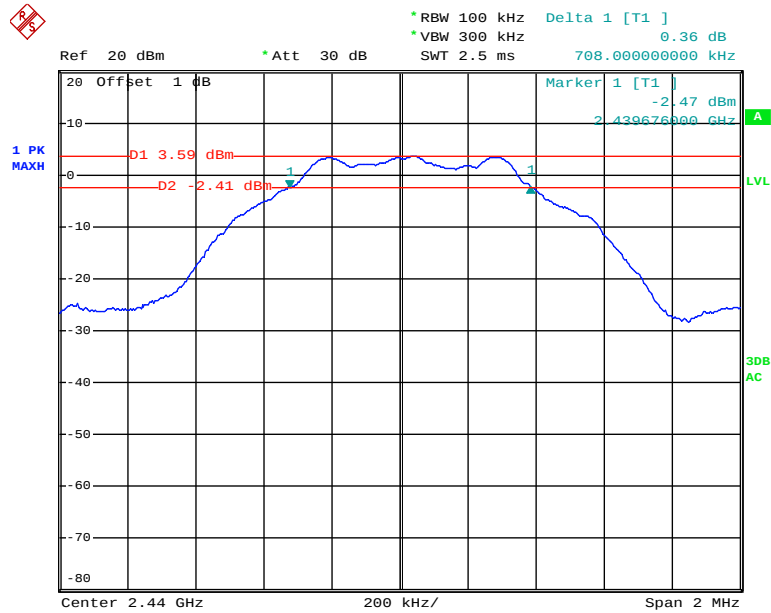

Date: 9.MAR.2019 11:20:48

High Channel

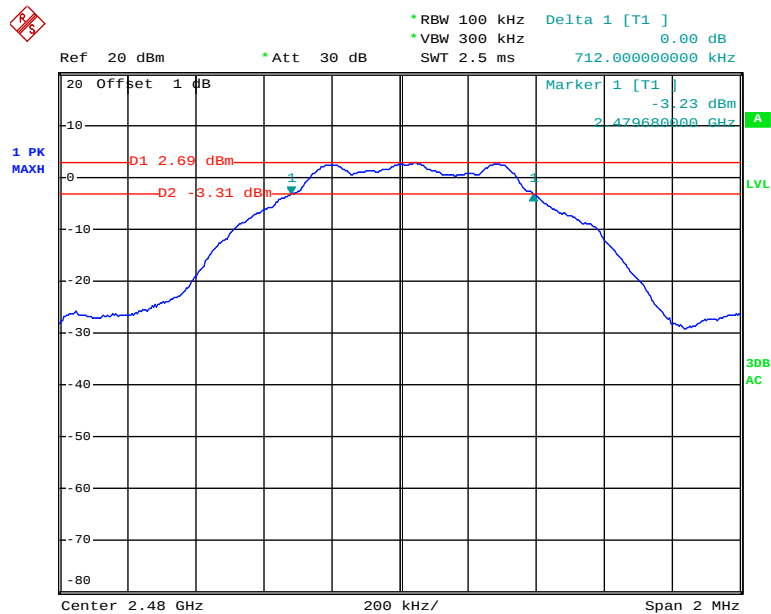

Date: 9.MAR.2019 11:21:52


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	22.1°C ~22.9°C
Relative Humidity:	51%~59%
ATM Pressure:	101kPa~101.2kPa
Test by:	Andy Huang
Test Date:	2019-03-09~2019-03-11

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Mode	Frequency (MHz)	Maximum conducted Peak Output Power (dBm)	Limit (dBm)
802.11 b	2412	15.12	30
	2437	15.19	30
	2462	14.77	30
802.11 g	2412	21.20	30
	2437	21.34	30
	2462	21.06	30
802.11n20	2412	21.18	30
	2437	21.23	30
	2462	20.96	30
BLE	2402	4.83	30
	2440	4.31	30
	2480	3.49	30

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	22.1°C ~22.9°C
Relative Humidity:	51%~59%
ATM Pressure:	101kPa~101.2kPa
Test by:	Andy Huang
Test Date:	2019-03-09~2019-03-11

Test mode: Transmitting


Test Result: Compliance. Please refer to following plots.

802.11b:

Band Edge, Left Side

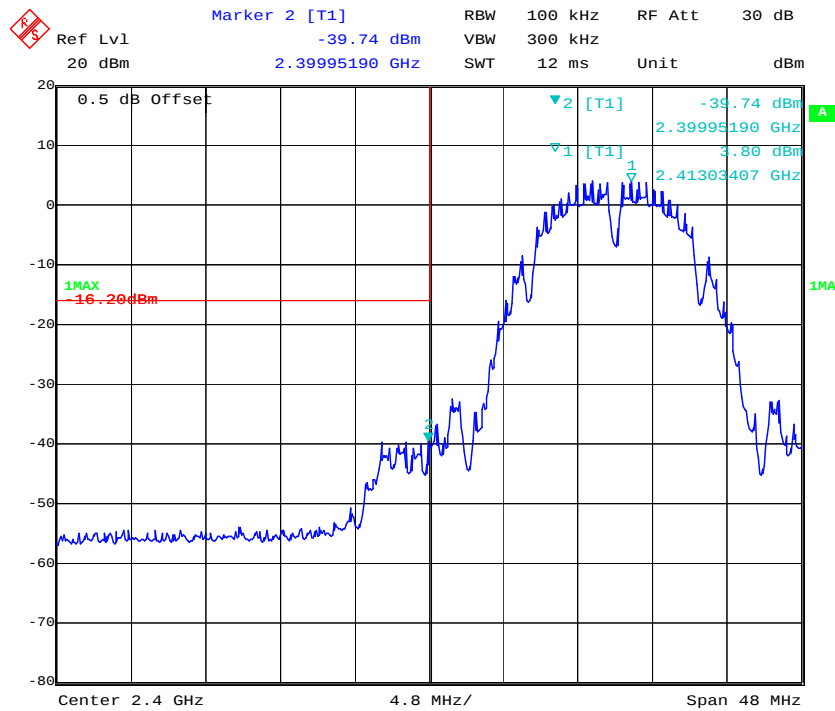


Band Edge, Right Side

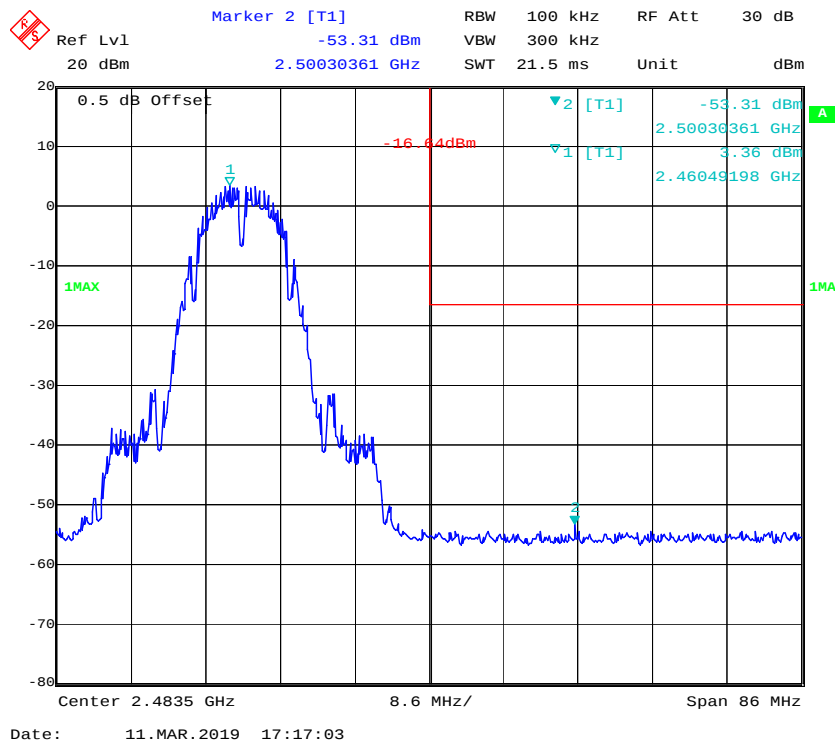


802.11g:

Band Edge, Left Side

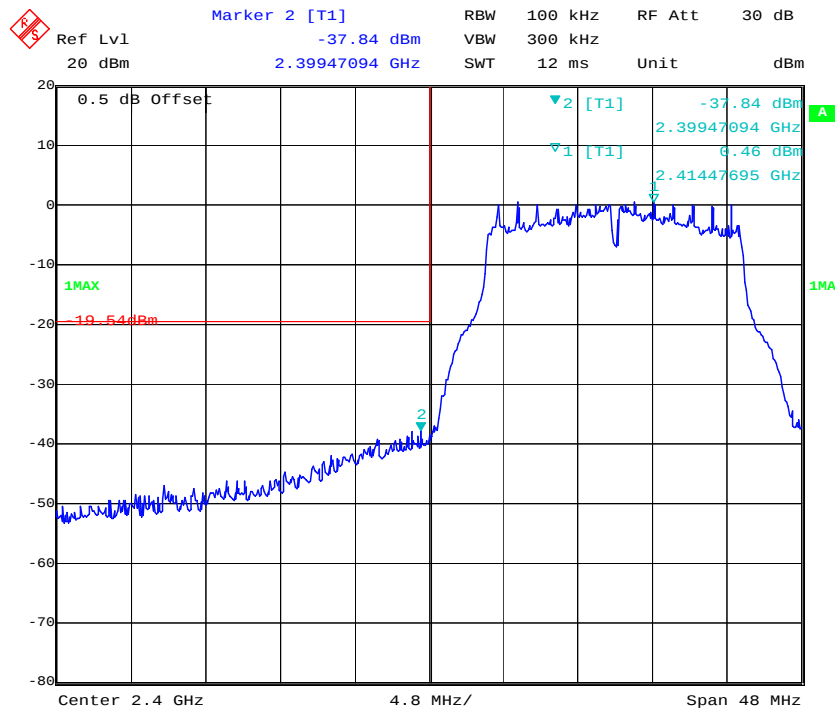


Band Edge, Right Side

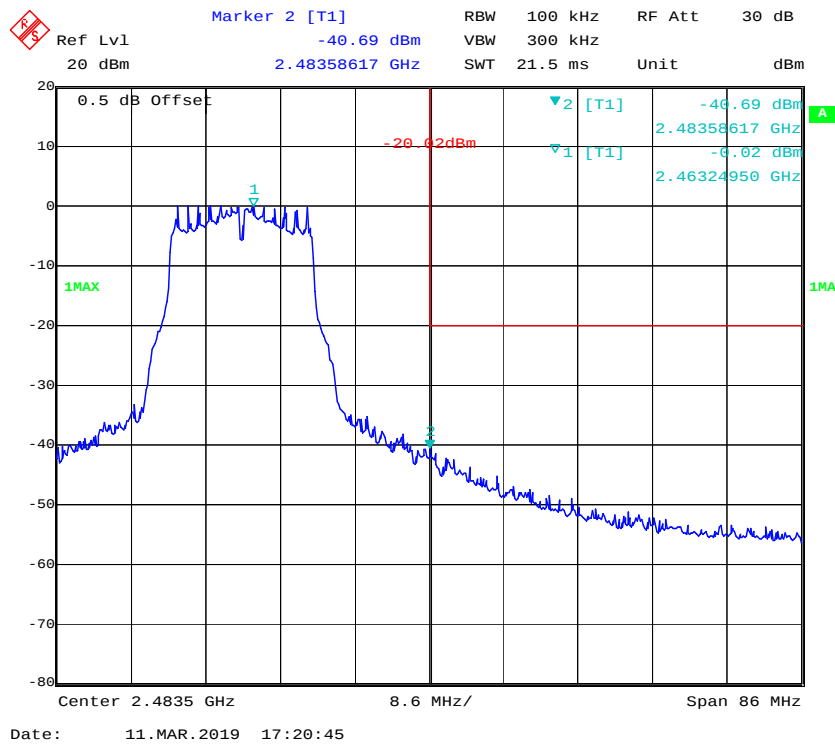


802.11n ht20:

Band Edge, Left Side

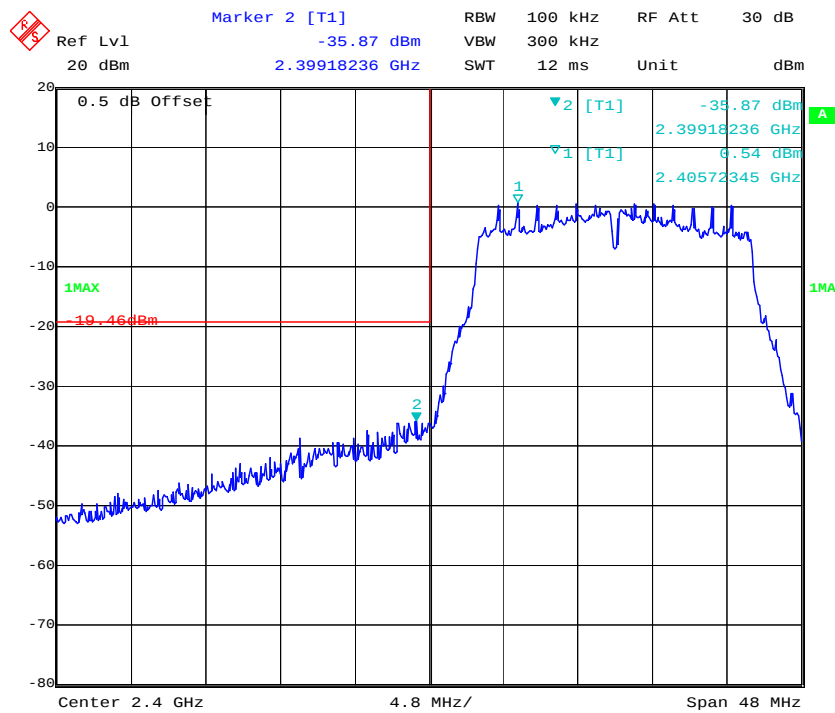

Date: 11.MAR.2019 17:23:01


Band Edge, Right Side

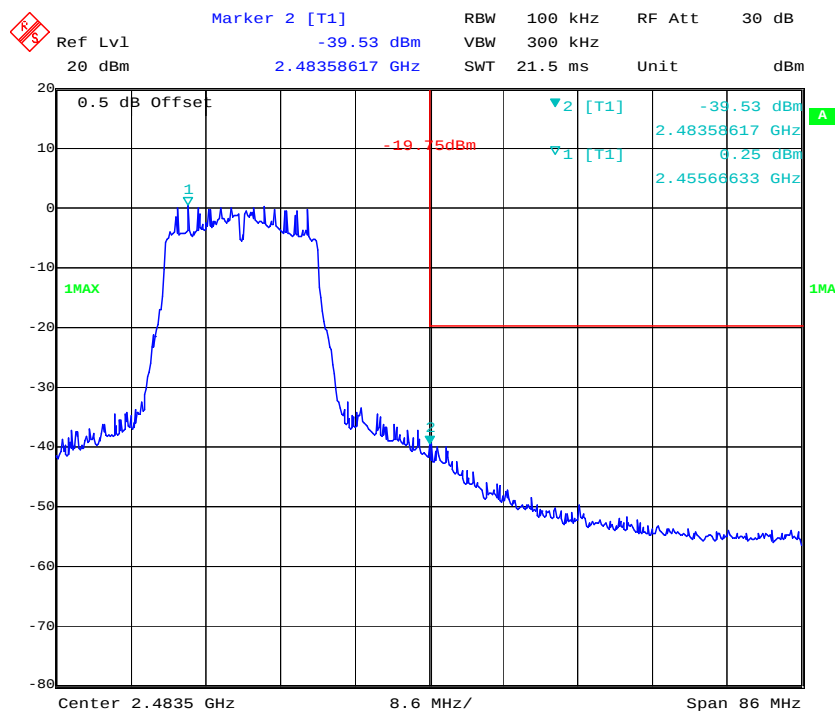

Date: 11.MAR.2019 17:26:09


BLE:

Band Edge, Left Side

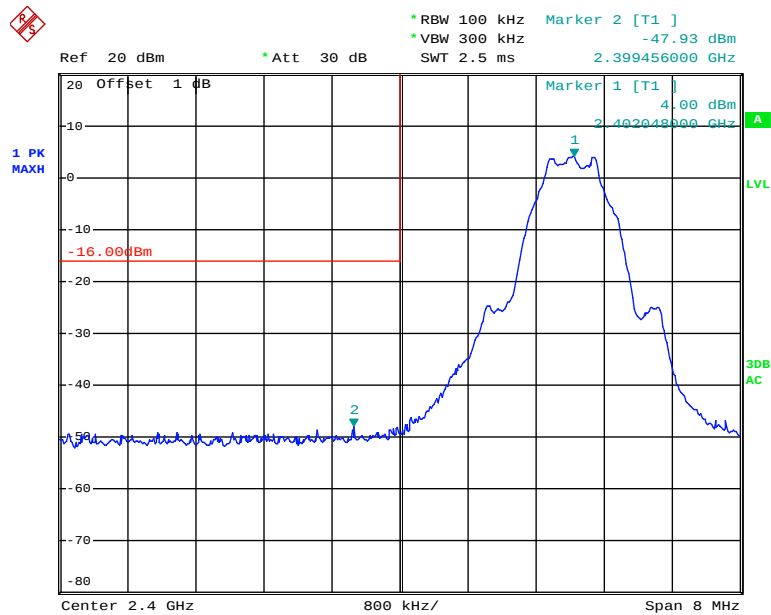

Date: 9.MAR.2019 11:20:08

Band Edge, Right Side

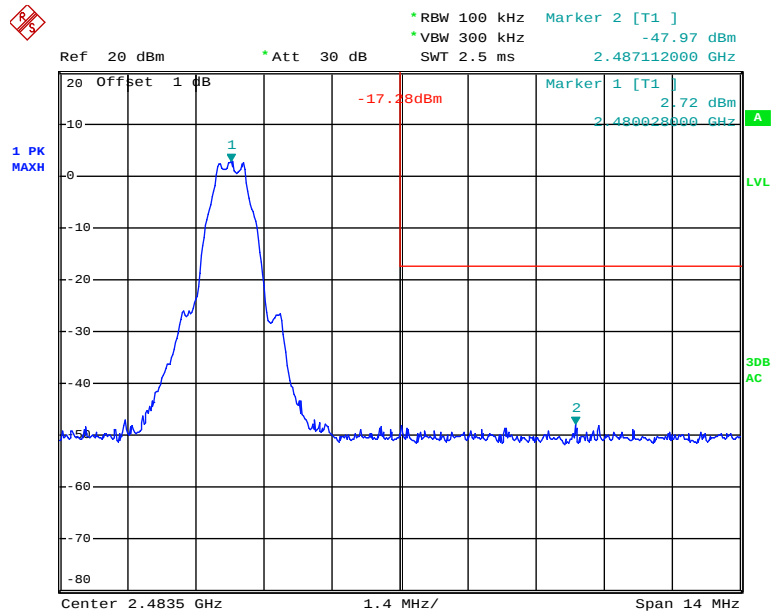

Date: 9.MAR.2019 11:23:01

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	22.1°C ~22.9°C
Relative Humidity:	51%~59%
ATM Pressure:	101kPa~101.2kPa
Test by:	Andy Huang
Test Date:	2019-03-09~2019-03-11



Test Result: Compliance, Please refer to the following table and plots

Test Mode: Transmitting


Test mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-9.85	≤8
	2437	-9.45	≤8
	2462	-9.38	≤8
802.11g	2412	-12.05	≤8
	2437	-12.15	≤8
	2462	-12.18	≤8
802.11n ht20	2412	-13.11	≤8
	2437	-12.87	≤8
	2462	-12.22	≤8
BLE	2402	-9.43	≤8
	2440	-9.93	≤8
	2480	-10.86	≤8

Power Spectral Density, 802.11b Low Channel

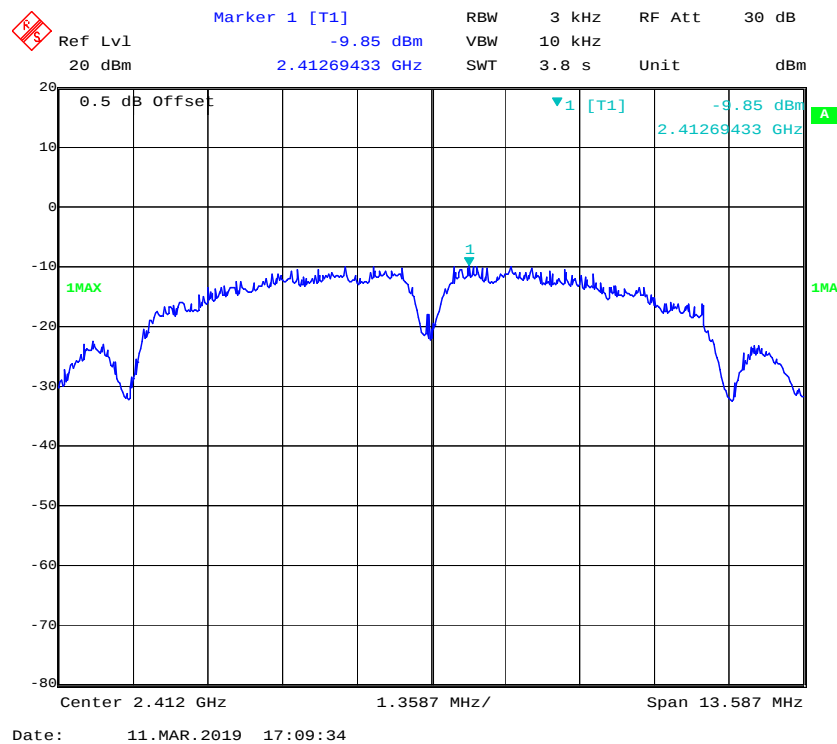

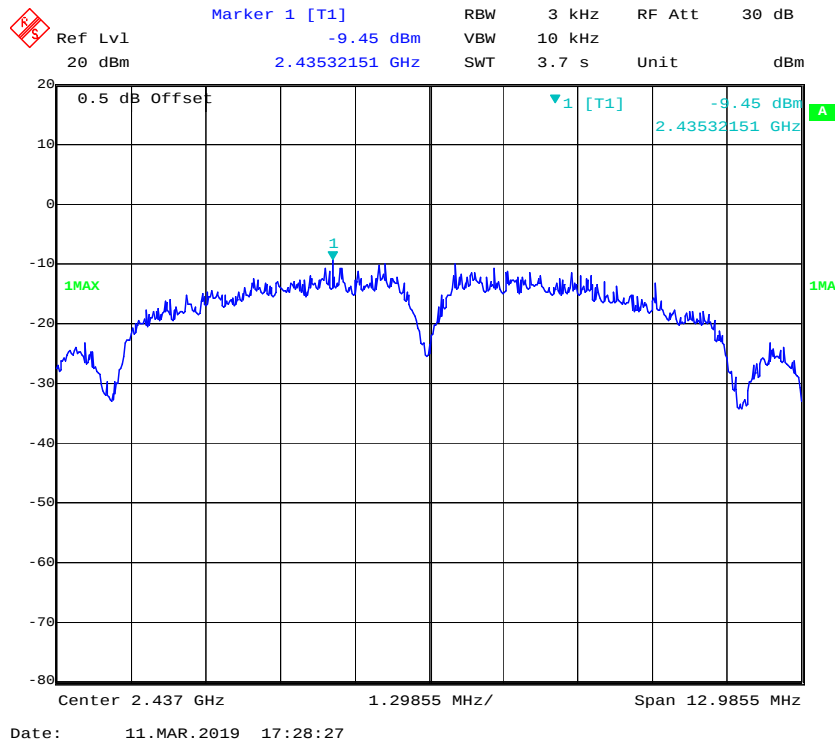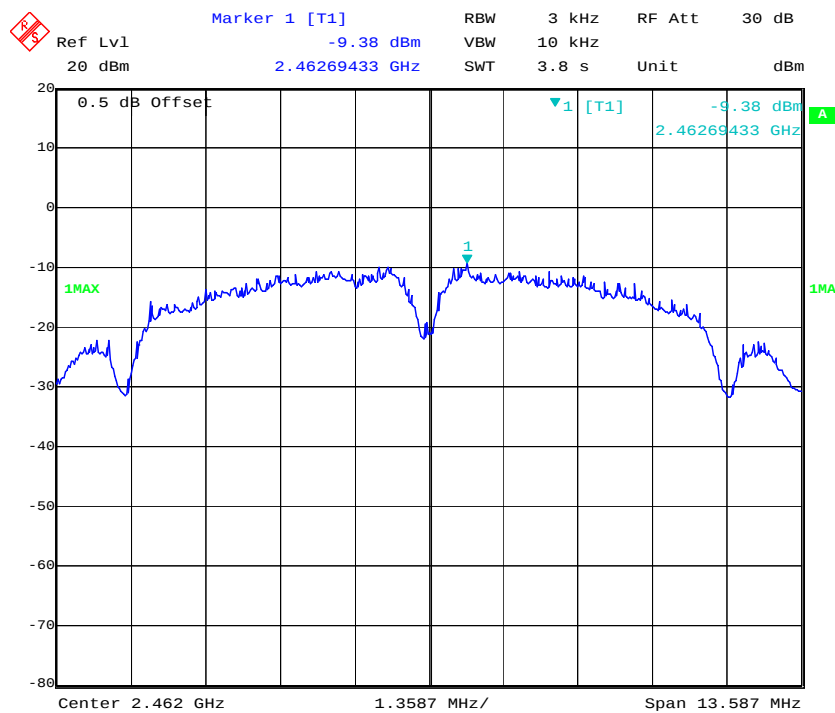Power Spectral Density, 802.11b Middle Channel**Power Spectral Density, 802.11b High Channel**


Power Spectral Density, 802.11g Low Channel

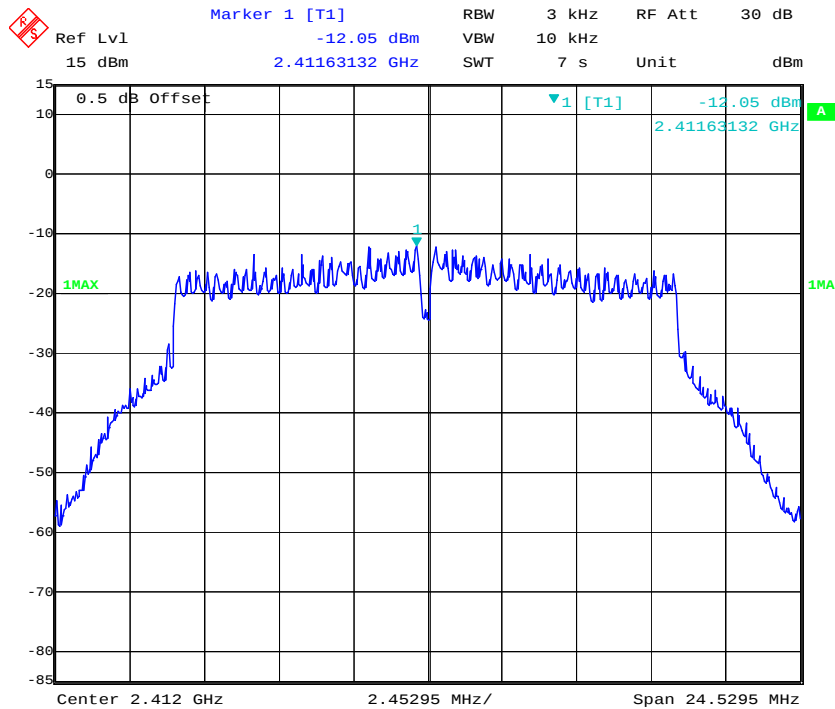

Date: 11.MAR.2019 17:30:06


b

Power Spectral Density, 802.11g Middle Channel

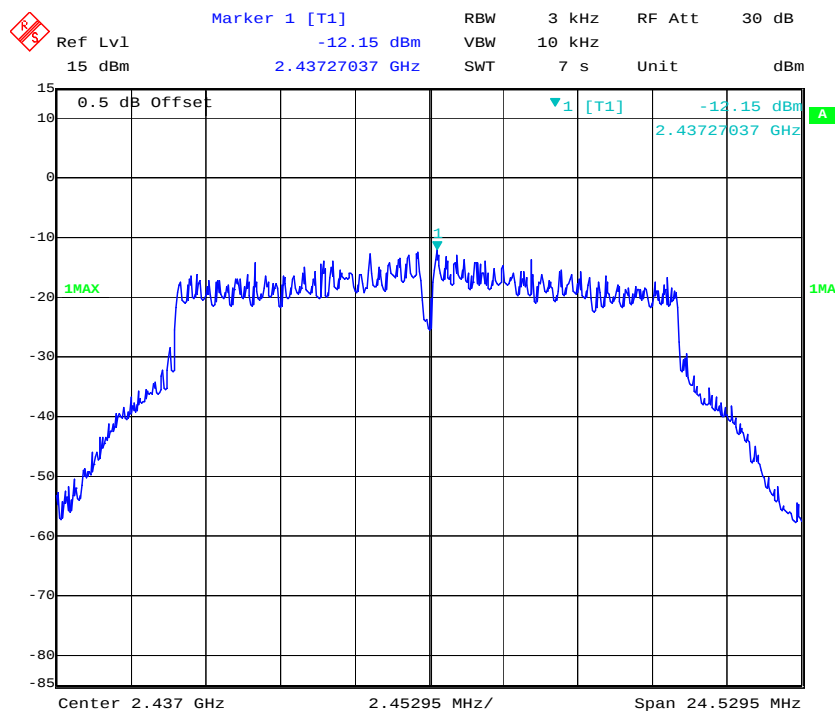


Date: 11.MAR.2019 17:30:27


Power Spectral Density, 802.11g High Channel

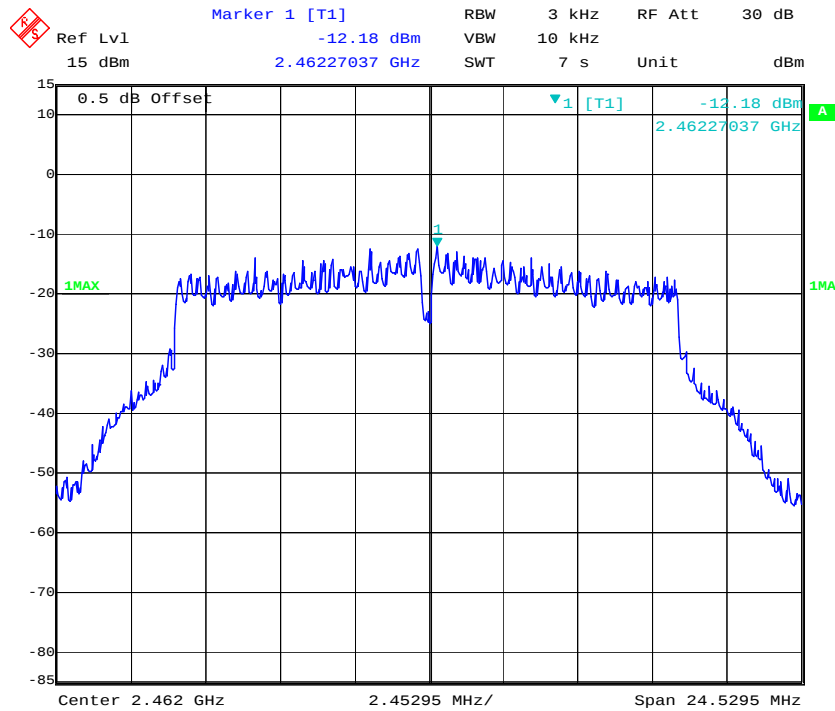


Power Spectral Density, 802.11n ht20 Low Channel

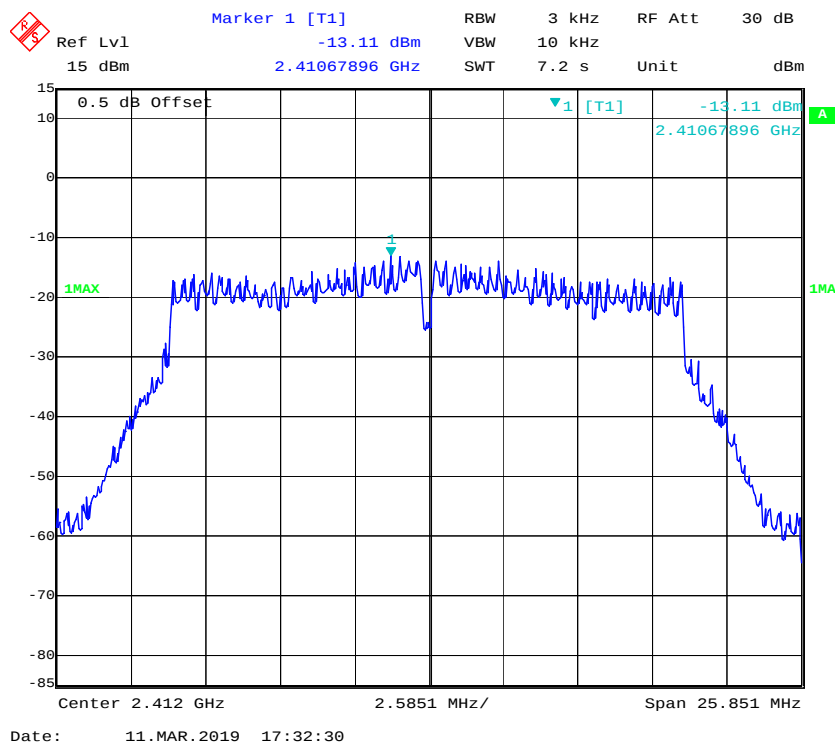

Power Spectral Density, 802.11n ht20 Middle Channel

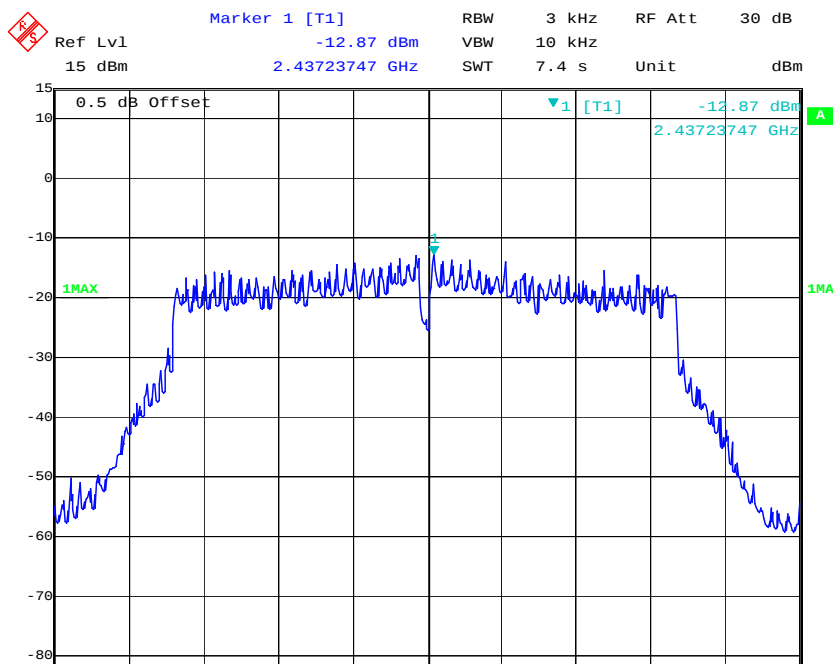


Power Spectral Density, 802.11n ht20 High Channel

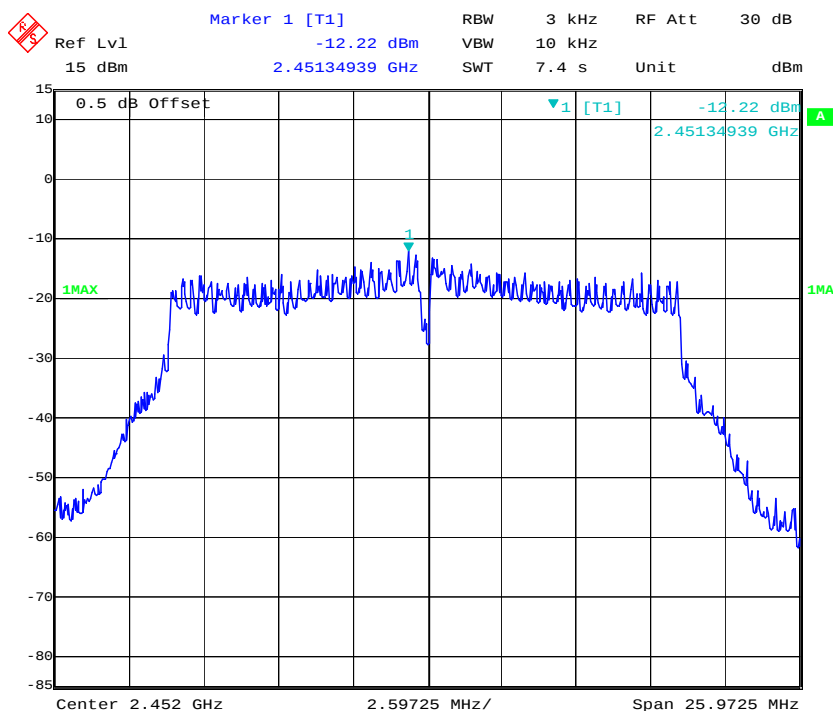

Date: 11.MAR.2019 17:34:20


BLE:

Power Spectral Density, Low Channel

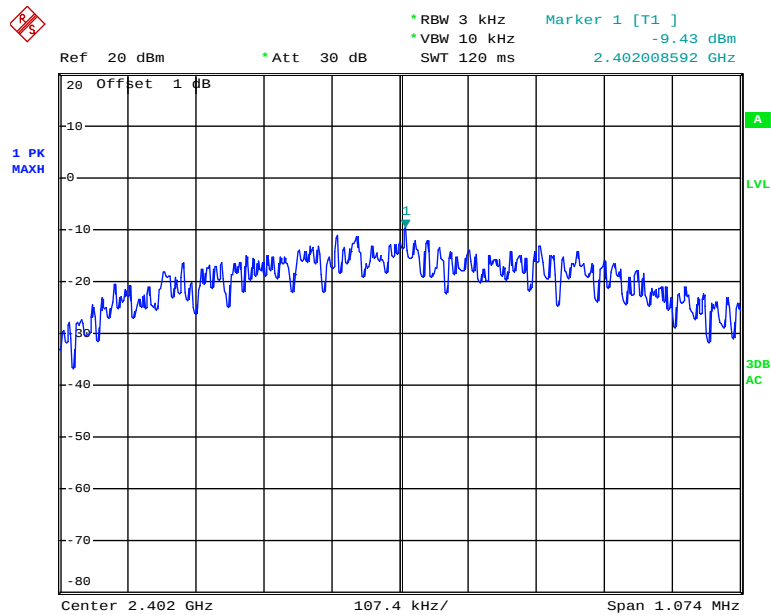


Date: 9.MAR.2019 11:19:43

Power Spectral Density, Middle Channel

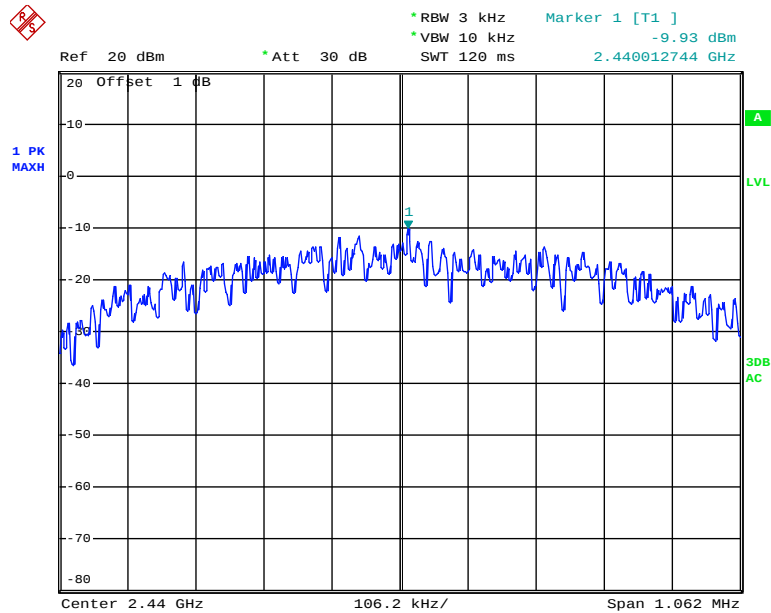

Date: 9.MAR.2019 11:21:25

Power Spectral Density, High Channel

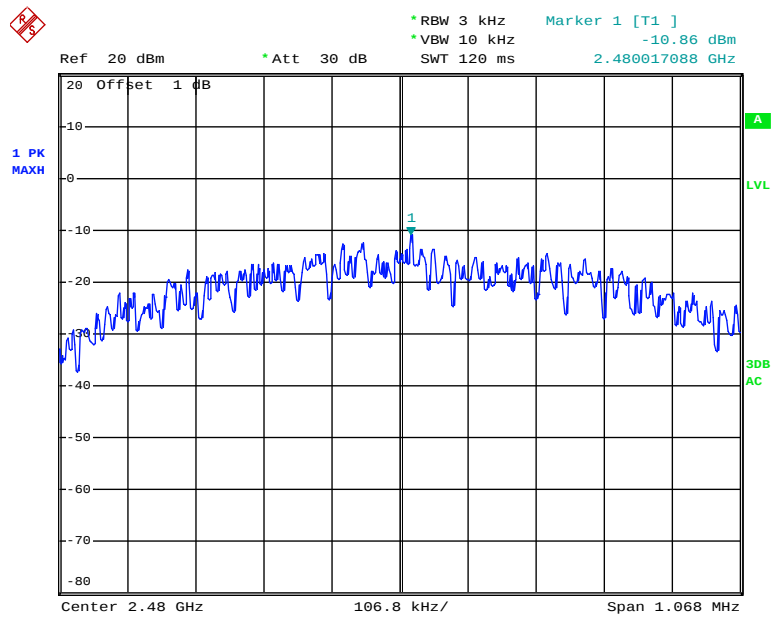

Date: 9.MAR.2019 11:22:32

***** END OF REPORT *****