



TEST REPORT

Report Reference No. : **TRE1708013301** R/C.....: 77954

FCC ID : **2AHF5-ROZEBUDS**

Applicant's name : **Dongguan Rentong Electric Co.,Ltd**

Address : Hecheng Industrial Zone, Qiaotou, Town Dongjiang, Dongguan, Guangdong, China

Manufacturer : Dongguan You Tong Electronics Technology Co.,Ltd

Address : No.12,North 7 Street,East Road,Dongjiang Village,Qiaotou Town, Dongguan City,Guangdong Province, China

Test item description : **Rozebuds Wireless Earphone**

Trade Mark : Rozebuds

Model/Type reference : Rozebuds Earphone

Listed Model(s) : Rosegold version, Blacksilver version, Blackgold version

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample : Aug. 21, 2017

Date of testing : Aug. 22, 2017- Sep. 11, 2017

Date of issue : Sep. 11, 2017

Result : **PASS**

Compiled by
(position+printedname+signature).... : File administrators Shayne Zhu

Shayne Zhu

Supervised by
(position+printedname+signature).... : Project Engineer Lion Cai

Lion Cai

Approved by
(position+printedname+signature).... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emission (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20dB Emission Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	30
5.9.	Restricted band (radiated)	31
5.10.	Bandedge and Spurious Emission (conducted)	33
5.11.	Spurious Emission (radiated)	53
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>57</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>59</u>

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Sep. 11, 2017	Original

2. Test Description

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Restricted band	15.247(d)/15.205	Pass
Radiated Emission	15.247(d)/15.209	Pass

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Dongguan Rentong Electric Co.,Ltd
Address:	Hecheng Industrial Zone, Qiaotou, Town Dongjiang, Dongguan, Guangdong, China
Manufacturer:	Dongguan You Tong Electronics Technology Co.,Ltd
Address:	No.12,North 7 Street,East Road,Dongjiang Village,Qiaotou Town, Dongguan City,Guangdong Province China

3.2. Product Description

Name of EUT:	Rozebuds Wireless Earphone
Trade Mark:	Rozebuds
Model No.:	Rozebuds Earphone
Listed Model(s):	Rosegold version, Blacksilver version, Blackgold version
Power supply:	DC 3.7V From internal battery
Adapter information:	-
Hardware version:	EPH-CSR8640-RT-ROZe-B
Software version:	Rozebuds0701
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Ceramic chip antenna
Antenna gain:	0dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
0	2402
1	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For RF test axis
EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

	Length (m):	/
	Shield:	/
	Detachable:	/
	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter Power Conducted	0.57 dB	(1)
Transmitter Power Radiated	2.20 dB	(1)
Conducted Spurious Emission 9 kHz ~ 40 GHz	1.60 dB	(1)
Radiated Spurious Emission 9 kHz ~ 40 GHz	2.20 dB	(1)
Conducted Emission 9 kHz ~ 30 MHz	3.39 dB	(1)
Radiated Emission 30 ~ 1000 MHz	4.24 dB	(1)
Radiated Emission 1 ~ 18 GHz	5.16 dB	(1)
Radiated Emission 18 ~ 40 GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2016/11/13
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2016/11/13
8	Amplifer	Sonoma	310N	E009-13	2016/11/13
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
10	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
11	HORNANTENNA	ShwarzBeck	9120D	1012	2016/11/13
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2016/11/13
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2016/11/13

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed**

☐ **Not Applicable**

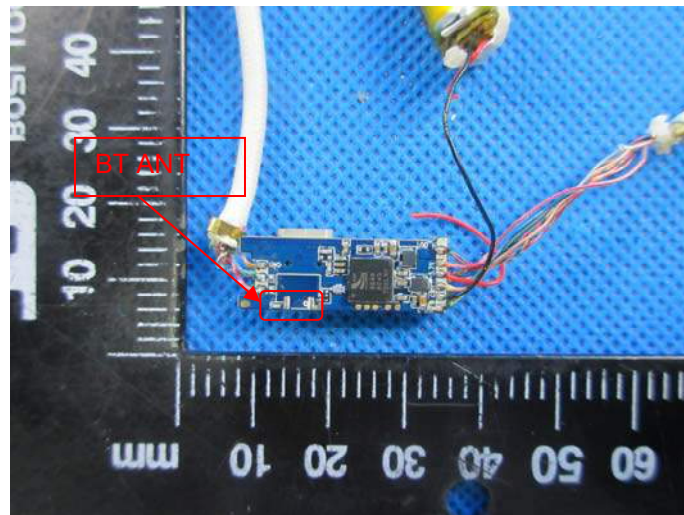

5.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

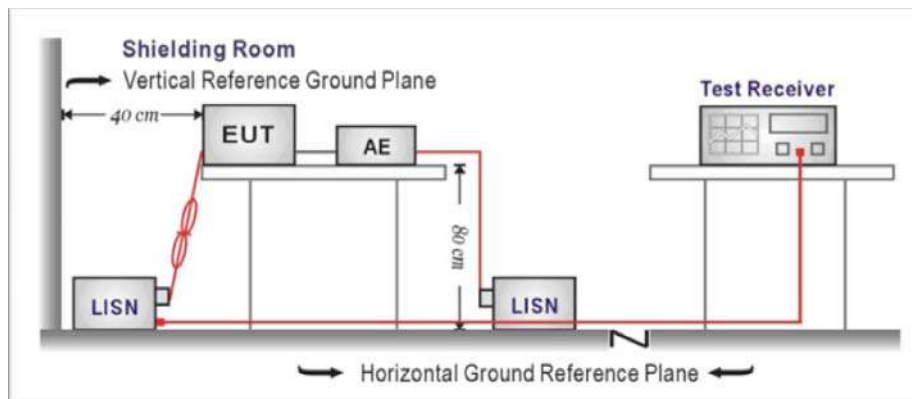

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.
- 9.

TEST RESULTS


☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

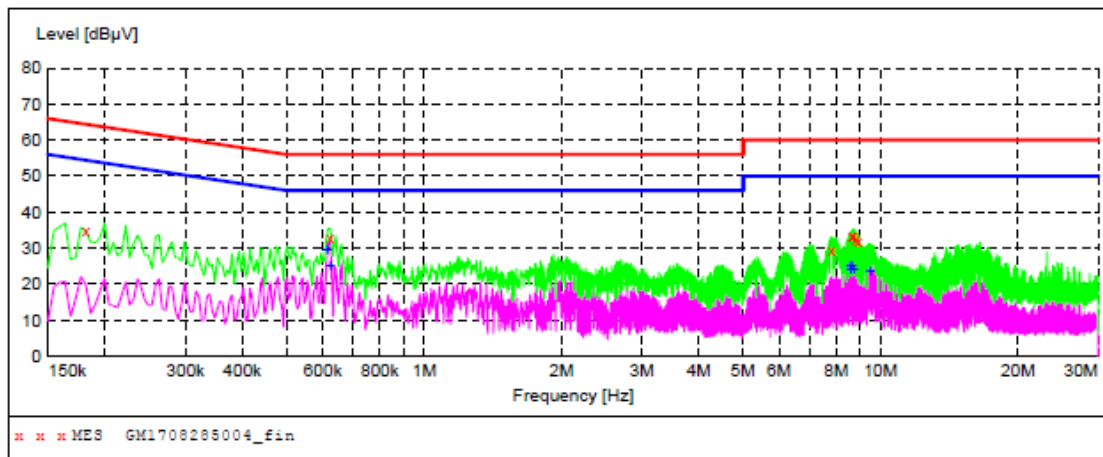**MEASUREMENT RESULT: "GM1708285004_fin"**

8/28/2017 9:50AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	34.90	10.3	64	29.5	QP	L1	GND
0.622500	32.90	10.2	56	23.1	QP	L1	GND
7.813500	29.40	10.4	60	30.6	QP	L1	GND
8.668500	33.30	10.5	60	26.7	QP	L1	GND
8.727000	33.40	10.5	60	26.6	QP	L1	GND
8.848500	32.50	10.5	60	27.5	QP	L1	GND
8.947500	31.80	10.5	60	28.2	QP	L1	GND


MEASUREMENT RESULT: "GM1708285004_fin2"

8/28/2017 9:50AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.613500	29.60	10.2	46	16.4	AV	L1	GND
0.622500	25.30	10.2	46	20.7	AV	L1	GND
8.587500	25.00	10.5	50	25.0	AV	L1	GND
8.610000	23.90	10.5	50	26.1	AV	L1	GND
8.668500	25.30	10.5	50	24.7	AV	L1	GND
8.749500	24.20	10.5	50	25.8	AV	L1	GND
9.501000	23.50	10.6	50	26.5	AV	L1	GND

Test Line:

N

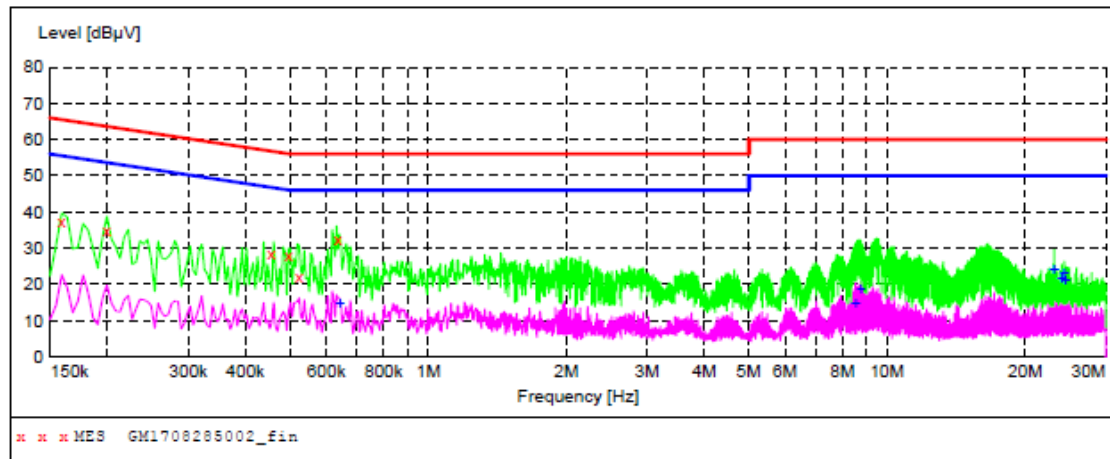**MEASUREMENT RESULT: "GM1708285002_fin"**

8/28/2017 9:43AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	37.20	10.4	66	28.3	QP	N	GND
0.199500	35.00	10.3	64	28.6	QP	N	GND
0.456000	28.40	10.2	57	28.4	QP	N	GND
0.496500	28.20	10.2	56	27.9	QP	N	GND
0.523500	22.30	10.2	56	33.7	QP	N	GND
0.636000	32.40	10.2	56	23.6	QP	N	GND

MEASUREMENT RESULT: "GM1708285002_fin2"

8/28/2017 9:43AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.640500	14.90	10.2	46	31.1	AV	N	GND
8.533500	14.90	10.5	50	35.1	AV	N	GND
8.772000	18.50	10.5	50	31.5	AV	N	GND
23.127000	24.20	10.7	50	25.8	AV	N	GND
24.040500	21.80	10.7	50	28.2	AV	N	GND
24.346500	23.30	10.7	50	26.7	AV	N	GND
24.531000	21.40	10.7	50	28.6	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION

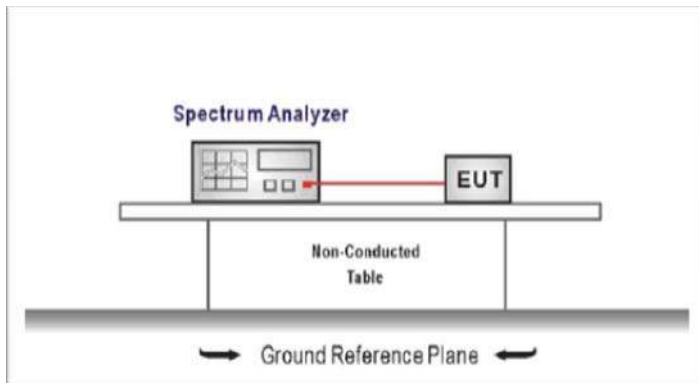

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-4.622	≤ 30.00	Pass
	39	-1.550		
	78	-1.281		
$\pi/4$ DQPSK	00	-6.534	≤ 21.00	Pass
	39	-2.344		
	78	-1.667		
8DPSK	00	-6.179	≤ 21.00	Pass
	39	-2.042		
	78	-1.378		

Modulation Type:		GFSK
CH00		
CH39		
CH78		

Modulation Type:		$\pi/4$ DQPSK
CH00		
CH39		
CH78		


Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.4. 20dB Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

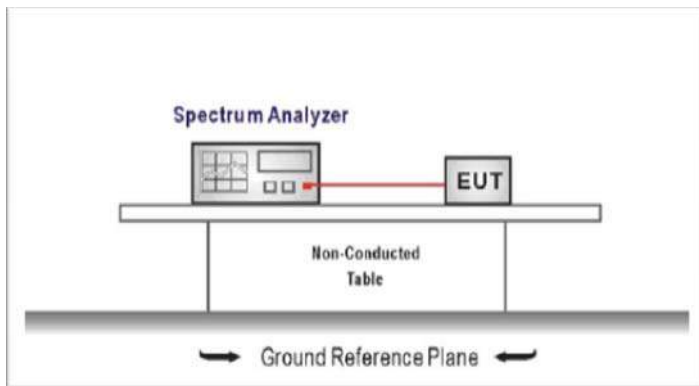

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	20dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.928	-	Pass
	39	0.885		
	78	0.929		
$\pi/4$ DQPSK	00	1.362	-	Pass
	39	1.357		
	78	1.352		
8DPSK	00	1.324	-	Pass
	39	1.303		
	78	1.318		

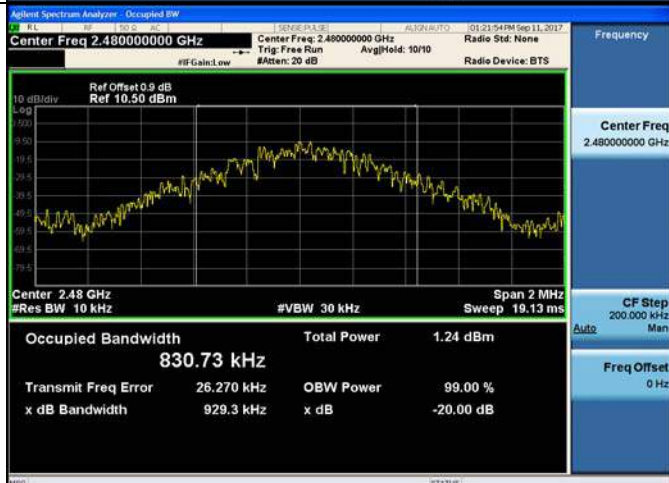Modulation Type:		GFSK
CH00		
CH39		
CH78		

Modulation Type:		$\pi/4$ DQPSK
CH00		
CH39		
CH78		


Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):
frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION

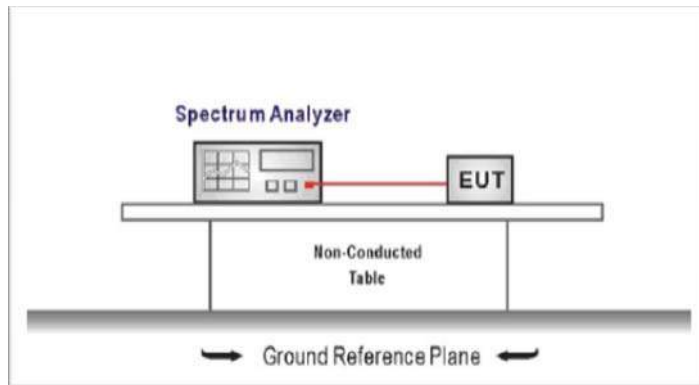

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	0.985	≥ 0.929	Pass
$\pi/4$ DQPSK	39	1.017	≥ 0.908	Pass
8DPSK	39	0.984	≥ 0.883	Pass

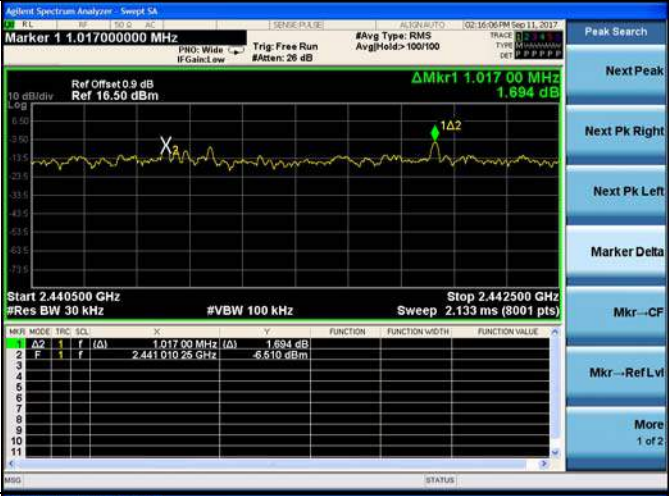GFSK	
$\pi/4$ DQPSK	
8DPSK	


5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

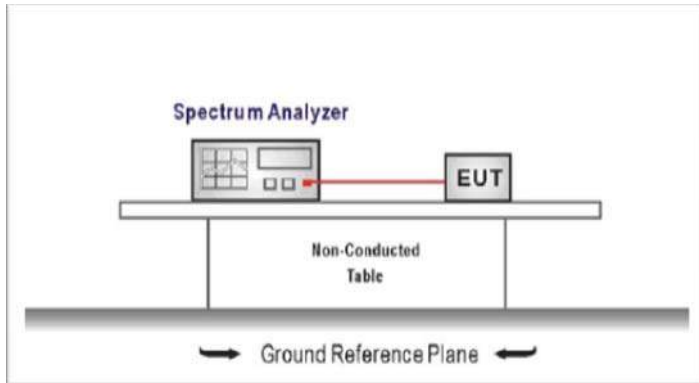

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = the frequency band of operation
 RBW $\geq$ 1% of the span, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		



GFSK

 $\pi/4$ DQPSK/MCH

8DPSK


5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

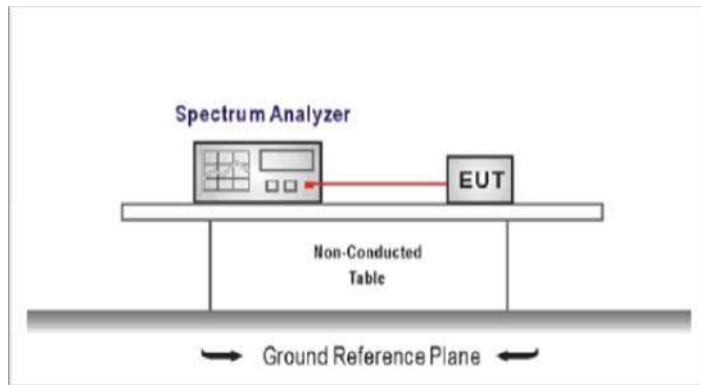

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3




TEST RESULTS




☒ Passed ☐ Not Applicable




Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.131	≤0.40	Pass
	DH3	0.267		
	DH5	0.310		
π/4DQPSK	2-DH1	0.134	≤0.40	Pass
	2-DH3	0.267		
	2-DH5	0.312		
8DPSK	3-DH1	0.134	≤0.40	Pass
	3-DH3	0.267		
	3-DH5	0.312		

Note:

1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5

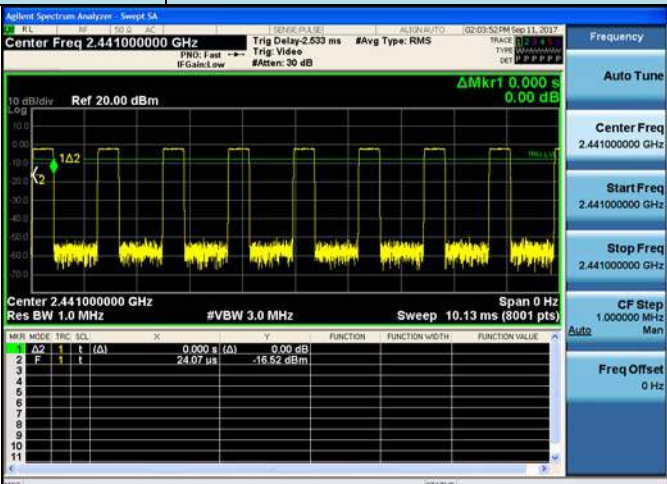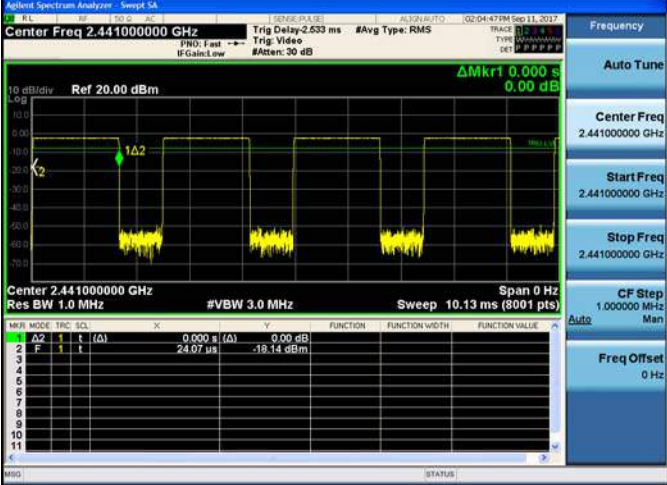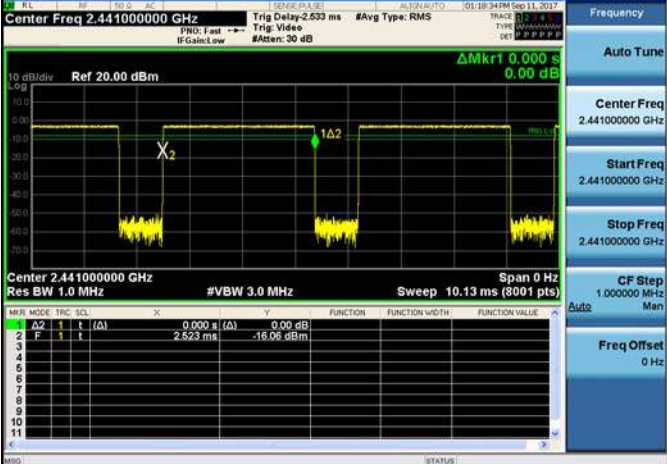Modulation Type:		GFSK
DH1		
DH3		
DH5		

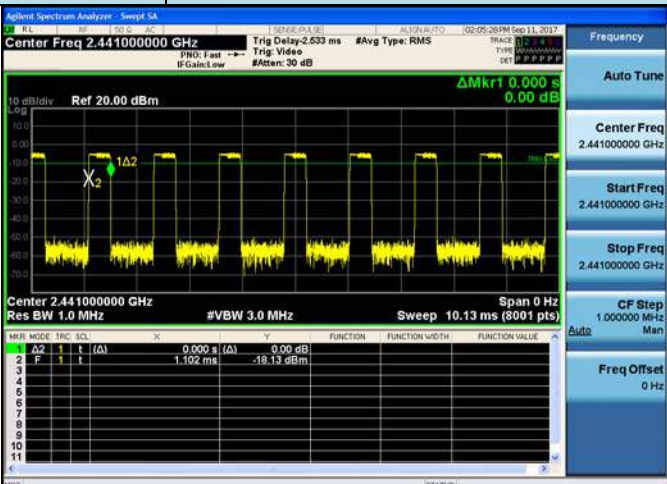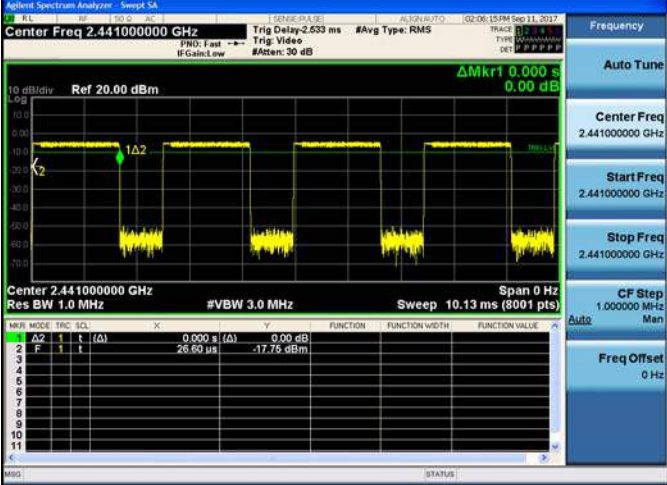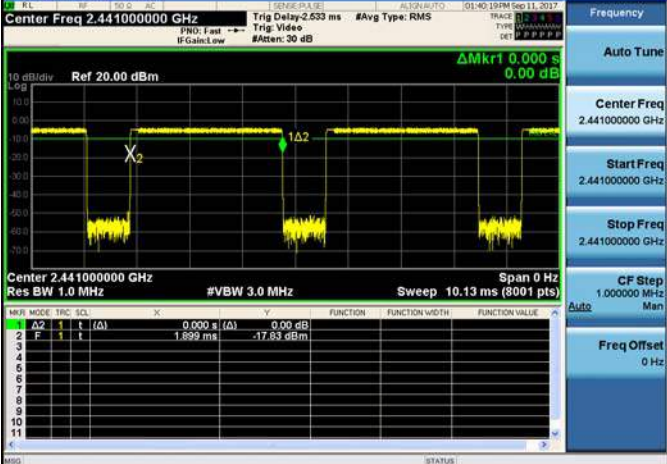Modulation Type:		$\pi/4$ DQPSK
2DH1		
2DH3		
2DH5		

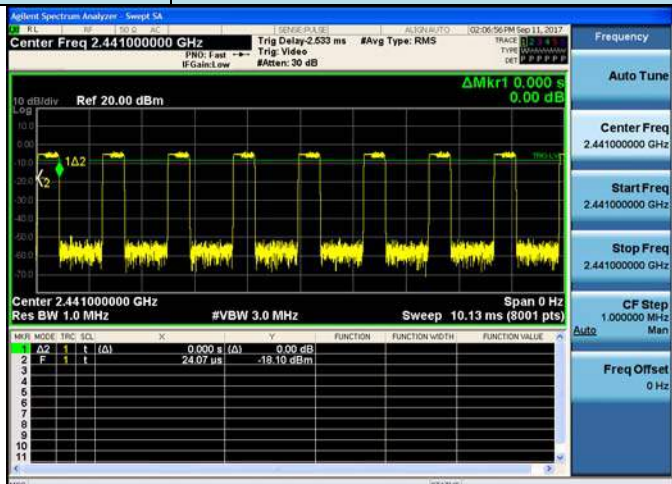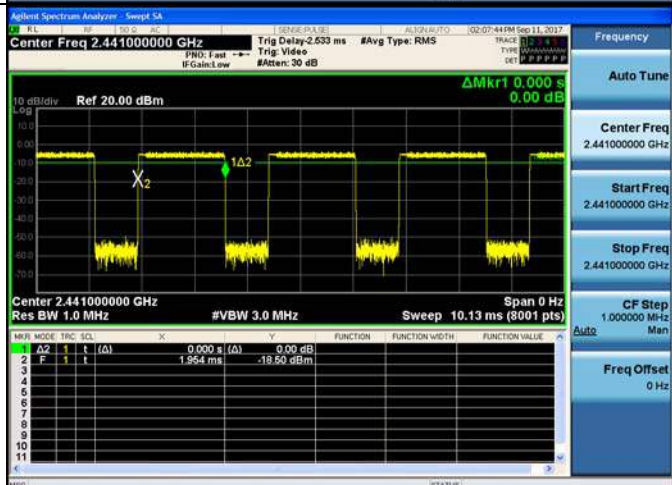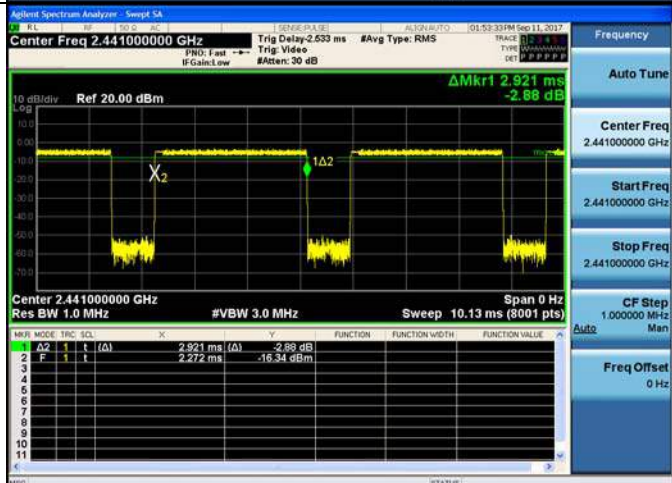Modulation Type:		8DPSK
3DH1		
3DH3		
3DH5		

5.8. Pseudorandom Frequency Hopping Sequence

LIMIT


FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

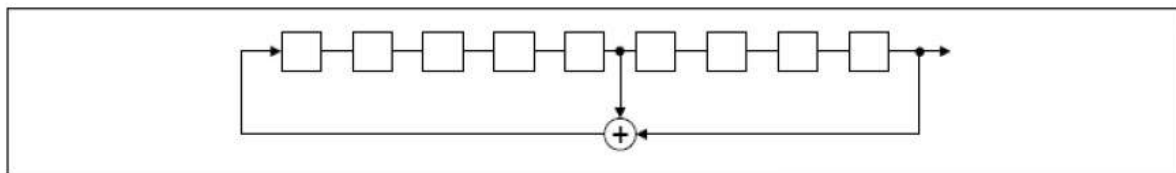

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

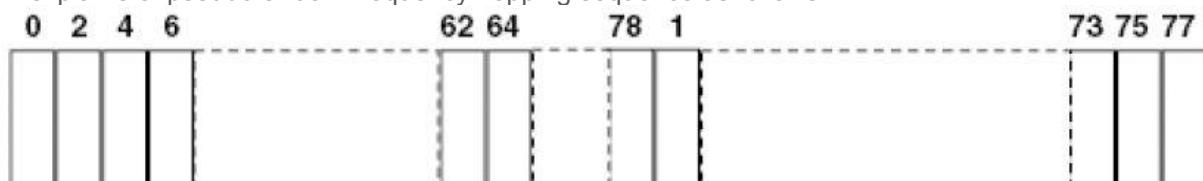

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shifts frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

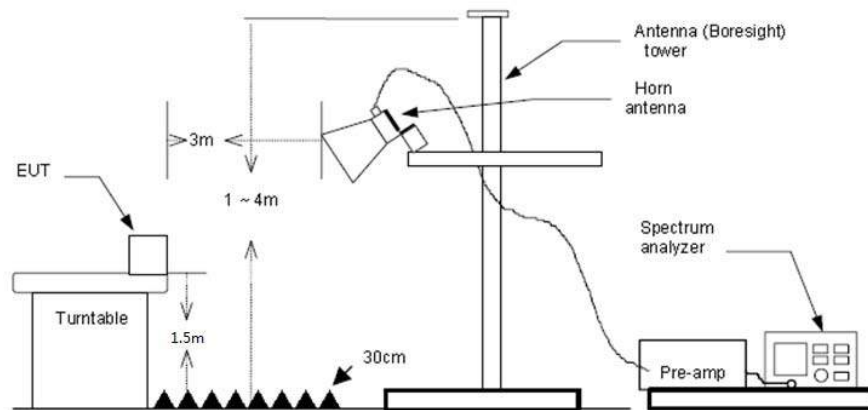

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1 MHz, VBW=3 MHz for Peak value
RBW=1 MHz, VBW=10 Hz for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	34.40	28.05	6.62	37.65	31.42	74.00	-42.58	Vertical	Peak
2390.03	37.33	27.65	6.75	37.87	33.86	74.00	-40.14	Vertical	
2310.00	35.64	28.05	6.62	37.65	32.66	74.00	-41.34	Horizontal	
2350.26	37.51	27.85	6.69	37.76	34.29	74.00	-39.71	Horizontal	
2390.03	35.01	27.65	6.75	37.87	31.54	74.00	-42.46	Horizontal	
2310.00	22.92	28.05	6.62	37.65	19.94	54.00	-34.06	Vertical	Average
2324.11	24.14	27.98	6.64	37.69	21.07	54.00	-32.93	Vertical	
2350.06	24.12	27.85	6.69	37.76	20.90	54.00	-33.10	Vertical	
2390.03	22.58	27.65	6.75	37.87	19.11	54.00	-34.89	Vertical	
2310.00	22.67	28.05	6.62	37.65	19.69	54.00	-34.31	Horizontal	
2324.01	24.14	27.98	6.64	37.69	21.07	54.00	-32.93	Horizontal	
2350.06	24.39	27.85	6.69	37.76	21.17	54.00	-32.83	Horizontal	
2390.03	22.54	27.65	6.75	37.87	19.07	54.00	-34.93	Horizontal	

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	64.42	27.26	6.83	37.87	60.64	74.00	-13.36	Vertical	Peak
2500.00	37.67	27.20	6.84	37.87	33.84	74.00	-40.16	Vertical	
2,483.50	63.86	27.26	6.83	37.87	60.08	74.00	-13.92	Horizontal	
2,500.00	38.44	27.20	6.84	37.87	34.61	74.00	-39.39	Horizontal	
2483.50	32.65	27.26	6.83	37.87	28.87	54.00	-25.13	Vertical	Average
2500.00	23.46	27.20	6.84	37.87	19.63	54.00	-34.37	Vertical	
2483.50	30.66	27.26	6.83	37.87	26.88	54.00	-27.12	Horizontal	
2500.00	22.54	27.20	6.84	37.87	18.71	54.00	-35.29	Horizontal	


5.10. Bandedge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

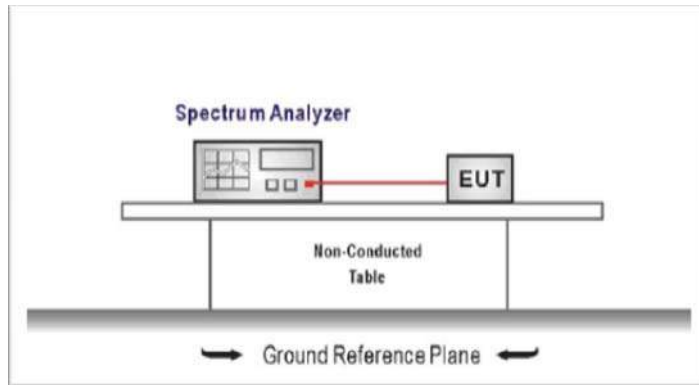

TEST PROCEDURE




1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

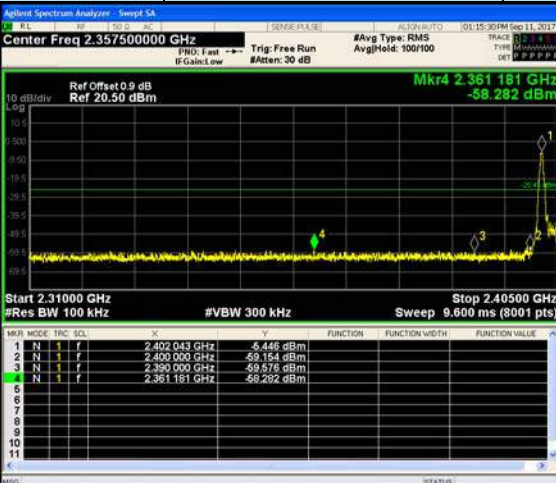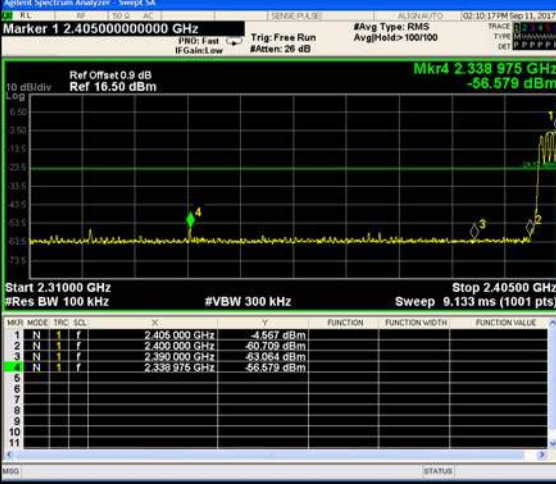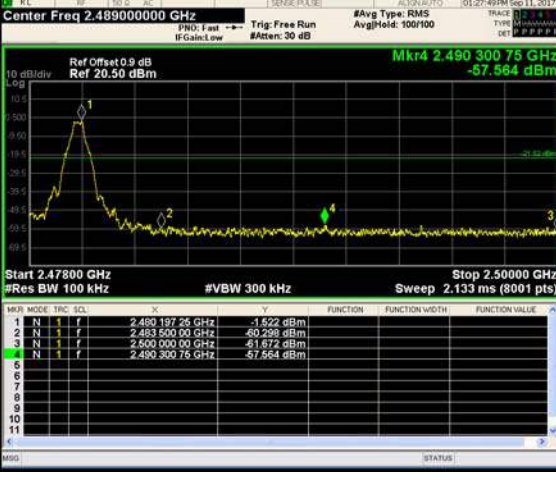
Test Item:	Band edge	Modulation type:	GFSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			




CH78
Hopping mode

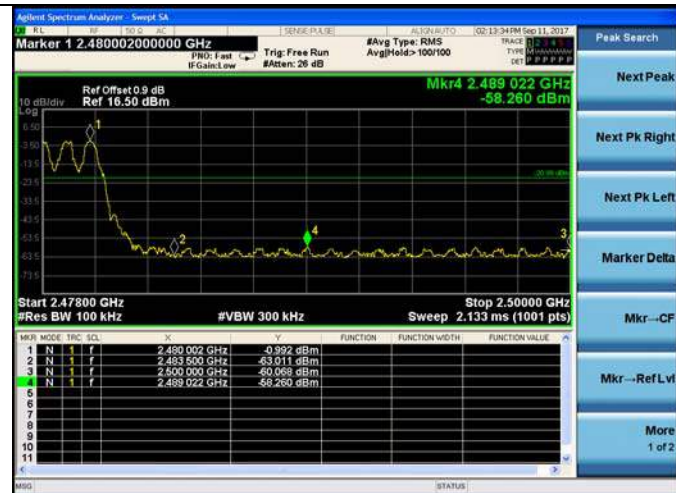

Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																													
CH00 No hopping mode	Agilent Spectrum Analyzer - Swept SA Center Freq 2.357500000 GHz Ref Offset 0.9 dB Ref 20.50 dBm Mkr4 2.337 158 GHz -57.992 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40500 GHz Sweep 9.600 ms (8001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 031 GHz</td><td>-8.256 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-61.103 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-60.201 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.337 158 GHz</td><td>-57.992 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz			MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 031 GHz	-8.256 dBm				2	N	1	f	2.400 000 GHz	-61.103 dBm				3	N	1	f	2.390 000 GHz	-60.201 dBm				4	N	1	f	2.337 158 GHz	-57.992 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.402 031 GHz	-8.256 dBm																																											
2	N	1	f	2.400 000 GHz	-61.103 dBm																																											
3	N	1	f	2.390 000 GHz	-60.201 dBm																																											
4	N	1	f	2.337 158 GHz	-57.992 dBm																																											
CH00 Hopping mode	Agilent Spectrum Analyzer - Swept SA Marker 1 2.405000000000 GHz Ref Offset 0.9 dB Ref 16.50 dBm Mkr4 2.382 010 GHz -60.673 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40500 GHz Sweep 9.133 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.405 000 GHz</td><td>-9.478 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-63.138 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-63.062 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.382 010 GHz</td><td>-60.673 dBm</td><td></td><td></td><td></td></tr></table> Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2			MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405 000 GHz	-9.478 dBm				2	N	1	f	2.400 000 GHz	-63.138 dBm				3	N	1	f	2.390 000 GHz	-63.062 dBm				4	N	1	f	2.382 010 GHz	-60.673 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.405 000 GHz	-9.478 dBm																																											
2	N	1	f	2.400 000 GHz	-63.138 dBm																																											
3	N	1	f	2.390 000 GHz	-63.062 dBm																																											
4	N	1	f	2.382 010 GHz	-60.673 dBm																																											
CH78 No hopping mode	Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 0.9 dB Ref 20.50 dBm Mkr4 2.498 231 75 GHz -57.817 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 205 60 GHz</td><td>-3.536 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-69.847 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-60.434 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.498 231 75 GHz</td><td>-57.817 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.489000000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Man Freq Offset 0 Hz			MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 205 60 GHz	-3.536 dBm				2	N	1	f	2.483 500 00 GHz	-69.847 dBm				3	N	1	f	2.500 000 00 GHz	-60.434 dBm				4	N	1	f	2.498 231 75 GHz	-57.817 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.480 205 60 GHz	-3.536 dBm																																											
2	N	1	f	2.483 500 00 GHz	-69.847 dBm																																											
3	N	1	f	2.500 000 00 GHz	-60.434 dBm																																											
4	N	1	f	2.498 231 75 GHz	-57.817 dBm																																											



CH78
Hopping mode

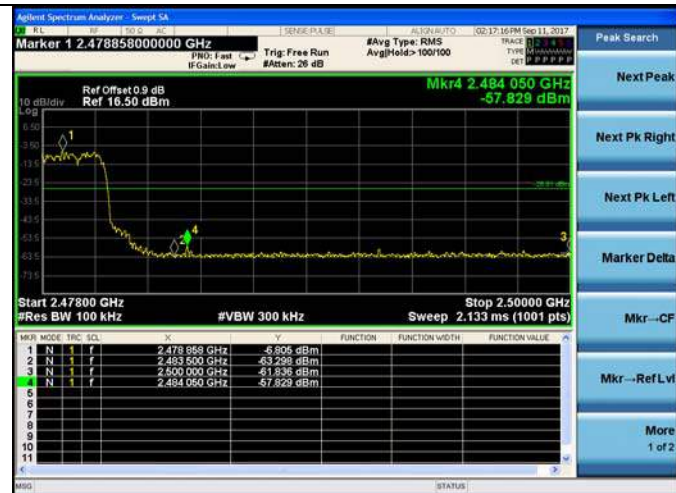


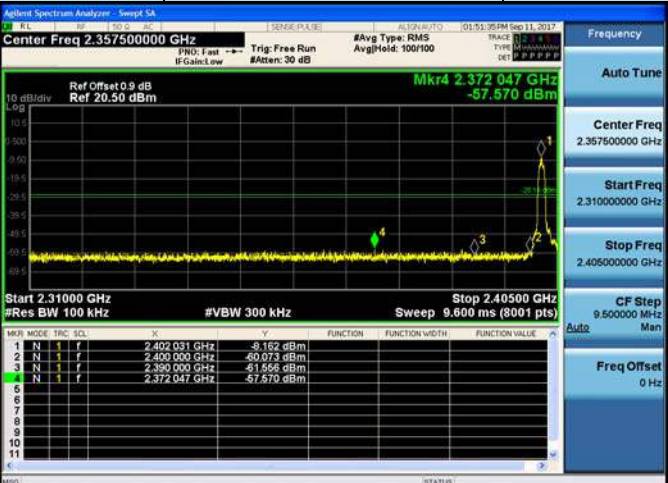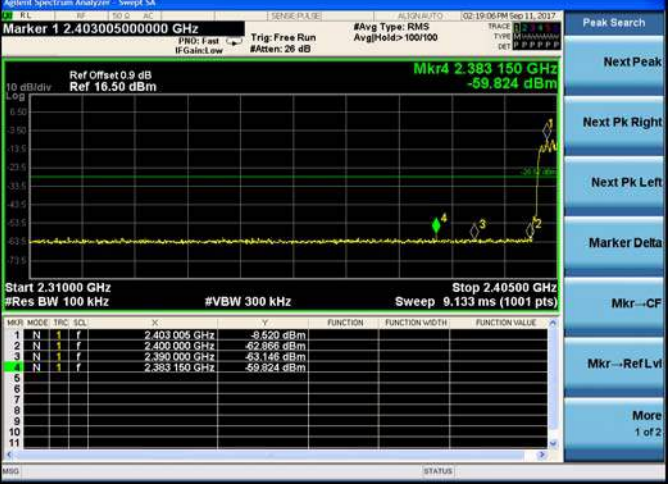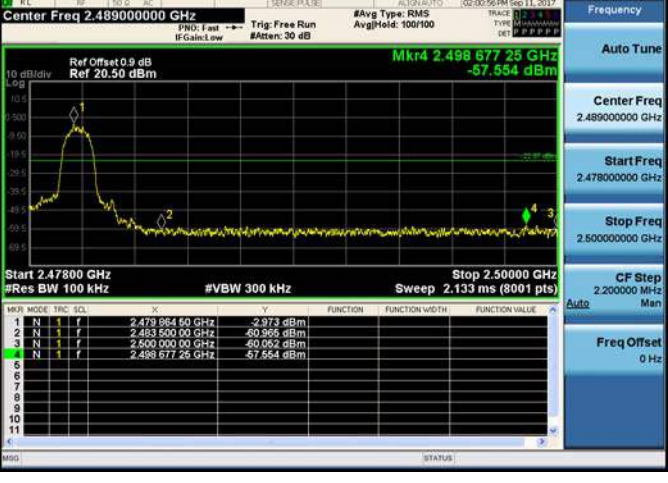
Test Item:	Band edge	Modulation type:	8DPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			


CH78
Hoppig mode

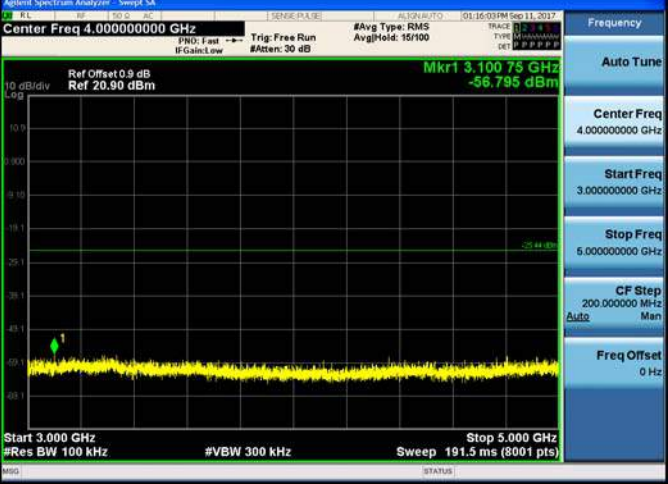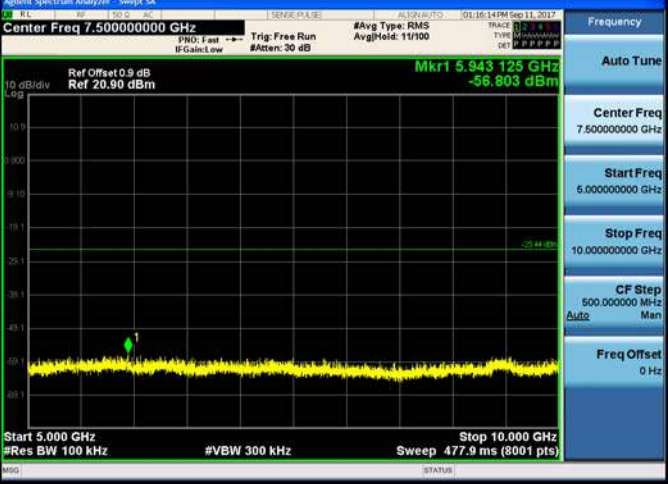




Test Item:	SE	Modulation type:	GFSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

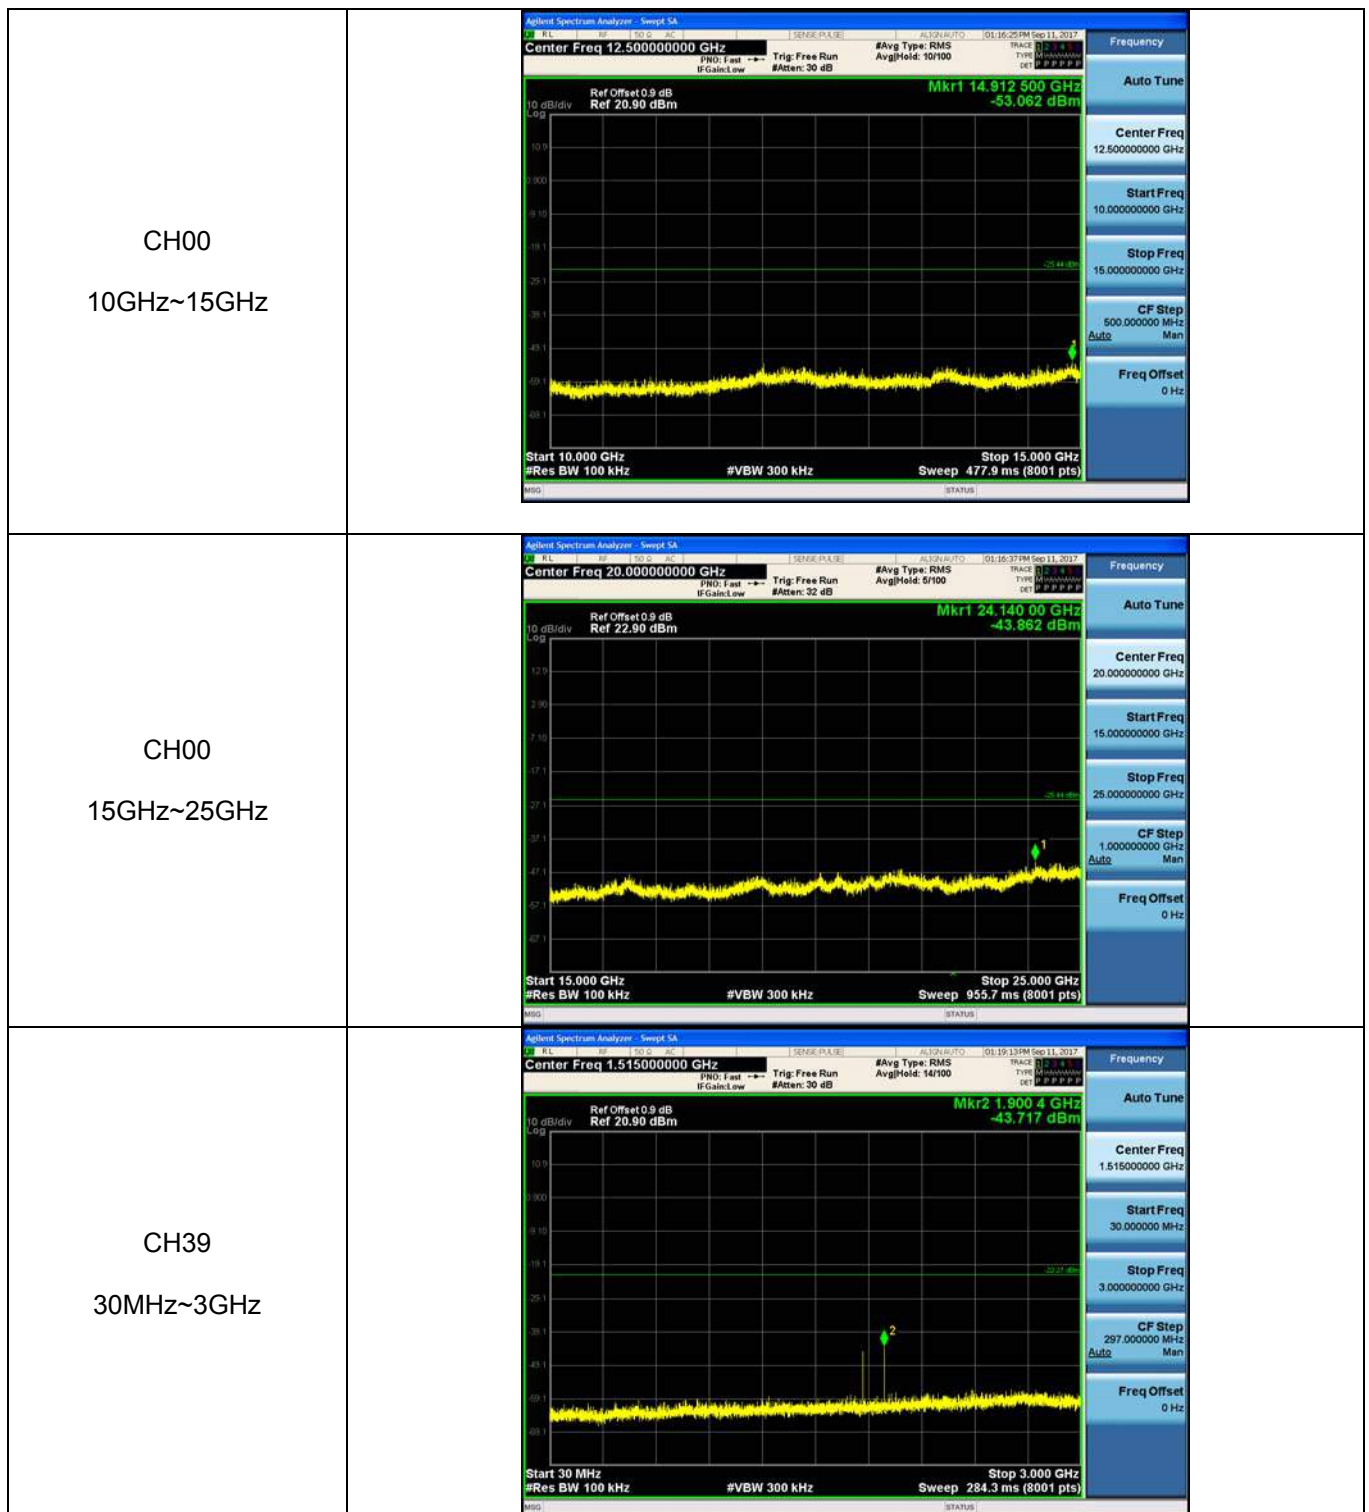


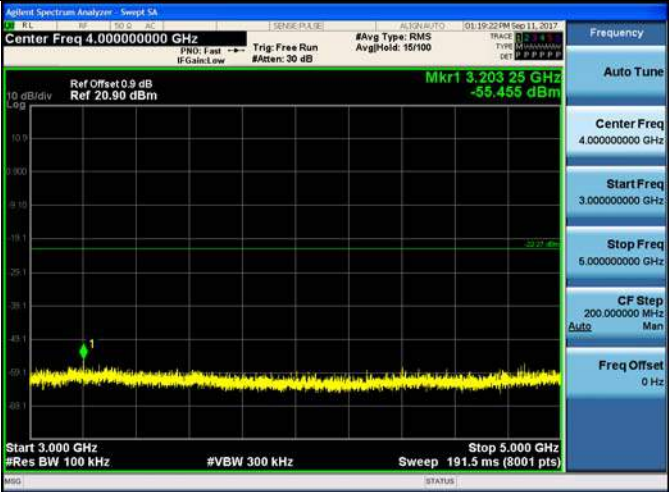
CH39 3GHz~5GHz	
CH39 5GHz~10GHz	
CH39 10GHz~15GHz	

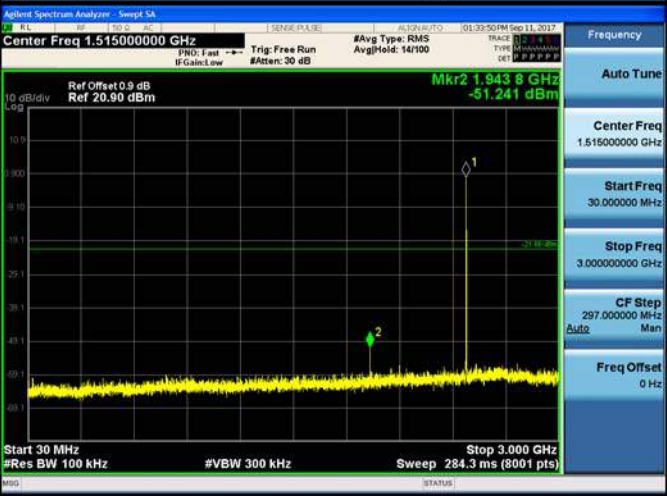
CH39 15GHz~25GHz	
CH78 30MHz~3GHz	
CH78 3GHz~5GHz	
CH78 5GHz~10GHz	



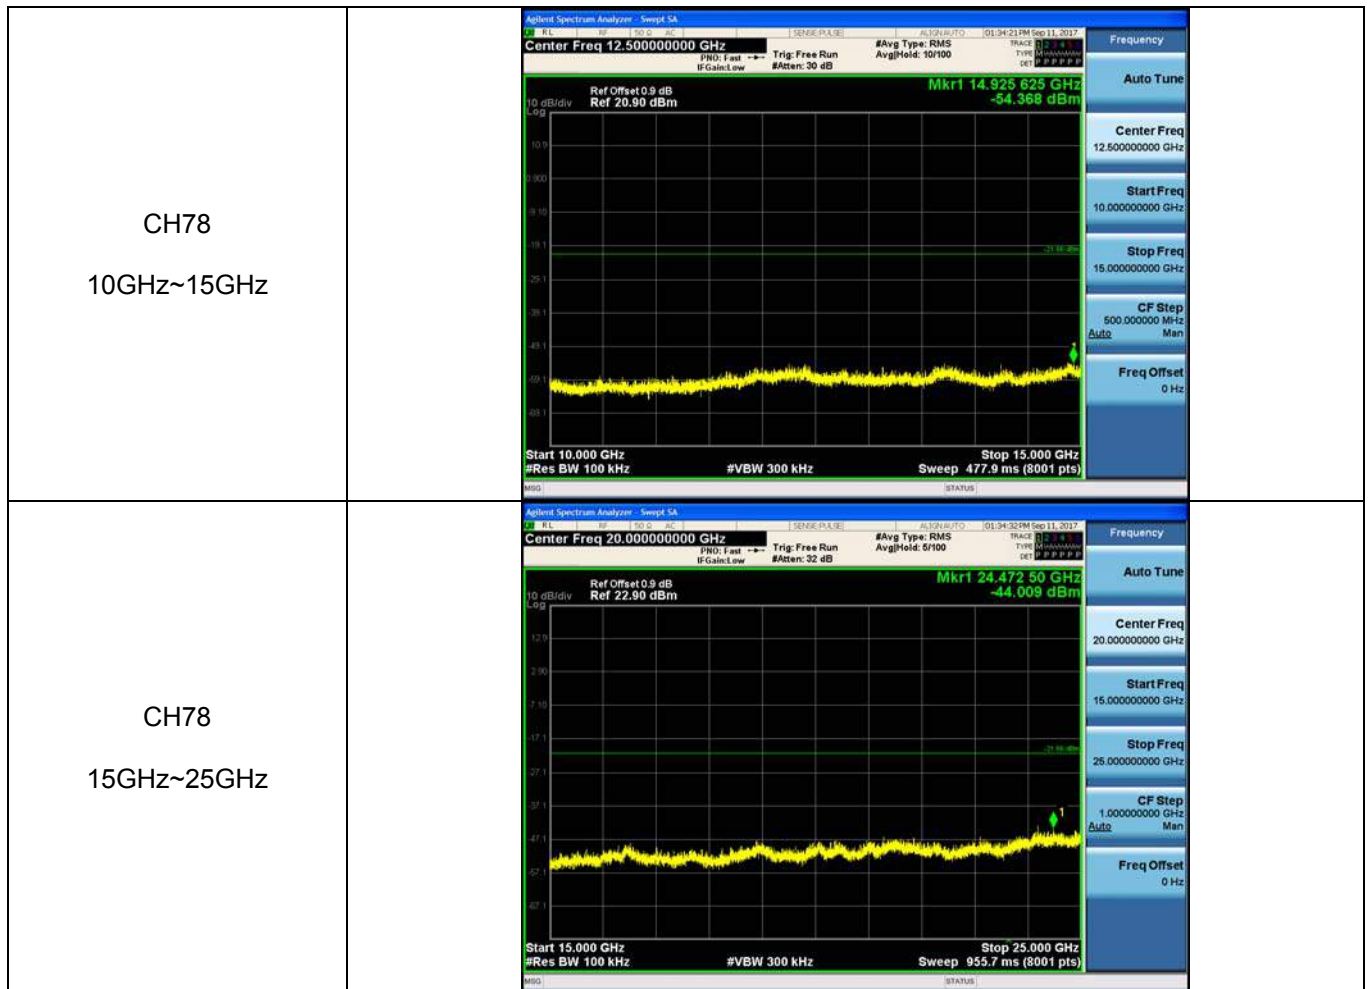


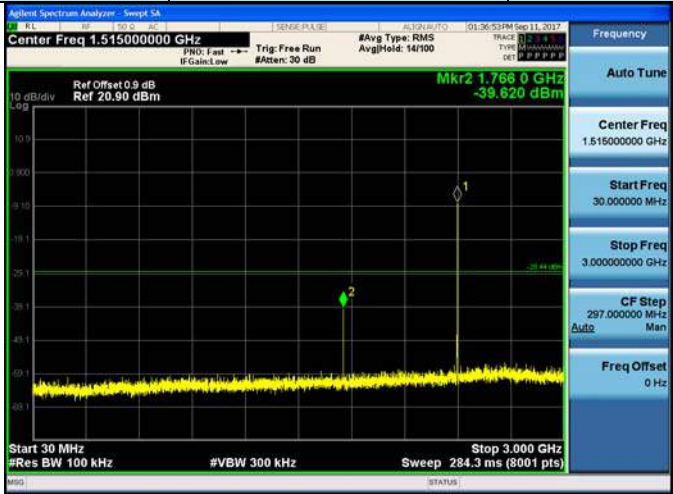
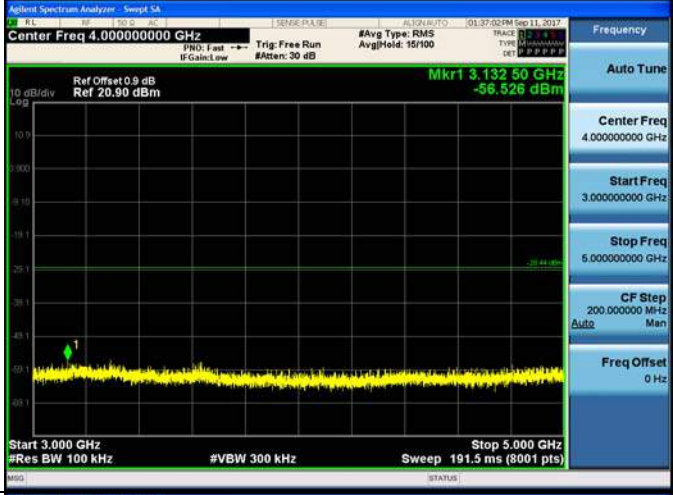
Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

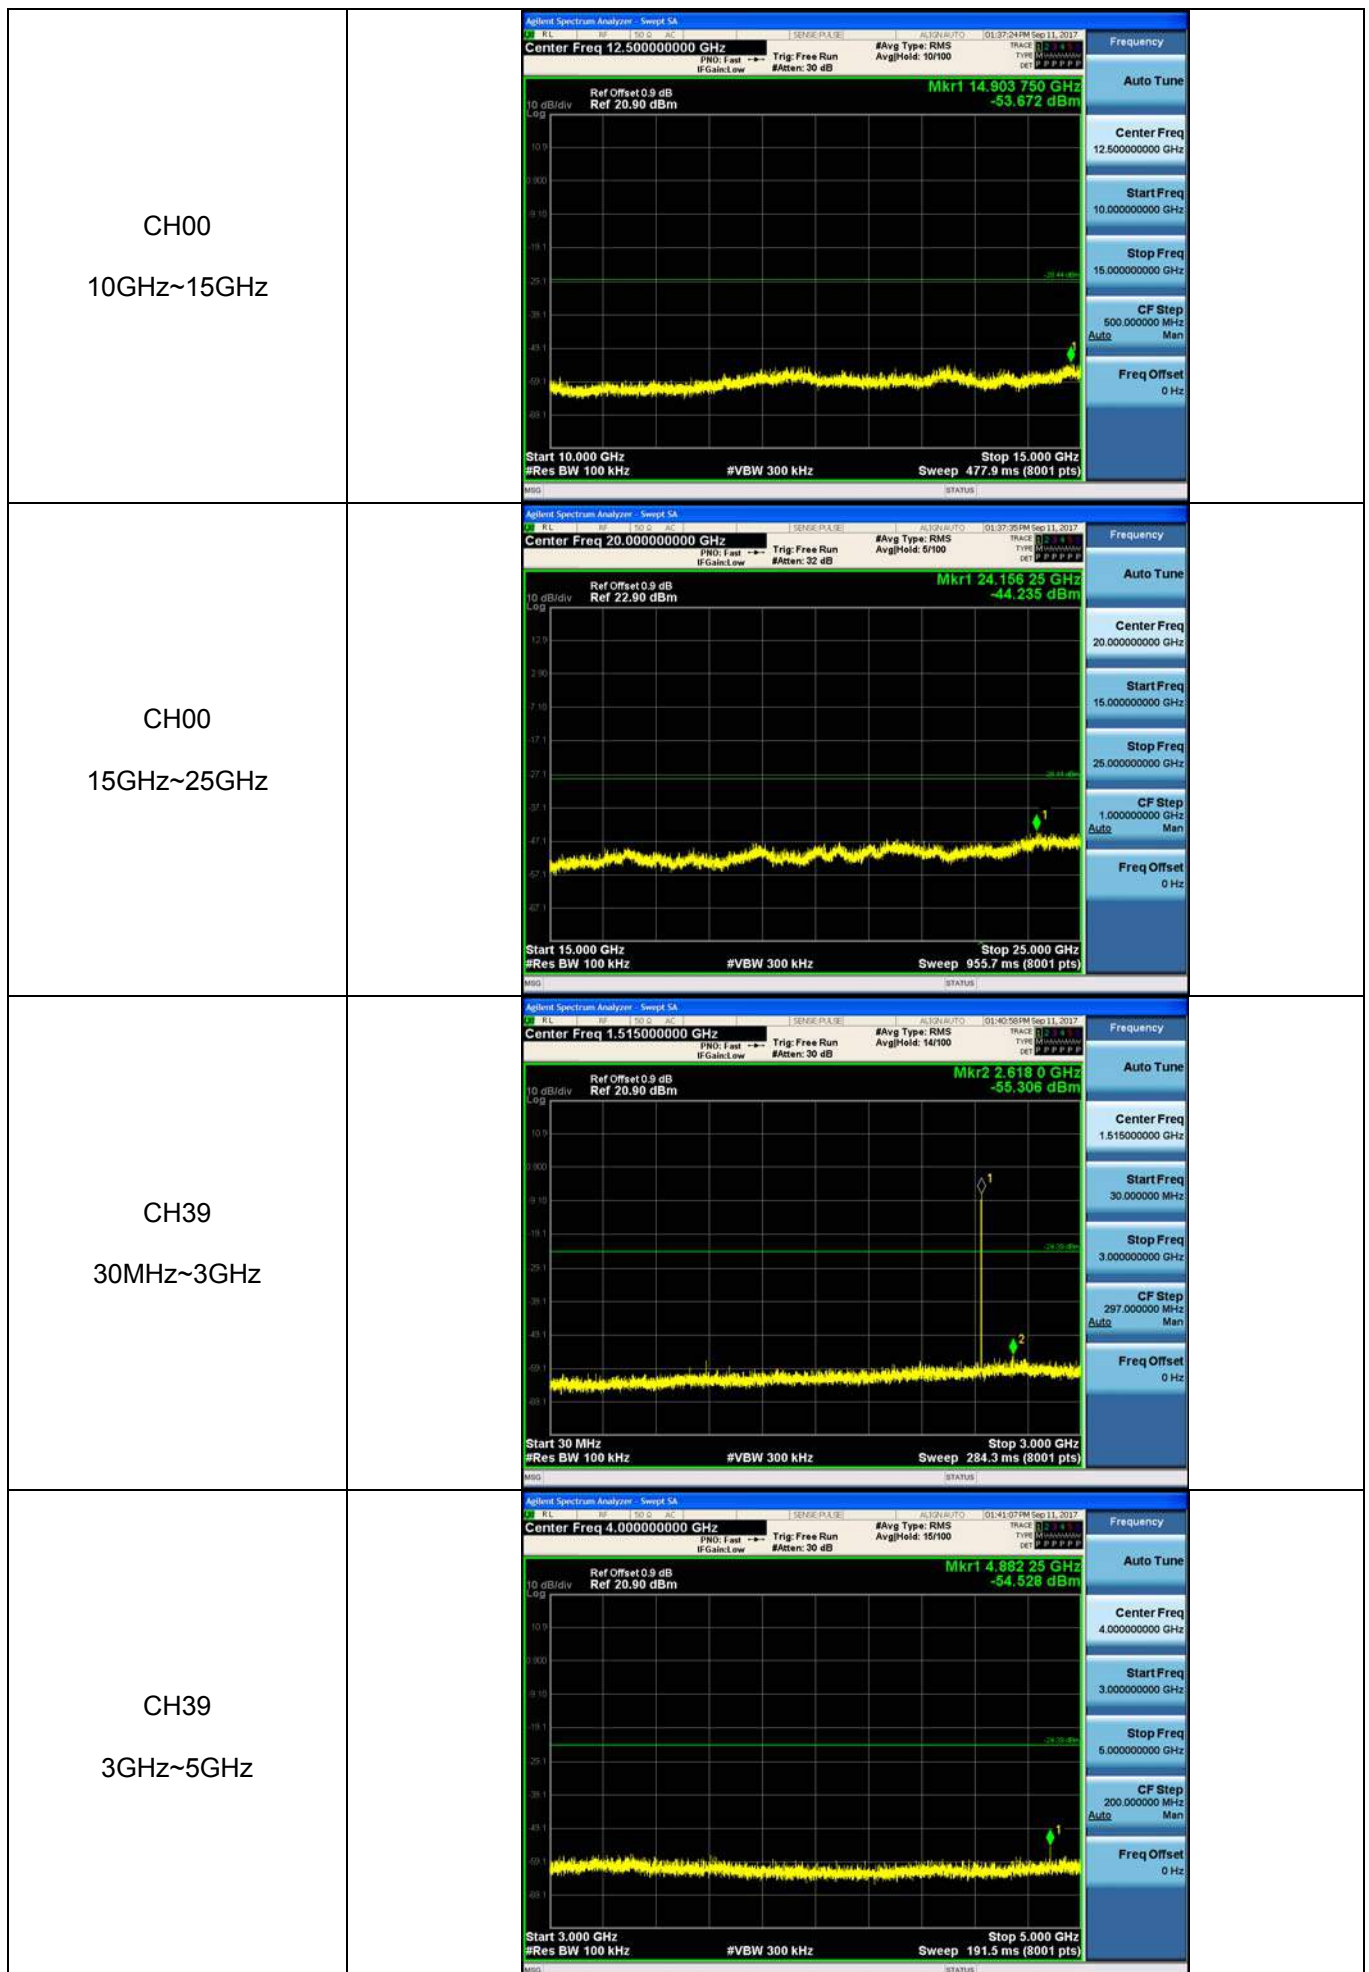


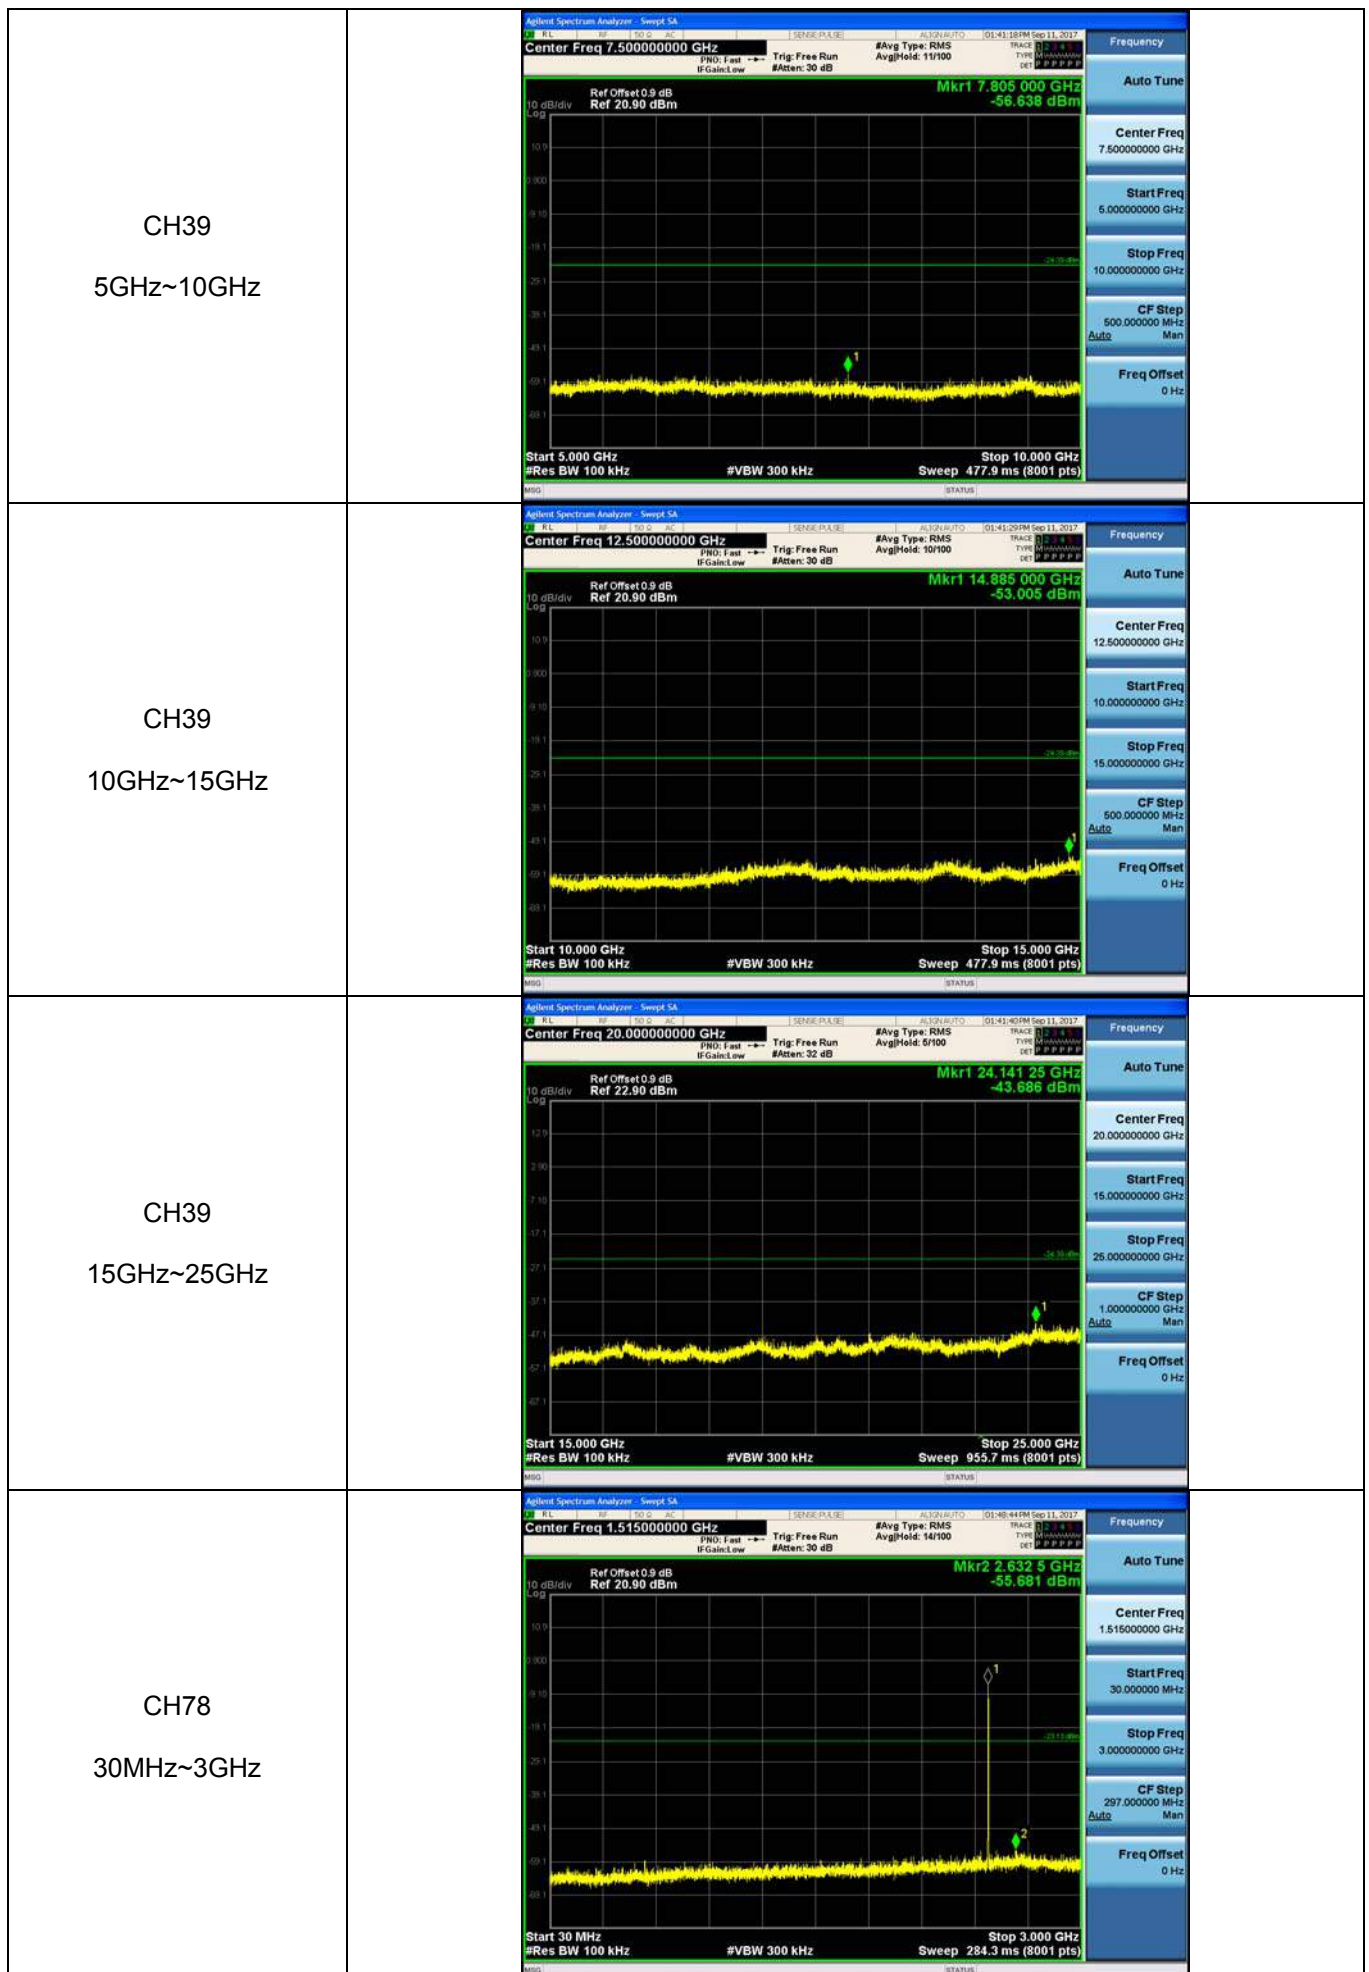


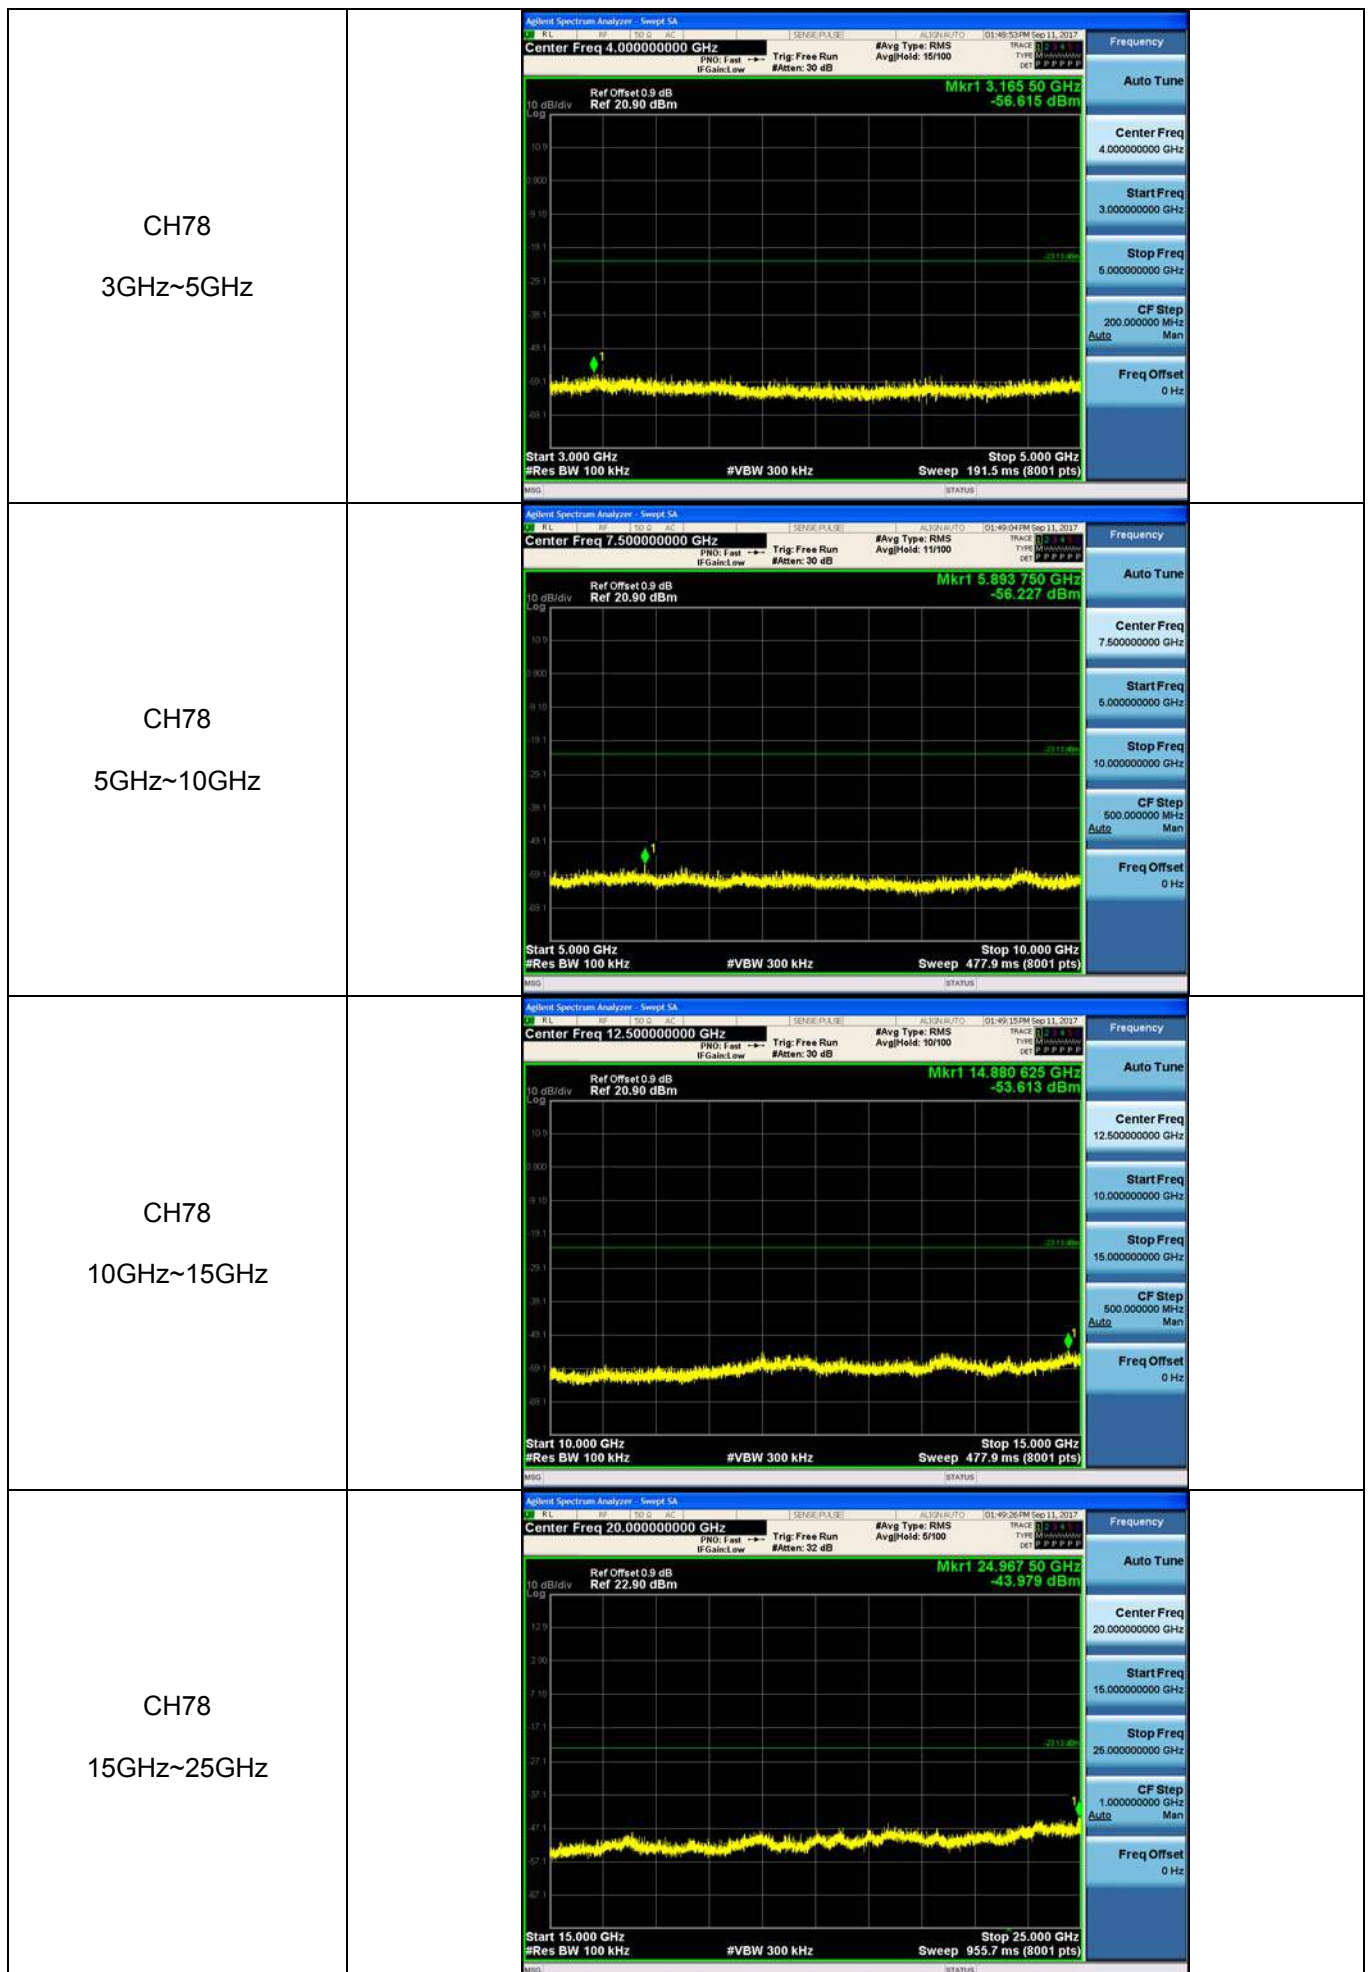

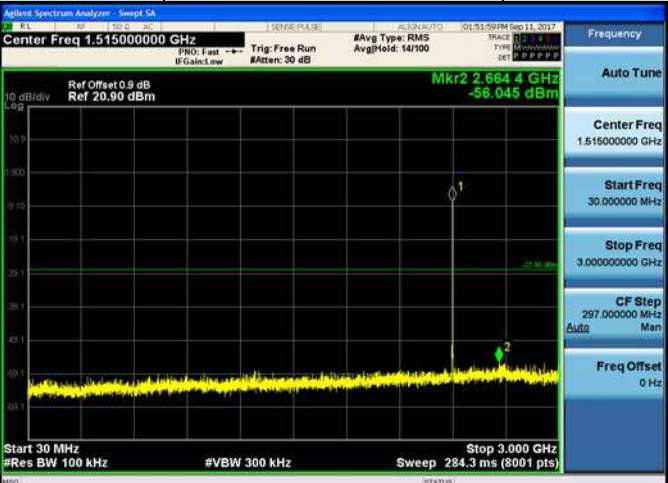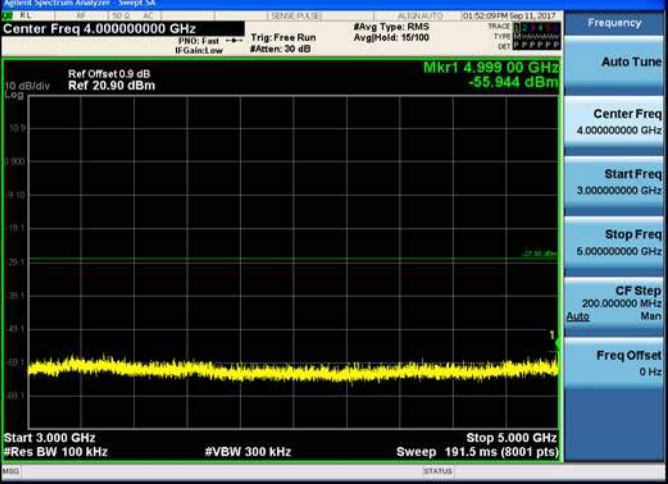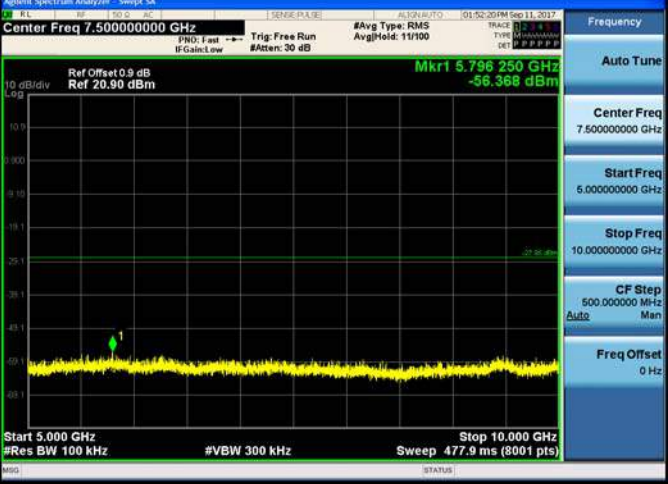Test Item:	SE	Modulation type:	8DPSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

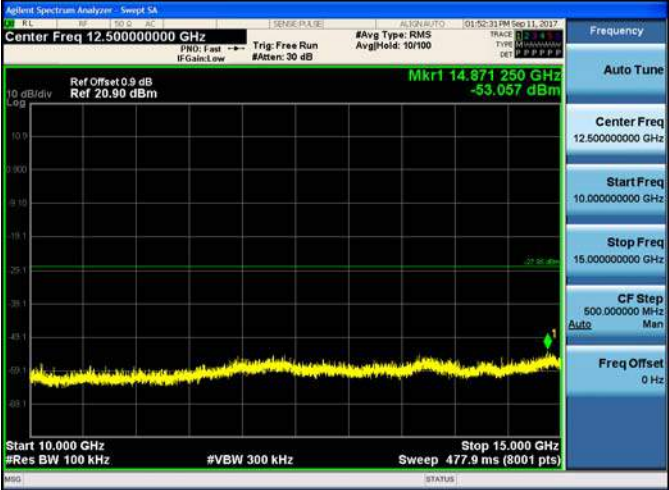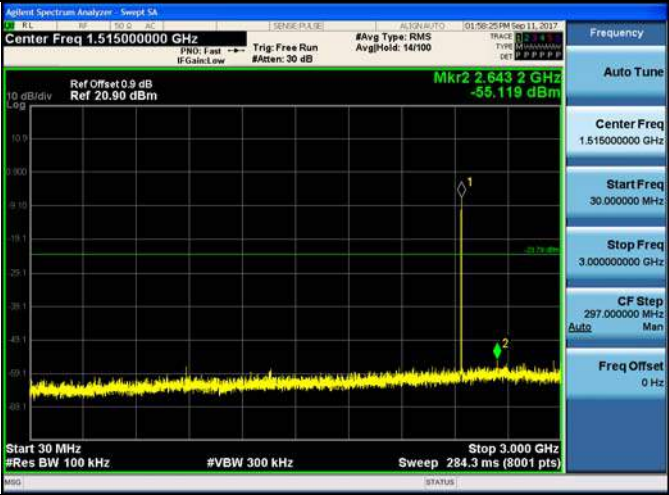CH00 10GHz~15GHz	
CH00 15GHz~25GHz	
CH39 30MHz~3GHz	
CH39 3GHz~5GHz	

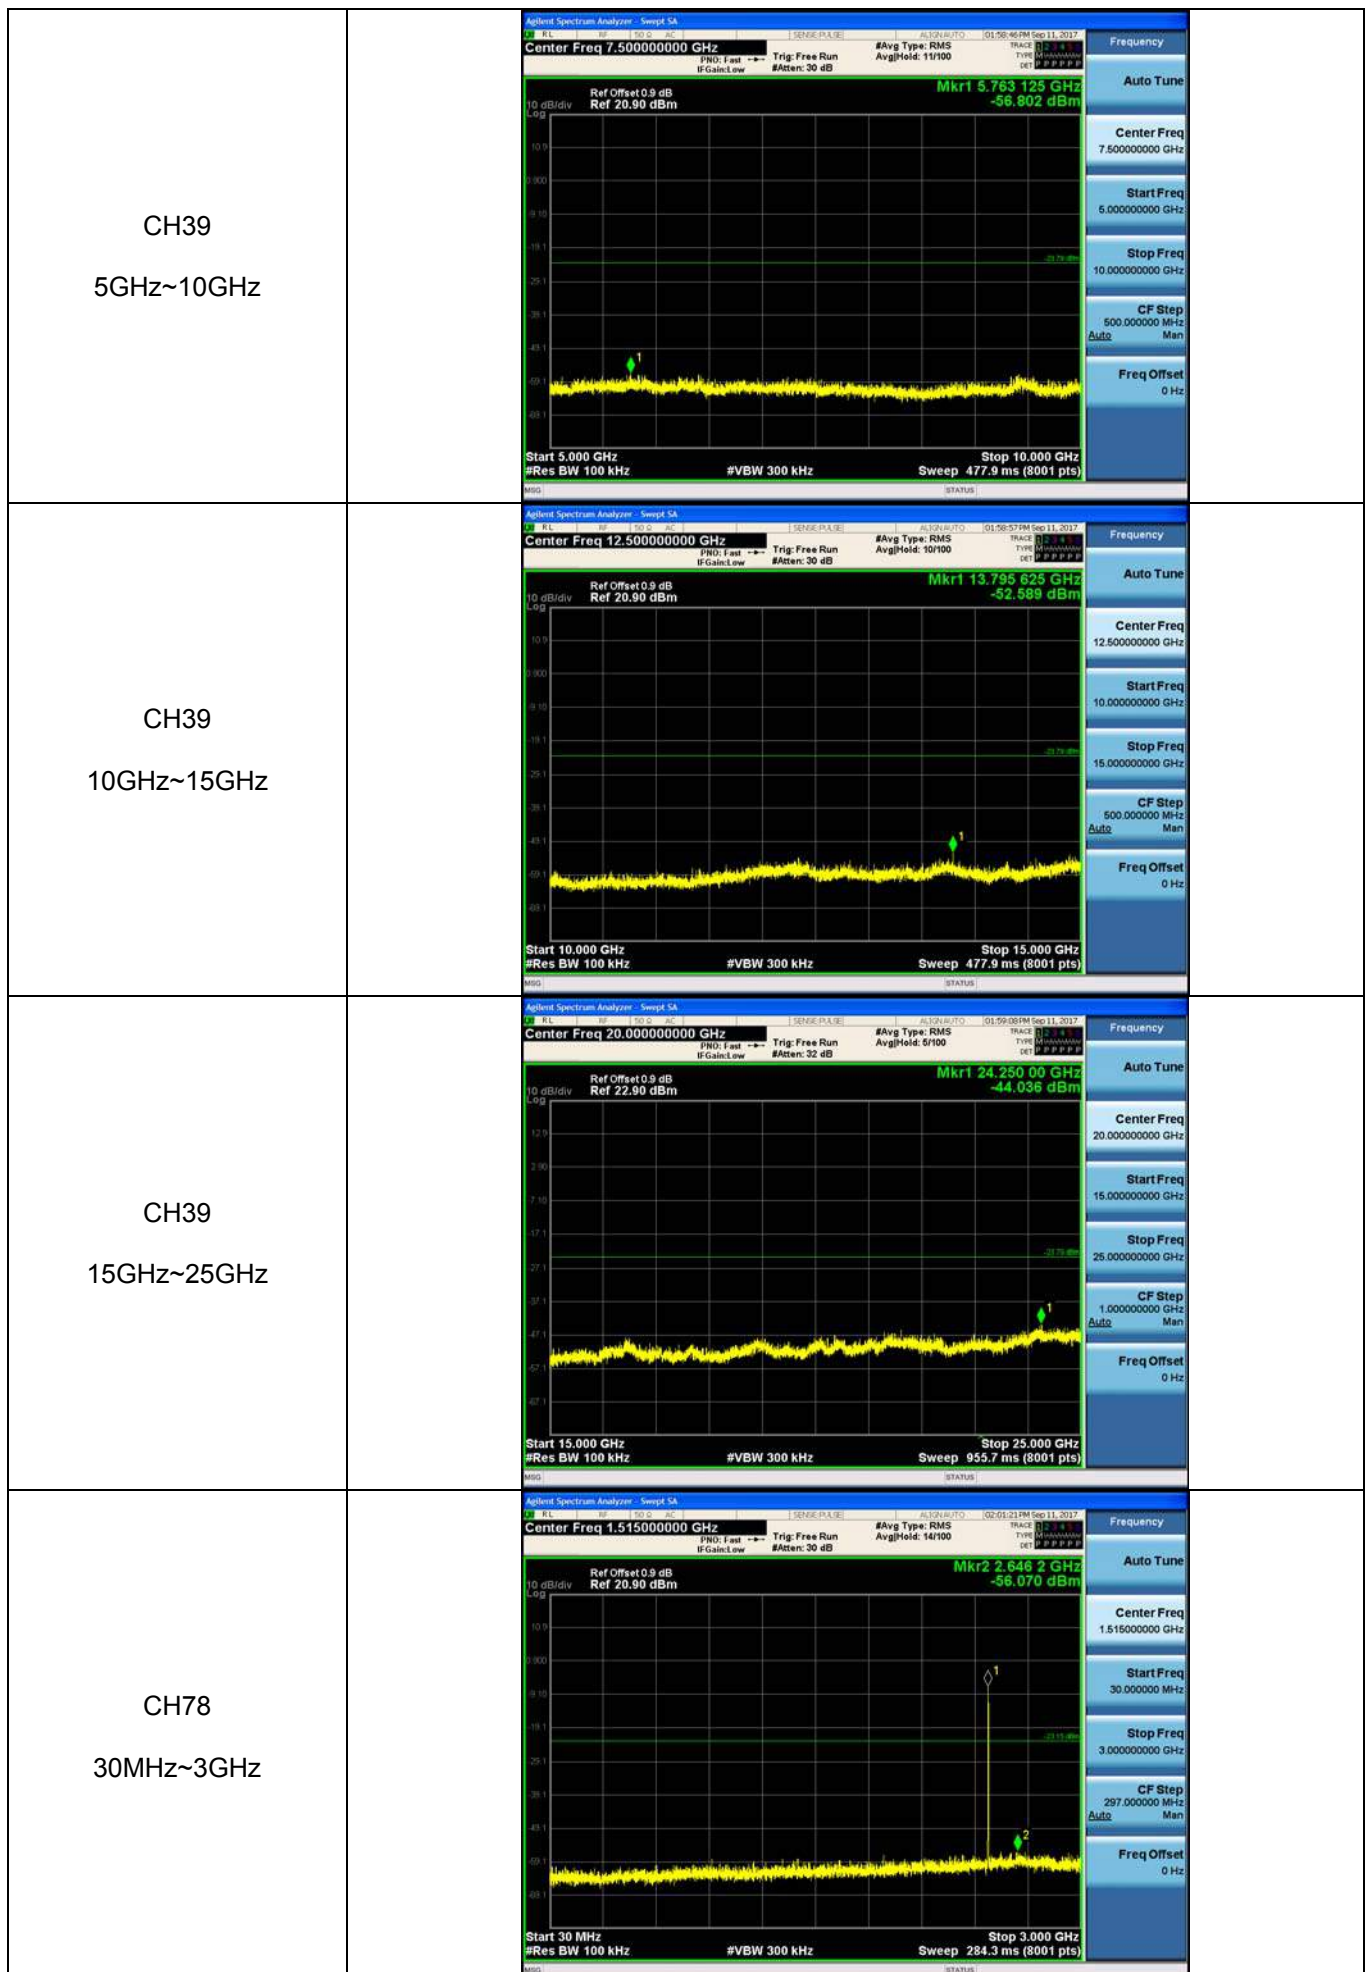

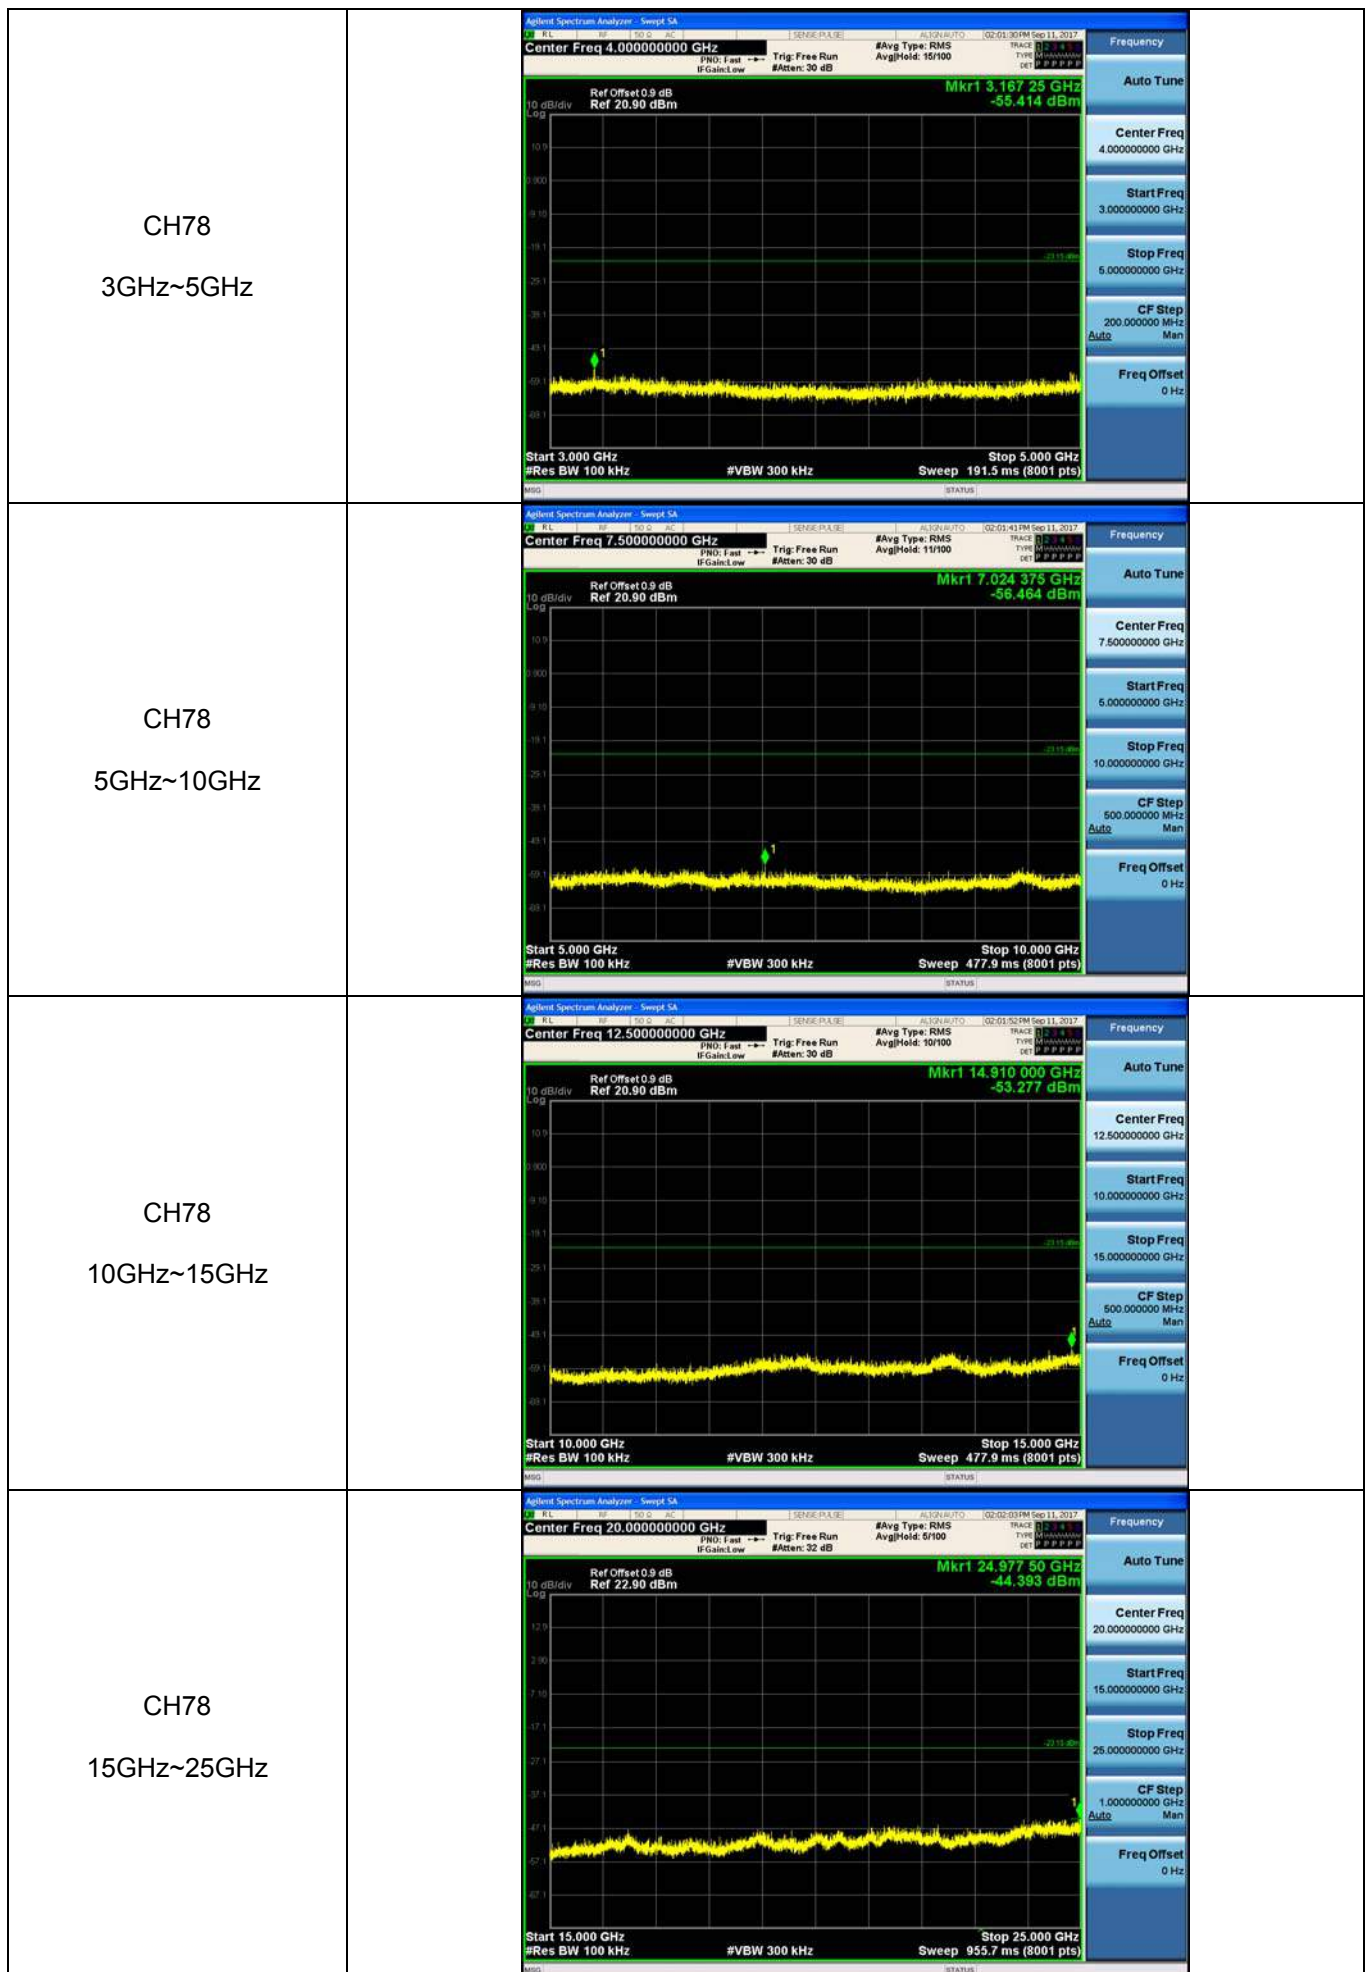

5.11. Spurious Emission (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

- Below 30 MHz

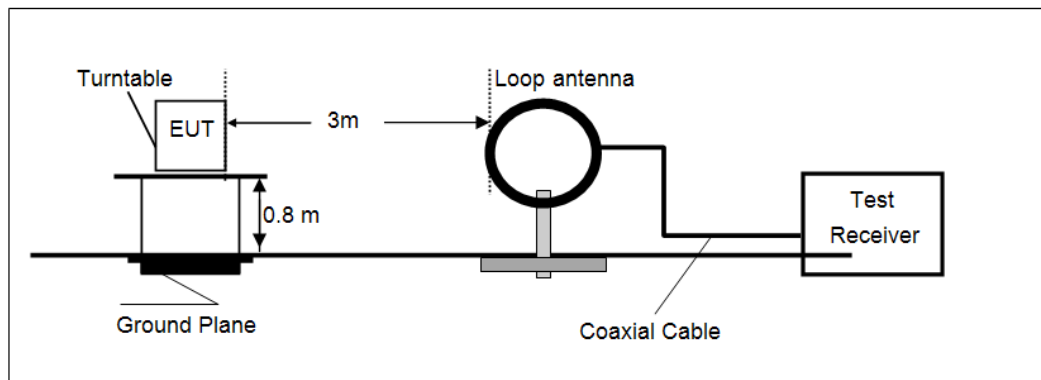

- 30 MHz ~1000 MHz

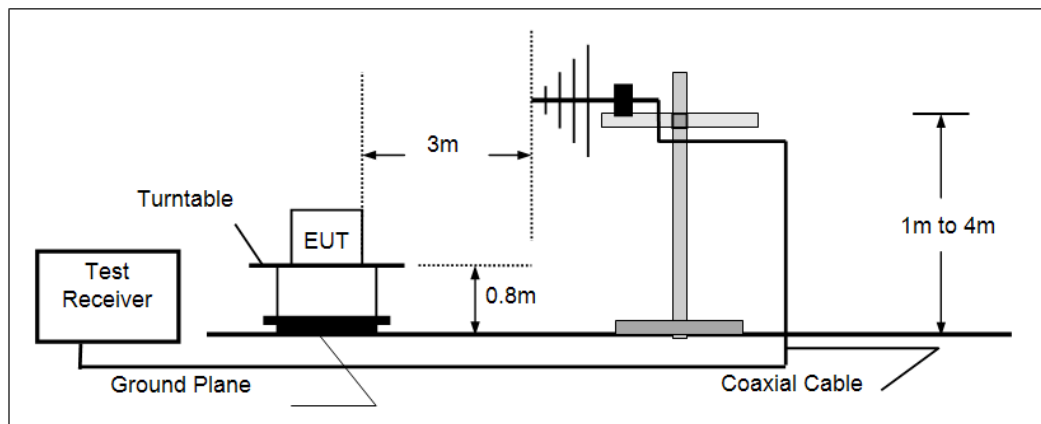


- Above 1 GHz

➤ 30 MHz ~ 1 GHz

Polarization:

Vertical

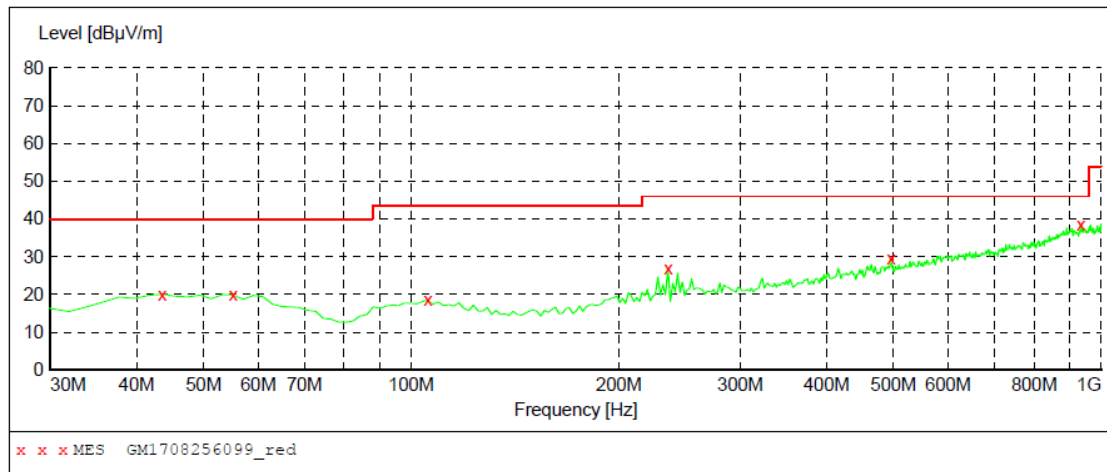
**MEASUREMENT RESULT: "GM1708256099_red"**

8/25/2017 8:54PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.580000	20.10	-9.1	40.0	19.9	QP	100.0	118.00	VERTICAL
55.220000	19.80	-9.2	40.0	20.2	QP	100.0	0.00	VERTICAL
105.660000	18.50	-10.5	43.5	25.0	QP	100.0	189.00	VERTICAL
235.640000	26.90	-9.0	46.0	19.1	QP	100.0	106.00	VERTICAL
495.600000	29.40	-1.9	46.0	16.6	QP	100.0	65.00	VERTICAL
934.040000	38.50	7.1	46.0	7.5	QP	100.0	35.00	VERTICAL

Polarization:

Horizontal

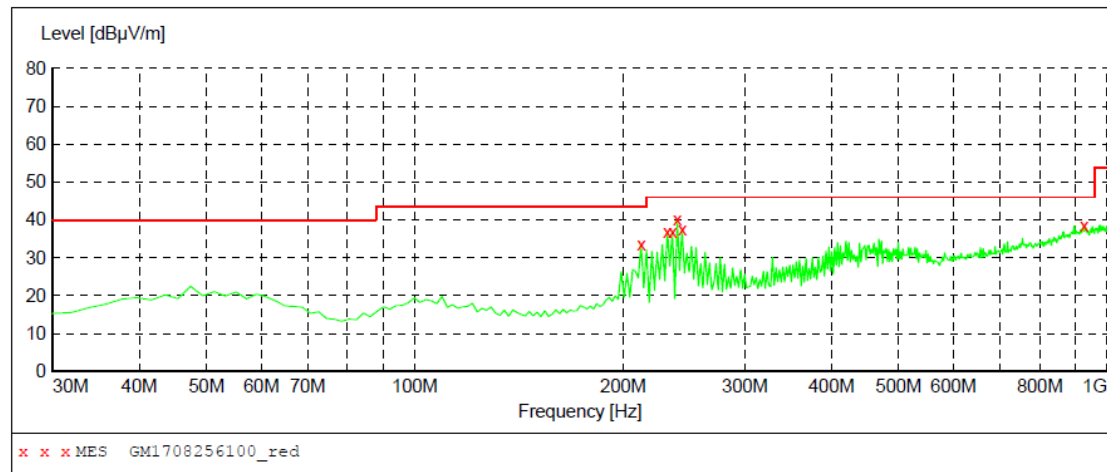**MEASUREMENT RESULT: "GM1708256100_red"**

8/25/2017 8:57PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
212.360000	33.50	-10.4	43.5	10.0	QP	100.0	0.00	HORIZONTAL
231.760000	36.90	-9.2	46.0	9.1	QP	100.0	186.00	HORIZONTAL
235.640000	37.00	-9.0	46.0	9.0	QP	100.0	46.00	HORIZONTAL
239.520000	40.00	-8.8	46.0	6.0	QP	100.0	6.00	HORIZONTAL
243.400000	37.60	-8.6	46.0	8.4	QP	100.0	0.00	HORIZONTAL
926.280000	38.50	7.1	46.0	7.5	QP	100.0	239.00	HORIZONTAL

➤ Above 1 GHz

CH00 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1597.40	45.26	24.92	5.56	36.72	39.02	74.00	-34.98	Vertical	Peak
3192.37	41.10	28.80	7.71	38.20	39.41	74.00	-34.59	Vertical	
4809.50	56.65	31.58	9.55	36.93	60.85	74.00	-13.15	Vertical	
7209.02	38.22	36.21	11.87	35.07	51.23	74.00	-22.77	Vertical	
4809.50	36.10	31.58	9.55	36.93	40.30	54.00	-13.70	Vertical	Average
7209.02	19.91	36.21	11.87	35.07	32.92	54.00	-21.08	Vertical	
1593.34	38.12	24.96	5.55	36.71	31.92	74.00	-42.08	Horizontal	Peak
2995.54	41.72	28.60	7.48	38.23	39.57	74.00	-34.43	Horizontal	
4809.50	42.93	31.58	9.55	36.93	47.13	74.00	-26.87	Horizontal	
7209.02	34.90	36.21	11.87	35.07	47.91	74.00	-26.09	Horizontal	

CH39 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1860.99	40.31	25.34	6.05	37.19	34.51	74.00	-39.49	Vertical	Peak
3489.84	37.12	28.92	8.10	38.42	35.72	74.00	-38.28	Vertical	
4883.52	59.31	31.43	9.59	36.73	63.60	74.00	-10.40	Vertical	
7319.96	45.41	36.30	11.99	34.92	58.78	74.00	-15.22	Vertical	
4883.52	40.27	31.43	9.59	36.73	44.56	54.00	-9.44	Vertical	Average
7319.96	19.65	36.30	11.99	34.92	33.02	54.00	-20.98	Vertical	
1593.34	39.01	24.96	5.55	36.71	32.81	74.00	-41.19	Horizontal	Peak
2987.92	40.01	28.59	7.47	38.24	37.83	74.00	-36.17	Horizontal	
4883.52	43.17	31.43	9.59	36.73	47.46	74.00	-26.54	Horizontal	
7319.96	38.68	36.30	11.99	34.92	52.05	74.00	-21.95	Horizontal	
7319.96	23.55	36.30	11.99	34.92	36.92	54.00	-17.08	Horizontal	Average

CH78 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1593.34	39.27	24.96	5.55	36.71	33.07	74.00	-40.93	Vertical	Peak
4256.33	39.92	30.11	8.99	37.62	41.40	74.00	-32.60	Vertical	
4958.68	65.01	31.46	9.64	36.52	69.59	74.00	-4.41	Vertical	
7451.57	49.36	36.20	12.24	34.86	62.94	74.00	-11.06	Vertical	
4958.68	47.16	31.46	9.64	36.52	51.74	54.00	-2.26	Vertical	Average
7451.57	32.54	36.20	12.24	34.86	46.12	54.00	-7.88	Vertical	
1860.99	45.18	25.34	6.05	37.19	39.38	74.00	-34.62	Horizontal	Peak
2987.92	42.15	28.59	7.47	38.24	39.97	74.00	-34.03	Horizontal	
4958.68	57.06	31.46	9.64	36.52	61.64	74.00	-12.36	Horizontal	
7451.57	38.94	36.20	12.24	34.86	52.52	74.00	-21.48	Horizontal	
4958.68	33.01	31.46	9.64	36.52	37.59	54.00	-16.41	Horizontal	Average


6. Test Setup Photos of the EUT

Conducted Emission (AC Mains)



Radiated Emission



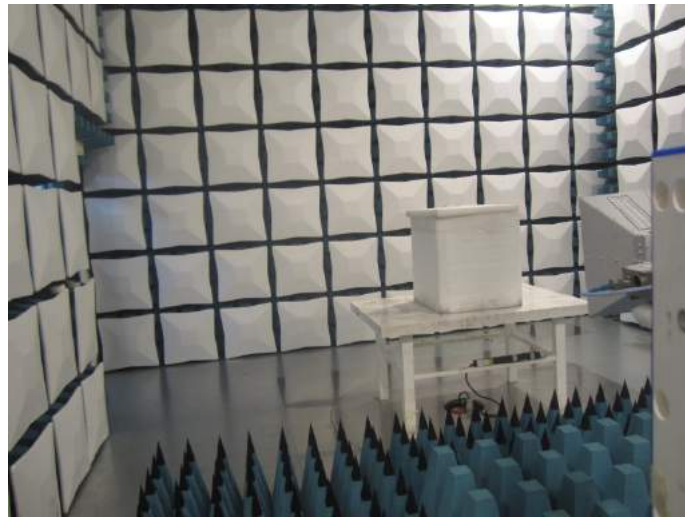




7. External and Internal Photos of the EUT



External Photos of the EUT





Internal Photos of the EUT

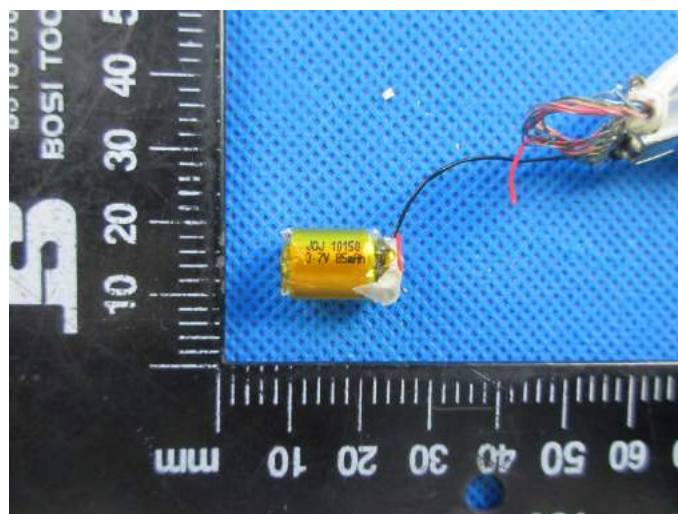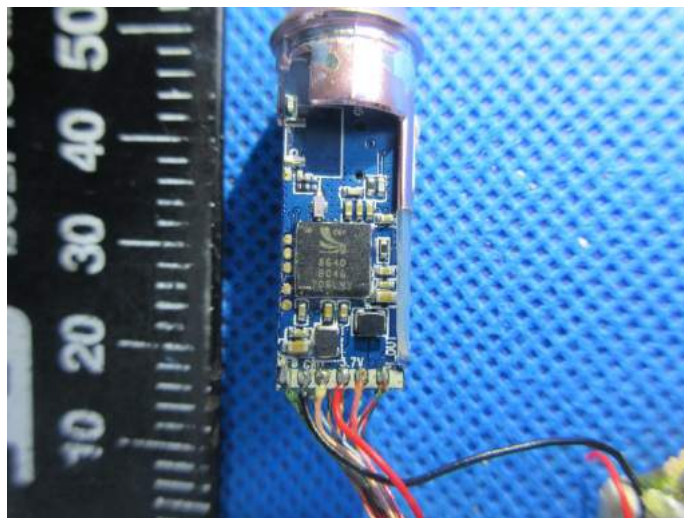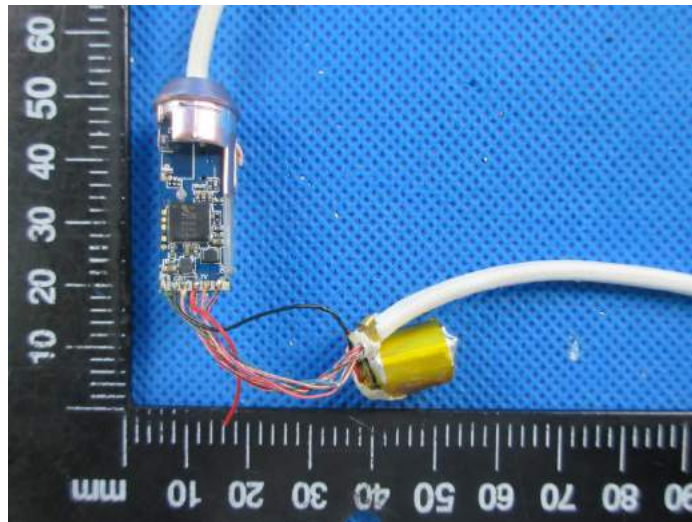

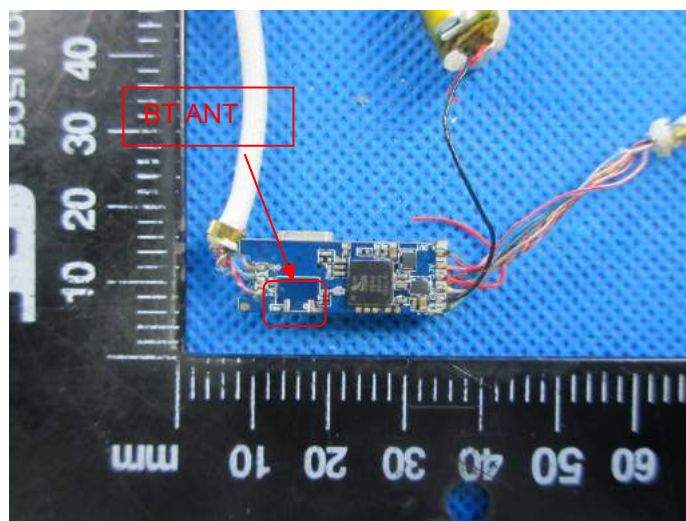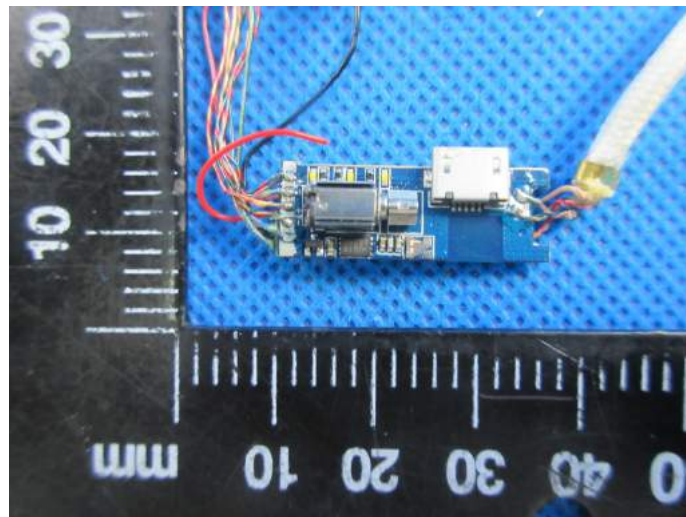

-----End of Report-----