
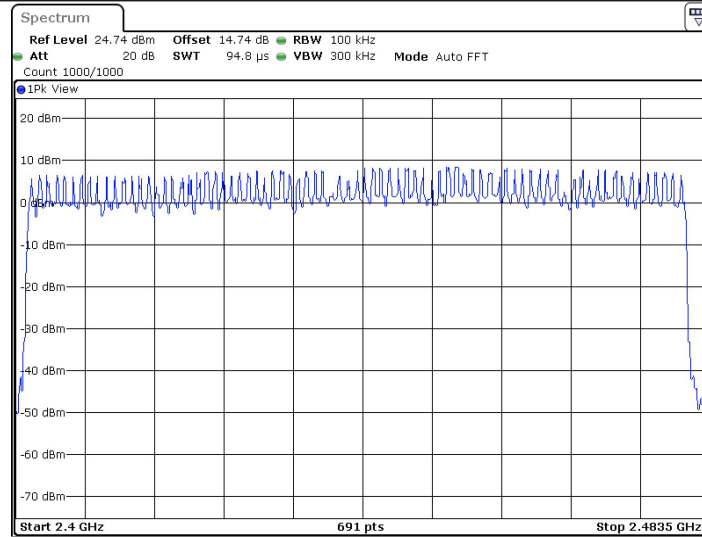




Date: 19.MAY.2026 18:08:18

5.7 Dwell Time


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 <i>Remark: Offset=Cable loss+ attenuation factor.</i>
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass


TestMode	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Hop	0.405	320	0.13	≤0.4	PASS
DH3	Hop	1.653	190	0.314	≤0.4	PASS
DH5	Hop	2.893	70	0.203	≤0.4	PASS
2DH1	Hop	0.414	320	0.132	≤0.4	PASS
2DH3	Hop	1.658	160	0.265	≤0.4	PASS
2DH5	Hop	2.899	110	0.319	≤0.4	PASS
3DH1	Hop	0.414	330	0.137	≤0.4	PASS
3DH3	Hop	1.656	140	0.232	≤0.4	PASS
3DH5	Hop	2.900	110	0.319	≤0.4	PASS

Remark:


The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test plot as follows:

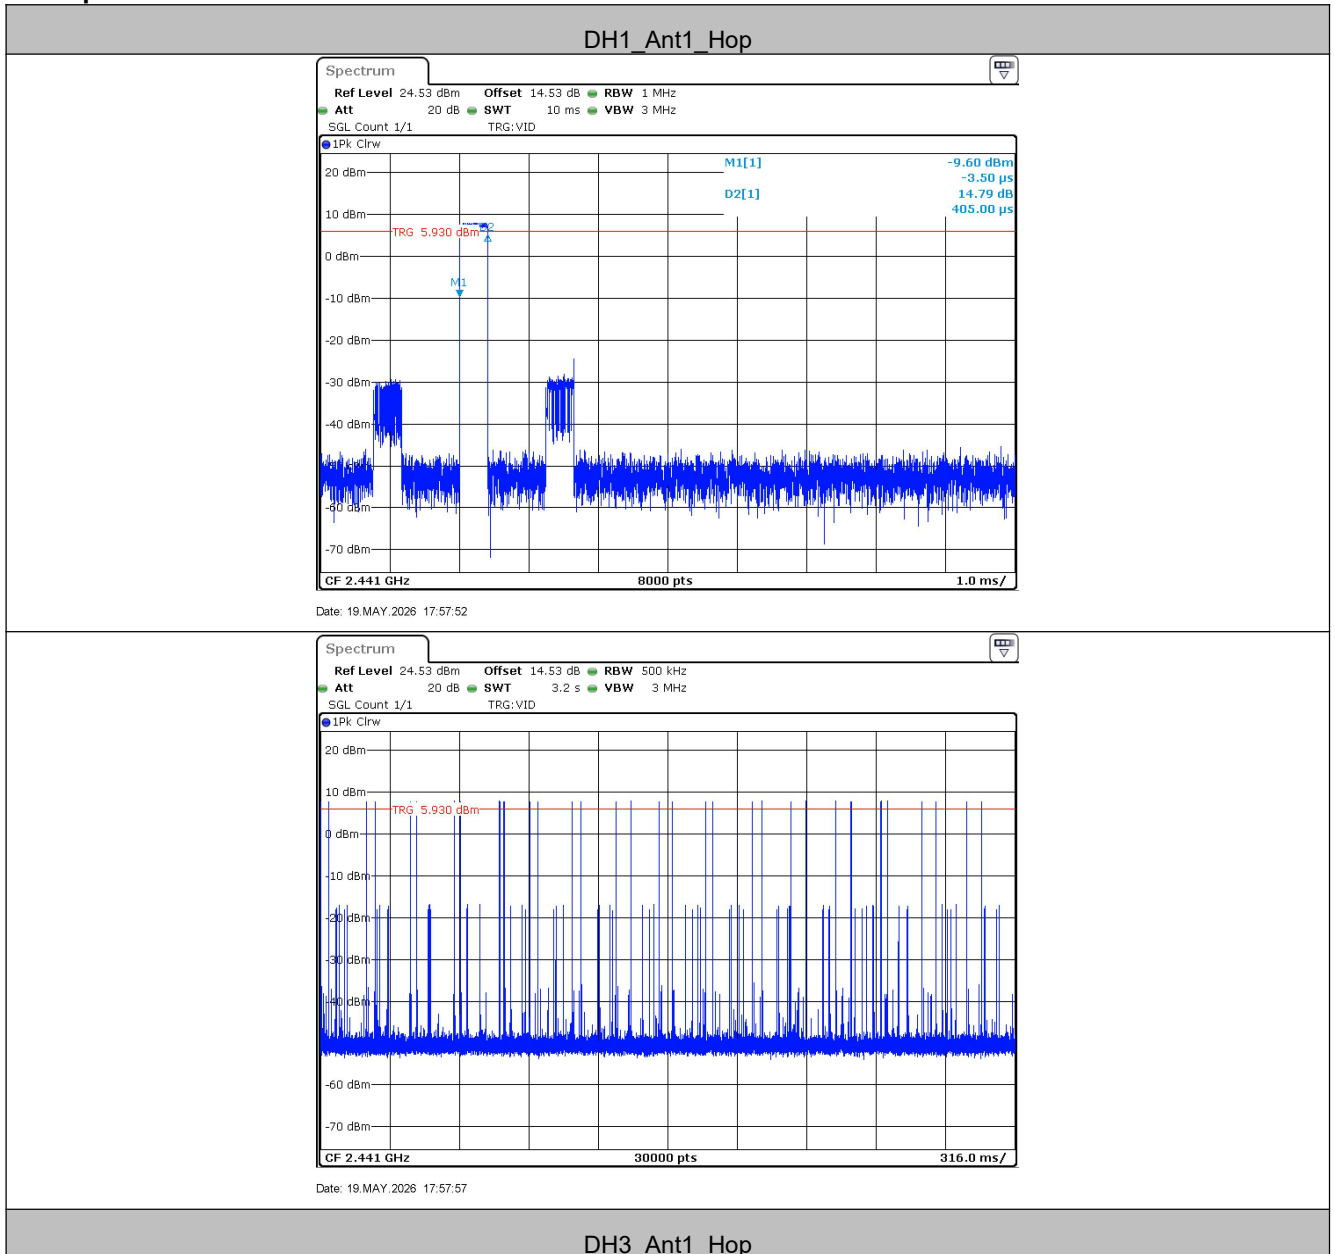

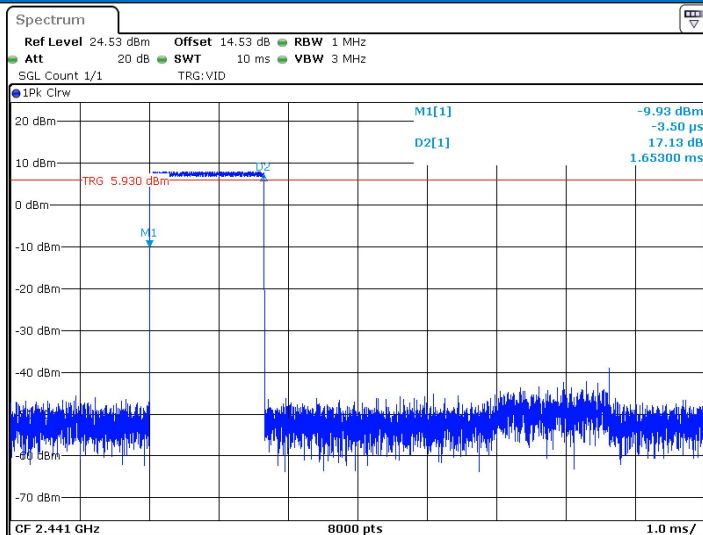


Date: 19.MAY.2026 17:58:21

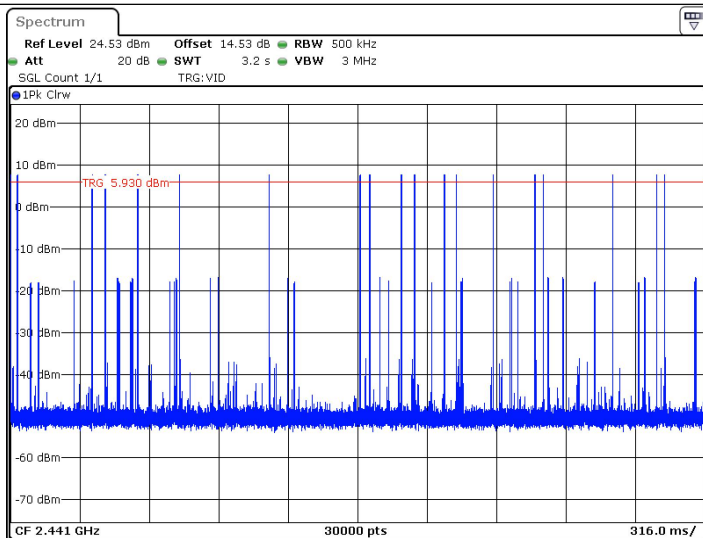


Date: 19.MAY.2026 17:58:27



DH5_Ant1_Hop

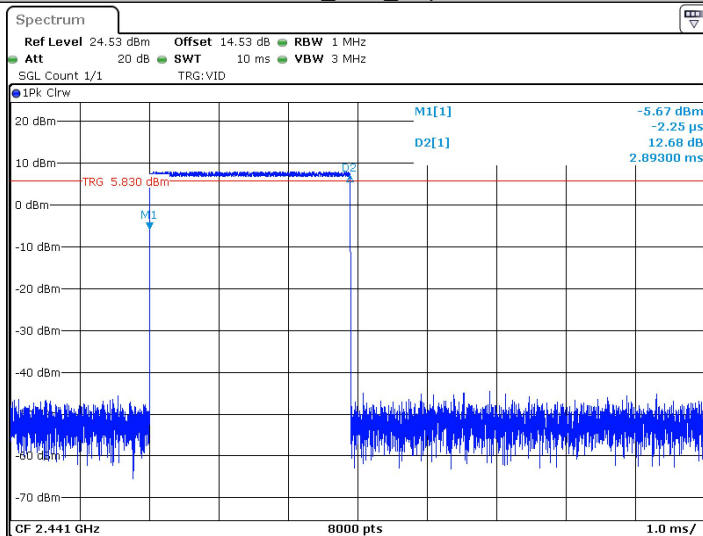


Date: 19.MAY.2026 17:57:21

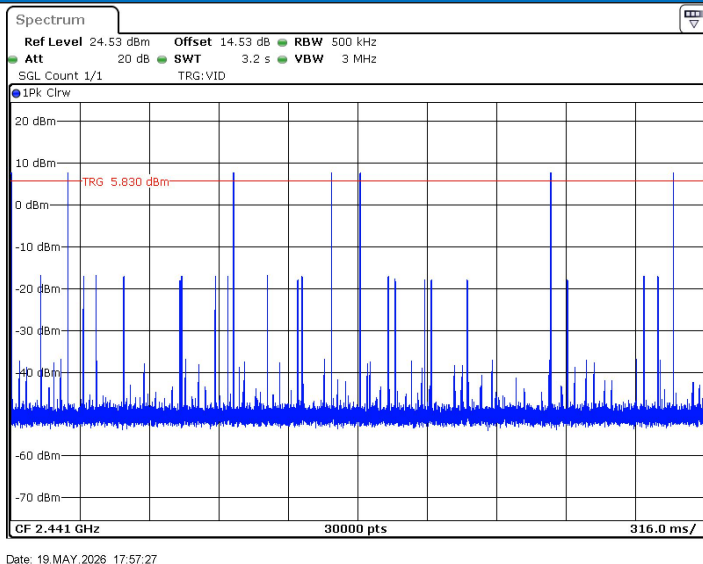


2DH1_Ant1_Hop

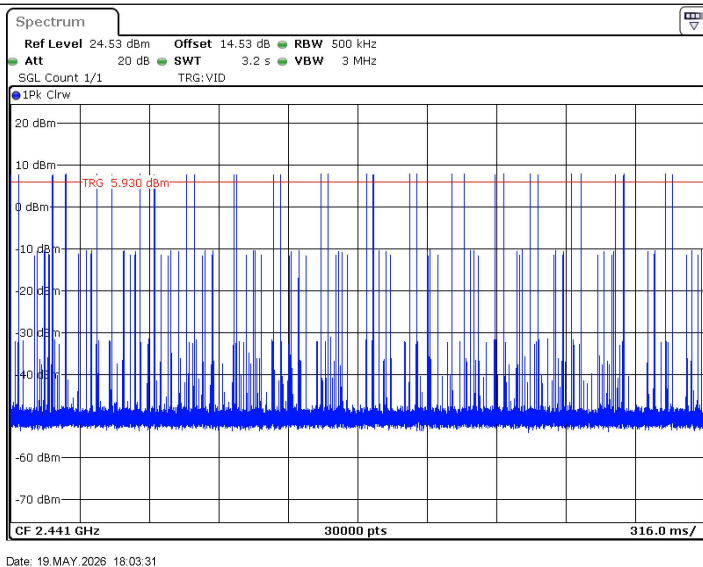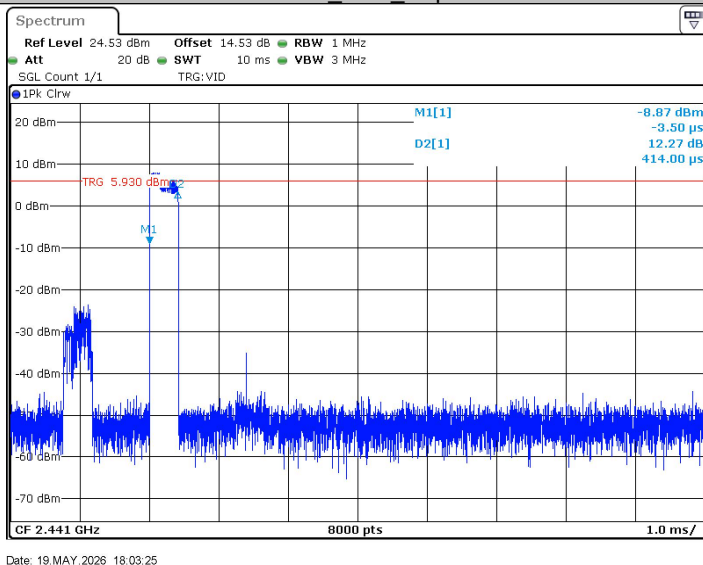

2DH3_Ant1_Hop

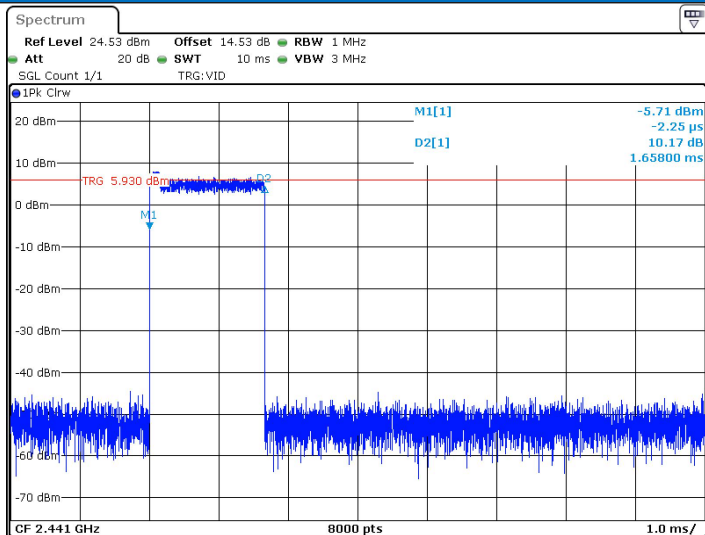


Date: 19.MAY.2026 18:04:19

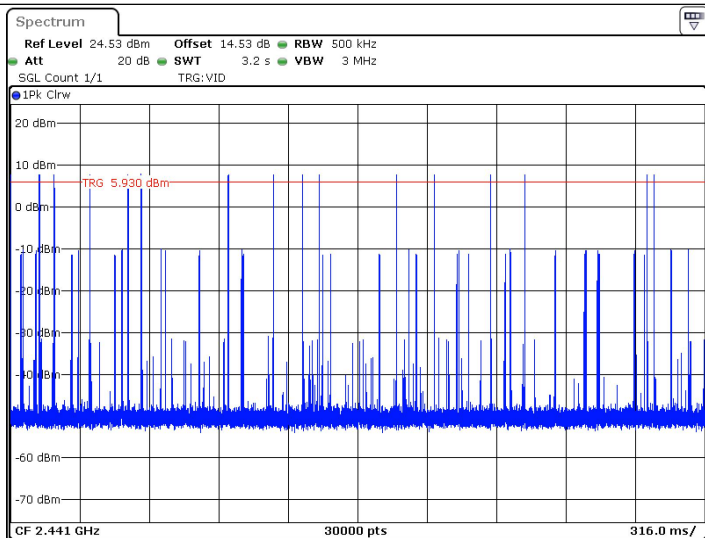


Date: 19.MAY.2026 18:04:25



2DH5_Ant1_Hop

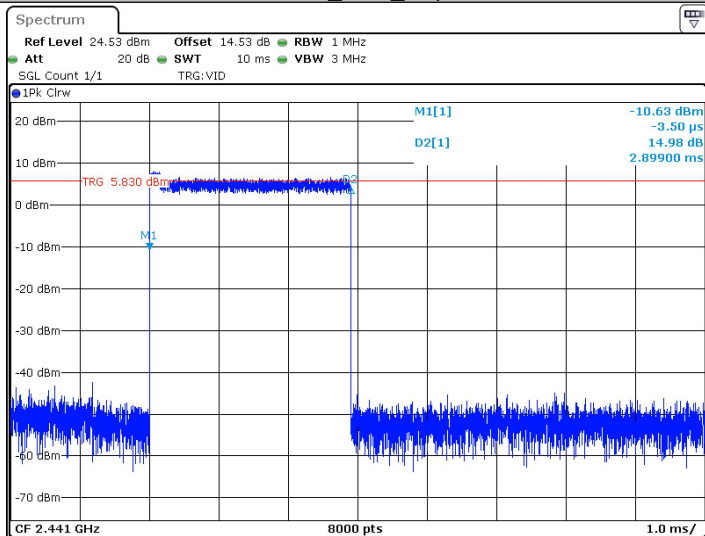


Date: 19.MAY.2026 18:02:50

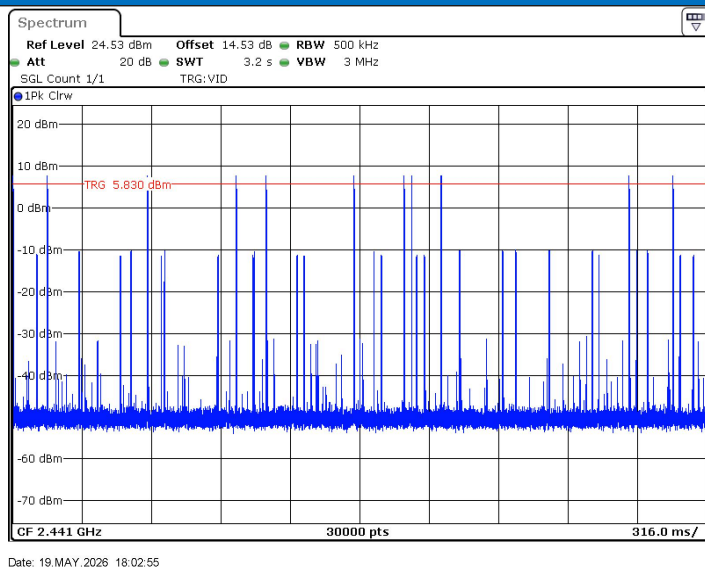


3DH1_Ant1_Hop

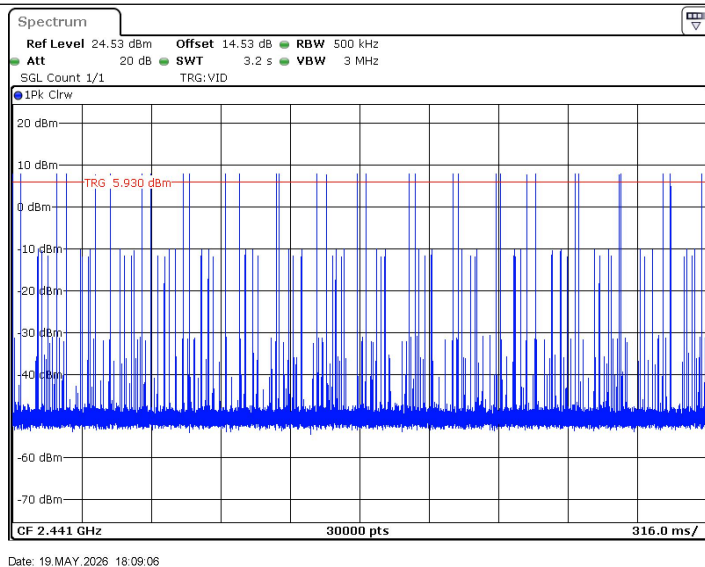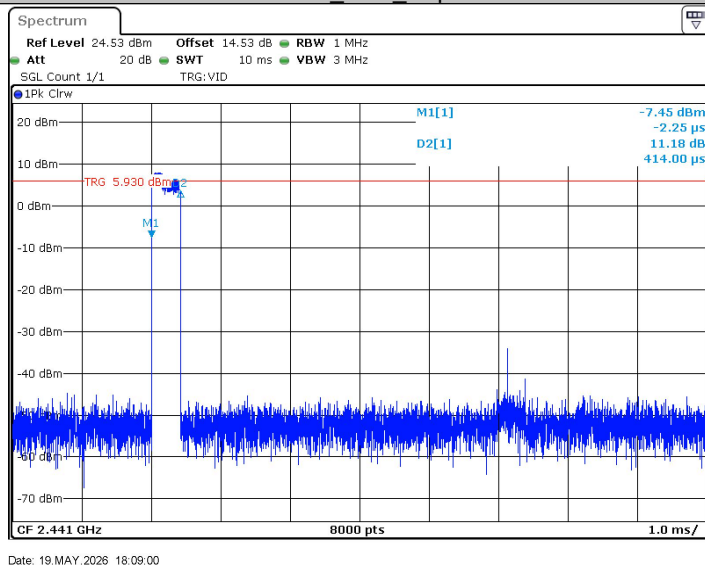

3DH3_Ant1_Hop

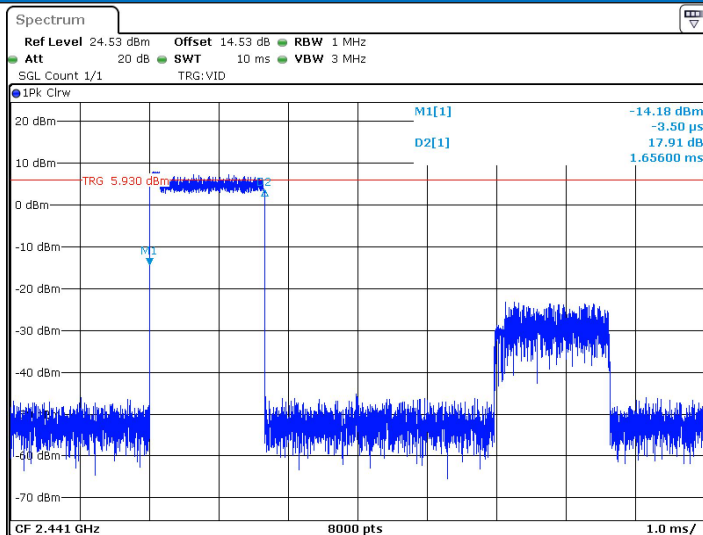


Date: 19.MAY.2026 18:09:55

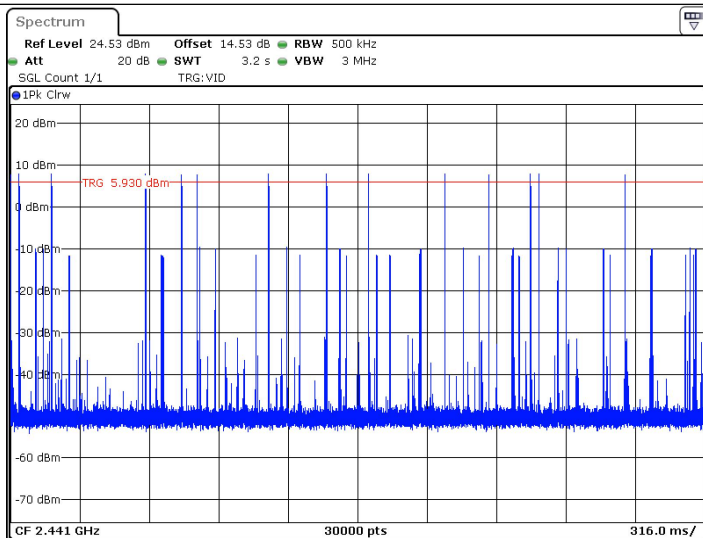


Date: 19.MAY.2026 18:10:00

3DH5_Ant1_Hop

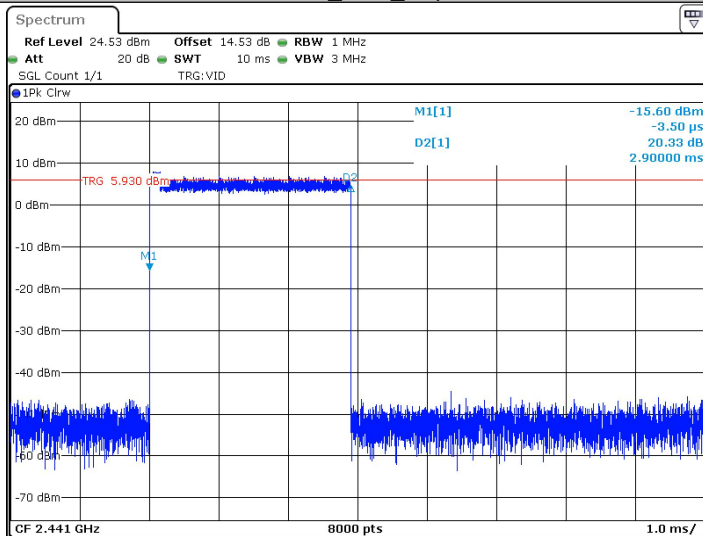

Date: 19.MAY.2026 18:11:40

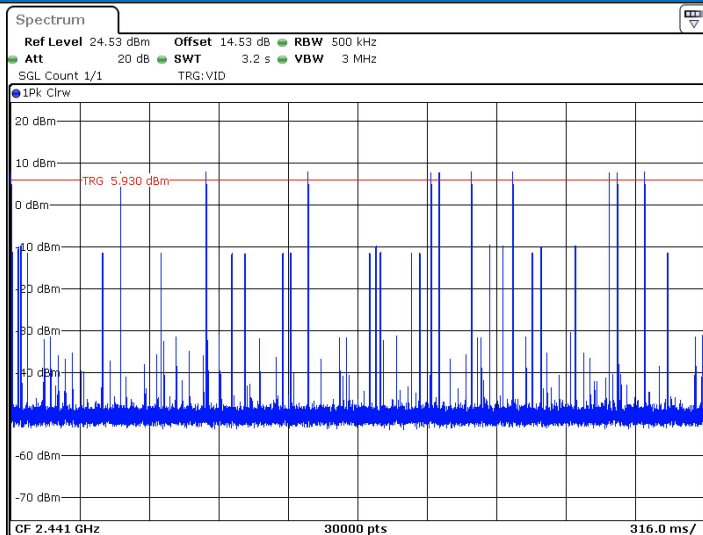

Date: 19.MAY.2026 18:11:45