

Meas.1 Front of face Plane with Front Side 10mm on High Channel in GPRS850 2Slots mode with ANT1

Date: 2026.04.24

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 40.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch251/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0377 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.573 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.017 W/kg

Ratio of SAR at M2 to SAR at M1 = 58.9%

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Maximum value of SAR (measured) = 0.0376 W/kg

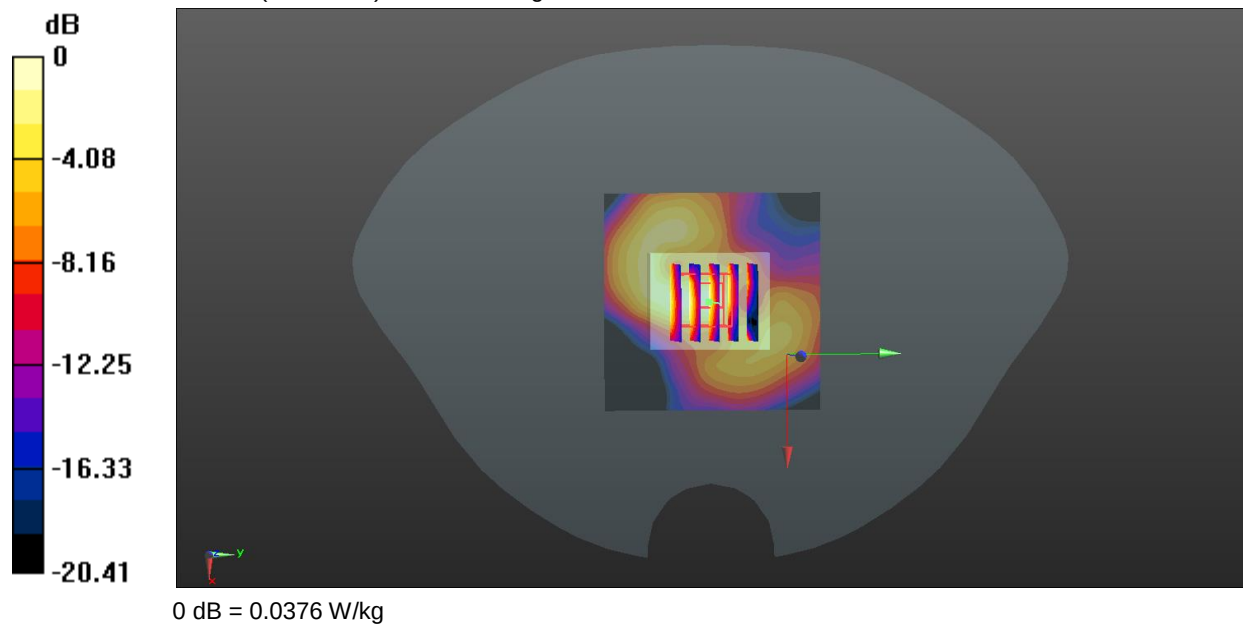

Meas.2 Limbs Plane with Back Side 0mm on High Channel in GPRS850 2Slots mode with ANT1

Date: 2026.04.24

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch128/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.109 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.120 W/kg

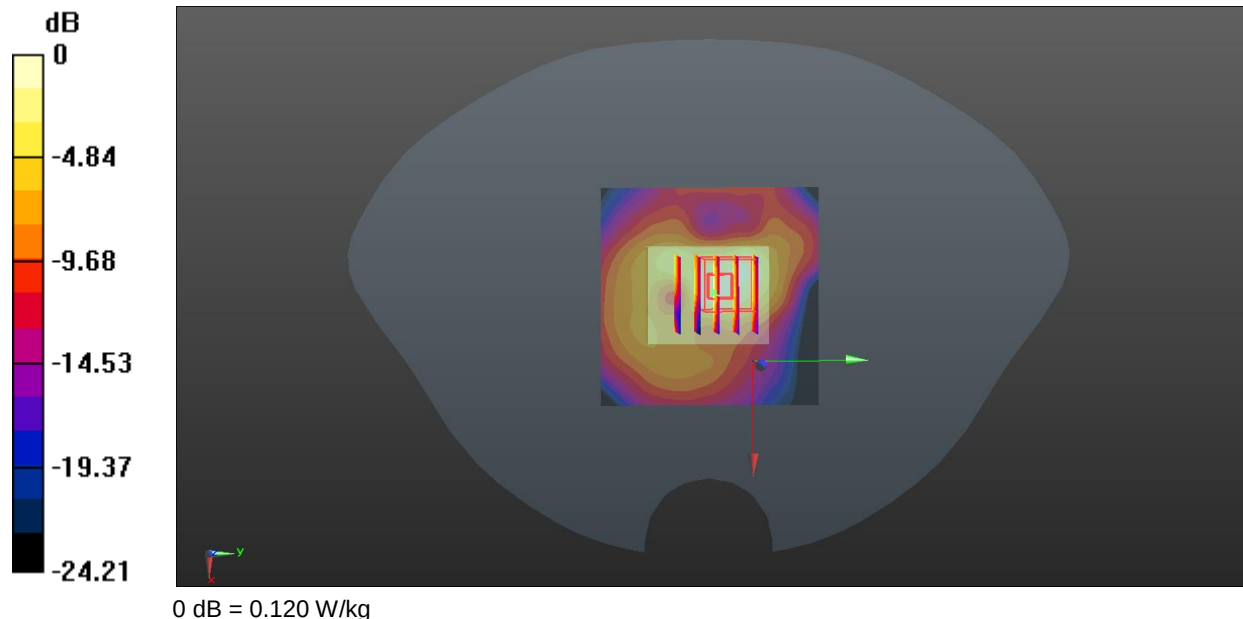

Meas.3 Front of face Plane with Front Side 10mm on Middle Channel in GPRS1900 2Slots mode with ANT1

Date: 2026.04.25

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.366$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35) ; Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.106 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.340 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.1%

Maximum value of SAR (measured) = 0.103 W/kg

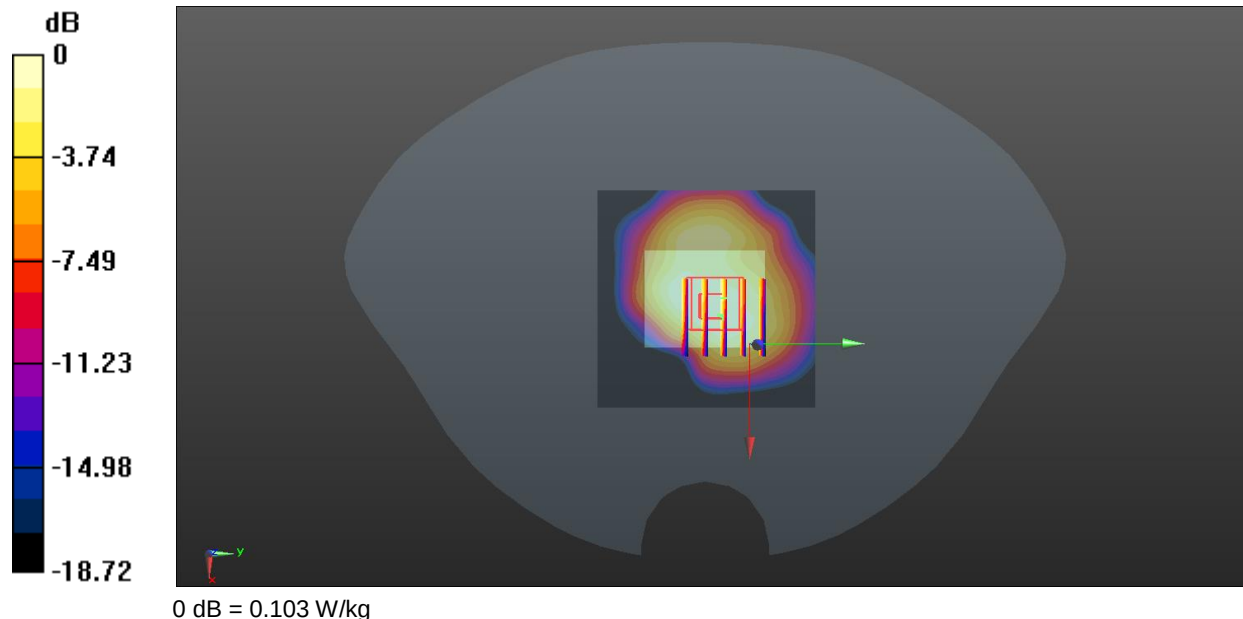

Meas.4 Limbs Plane with Back Side 0mm on Middle Channel in GPRS1900 2Slots mode with ANT1

Date: 2026.04.25

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.366$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35) ; Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.510 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.26 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.427 W/kg

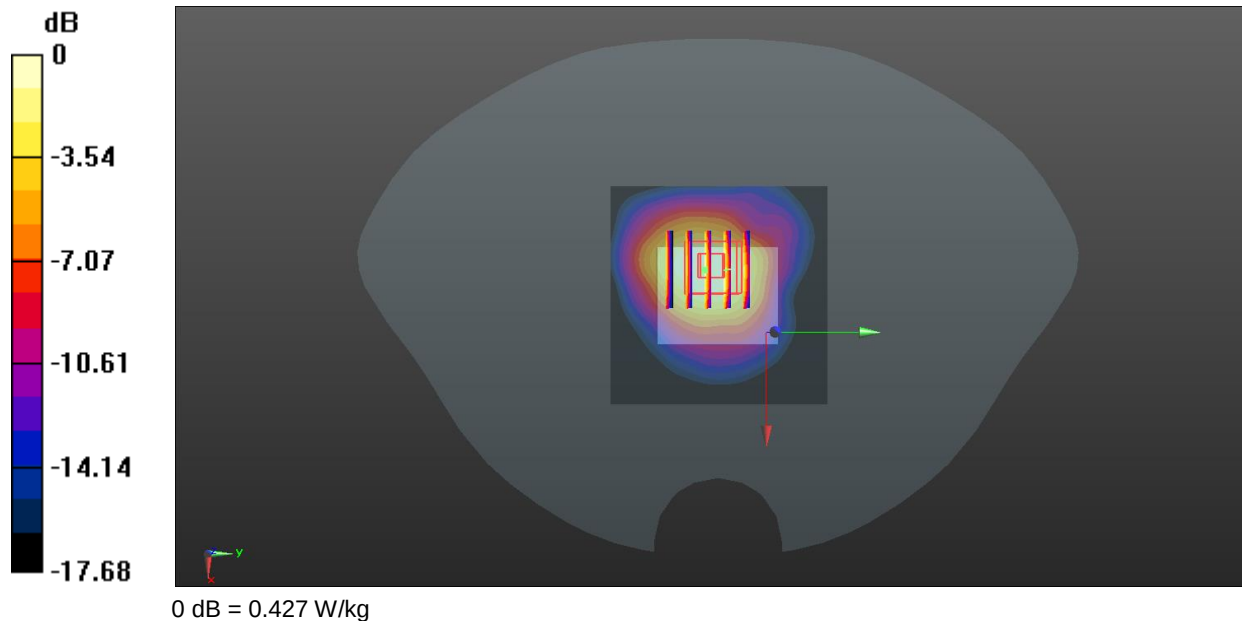

Meas.5 Front of face Plane with Front Side 10mm on High Channel in WCDMA Band2 mode with ANT1

Date: 2026.04.25

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35) ; Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9538/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.406 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.19 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 0.369 W/kg

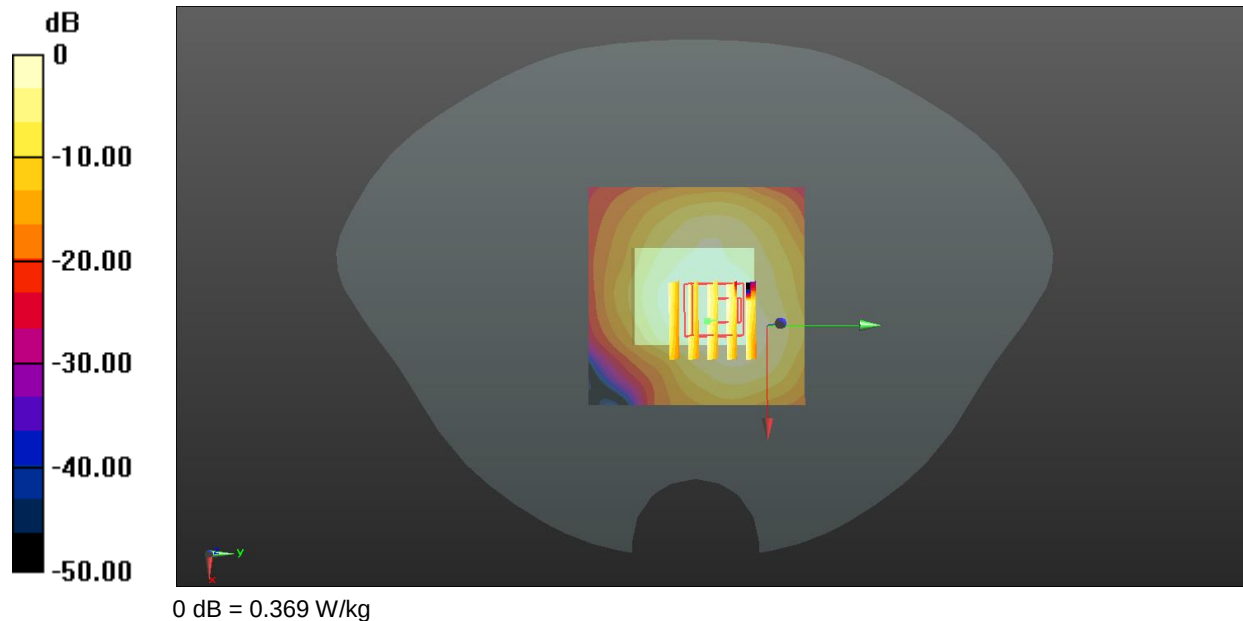

Meas.6 Limbs Plane with Back Side 0mm on High Channel in WCDMA Band2 mode with ANT1

Date: 2026.04.25

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35) ; Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9538/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.34 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.42 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.635 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.8%

Maximum value of SAR (measured) = 1.09 W/kg

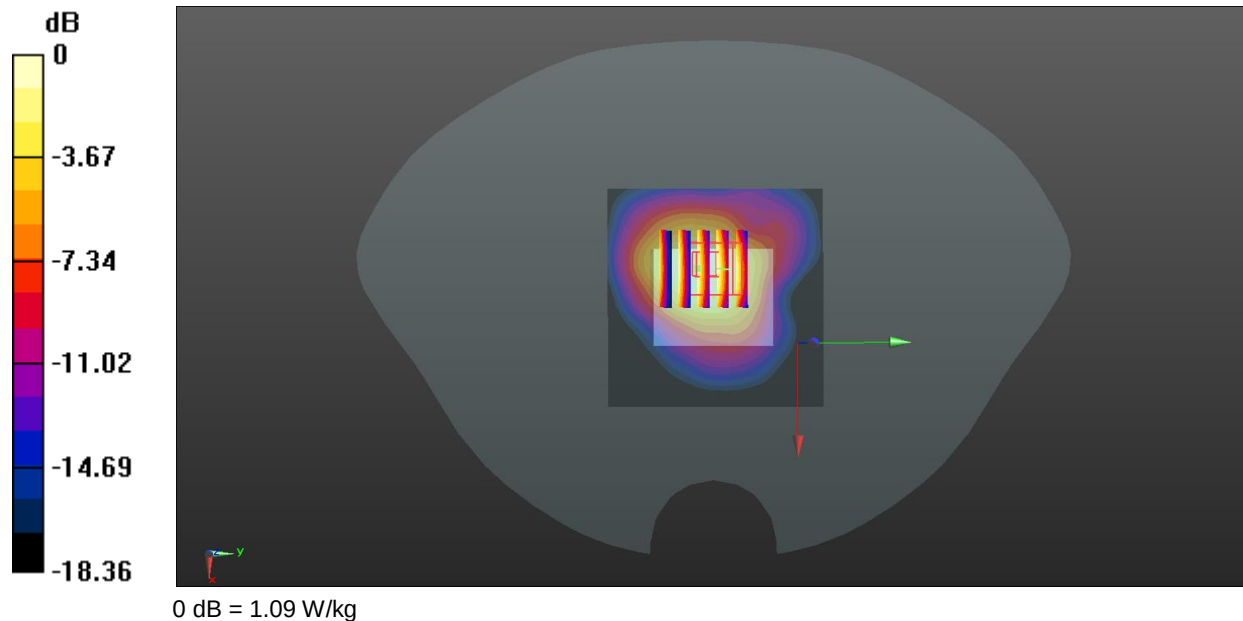

Meas.7 Front of face Plane with Front Side 10mm on High Channel in WCDMA Band5 mode with ANT1

Date: 2026.04.24

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 40.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4233/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0307 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.330 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.0324 W/kg

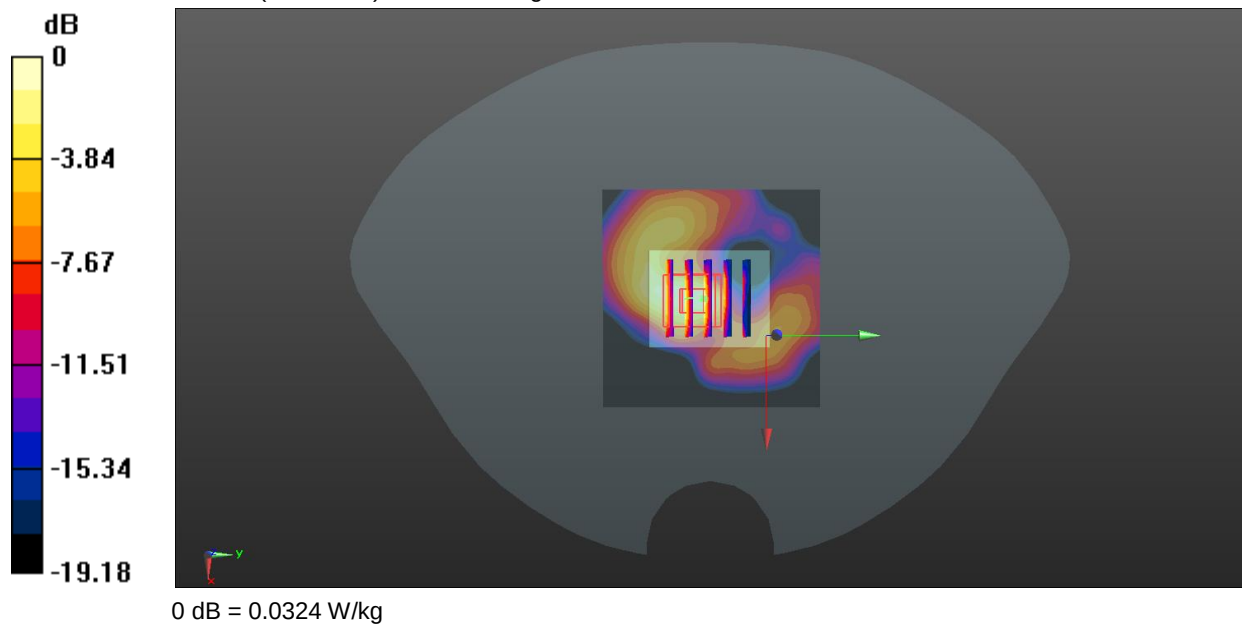

Meas.8 Limbs Plane with Back Side 0mm on High Channel in WCDMA Band5 mode with ANT1

Date: 2026.04.24

Communication System Band: 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4132/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.113 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.445 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.245 W/kg
SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.046 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.1%
Maximum value of SAR (measured) = 0.112 W/kg

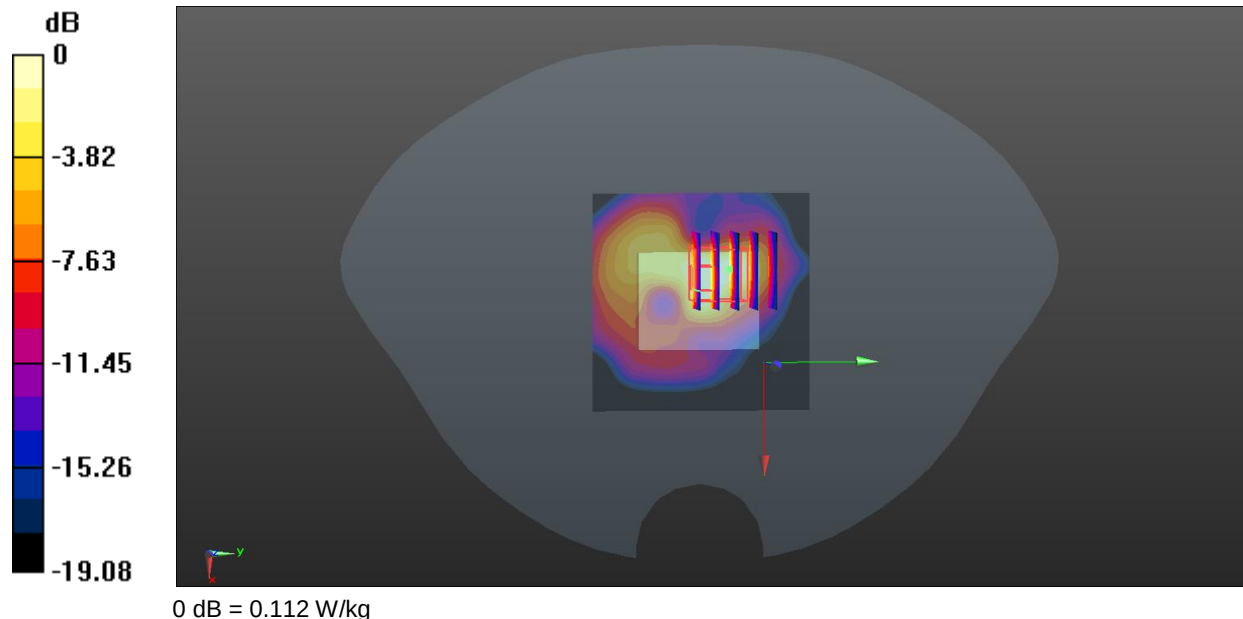

Meas.9 Front of face Plane with Front Side 10mm on High Channel in LTE Band2 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch19100/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.229 W/kg

Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 12.34 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.227 W/kg

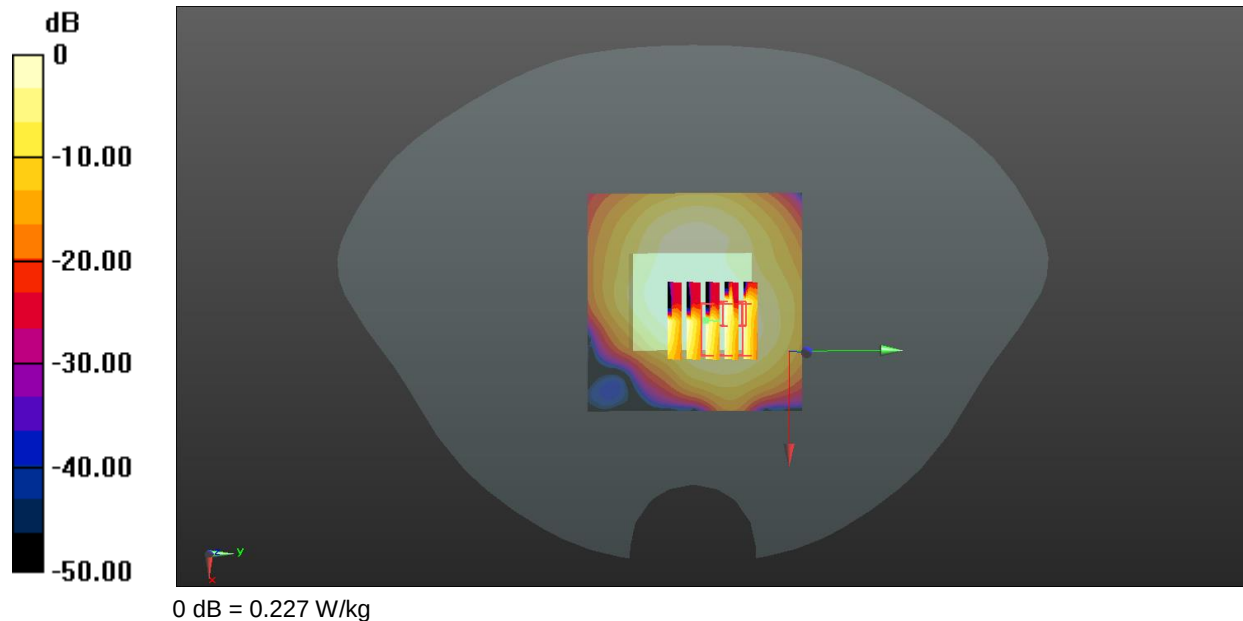

Meas.10 Limbs Plane with Back Side 0mm on High Channel in LTE Band2 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch19100/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.36 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.669 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 1.18 W/kg

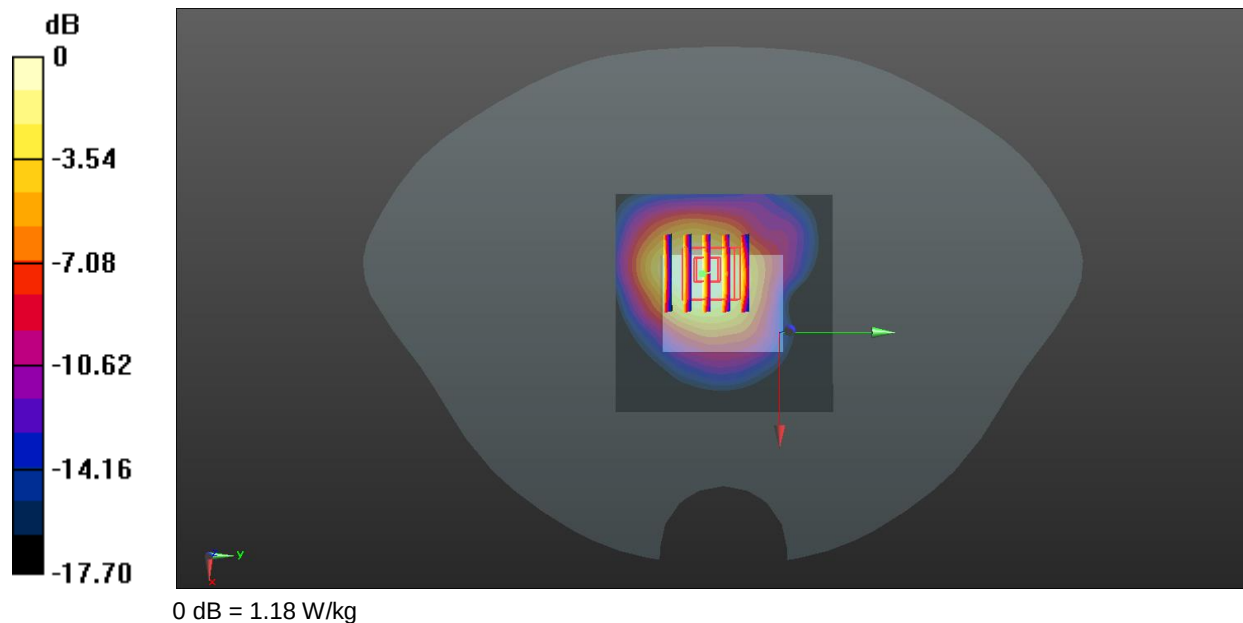

Meas.11 Front of face Plane with Front Side 10mm on High Channel in LTE Band4 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.084$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.72, 8.72, 8.72); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20300/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.106 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.31 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.0948 W/kg

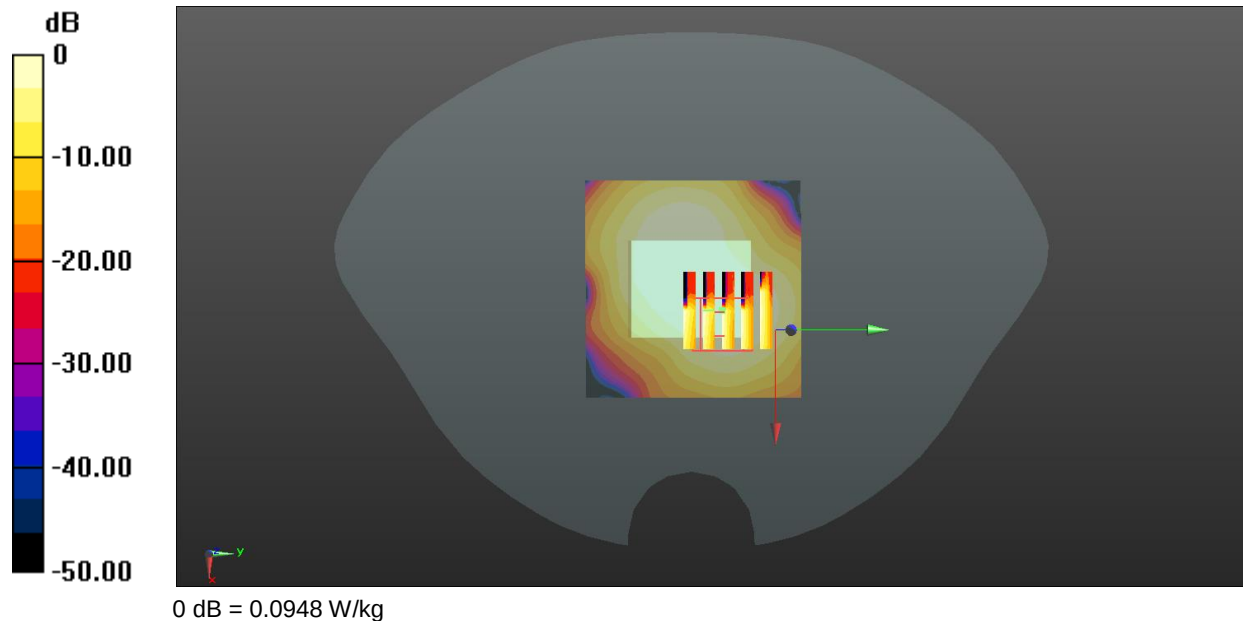

Meas.12 Limbs Plane with Back Side 0mm on High Channel in LTE Band4 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.084$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.72, 8.72, 8.72); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20300/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.718 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.30 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.558 W/kg

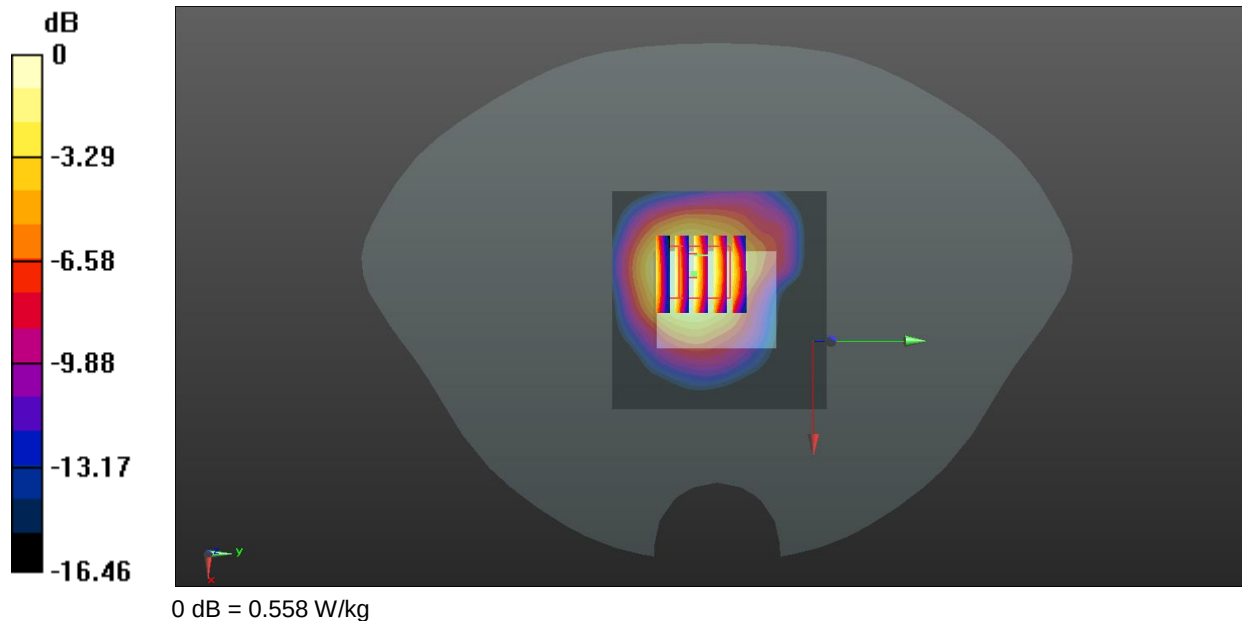

Meas.13 Front of face Plane with Front Side 10mm on Middle Channel in LTE Band5 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 42.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20525/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.0208 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 4.474 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00561 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 0.0122 W/kg

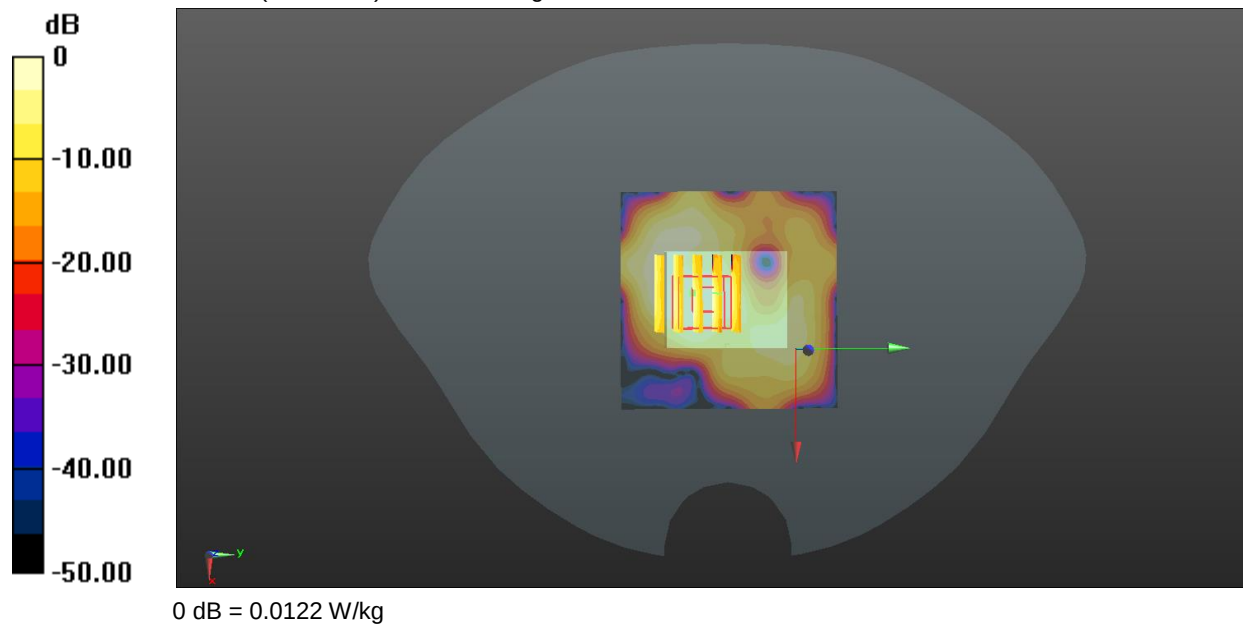

Meas.14 Limbs Plane with Back Side 0mm on Low Channel in LTE Band5 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20450/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0972 W/kg

Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.071 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.0881 W/kg

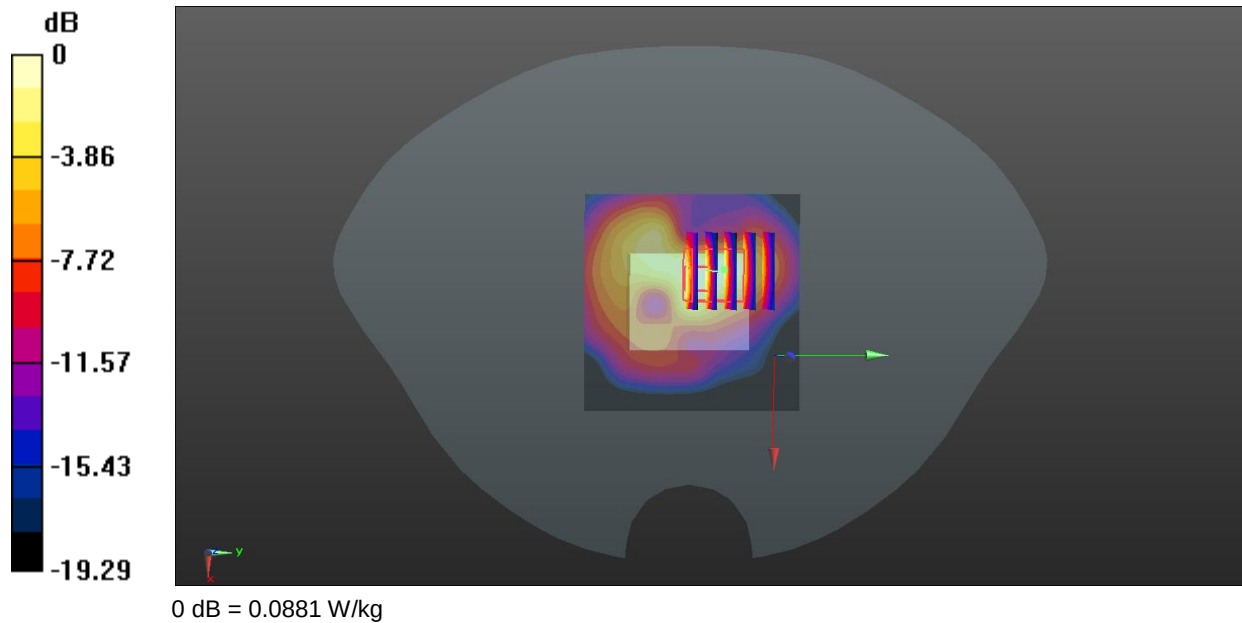

Meas.15 Front of face Plane with Front Side 10mm on Middle Channel in LTE Band7 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 39.824$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch21100 2/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.381 W/kg

Ch21100 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.50 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.251 W/kg

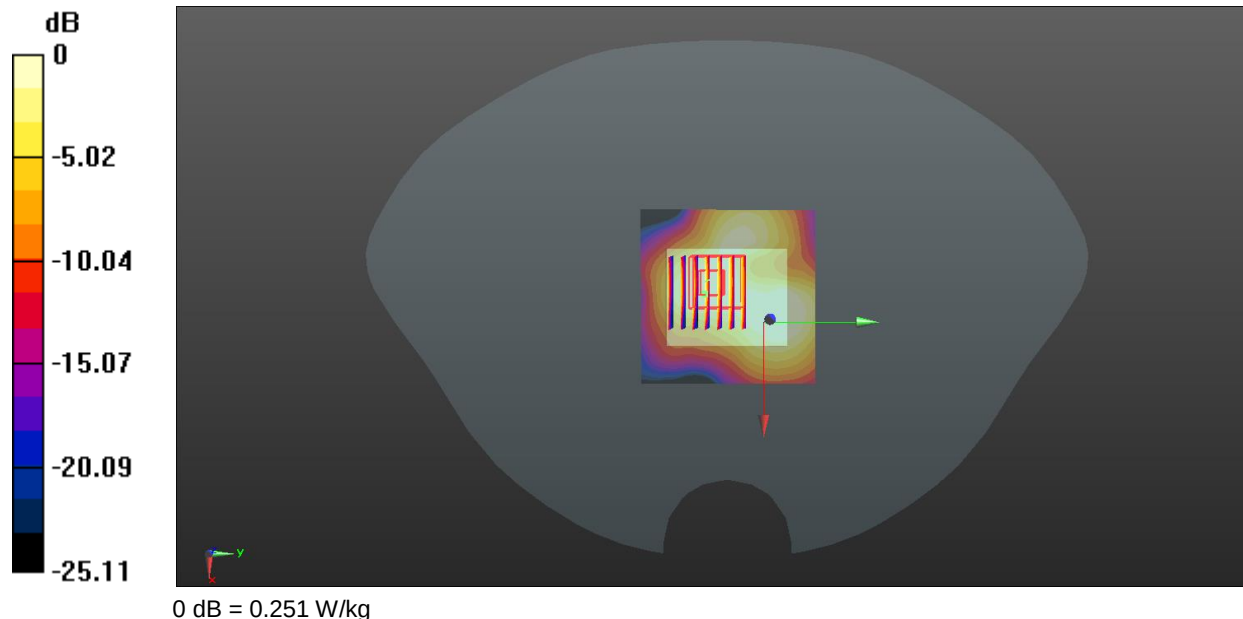

Meas.16 Limbs Plane with Back Side 0mm on High Channel in LTE Band7 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch21350/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.08 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 32.51 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 1.82 W/kg; SAR(10 g) = 0.871 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 2.06 W/kg

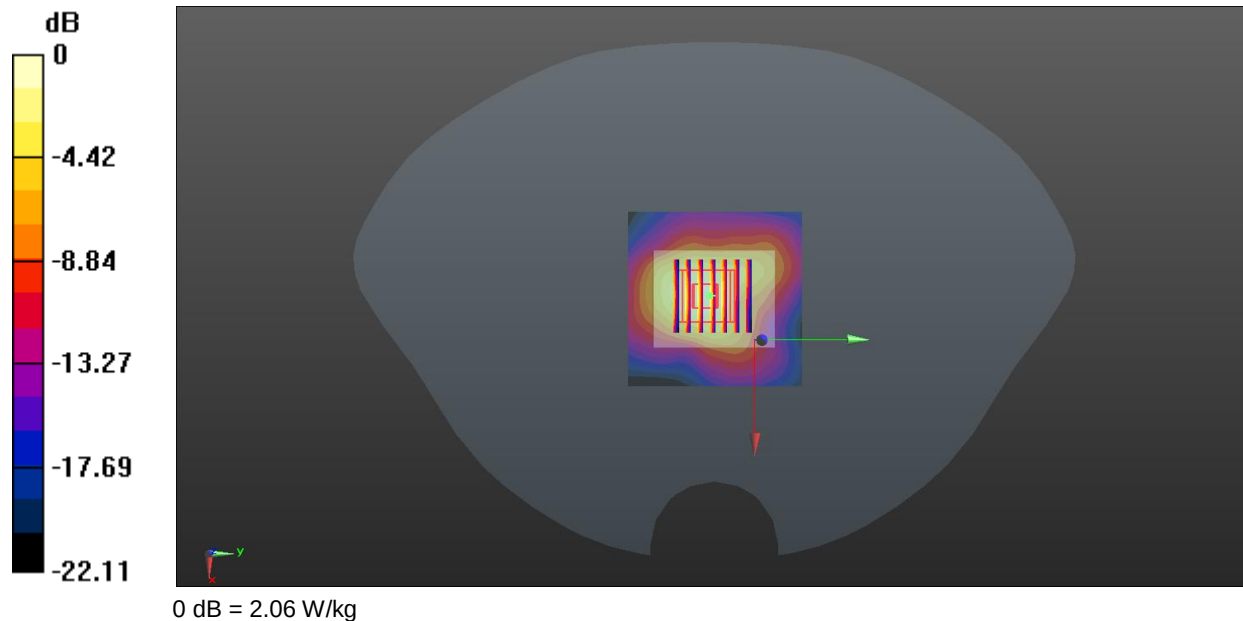

Meas.17 Front of face Plane with Front Side 10mm on Middle Channel in LTE Band12 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.757$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.64, 10.64, 10.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch23095/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0127 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.506 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00426 W/kg; SAR(10 g) = 0.00185 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 0.00564 W/kg

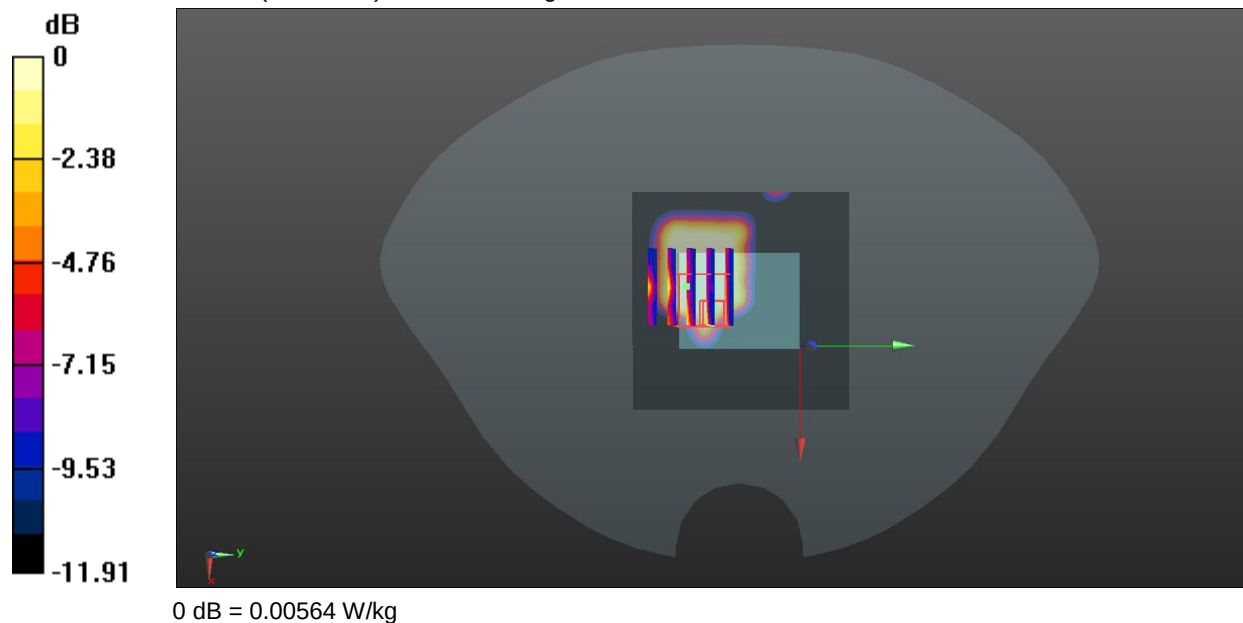

Meas.18 Limbs Plane with Back Side 0mm on Middle Channel in LTE Band12 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.757$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.64, 10.64, 10.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch23095/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.139 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.562 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.153 W/kg

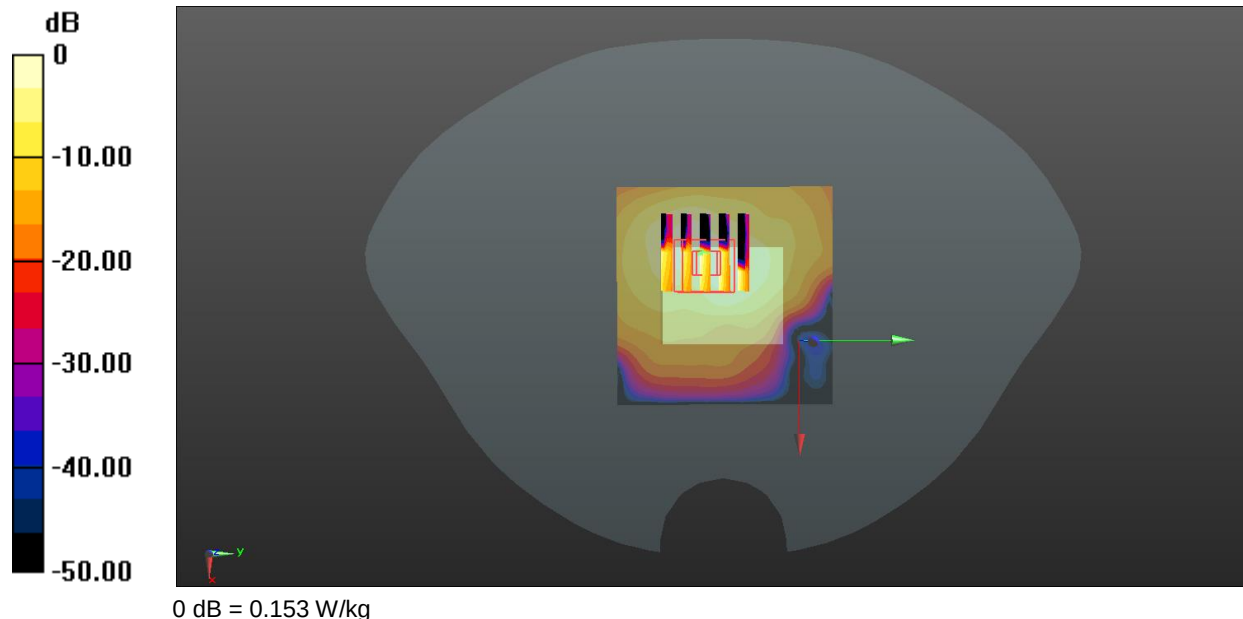

Meas.19 Front of face Plane with Front Side 10mm on High Channel in LTE Band66 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 66,E-UTRA/FDD; Frequency: 1770 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.959$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.72, 8.72, 8.72); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch132572/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0953 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.524 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.9%

Maximum value of SAR (measured) = 0.0937 W/kg

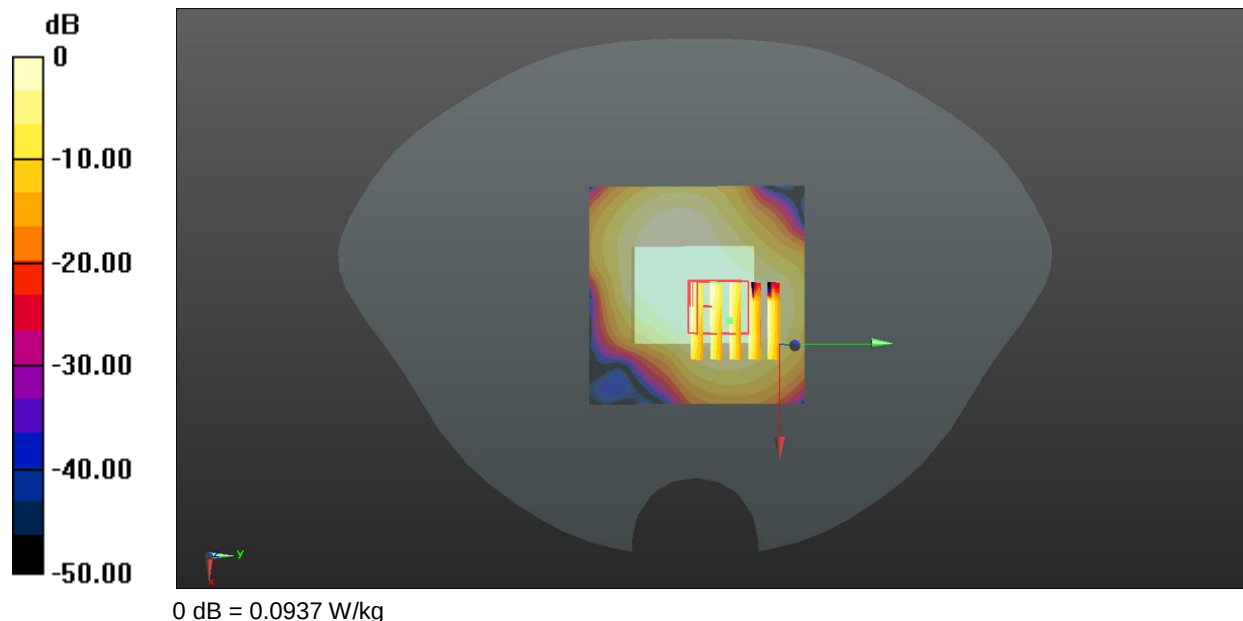

Meas.20 Limbs Plane with Back Side 0mm on High Channel in LTE Band66 mode with ANT1

Date: 2026.04.24

Communication System Band: Band 66,E-UTRA/FDD; Frequency: 1770 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.959$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.72, 8.72, 8.72); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch132572/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.760 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.47 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.566 W/kg

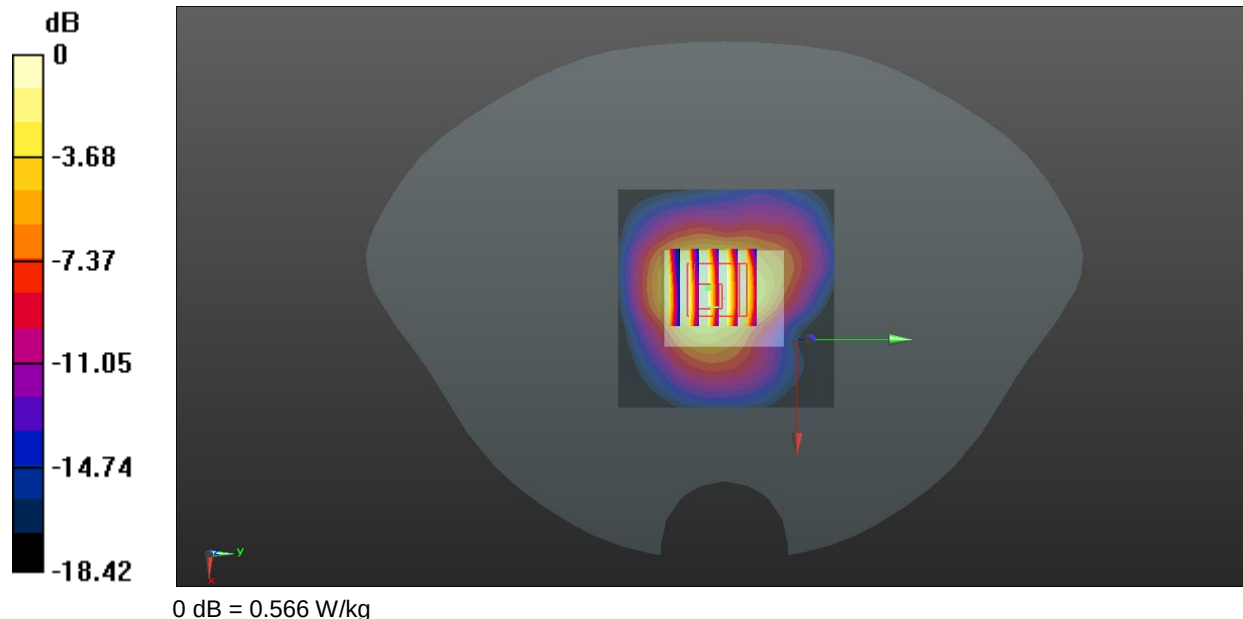

Meas.21 Front of face Plane with Front Side 10mm on High Channel in LTE Band38 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 38.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch38150/Area Scan (61x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.171 W/kg

Ch38150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.739 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.159 W/kg

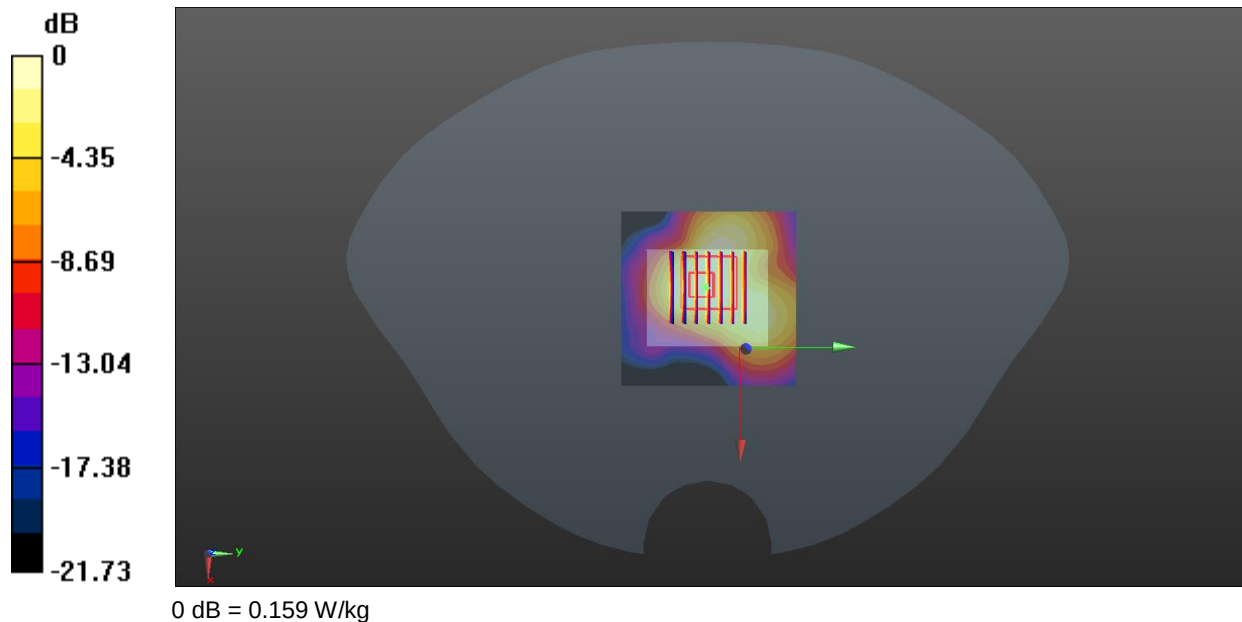

Meas.22 Limbs Plane with Back Side 0mm on High Channel in LTE Band38 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 38.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch38150/Area Scan (61x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.13 W/kg

Ch38150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.76 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.458 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 1.14 W/kg

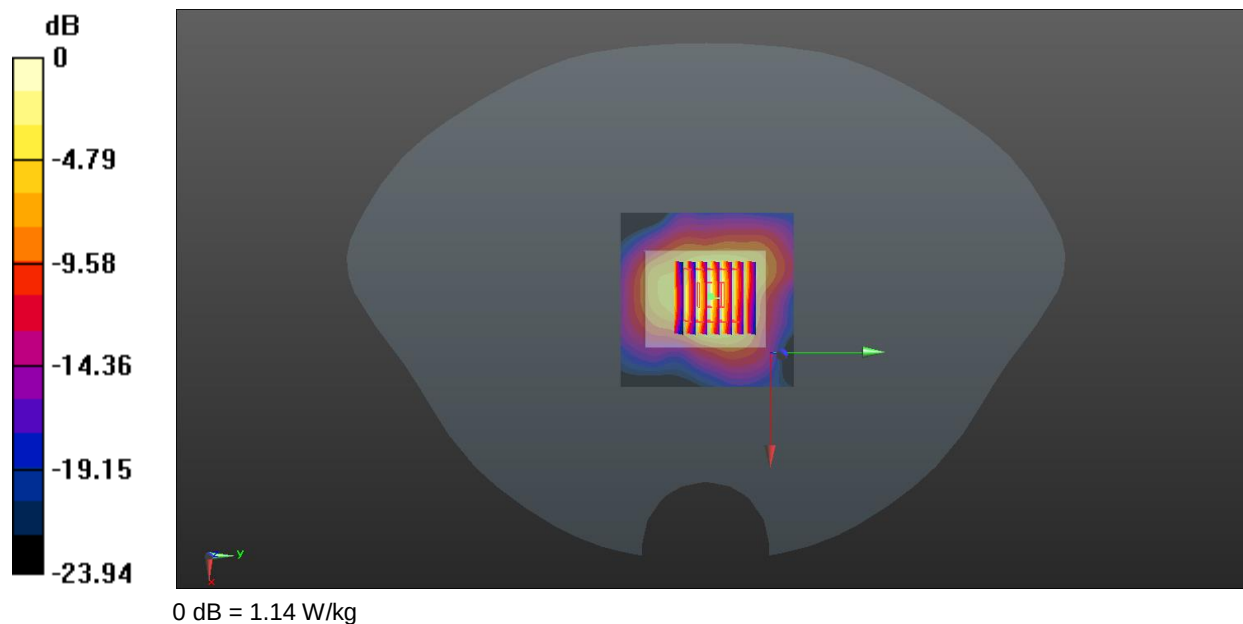

Meas.23 Front of face Plane with Front Side 10mm on Middle Channel in LTE Band41 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 39.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch40620/Area Scan (61x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.174 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.225 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.148 W/kg

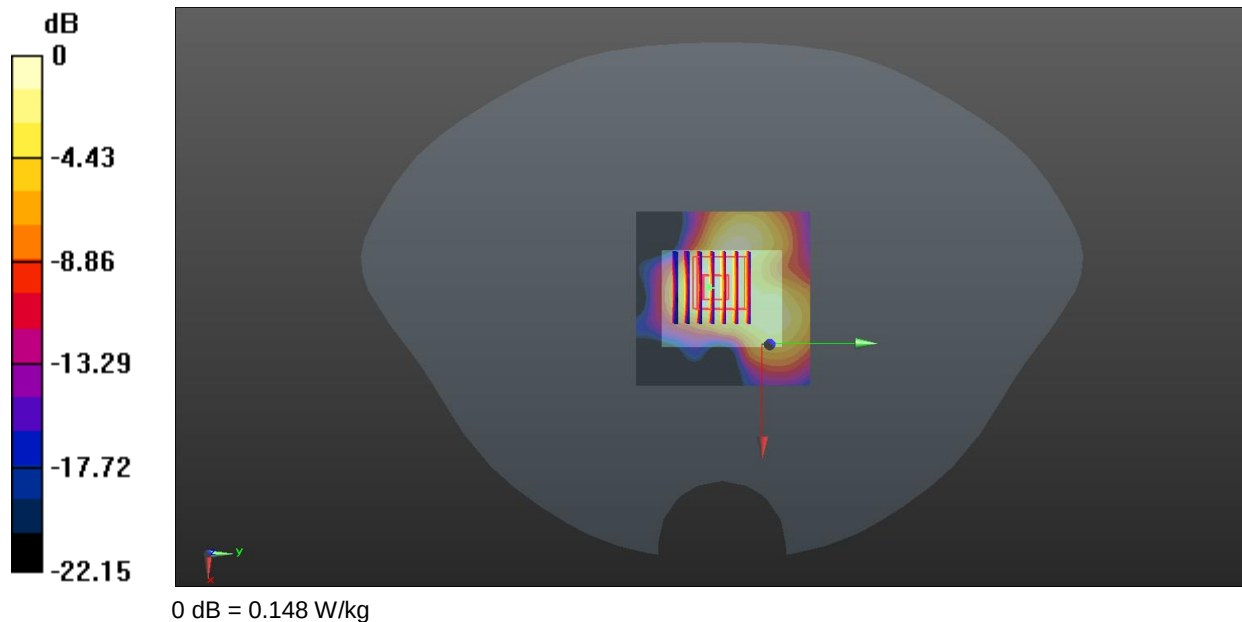

Meas.24 Limbs Plane with Back Side 0mm on Middle Channel in LTE Band41 mode with ANT1

Date: 2026.04.25

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 39.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch40620/Area Scan (61x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 1.06 W/kg

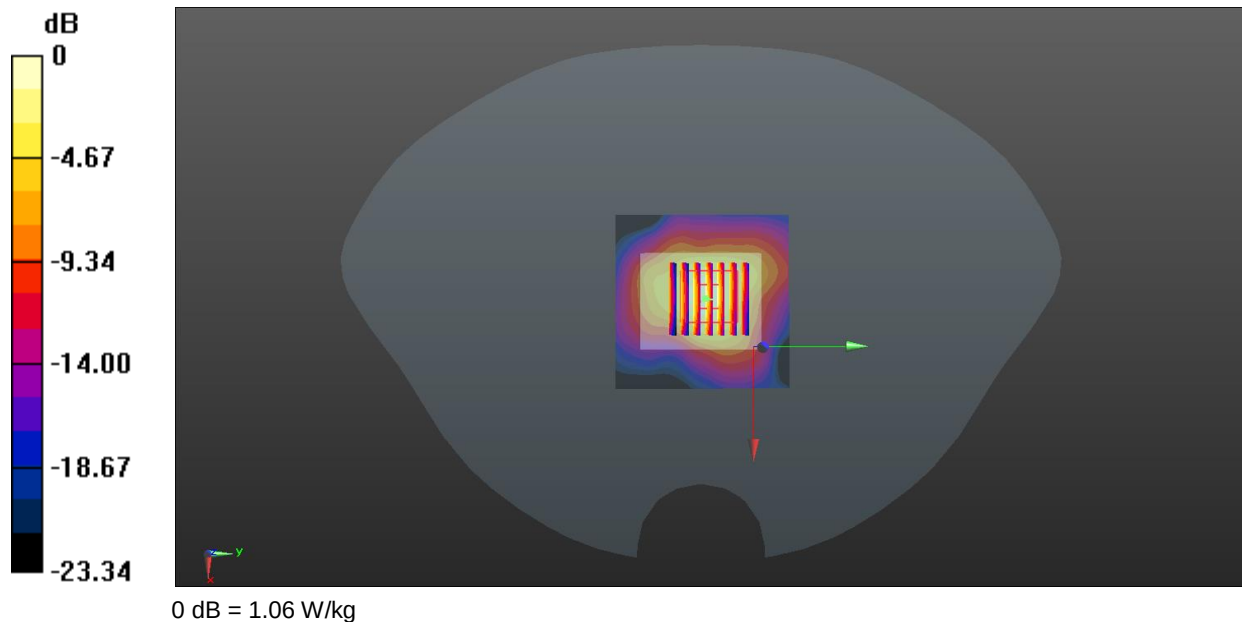

Meas.25 Front of face Plane with Front Side 10mm on 39 Channel in Bluetooth mode with ANT0

Date: 2026.04.25

Communication System Band: 1; Frequency: 2441 MHz; Duty Cycle: 1:1.31

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.767$ S/m; $\epsilon_r = 39.742$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch39/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 m
Maximum value of SAR (interpolated) = 0.0117 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.118 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00574 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.0111 W/kg

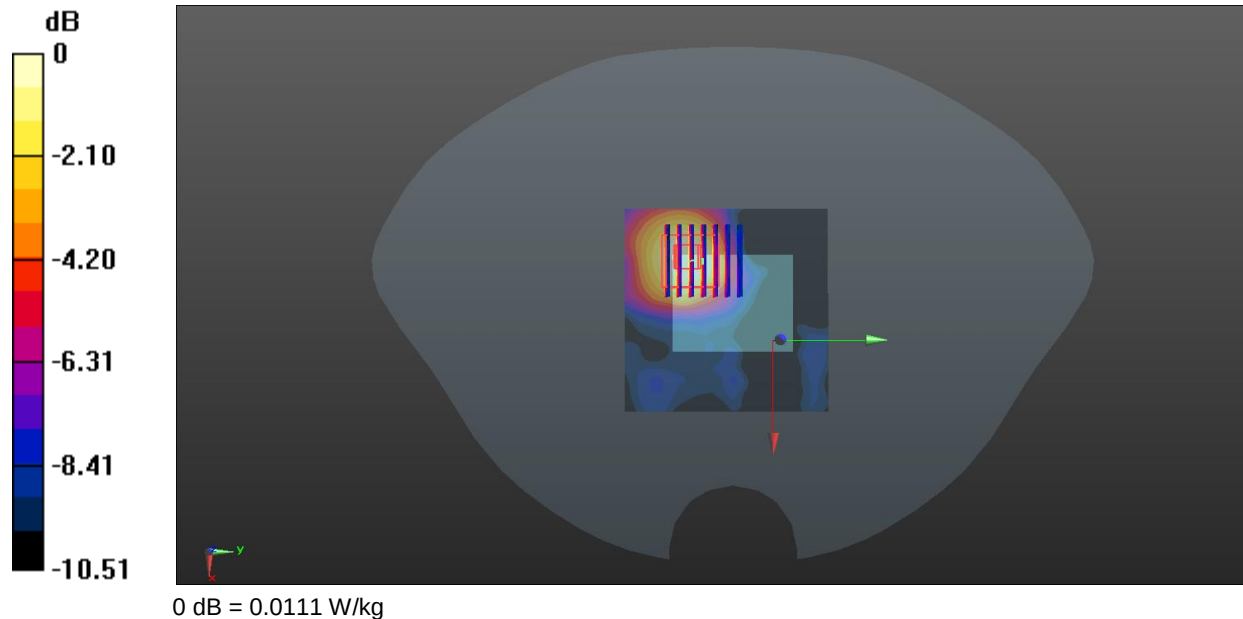

Meas.26 Limbs Plane with Back Side 0mm on 78 Channel in Bluetooth mode with ANT0

Date: 2026.04.25

Communication System Band: 1; Frequency: 2480 MHz; Duty Cycle: 1:1.31

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch78/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0556 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.769 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.0639 W/kg

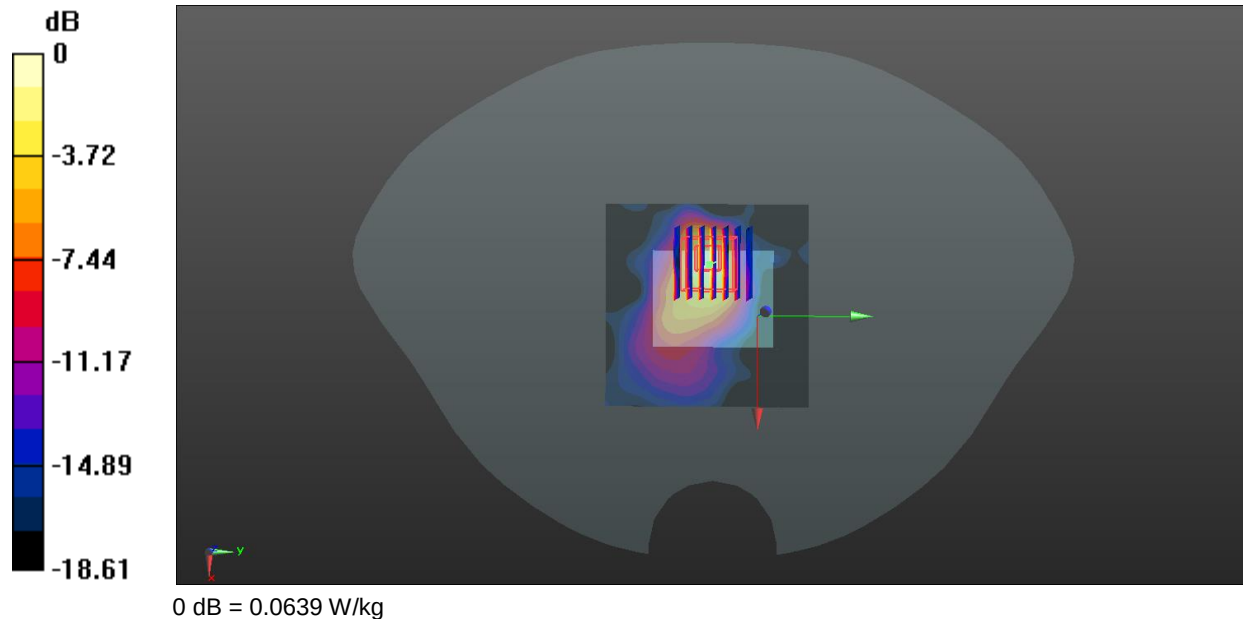

Meas.27 Front of face Plane with Front Side 10mm on 1 Channel in IEEE802.11b mode with ANT0

Date: 2026.04.25

Communication System Band: 2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.007

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.725$ S/m; $\epsilon_r = 39.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch1/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0186 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.064 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00728 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.0156 W/kg

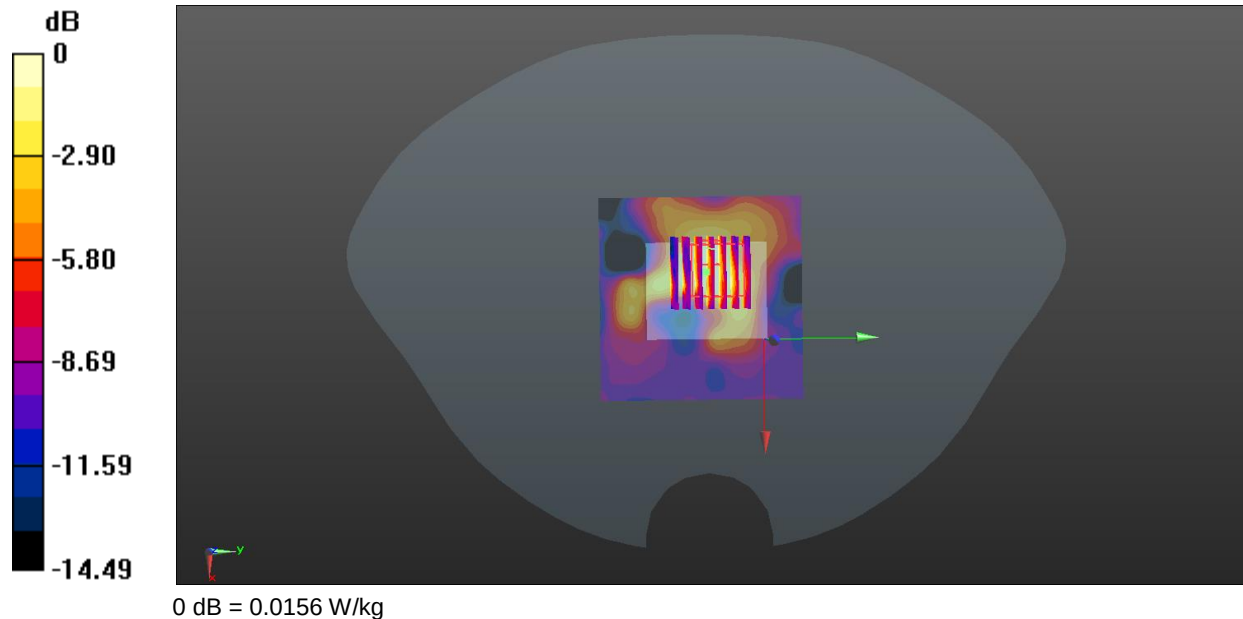

Meas.28 Limbs Plane with Back Side 0mm on 1 Channel in IEEE802.11b mode with ANT0

Date: 2026.04.25

Communication System Band: 2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1.007

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.725$ S/m; $\epsilon_r = 39.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch1/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0359 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.221 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 0.0485 W/kg

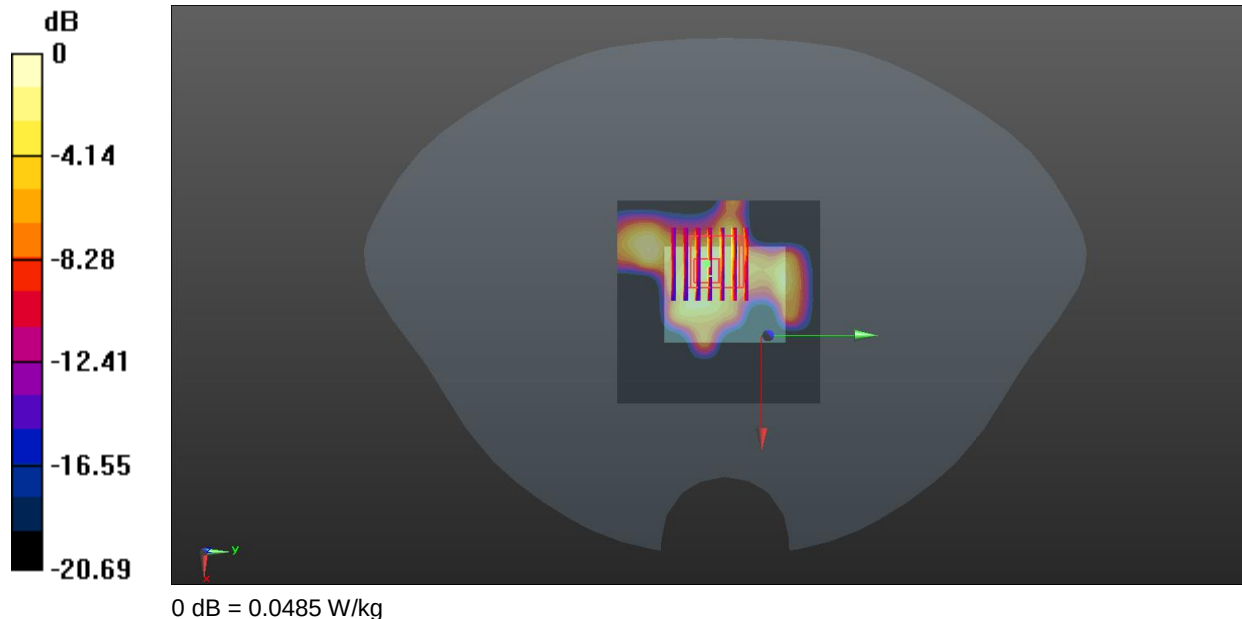

--BLANK BELOW--