


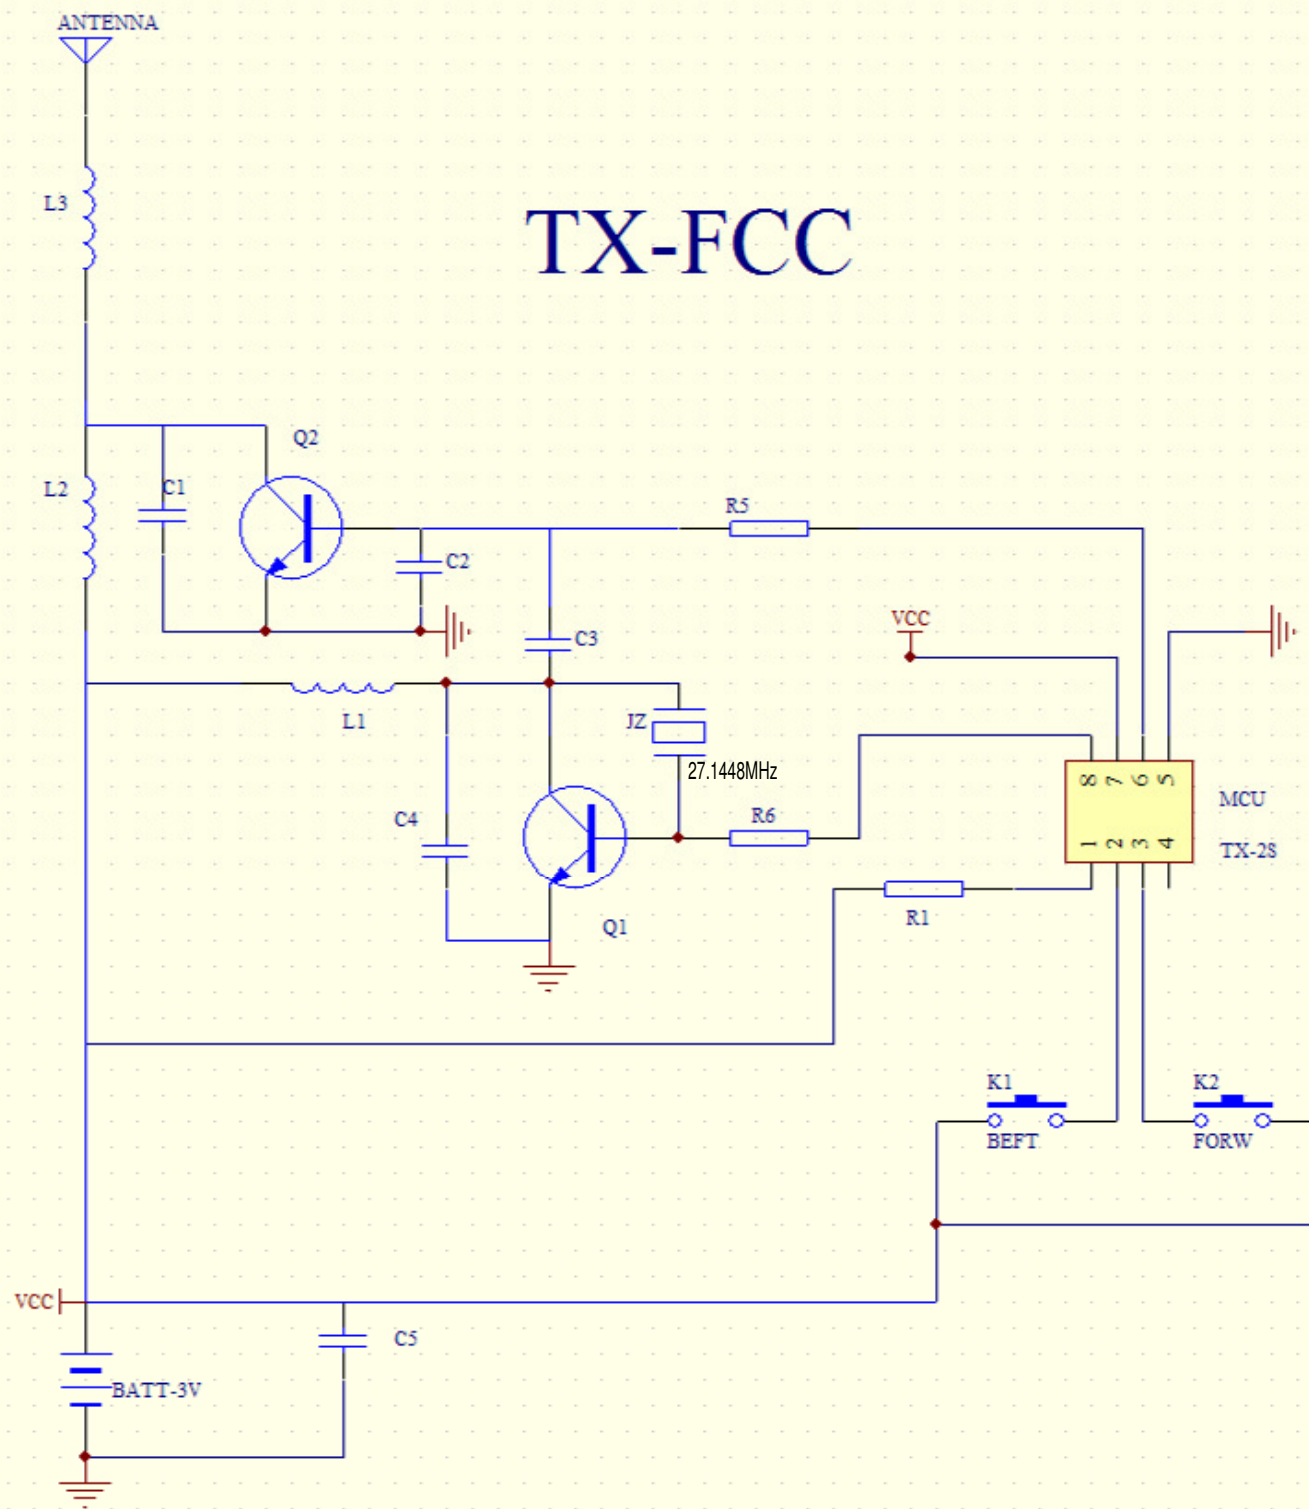

technology	Material name	Model specification	position	consumption
Patch	CC	C-0603-47P $\pm$ 5%-T	C3	1
		C-0603-221P $\pm$ 5%-T	C1. C2	2
		C-0603-104+80%-20%-T	C5	1
	Integrated	U-TX-2S-SOP8-T	MCU	1
	inductance	L-0805-5R6 $\pm$ 10%-T	L2	1
		L-0805-2R2 $\pm$ 10%-T	L1	1
	triode	Q-C945-SOT-23A (CR) -T	Q1	1
		Q-8050-SOT-23A (J3Y) -T	Q2	1
	resistance	R-0603-270K-T	R1	1
		R-0603-10K-T	R5	1
		R-0603-220K-T	R6	1
plug-in unit	inductance	L-0410-8R2 $\pm$ 5%	L3	1
	switch	The touch switch 6*6*4.3	K1. K2	2
	Positive wire	12-0.1-40MM	VCC	1
	Negative wire	12-0.1-40MM	GND	1
	Crystal	R27.145M	JZ	1
board	plate	58MM*17MM*1.4MM		1