



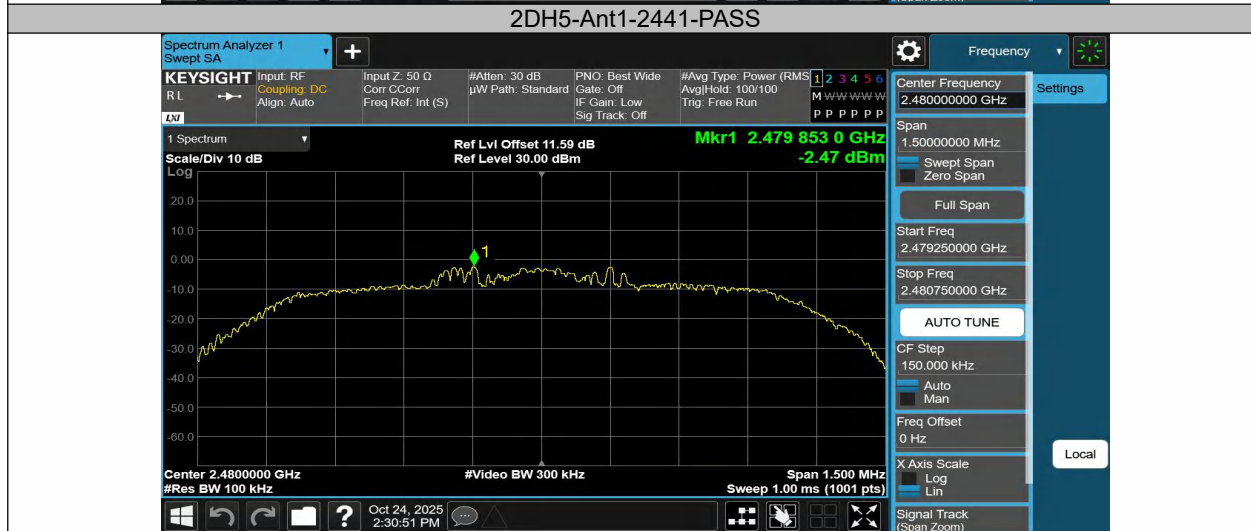


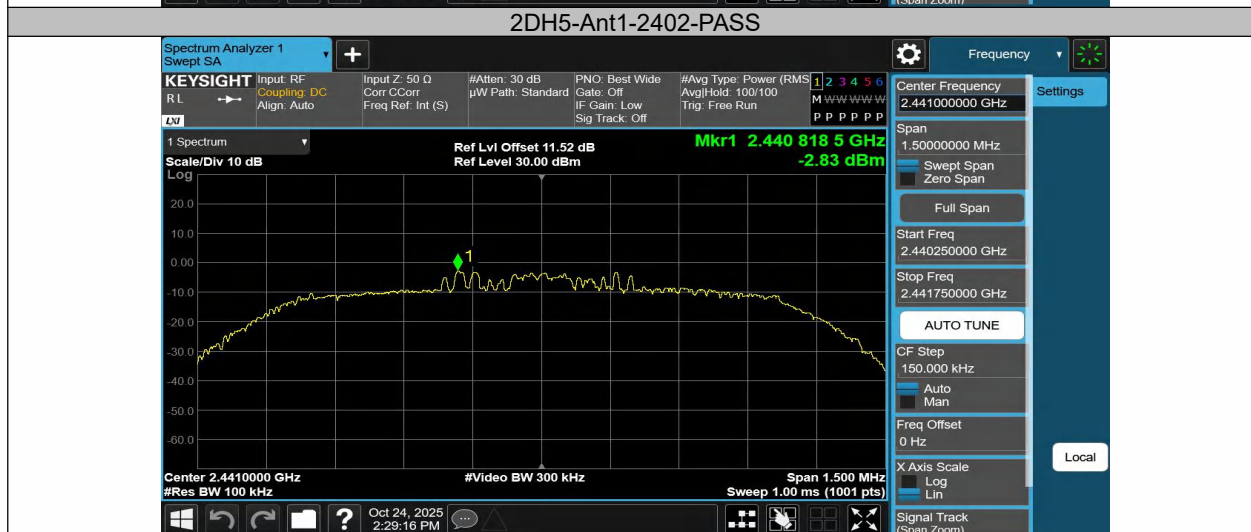

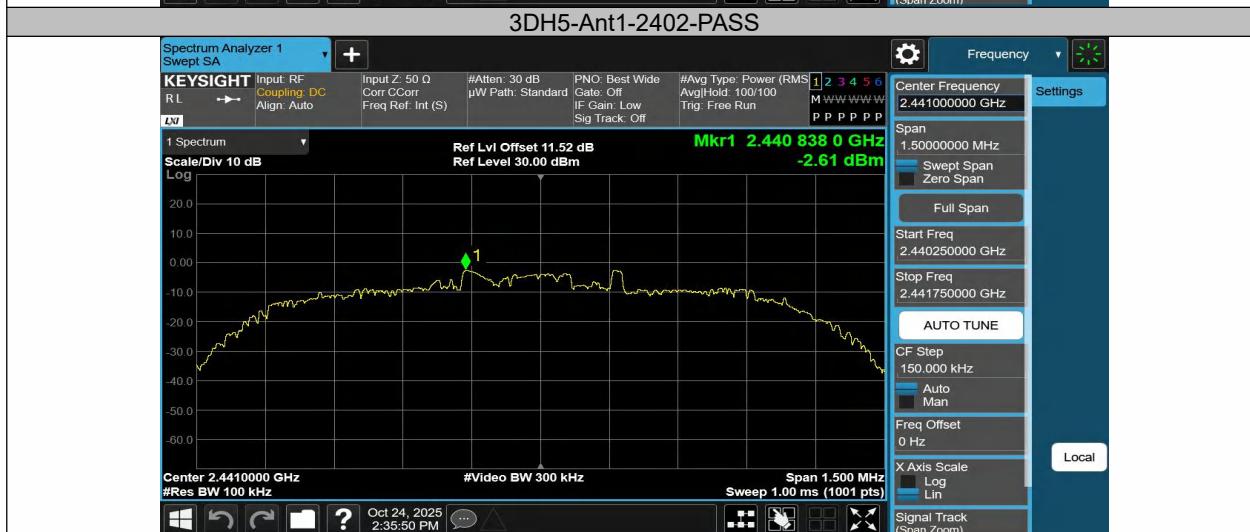


3DH5-Ant1-2480-PASS

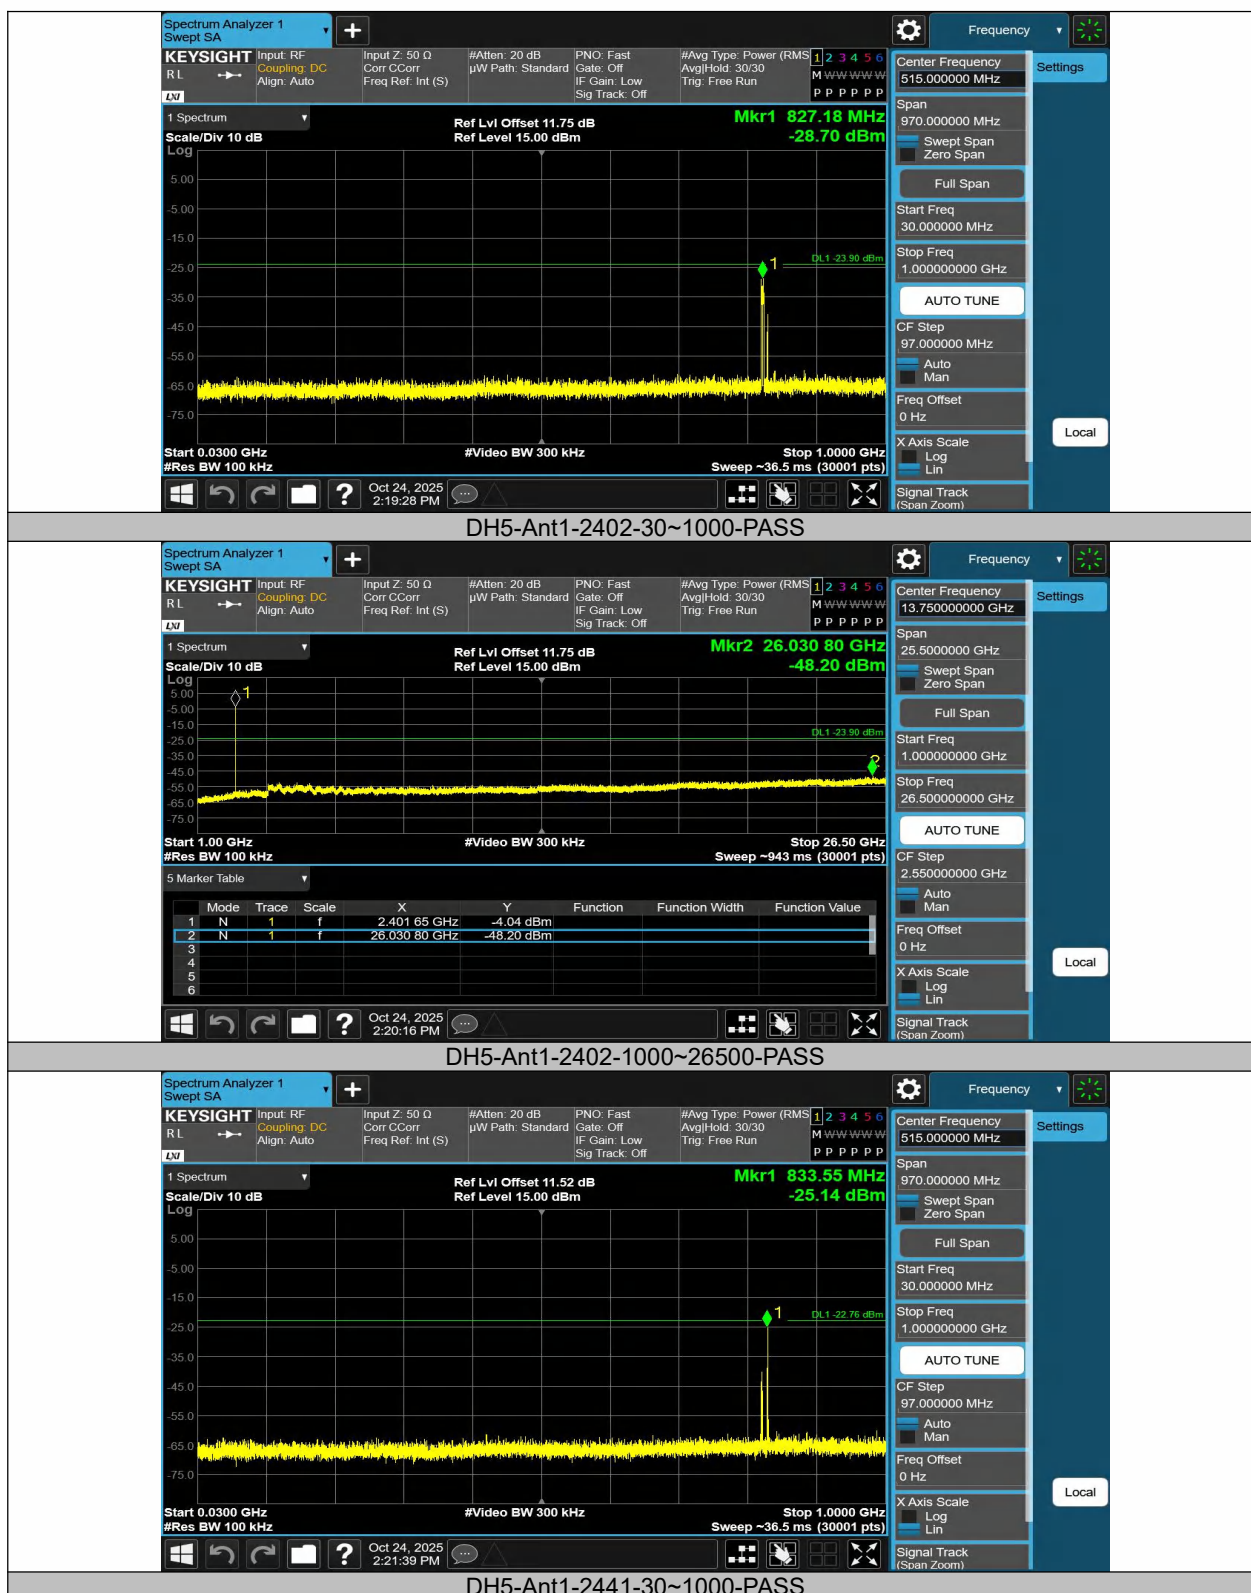


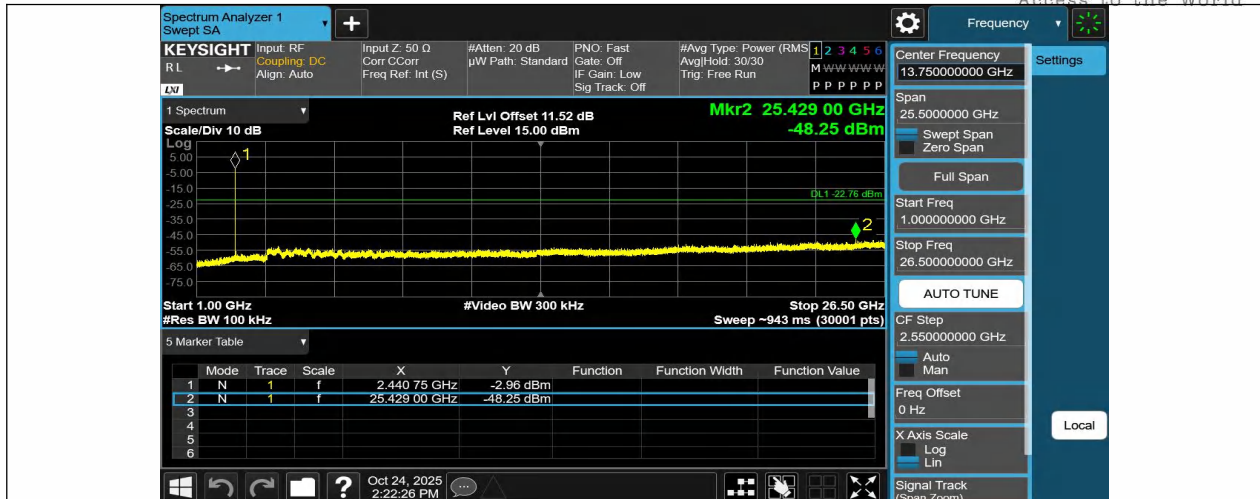




DH5-Ant1-2441-1000~26500-PASS

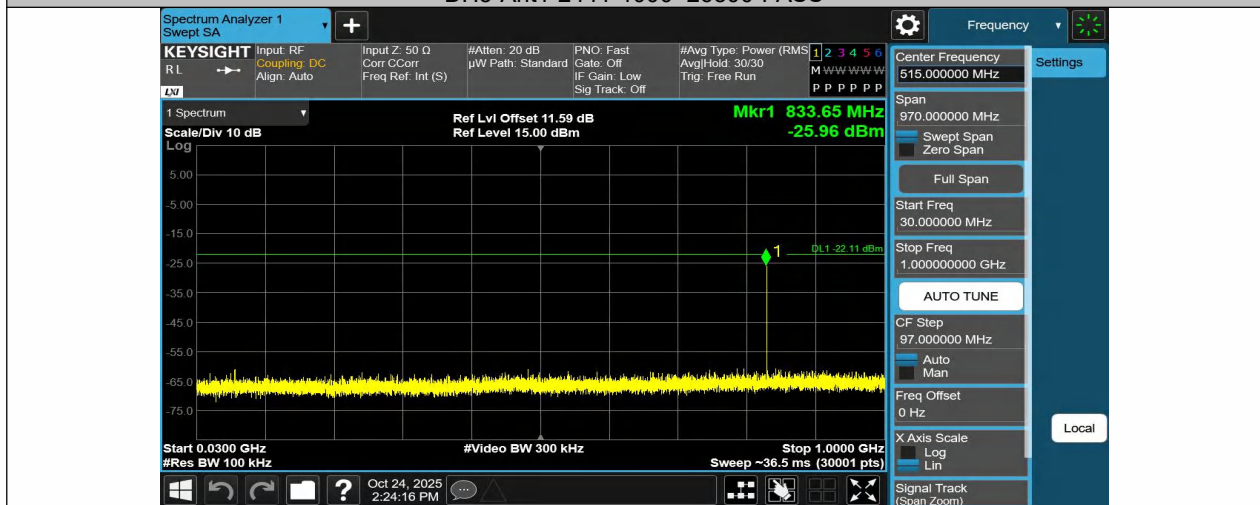


DH5-Ant1-2480-30~1000-PASS

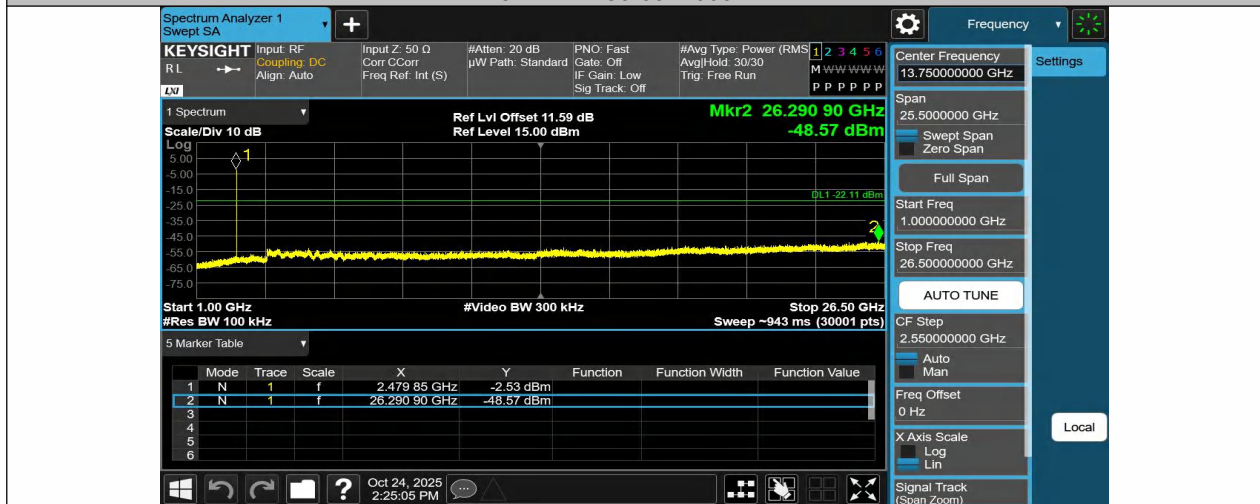


DH5-Ant1-2480-1000~26500-PASS

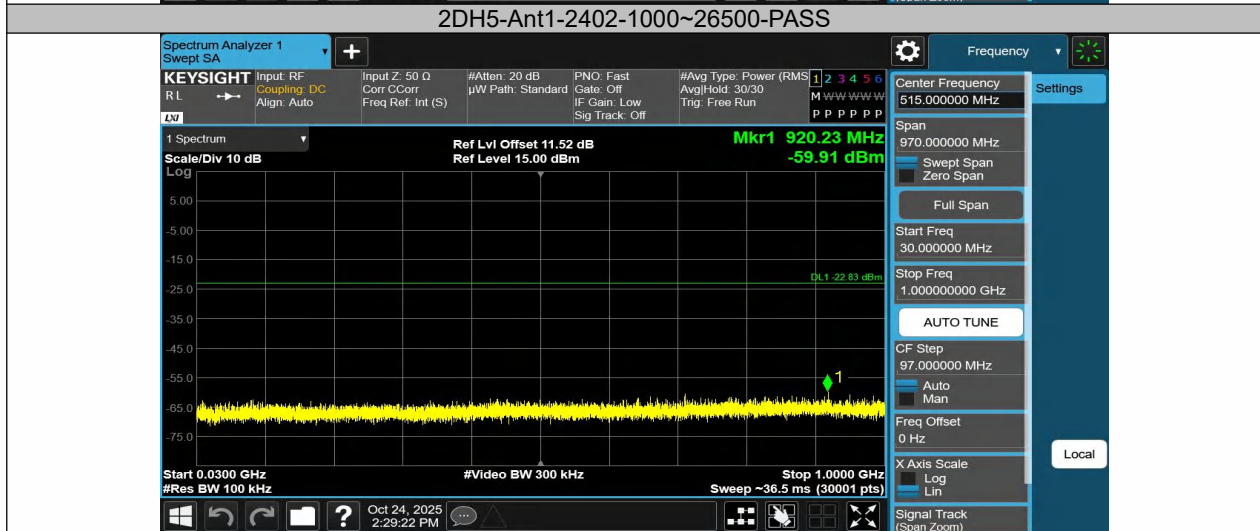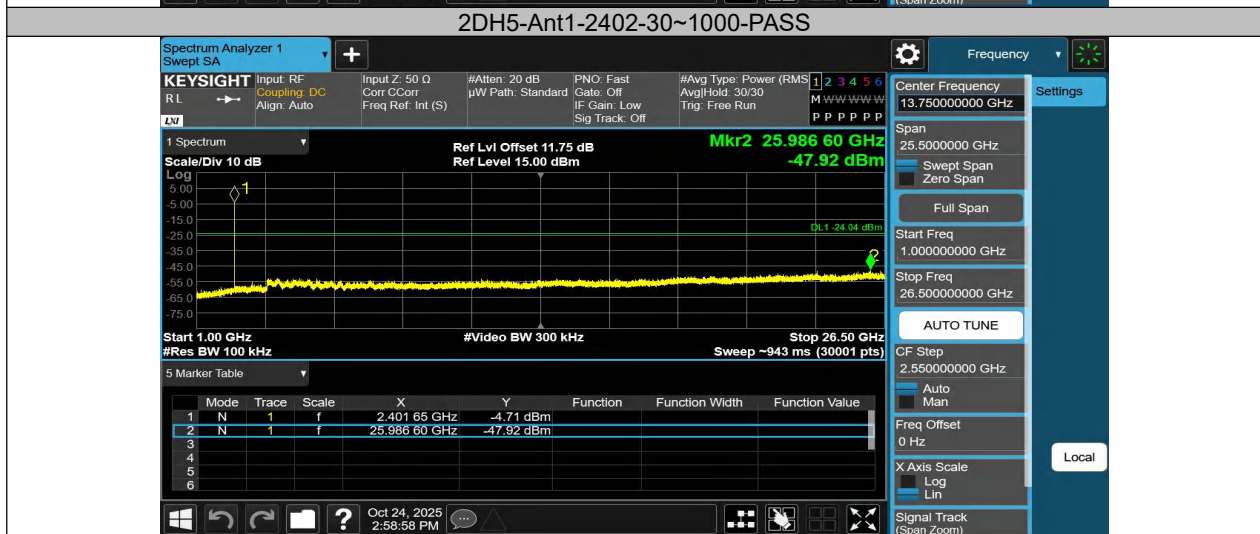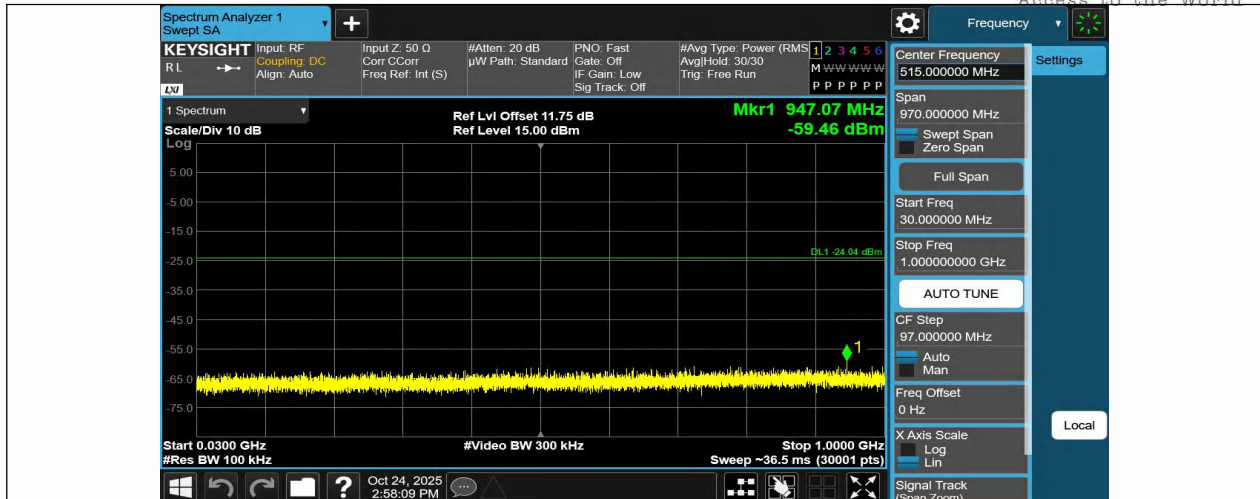


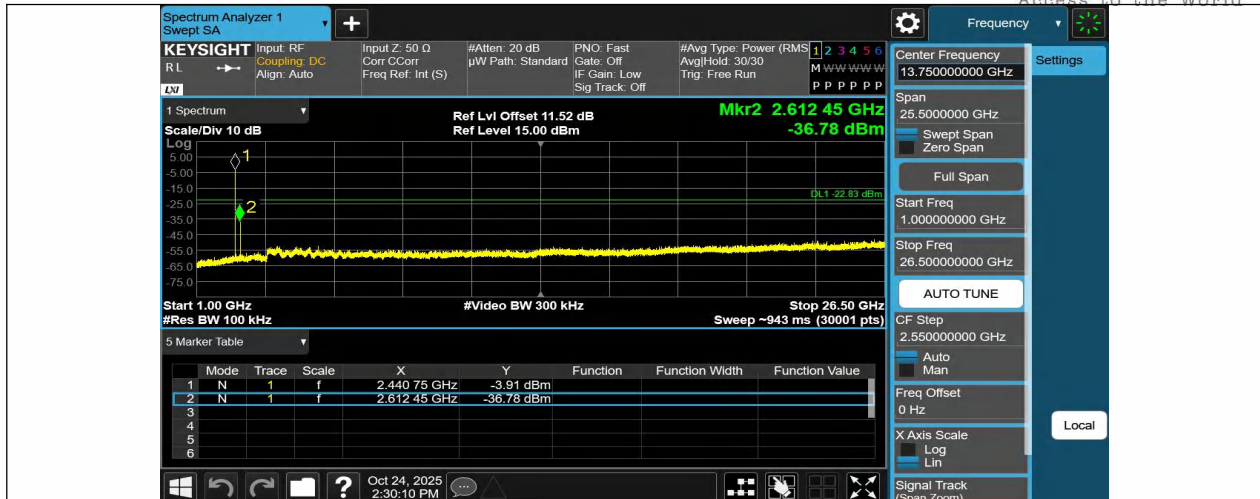

2DH5-Ant1-2441-1000~26500-PASS

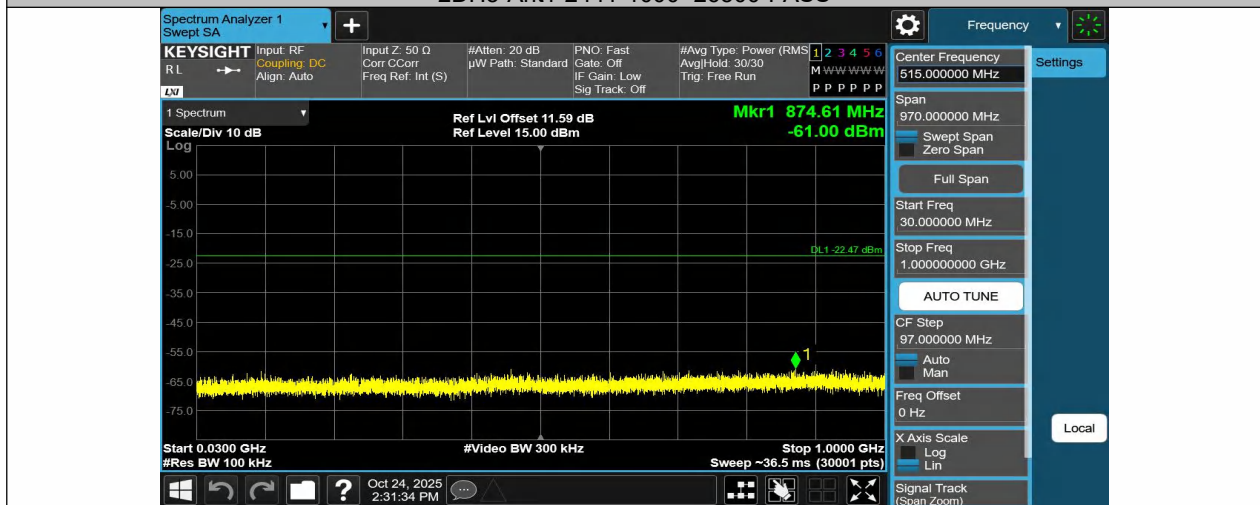


2DH5-Ant1-2480-30~1000-PASS

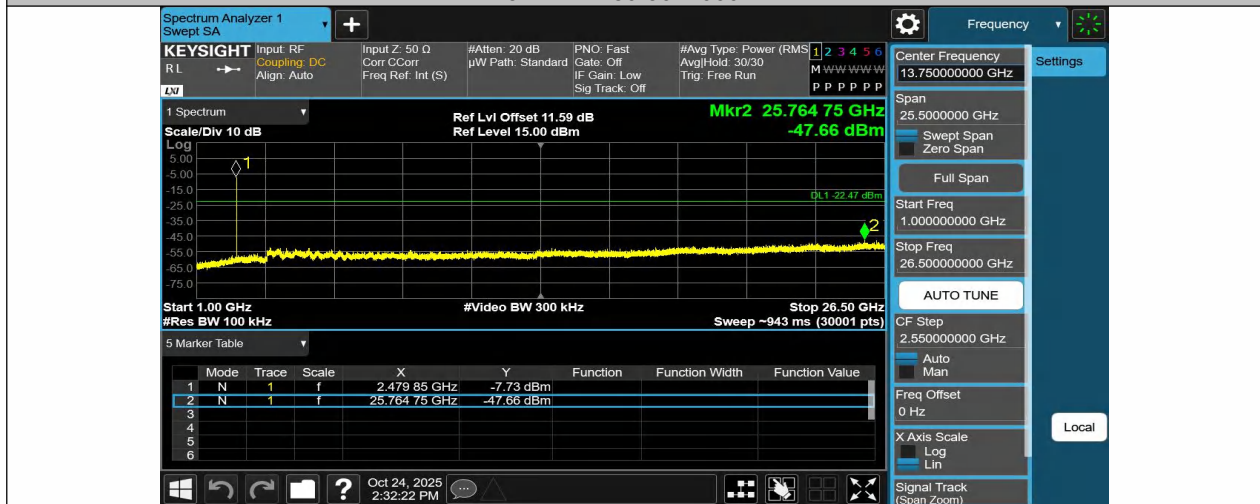


2DH5-Ant1-2480-1000~26500-PASS



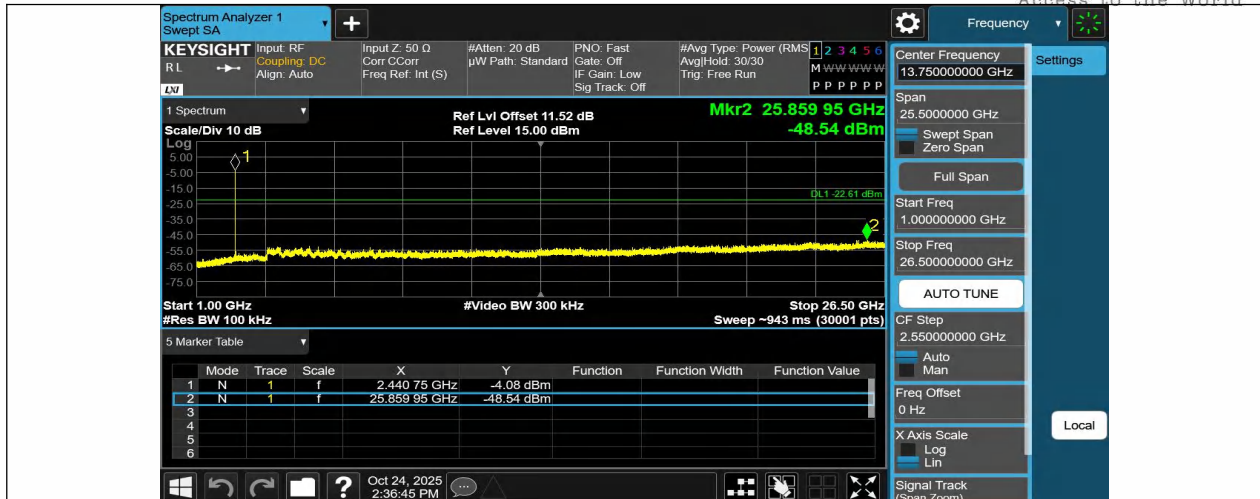

3DH5-Ant1-2441-1000~26500-PASS

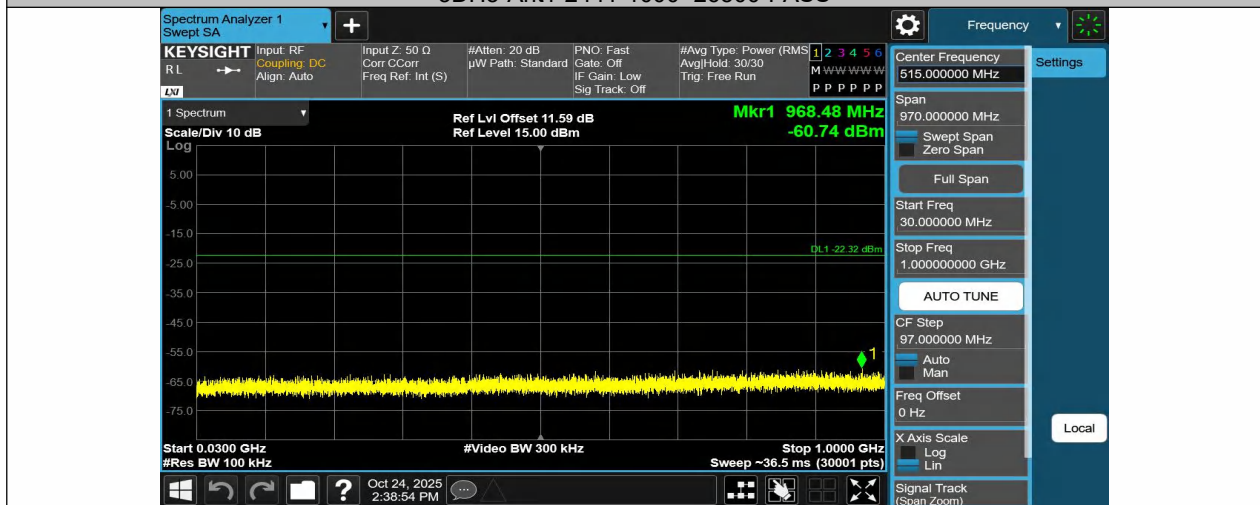


3DH5-Ant1-2480-30~1000-PASS




3DH5-Ant1-2480-1000~26500-PASS




DH5-Ant1-2402-PASS

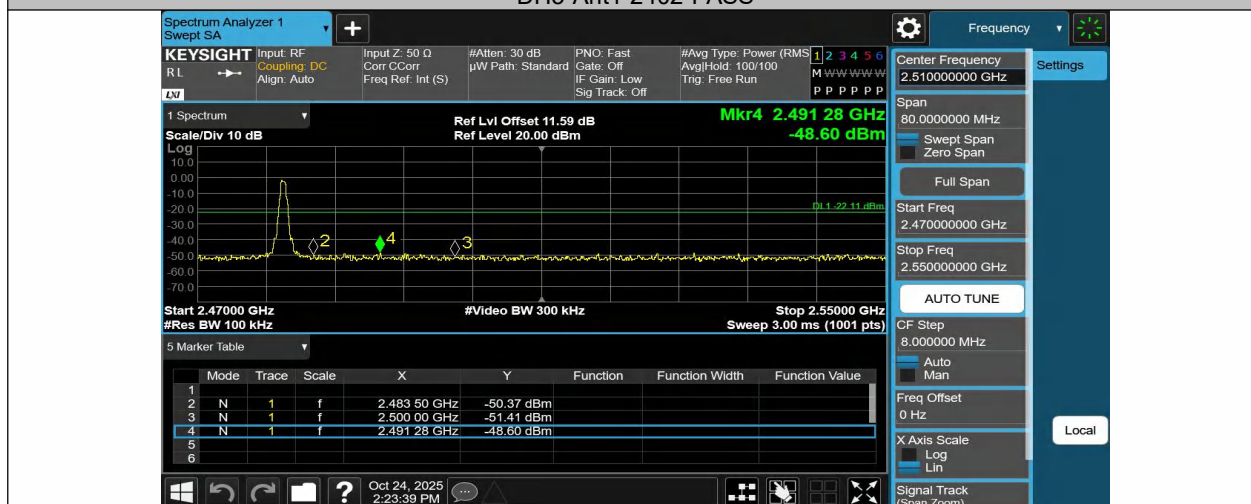


DH5-Ant1-2480-PASS

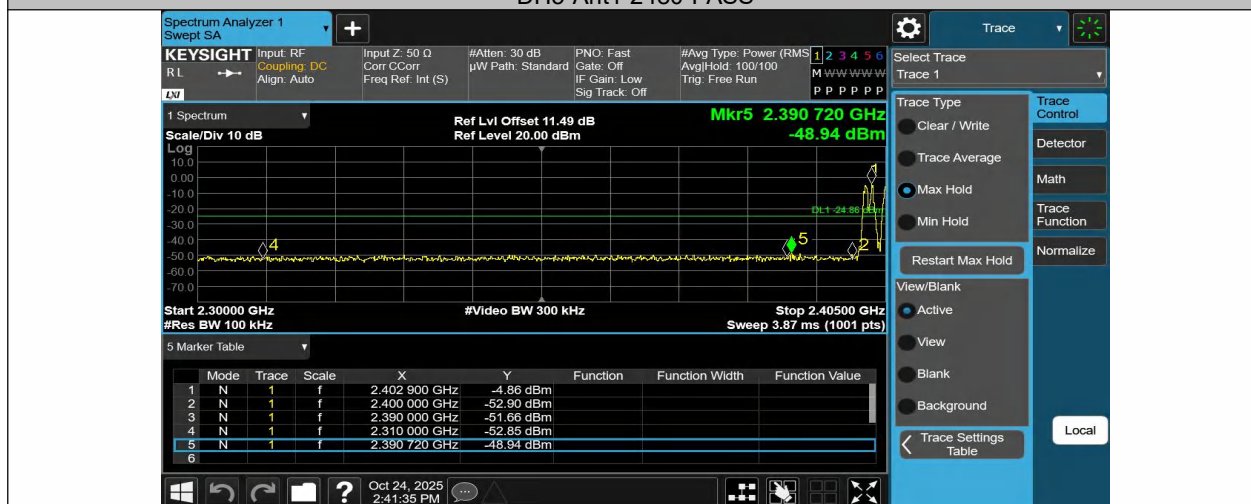


DH5-Ant1-Hop_2402-PASS

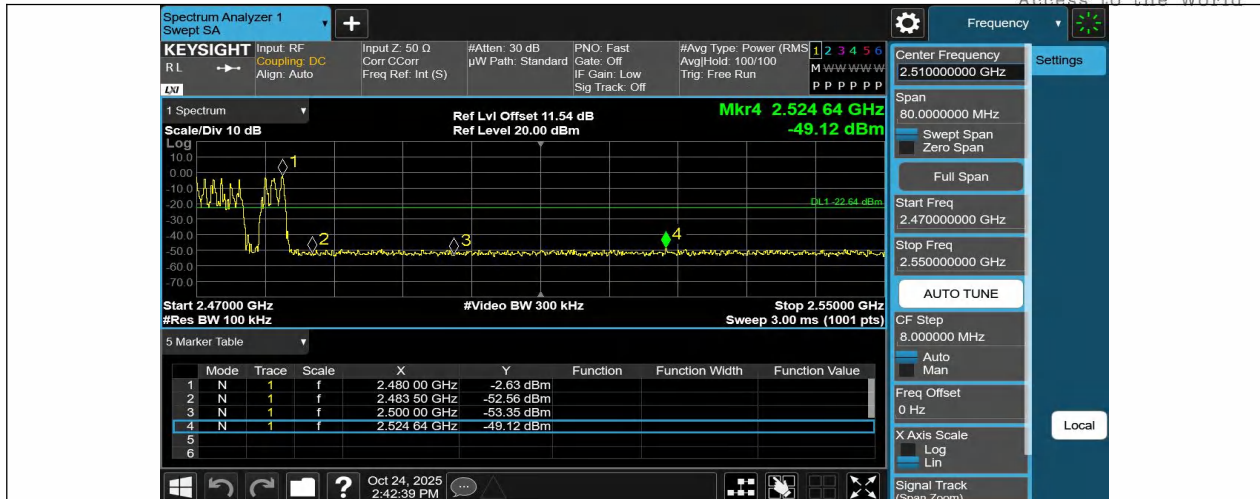


DH5-Ant1-Hop 2480-PASS

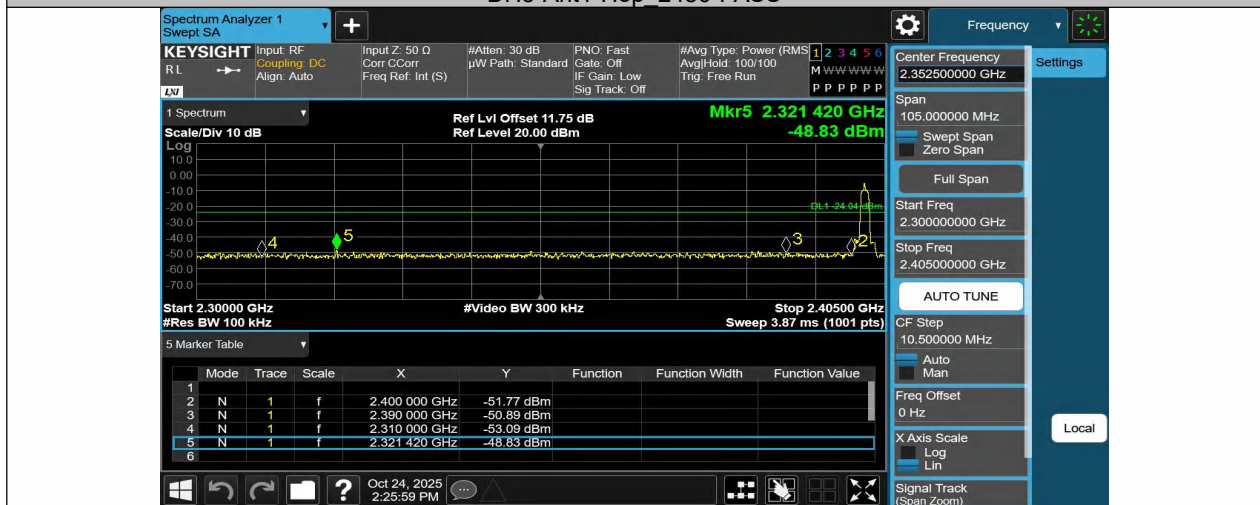


2DH5-Ant1-2402-PASS

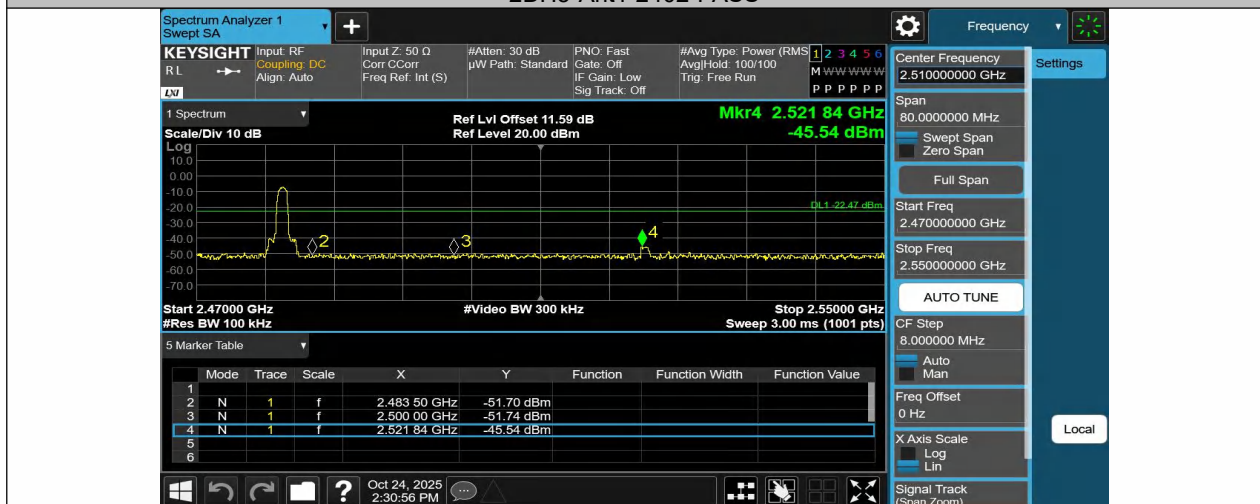


2DH5-Ant1-2480-PASS

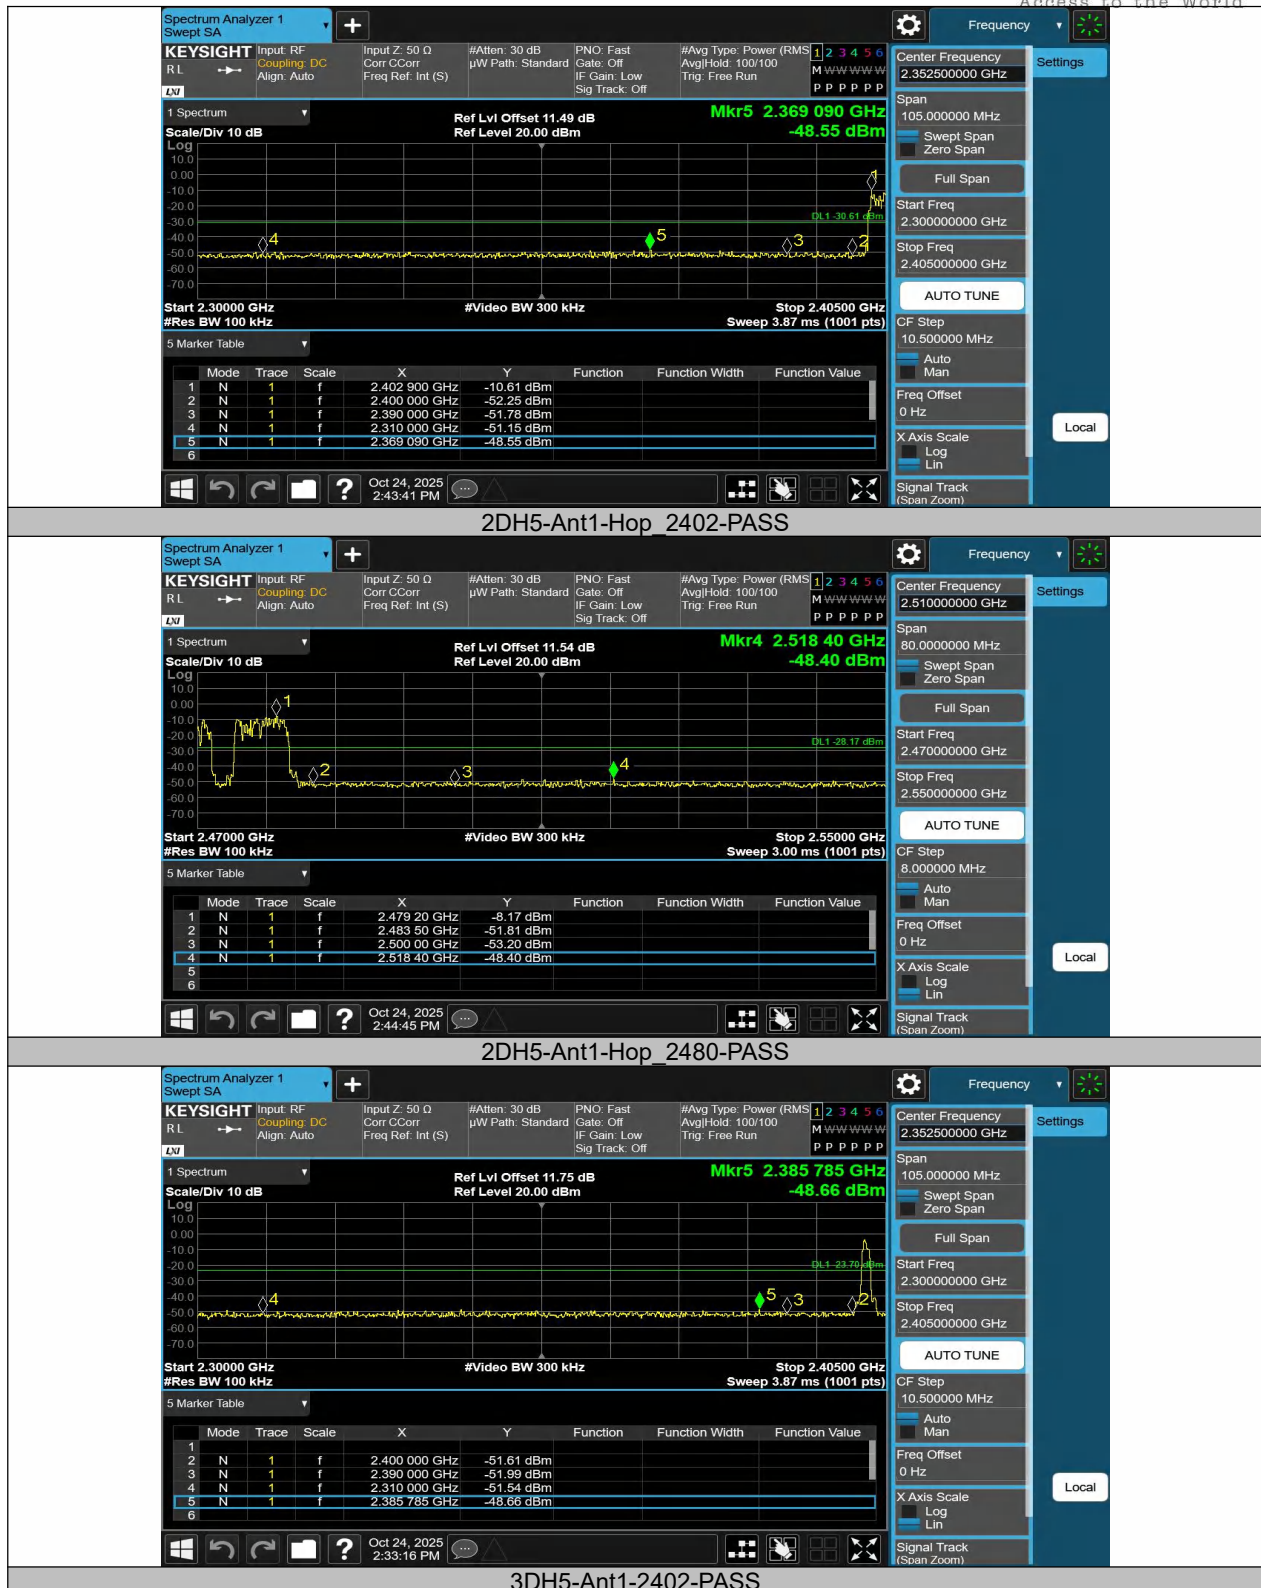


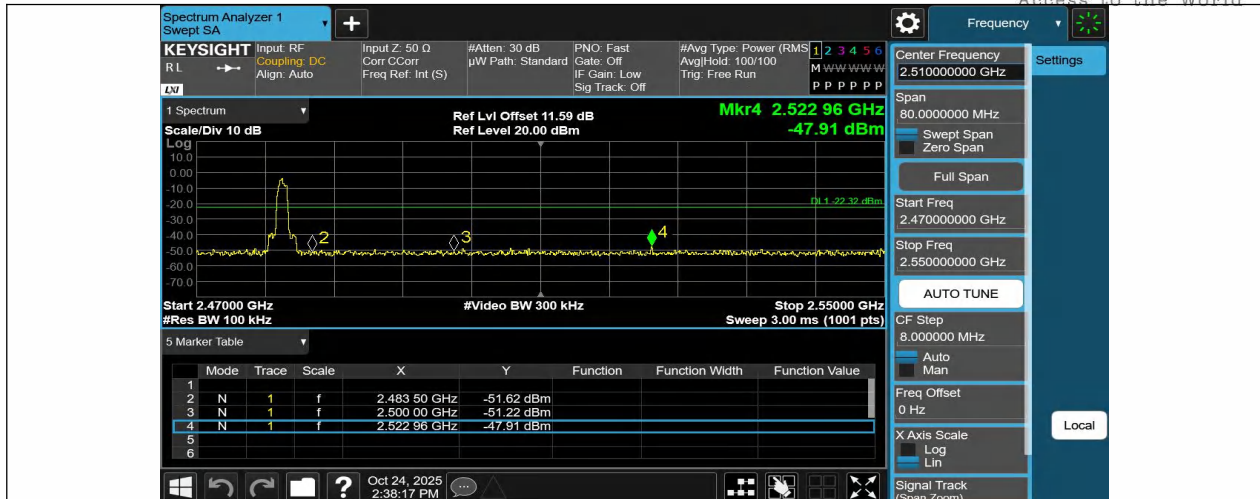

3DH5-Ant1-2480-PASS

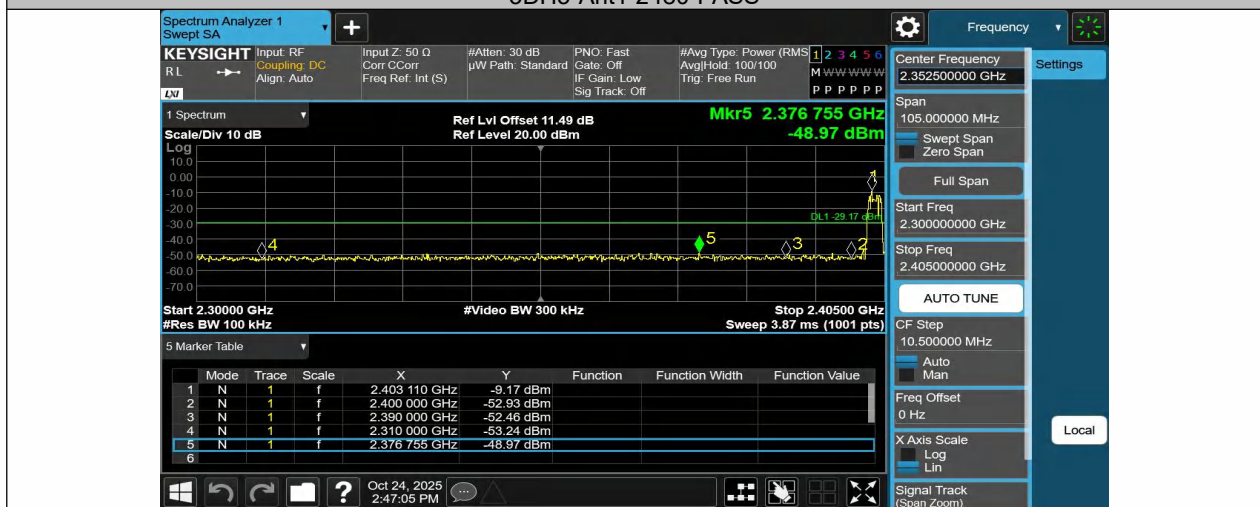

3DH5-Ant1-Hop 2402-PASS

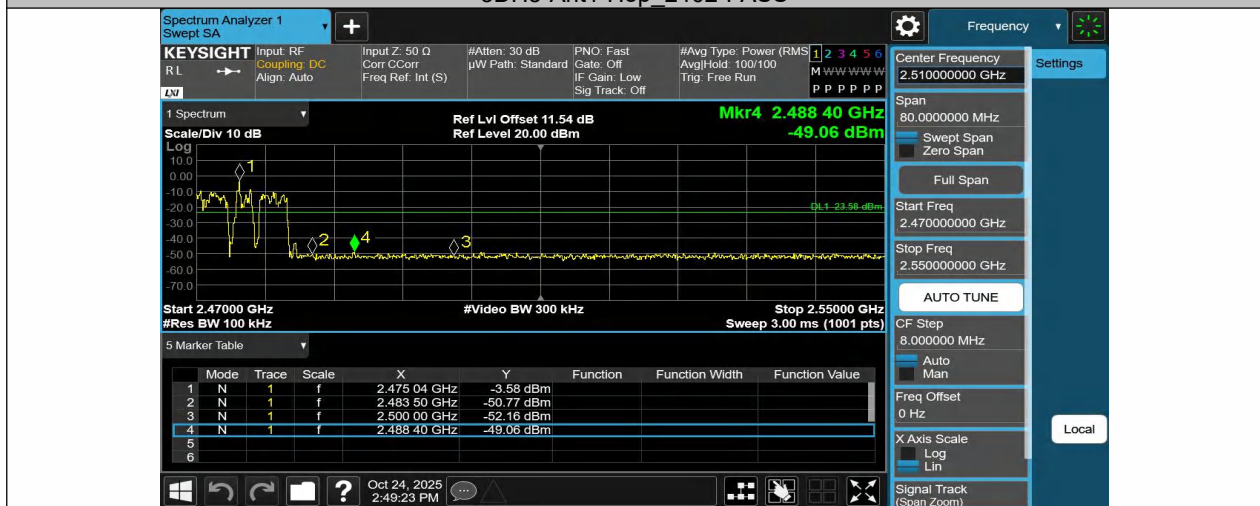

3DH5-Ant1-Hop 2480-PASS

9.7 RADIATED SPURIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Test Configuration

Test according to clause 7.2 radio frequency test setup 2

Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2014 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	23° C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4803.500	V	39.96	25.12	74.00	54.00	-34.04	-28.88
7206.000	V	42.62	27.79	74.00	54.00	-31.38	-26.21
14041.50	V	49.33	34.53	74.00	54.00	-24.67	-19.47
4803.500	H	43.44	28.61	74.00	54.00	-30.56	-25.39
7206.000	H	47.56	32.75	74.00	54.00	-26.44	-21.25
14255.00	H	49.58	34.78	74.00	54.00	-24.42	-19.22

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882.000	V	40.39	25.55	74.00	54.00	-33.61	-28.45
7323.000	V	44.88	30.06	74.00	54.00	-29.12	-23.94
14036.00	V	49.42	34.62	74.00	54.00	-24.58	-19.38
4882.000	H	41.35	26.52	74.00	54.00	-32.65	-27.48
7323.000	H	48.03	33.22	74.00	54.00	-25.97	-20.78
13913.00	H	50.48	35.68	74.00	54.00	-23.52	-18.32

Test mode: GFSK Frequency: Channel 79: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.000	V	42.11	27.28	74.00	54.00	-31.89	-26.72
7440.000	V	47.44	32.63	74.00	54.00	-26.56	-21.37
12596.00	V	51.13	36.33	74.00	54.00	-22.87	-17.67
4960.000	H	44.50	29.68	74.00	54.00	-29.5	-24.32
7440.000	H	48.04	33.63	74.00	54.00	-25.96	-20.37
17942.50	H	52.61	37.82	74.00	54.00	-21.39	-16.18

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2368.290	H	57.98	74.00	-16.02	43.10	54.00	-10.9
2346.482	V	57.64	74.00	-16.36	42.76	54.00	-11.24

Test mode: GFSK Frequency: Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2469.684	H	58.83	74.00	-15.17	43.95	54.00	-10.05
2467.786	V	57.63	74.00	-16.37	42.75	54.00	-11.25

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- Spurious Emission below 1GHz(30MHz to 1GHz)
- All modes have been tested, and the worst result recorded was report as below:

Mode:	TX2402
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
44.259	34.71	-14.21	20.50	40.00	19.50	QPK	100	V	214.1	PASS
52.019	35.22	-14	21.22	40.00	18.78	QPK	100	V	172.1	PASS
66.569	38.49	-17.57	20.92	40.00	19.08	QPK	100	V	271.5	PASS
102.071	35.07	-16.59	18.48	43.50	25.02	QPK	100	V	177.3	PASS
179.962	46.99	-18.88	28.11	43.50	15.39	QPK	100	V	226.3	PASS
381.043	37.40	-11.64	25.76	46.00	20.24	QPK	100	V	292.0	PASS

Mode:	TX2402
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
46.005	34.43	-14.49	19.94	40.00	20.06	QPK	200	H	357.1	PASS
55.317	36.57	-14.69	21.88	40.00	18.12	QPK	200	H	0.5	PASS
177.052	57.86	-18.92	38.94	43.50	4.56	QPK	200	H	0.5	PASS
179.998	59.12	-18.89	40.23	43.50	3.27	QPK	200	H	350.1	PASS
332.446	45.24	-13.74	31.50	46.00	14.50	QPK	100	H	160.9	PASS
359.994	47.14	-12.26	34.88	46.00	11.12	QPK	100	H	129.7	PASS

Mode:	TX2441
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
41.834	35.70	-14.73	20.97	40.00	19.03	QPK	100	V	282.1	PASS
52.213	34.94	-14.06	20.88	40.00	19.12	QPK	100	V	135.0	PASS
66.569	38.17	-17.57	20.60	40.00	19.40	QPK	100	V	359.9	PASS
100.810	34.72	-16.27	18.45	43.50	25.05	QPK	100	V	135.0	PASS
179.962	47.77	-18.88	28.89	43.50	14.61	QPK	100	V	250.4	PASS
314.113	42.25	-14.42	27.83	46.00	18.17	QPK	100	V	0.6	PASS

Mode:	TX2441
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
43.580	35.14	-14.31	20.83	40.00	19.17	QPK	100	H	37.0	PASS
54.250	35.78	-14.62	21.16	40.00	18.84	QPK	100	H	308.6	PASS
178.701	58.82	-18.68	40.14	43.50	3.36	QPK	200	H	16.0	PASS
202.272	45.73	-17.09	28.64	43.50	14.86	QPK	200	H	360	PASS
330.797	48.68	-13.79	34.89	46.00	11.11	QPK	100	H	316.4	PASS
359.994	47.51	-12.26	35.25	46.00	10.75	QPK	100	H	125.8	PASS

Mode:	TX2480
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
44.453	35.16	-14.25	20.91	40.00	19.09	QPK	100	V	22.3	PASS
52.310	35.10	-14.09	21.01	40.00	18.99	QPK	100	V	205.5	PASS
104.399	34.97	-15.73	19.24	43.50	24.26	QPK	100	V	0.1	PASS
138.931	39.53	-19.62	19.91	43.50	23.59	QPK	100	V	255.6	PASS
179.962	48.09	-18.88	29.21	43.50	14.29	QPK	100	V	133.2	PASS
255.816	38.45	-15.88	22.57	46.00	23.43	QPK	100	V	357.2	PASS

Mode:	TX2480
Environment:	Temp:21℃; Humi:59%

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
52.601	35.89	-14.19	21.70	40.00	18.30	QPK	200	H	255.7	PASS
105.466	34.84	-15.87	18.97	43.50	24.53	QPK	100	H	94.0	PASS
180.059	59.07	-18.84	40.23	43.50	3.27	QPK	200	H	198.3	PASS
193.736	47.26	-17.49	29.77	43.50	13.73	QPK	100	H	2.2	PASS
330.118	44.80	-13.81	30.99	46.00	15.01	QPK	100	H	288.4	PASS
349.227	47.35	-13.11	34.24	46.00	11.76	QPK	100	H	306.8	PASS

9.8 CONDUCTED EMISSION TEST

Applicable Standard

According to FCC Part 15.207(a)

Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

Test according to clause 7.3 conducted emission test setup

Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

Test Results

N/A

9.9 ANTENNA APPLICATION

Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Result

Pass.

The EUT has 1 Chip Antenna: The Chip Antenna Gain is 2.71 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

10 APPENDIX PHOTOGRAPHS OF EUT

Please refer to the file of External Photo and Internal Photo.



11 APPENDIX PHOTOGRAPHS OF TEST SETUP

Please refer to the file of Test Setup Photo.

