



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1100
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2402MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

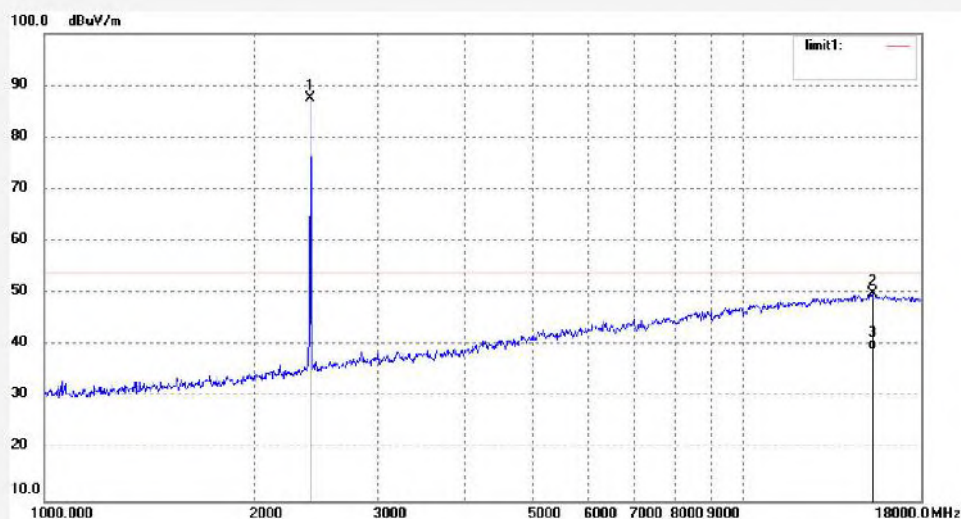

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.07	-7.45	87.62	/	/	peak			
2	15310.072	9.36	40.48	49.84	74.00	-24.16	peak			
3	15310.072	-1.25	40.48	39.23	54.00	-14.77	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1103
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2441MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

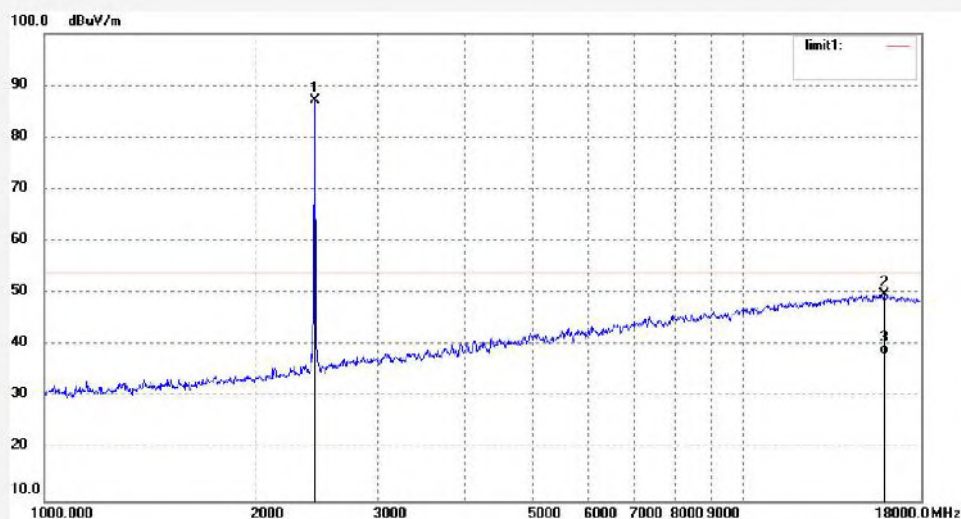

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	94.51	-7.35	87.16	/	/	peak			
2	15942.303	9.65	40.01	49.66	74.00	-24.34	peak			
3	15942.303	-1.81	40.01	38.20	54.00	-15.80	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1104
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2441MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

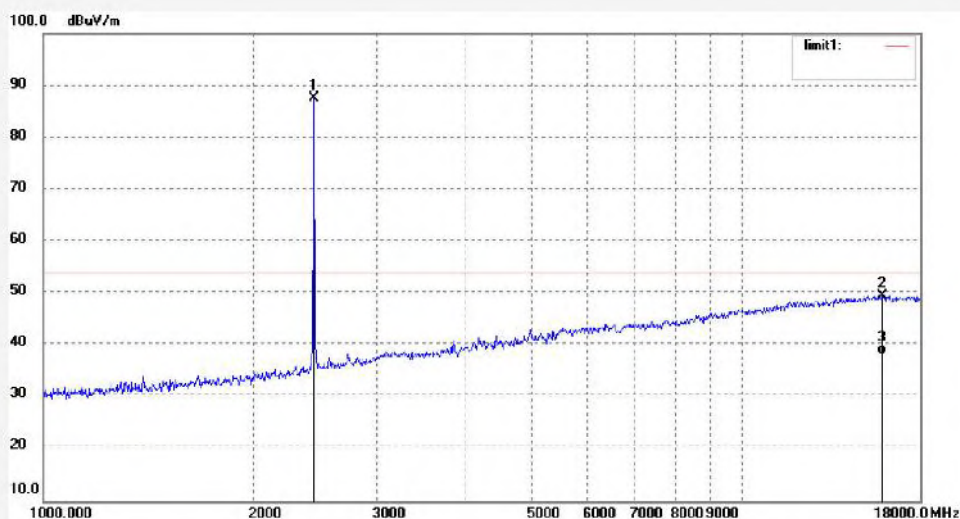

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	94.82	-7.35	87.47	/	/	peak			
2	15850.410	9.56	40.03	49.59	74.00	-24.41	peak			
3	15850.410	-1.89	40.03	38.14	54.00	-15.86	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1105

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: TX 2480MHz

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP UK LTD

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/04/14/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

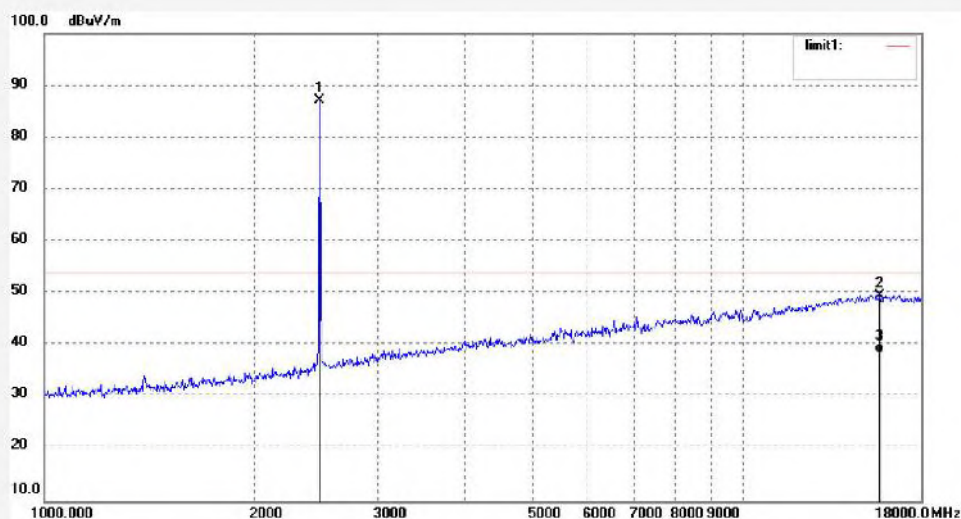

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	94.34	-7.37	86.97	/	/	peak			
2	15713.564	9.45	40.06	49.51	74.00	-24.49	peak			
3	15713.564	-1.58	40.06	38.48	54.00	-15.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1106
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2480MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

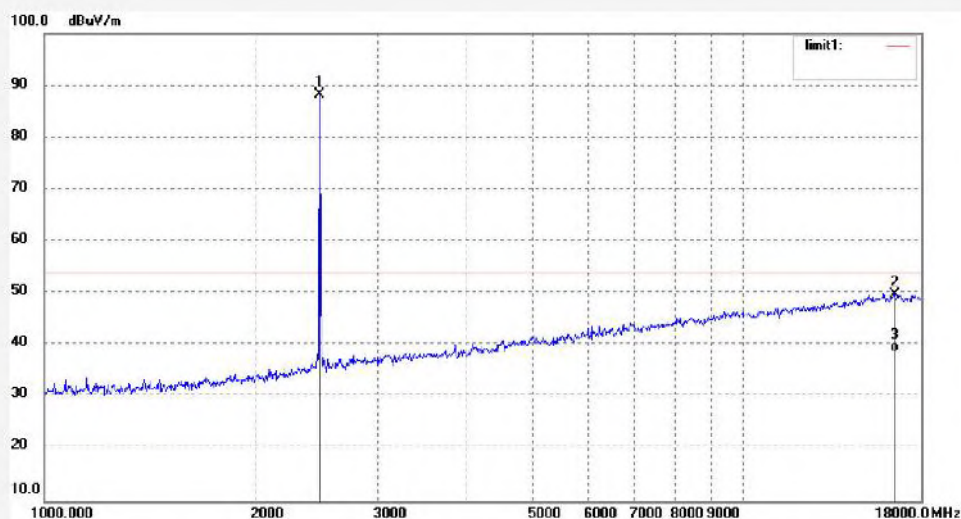

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.56	-7.37	88.19	/	/	peak			
2	16504.954	9.40	40.31	49.71	74.00	-24.29	peak			
3	16504.954	-1.58	40.31	38.73	54.00	-15.27	AVG			

18GHz - 26.5GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1109

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: TX 2402MHz

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP UK LTD

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/04/14/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

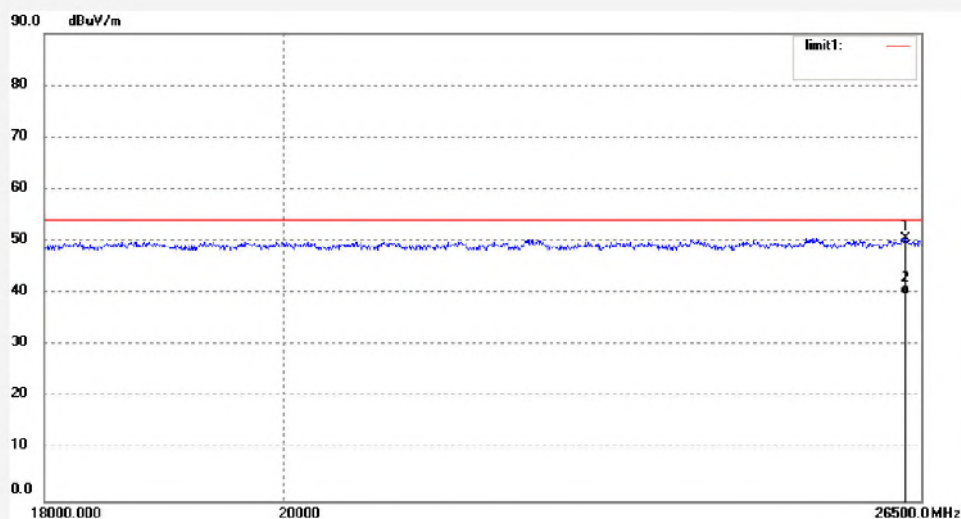

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26316.150	33.51	17.02	50.53	74.00	-23.47	peak			
2	26316.150	22.62	17.02	39.64	54.00	-14.36	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1110	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/04/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Mini Metal Bluetooth Speaker	Engineer Signature: LGWADE
Mode: TX 2402MHz	Distance: 3m
Model: MMBTSPKPKPRM	
Manufacturer: THUMBS UP UK LTD	

Note:

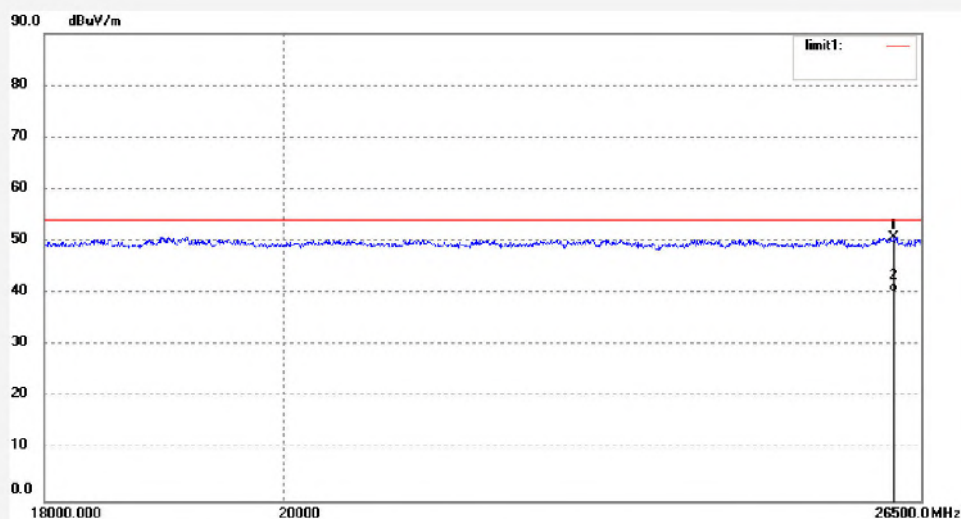

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26184.163	34.18	16.50	50.68	74.00	-23.32	peak			
2	26184.163	23.56	16.50	40.06	54.00	-13.94	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1111	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/04/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Mini Metal Bluetooth Speaker	Engineer Signature: LGWADE
Mode: TX 2441MHz	Distance: 3m
Model: MMBTSPKPKPRM	
Manufacturer: THUMBS UP UK LTD	

Note:

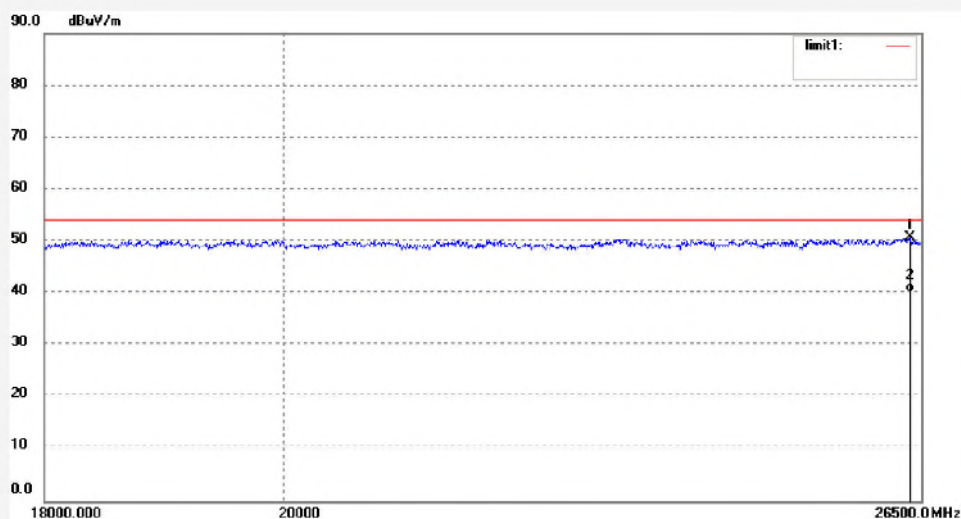

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26367.091	34.23	16.50	50.73	74.00	-23.27	peak			
2	26367.091	23.57	16.50	40.07	54.00	-13.93	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1112

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: TX 2441MHz

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP UK LTD

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/04/14/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

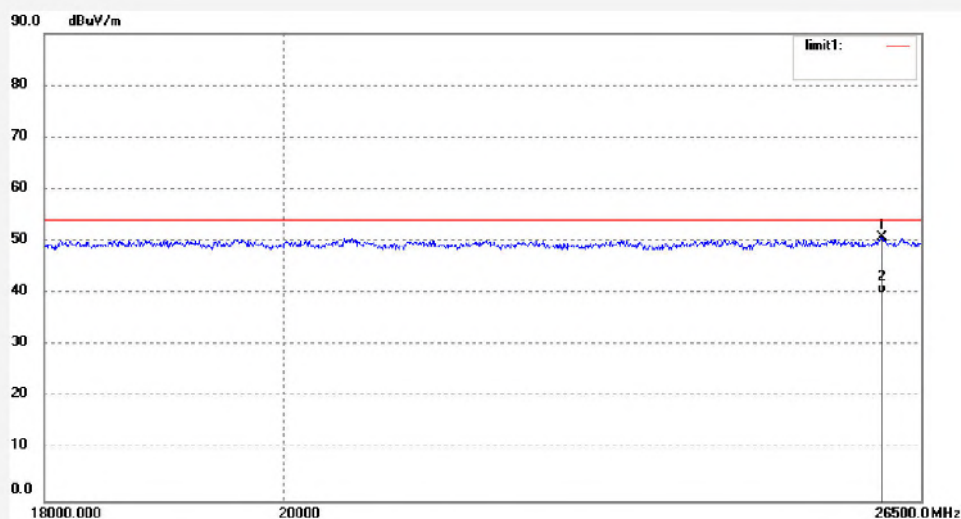

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26042.764	33.56	17.20	50.76	74.00	-23.24	peak			
2	26042.764	22.84	17.20	40.04	54.00	-13.96	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1113	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/04/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Mini Metal Bluetooth Speaker	Engineer Signature: LGWADE
Mode: TX 2480MHz	Distance: 3m
Model: MMBTSPKPKPRM	
Manufacturer: THUMBS UP UK LTD	

Note:

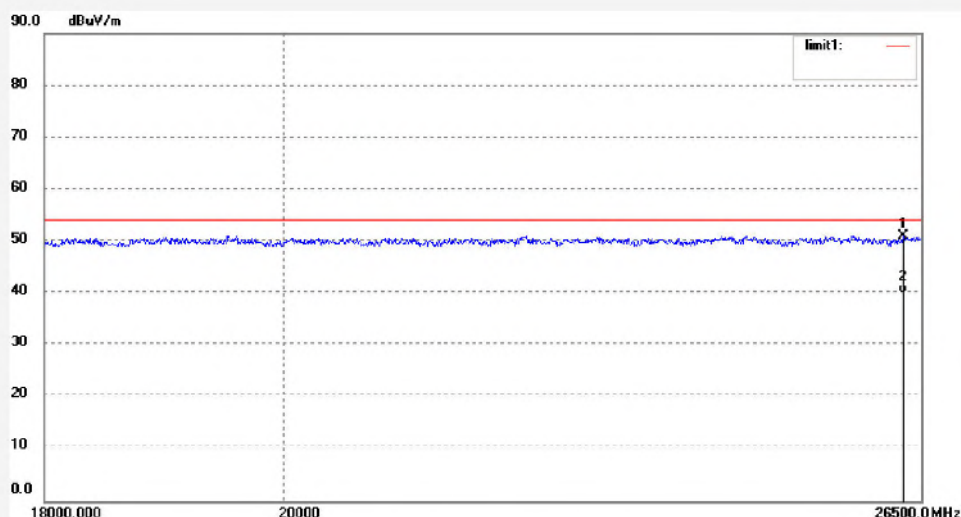

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26285.633	33.92	17.04	50.96	74.00	-23.04	peak			
2	26285.633	22.81	17.04	39.85	54.00	-14.15	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1114	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 16/04/14/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Mini Metal Bluetooth Speaker	Engineer Signature: LGWADE
Mode: TX 2480MHz	Distance: 3m
Model: MMBTSPKPKPRM	
Manufacturer: THUMBS UP UK LTD	

Note:

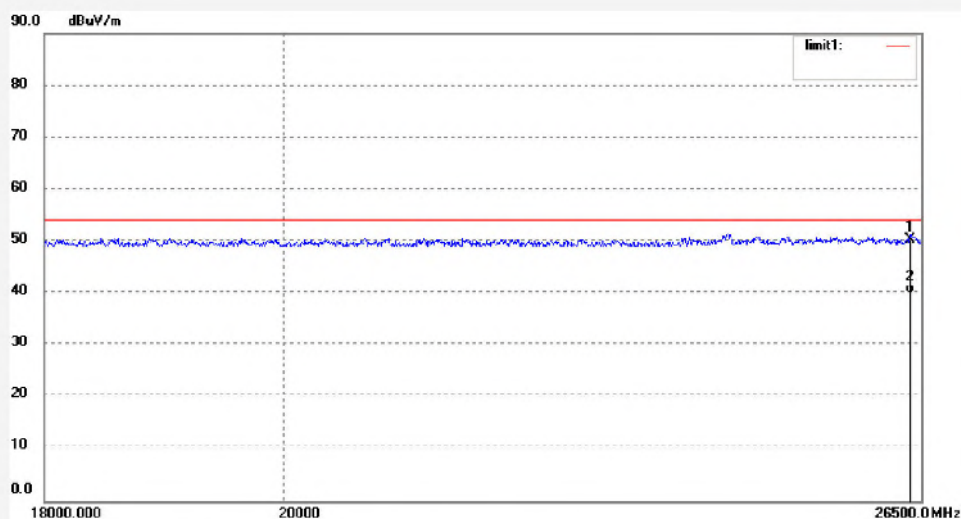

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26367.091	33.90	16.50	50.40	74.00	-23.60	peak			
2	26367.091	23.36	16.50	39.86	54.00	-14.14	AVG			

Appendix B.2: Test Plots of Band Edge (Radiated)

Low Channel



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1101

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: TX 2402MHz

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP UK LTD

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/04/14/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

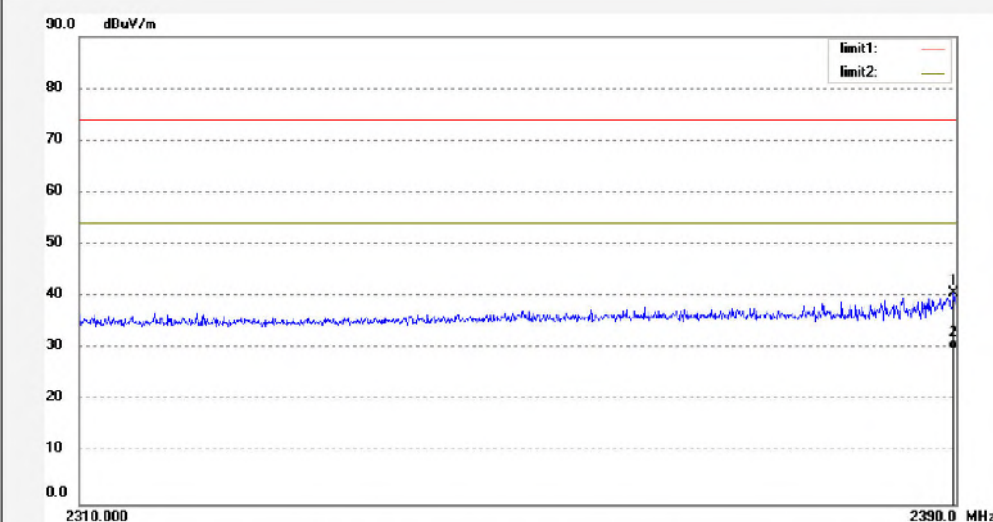

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.760	48.23	-7.53	40.70	74.00	-33.30	peak			
2	2389.760	37.35	-7.53	29.82	54.00	-24.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1102
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2402MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Horizontal
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

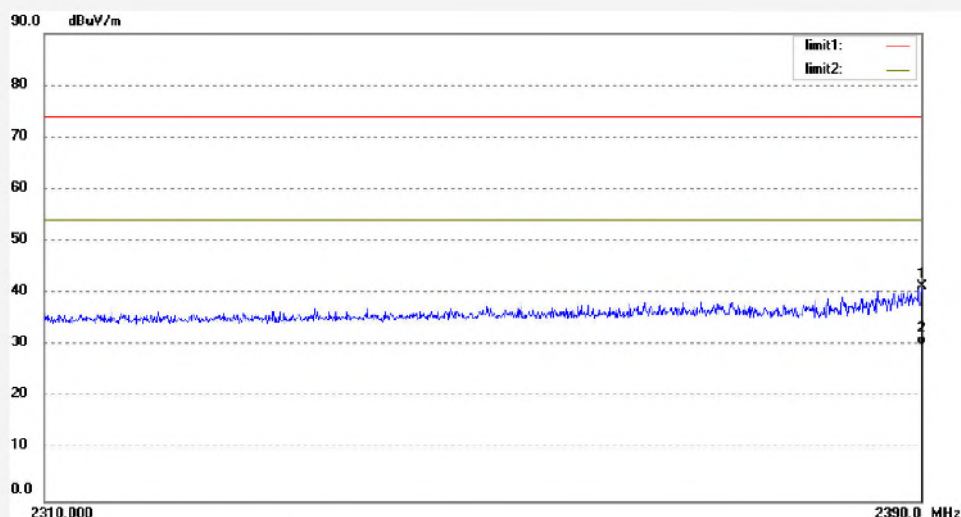

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	48.84	-7.53	41.31	74.00	-32.69	peak			
2	2390.000	37.68	-7.53	30.15	54.00	-23.85	AVG			

High Channel



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1107

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: TX 2480MHz

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP UK LTD

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/04/14/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

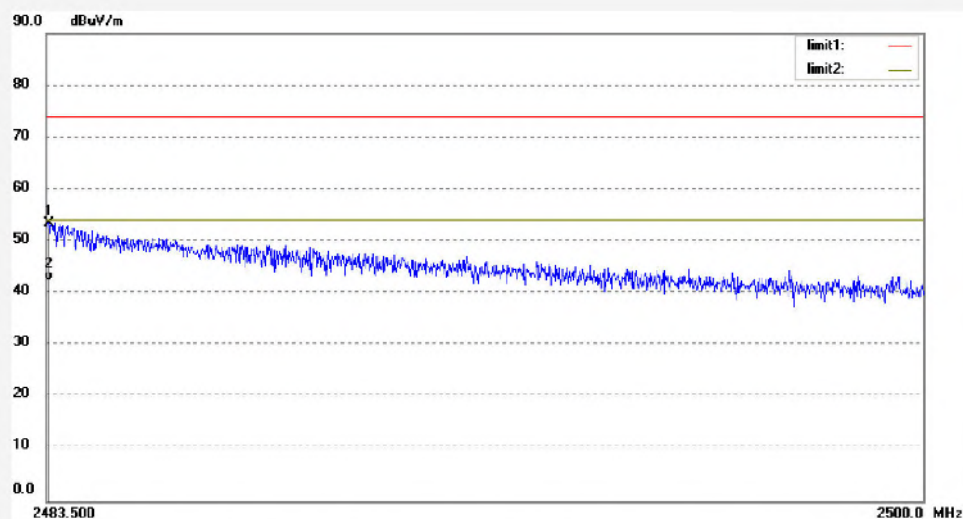

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.550	60.90	-7.37	53.53	74.00	-20.47	peak			
2	2483.550	49.85	-7.37	42.48	54.00	-11.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1108
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Mini Metal Bluetooth Speaker
Mode: TX 2480MHz
Model: MMBTSPKPKPRM
Manufacturer: THUMBS UP UK LTD

Polarization: Vertical
Power Source: DC 3.7V
Date: 16/04/14/
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

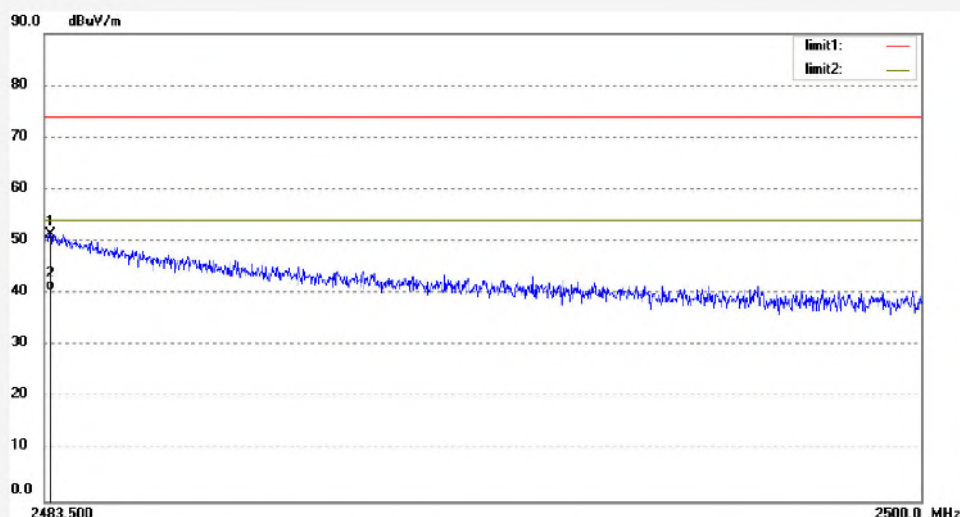

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.615	58.76	-7.37	51.39	74.00	-22.61	peak			
2	2483.615	47.89	-7.37	40.52	54.00	-13.48	AVG			

Appendix B.3: Test Plots of Conducted Emission

C Mode

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: Mini Metal Bluetooth Speaker M/N:MMBTSPKPKPRM
 Manufacturer: THUMBS UP(UK) LTD
 Operating Condition: BT
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 4/13/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

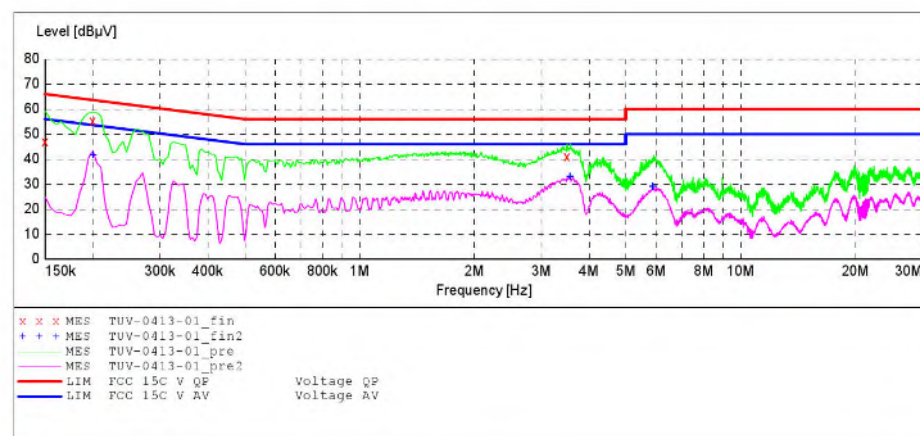

MEASUREMENT RESULT: "TUV-0413-01_fin"

4/13/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	47.00	10.5	66	19.0	QP	N	GND
0.200000	55.30	10.5	64	8.3	QP	N	GND
3.510000	41.00	11.1	56	15.0	QP	N	GND

MEASUREMENT RESULT: "TUV-0413-01_fin2"

4/13/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.200000	41.60	10.5	54	12.0	AV	N	GND
3.570000	32.90	11.1	46	13.1	AV	N	GND
5.880000	28.80	11.2	50	21.2	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: Mini Metal Bluetooth Speaker M/N:MMBTSPKPKPRM
 Manufacturer: THUMBS UP(UK) LTD
 Operating Condition: BT
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 4/13/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

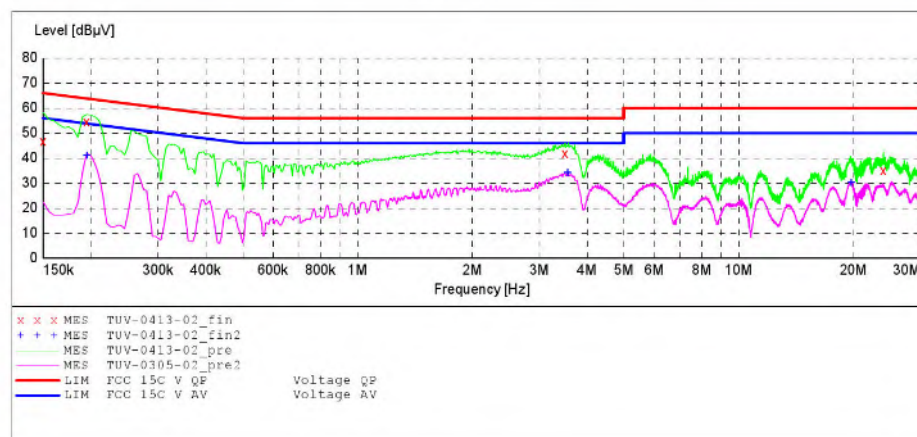

MEASUREMENT RESULT: "TUV-0413-02_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	46.60	10.5	66	19.4	QP	L1	GND
0.195000	54.30	10.5	64	9.5	QP	L1	GND
3.510000	41.70	11.1	56	14.3	QP	L1	GND
23.995000	35.00	11.5	60	25.0	QP	L1	GND

MEASUREMENT RESULT: "TUV-0413-02_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	41.00	10.5	54	12.8	AV	L1	GND
3.560000	34.20	11.1	46	11.8	AV	L1	GND
19.735000	29.90	11.4	50	20.1	AV	L1	GND

D Mode

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Mini Metal Bluetooth Speaker M/N:MMBTSPKPKPRM
 Manufacturer: THUMBS UP(UK) LTD
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 4/13/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average			
			QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

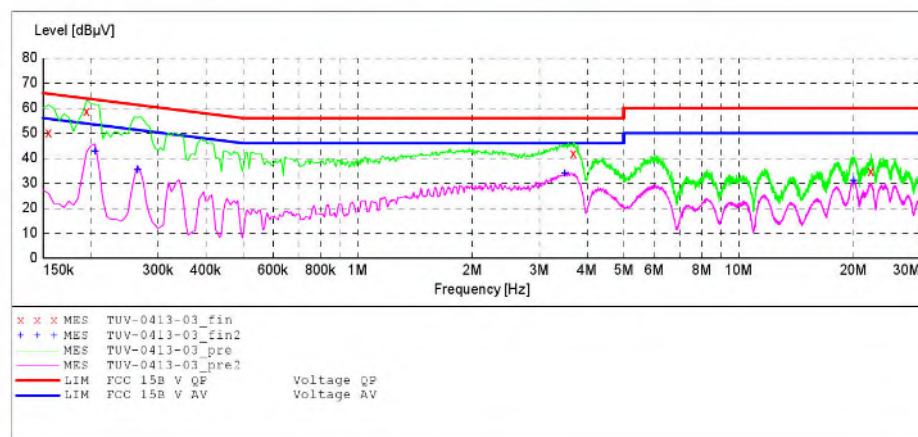

MEASUREMENT RESULT: "TUV-0413-03_fin"

4/13/2016	Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
	0.155000	50.00	10.5	66	15.7	QP	L1	GND
	0.195000	58.60	10.5	64	5.2	QP	L1	GND
	3.690000	41.70	11.1	56	14.3	QP	L1	GND
	22.255000	34.50	11.4	60	25.5	QP	L1	GND

MEASUREMENT RESULT: "TUV-0413-03_fin2"

4/13/2016	Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
	0.205000	42.60	10.5	53	10.8	AV	L1	GND
	0.265000	35.20	10.6	51	16.1	AV	L1	GND
	3.500000	33.80	11.1	46	12.2	AV	L1	GND
	20.020000	30.90	11.4	50	19.1	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Mini Metal Bluetooth Speaker M/N:MMBTSPKPKPRM
 Manufacturer: THUMBS UP(UK) LTD
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 4/13/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

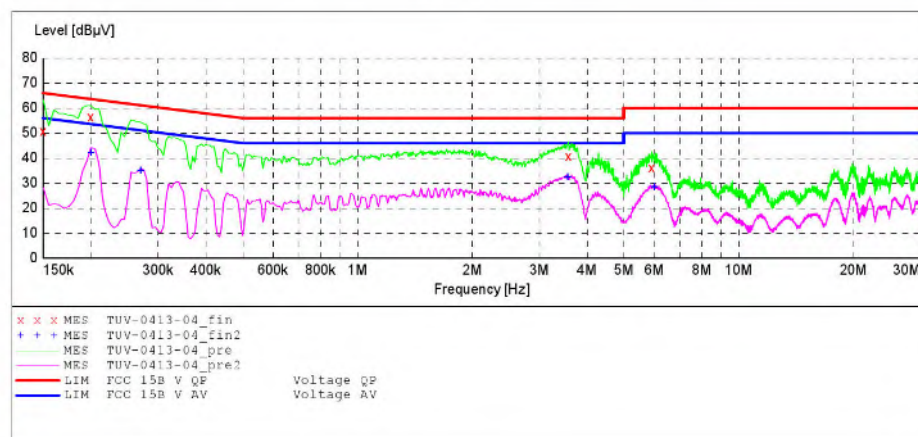

MEASUREMENT RESULT: "TUV-0413-04_fin"

4/13/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	50.50	10.5	66	15.5	QP	N	GND
0.200000	56.50	10.5	64	7.1	QP	N	GND
3.500000	40.50	11.1	56	15.5	QP	N	GND
5.920000	36.00	11.2	60	24.0	QP	N	GND

MEASUREMENT RESULT: "TUV-0413-04_fin2"

4/13/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.200000	42.00	10.5	54	11.6	AV	N	GND
0.270000	34.80	10.6	51	16.3	AV	N	GND
3.560000	32.30	11.1	46	13.7	AV	N	GND
6.010000	28.30	11.2	50	21.7	AV	N	GND

Appendix B.4: Test Plots of Radiated Emission

D Mode



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGWADE #1590

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: Charging

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP(UK) LTD

Polarization: Vertical

Power Source: DC 5V


Date: 16/04/13/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

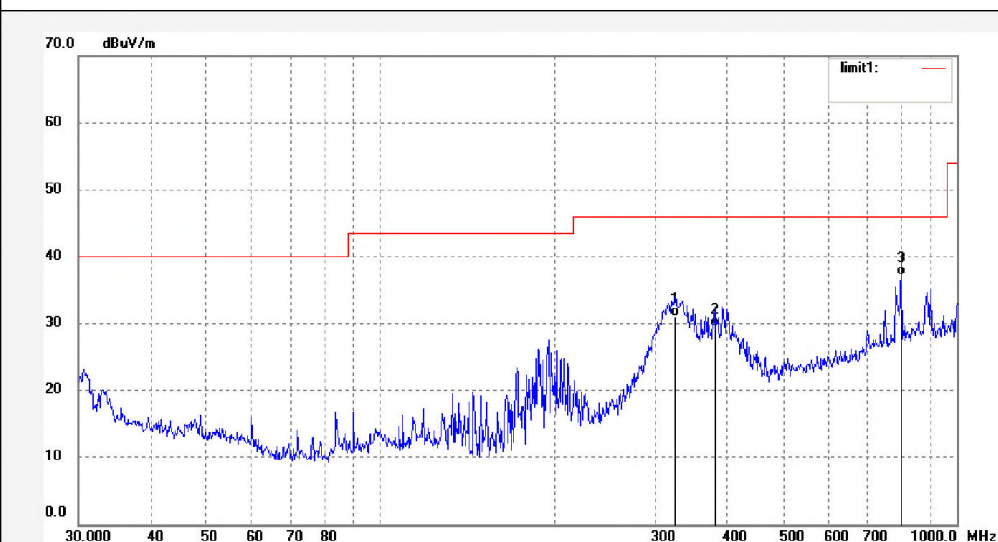

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	324.4560	39.54	-8.56	30.98	46.00	-15.02	QP			
2	379.9141	36.89	-7.34	29.55	46.00	-16.45	QP			
3	798.9796	37.13	0.02	37.15	46.00	-8.85	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGWADE #1591

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: Charging

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP(UK) LTD

Polarization: Horizontal

Power Source: DC 5V


Date: 16/04/13/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

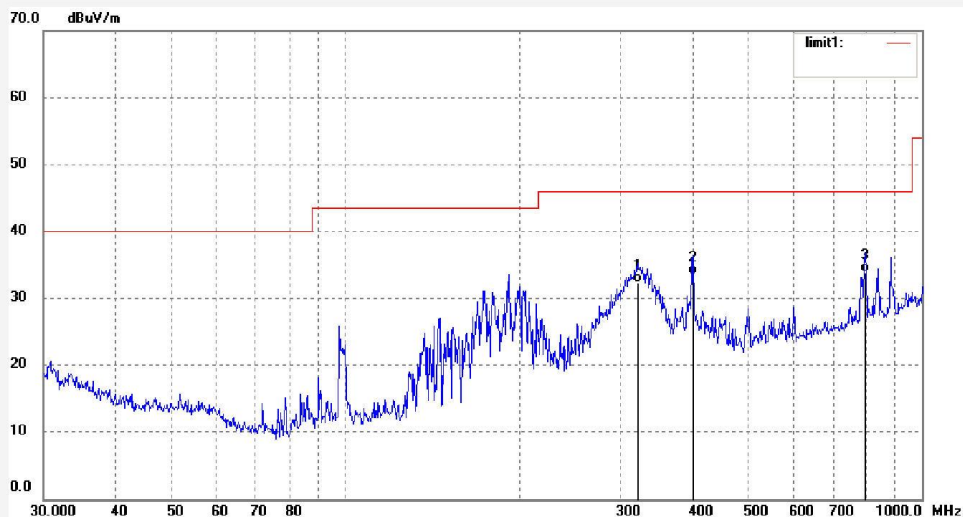

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	321.0607	41.03	-8.70	32.33	46.00	-13.67	QP			
2	400.4318	40.26	-6.81	33.45	46.00	-12.55	QP			
3	796.1829	33.84	-0.06	33.78	46.00	-12.22	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGWADE #1600

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: Charging

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP(UK) LTD

Polarization: Horizontal

Power Source: DC 5V


Date: 16/04/13/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

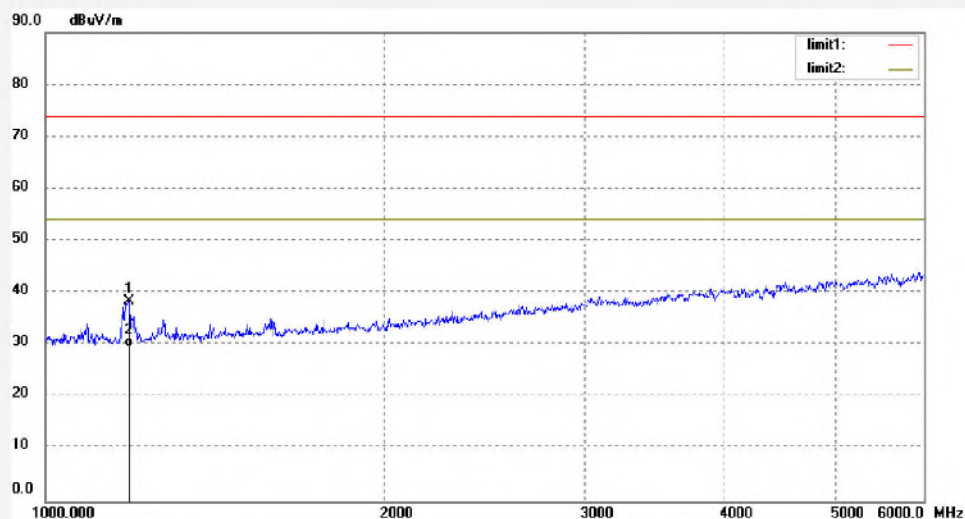

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1185.562	50.91	-12.50	38.41	74.00	-35.59	peak			
2	1185.562	42.13	-12.50	29.63	54.00	-24.37	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGWADE #1601

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Mini Metal Bluetooth Speaker

Mode: Charging

Model: MMBTSPKPKPRM

Manufacturer: THUMBS UP(UK) LTD

Polarization: Vertical

Power Source: DC 5V


Date: 16/04/13/

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

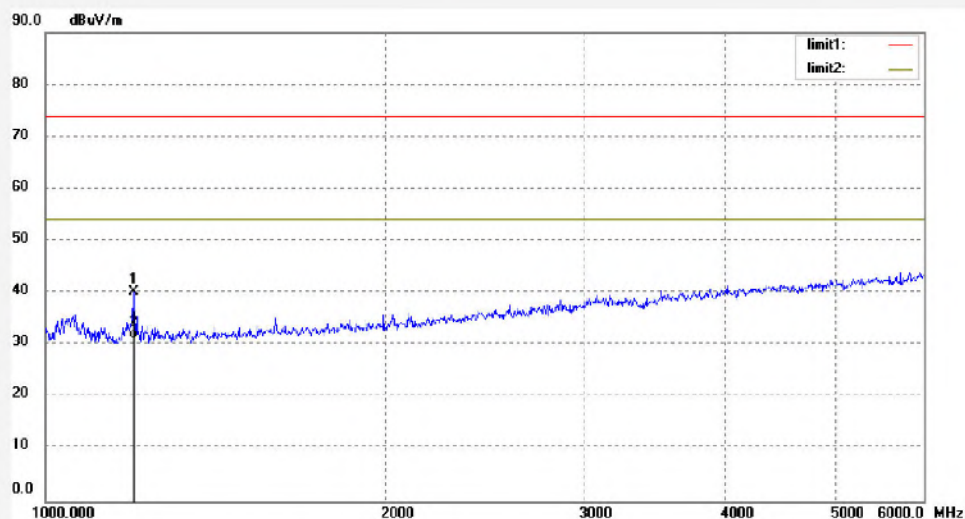

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1198.377	52.72	-12.49	40.23	74.00	-33.77	peak			
2	1198.377	43.56	-12.49	31.07	54.00	-22.93	AVG			