

# TEST REPORT

Report No.: BCTC2106267028E

Applicant: Shenzhen Patpet Technology Co., Ltd.

Product Name: Dog Training Collar

Model/Type Ref.: p-collar 920

Tested Date: 2021-06-23 to 2021-07-07

Issued Date: 2021-08-05

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2AHHYP-COLLAR920

Product Name: Dog Training Collar  
Trademark: N/A  
Model/Type Ref.: p-collar 920  
p-collar 910,p-collar 920,p-collar 930,p-collar 940,  
p-collar 950,p-collar 960,p-collar 970,p-collar 980,  
p-collar 990  
Prepared For: Shenzhen Patpet Technology Co., Ltd.  
Address: 3rd Floor, Factory Building, No. 1 Qinhui Road, Gushu  
Community, Xixiang Street, Baoan District, Shenzhen,  
Guangdong, China  
Manufacturer: Shenzhen Patpet Technology Co., Ltd.  
Address: 3rd Floor, Factory Building, No. 1 Qinhui Road, Gushu  
Community, Xixiang Street, Baoan District, Shenzhen,  
Guangdong, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building SB, Pengzhou Industrial Park, No.158,  
Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District,  
Shenzhen, Guangdong, China  
Sample Received Date: 2021-06-23  
Sample tested Date: 2021-06-23 to 2021-07-07  
Issue Date: 2021-08-05  
Report No.: BCTC2106267028E  
Test Standards: FCC Part15.231  
ANSI C63.10-2013  
Test Results: PASS

Tested by:



Sam zeng/Project Handler

Approved by:



Zero Zhou/Reviewer


*The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.*

**TABLE OF CONTENT**

| Test Report Declaration                          | Page      |
|--------------------------------------------------|-----------|
| <b>1. VERSION</b>                                | <b>5</b>  |
| <b>2. TEST SUMMARY</b>                           | <b>6</b>  |
| <b>3. MEASUREMENT UNCERTAINTY</b>                | <b>7</b>  |
| <b>4. PRODUCT INFORMATION AND TEST SETUP</b>     | <b>8</b>  |
| 4.1 Product Information                          | 8         |
| 4.2 Test Setup Configuration                     | 8         |
| 4.3 Support Equipment                            | 9         |
| 4.4 Channel List                                 | 9         |
| 4.5 Test Mode                                    | 9         |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> | <b>10</b> |
| 5.1 Test Facility                                | 10        |
| 5.2 Test Instrument Used                         | 10        |
| <b>6. CONDUCTED EMISSIONS</b>                    | <b>12</b> |
| 6.1 Block Diagram Of Test Setup                  | 12        |
| 6.2 Limit                                        | 12        |
| 6.3 Test procedure                               | 12        |
| 6.4 EUT operating Conditions                     | 12        |
| 6.5 Test Result                                  | 13        |
| <b>7. RADIATED EMISSIONS</b>                     | <b>15</b> |
| 7.1 Block Diagram Of Test Setup                  | 15        |
| 7.2 Limit                                        | 16        |
| 7.3 Test procedure                               | 17        |
| 7.4 EUT operating Conditions                     | 19        |
| 7.5 Test Result                                  | 19        |
| <b>8. BANDWIDTH TEST</b>                         | <b>23</b> |
| 8.1 Block Diagram Of Test Setup                  | 23        |
| 8.2 Limit                                        | 23        |
| 8.3 Test procedure                               | 23        |
| 8.4 EUT operating Conditions                     | 23        |
| 8.5 Test Result                                  | 24        |
| <b>9. CALCULATION OF AVERAGE FACTOR</b>          | <b>25</b> |
| <b>10. DWEELL TIME</b>                           | <b>27</b> |
| 10.1 Block Diagram Of Test Setup                 | 27        |
| 10.2 Limit                                       | 27        |
| 10.3 Test procedure                              | 27        |
| 10.4 Test Result                                 | 28        |
| <b>11. ANTENNA REQUIREMENT</b>                   | <b>29</b> |
| 11.1 STANDARD REQUIREMENT                        | 29        |
| 11.2 EUT ANTENNA                                 | 29        |


|                                             |           |
|---------------------------------------------|-----------|
| <b>12. EUT PHOTOGRAPHS .....</b>            | <b>30</b> |
| <b>13. EUT TEST SETUP PHOTOGRAPHS .....</b> | <b>31</b> |

*(Note: N/A means not applicable)*

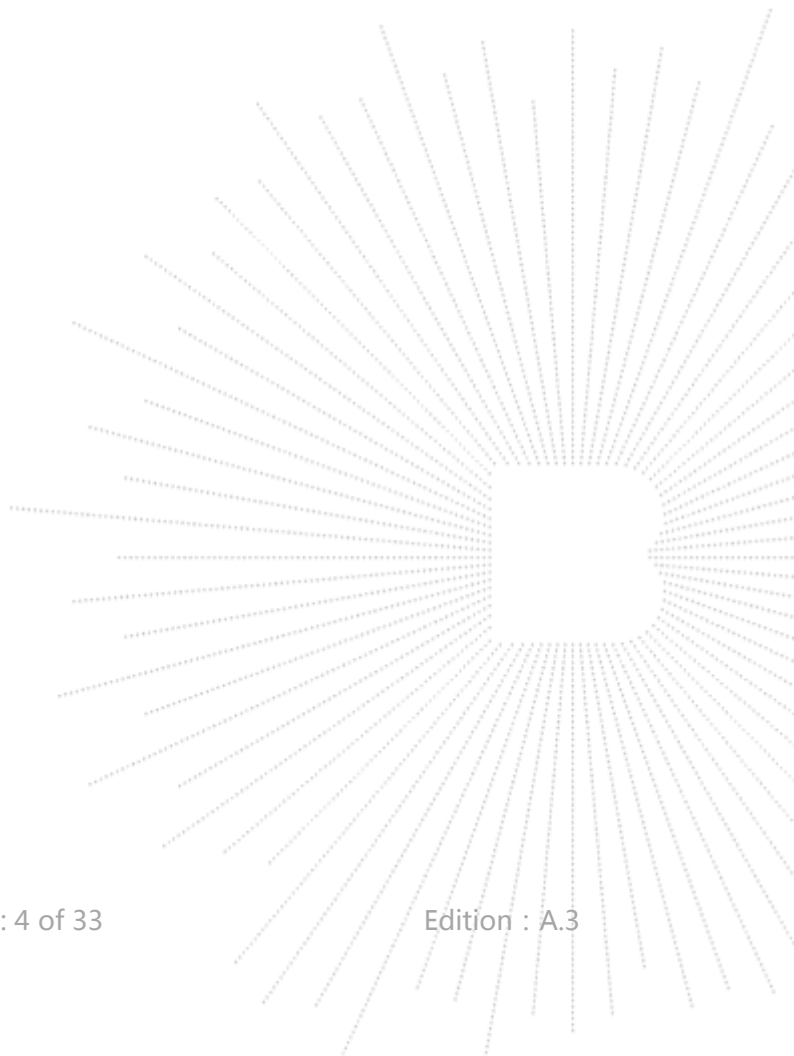

## 1. VERSION

| Report No.      | Issue Date | Description | Approved |
|-----------------|------------|-------------|----------|
| BCTC2106267028E | 2021-08-05 | Original    | Valid    |
|                 |            |             |          |

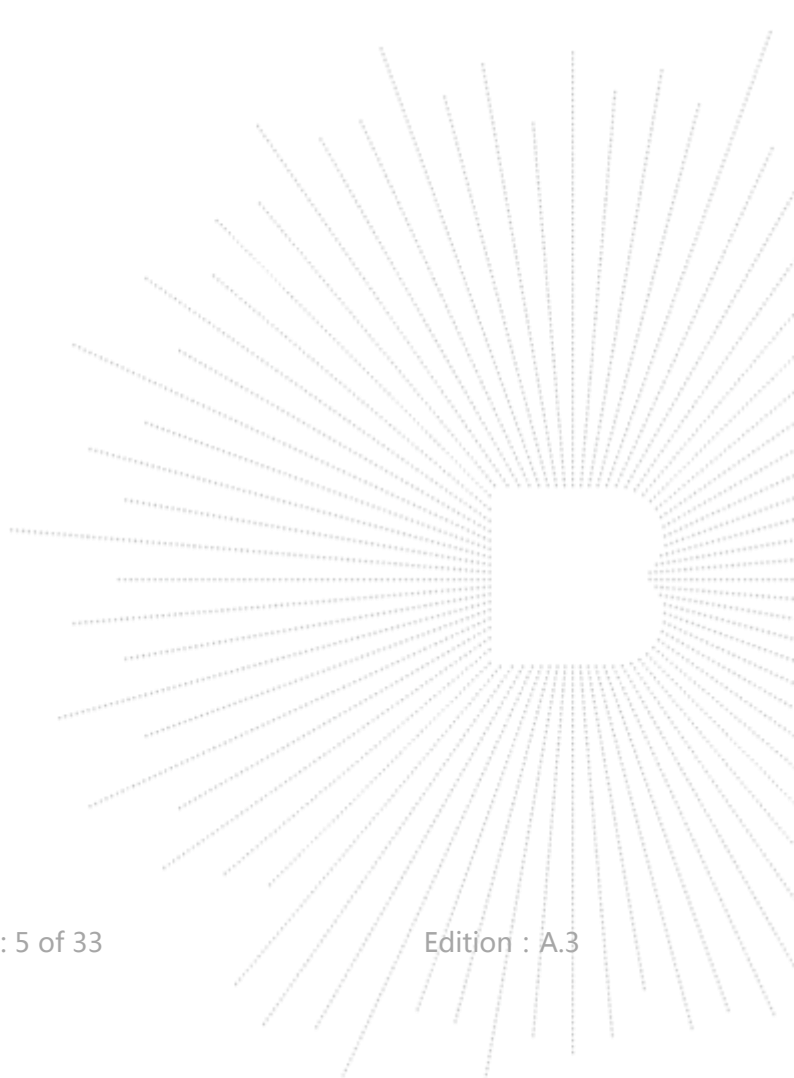

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

| No. | Test Parameter                                       | Clause No       | Results |
|-----|------------------------------------------------------|-----------------|---------|
| 1   | Conducted Emission                                   | §15.207         | PASS    |
| 2   | Fundamental & Radiated Spurious Emission Measurement | 15.209, 15.231b | PASS    |
| 3   | Occupancy Bandwidth                                  | 15.231c         | PASS    |
| 4   | Dwell time                                           | 15.231a         | PASS    |
| 5   | Antenna Requirement                                  | 15.203          | PASS    |

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item                                               | Uncertainty |
|-----|----------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9kHz-30MHz)  | U=3.7dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz)  | U=4.3dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-18GHz)  | U=4.5dB     |
| 4   | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB    |
| 5   | Conducted Emission(150kHz-30MHz)                   | U=3.20dB    |
| 6   | Conducted Adjacent channel power                   | U=1.38dB    |
| 7   | Conducted output power uncertainty Above 1G        | U=1.576dB   |
| 8   | Conducted output power uncertainty below 1G        | U=1.28dB    |
| 9   | humidity uncertainty                               | U=5.3%      |
| 10  | Temperature uncertainty                            | U=0.59°C    |

## 4. PRODUCT INFORMATION AND TEST SETUP


### 4.1 Product Information

|                       |                                                                                                                                              |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Model/Type Ref.:      | p-collar 920<br>p-collar 910,p-collar 920,p-collar 930,p-collar 940,<br>p-collar 950,p-collar 960,p-collar 970,p-collar 980,<br>p-collar 990 |
| Model differences:    | N/A                                                                                                                                          |
| Hardware Version:     | N/A                                                                                                                                          |
| Software Version:     | N/A                                                                                                                                          |
| Operation Frequency:  | 433.92MHz                                                                                                                                    |
| Type of Modulation:   | ASK                                                                                                                                          |
| Number Of Channel     | 1CH                                                                                                                                          |
| Antenna installation: | Internal antenna                                                                                                                             |
| Antenna Gain:         | 0dBi                                                                                                                                         |
| Ratings:              | DC 3.7V from Battery<br>DC 5V from adapter                                                                                                   |


### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



### 4.3 Support Equipment

| No. | Device Type         | Brand | Model        | Series No. | Note      |
|-----|---------------------|-------|--------------|------------|-----------|
| E-1 | Dog Training Collar | N/A   | p-collar 920 | N/A        | EUT       |
| E-2 | Adapter             | N/A   | BCTC001      | N/A        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note                 |
|------|---------------|--------------|--------|----------------------|
| C-1  | NO            | NO           | 0.5M   | USB cable unshielded |

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.4 Channel List

| CH | Frequency (MHz) |
|----|-----------------|
| 1  | 433.92          |

### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Final Test Mode | Description   |
|-----------------|---------------|
| Mode 1          | Charging Mode |
| Mode 2          | TX Mode       |

#### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

### 5.2 Test Instrument Used

#### Conduction Test equipment


| Item | Equipment     | Manufacturer | Type No.   | Serial No.    | Last calibration | Calibrated until |
|------|---------------|--------------|------------|---------------|------------------|------------------|
| 1    | Test Receiver | R&S          | ESR3       | 102075        | May 28, 2021     | May 27, 2022     |
| 2    | LISN          | SCHWARZBECK  | NSLK8127   | 8127739       | May 28, 2021     | May 27, 2022     |
| 3    | LISN          | R&S          | ENV216     | 101375        | May 28, 2021     | May 27, 2022     |
| 4    | RF cables     | Huber+Suhnar | 9kHz-30MHz | B1702988-0008 | May 28, 2021     | May 27, 2022     |
| 5    | Software      | Frad         | EZ-EMC     | EMC-CON 3A1   | \                | \                |

## Radiation Test equipment

| Item | Equipment                        | Manufacturer | Type No.      | Serial No.    | Last calibration | Calibrated until |
|------|----------------------------------|--------------|---------------|---------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz) | Agilent      | E4407B        | MY45109572    | May 28, 2021     | May 27, 2022     |
| 2    | Test Receiver (9kHz-7GHz)        | R&S          | ESR7          | 101154        | May 28, 2021     | May 27, 2022     |
| 3    | Bilog Antenna (30MHz-3GHz)       | SCHWARZB ECK | VULB9163      | VULB9163-942  | Jun. 01, 2021    | May 31, 2022     |
| 4    | Horn Antenna (1GHz-18GHz)        | SCHWARZB ECK | BBHA9120D     | 1541          | Jun. 02, 2021    | Jun. 01, 2022    |
| 5    | Horn Antenna (18GHz-40GHz)       | SCHWARZB ECK | BBHA9170      | 00822         | May 28, 2021     | May 27, 2022     |
| 6    | Amplifier (9KHz-6GHz)            | SCHWARZB ECK | BBV9744       | 9744-0037     | May 28, 2021     | May 27, 2022     |
| 7    | Amplifier (0.5GHz-18GHz)         | SCHWARZB ECK | BBV9718       | 9718-309      | May 28, 2021     | May 27, 2022     |
| 8    | Amplifier (18GHz-40GHz)          | MITEQ        | TTA1840-35-HG | 2034381       | May 28, 2021     | May 27, 2022     |
| 9    | Loop Antenna (9KHz-30MHz)        | SCHWARZB ECK | FMZB1519B     | 00014         | May 28, 2021     | May 27, 2022     |
| 10   | RF cables1 (9kHz-30MHz)          | Huber+Suhner | 9kHz-30MHz    | B1702988-0008 | May 28, 2021     | May 27, 2022     |
| 11   | RF cables2 (30MHz-1GHz)          | Huber+Suhner | 30MHz-1GHz    | 1486150       | May 28, 2021     | May 27, 2022     |
| 12   | RF cables3 (1GHz-40GHz)          | Huber+Suhner | 1GHz-40GHz    | 1607106       | May 28, 2021     | May 27, 2022     |
| 13   | Power Metter                     | Keysight     | E4419B        | \             | May 28, 2021     | May 27, 2022     |
| 14   | Power Sensor (AV)                | Keysight     | E9 300A       | \             | May 28, 2021     | May 27, 2022     |
| 15   | Signal Analyzer 20kHz-26.5GHz    | KEYSIGHT     | N9020A        | MY49100060    | May 28, 2021     | May 27, 2022     |
| 16   | Spectrum Analyzer 9kHz-40GHz     | Agilent      | FSP40         | 100363        | May 28, 2021     | May 27, 2022     |
| 17   | D.C. Power Supply                | LongWei      | TPR-6405D     | \             | \                | \                |
| 18   | Software                         | Frad         | EZ-EMC        | FA-03A2 RE    | \                | \                |

## 6. CONDUCTED EMISSIONS

### 6.1 Block Diagram Of Test Setup

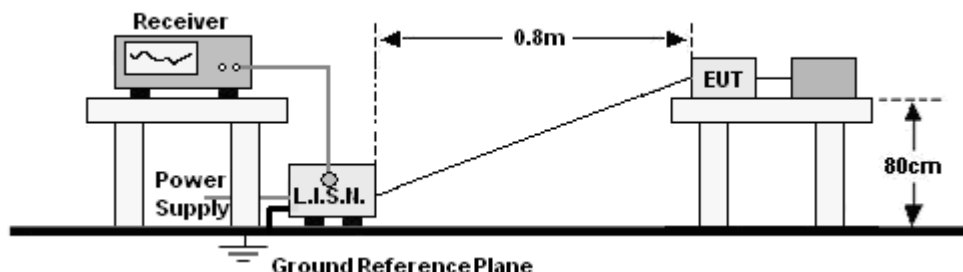

### 6.2 Limit

| FREQUENCY (MHz)                                               | Limit (dBuV) |           |
|---------------------------------------------------------------|--------------|-----------|
|                                                               | Quas-peak    | Average   |
| 0.15 -0.5                                                     | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0                                                     | 56.00        | 46.00     |
| 5.0 -30.0                                                     | 60.00        | 50.00     |
| Notes:                                                        |              |           |
| 1. *Decreasing linearly with logarithm of frequency.          |              |           |
| 2. The lower limit shall apply at the transition frequencies. |              |           |

### 6.3 Test procedure

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

|                |              |                     |        |
|----------------|--------------|---------------------|--------|
| Temperature :  | 26 °C        | Relative Humidity : | 54%    |
| Pressure :     | 101kPa       | Phase :             | L      |
| Test Voltage : | AC 120V/60Hz | Test Mode :         | Mode 1 |

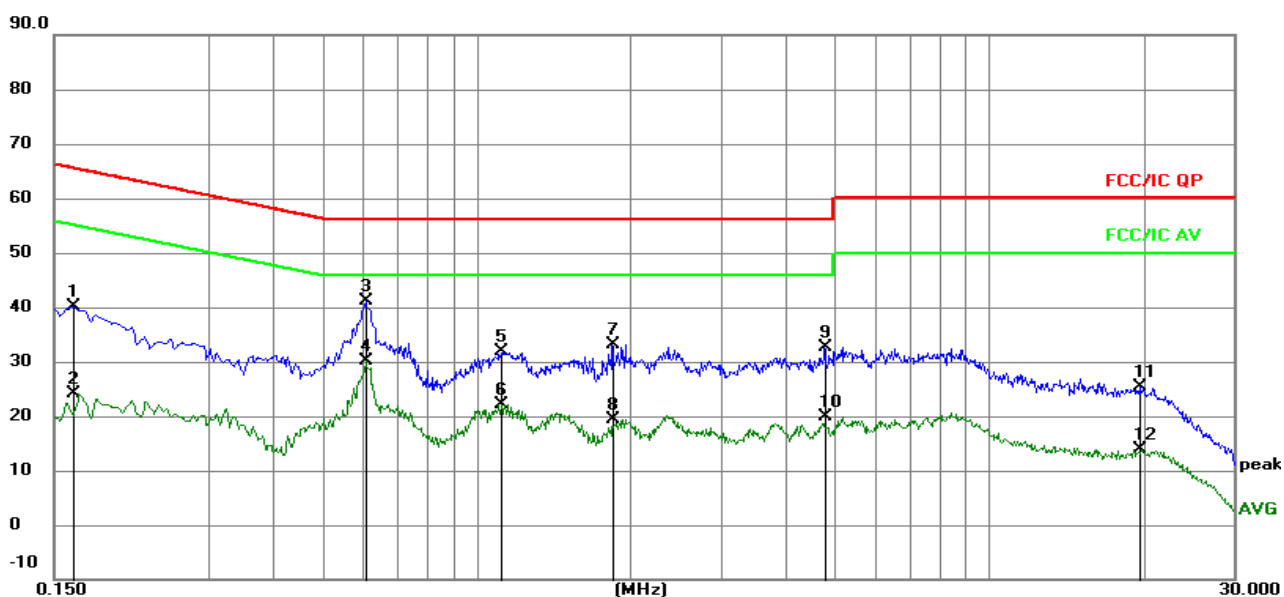


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1633       | 30.69            | 9.50                    | 40.19                    | 65.29         | -25.10     | QP       |
| 2   |     | 0.1633       | 14.53            | 9.50                    | 24.03                    | 55.29         | -31.26     | AVG      |
| 3   | *   | 0.6075       | 31.10            | 9.97                    | 41.07                    | 56.00         | -14.93     | QP       |
| 4   |     | 0.6075       | 20.24            | 9.97                    | 30.21                    | 46.00         | -15.79     | AVG      |
| 5   |     | 1.1173       | 22.23            | 9.57                    | 31.80                    | 56.00         | -24.20     | QP       |
| 6   |     | 1.1173       | 12.66            | 9.57                    | 22.23                    | 46.00         | -23.77     | AVG      |
| 7   |     | 1.8386       | 23.49            | 9.59                    | 33.08                    | 56.00         | -22.92     | QP       |
| 8   |     | 1.8386       | 9.78             | 9.59                    | 19.37                    | 46.00         | -26.63     | AVG      |
| 9   |     | 4.7716       | 22.85            | 9.78                    | 32.63                    | 56.00         | -23.37     | QP       |
| 10  |     | 4.7716       | 10.14            | 9.78                    | 19.92                    | 46.00         | -26.08     | AVG      |
| 11  |     | 19.6354      | 15.56            | 9.78                    | 25.34                    | 60.00         | -34.66     | QP       |
| 12  |     | 19.6354      | 4.19             | 9.78                    | 13.97                    | 50.00         | -36.03     | AVG      |

|                |              |                     |        |
|----------------|--------------|---------------------|--------|
| Temperature :  | 26 °C        | Relative Humidity : | 54%    |
| Pressure :     | 101kPa       | Phase :             | N      |
| Test Voltage : | AC 120V/60Hz | Test Mode :         | Mode 1 |

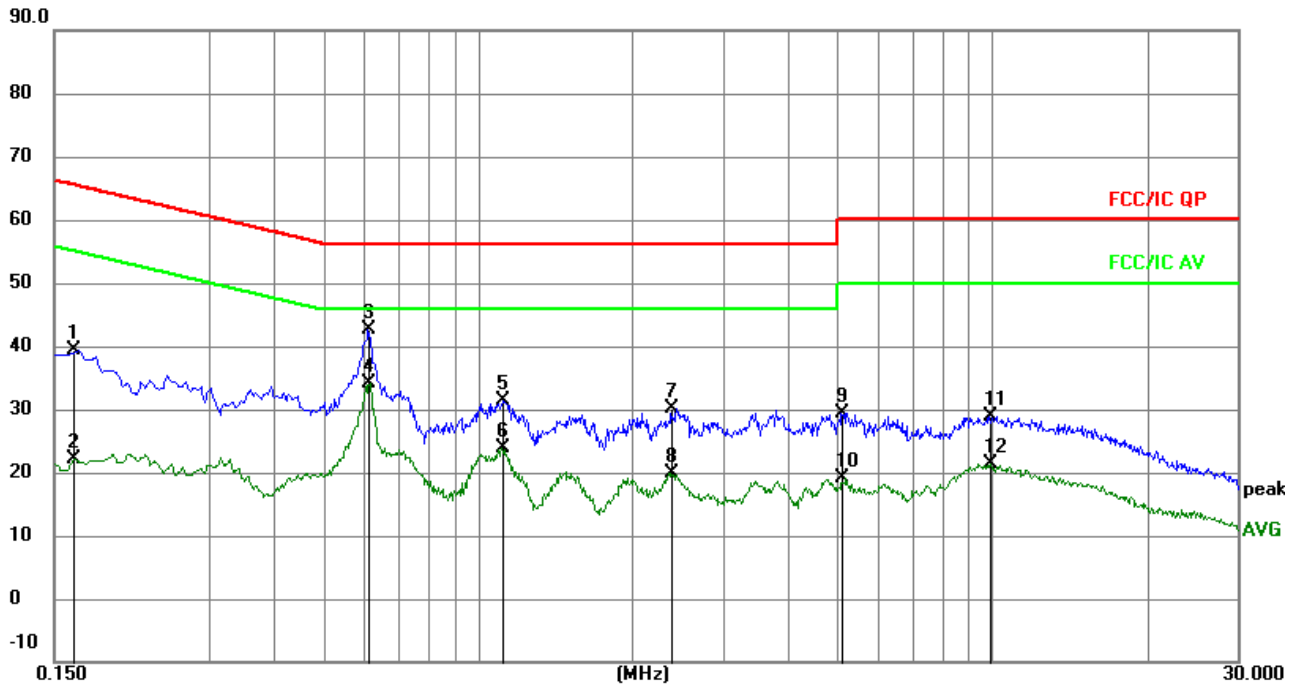

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1635       | 29.89            | 9.50                    | 39.39                    | 65.28         | -25.89     | QP       |
| 2   |     | 0.1635       | 12.67            | 9.50                    | 22.17                    | 55.28         | -33.11     | AVG      |
| 3   |     | 0.6134       | 32.72            | 9.95                    | 42.67                    | 56.00         | -13.33     | QP       |
| 4   | *   | 0.6134       | 24.09            | 9.95                    | 34.04                    | 46.00         | -11.96     | AVG      |
| 5   |     | 1.1130       | 21.78            | 9.57                    | 31.35                    | 56.00         | -24.65     | QP       |
| 6   |     | 1.1130       | 14.30            | 9.57                    | 23.87                    | 46.00         | -22.13     | AVG      |
| 7   |     | 2.3730       | 20.59            | 9.62                    | 30.21                    | 56.00         | -25.79     | QP       |
| 8   |     | 2.3730       | 10.37            | 9.62                    | 19.99                    | 46.00         | -26.01     | AVG      |
| 9   |     | 5.1000       | 19.67            | 9.80                    | 29.47                    | 60.00         | -30.53     | QP       |
| 10  |     | 5.1000       | 9.29             | 9.80                    | 19.09                    | 50.00         | -30.91     | AVG      |
| 11  |     | 9.8925       | 19.24            | 9.69                    | 28.93                    | 60.00         | -31.07     | QP       |
| 12  |     | 9.8925       | 11.75            | 9.69                    | 21.44                    | 50.00         | -28.56     | AVG      |


## 7. RADIATED EMISSIONS

### 7.1 Block Diagram Of Test Setup


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

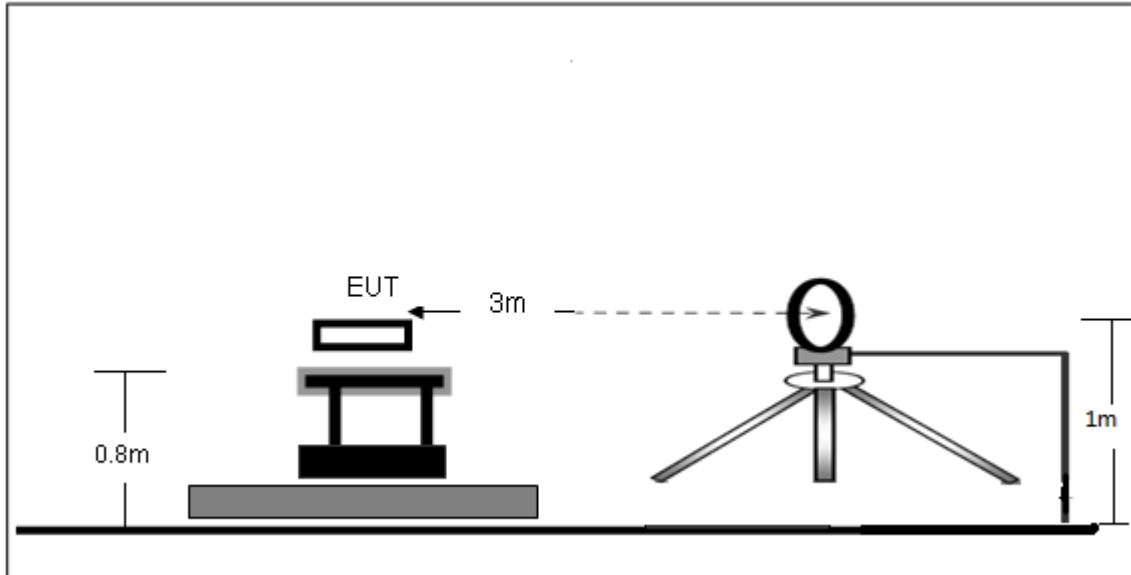

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

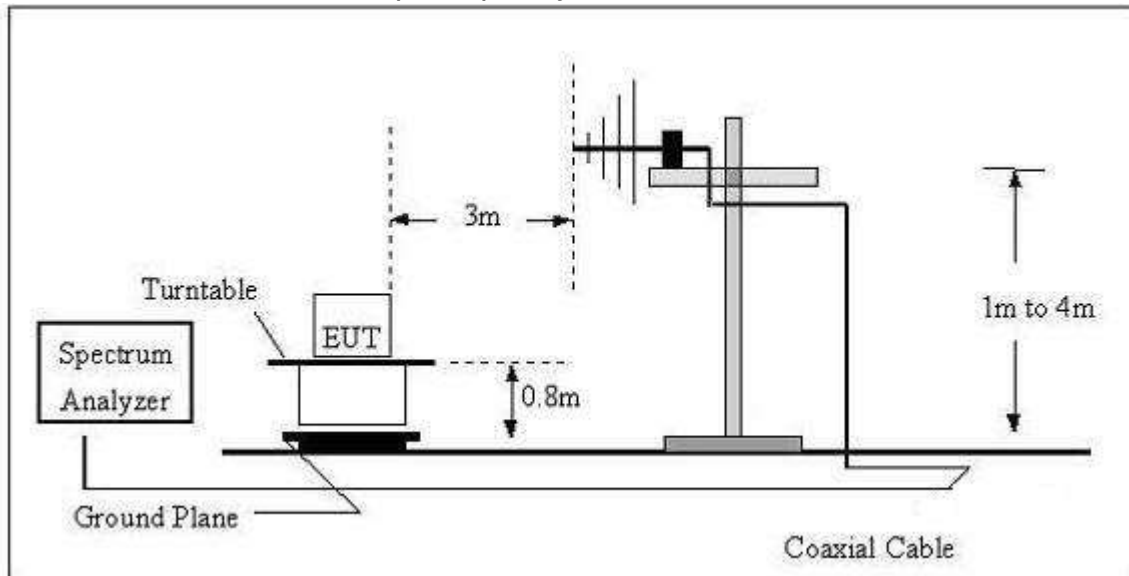

### (C) Radiated Emission Test-Up Frequency Above 1GHz

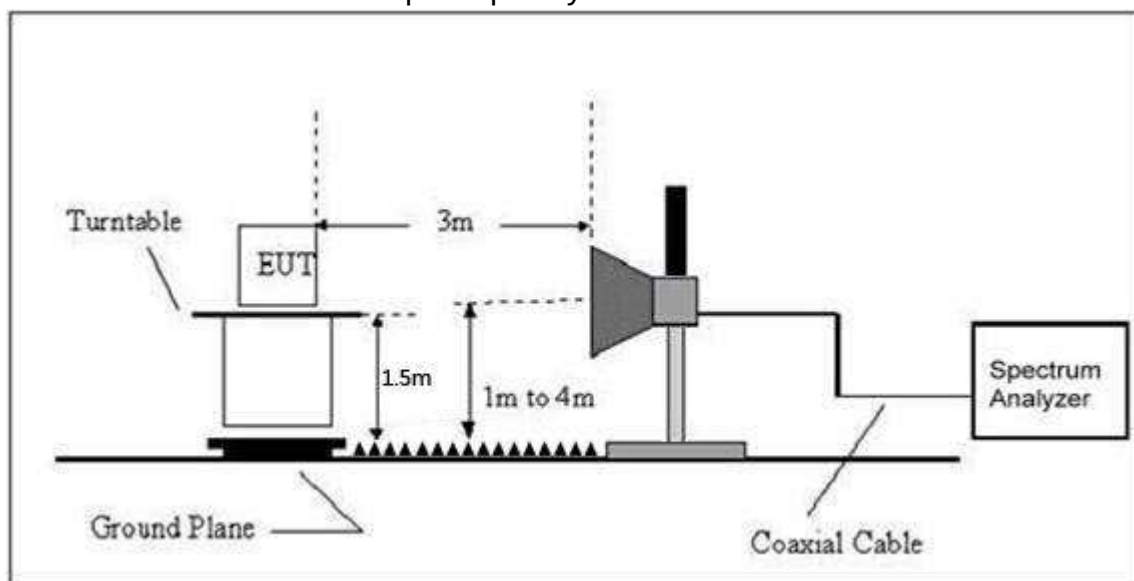

## 7.2 Limit

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency<br>(MHz) | Field Strength<br>uV/m | Distance<br>(m) | Field Strength Limit at 3m Distance |                                       |
|--------------------|------------------------|-----------------|-------------------------------------|---------------------------------------|
|                    |                        |                 | uV/m                                | dBuV/m                                |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$   | 300             | $10000 * 2400/F(\text{kHz})$        | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$  | 30              | $100 * 24000/F(\text{kHz})$         | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30         | 30                     | 30              | $100 * 30$                          | $20\log^{(30)} + 40$                  |
| 30 ~ 88            | 100                    | 3               | 100                                 | $20\log^{(100)}$                      |
| 88 ~ 216           | 150                    | 3               | 150                                 | $20\log^{(150)}$                      |
| 216 ~ 960          | 200                    | 3               | 200                                 | $20\log^{(200)}$                      |
| Above 960          | 500                    | 3               | 500                                 | $20\log^{(500)}$                      |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY<br>(MHz) | Limit (dBuV/m) (at 3M) |         |
|--------------------|------------------------|---------|
|                    | PEAK                   | AVERAGE |
| Above 1000         | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) =  $20\log$  Emission level (uV/m).

For manually operated within 5sec,activated automatically within 5sec,periodic transmission.

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--------------------------------------------------|---------------------------------------------------------|
| 40.66-40.70                 | 2,250                                            | 225                                                     |
| 70-130                      | 1,250                                            | 125                                                     |
| 130-174                     | <sup>1</sup> 1,250 to 3,750                      | <sup>1</sup> 125 to 375                                 |
| 174-260                     | 3,750                                            | 375                                                     |
| 260-470                     | <sup>1</sup> 3,750 to 12,500                     | <sup>1</sup> 375 to 1,250                               |
| Above 470                   | 12,500                                           | 1,250                                                   |
| 40.66-40.70                 | 2,250                                            | 225                                                     |

### 7.3 Test procedure

| Receiver Parameter | Setting           |
|--------------------|-------------------|
| Attenuation        | Auto              |
| 9kHz~150kHz        | RBW 200Hz for QP  |
| 150kHz~30MHz       | RBW 9kHz for QP   |
| 30MHz~1000MHz      | RBW 120kHz for QP |

| Spectrum Parameter | Setting                                                            |
|--------------------|--------------------------------------------------------------------|
| 1-6GHz             | RBW 1 MHz /VBW 1 MHz for Peak,<br>RBW 1 MHz / VBW 10Hz for Average |

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel, the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

|              |         |                    |       |
|--------------|---------|--------------------|-------|
| Temperature: | 26°C    | Relative Humidity: | 24%   |
| Pressure:    | 101 kPa | Test Voltage :     | DC 5V |
| Test Mode :  | Mode 2  | Polarization :     | --    |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

### Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

|              |         |                    |            |
|--------------|---------|--------------------|------------|
| Temperature: | 26°C    | Relative Humidity: | 54%        |
| Pressure:    | 101 kPa | Test Voltage :     | DC 5V      |
| Test Mode :  | Mode 2  | Polarization :     | Horizontal |

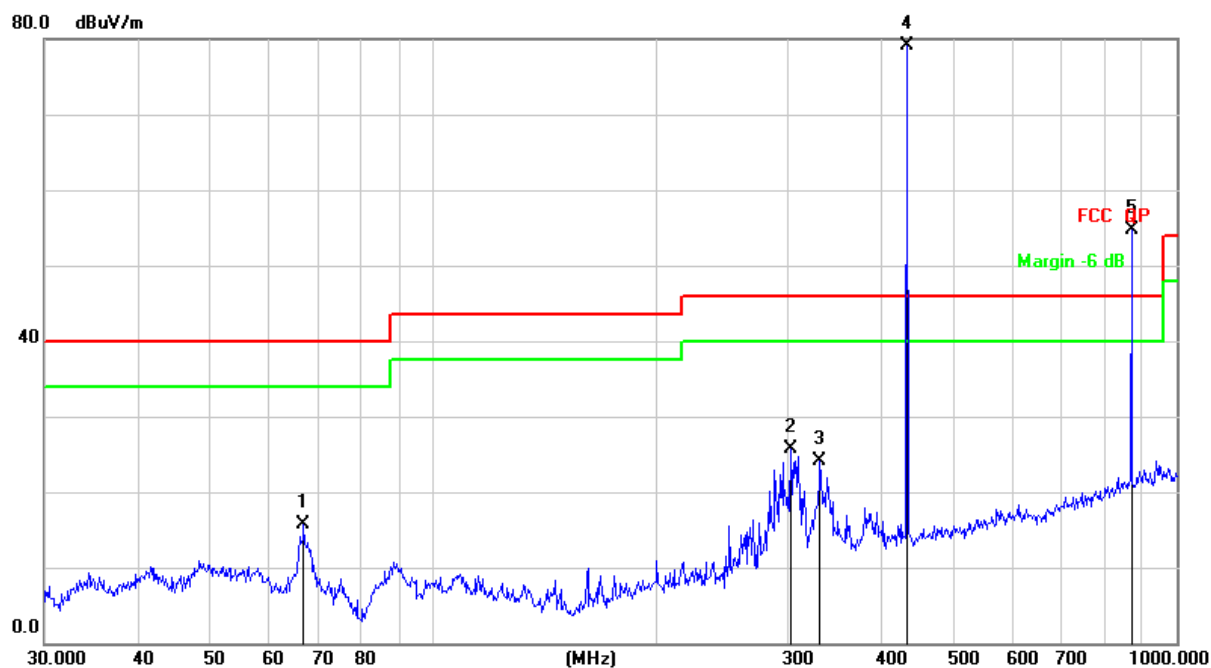


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. MARK 4 is Field Strength of Fundamental and MARK 5 is Field Strength of Spurious Emissions(433.92MHz intentional radiators).

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 66.9669      | 33.28                    | -17.50                  | 15.78                      | 40.00         | -24.22     | peak     |
| 2   |     | 302.4812     | 39.32                    | -13.53                  | 25.79                      | 46.00         | -20.21     | peak     |
| 3   |     | 331.3546     | 36.86                    | -12.74                  | 24.12                      | 46.00         | -21.88     | peak     |
| 4   | *   | 434.0651     | 89.41                    | -10.33                  | 79.08                      | 100.83        | -21.75     | peak     |
| 5   | X   | 869.1302     | 56.88                    | -2.13                   | 54.75                      | 80.83         | -26.08     | peak     |

|              |         |                    |          |
|--------------|---------|--------------------|----------|
| Temperature: | 26°C    | Relative Humidity: | 54%      |
| Pressure:    | 101 kpa | Test Voltage :     | DC 5V    |
| Test Mode :  | Mode 2  | Polarization :     | Vertical |

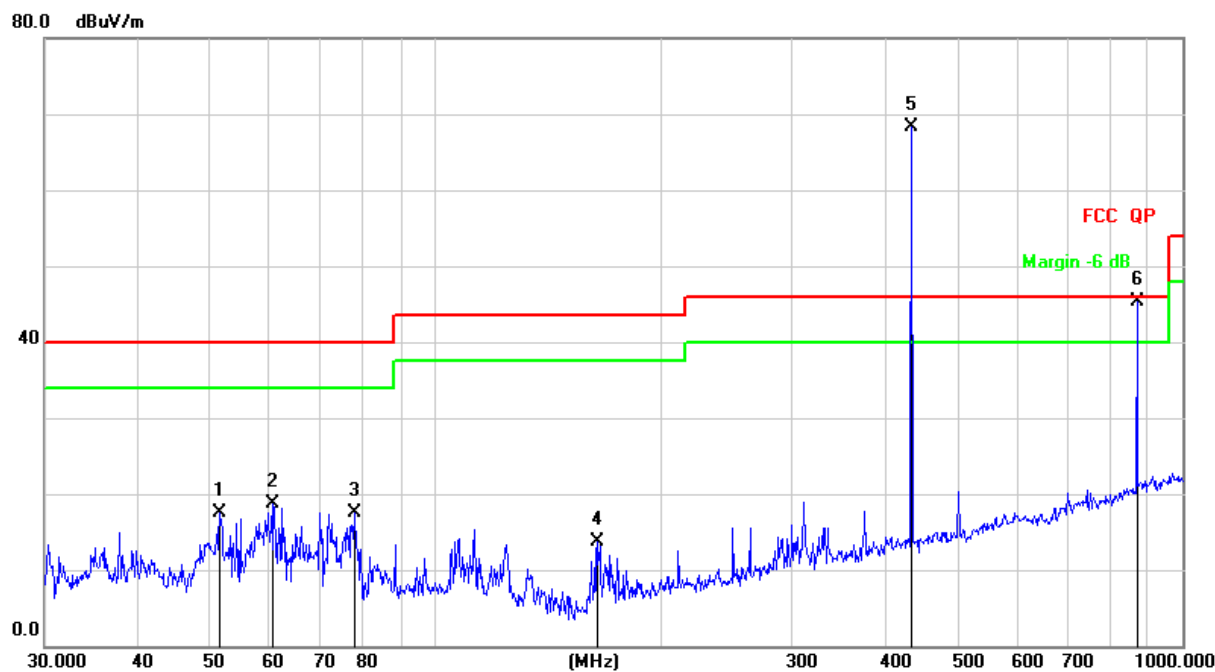

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. MARK 5 is Field Strength of Fundamental and MARK 6 is Field Strength of Spurious Emissions(433.92MHz intentional radiators).

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m   | dB     | Detector |
| 1   |     | 51.4807  | 32.60         | -15.01         | 17.59       | 40.00  | -22.41 | peak     |
| 2   |     | 60.4919  | 34.78         | -16.02         | 18.76       | 40.00  | -21.24 | peak     |
| 3   |     | 77.8654  | 37.42         | -19.94         | 17.48       | 40.00  | -22.52 | peak     |
| 4   |     | 164.9075 | 32.25         | -18.55         | 13.70       | 43.50  | -29.80 | peak     |
| 5   | *   | 434.0650 | 78.57         | -10.33         | 68.24       | 100.83 | -32.59 | peak     |
| 6   | !   | 869.1301 | 47.38         | -2.13          | 45.25       | 80.83  | -35.58 | peak     |

For average Emission

| Frequency MHz | Peak Level dBuV/m | Duty cycle factor | Average Level dBuV/m | Limit AV | Margin | Polarization |
|---------------|-------------------|-------------------|----------------------|----------|--------|--------------|
| 433.92        | 79.8              | -2.16             | 77.64                | 80.83    | -3.19  | Horizontal   |
| 867.84        | 54.75             | -2.16             | 52.59                | 60.83    | -8.24  | Horizontal   |

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 5.  
3. MARK 4 is Field Strength of Fundamental and MARK 5 is Field Strength of Spurious Emissions(433.92MHz intentional radiators).

| Frequency MHz | Peak Level dBuV/m | Duty cycle factor | Average Level dBuV/m | Limit AV | Margin | Polarization |
|---------------|-------------------|-------------------|----------------------|----------|--------|--------------|
| 433.92        | 68.24             | -2.16             | 66.08                | 80.83    | -14.75 | Vertical     |
| 867.84        | 45.25             | -2.16             | 43.09                | 60.83    | -17.74 | Vertical     |

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 5.  
3. MARK 5 is Field Strength of Fundamental and MARK 6 is Field Strength of Spurious Emissions(433.92MHz intentional radiators).

#### Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

| Frequency MHz | Peak Level dBuV/m | Duty cycle factor | Average Level dBuV/m | Limit |       | Margin dB |        | Polarization |
|---------------|-------------------|-------------------|----------------------|-------|-------|-----------|--------|--------------|
|               |                   |                   |                      | PK    | AV    | PK        | AV     |              |
| 1301.76       | 51.44             | -2.16             | 49.28                | 80.83 | 60.83 | -31.55    | -11.55 | Vertical     |
| 1735.68       | 52.17             | -2.16             | 50.01                | 80.83 | 60.83 | -30.82    | -10.82 | Vertical     |
| 2603.52       | 51.65             | -2.16             | 49.49                | 80.83 | 60.83 | -31.34    | -11.34 | Vertical     |
| 3037.44       | 52.26             | -2.16             | 50.1                 | 80.83 | 60.83 | -30.73    | -10.73 | Vertical     |
| 3471.36       | 50.35             | -2.16             | 48.19                | 80.83 | 60.83 | -32.64    | -12.64 | Vertical     |
| 3905.28       | 47.42             | -2.16             | 45.26                | 80.83 | 60.83 | -35.57    | -15.57 | Vertical     |
| 1301.76       | 47.54             | -2.16             | 45.38                | 80.83 | 60.83 | -35.45    | -15.45 | Horizontal   |
| 1735.68       | 47.66             | -2.16             | 45.5                 | 80.83 | 60.83 | -35.33    | -15.33 | Horizontal   |
| 2603.52       | 49.91             | -2.16             | 47.75                | 80.83 | 60.83 | -33.08    | -13.08 | Horizontal   |
| 3037.44       | 49.08             | -2.16             | 46.92                | 80.83 | 60.83 | -33.91    | -13.91 | Horizontal   |
| 3471.36       | 47.63             | -2.16             | 45.47                | 80.83 | 60.83 | -35.36    | -15.36 | Horizontal   |
| 3905.28       | 48.39             | -2.16             | 46.23                | 80.83 | 60.83 | -34.6     | -14.6  | Horizontal   |

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 5.  
3. Pulse Desensitization Correction Factor  
Pulse Width (PW) = 524ms  
2/PW = 2/524ms = 0.004 kHz


RBW (100 kHz) > 2/PW (0.004 kHz)

Therefore PDCF is not needed

4. Other harmonics emissions are lower than 20dB below the allowable limit.

## 8. BANDWIDTH TEST

### 8.1 Block Diagram Of Test Setup

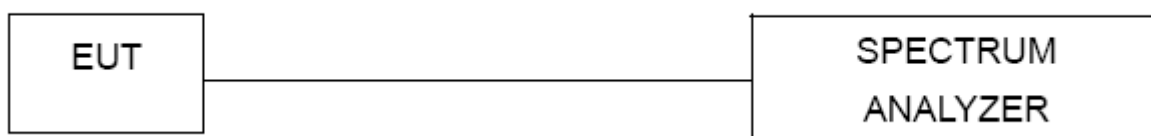

### 8.2 Limit

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$\text{B.W (20dBc) Limit} = 0.25\% * f(\text{MHz}) = 0.25\% * 433.92\text{MHz} = 1.0848\text{MHz}$$

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 30kHz                                         |
| VB                 | ≥RBW                                          |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |

### 8.3 Test procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30kHz, VBW≥ RBW, Sweep time = Auto.


### 8.4 EUT operating Conditions

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 8.5 Test Result

|               |        |                     |         |
|---------------|--------|---------------------|---------|
| Temperature : | 26 °C  | Relative Humidity : | 54%     |
| Pressure :    | 101kPa | Test Voltage :      | DC 3.7V |
| Test Mode :   | Mode 2 |                     |         |

| Frequency | 20dB Bandwidth (kHz) | Limit (MHz) | Result |
|-----------|----------------------|-------------|--------|
| 433.92MHz | 68.20                | 1.0848      | PASS   |

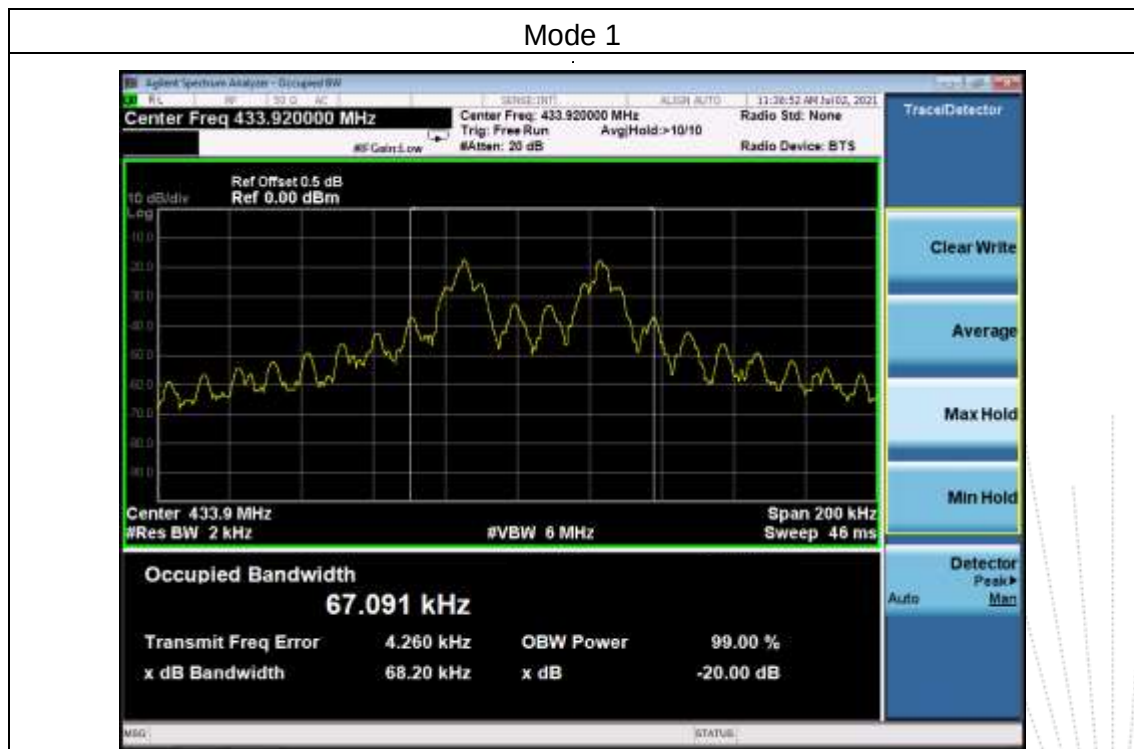

## 9. CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB =  $20\log(\text{duty cycle})$

The duration of one cycle = 524ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle =  $101.6\text{ms} \times 4 / 524\text{ms}$

=  $406.4\text{ms} / 524\text{ms}$


= 0.78

Therefore, the averaging factor is found by  $20\log 0.78 = -2.16\text{dB}$


Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.


Cycle

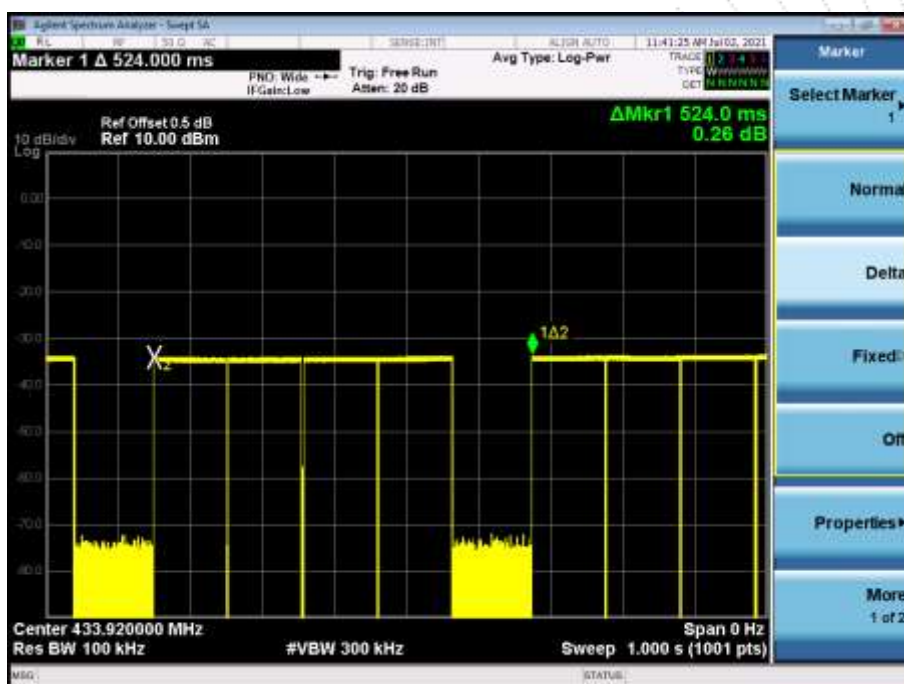

### Pulse

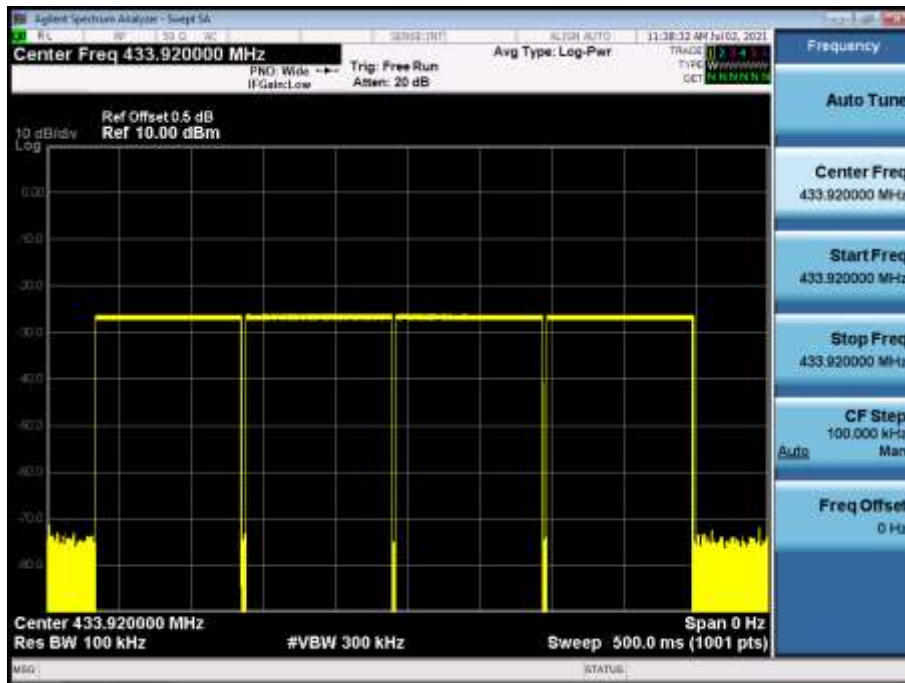


### On-time

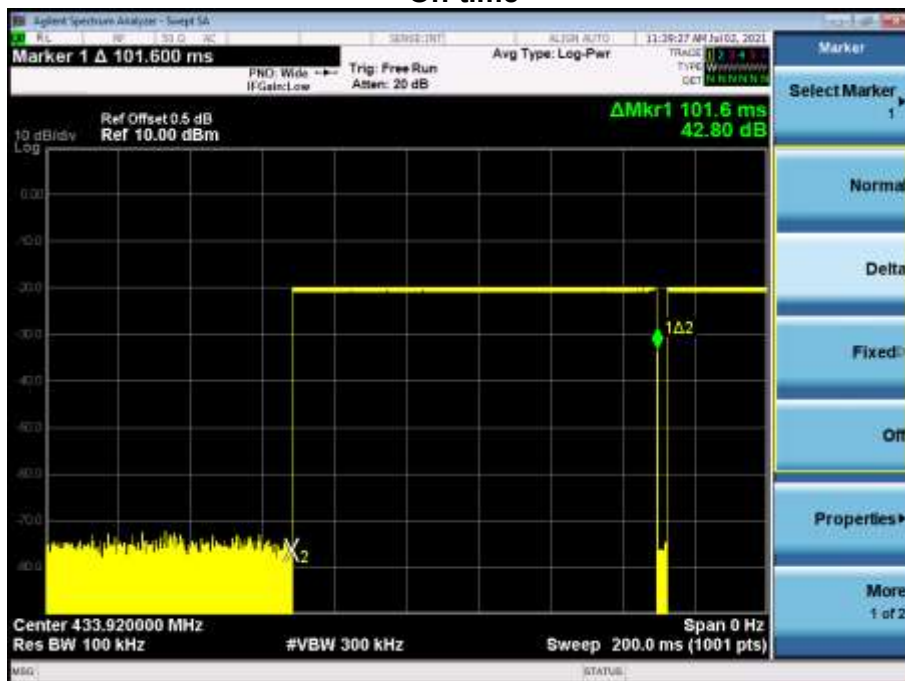

## 10. DWEELL TIME

### 10.1 Block Diagram Of Test Setup

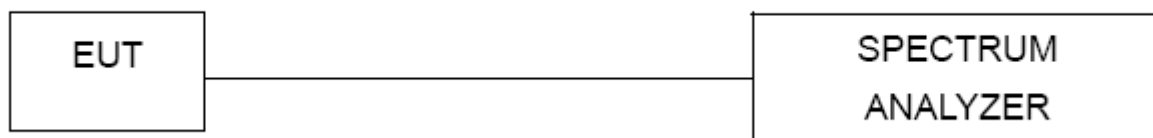

### 10.2 Limit

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


### 10.3 Test procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

## 10.4 Test Result

| Dwell time (second) | Limit (second) | Result |
|---------------------|----------------|--------|
| 420.0ms             | <5s            | Pass   |

Test plot as follows:

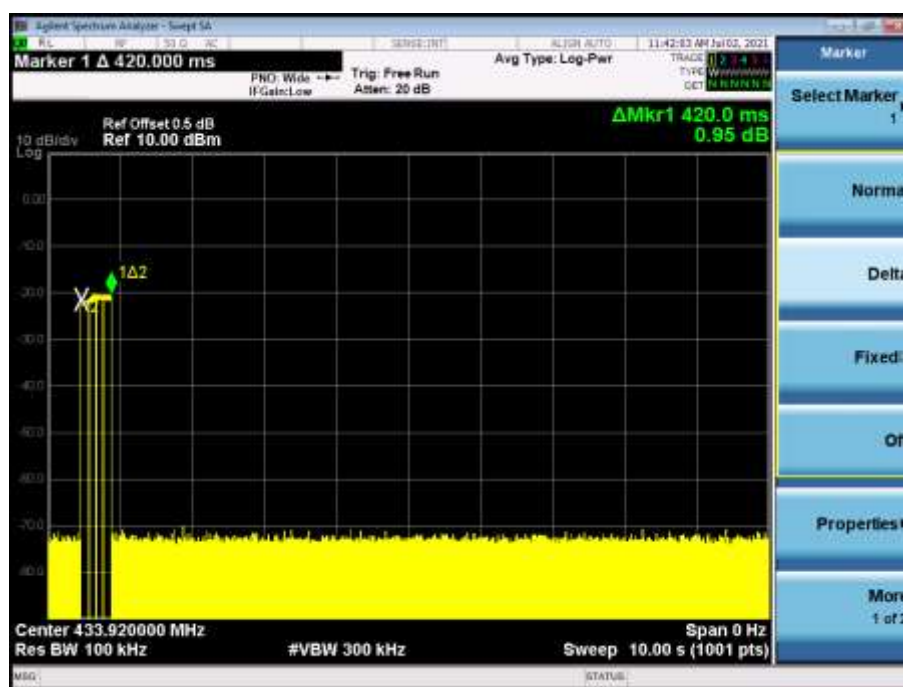


## **11. ANTENNA REQUIREMENT**

### **11.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **11.2 EUT ANTENNA**

The EUT antenna is the Internal antenna. It comply with the standard requirement.

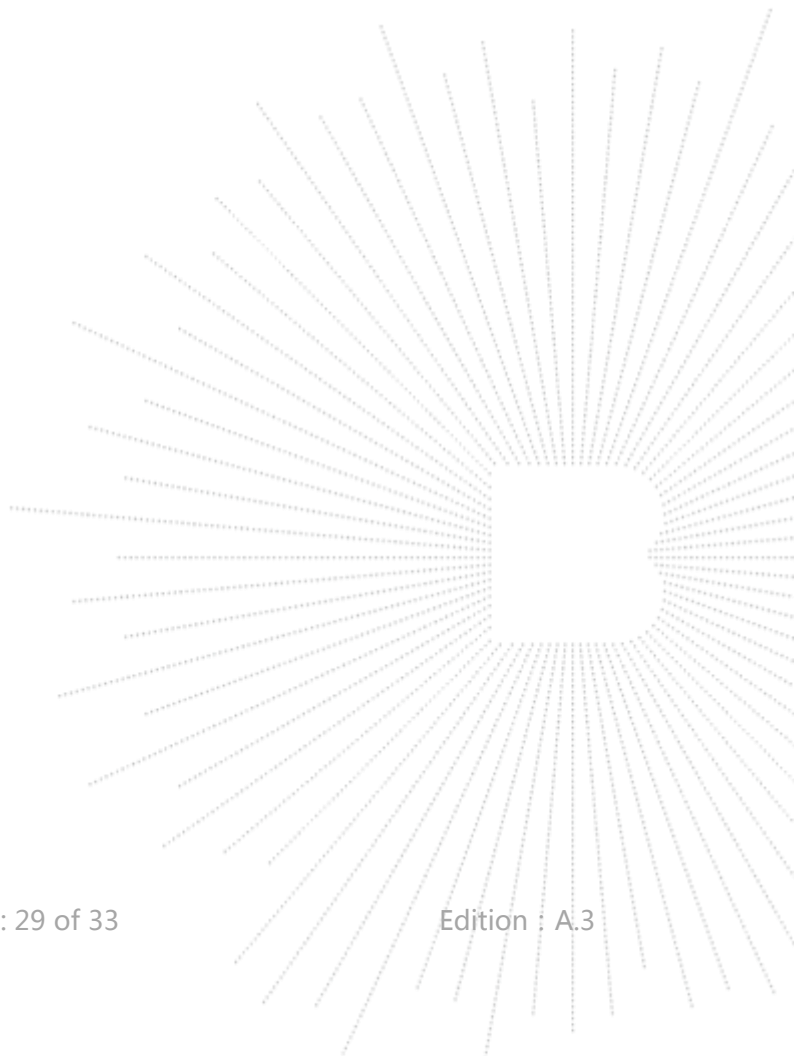

## 12. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2



## 13. EUT TEST SETUP PHOTOGRAPHS

### Conducted emissions

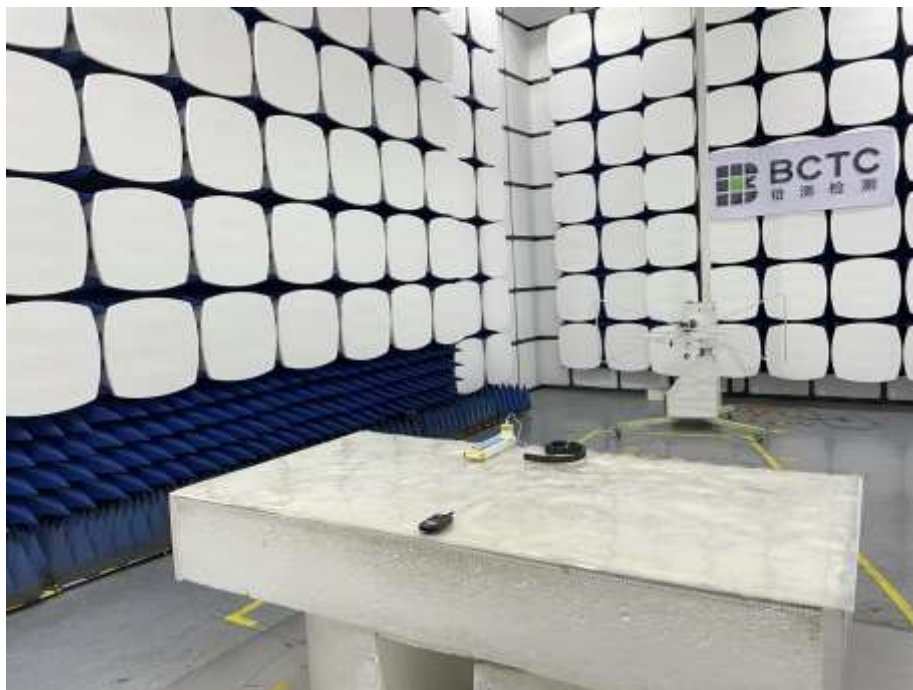

**Radiated Measurement Photos**

## STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*