

Test Report

UNINTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 B

Equipment Under Test: USB IR-Dongle for dosimeter

Type/ Model: USB IR-Dongle

Manufacturer: Mirion Technologies (RADOS) Oy
Mustionkatu 2
FI-20101 Turku
FINLAND

Customer: Mirion Technologies (RADOS) Oy
Mustionkatu 2
FI-20101 Turku
FINLAND

FCC Rule Part: 15.107: 2015, 15.109: 2015

Date: 11 March 2016

Issued by:



Rauno Repo
EMC/RF Specialist

11 March 2016



Janne Nyman
Compliance Specialist

PRODUCT DESCRIPTION	3
Equipment Under Test (EUT)	3
Power Supply	3
Peripherals	3
GENERAL REMARKS.....	4
Disclaimer	4
SUMMARY OF TESTING.....	5
EUT Test Conditions during Testing	5
TEST RESULTS.....	6
Conducted Emissions on Power Supply Lines.....	6
Radiated Emissions 30 MHz to 1000 MHz.....	8
LIST OF TEST EQUIPMENT	9

Equipment Under Test (EUT)

USB IR-Dongle for dosimeter

FCC ID: 2AHI8-MBD-IRLINK-1

The EUT is an USB IR-Dongle connected to a laptop PC.

Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing

Power Supply

The EUT is powered from USB-port.

Peripherals

- HP Latitude PC (supplied by the customer)
- Power supply for the PC (supplied by the customer)
- Head phones
- Mouse (USB)

Disclaimer

This document is issued by the Company under its General Conditions of service accessible at http://www.sgs.com/terms_and_conditions.htm. attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company

Summary of Testing

SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.107	Conducted Emissions on Power Supply Lines	PASS
§15.109	Radiated Emissions	PASS

EUT Test Conditions during Testing

The EUT was connected to the USB port of the test PC as well as the headphones and the USB mouse. Tests were performed with 115V / 60 Hz.

Test Facility

☐	Testing Location / address: FCC registration number: 90598	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
☒	Testing Location / address: FCC registration number: 178986 Industry Canada registration number: 8708A-2	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

Conducted Emissions on Power Supply Lines

Standard: ANSI C63.4 (2014)
Tested by: RRE
Date: 10 March 2016
Temperature: 22 ± 3 °C
Humidity: 30 - 60 % RH
Measurement uncertainty ± 2.9 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.107

Conducted emissions were measured from PC mains port.

Results

Conducted Emission Mains FCC Part 15 Class B with ENV216

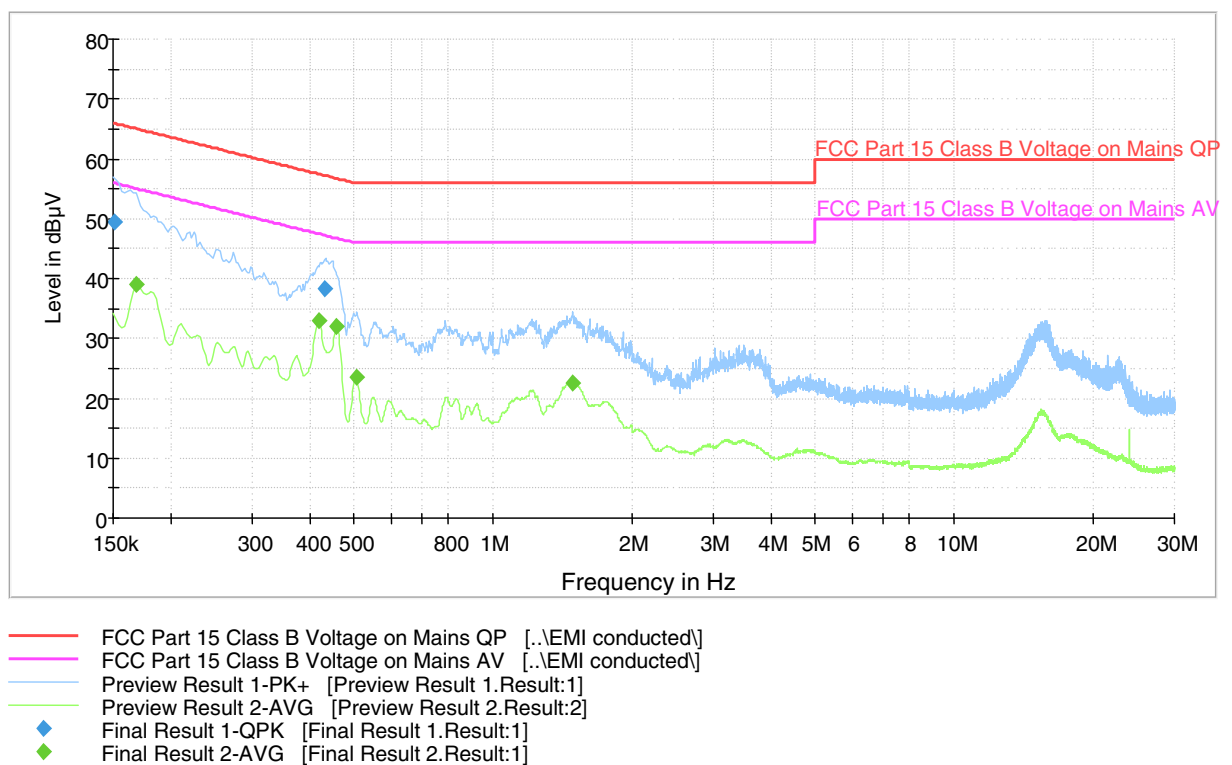


Figure 1. Conducted emission from AC power port.

Table 1. Final Quasi-Peak results

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time 15x(ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151000	49.3	1000.0	9.000	N	10.1	16.6	65.9	-
0.431000	38.2	1000.0	9.000	N	10.3	19.0	57.2	-

Conducted Emissions

Table 2. Final Average results

Frequency (MHz)	Average (dB μ V)	Meas. Time 15x(ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.169000	39.2	1000.0	9.000	N	10.1	15.9	55.0	-
0.418250	33.0	1000.0	9.000	N	10.2	14.5	47.5	-
0.458250	32.0	1000.0	9.000	N	10.3	14.7	46.7	-
0.504250	23.5	1000.0	9.000	N	10.3	22.5	46.0	-
1.488500	22.5	1000.0	9.000	N	10.3	23.5	46.0	-

Radiated Emissions 30 MHz to 1000 MHz

Standard: ANSI C63.4 (2014)
Tested by: RRE, PKA
Date: 8 March 2016
Temperature: 22 ± 3 °C
Humidity: 30 - 60 % RH
Measurement uncertainty ± 4.51 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.109

The correction factor in the final result table contains the sum of the transducers (antenna + amplifier + cables).
 The result value is the measured value corrected with the correction factor.

Test results

FCC Part 15 Class B Spurious Emission 30-1000MHz 3m

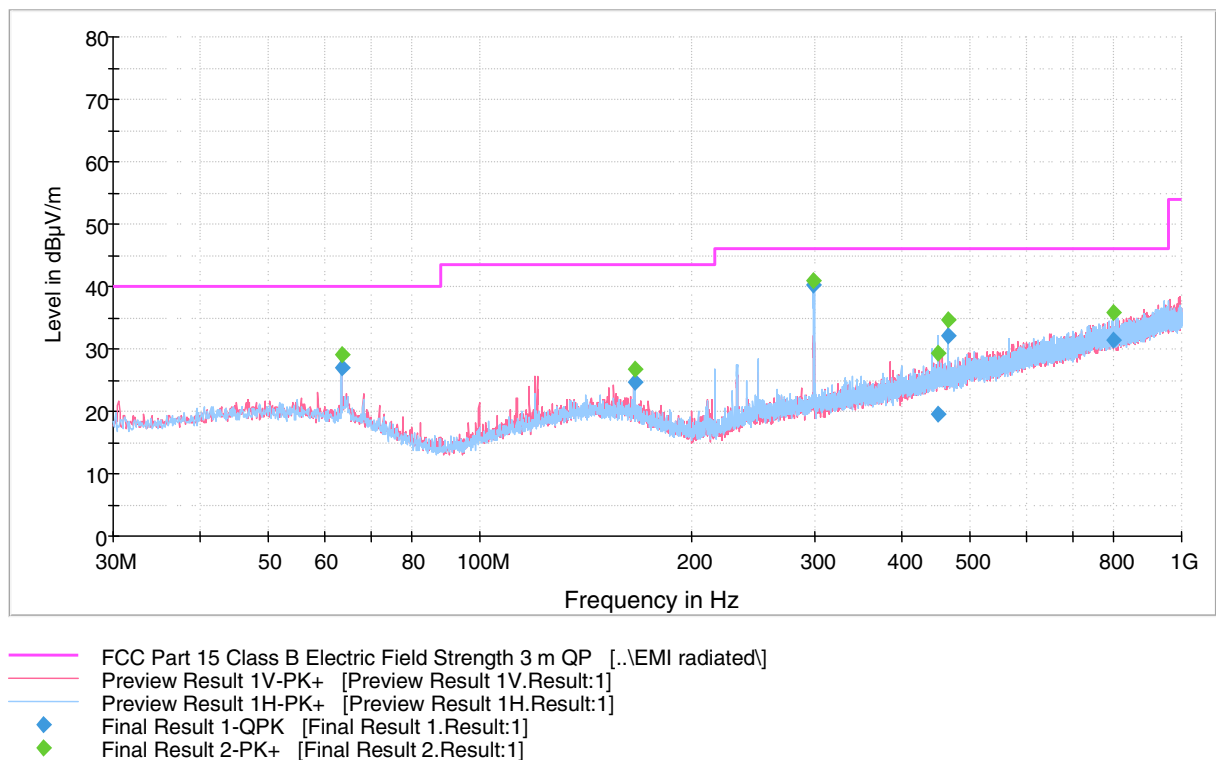


Figure 2. Measured curve with peak detector.

Table 3. Final Quasi-Peak results

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time 15x(ms)	BW (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
63.505000	27.0	1000.0	120.000	100.0	V	62.0	13.4	13.0	40.0	-
166.274000	24.7	1000.0	120.000	100.0	V	0.0	14.3	18.8	43.5	-
298.750000	40.2	1000.0	120.000	100.0	H	25.0	15.3	5.8	46.0	-
449.306000	19.6	1000.0	120.000	249.0	H	110.0	19.2	26.4	46.0	-
465.627000	32.2	1000.0	120.000	100.0	V	197.0	19.5	13.8	46.0	-
798.200000	31.4	1000.0	120.000	100.0	H	274.0	25.5	14.6	46.0	-

List of Test Equipment

LIST OF TEST EQUIPMENT

Equipment	Manufacturer	Type	Serial no	Inv.no	Cal. due (yyyy-mm-dd)
TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	100185	8453	2016-07-01
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
ANTENNA (30-1000 MHz)	SCHWARZBECK	VULB 9168	8168-503	8911	2016-05-04
ANTENNA MAST	DEISEL	MA240	240/455	5017	-
TURNTABLE	DEISEL	DS430	-	5015	-
CONTROLLER	COMTEST	HD100	100/457	5018	-
ANTENNA (1-18 GHz)	EMCO	3117	00086191	9569	2017-03-03
ANTENNA (18-26.5 GHz)	EMCO	3160- 09	030232-022	7294	-
PREAMPLIFIER (0.5-26GHz)	HP	83017A	3950M00102	5226	2017-02-03
HIGH PASS FILTER	WAINWRIGHT	WHKX4.0/18G-10SS	10	-	2017-01-17
LISN	ROHDE & SCHWARZ	ENV216	101466	9611	2017-02-24