FCC Part 15C Test Report

FCC ID: 2AHI9YB25301

Product Name:	**Amplified Zigbee module**
Trademark:	**N/A**
Model Name :	**YB2530+PA+LNA**
Prepared For : Address :	**Zero Energy Solutions LTD.** Ha'Brosh st. 7, Har Adar, 9083600, Israel
Prepared By : Address :	**Shenzhen BCTC Technology Co., Ltd.** No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	**Apr. 28 – May 3, 2016**
Date of Report :	**May 3, 2016**
Report No.:	**BCTC-160101363-3E**

TEST RESULT CERTIFICATION

Applicant's name	:	Zero Energy Solutions LTD.
Address	:	Ha'Brosh st. 7, Har Adar, 9083600, Israel
Manufacture's Name	:	HongKong CCD Limited
Address	:	Room 1642, Guoli Building, Shenzhen, Guangdong, China

Product description

Product name	:	Amplified Zigbee module
Model and/or type reference	:	YB2530+PA+LNA
Standards	:	FCC Part15.247
Test procedure		ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer : Eric Yang

(Eric Yang)

Technical Manager : Sophie Lee

(Sophia Lee)

Authorized Signatory : Casey Wang

SHENZHEN BCTC TECHNOLOGY CO., LTD. APPROVED

(Casey Wang)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS 5
1.1 TEST FACILITY 6
1.2 MEASUREMENT UNCERTAINTY 6
2 . GENERAL INFORMATION 7
2.1 GENERAL DESCRIPTION OF EUT 7
2.2 DESCRIPTION OF TEST MODES 8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 10
3 . EMC EMISSION TEST 11
3.1 CONDUCTED EMISSION MEASUREMENT 11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 11
3.1.2 TEST PROCEDURE 12
3.1.3 DEVIATION FROM TEST STANDARD 12
3.1.4 TEST SETUP 12
3.1.5 EUT OPERATING CONDITIONS 12
3.1.6 TEST RESULTS 13
3.2 RADIATED EMISSION MEASUREMENT 15
3.2.1 RADIATED EMISSION LIMITS 15
3.2.2 TEST PROCEDURE 16
3.2.3 DEVIATION FROM TEST STANDARD 16
3.2.4 TEST SETUP 17
3.2.5 EUT OPERATING CONDITIONS 18
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) 19
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) 20
3.2.8 TEST RESULTS (ABOVE 1000 MHZ) 22
4 . POWER SPECTRAL DENSITY TEST 23
4.1 APPLIED PROCEDURES / LIMIT 23
4.1.1 TEST PROCEDURE 23
4.1.2 DEVIATION FROM STANDARD 23
4.1.3 TEST SETUP 23
4.1.4 EUT OPERATION CONDITIONS 23
4.1.5 TEST RESULTS 24

Table of Contents

Page

5 . BANDWIDTH TEST 26

5.1 APPLIED PROCEDURES / LIMIT 26

5.1.1 TEST PROCEDURE 26

5.1.2 DEVIATION FROM STANDARD 26

5.1.3 TEST SETUP 26

5.1.4 EUT OPERATION CONDITIONS 26

5.1.5 TEST RESULTS 27

6 . PEAK OUTPUT POWER TEST 29

6.1 APPLIED PROCEDURES / LIMIT 29

6.1.1 TEST PROCEDURE 29

6.1.2 DEVIATION FROM STANDARD 29

6.1.3 TEST SETUP 29

6.1.4 EUT OPERATION CONDITIONS 29

6.1.5 TEST RESULTS 30

7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 31

7.1 DEVIATION FROM STANDARD 31

7.2 TEST SETUP 31

7.3 EUT OPERATION CONDITIONS 32

7.4 TEST RESULTS 32

8 . ANTENNA REQUIREMENT 34

8.1 STANDARD REQUIREMENT 34

8.2 EUT ANTENNA 34

9 . EUT TEST PHOTO 35

10 . EUT PHOTO 37

APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.
Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China
FCC Registered No.: 187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y ± U**，where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**，providing a level of confidence of approximately **95** %。

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Amplified Zigbee module
Trade Name	N/A
Model Name	YB2530+PA+LNA
Model Difference	N/A
Product Description	The EUT is a Amplified Zigbee module Operation Frequency: 2405~2480 MHz Modulation Type: OQPSK Radio Technology: ZIGBEE Number Of Channel 16 CH Antenna type: external antenna Antenna Gain (dBi) 3.0dbi Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Power	DC 3.3V
hardware version	--
Software version	--
Serial number	--
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	05	2425	09	2445	13	2465
02	2410	06	2430	10	2450	14	2470
03	2415	07	2435	11	2455	15	2475
04	2420	08	2440	12	2460	16	2480

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH1/ CH8/ CH16
Mode 2	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH1/ CH8/ CH16

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Amplified Zigbee module	N/A	YB2530+PA+LNA	N/A	EUT
E-3	Notebook	ASUS	AWT800	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	Unshielded

Note:

(1) The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2015.08.25	2016.08.24
2	Test Receiver	R&S	ESPI	101396	2015.08.25	2016.08.24
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2015.08.25	2016.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.07.06	2016.07.05
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2015.07.06	2016.07.05
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2015.08.25	2016.08.24
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2015.08.25	2016.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2015.08.25	2016.08.24
10	Loop Antenna	ARA	PLYB2530+PA+LNA30/B	1029	2015.07.06	2016.07.05
11	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05
13	RF cables	R&S	N/A	N/A	2015.07.06	2016.07.05

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2015.06.06	2016.06.05
2	LISN	R&S	NSLK8126	8126466	2015.08.24	2016.08.23
3	LISN	R&S	NSLK8126	8126487	2015.08.24	2016.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06
5	RF cables	R&S	R204	R20X	2015.07.06	2016.07.05

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

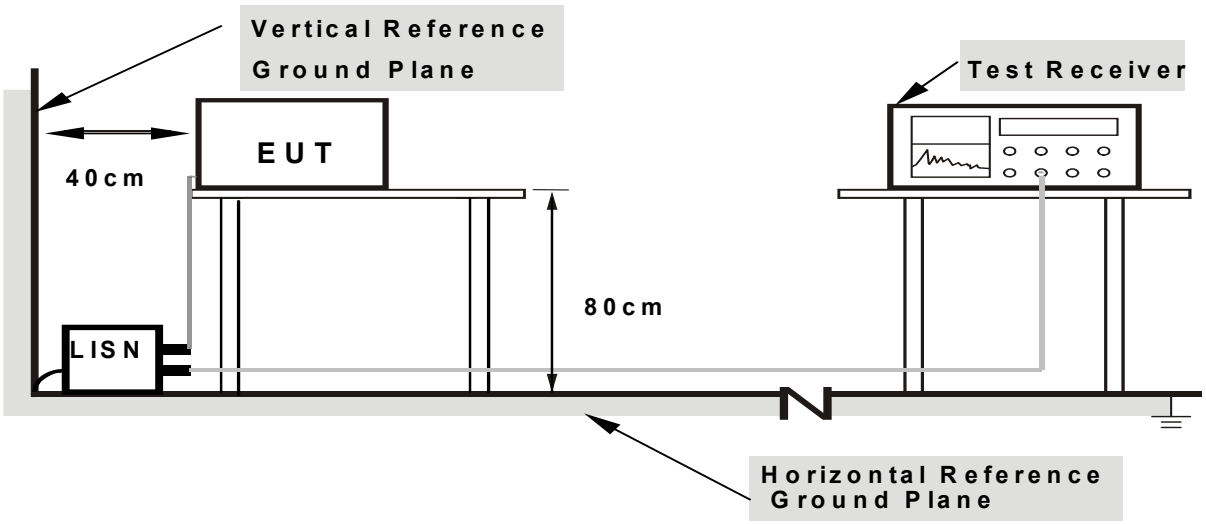

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

EUT :	Amplified Zigbee module	Model Name. :	YB2530+PA+LNA
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 3.3V from PC	Test Mode :	Mode 2

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1940	46.57	10.06	56.63	63.86	-7.23	QP	
2		0.1940	26.78	10.06	36.84	53.86	-17.02	AVG	
3	*	0.5180	41.15	10.12	51.27	56.00	-4.73	QP	
4		0.5180	22.90	10.12	33.02	46.00	-12.98	AVG	
5		0.8740	28.04	10.15	38.19	56.00	-17.81	QP	
6		0.8740	20.94	10.15	31.09	46.00	-14.91	AVG	
7		2.3580	23.44	10.18	33.62	56.00	-22.38	QP	
8		2.3580	12.46	10.18	22.64	46.00	-23.36	AVG	
9		5.6220	13.14	10.11	23.25	60.00	-36.75	QP	
10		5.6220	4.64	10.11	14.75	50.00	-35.25	AVG	
11		22.1620	23.50	10.18	33.68	60.00	-26.32	QP	
12		22.1620	14.07	10.18	24.25	50.00	-25.75	AVG	

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

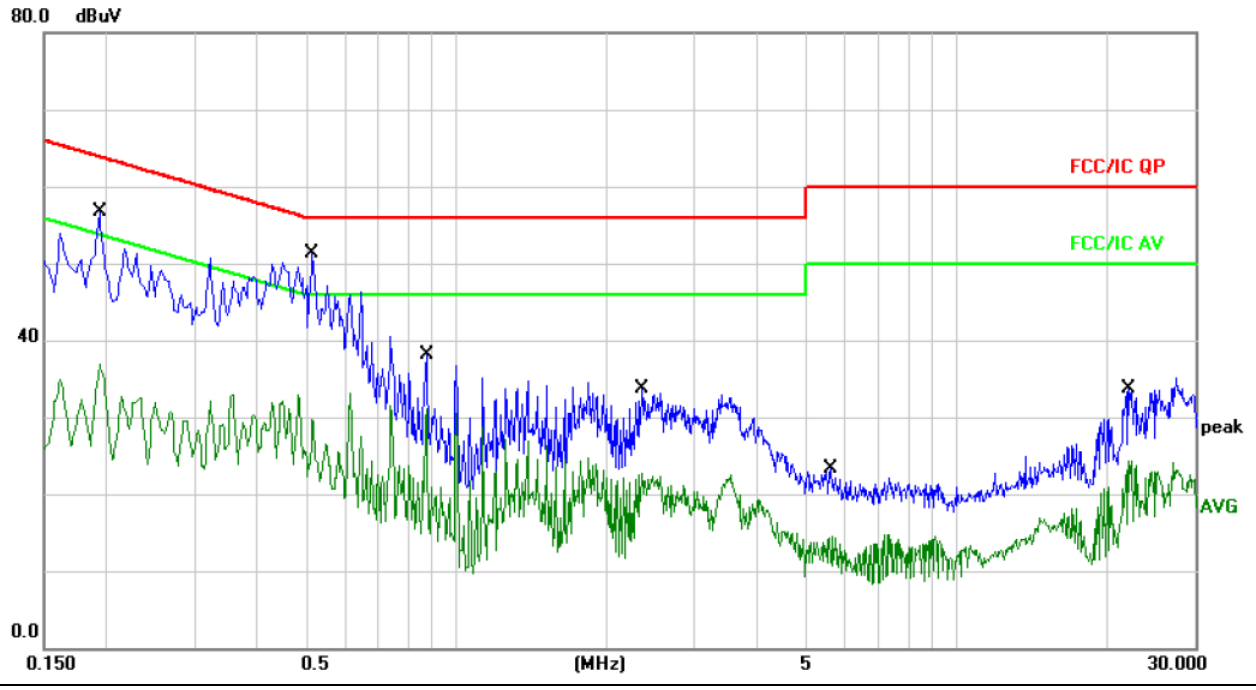

EUT：	Amplified Zigbee module	Model Name. ：	YB2530+PA+LNA
Temperature：	26℃	Relative Humidity：	54%
Pressure：	1010hPa	Phase：	N
Test Voltage ：	DC 3.3V from PC	Test Mode：	Mode 2

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	43.96	10.05	54.01	65.56	-11.55	QP	
2		0.1580	27.06	10.05	37.11	55.56	-18.45	AVG	
3	*	0.4300	42.52	10.11	52.63	57.25	-4.62	QP	
4		0.4300	24.58	10.11	34.69	47.25	-12.56	AVG	
5		0.8740	26.59	10.15	36.74	56.00	-19.26	QP	
6		0.8740	21.36	10.15	31.51	46.00	-14.49	AVG	
7		2.3580	24.10	10.18	34.28	56.00	-21.72	QP	
8		2.3580	13.49	10.18	23.67	46.00	-22.33	AVG	
9		7.2700	13.25	10.10	23.35	60.00	-36.65	QP	
10		7.2700	4.75	10.10	14.85	50.00	-35.15	AVG	
11		22.4619	25.95	10.18	36.13	60.00	-23.87	QP	
12		22.4619	14.53	10.18	24.71	50.00	-25.29	AVG	

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

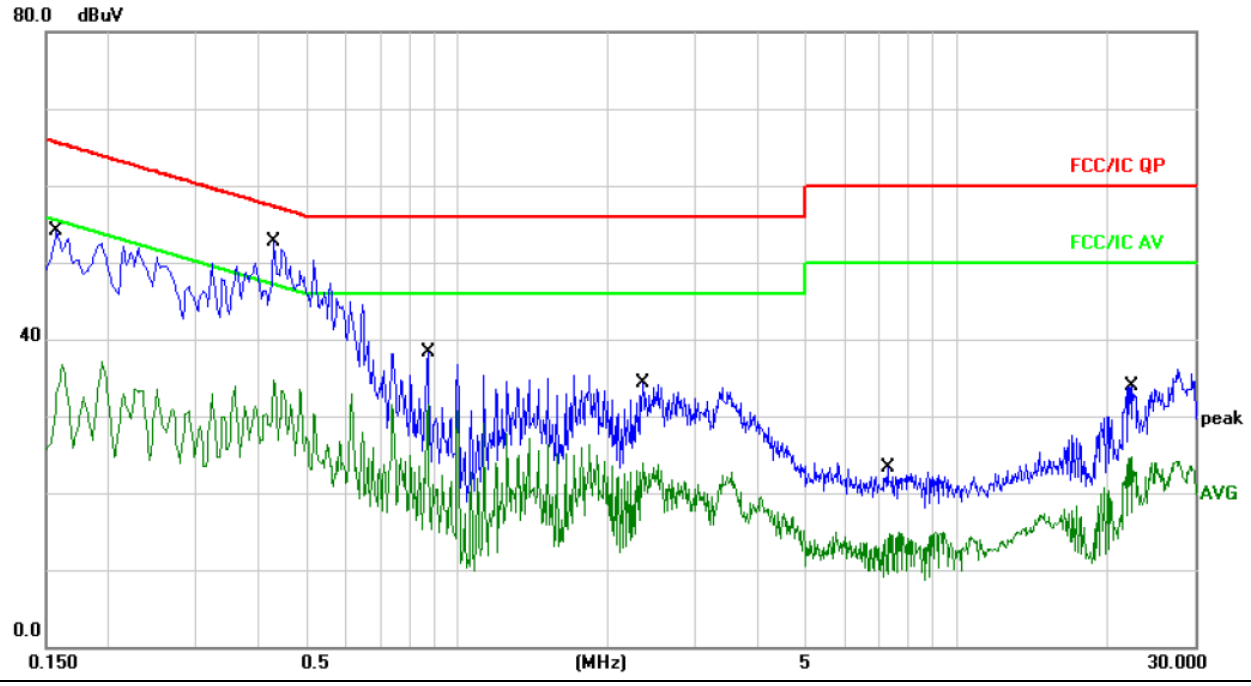

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / *10Hz* for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported
We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in t
he report.

3.2.3 DEVIATION FROM TEST STANDARD

No deviation

3.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

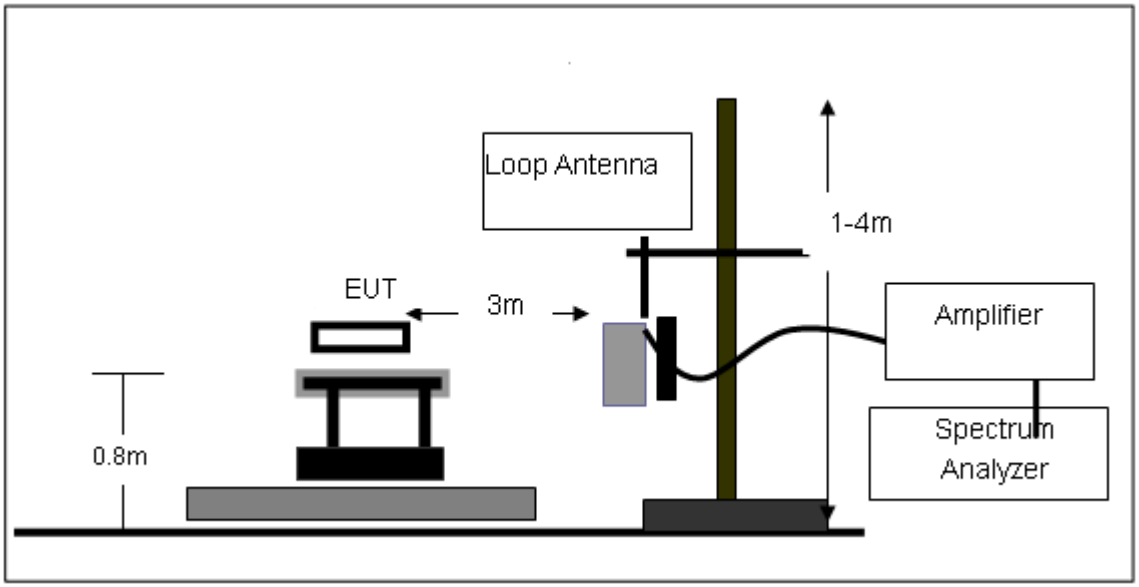

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

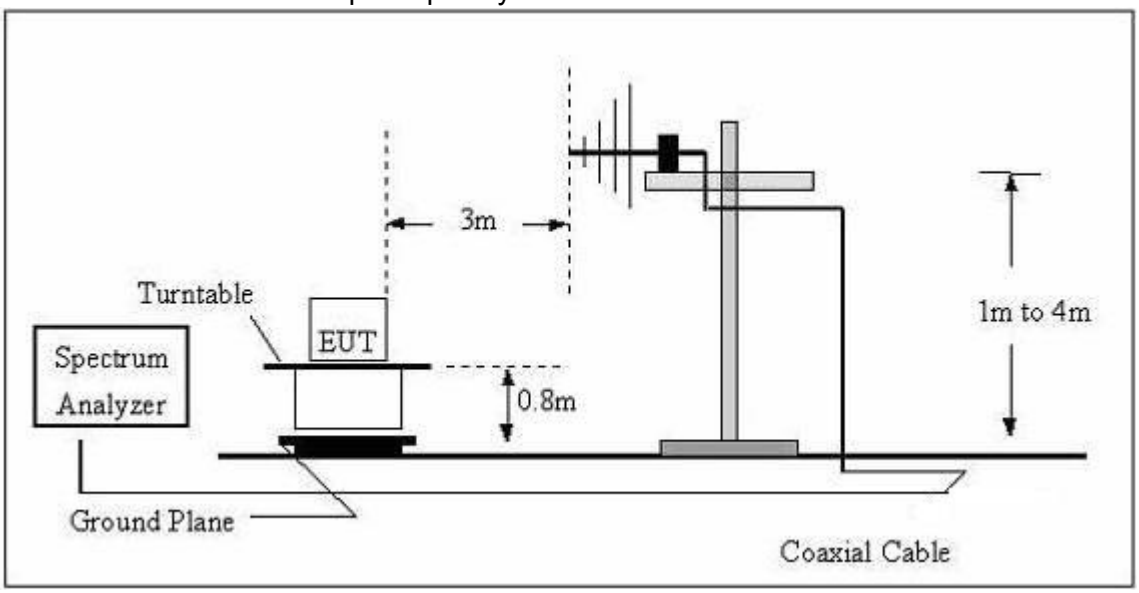

（C）Radiated Emission Test-Up Frequency Above 1GHz

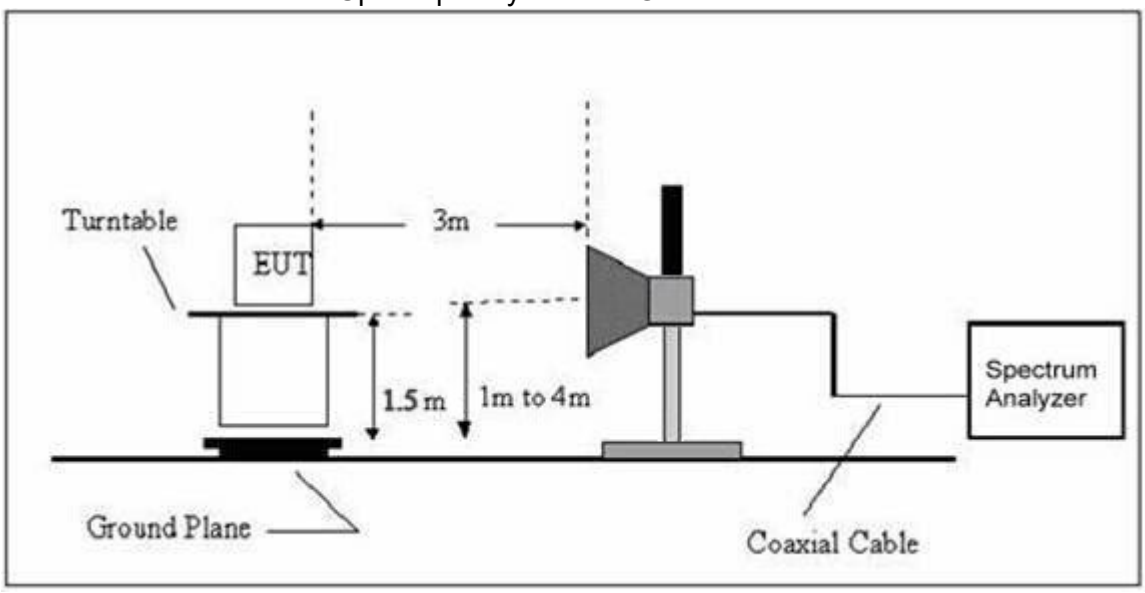

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT：	Amplified Zigbee module	Model Name. ：	YB2530+PA+LNA
Temperature：	20℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 3.3V from PC
Test Mode ：	Mode 2	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
Distance extrapolation factor =40 log (specific distance/test distance)(dB);
Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Amplified Zigbee module	Model Name :	YB2530+PA+LNA
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.3V from PC		
Test Mode :	Mode 2		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		39.8542	31.77	-8.84	22.93	40.00	-17.07	QP			
2		129.9226	37.62	-14.11	23.51	43.50	-19.99	QP			
3		195.1365	44.76	-15.90	28.86	43.50	-14.64	QP			
4		375.9385	44.29	-10.77	33.52	46.00	-12.48	QP			
5		425.0280	44.80	-9.60	35.20	46.00	-10.80	QP			
6	*	625.0780	40.82	-5.52	35.30	46.00	-10.70	QP			

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All interfaces was connected, and BT TX mode was link.

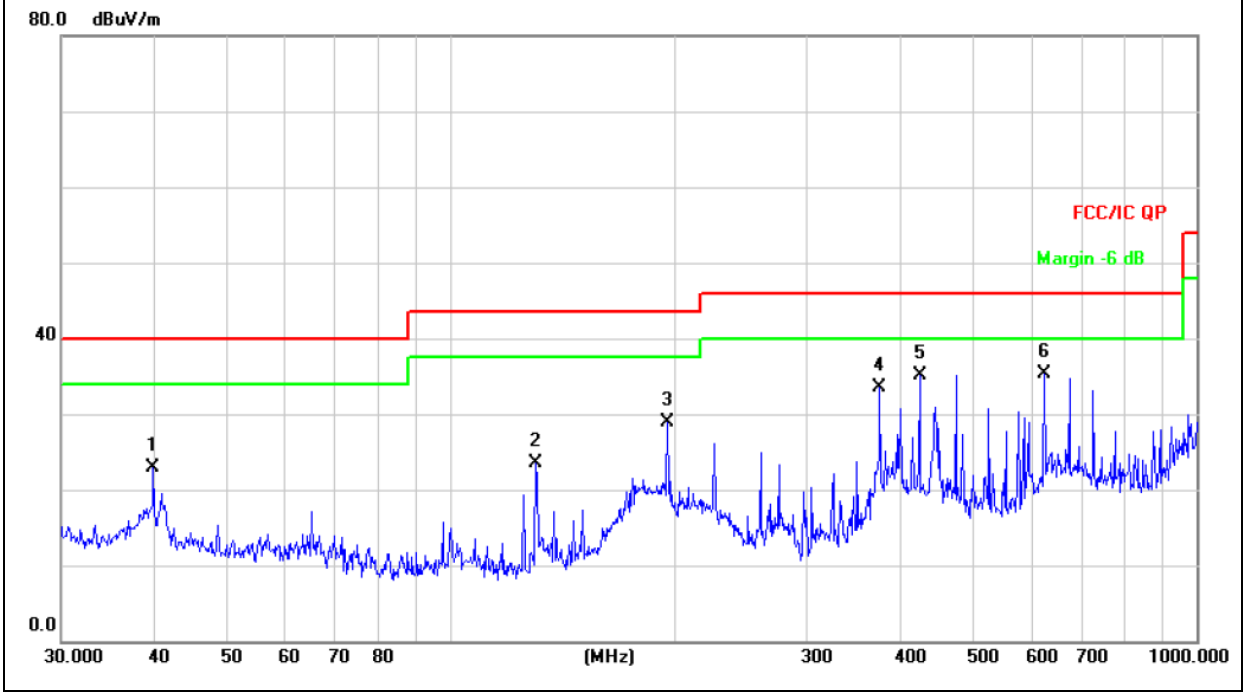

EUT :	Amplified Zigbee module	Model Name :	YB2530+PA+LNA
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.3V from PC		
Test Mode :	Mode 2		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		40.7016	34.43	-8.94	25.49	40.00	-14.51	QP			
2		129.9226	35.94	-14.11	21.83	43.50	-21.67	QP			
3		225.3080	44.80	-15.32	29.48	46.00	-16.52	QP			
4		375.9385	42.44	-10.77	31.67	46.00	-14.33	QP			
5	*	595.1329	47.23	-5.83	41.40	46.00	-4.60	QP			
6		625.0780	44.65	-5.52	39.13	46.00	-6.87	QP			

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All interfaces was connected, and BT TX mode was link.

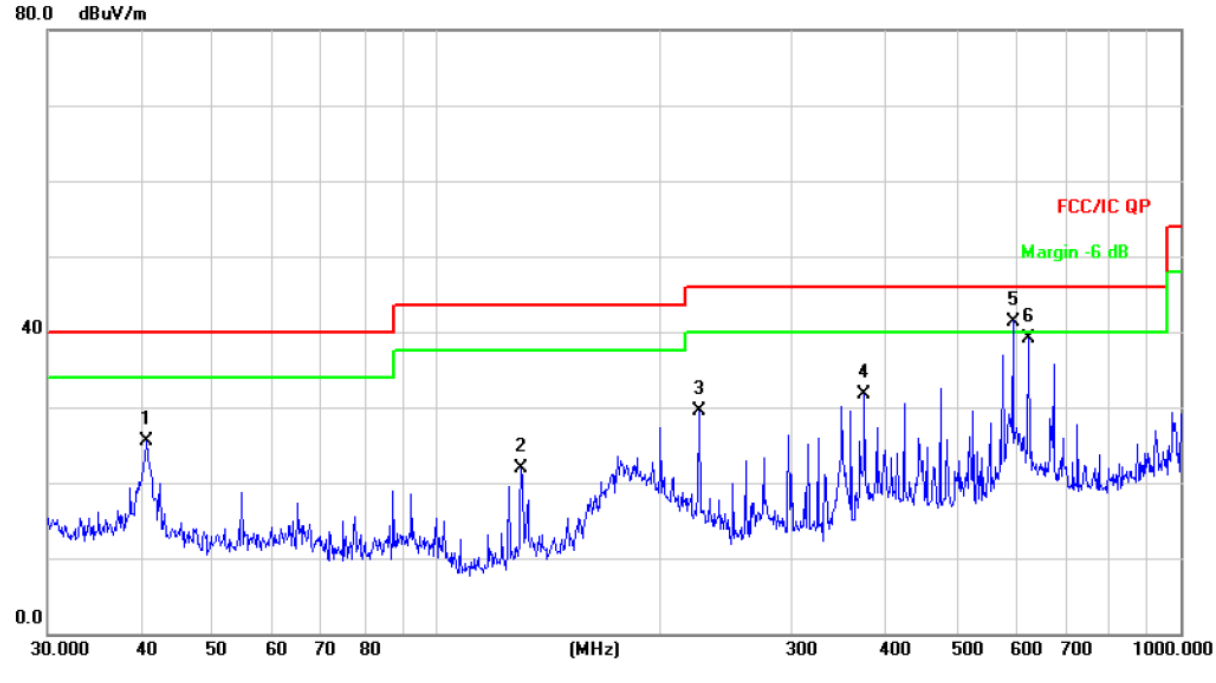

3.2.8 TEST RESULTS (1GHZ~25GHZ)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2405							
V	4810.00	65.89	-1.05	64.84	74	-9.16	Pk
V	4810.00	47.36	-1.05	46.31	54	-7.69	AV
V	7215.00	59.67	-4.86	54.81	74	-19.19	Pk
V	7215.00	43.35	-4.86	38.49	54	-15.51	AV
H	4810.00	66.79	-1.05	65.74	74	-8.26	Pk
H	4810.00	46.06	-1.05	45.01	54	-8.99	AV
H	7215.00	59.29	-4.86	54.43	74	-19.57	Pk
H	7215.00	44.26	-4.86	39.40	54	-14.60	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2440							
V	4880.00	64.62	-0.62	64.00	74	-10.00	Pk
V	4880.00	47.84	-0.62	47.22	54	-6.78	AV
V	7320.00	58.87	-4.91	53.96	74	-20.04	Pk
V	7320.00	44.36	-4.91	39.45	54	-14.55	AV
H	4880.00	64.67	-0.62	64.05	74	-9.95	Pk
H	4880.00	43.69	-0.62	43.07	54	-10.93	AV
H	7320.00	58.61	-4.91	53.70	74	-20.30	Pk
H	7320.00	43.06	-4.91	38.15	54	-15.85	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2480							
V	4960.00	65.94	-0.24	65.70	74	-8.30	Pk
V	4960.00	47.69	-0.24	47.45	54	-6.55	AV
V	7440.00	57.35	-5.06	52.29	74	-21.71	Pk
V	7440.00	42.39	-5.06	37.33	54	-16.67	AV
H	4960.00	65.26	-0.24	65.02	74	-8.98	Pk
H	4960.00	44.67	-0.24	44.43	54	-9.57	AV
H	7440.00	57.33	-5.06	52.27	74	-21.73	Pk
H	7440.00	42.51	-5.06	37.45	54	-16.55	AV
Remark: Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level							

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

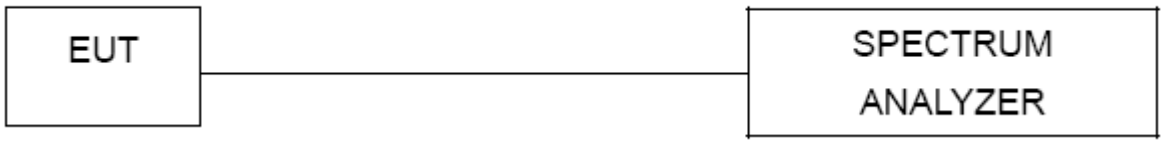

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	Amplified Zigbee module	Model Name :	YB2530+PA+LNA
Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.3V from PC
Test Mode :	TX Mode /CH01, CH08, CH16		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2405 MHz	2.66	8	PASS
2440 MHz	2.96	8	PASS
2480 MHz	2.50	8	PASS

TX CH01

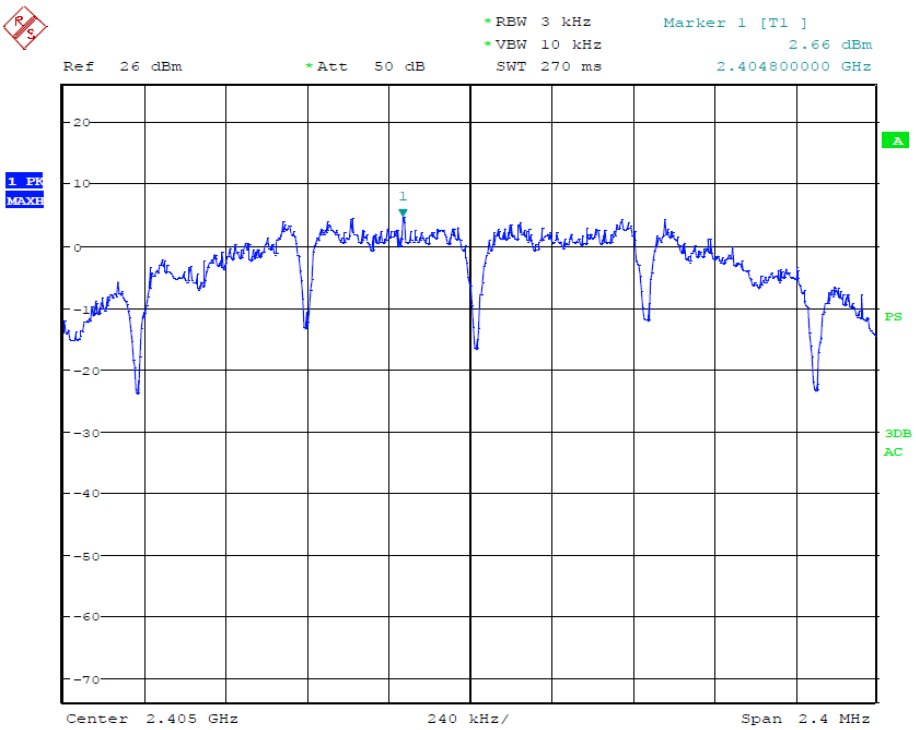

TX CH08

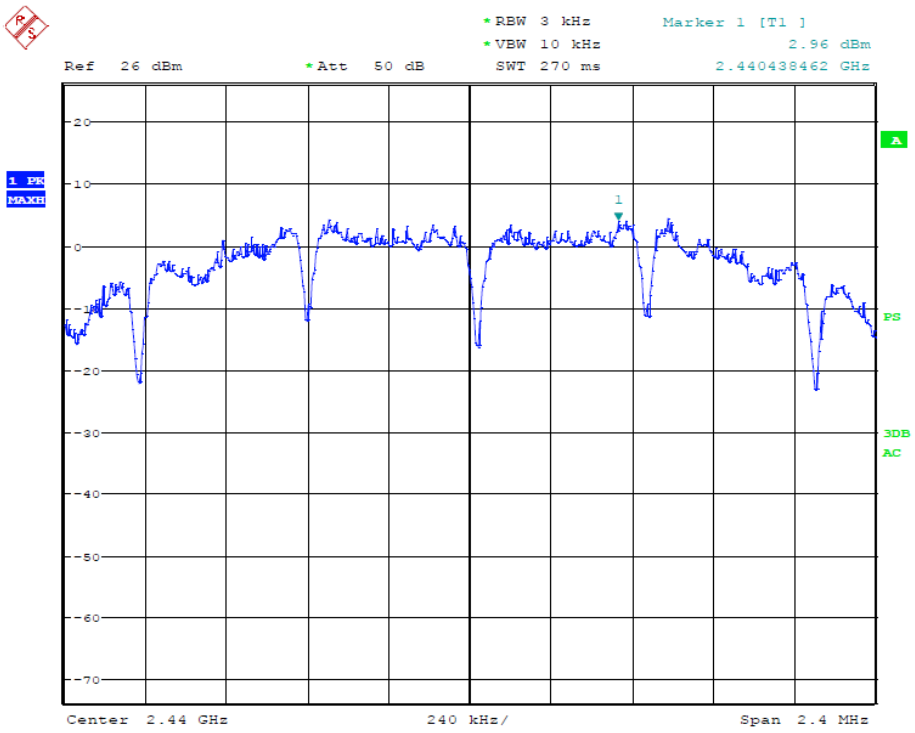

TX CH16

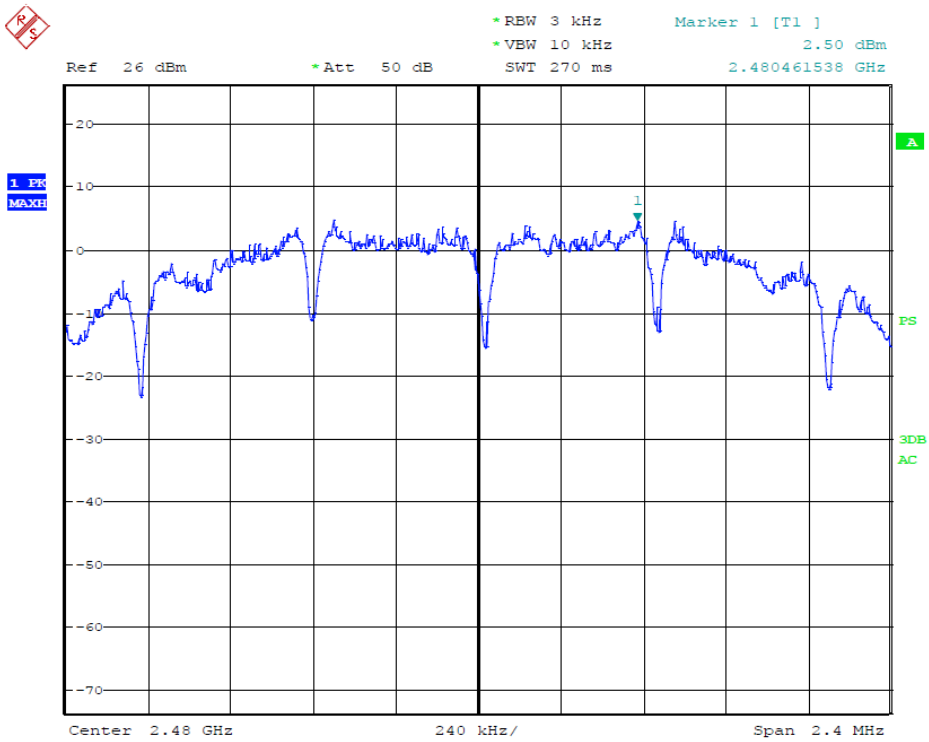

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

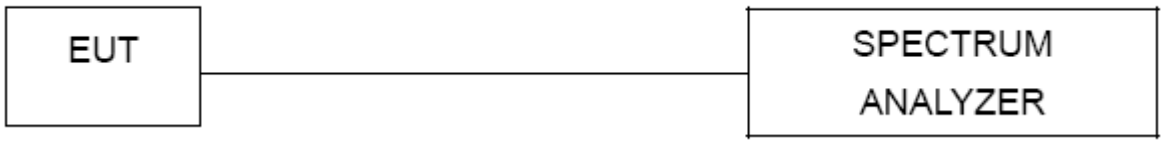

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

EUT :	Amplified Zigbee module	Model Name :	YB2530+PA+LNA
Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V from PC
Test Mode :	TX Mode /CH01, CH08, CH16		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2405	1.03	500	Pass
Middle	2440	1.03	500	Pass
High	2480	1.13	500	Pass

TX CH 01

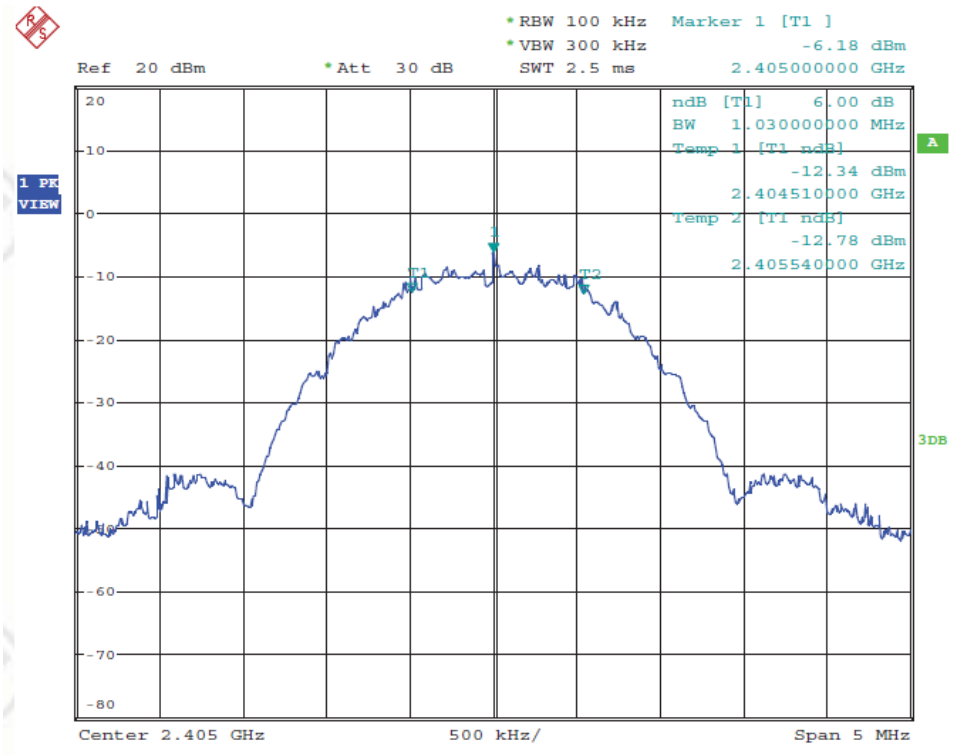

TX CH 08

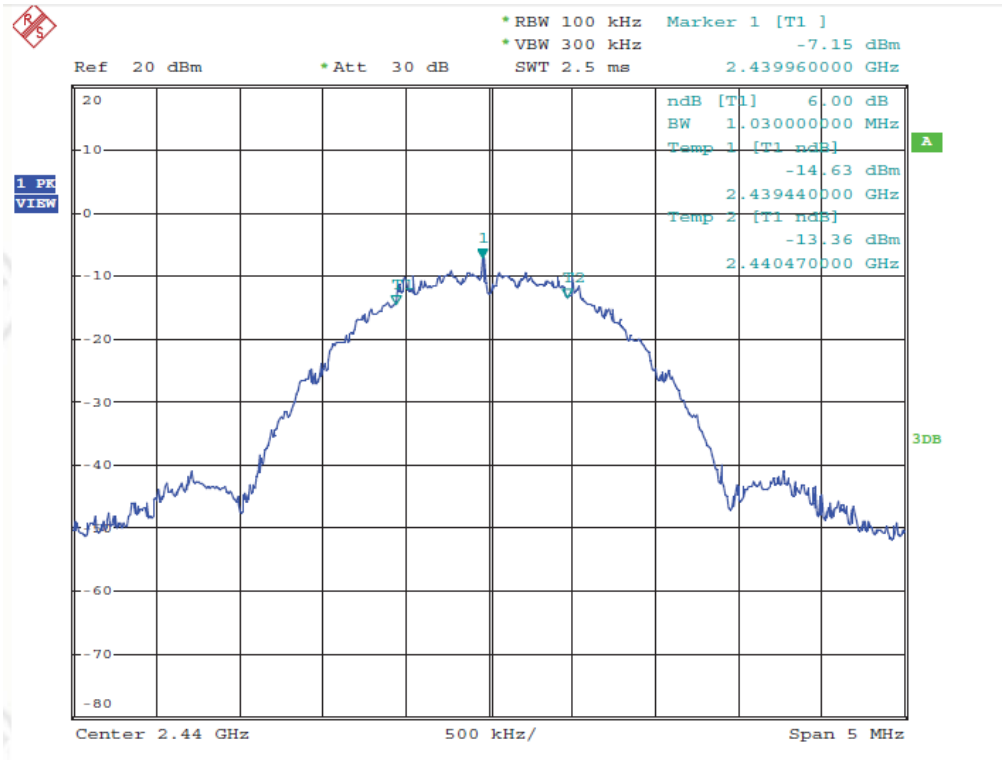

TX CH 16

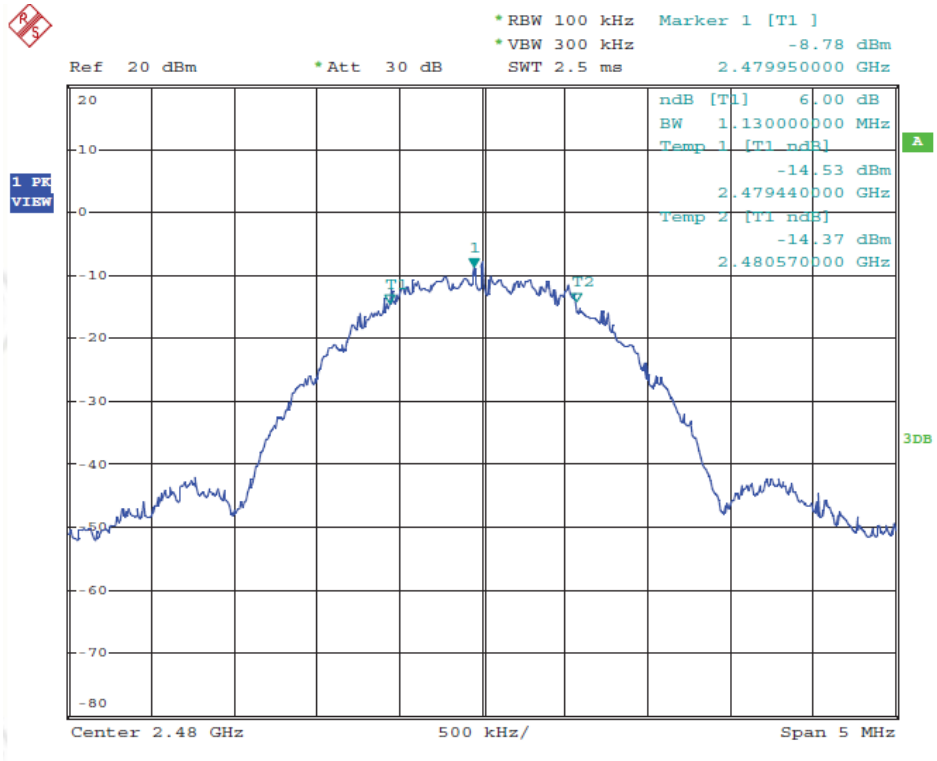

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

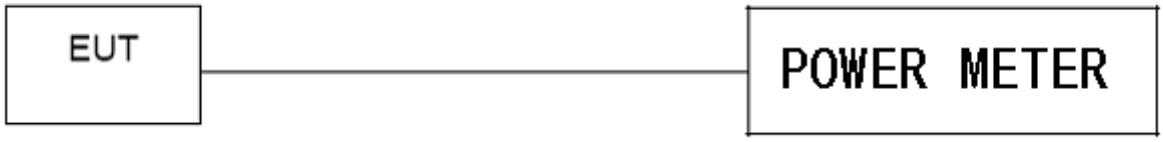

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT：	Amplified Zigbee module	Model Name ：	YB2530+PA+LNA
Temperature：	25℃	Relative Humidity：	60%
Pressure：	1012 hPa	Test Voltage ：	DC 3.3V from PC
Test Mode ：	TX b/g/n(20M)		

TX Mode			
Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2405	18.12	30
CH08	2440	18.87	30
CH16	2480	18.69	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

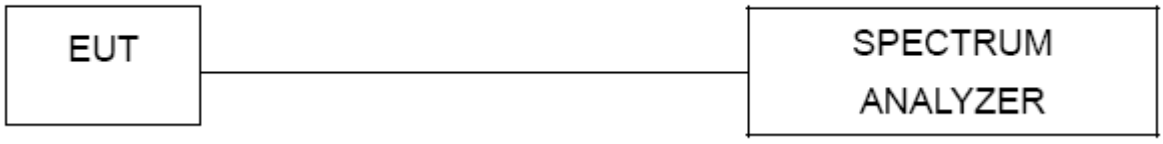

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

EUT：	Amplified Zigbee module	Model Name ：	YB2530+PA+LNA
Temperature：	25℃	Relative Humidity：	60%
Pressure：	1012 hPa	Test Voltage ：	DC 3.3V from PC

Radiated

Frequency (MHz)	Antenna polarization (H/V)	Factor (dB)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
			PK	PK	AV	Pass
<2400	H	1.42	51.21	74.00	54.00	Pass
<2400	V	1.39	50.86	74.00	54.00	Pass
>2483.5	H	1.62	50.69	74.00	54.00	Pass
>2483.5	V	1.75	51.33	74.00	54.00	Pass

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
If peak level below the average limit, the average level was no recording.

Band Edge, Left Side

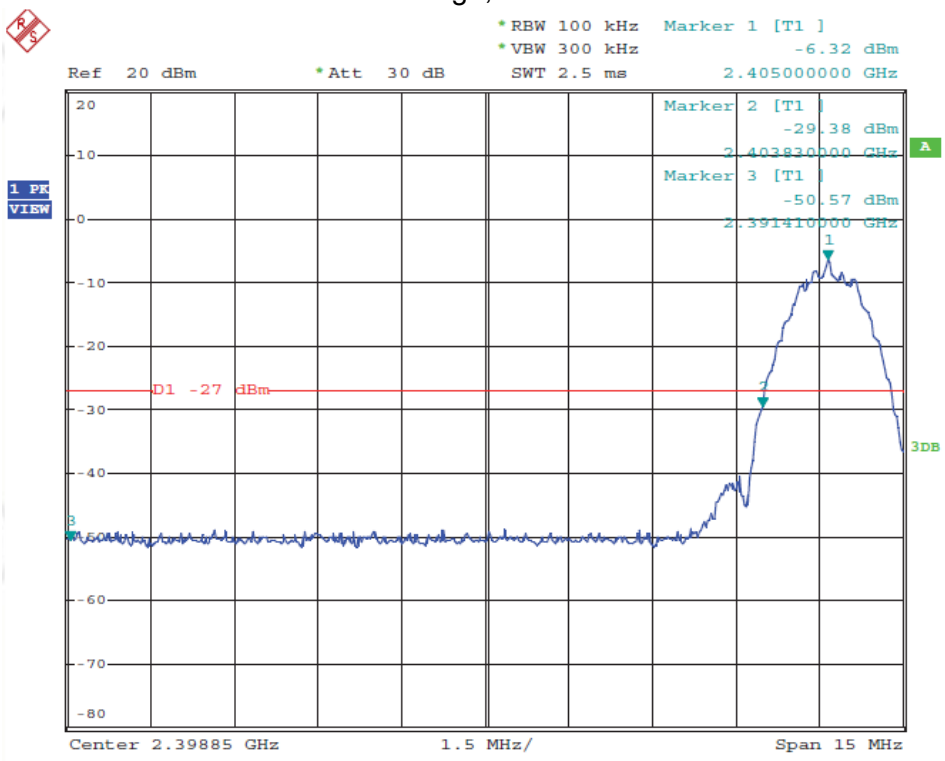

Band Edge, Right Side

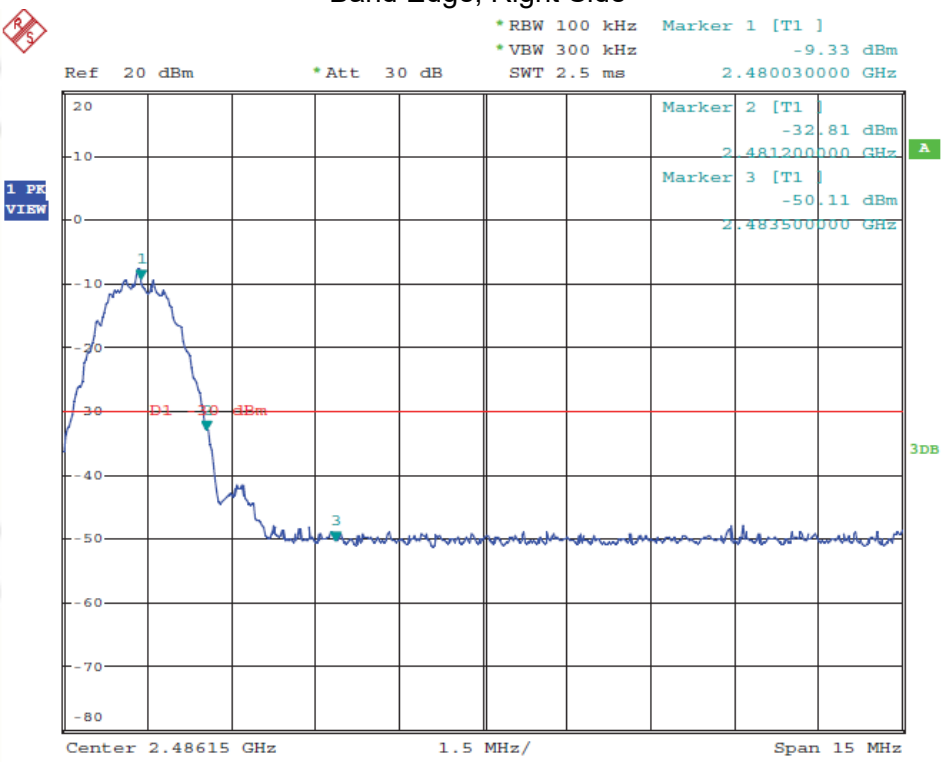

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is external antenna and used anti spiral antenna,. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

Radiated Measurement Photos

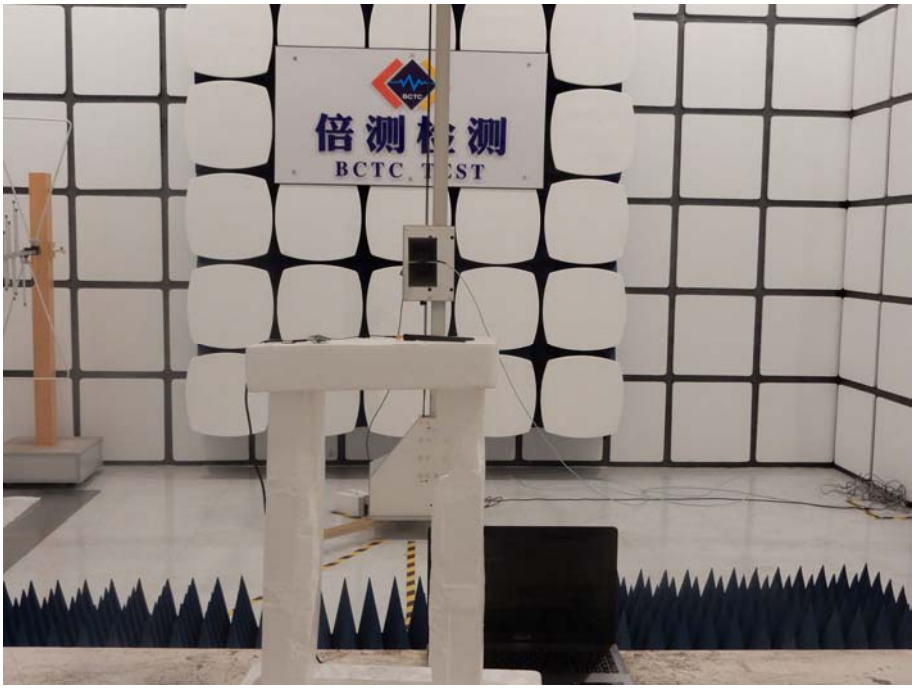

Conducted Measurement Photos

10. EUT PHOTO

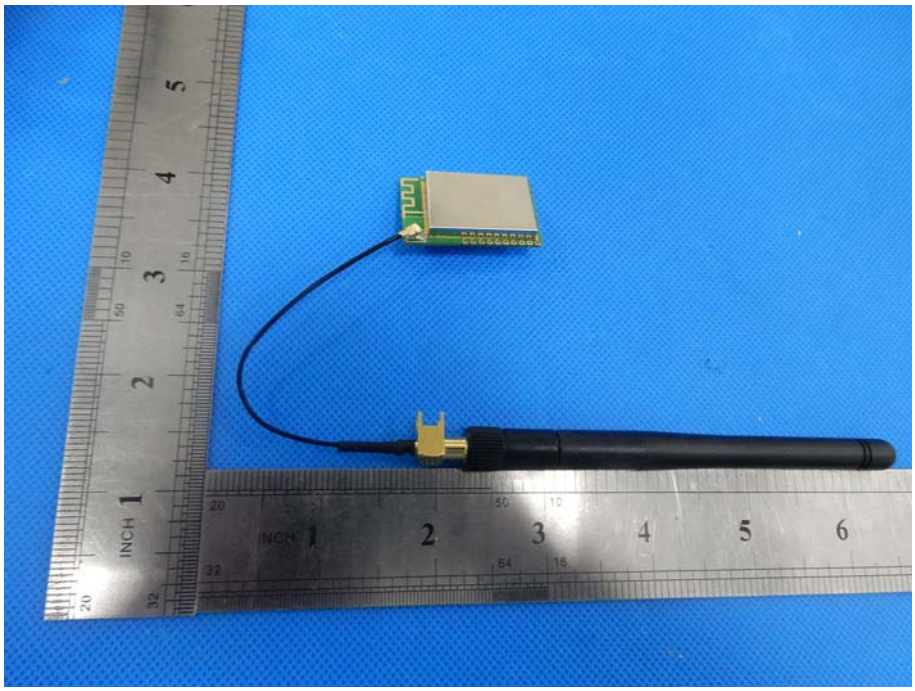

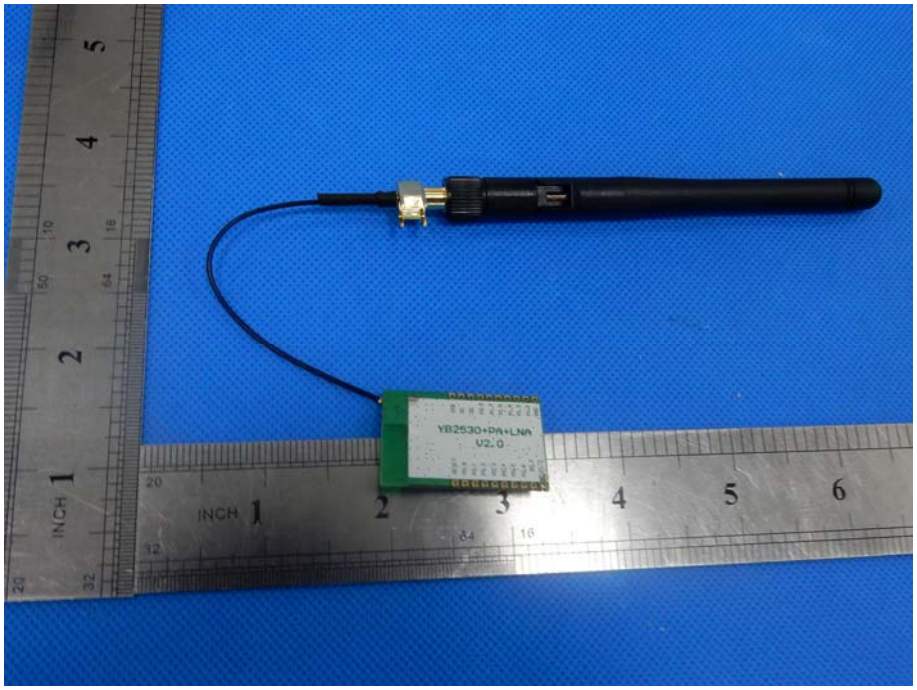

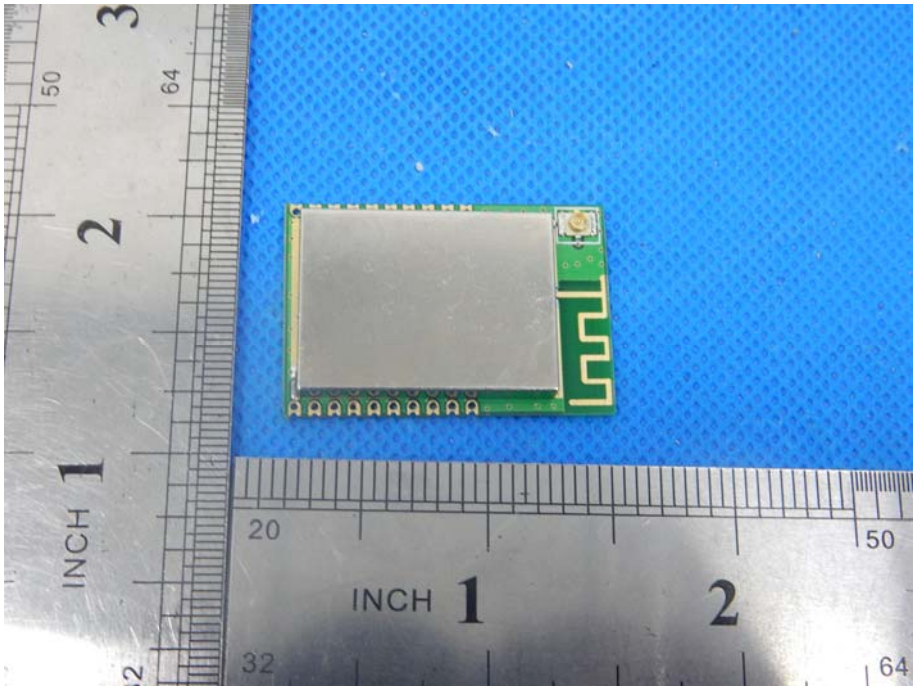

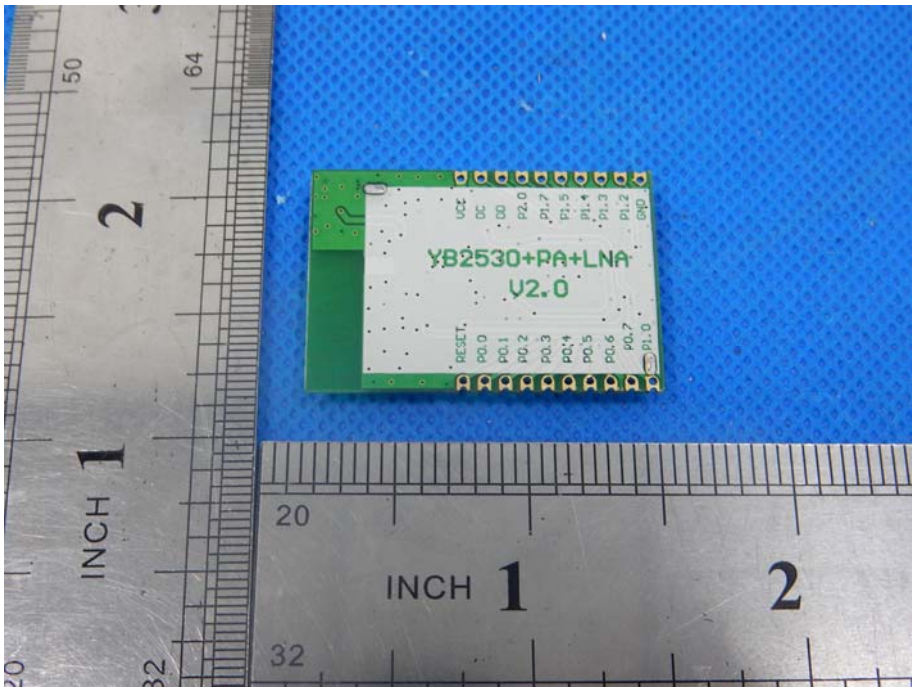

※ ※ ※ ※ ※ **END OF REPORT** ※ ※ ※ ※ ※