



REPORT No.: SZ21100183S02

Annex D Plots of RF Emission Test Results

HAC RF_GSM850_GSM Voice_Ch128_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 93.05 V/m; Power Drift = -0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 41.11 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 43.9 dBV/m	Grid 2 M3 44.87 dBV/m	Grid 3 M3 41.45 dBV/m
Grid 4 M4 39.73 dBV/m	Grid 5 M3 41.11 dBV/m	Grid 6 M4 38.66 dBV/m
Grid 7 M4 33.54 dBV/m	Grid 8 M4 34.97 dBV/m	Grid 9 M4 34.41 dBV/m

Cursor:

Total = 44.87 dBV/m

E Category: M3

Location: 3.5, -25, 8.7 mm

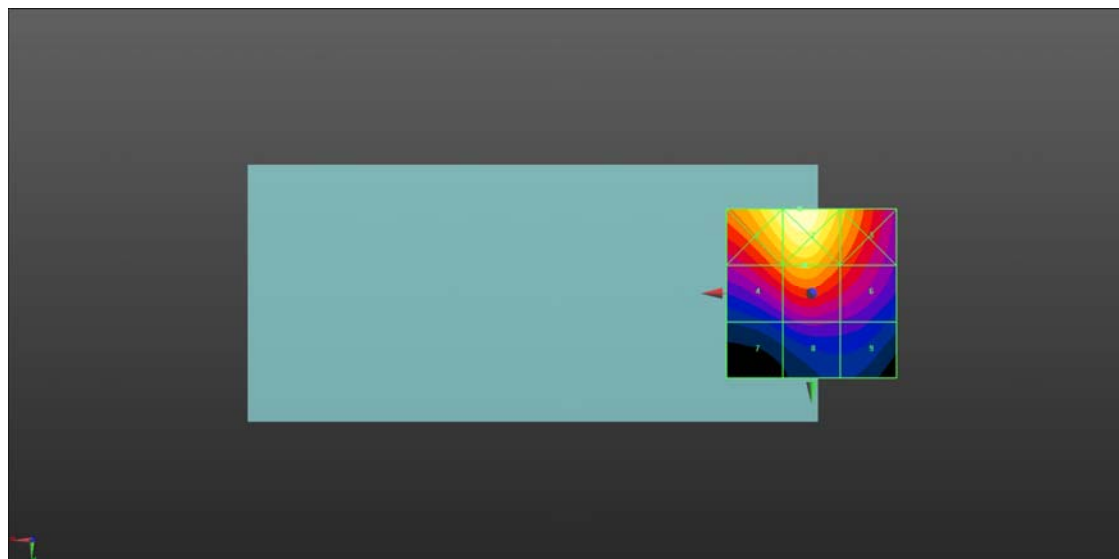

0 dB = 175.2 V/m = 44.87 dBV/m

HAC RF_GSM850_GSM Voice_Ch189_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 92.61 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 41.11 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 43.91 dBV/m	Grid 2 M3 44.83 dBV/m	Grid 3 M3 41.41 dBV/m
Grid 4 M4 39.8 dBV/m	Grid 5 M3 41.11 dBV/m	Grid 6 M4 38.63 dBV/m
Grid 7 M4 33.6 dBV/m	Grid 8 M4 34.99 dBV/m	Grid 9 M4 34.44 dBV/m

Cursor:

Total = 44.83 dBV/m

E Category: M3

Location: 3, -25, 8.7 mm

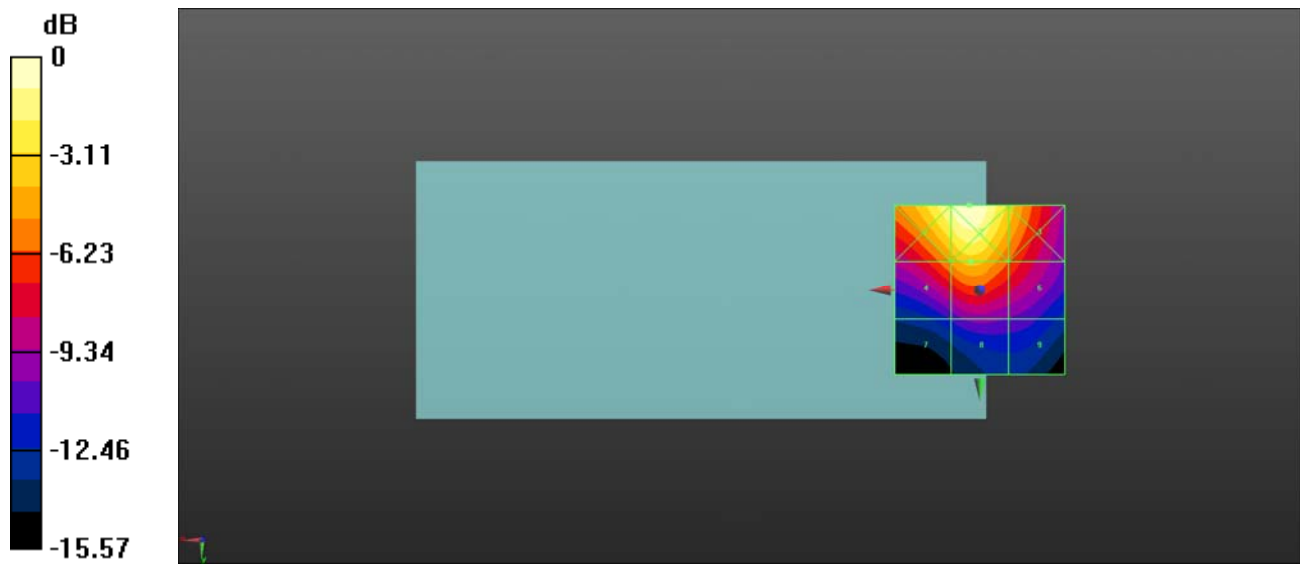

0 dB = 174.4 V/m = 44.83 dBV/m

HAC RF_GSM850_GSM Voice_Ch251_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 91.35 V/m; Power Drift = -0.08 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.96 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 43.94 dBV/m	Grid 2 M3 44.89 dBV/m	Grid 3 M3 41.51 dBV/m
Grid 4 M4 39.6 dBV/m	Grid 5 M3 40.96 dBV/m	Grid 6 M4 38.67 dBV/m
Grid 7 M4 33.42 dBV/m	Grid 8 M4 34.96 dBV/m	Grid 9 M4 34.71 dBV/m

Cursor:

Total = 44.89 dBV/m

E Category: M3

Location: 3.5, -25, 8.7 mm

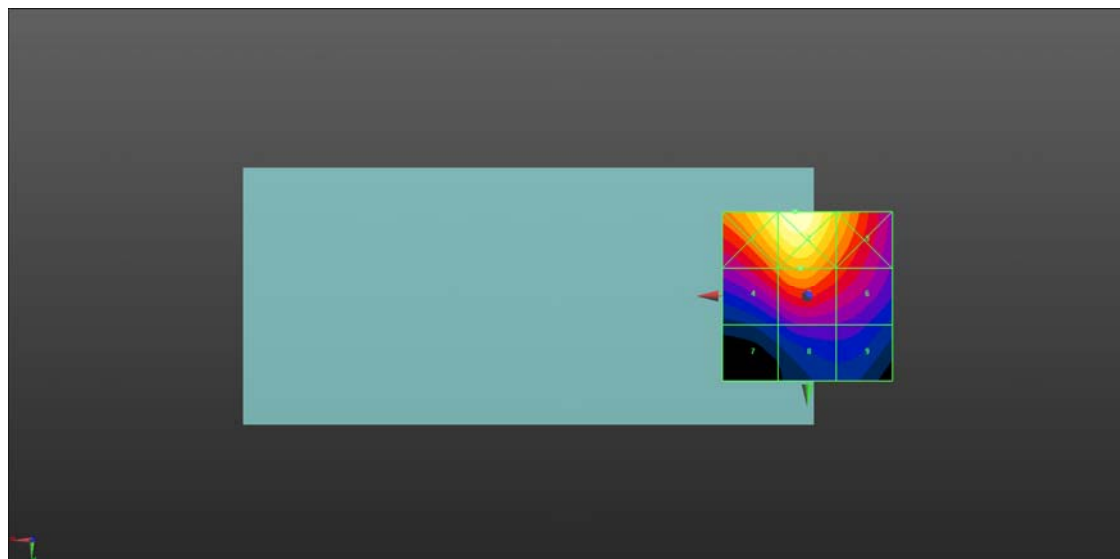

0 dB = 175.7 V/m = 44.90 dBV/m

HAC RF_GSM1900_GSM Voice_Ch512_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.70 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.57 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.57 dBV/m	Grid 2 M4 26.89 dBV/m	Grid 3 M4 24.74 dBV/m
Grid 4 M4 23.72 dBV/m	Grid 5 M4 26.91 dBV/m	Grid 6 M4 26.97 dBV/m
Grid 7 M4 25.7 dBV/m	Grid 8 M4 28.76 dBV/m	Grid 9 M4 28.76 dBV/m

Cursor:

Total = 28.76 dBV/m

E Category: M4

Location: -9, 25, 8.7 mm

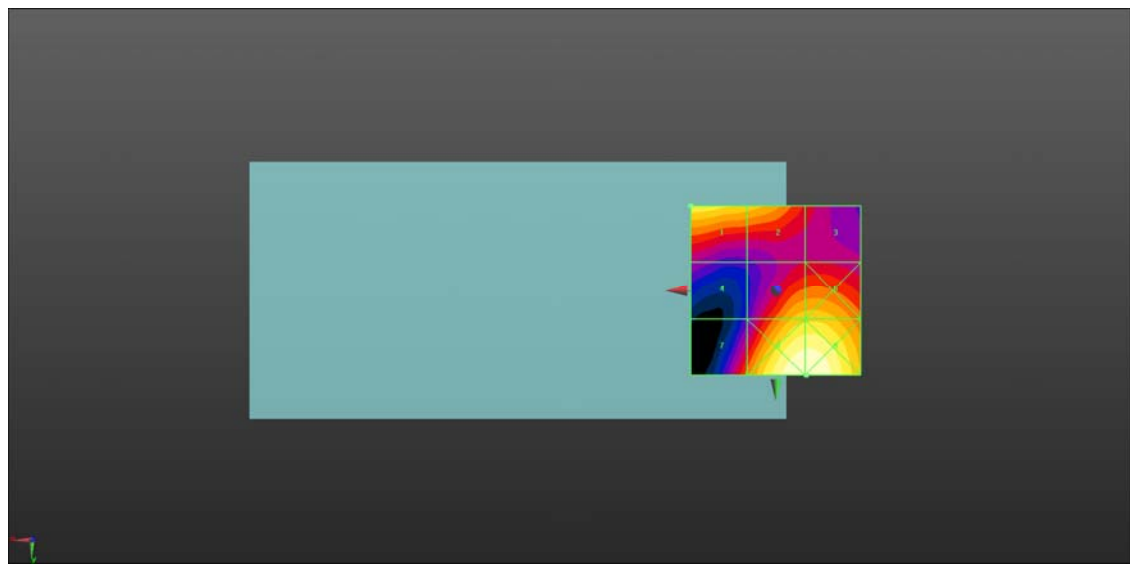

0 dB = 27.43 V/m = 28.76 dBV/m

HAC RF_GSM1900_GSM Voice_Ch661_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.60 V/m; Power Drift = 0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.65 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.65 dBV/m	Grid 2 M4 26.91 dBV/m	Grid 3 M4 24.65 dBV/m
Grid 4 M4 23.83 dBV/m	Grid 5 M4 26.83 dBV/m	Grid 6 M4 26.89 dBV/m
Grid 7 M4 25.7 dBV/m	Grid 8 M4 28.72 dBV/m	Grid 9 M4 28.73 dBV/m

Cursor:

Total = 28.73 dBV/m

E Category: M4

Location: -9, 25, 8.7 mm

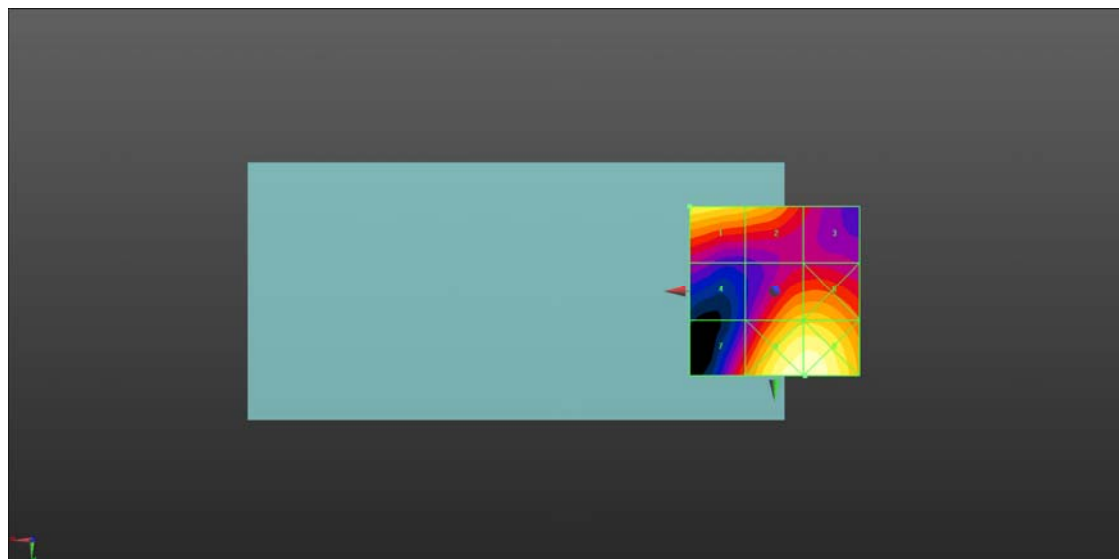

0 dB = 27.31 V/m = 28.73 dBV/m

HAC RF_GSM1900_GSM Voice_Ch810_E

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.69 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.60 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.6 dBV/m	Grid 2 M4 26.87 dBV/m	Grid 3 M4 24.68 dBV/m
Grid 4 M4 23.67 dBV/m	Grid 5 M4 26.85 dBV/m	Grid 6 M4 26.91 dBV/m
Grid 7 M4 25.69 dBV/m	Grid 8 M4 28.69 dBV/m	Grid 9 M4 28.69 dBV/m

Cursor:

Total = 28.69 dBV/m

E Category: M4

Location: -9, 25, 8.7 mm

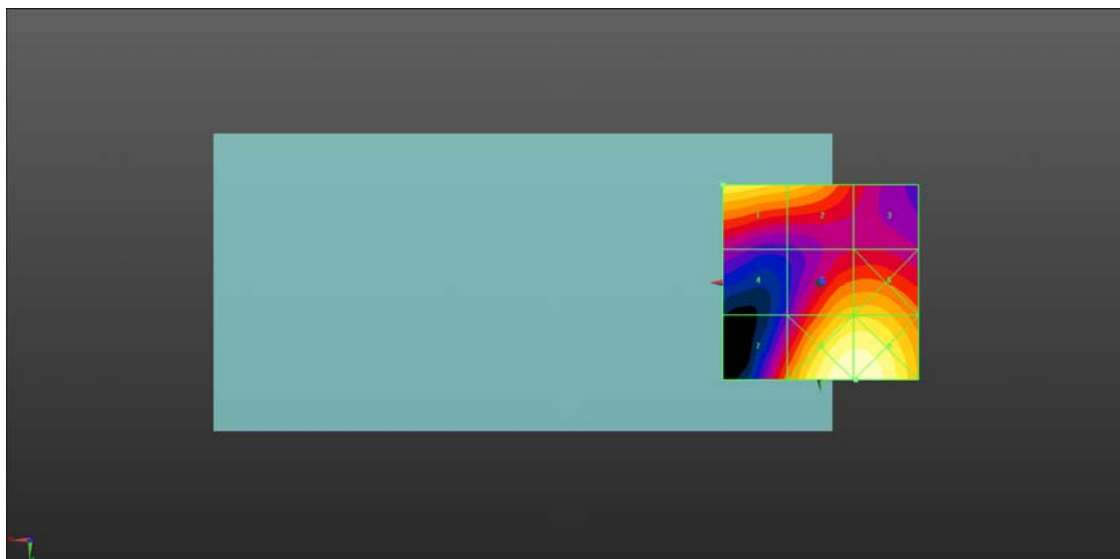

0 dB = 27.21 V/m = 28.69 dBV/m

HAC_RF_CDMA2000 BC0_RC1 SO3_Ch1013_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 815.04 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1013/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.044 V/m; Power Drift = 0.09 dB

Applied MIF = 3.26 dB

RF audio interference level = 18.68 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.68 dBV/m	Grid 2 M4 17.66 dBV/m	Grid 3 M4 15.28 dBV/m
Grid 4 M4 21.07 dBV/m	Grid 5 M4 18.68 dBV/m	Grid 6 M4 15.28 dBV/m
Grid 7 M4 19.41 dBV/m	Grid 8 M4 17.79 dBV/m	Grid 9 M4 14.31 dBV/m

Cursor:

Total = 21.07 dBV/m

E Category: M4

Location: 23.5, -1, 8.7 mm

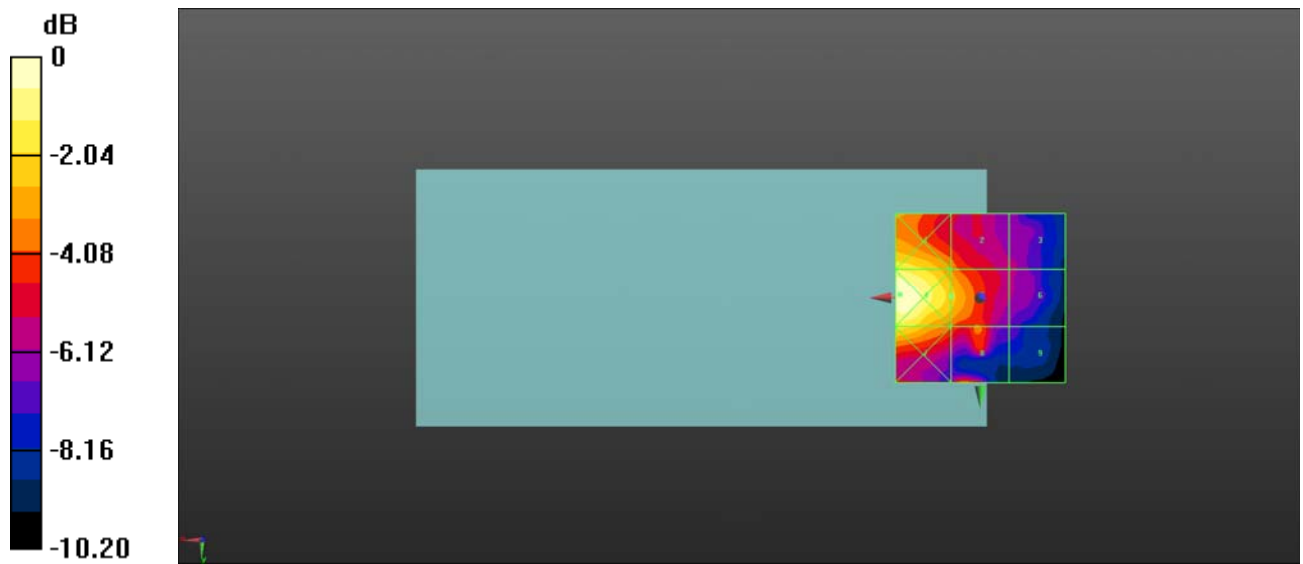

0 dB = 11.31 V/m = 21.07 dBV/m

HAC_RF_CDMA2000 BC0_RC1 SO3_Ch384_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch384/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.088 V/m; Power Drift = 0.18 dB

Applied MIF = 3.26 dB

RF audio interference level = 19.15 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.06 dBV/m	Grid 2 M4 18.92 dBV/m	Grid 3 M4 16.16 dBV/m
Grid 4 M4 21.14 dBV/m	Grid 5 M4 19.15 dBV/m	Grid 6 M4 16.14 dBV/m
Grid 7 M4 19.42 dBV/m	Grid 8 M4 18.21 dBV/m	Grid 9 M4 14.66 dBV/m



Cursor:

Total = 21.14 dBV/m

E Category: M4

Location: 22.5, -0.5, 8.7 mm

Maximum value of Total (interpolated) = 11.41 V/m

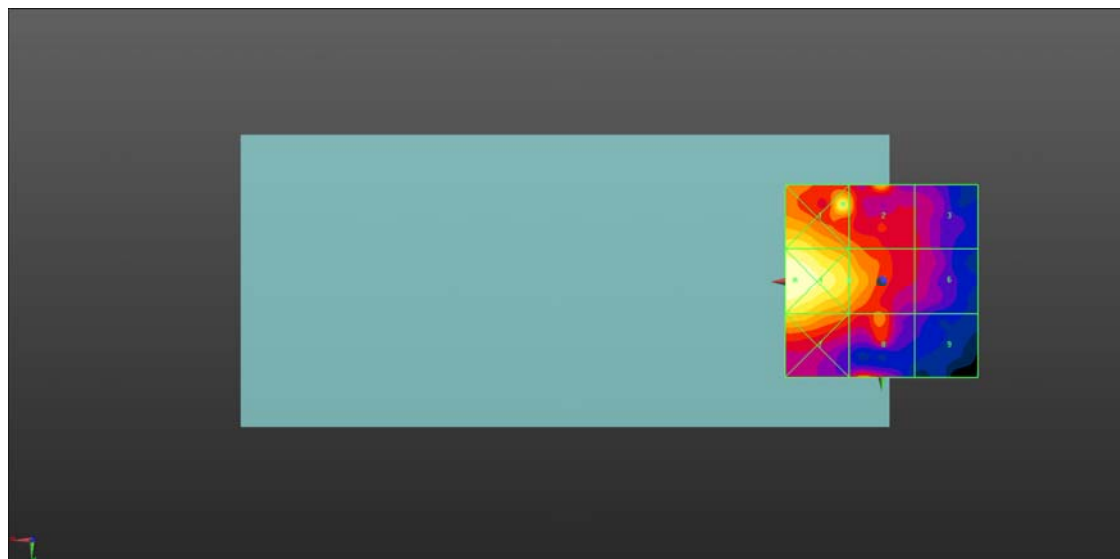

0 dB = 11.41 V/m

HAC_RF_CDMA2000 BC0_RC1 SO3_Ch777_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.97 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch777/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.123 V/m; Power Drift = 0.13 dB

Applied MIF = 3.26 dB

RF audio interference level = 18.84 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 19.89 dBV/m	Grid 2 M4 17.76 dBV/m	Grid 3 M4 15.86 dBV/m
Grid 4 M4 21.12 dBV/m	Grid 5 M4 18.84 dBV/m	Grid 6 M4 15.83 dBV/m
Grid 7 M4 19.43 dBV/m	Grid 8 M4 18.22 dBV/m	Grid 9 M4 14.58 dBV/m

Cursor:

Total = 21.06 dBV/m

E Category: M4

Location: 25, -1, 8.7 mm

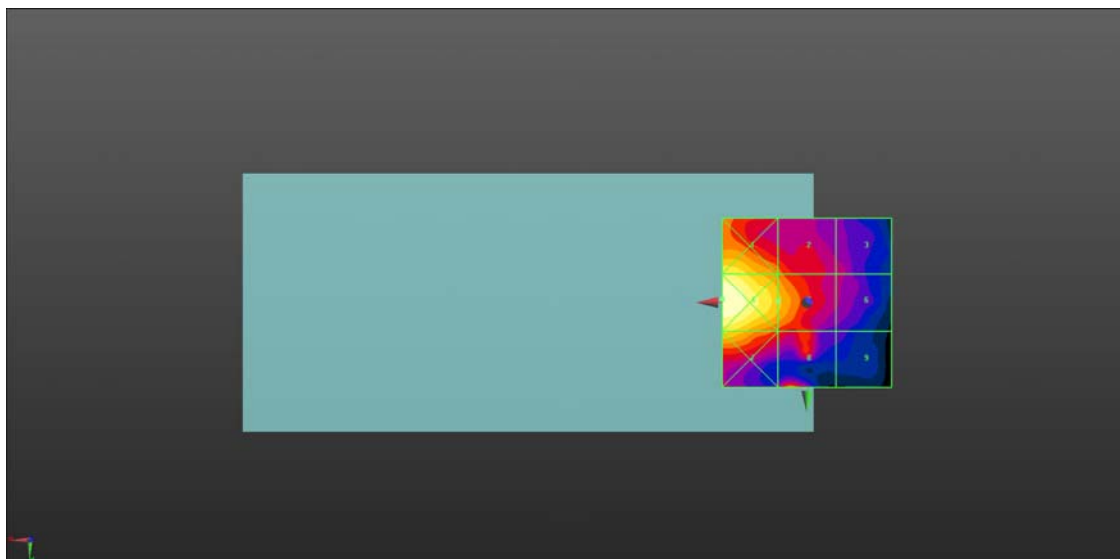

0 dB = 11.38 V/m = 21.12 dBV/m

HAC_RF_CDMA2000 BC1_RC1 SO3_Ch25_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch25/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.090 V/m; Power Drift = 0.10 dB

Applied MIF = 3.26 dB

RF audio interference level = 18.81 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.95 dBV/m	Grid 2 M4 17.74 dBV/m	Grid 3 M4 15.42 dBV/m
Grid 4 M4 20.95 dBV/m	Grid 5 M4 18.81 dBV/m	Grid 6 M4 15.57 dBV/m
Grid 7 M4 19.42 dBV/m	Grid 8 M4 18.12 dBV/m	Grid 9 M4 14.64 dBV/m

Cursor:

Total = 20.95 dBV/m

E Category: M4

Location: 23.5, -1.5, 8.7 mm

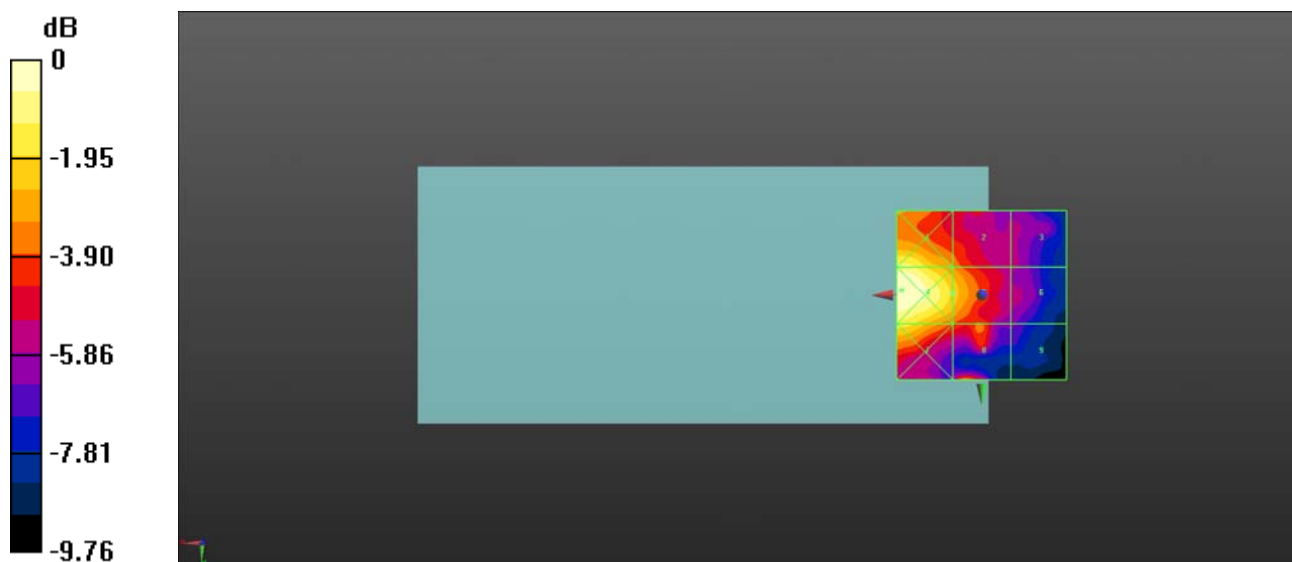

HAC_RF_CDMA2000 BC1_RC1 SO3_Ch600_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1880 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch600/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.954 V/m; Power Drift = 0.59 dB

Applied MIF = 3.26 dB

RF audio interference level = 19.00 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.86 dBV/m	Grid 2 M4 17.78 dBV/m	Grid 3 M4 15.79 dBV/m
Grid 4 M4 21 dBV/m	Grid 5 M4 19 dBV/m	Grid 6 M4 15.78 dBV/m
Grid 7 M4 19.51 dBV/m	Grid 8 M4 18.18 dBV/m	Grid 9 M4 14.9 dBV/m

Cursor:

Total = 21.19 dBV/m

E Category: M4

Location: 24, -2.5, 8.7 mm

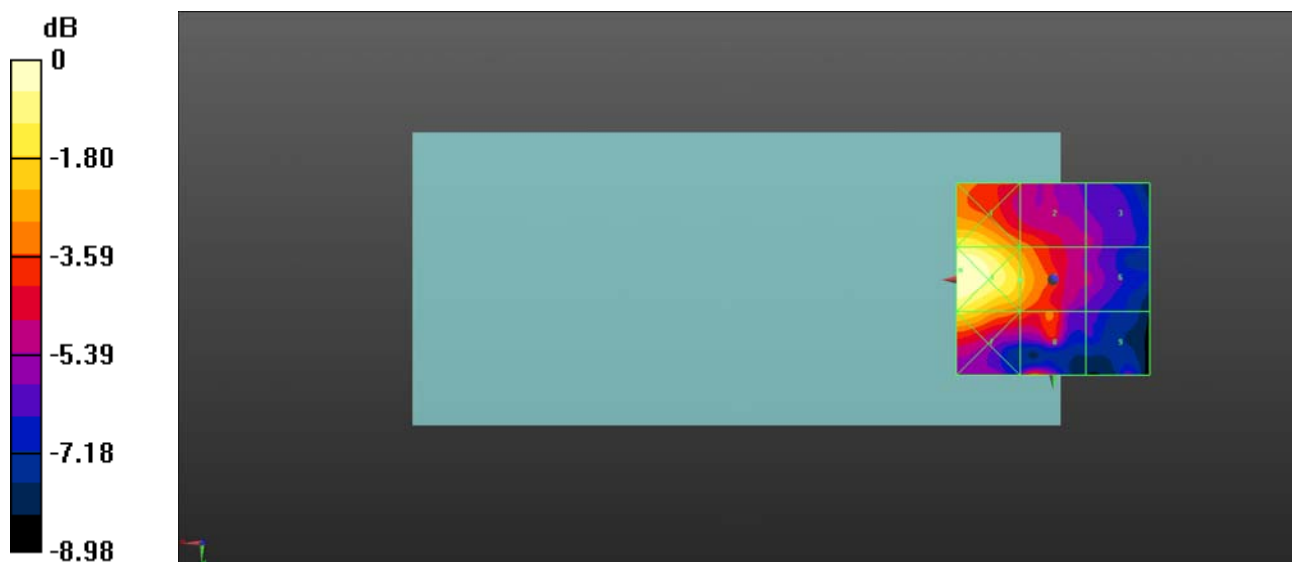

0 dB = 11.21 V/m = 21.19 dBV/m

HAC_RF_CDMA2000 BC1_RC1 SO3_Ch1175_E

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1909.95 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.180 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 19.10 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 20.02 dBV/m	Grid 2 M4 18.14 dBV/m	Grid 3 M4 15.87 dBV/m
Grid 4 M4 21.25 dBV/m	Grid 5 M4 19.1 dBV/m	Grid 6 M4 15.95 dBV/m
Grid 7 M4 19.58 dBV/m	Grid 8 M4 18.49 dBV/m	Grid 9 M4 15.18 dBV/m

Cursor:

Total = 21.25 dBV/m

E Category: M4

Location: 23.5, -1, 8.7 mm

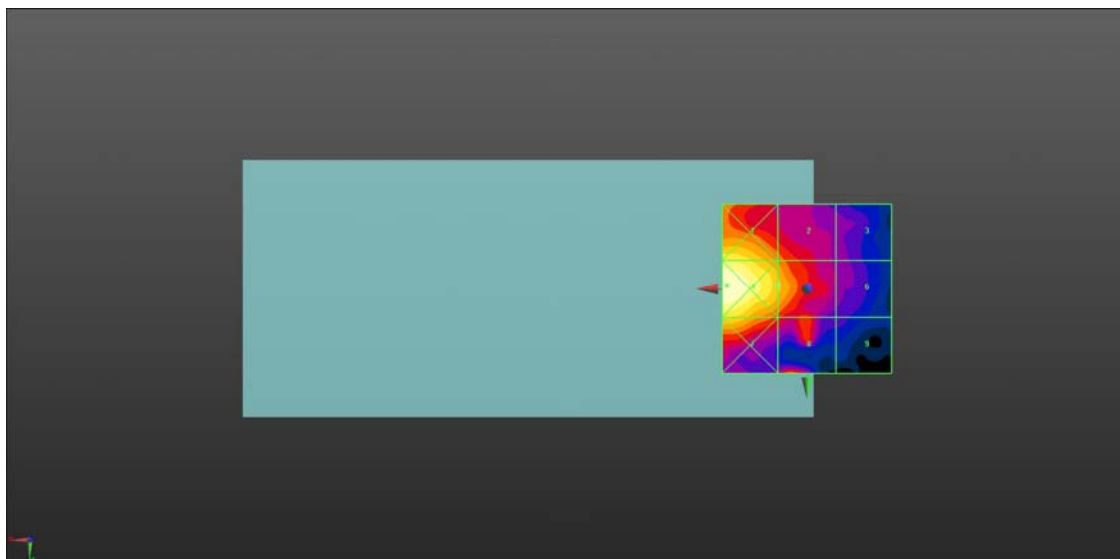

0 dB = 11.54 V/m = 21.24 dBV/m

HAC RF_LTE Band 38_20M_QPSK_1RB_0offset_12.2Kbps_Ch37850_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2580 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch37850/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.62 V/m; Power Drift = -0.38 dB

Applied MIF = -1.62 dB

RF audio interference level = 18.78 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 17.96 dBV/m	Grid 2 M4 18.51 dBV/m	Grid 3 M4 18.12 dBV/m
Grid 4 M4 18.33 dBV/m	Grid 5 M4 18.78 dBV/m	Grid 6 M4 18.44 dBV/m
Grid 7 M4 17.2 dBV/m	Grid 8 M4 18.69 dBV/m	Grid 9 M4 18.33 dBV/m

Cursor:

Total = 18.78 dBV/m

E Category: M4

Location: -4, 4.5, 8.7 mm

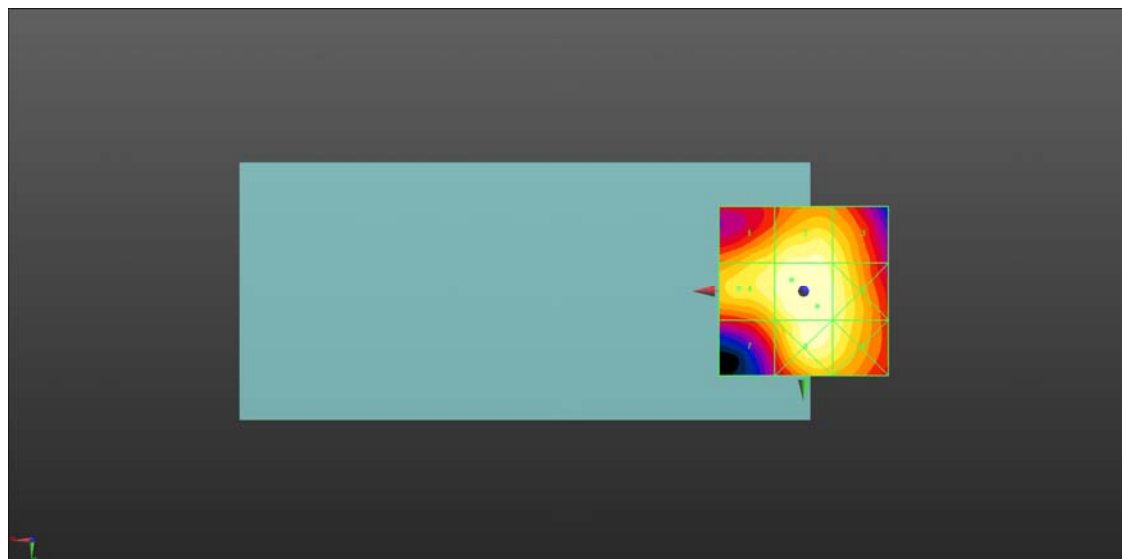

0 dB = 8.687 V/m

HAC RF_LTE Band 38_20M_QPSK_1RB_0offset_12.2Kbps_Ch38000_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2595 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.59 V/m; Power Drift = -0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.09 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 17.92 dBV/m	Grid 2 M4 18.62 dBV/m	Grid 3 M4 17.92 dBV/m
Grid 4 M4 18.33 dBV/m	Grid 5 M4 19.09 dBV/m	Grid 6 M4 18.26 dBV/m
Grid 7 M4 17.22 dBV/m	Grid 8 M4 19.02 dBV/m	Grid 9 M4 18.19 dBV/m

Cursor:

Total = 19.09 dBV/m

E Category: M4

Location: -0.5, 4.5, 8.7 mm

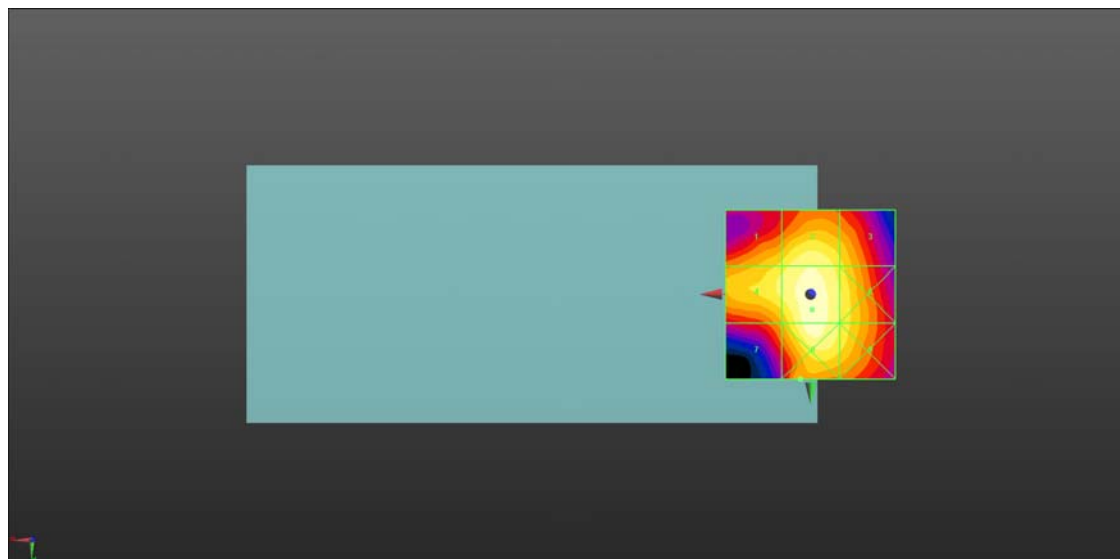

0 dB = 9.010 V/m = 19.09 dBV/m

HAC RF_LTE Band 38_20M_QPSK_1RB_0offset_12.2Kbps_Ch38150_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2619.9 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38150/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.83 V/m; Power Drift = 0.04 dB

Applied MIF = -1.62 dB

RF audio interference level = 18.70 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 16.87 dBV/m	Grid 2 M4 18.48 dBV/m	Grid 3 M4 17.99 dBV/m
Grid 4 M4 17.06 dBV/m	Grid 5 M4 18.7 dBV/m	Grid 6 M4 18.33 dBV/m
Grid 7 M4 16.52 dBV/m	Grid 8 M4 18.64 dBV/m	Grid 9 M4 18.26 dBV/m

Cursor:

Total = 18.70 dBV/m

E Category: M4

Location: -1.5, -3.5, 8.7 mm

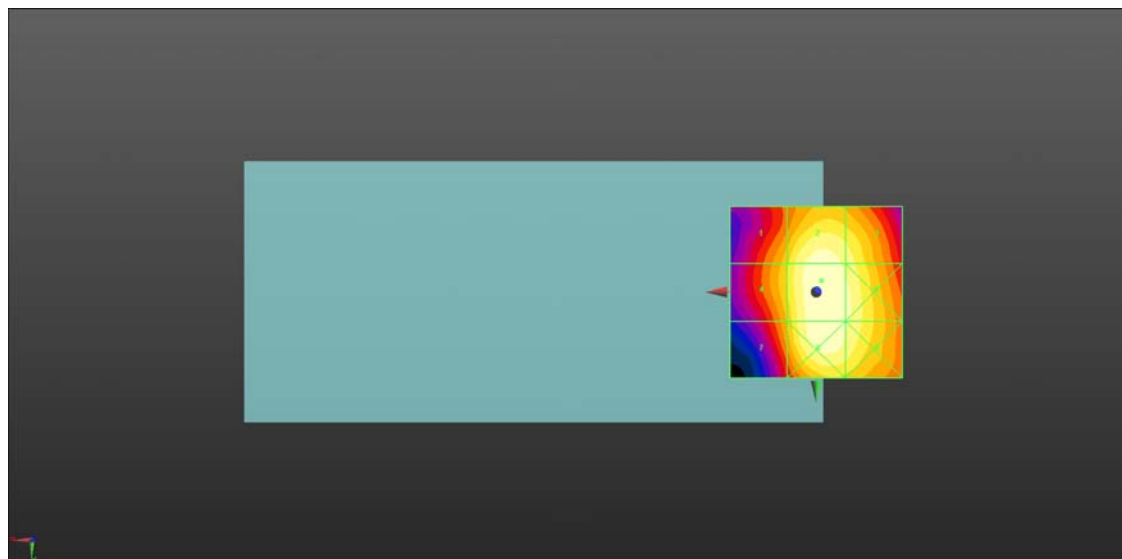

0 dB = 8.613 V/m = 18.70 dBV/m

HAC RF_LTE Band 40A_10M_QPSK_1RB_0offset_12.2Kbps_Ch38750_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2310 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.29 V/m; Power Drift = 0.06 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.84 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 19.92 dBV/m	Grid 2 M4 21.01 dBV/m	Grid 3 M4 20.36 dBV/m
Grid 4 M4 20.2 dBV/m	Grid 5 M4 21.84 dBV/m	Grid 6 M4 21 dBV/m
Grid 7 M4 19.48 dBV/m	Grid 8 M4 21.54 dBV/m	Grid 9 M4 20.88 dBV/m

Cursor:

Total = 21.84 dBV/m

E Category: M4

Location: -1, 4, 8.7 mm

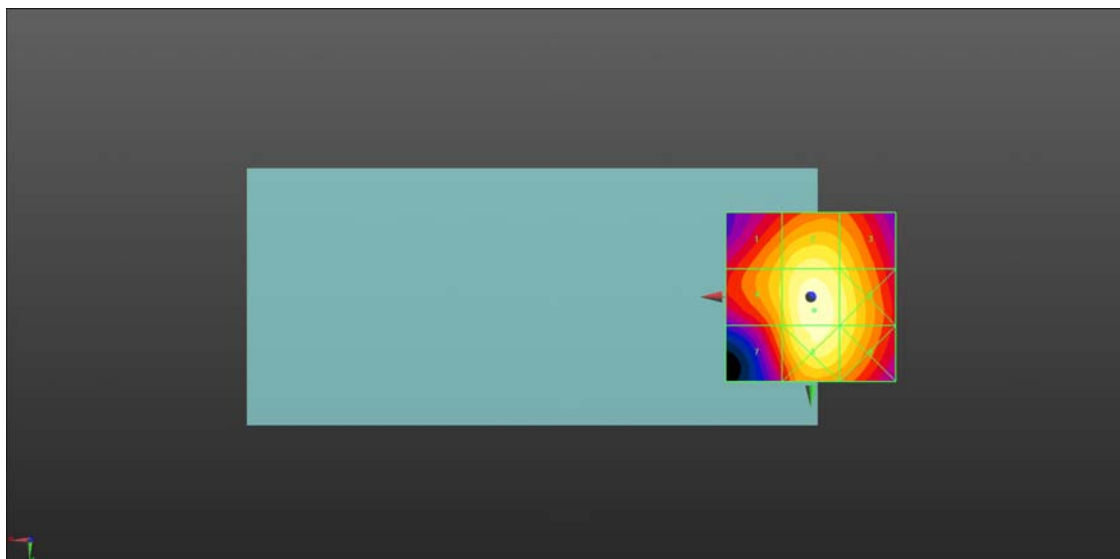

0 dB = 12.36 V/m = 21.84 dBV/m

HAC RF_LTE Band 40_10M_QPSK_1RB_0offset_12.2Kbps_Ch39200_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2355 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39200/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21.87 V/m; Power Drift = 0.01 dB

Applied MIF = -1.62 dB

RF audio interference level = 21.62 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 19.34 dBV/m	Grid 2 M4 20.98 dBV/m	Grid 3 M4 20.44 dBV/m
Grid 4 M4 19.49 dBV/m	Grid 5 M4 21.62 dBV/m	Grid 6 M4 21.06 dBV/m
Grid 7 M4 19.1 dBV/m	Grid 8 M4 21.55 dBV/m	Grid 9 M4 20.96 dBV/m

Cursor:

Total = 21.62 dBV/m

E Category: M4

Location: -1.5, 5, 8.7 mm

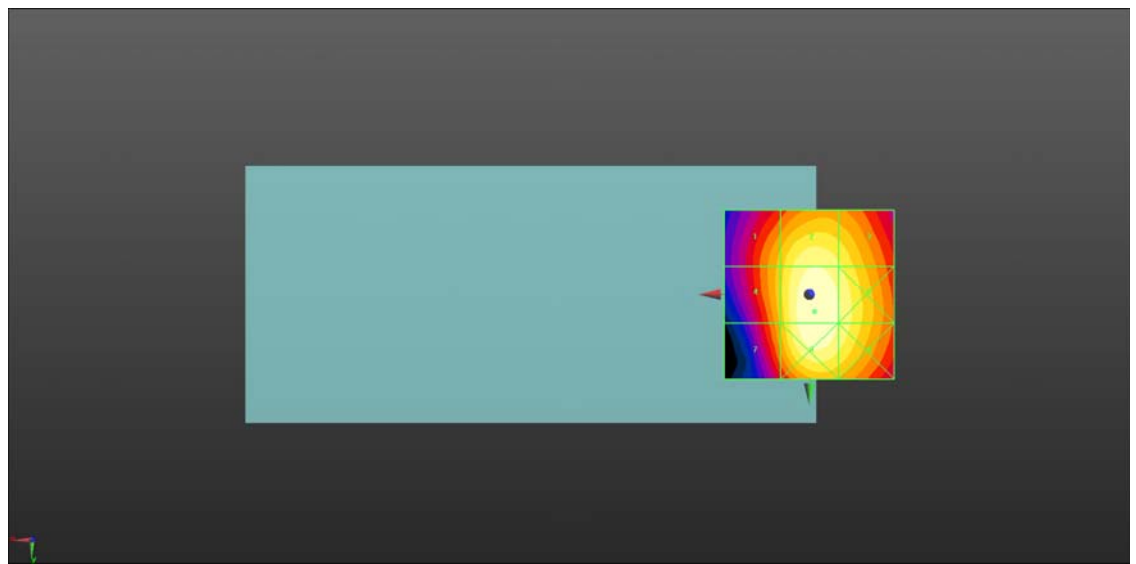

0 dB = 12.05 V/m

HAC RF_LTE Band 41_20M_QPSK_1RB_0offset_12.2Kbps_Ch39750_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.41 V/m; Power Drift = -0.26 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.35 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.41 dBV/m	Grid 2 M4 19.96 dBV/m	Grid 3 M4 19.55 dBV/m
Grid 4 M4 18.49 dBV/m	Grid 5 M4 20.35 dBV/m	Grid 6 M4 20.03 dBV/m
Grid 7 M4 17.9 dBV/m	Grid 8 M4 20.35 dBV/m	Grid 9 M4 20.01 dBV/m

Cursor:

Total = 20.35 dBV/m

E Category: M4

Location: -2.5, 9, 8.7 mm

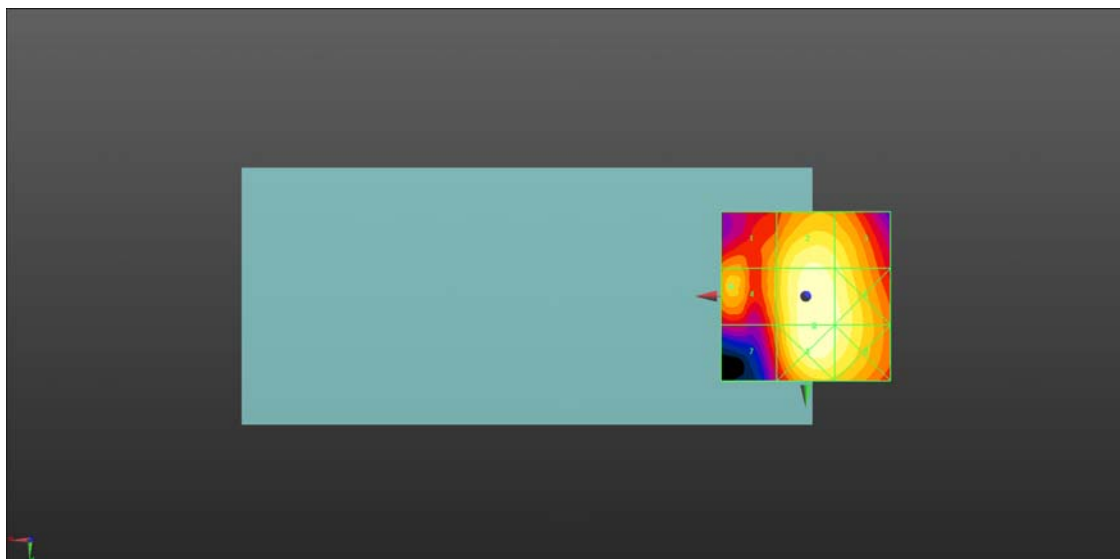

0 dB = 10.41 V/m = 20.35 dBV/m

HAC RF_LTE Band 41_20M_QPSK_1RB_0offset_12.2Kbps_Ch40185_E

Communication System: UID 10237 - CAB, LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.36 V/m; Power Drift = 0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.09 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 17.26 dBV/m	Grid 2 M4 18.73 dBV/m	Grid 3 M4 18.25 dBV/m
Grid 4 M4 17.38 dBV/m	Grid 5 M4 19.09 dBV/m	Grid 6 M4 18.74 dBV/m
Grid 7 M4 16.86 dBV/m	Grid 8 M4 19.07 dBV/m	Grid 9 M4 18.71 dBV/m

Cursor:

Total = 19.09 dBV/m

E Category: M4

Location: -3.5, 6, 8.7 mm

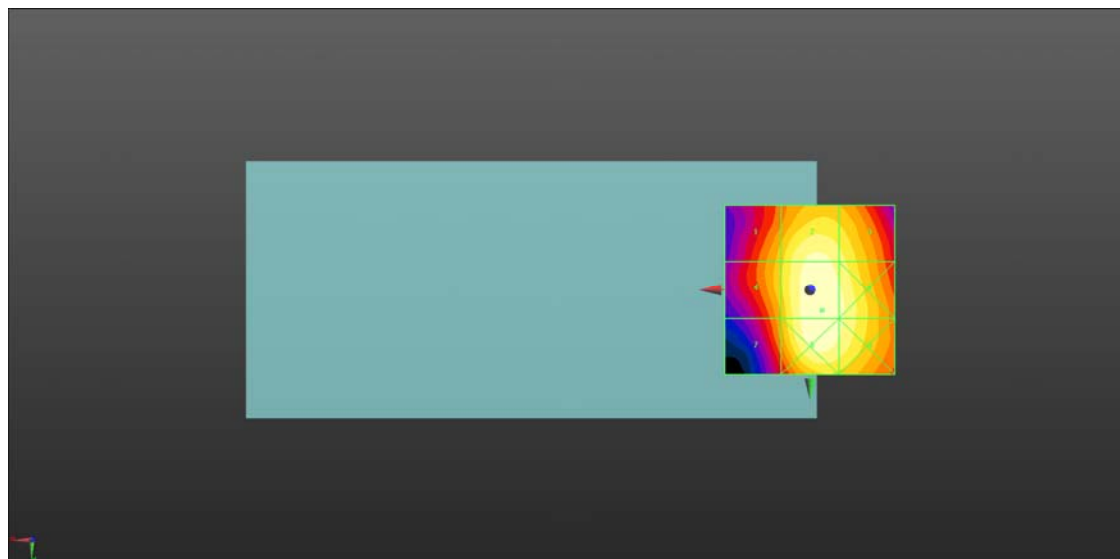

0 dB = 9.005 V/m = 19.09 dBV/m

HAC RF_LTE Band 41_20M_QPSK_1RB_0offset_12.2Kbps_Ch40620_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.33 V/m; Power Drift = -0.79 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.31 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.02 dBV/m	Grid 2 M4 18.76 dBV/m	Grid 3 M4 18.13 dBV/m
Grid 4 M4 18.37 dBV/m	Grid 5 M4 19.31 dBV/m	Grid 6 M4 18.39 dBV/m
Grid 7 M4 17.39 dBV/m	Grid 8 M4 18.82 dBV/m	Grid 9 M4 18.32 dBV/m

Cursor:

Total = 19.31 dBV/m

E Category: M4

Location: -0.5, 0.5, 8.7 mm

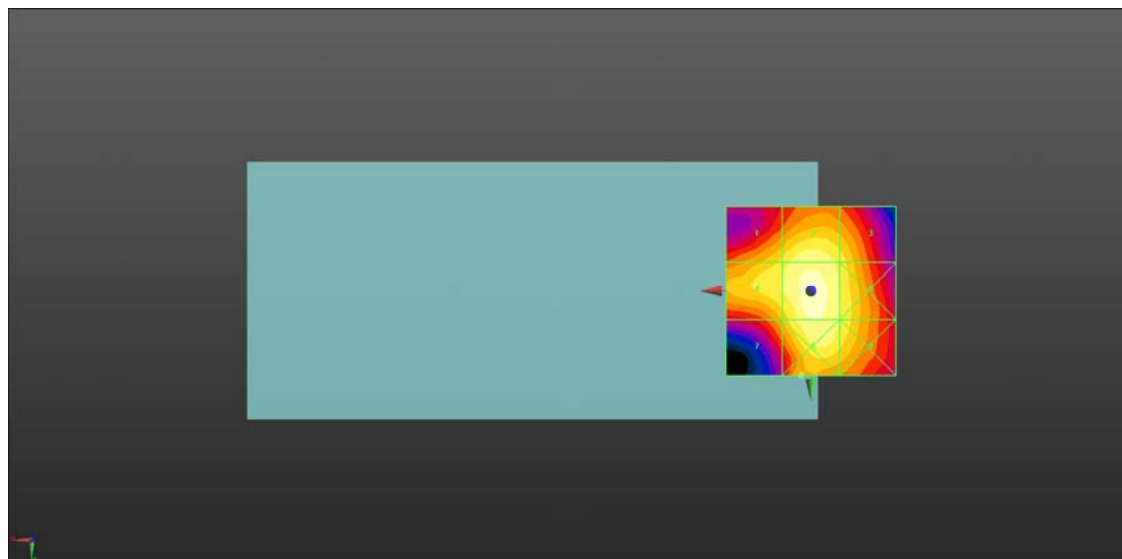

0 dB = 9.241 V/m = 19.31 dBV/m

HAC RF_LTE Band 41_20M_QPSK_1RB_0offset_12.2Kbps_Ch41055_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.52 V/m; Power Drift = 0.11 dB

Applied MIF = -1.62 dB

RF audio interference level = 19.66 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.52 dBV/m	Grid 2 M4 19.26 dBV/m	Grid 3 M4 18.44 dBV/m
Grid 4 M4 18.77 dBV/m	Grid 5 M4 19.66 dBV/m	Grid 6 M4 18.64 dBV/m
Grid 7 M4 17.81 dBV/m	Grid 8 M4 19.14 dBV/m	Grid 9 M4 18.51 dBV/m

Cursor:

Total = 19.66 dBV/m

E Category: M4

Location: 0, 0, 8.7 mm

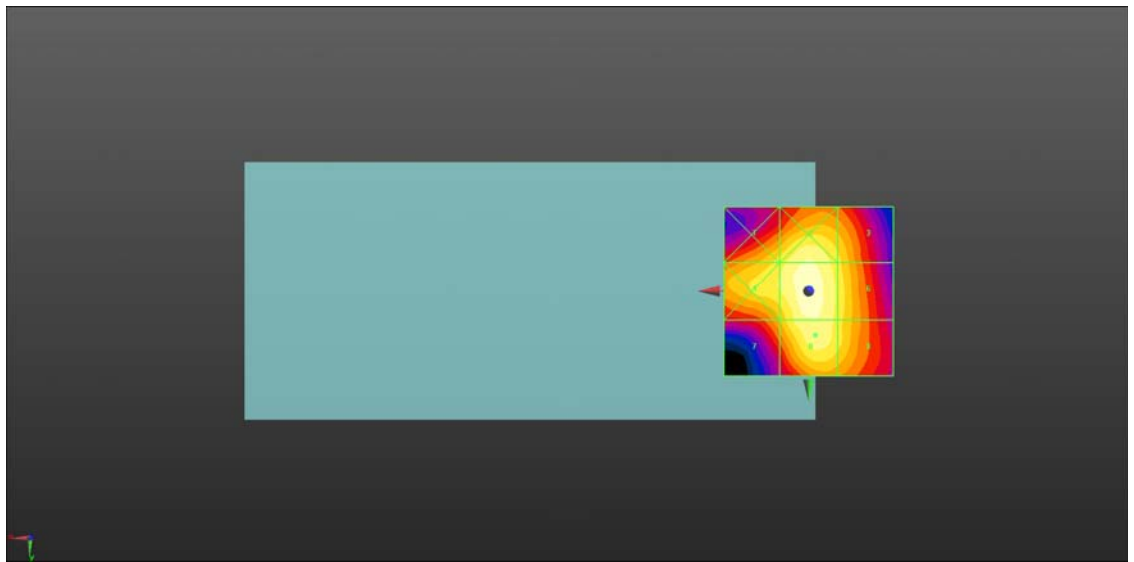

0 dB = 9.619 V/m = 19.66 dBV/m

HAC RF_LTE Band 41_20M_QPSK_1RB_0offset_12.2Kbps_Ch41490_E

Communication System: UID 10172 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2021.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.32 V/m; Power Drift = 0.00 dB

Applied MIF = -1.62 dB

RF audio interference level = 20.05 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.62 dBV/m	Grid 2 M4 20.04 dBV/m	Grid 3 M4 19.24 dBV/m
Grid 4 M4 18.74 dBV/m	Grid 5 M4 20.05 dBV/m	Grid 6 M4 19.39 dBV/m
Grid 7 M4 17.93 dBV/m	Grid 8 M4 19.93 dBV/m	Grid 9 M4 19.44 dBV/m

Cursor:

Total = 20.05 dBV/m

E Category: M4

Location: -1, -5.5, 8.7 mm

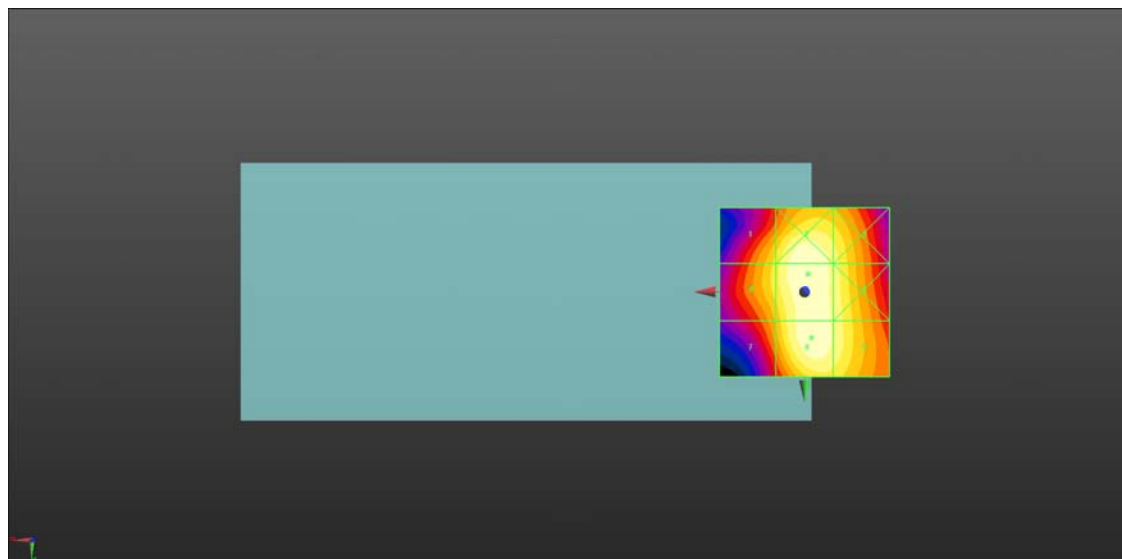

0 dB = 10.06 V/m = 20.05 dBV/m

HAC RF_VoWiFi 2.4GHz_802.11b 1Mbps_AMR 4.75Kbps_Ch1

Communication System: UID 10012 - CAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2412 MHz; Duty Cycle: 1:1.53815

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;

- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn480; Calibrated: 2021.06.22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.67 V/m; Power Drift = -0.03 dB

Applied MIF = -5.90 dB

RF audio interference level = 15.91 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.4 dBV/m	Grid 2 M4 15.56 dBV/m	Grid 3 M4 10.25 dBV/m
Grid 4 M4 20.84 dBV/m	Grid 5 M4 15.91 dBV/m	Grid 6 M4 11.62 dBV/m
Grid 7 M4 18.03 dBV/m	Grid 8 M4 15.84 dBV/m	Grid 9 M4 10.67 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m


Cursor:

Total = 20.84 dBV/m

E Category: M4

Location: 25, -1.5, 8.7 mm

Maximum value of Total (interpolated) = 11.02 V/m

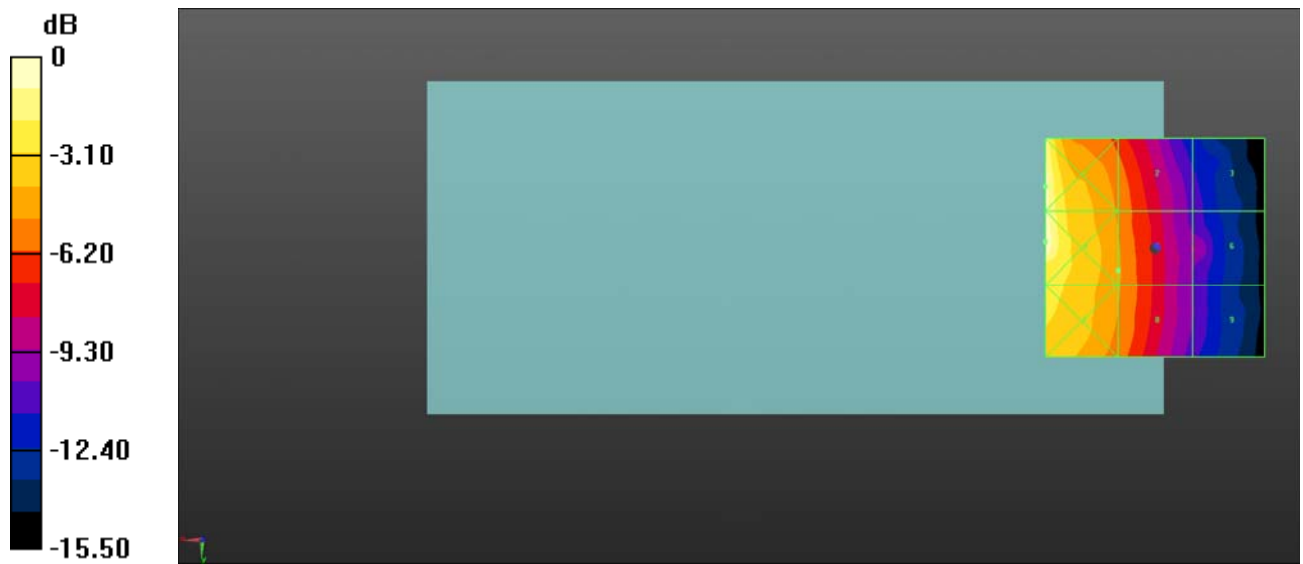

0 dB = 11.02 V/m = 20.84 dBV/m

HAC RF_VoWiFi 2.4GHz_802.11b 1Mbps_AMR 4.75Kbps_Ch6

Communication System: UID 10012 - CAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:1.53815

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;

- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn480; Calibrated: 2021.06.22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.31 V/m; Power Drift = 0.13 dB

Applied MIF = -5.90 dB

RF audio interference level = 17.34 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.98 dBV/m	Grid 2 M4 16.59 dBV/m	Grid 3 M4 10.06 dBV/m
Grid 4 M4 20.18 dBV/m	Grid 5 M4 17.23 dBV/m	Grid 6 M4 10.51 dBV/m
Grid 7 M4 18.06 dBV/m	Grid 8 M4 17.34 dBV/m	Grid 9 M4 10.56 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m


Cursor:

Total = 20.18 dBV/m

E Category: M4

Location: 20.5, -5.5, 8.7 mm

Maximum value of Total (interpolated) = 10.21 V/m

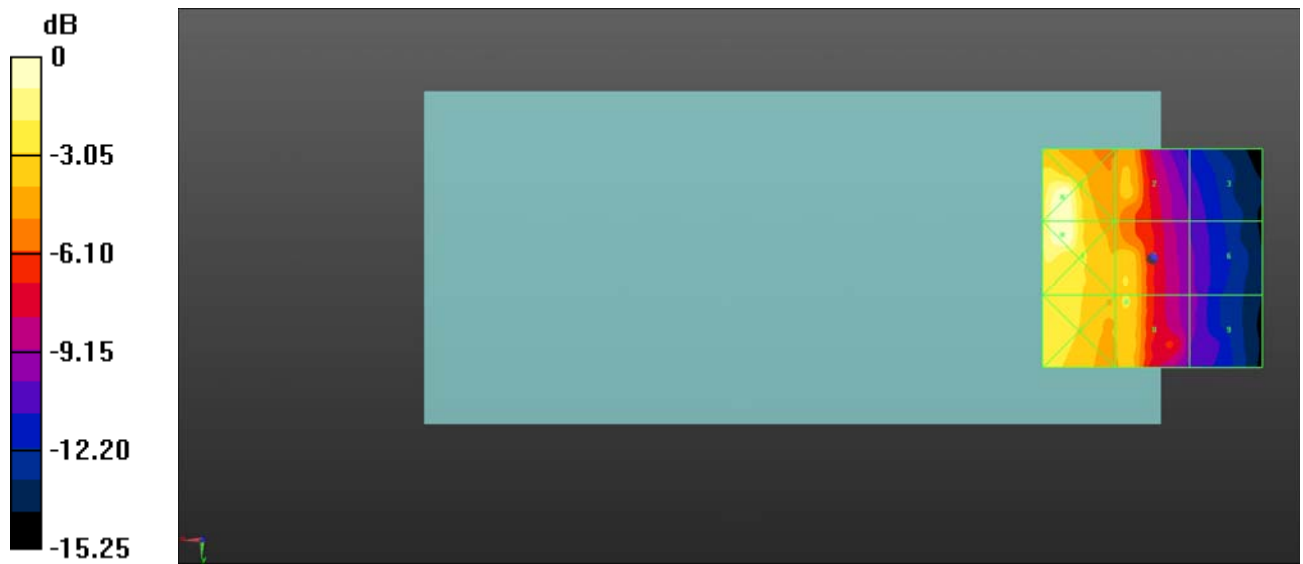

0 dB = 10.21 V/m = 20.18 dBV/m

HAC RF_VoWiFi 2.4GHz_802.11b 1Mbps_AMR 4.75Kbps_Ch11

Communication System: UID 10012 - CAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2411 MHz; Duty Cycle: 1:1.53815

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2021.03.04;

- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn480; Calibrated: 2021.06.22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.55 V/m; Power Drift = 0.24 dB

Applied MIF = -5.90 dB

RF audio interference level = 15.84 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.25 dBV/m	Grid 2 M4 15.47 dBV/m	Grid 3 M4 10.13 dBV/m
Grid 4 M4 20.72 dBV/m	Grid 5 M4 15.84 dBV/m	Grid 6 M4 10.47 dBV/m
Grid 7 M4 19.32 dBV/m	Grid 8 M4 15.68 dBV/m	Grid 9 M4 10.51 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m


Cursor:

Total = 20.72 dBV/m

E Category: M4

Location: 25, -1.5, 8.7 mm

Maximum value of Total (interpolated) = 10.86 V/m

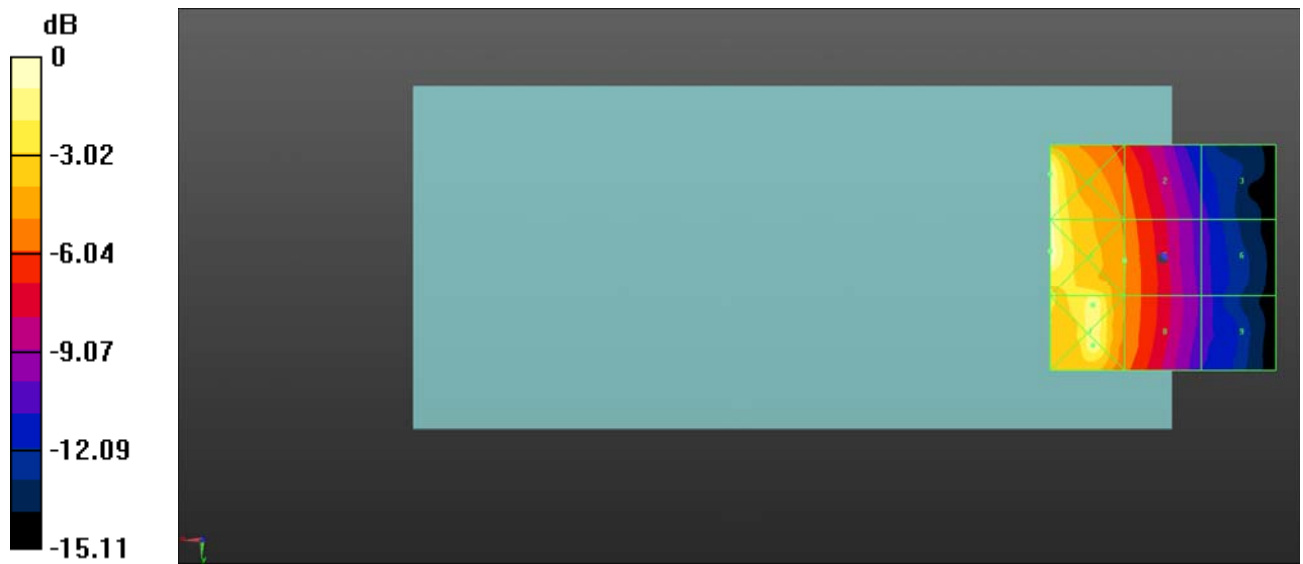

0 dB = 10.86 V/m = 20.72 dBV/m