


TEST REPORT

Applicant: Nubia Technology Co., Ltd.
Address: Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
Equipment Type: Electronic shelf label
Model Name: WD1102G
Brand Name: nubia
FCC ID: 2AHJO-WD1102G
Test Standard: 47 CFR Part 15 Subpart C (refer section 3.1)
Test Date: Jun. 29, 2022 – Jul. 13, 2022
Date of Issue: Jul. 20, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 20, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS.....	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS.....	10
4.1	Test Environments	10
4.2	Test Equipment List.....	10
4.3	Test Software List.....	10
4.4	Description of Test Setup	11
4.5	Measurement Results Explanation Example.....	14
5	TEST ITEMS.....	15
5.1	Antenna Requirements.....	15
5.2	Number of Hopping Frequency	16
5.3	Peak Output Power	17
5.4	Occupied Bandwidth	18

5.5	Carrier Frequency Separation	19
5.6	Time of Occupancy (Dwell time)	20
5.7	Conducted Spurious Emission & Authorized-band band-edge	21
5.8	Conducted Emission	22
5.9	Radiated Spurious Emission	23
5.10	Band Edge (Restricted-band band-edge).....	25
ANNEX A	TEST RESULT	26
A.1	Number of Hopping Frequency	26
A.2	Peak Output Power	27
A.3	Occupied Bandwidth	28
A.4	Hopping Frequency Separation.....	30
A.5	Time of Occupancy (Dwell time)	31
A.6	Conducted Spurious Emissions & Authorized-band band-edge	32
A.7	Conducted Emissions.....	36
A.8	Radiated Emission	37
A.9	Band Edge (Restricted-band band-edge).....	45
ANNEX B	TEST SETUP PHOTOS	47
ANNEX C	EUT EXTERNAL PHOTOS	47
ANNEX D	EUT INTERNAL PHOTOS	47

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Nubia Technology Co., Ltd.
Address	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

2.2 Manufacturer Information

Manufacturer	Nubia Technology Co., Ltd.
Address	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

2.3 Factory Information

Factory	Nanchang Nubia Technology Co., Ltd.
Address	1/F-3F NO.3 factory building, Nanchang High-tech Electronic Information Industry Park, NO.888 Yaoxi Lake 6th Road, Nanchang High-tech Industrial Development Zone, Nanchang, Jiangxi

2.4 General Description for Equipment under Test (EUT)

EUT Name	Electronic shelf label
Model Name Under Test	WD1102G
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.0
Software Version	WD1102_TAG_V148
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	2.4G ISM Band (GFSK modulation)
-----------------------------------	---------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Transfer Rate	1 Mbps
Frequency Range	The frequency range used is 2402 MHz to 2480 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	Low channel (2402 MHz), Middle channel(2441 MHz), High channel (2480 MHz)
Antenna Type	Internal Antenna
Antenna Gain	-1.0 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Adaptive or non-adaptive	non-adaptive
The Max RF Output power	1.46 dBm

Channel List

Number	Frequency (MHz)	Number	Frequency (MHz)	Number	Frequency (MHz)
0	2402(Low)	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441(Middle)	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480(High)
25	2427	52	2454		
26	2428	53	2455		

Note: The modulation is GFSK with FHSS, there are a total 79 channels (frequency range is 2402-2480MHz, channel step is 1MHz, totally 79 channels). In this report, the equipment select the lowest, middle and highest channel from 79 channels, which are 2402 MHz, 2441 MHz and 2480 MHz, The more information please refer to the manufacturer's instructions.


2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Version	FCCTestTool V1.6		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	HP	N/A
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	

Run Software:

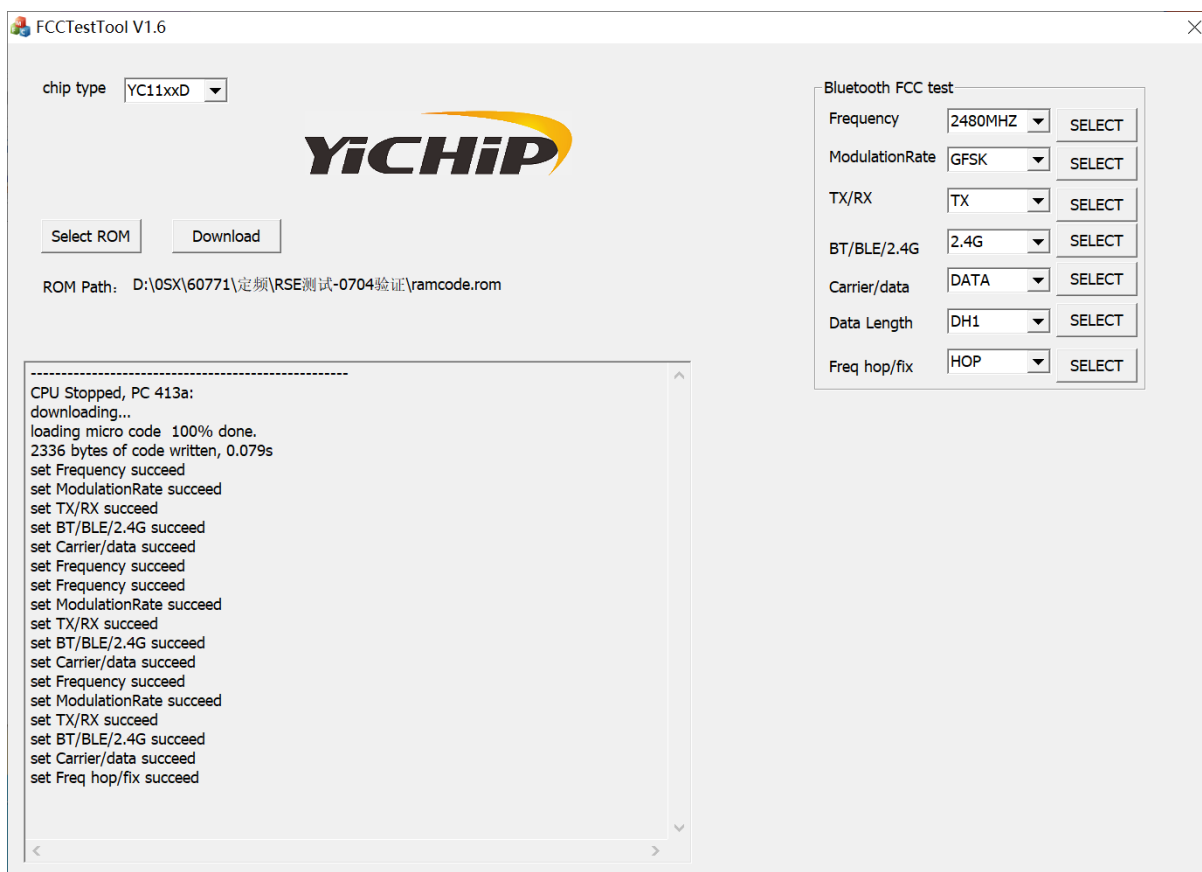

The screenshot shows the FCCTestTool V1.6 interface. At the top, the title bar reads 'FCCTestTool V1.6'. Below the title bar, there is a 'chip type' dropdown menu set to 'YC11xxD'. In the center, the 'YiCHIP' logo is displayed. Below the logo, there are two buttons: 'Select ROM' and 'Download'. Under these buttons, the 'ROM Path' is shown as 'D:\0SX\60771\定频\RSE测试-0704验证\ramcode.rom'. On the right side, there is a 'Bluetooth FCC test' section with several dropdown menus and 'SELECT' buttons: Frequency (2480MHZ), ModulationRate (GFSK), TX/RX (TX), BT/BLE/2.4G (2.4G), Carrier/data (DATA), Data Length (DH1), and Freq hop/fix (HOP). At the bottom left, there is a text area showing the following log output:

```

CPU Stopped, PC 413a:
downloading...
loading micro code 100% done.
2336 bytes of code written, 0.079s
set Frequency succeed
set ModulationRate succeed
set TX/RX succeed
set BT/BLE/2.4G succeed
set Carrier/data succeed
set Frequency succeed
set Frequency succeed
set ModulationRate succeed
set TX/RX succeed
set BT/BLE/2.4G succeed
set Carrier/data succeed
set Frequency succeed
set ModulationRate succeed
set TX/RX succeed
set BT/BLE/2.4G succeed
set Carrier/data succeed
set Freq hop/fix succeed
  
```

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Hopping Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	N/A ^{Note 2}
9	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.8	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	ANNEX A.9	Pass
11	Receiver Spurious Emissions	--	--	N/A ^{Note 2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: The EUT only powered by battery, so the Conducted Emission test is not applicable.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	40 to 70%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	20°C to +23.5°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2022.05.19	2023.05.18
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2022.05.19	2023.05.18
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.09.13	2022.09.12
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.10.10	2022.10.09
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
Test Antenna- Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	01917	2022.06.09	2025.06.08
Test Antenna- Horn (18-40 GHz)	A-INFO	LB- 180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2022.02.19	2024.09.03
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

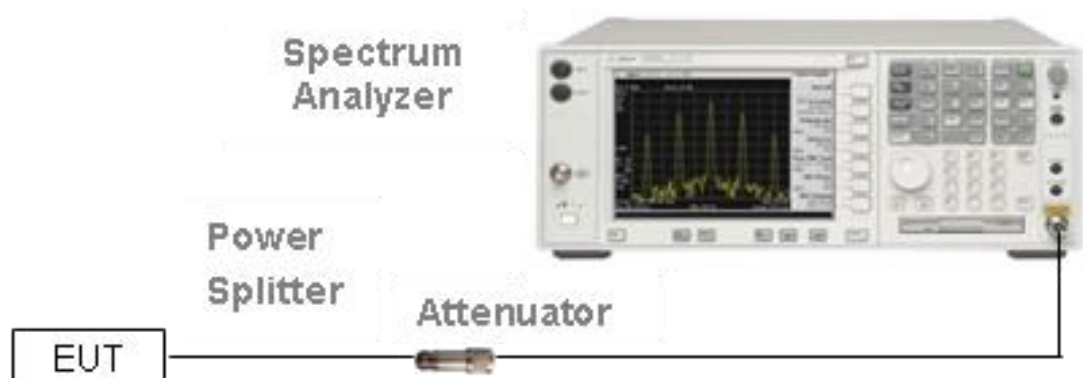


(Diagram 1)

4.4.2 For AC Power Supply Port Test

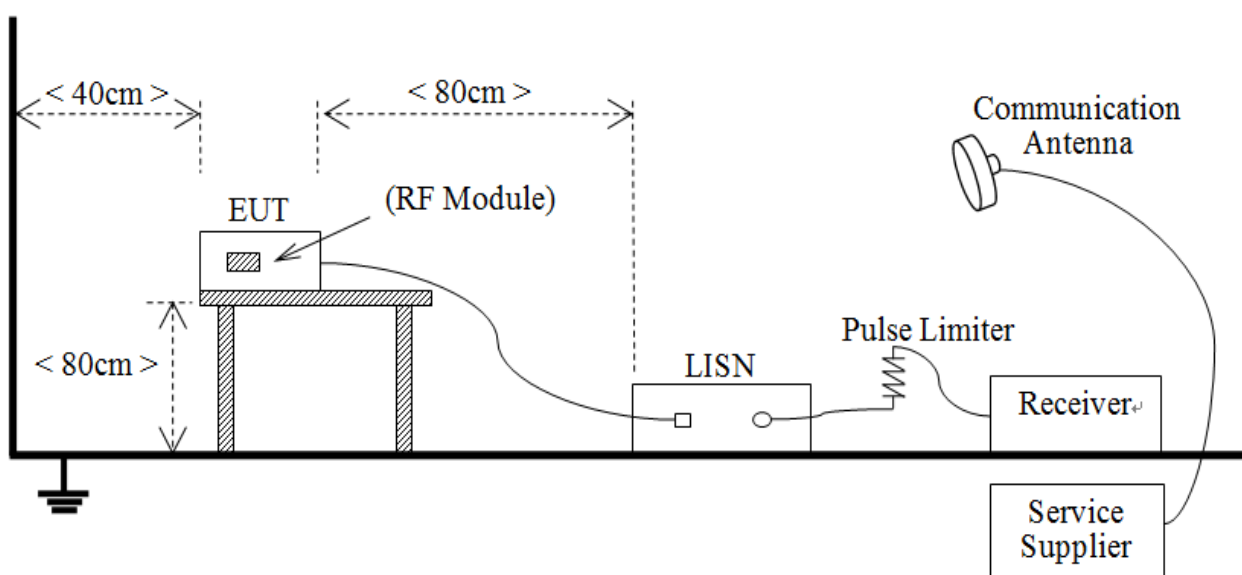


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

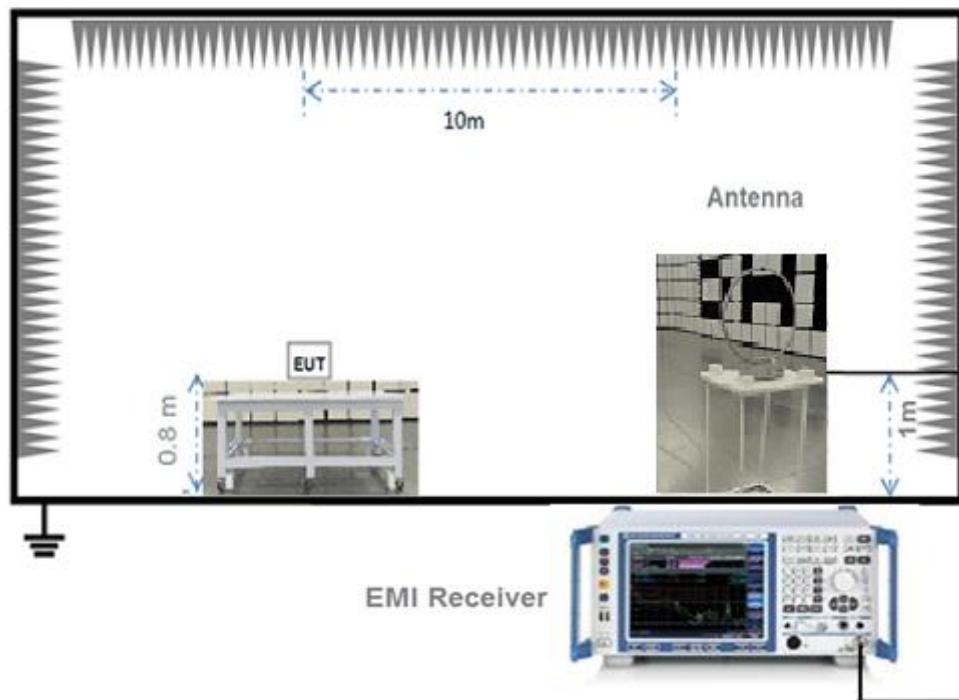


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

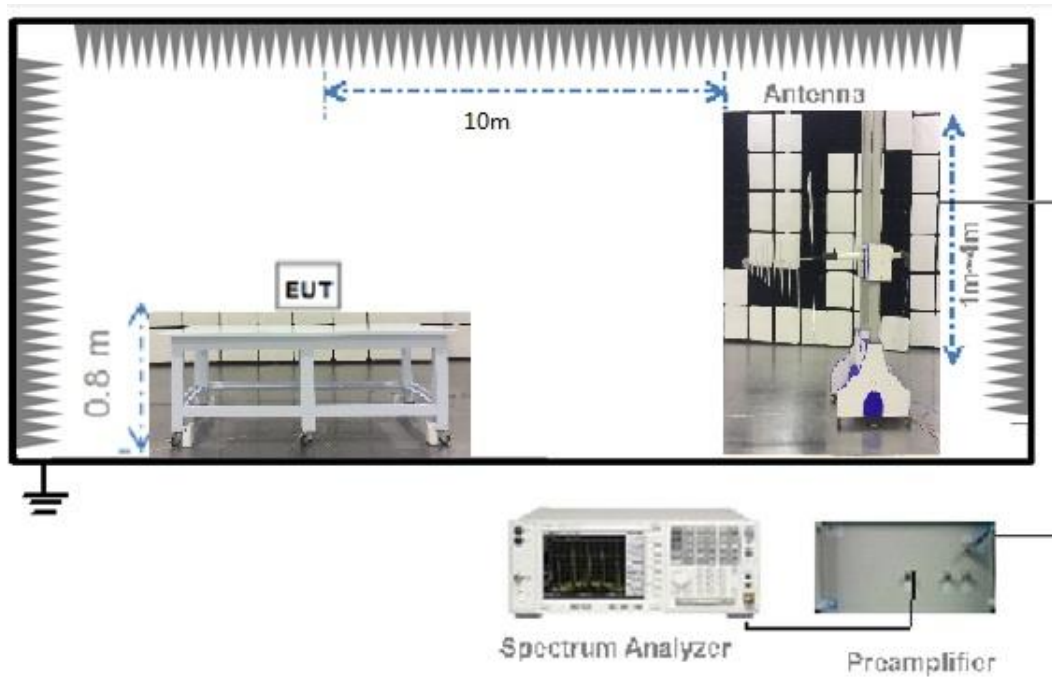

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

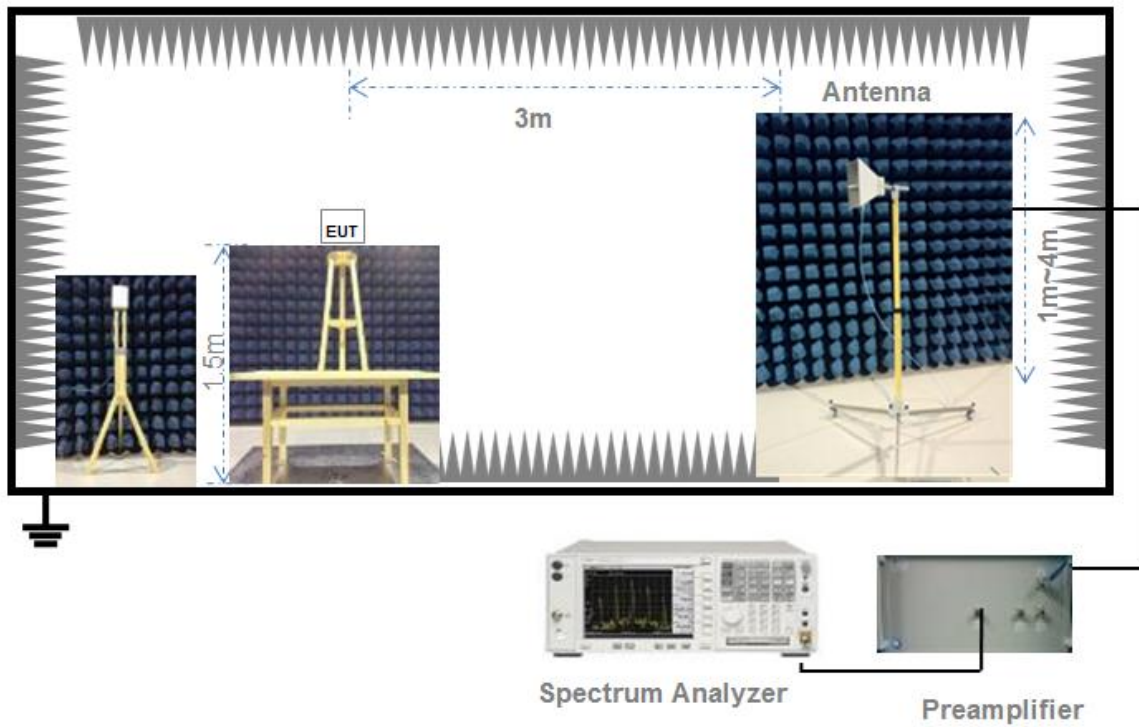

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass

Test plots

GFSK 2.4 GHz ~ 2.4835 GHz

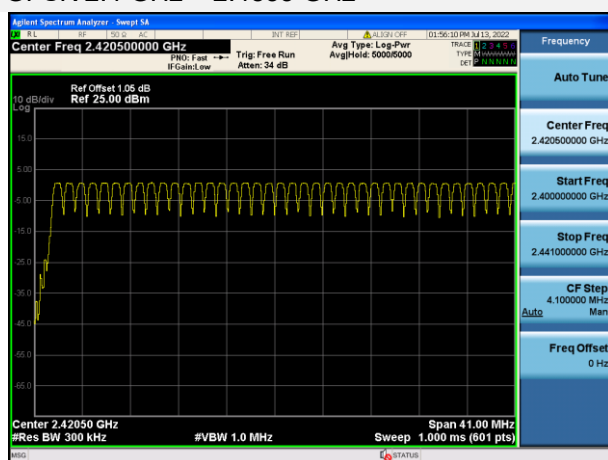

GFSK 2.4 GHz ~ 2.4835 GHz

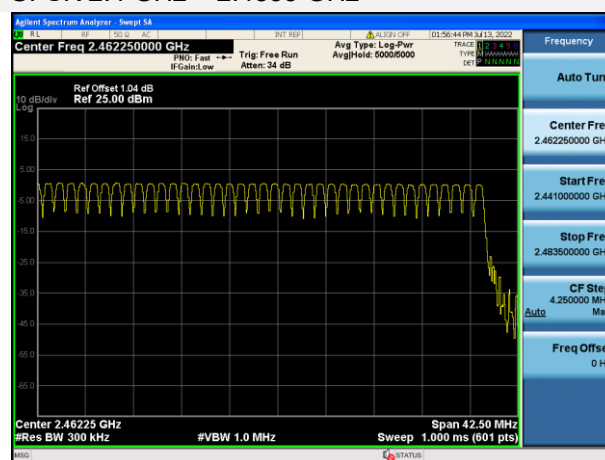


A.2 Peak Output Power

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	1.46	1.40	21	125	Pass
Middle	1.19	1.31			Pass
High	0.80	1.20			Pass

Test plots


GFSK LOW CHANNEL

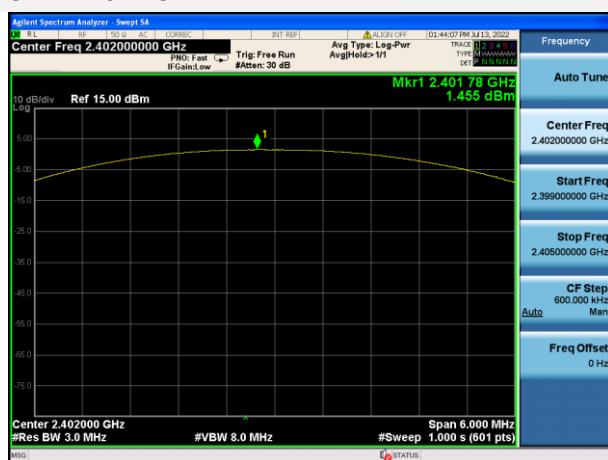

GFSK MIDDLE CHANNEL

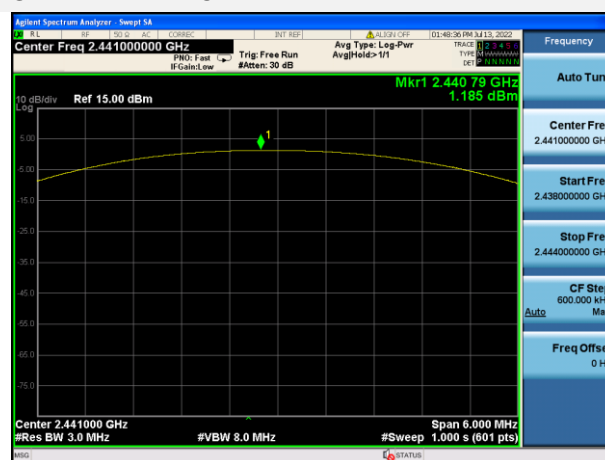

GFSK HIGH CHANNEL

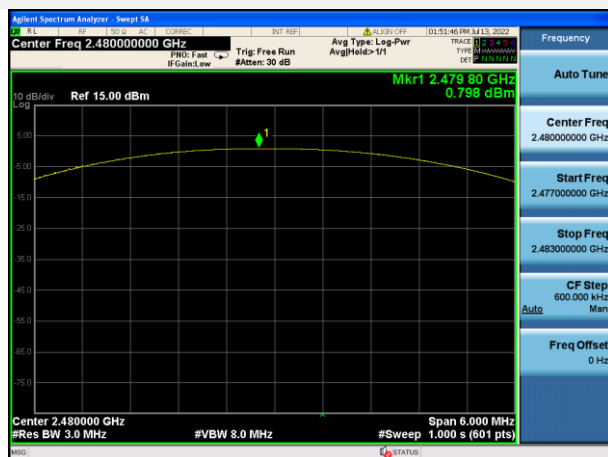

A.3 Occupied Bandwidth

Test Data

Test Mode	GFSK	
Channel	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low Channel	1.040000	0.917220
Middle Channel	1.040000	0.914270
High Channel	1.040000	0.911240

Test plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL




99% Bandwidth


GFSK LOW CHANNEL

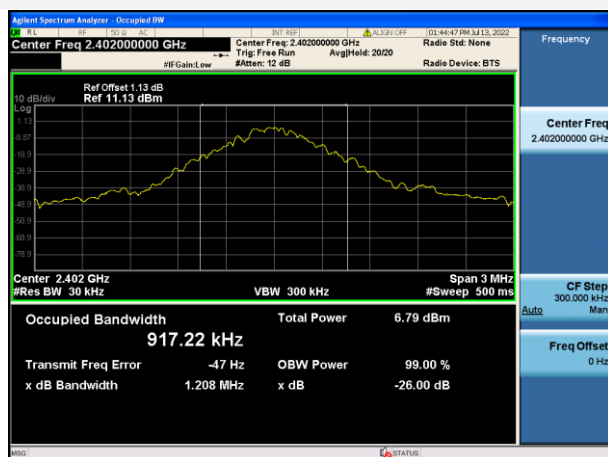

GFSK MIDDLE CHANNEL

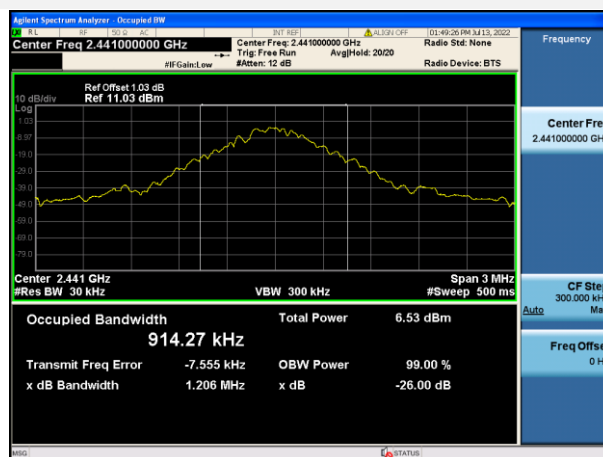

GFSK HIGH CHANNEL

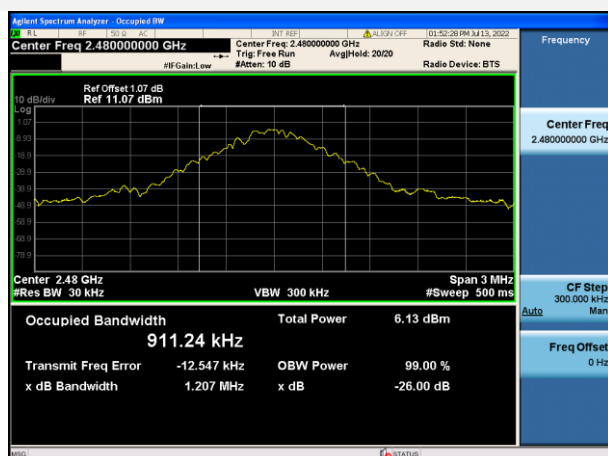

A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	0.995	0.693	Pass

Test Plots

GFSK




A.5 Time of Occupancy (Dwell time)

Test Data


GFSK			
Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
0.358	1.075	0.4	Pass

Test Plots

0.96 ms

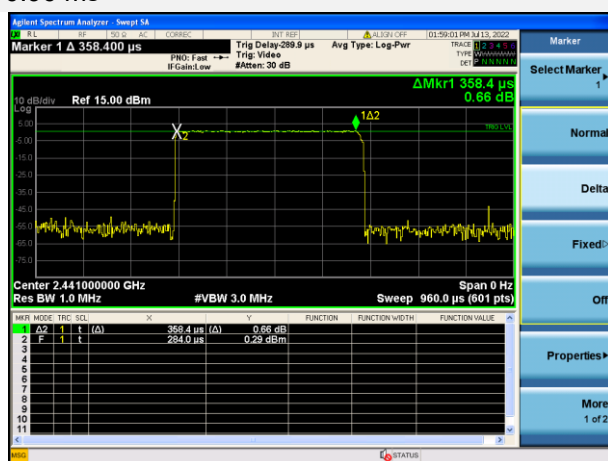

31.60 ms

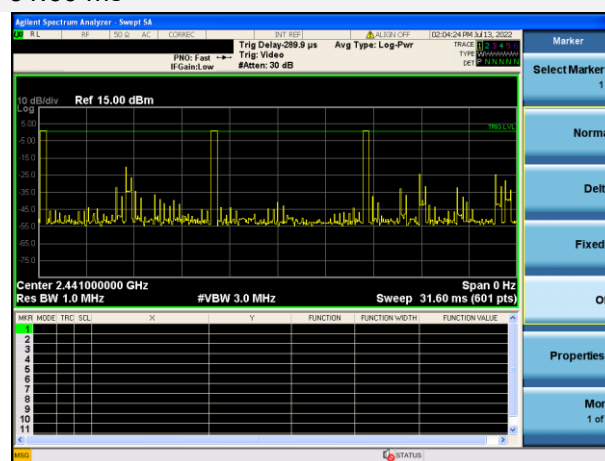

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK Mode:

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.80	0.25	-19.75	Pass
Middle	-36.95	0.00	-20.00	Pass
High	-38.06	-0.39	-20.39	Pass

Hopping Mode:

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.54	0.48	-19.52	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE




GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

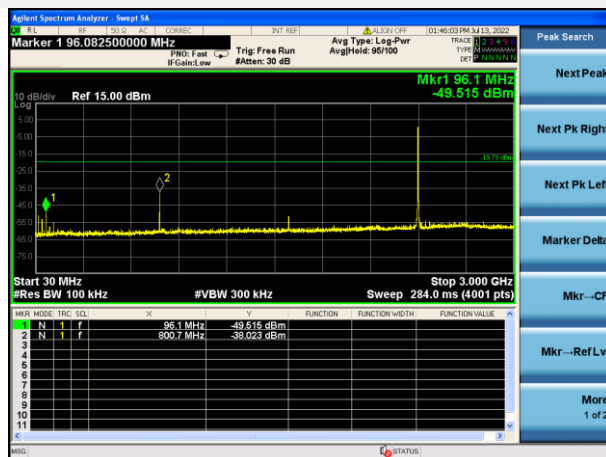


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

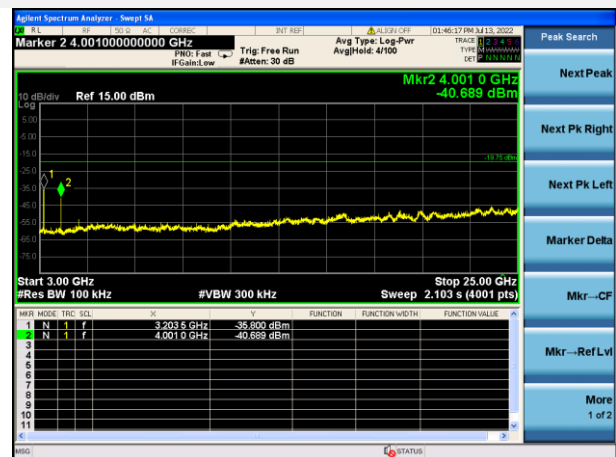


GFSK MIDDLE CHANNEL, CARRIER LEVEL

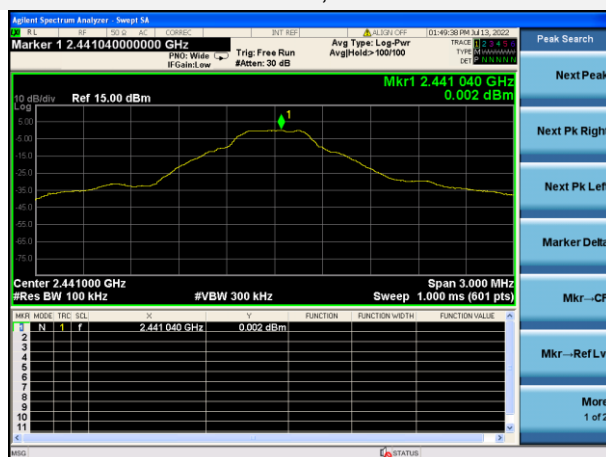

GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

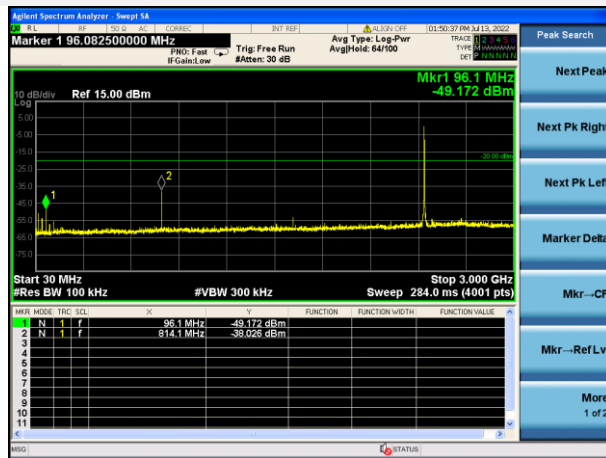

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

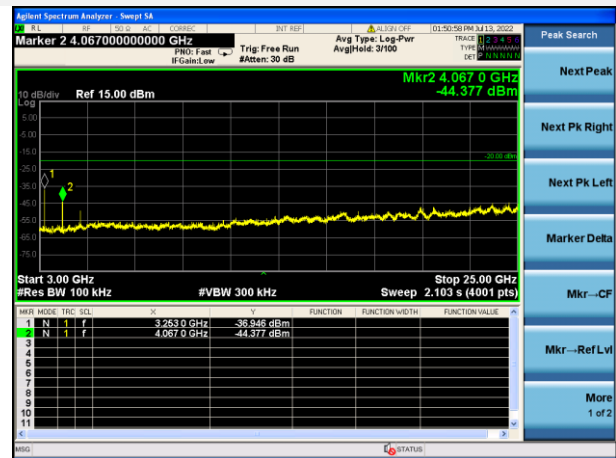


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE




GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

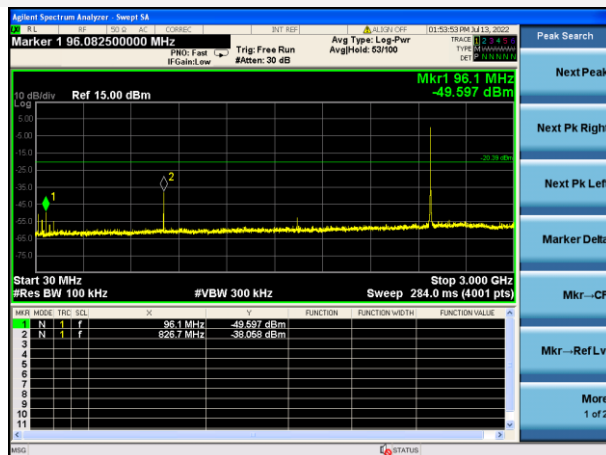

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

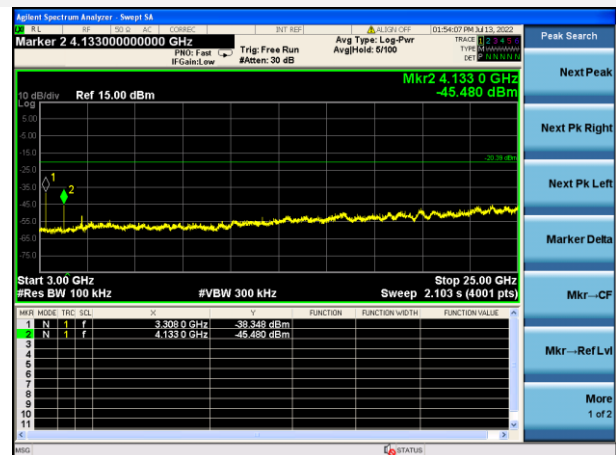




GFSK HOPPING, CARRIER LEVEL

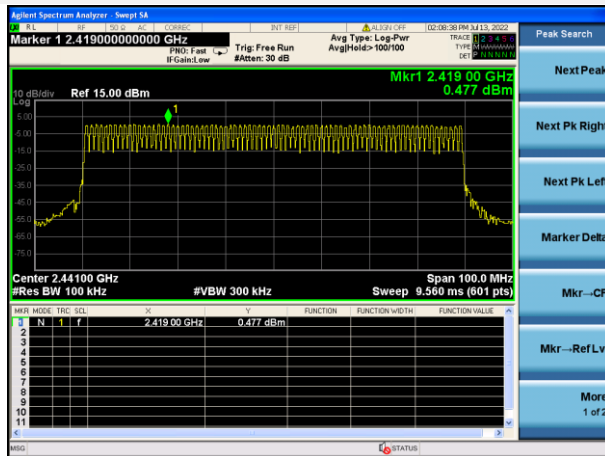

GFSK HOPPING BAND EDGE (LOW)



GFSK HOPPING BAND EDGE (HIGH)

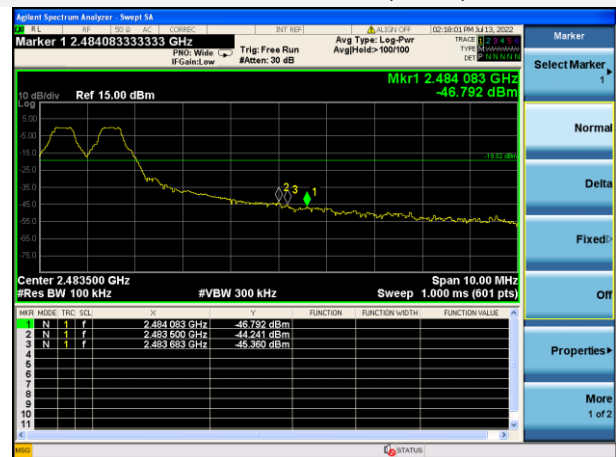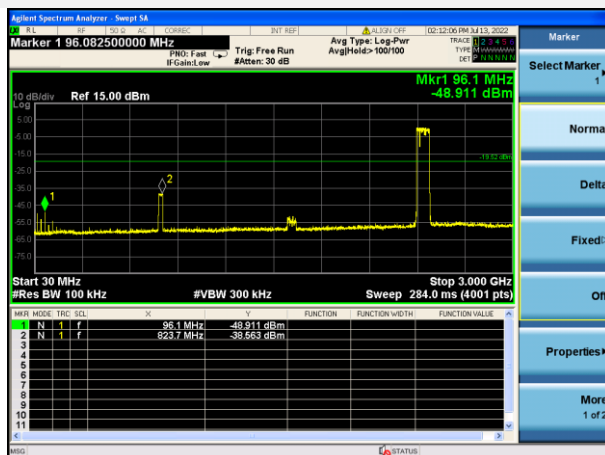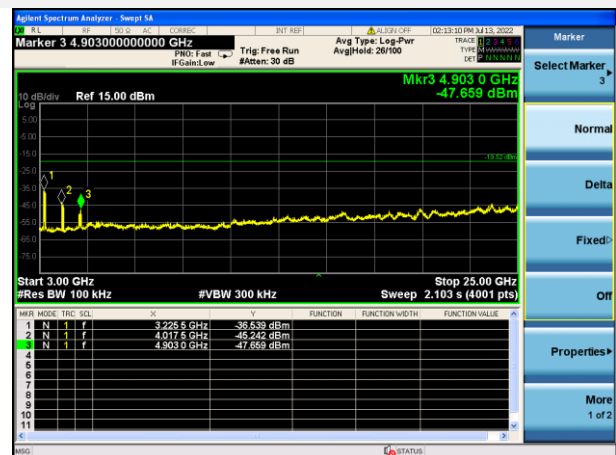GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

A.7 Conducted Emissions

Note: Not applicable.

A.8 Radiated Emission

Test Data and Plots

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

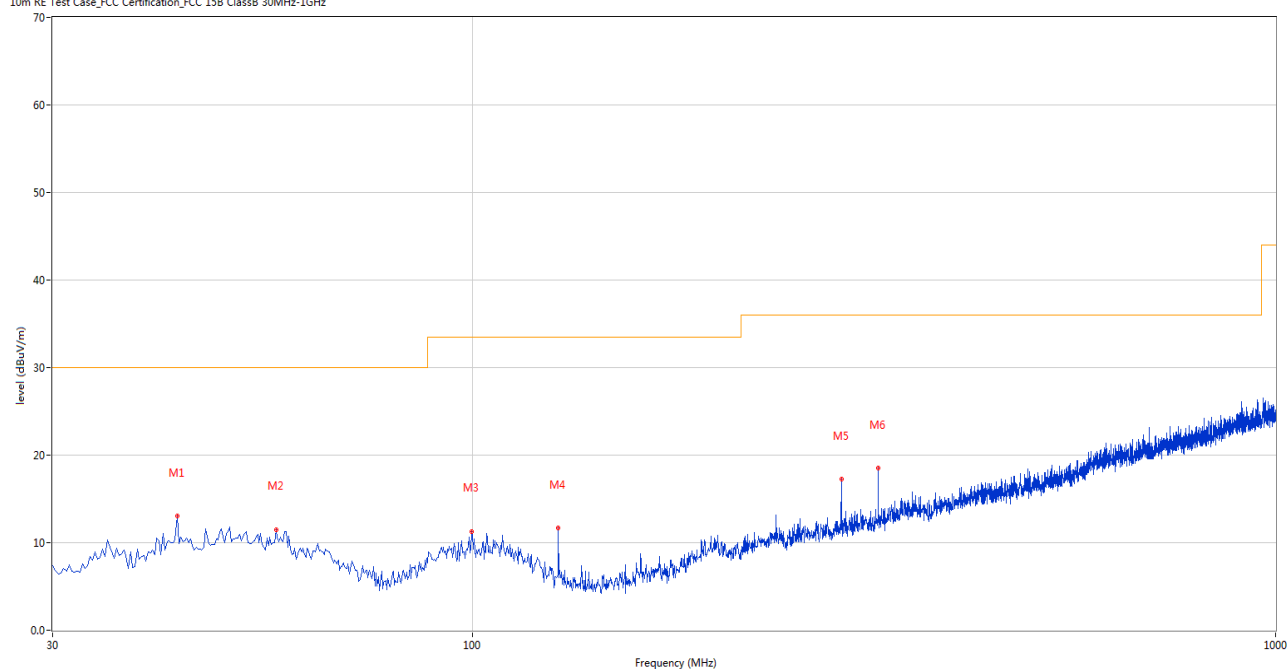

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.849	13.01	-26.17	30.0	-16.99	Peak	171.00	200	Horizontal	Pass
2	56.911	11.52	-27.06	30.0	-18.48	Peak	1.00	200	Horizontal	Pass
3	99.823	11.28	-27.98	33.5	-22.22	Peak	0.00	200	Horizontal	Pass
4	127.946	11.67	-31.06	33.5	-21.83	Peak	347.00	200	Horizontal	Pass
5	287.956	17.21	-25.19	36.0	-18.79	Peak	35.00	200	Horizontal	Pass
6	319.958	18.51	-24.53	36.0	-17.49	Peak	0.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

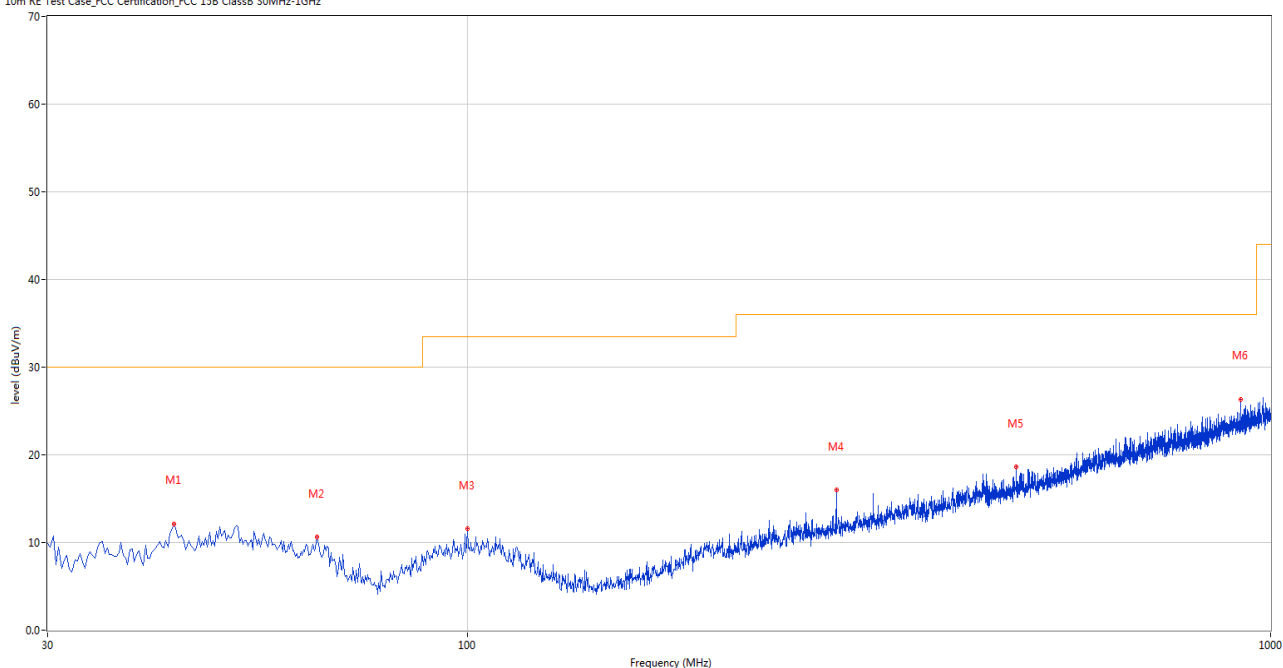

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.092	12.12	-26.21	30.0	-17.88	Peak	236.00	200	Vertical	Pass
2	64.911	10.63	-28.28	30.0	-19.37	Peak	0.00	200	Vertical	Pass
3	100.065	11.57	-27.96	33.5	-21.93	Peak	276.00	100	Vertical	Pass
4	287.956	15.98	-25.19	36.0	-20.02	Peak	241.00	200	Vertical	Pass
5	482.634	18.58	-20.92	36.0	-17.42	Peak	161.00	100	Vertical	Pass
6	917.571	26.36	-12.52	36.0	-9.64	Peak	75.00	200	Vertical	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

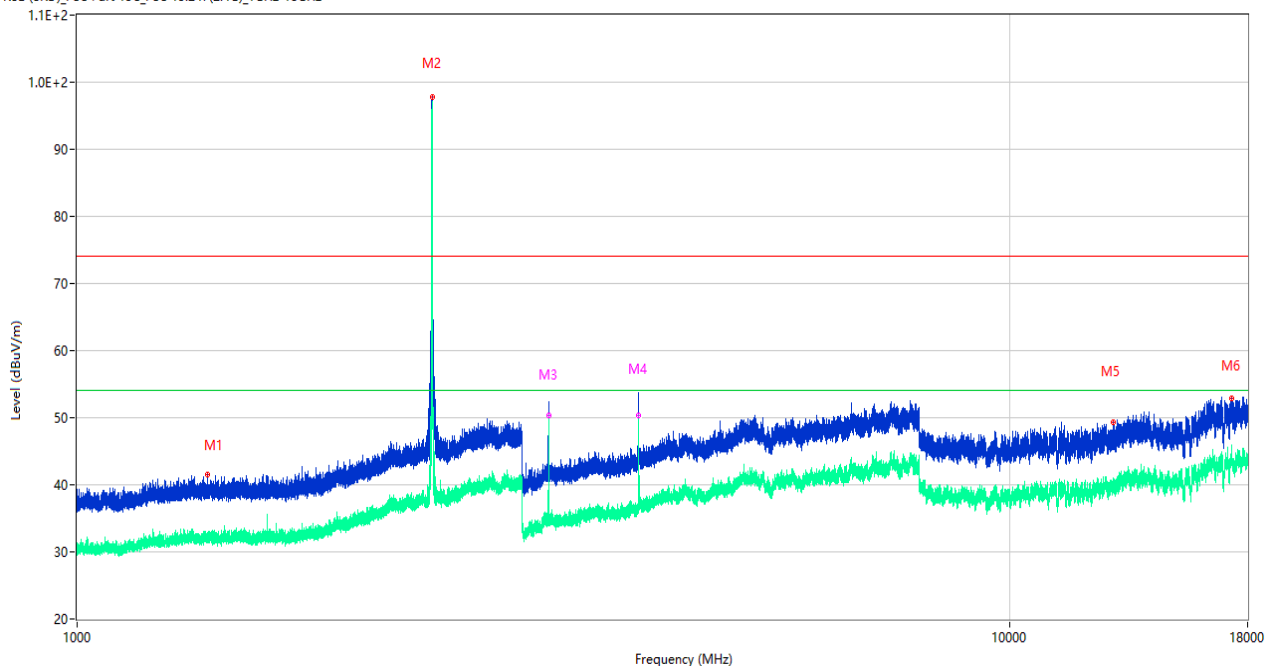

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1378.500	41.49	-17.56	74.0	-32.51	Peak	309.00	200	Horizontal	Pass
1**	1378.500	31.96	-17.56	54.0	-22.04	AV	309.00	200	Horizontal	Pass
2	2403.000	97.85	-13.34	74.0	23.85	Peak	71.00	100	Horizontal	N/A
2**	24023000	96.81	-13.34	54.0	42.81	AV	71.00	100	Horizontal	N/A
3	3203.000	52.07	-9.11	74.0	-21.93	Peak	50.00	200	Horizontal	Pass
3**	3203.000	50.41	-9.11	54.0	-3.59	AV	50.00	200	Horizontal	Pass
4	4003.750	53.23	-5.77	74.0	-20.77	Peak	84.00	100	Horizontal	Pass
4**	4003.750	50.824	-5.77	54.0	-3.176	AV	84.00	100	Horizontal	Pass
5	12925.875	49.27	-1.76	74.0	-24.73	Peak	361.00	400	Horizontal	Pass
5**	12925.875	38.45	-1.76	54.0	-15.55	AV	361.00	400	Horizontal	Pass
6	17286.261	52.81	1.99	74.0	-21.19	Peak	341.00	200	Horizontal	Pass
6**	17286.261	42.53	1.99	54.0	-11.47	AV	341.00	200	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

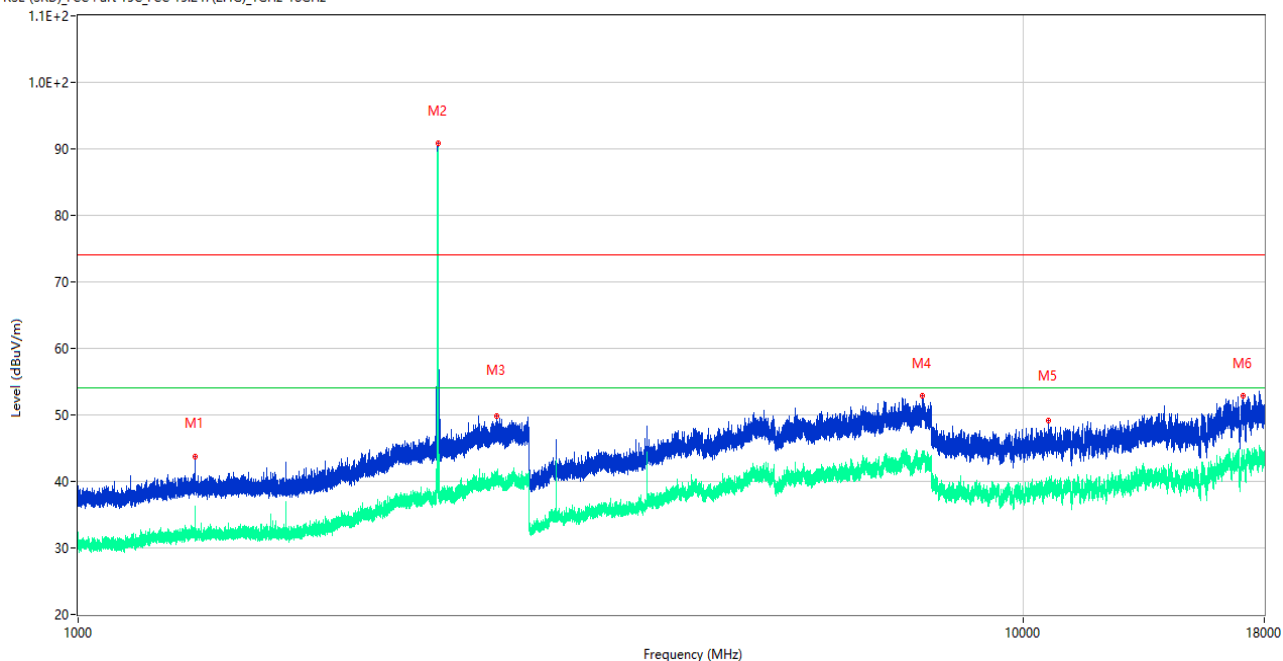

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.600	43.74	-17.40	74.0	-30.26	Peak	319.00	400	Vertical	Pass
1**	1330.600	31.92	-17.40	54.0	-22.08	AV	319.00	400	Vertical	Pass
2	2403.100	90.82	-13.33	74.0	16.82	Peak	258.00	200	Vertical	N/A
2**	2403.100	90.07	-13.33	54.0	36.07	AV	258.00	200	Vertical	N/A
3	2773.100	49.88	-10.77	74.0	-24.12	Peak	123.00	200	Vertical	Pass
3**	2773.100	39.94	-10.77	54.0	-14.06	AV	123.00	200	Vertical	Pass
4	7824.750	52.85	1.94	74.0	-21.15	Peak	165.00	300	Vertical	Pass
4**	7824.750	43.74	1.94	54.0	-10.26	AV	165.00	300	Vertical	Pass
5	10628.650	49.22	-4.51	74.0	-24.78	Peak	129.00	300	Vertical	Pass
5**	10628.650	39.44	-4.51	54.0	-14.56	AV	129.00	300	Vertical	Pass
6	17100.412	52.84	1.31	74.0	-21.16	Peak	290.00	300	Vertical	Pass
6**	17100.412	43.24	1.31	54.0	-10.76	AV	290.00	300	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

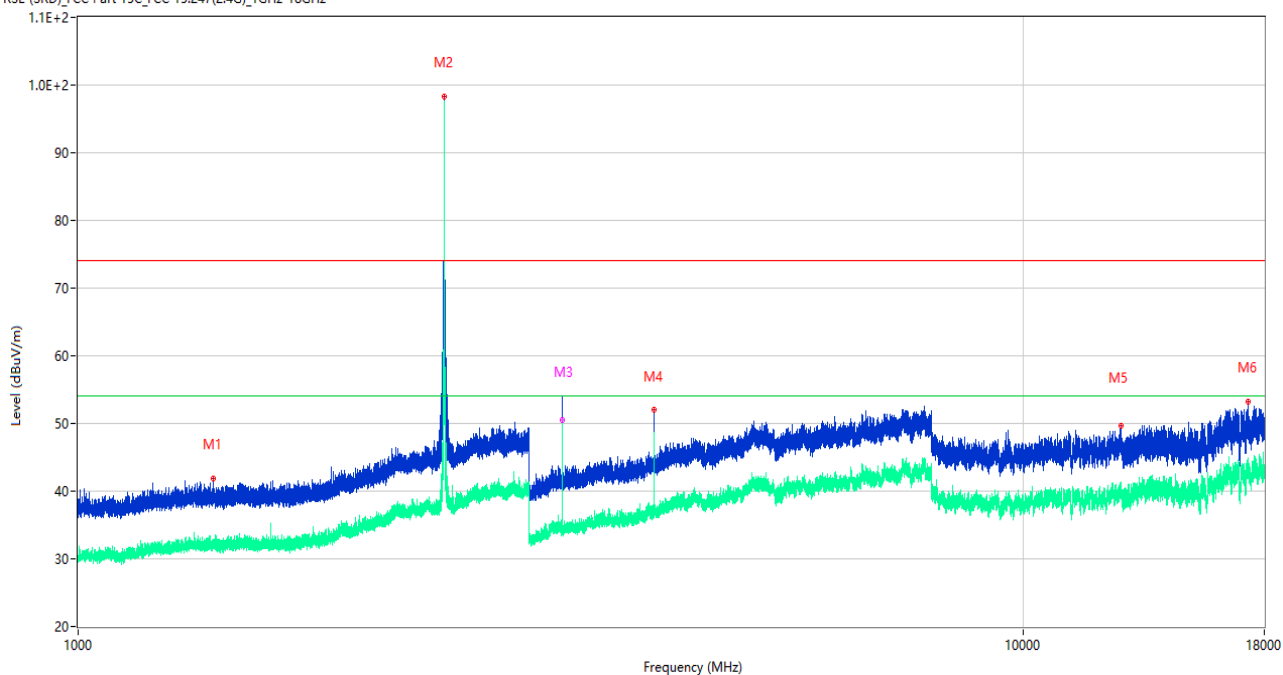

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1390.800	41.89	-17.25	74.0	-32.11	Peak	114.00	300	Horizontal	Pass
1**	1390.800	32.05	-17.25	54.0	-21.95	AV	114.00	300	Horizontal	Pass
2	2442.000	98.33	-12.38	74.0	24.33	Peak	83.00	200	Horizontal	N/A
2**	2442.000	97.71	-12.38	54.0	43.71	AV	83.00	200	Horizontal	N/A
3	3253.500	53.55	-9.18	74.0	-20.45	Peak	83.00	300	Horizontal	Pass
3**	3253.500	50.594	-9.18	54.0	-3.406	AV	83.00	300	Horizontal	Pass
4	4066.750	51.99	-6.16	74.0	-22.01	Peak	58.00	200	Horizontal	Pass
4**	4066.750	48.57	-6.16	54.0	-5.43	AV	58.00	200	Horizontal	Pass
5	12711.287	49.72	-2.36	74.0	-24.28	Peak	268.00	200	Horizontal	Pass
5**	12711.287	39.74	-2.36	54.0	-14.26	AV	268.00	200	Horizontal	Pass
6	17320.913	53.23	1.96	74.0	-20.77	Peak	33.00	300	Horizontal	Pass
6**	17320.913	44.14	1.96	54.0	-9.86	AV	33.00	300	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

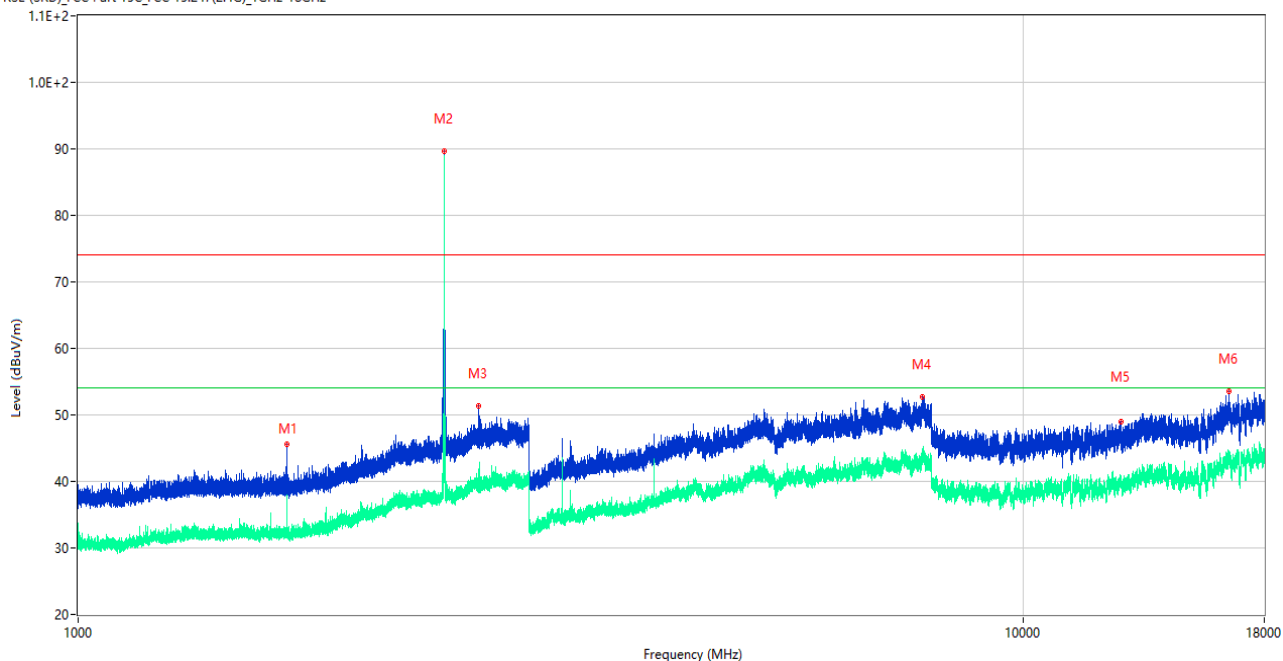

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.700	45.66	-17.66	74.0	-28.34	Peak	243.00	300	Vertical	Pass
1**	1664.700	36.50	-17.66	54.0	-17.50	AV	243.00	300	Vertical	Pass
2	2442.000	89.65	-12.38	74.0	15.65	Peak	148.00	150	Vertical	N/A
2**	2442.000	88.60	-12.38	54.0	34.60	AV	148.00	150	Vertical	N/A
3	2653.800	51.32	-12.61	74.0	-22.68	Peak	106.00	150	Vertical	Pass
3**	2653.800	39.91	-12.61	54.0	-14.09	AV	106.00	150	Vertical	Pass
4	7830.000	52.69	1.96	74.0	-21.31	Peak	247.00	100	Vertical	Pass
4**	7830.000	43.59	1.96	54.0	-10.41	AV	247.00	100	Vertical	Pass
5	12692.525	49.03	-2.33	74.0	-24.97	Peak	229.00	300	Vertical	Pass
5**	12692.525	39.96	-2.33	54.0	-14.04	AV	229.00	300	Vertical	Pass
6	16515.825	53.55	0.01	74.0	-20.45	Peak	219.00	300	Vertical	Pass
6**	16515.825	43.07	0.01	54.0	-10.93	AV	219.00	300	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

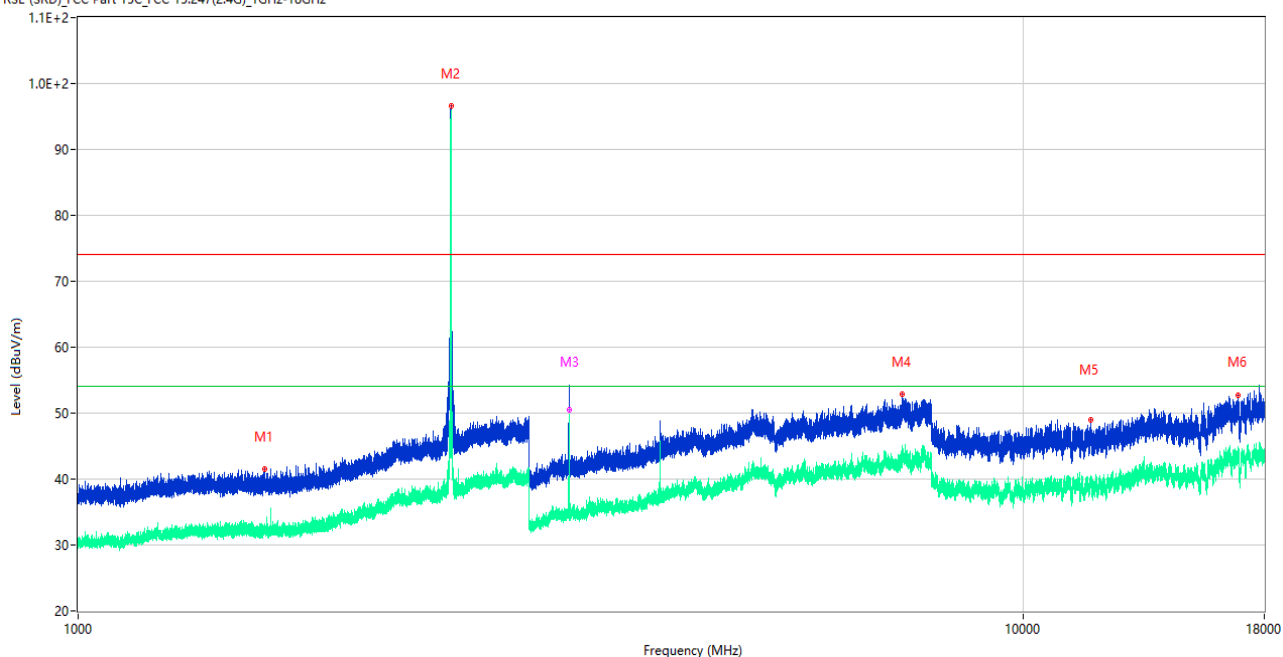

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1576.400	41.47	-17.47	74.0	-32.53	Peak	228.00	200	Horizontal	Pass
1**	1576.400	32.82	-17.47	54.0	-21.18	AV	228.00	200	Horizontal	Pass
2	2480.000	96.58	-13.08	74.0	22.58	Peak	73.00	200	Horizontal	N/A
2**	2480.000	95.70	-13.08	54.0	41.70	AV	73.00	200	Horizontal	N/A
3	3307.000	53.15	-8.54	74.0	-20.85	Peak	86.00	300	Horizontal	Pass
3**	3307.000	50.685	-8.54	54.0	-3.315	AV	86.00	300	Horizontal	Pass
4	7454.000	52.87	1.12	74.0	-21.13	Peak	69.00	300	Horizontal	Pass
4**	7454.000	43.34	1.12	54.0	-10.66	AV	69.00	300	Horizontal	Pass
5	11798.338	49.06	-3.55	74.0	-24.94	Peak	34.00	200	Horizontal	Pass
5**	11798.338	39.72	-3.55	54.0	-14.28	AV	34.00	200	Horizontal	Pass
6	16904.588	52.76	1.44	74.0	-21.24	Peak	204.00	400	Horizontal	Pass
6**	16904.588	42.90	1.44	54.0	-11.10	AV	204.00	400	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

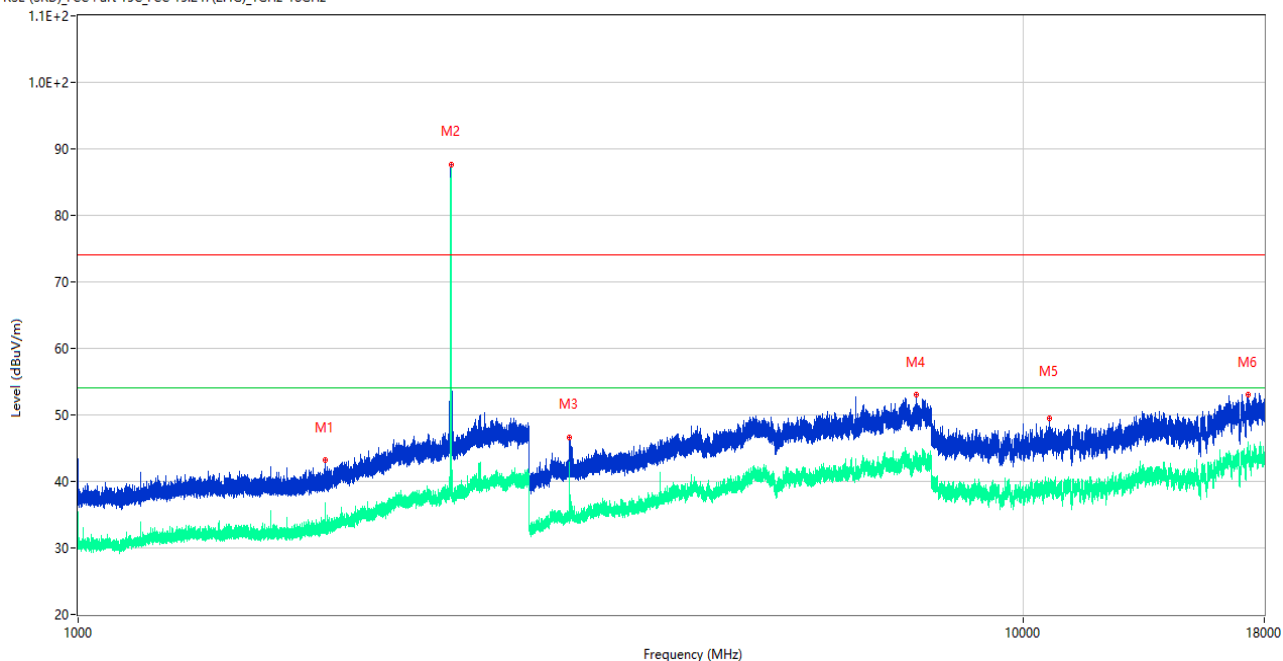

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1825.600	43.30	-17.27	74.0	-30.70	Peak	302.00	400	Vertical	Pass
1**	1825.600	33.65	-17.27	54.0	-20.35	AV	302.00	400	Vertical	Pass
2	2479.900	87.67	-13.07	74.0	13.67	Peak	152.00	200	Vertical	N/A
2**	2479.900	86.81	-13.07	54.0	32.81	AV	152.00	200	Vertical	N/A
3	3306.750	46.61	-8.57	74.0	-27.39	Peak	143.00	400	Vertical	Pass
3**	3306.750	41.73	-8.57	54.0	-12.27	AV	143.00	400	Vertical	Pass
4	7708.250	53.00	1.45	74.0	-21.00	Peak	55.00	100	Vertical	Pass
4**	7708.250	44.16	1.45	54.0	-9.84	AV	55.00	100	Vertical	Pass
5	10672.825	49.48	-4.79	74.0	-24.52	Peak	241.00	400	Vertical	Pass
5**	10672.825	39.54	-4.79	54.0	-14.46	AV	241.00	400	Vertical	Pass
6	17287.838	53.02	1.99	74.0	-20.98	Peak	233.00	100	Vertical	Pass
6**	17287.838	43.66	1.99	54.0	-10.34	AV	233.00	100	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data and Plots

GFSK LOW CHANNEL

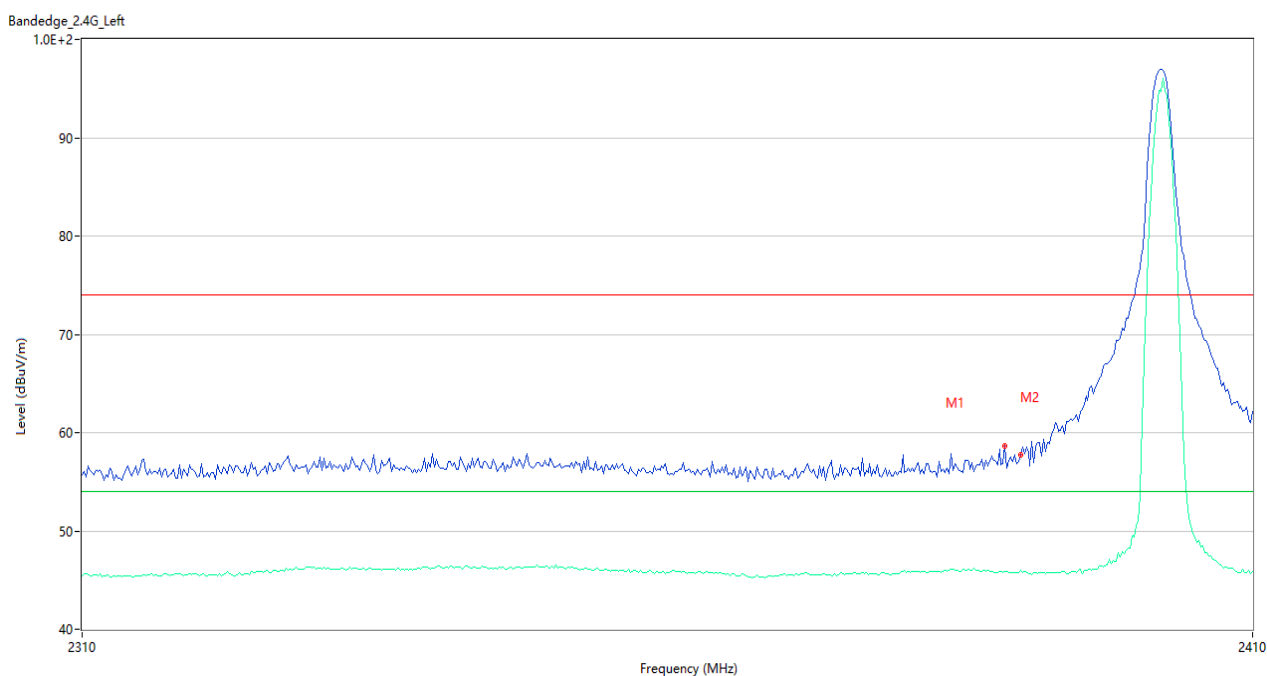

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2388.500	58.61	1.74	74.0	-15.39	Peak	354.00	200	Horizontal	Pass
1**	2388.500	45.71	1.74	54.0	-8.29	AV	354.00	200	Horizontal	Pass
2	2389.833	57.74	1.64	74.0	-16.26	Peak	312.00	100	Horizontal	Pass
2**	2389.833	45.64	1.64	54.0	-8.36	AV	312.00	100	Horizontal	Pass

GFSK HIGH CHANNEL

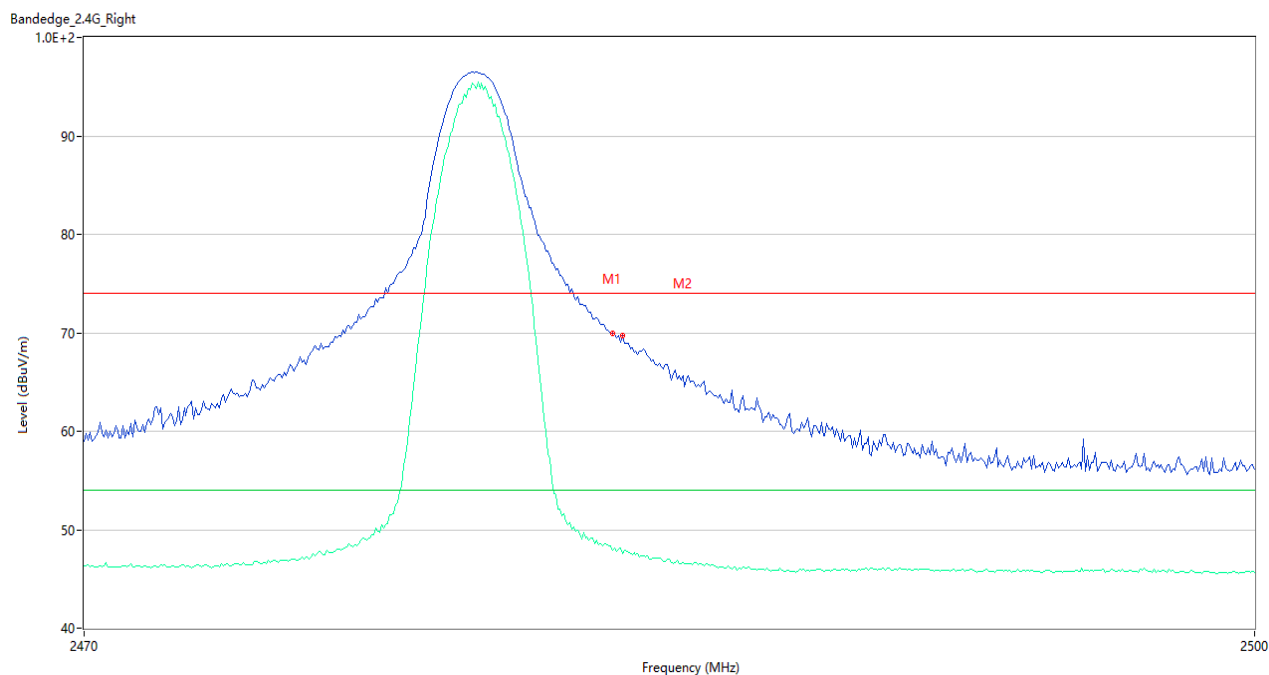

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	69.94	1.98	74.0	-4.06	Peak	69.00	100	Horizontal	Pass
1**	2483.500	47.90	1.98	54.0	-6.10	AV	69.00	100	Horizontal	Pass
2	2483.750	69.68	1.99	74.0	-4.32	Peak	75.00	150	Horizontal	Pass
2**	2483.750	47.61	1.99	54.0	-6.39	AV	75.00	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2260767-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2260767-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2260767-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--