

FCC REPORT

(UNII)

Applicant: APRIX LATINOAMERICA S.A.

Address of Applicant: ADVANCED 099 BLDG SUITE 4 C CALLE BEATRIZ M DE
CABAL PANAMA

Equipment Under Test (EUT)

Product Name: Tablet PC

Model No.: Aprix Tab8ii

Trade Mark: APRIX

FCC ID: 2AHJQ-APT8II

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 01 Jun., 2017

Date of Test: 01 Jun., to 11Jul., 2017

Date of report issued: 11 Jul., 2017

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	11 Jul., 2017	Original

Tested by:

Carey Chen

Test Engineer

Date:

11 Jul., 2017

Reviewed by:

Wimer Zhang

Project Engineer

Date:

11 Jul., 2017

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT ANDMODE	7
5.4 MEASUREMENT UNCERTAINTY.....	7
5.5 LABORATORY FACILITY.....	7
5.6 LABORATORY LOCATION	7
5.7 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSION	10
6.3 CONDUCTED OUTPUT POWER	13
6.4 OCCUPY BANDWIDTH	18
6.5 POWER SPECTRAL DENSITY	25
6.6 BAND EDGE	30
6.7 SPURIOUS EMISSION.....	34
6.7.1 Restricted Band	34
6.7.2 Unwanted Emissions out of the Restricted Bands	38
6.8 FREQUENCY STABILITY	45
7 TEST SETUP PHOTO	47
8 EUT CONSTRUCTIONAL DETAILS	49

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.407 (g)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a)	Pass
26dB Occupied Bandwidth	15.407 (a)	Pass
6dB Emission Bandwidth	15.407(e)	N/A ^{note1}
Power Spectral Density	15.407 (a)	Pass
Band Edge	15.407(b)	Pass
Spurious Emission	15.205/15.209	Pass
Frequency Stability	15.407(g)	Pass

Pass: The EUT complies with the essential requirements in the standard.

note1: Not Applicable for 5150MHz~5350MHz and 5470~5725MHz band equipment.

5 General Information

5.1 Client Information

Applicant:	APRIX LATINOAMERICA S.A.
Address of Applicant:	ADVANCED 099 BLDG SUITE 4 C CALLE BEATRIZ M DE CABAL PANAMA
Manufacturer:	Todos industrial limited
Address of Manufacturer:	Room 308, Building #5, Cofoc (Fuan) Robotics Industrial Park, No.90, Dayang Road, Fuyong Street, Shenzhen City, P.R. China

5.2 General Description of E.U.T.

Product Name:	Tablet PC
Model No.:	Aprix Tab8ii
Operation Frequency:	Band 1: 5180MHz-5240MHz
Channel numbers:	Band 1: 802.11a/802.11n20: 4,802.11n40: 2
Channel separation:	802.11a/802.11n20:20MHz, 802.11n40:40MHz
Modulation technology: (IEEE 802.11a)	BPSK,QPSK,16-QAM,64-QAM
Modulation technology: (IEEE 802.11n)	BPSK,QPSK,16-QAM,64-QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps,12Mbps,18Mbps,24Mbps,36Mbps,48Mbps,54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps,MCS1:13Mbps,MCS2:19.5Mbps,MCS3:26Mbps, MCS4:39Mbps,MCS5:52Mbps,MCS6:58.5Mbps,MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps,MCS1:30Mbps,MCS2:45Mbps,MCS3:60Mbps, MCS4:90Mbps,MCS5:120Mbps,MCS6:135Mbps,MCS7:150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	2 dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V-4000mAh
AC adapter:	Model: BY120502000 Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2000mAh

Operation Frequency each of channel

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
36	5180MHz	39	5190MHz
40	5200MHz	45	5230MHz
44	5220MHz		
48	5240MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5180MHz	The lowest channel	5190MHz
The middle channel	5200MHz	The highest channel	5230MHz
The highest channel	5240MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6Mbps
802.11n20	6.5Mbps
802.11n40	13.5Mbps
Final Test Mode:	
According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 6Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13.5 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed with duty cycle above 98%, meet the requirements of KDB789033.	

5.4 Measurement Uncertainty

Items	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	2.14 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	4.24 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	4.35 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	4.44 dB (k=2)
Radiated Emission (18GHz ~ 26.5GHz)	4.56 dB (k=2)

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC- Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Website: <http://www.ccis-cb.com>
 Tel: +86-755-23118282
 Fax: +86-755-23116366
 Email: info@ccis-cb.com

5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m SAC	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK	VULB9163	CCIS0005	02-25-2017	02-24-2018
3	Horn Antenna	SCHWARZBECK	BBHA9120D	CCIS0006	02-25-2017	02-24-2018
4	Pre-amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	02-25-2017	02-24-2018
5	Pre-amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	02-25-2017	02-24-2018
6	Pre-amplifier (18-40GHz)	A.H System	PAM-1840	GTS219	02-25-2017	02-24-2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	02-25-2017	02-24-2018
8	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP30	CCIS0023	02-25-2017	02-24-2018
9	EMI Test Receiver	Rohde & Schwarz	ESRP7	CCIS0167	02-25-2017	02-24-2018
10	Loop antenna	Laplace instrument	RF300	EMC0701	02-25-2017	02-24-2018
11	Spectrum Analyzer	HP	8564E	CCIS0150	02-25-2017	02-24-2018


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	08-23-2014	08-22-2017
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	02-25-2017	02-24-2018
3	LISN	CHASE	MN2050D	CCIS0074	02-25-2017	02-24-2018
4	Coaxial Cable	CCIS	N/A	CCIS0086	02-25-2017	02-24-2018
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part15 E Section 15.203 /407(a)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> <i>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i>	
E.U.T Antenna:	
The WiFi antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 2 dBi. 	

6.2 Conducted Emission

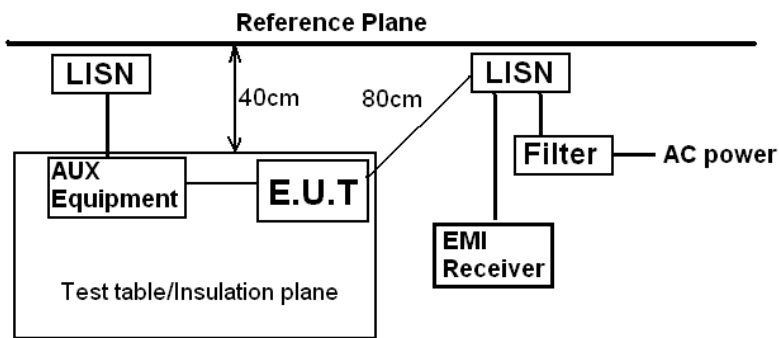Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4: 2014		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.		
Test setup:	 <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.7 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

Measurement Data

Test Polarization: Line

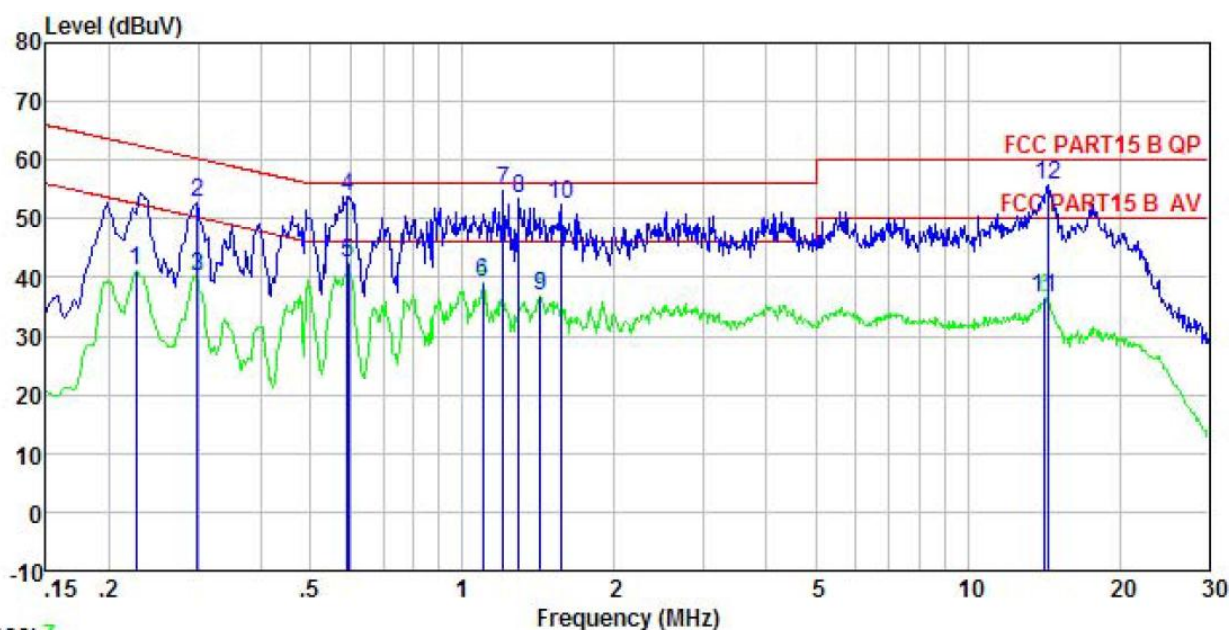

Trace: 7


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Tablet PC
 Model : Aprix Tab8ii
 Test Mode : 5G WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Yaro
 Remark :

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit Remark
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.226	31.01	-0.52	10.75	41.24	52.61 -11.37 Average
2	0.299	42.44	-0.51	10.74	52.67	60.28 -7.61 QP
3	0.299	30.08	-0.51	10.74	40.31	50.28 -9.97 Average
4	0.592	43.50	-0.49	10.77	53.78	56.00 -2.22 QP
5	0.595	32.15	-0.48	10.77	42.44	46.00 -3.56 Average
6	1.100	28.60	-0.48	10.88	39.00	46.00 -7.00 Average
7	1.203	44.26	-0.47	10.89	54.68	56.00 -1.32 QP
8	1.296	43.08	-0.47	10.90	53.51	56.00 -2.49 QP
9	1.426	26.34	-0.46	10.92	36.80	46.00 -9.20 Average
10	1.568	41.82	-0.45	10.93	52.30	56.00 -3.70 QP
11	14.213	26.13	-0.59	10.91	36.45	50.00 -13.55 Average
12	14.440	45.52	-0.62	10.90	55.80	60.00 -4.20 QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss.

Test Polarization: Neutral

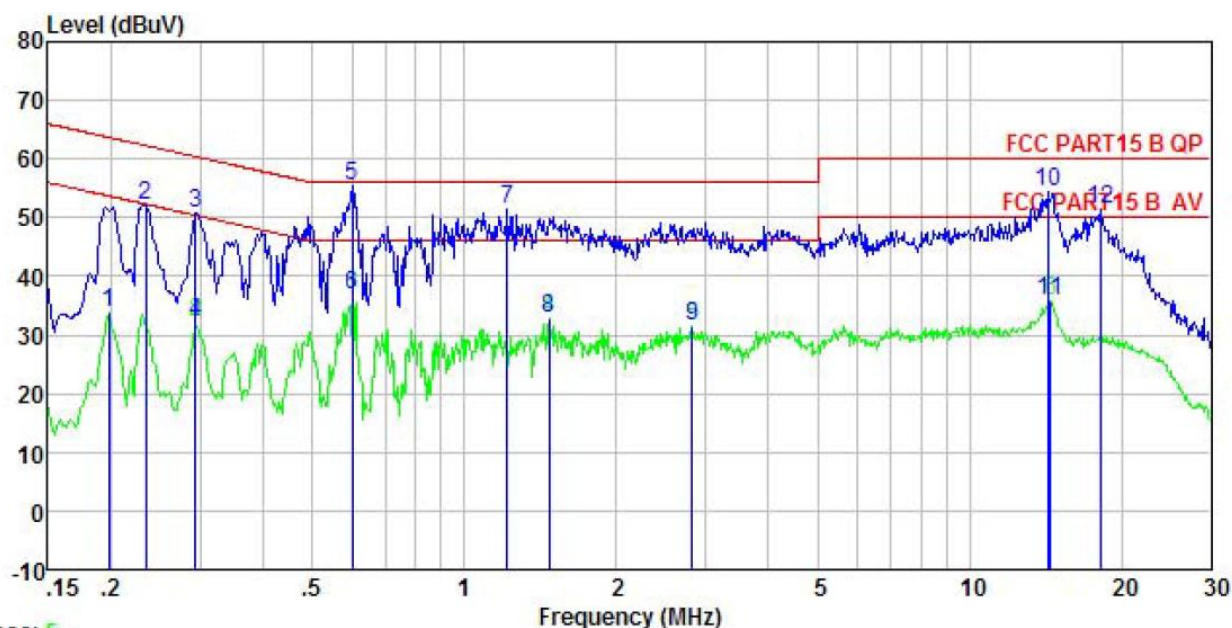

Trace: 5


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Tablet PC
 Model : Aprix Tab8ii
 Test Mode : 5G WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Yaro
 Remark :

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.198	23.37	-0.34	10.76	33.79	53.71	-19.92	Average
2	0.234	41.84	-0.33	10.75	52.26	62.30	-10.04	QP
3	0.294	40.43	-0.32	10.74	50.85	60.41	-9.56	QP
4	0.294	21.76	-0.32	10.74	32.18	50.41	-18.23	Average
5	0.601	44.85	-0.30	10.77	55.32	56.00	-0.68	QP
6	0.601	26.47	-0.30	10.77	36.94	46.00	-9.06	Average
7	1.216	40.88	-0.28	10.90	51.50	56.00	-4.50	QP
8	1.472	22.18	-0.27	10.92	32.83	46.00	-13.17	Average
9	2.824	20.75	-0.21	10.93	31.47	46.00	-14.53	Average
10	14.288	43.92	-0.23	10.90	54.59	60.00	-5.41	QP
11	14.440	25.12	-0.25	10.90	35.77	50.00	-14.23	Average
12	18.135	40.79	-0.43	10.92	51.28	60.00	-8.72	QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.


6.3 Conducted Output Power

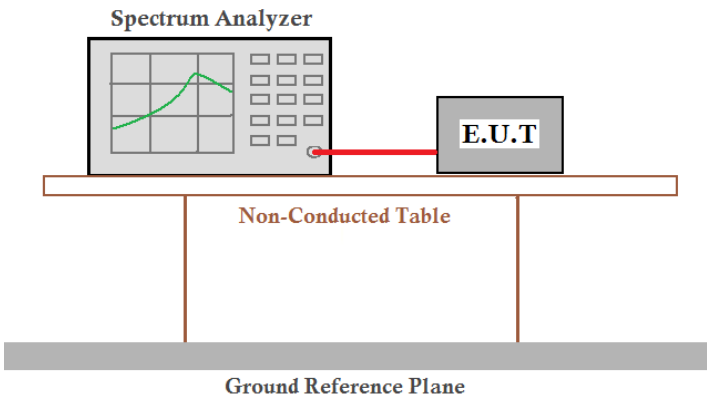
Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (iv)
Test Method:	ANSI C63.10: 2013, KDB789033 D02 General U-NII Test Procedures New Rules v01r04
Limit:	Band 1: 24dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T (Equipment Under Test) by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs and rests on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

Band 1				
Mode	Test CH	Conducted Output power (dBm)	Limit (dBm)	Result
802.11a	Lowest	5.11	24.00	Pass
	Middle	5.07	24.00	Pass
	Highest	4.37	24.00	Pass
802.11n20	Lowest	5.10	24.00	Pass
	Middle	4.77	24.00	Pass
	Highest	4.74	24.00	Pass
802.11n40	Lowest	5.03	24.00	Pass
	Highest	4.67	24.00	Pass


Test plot as follows:

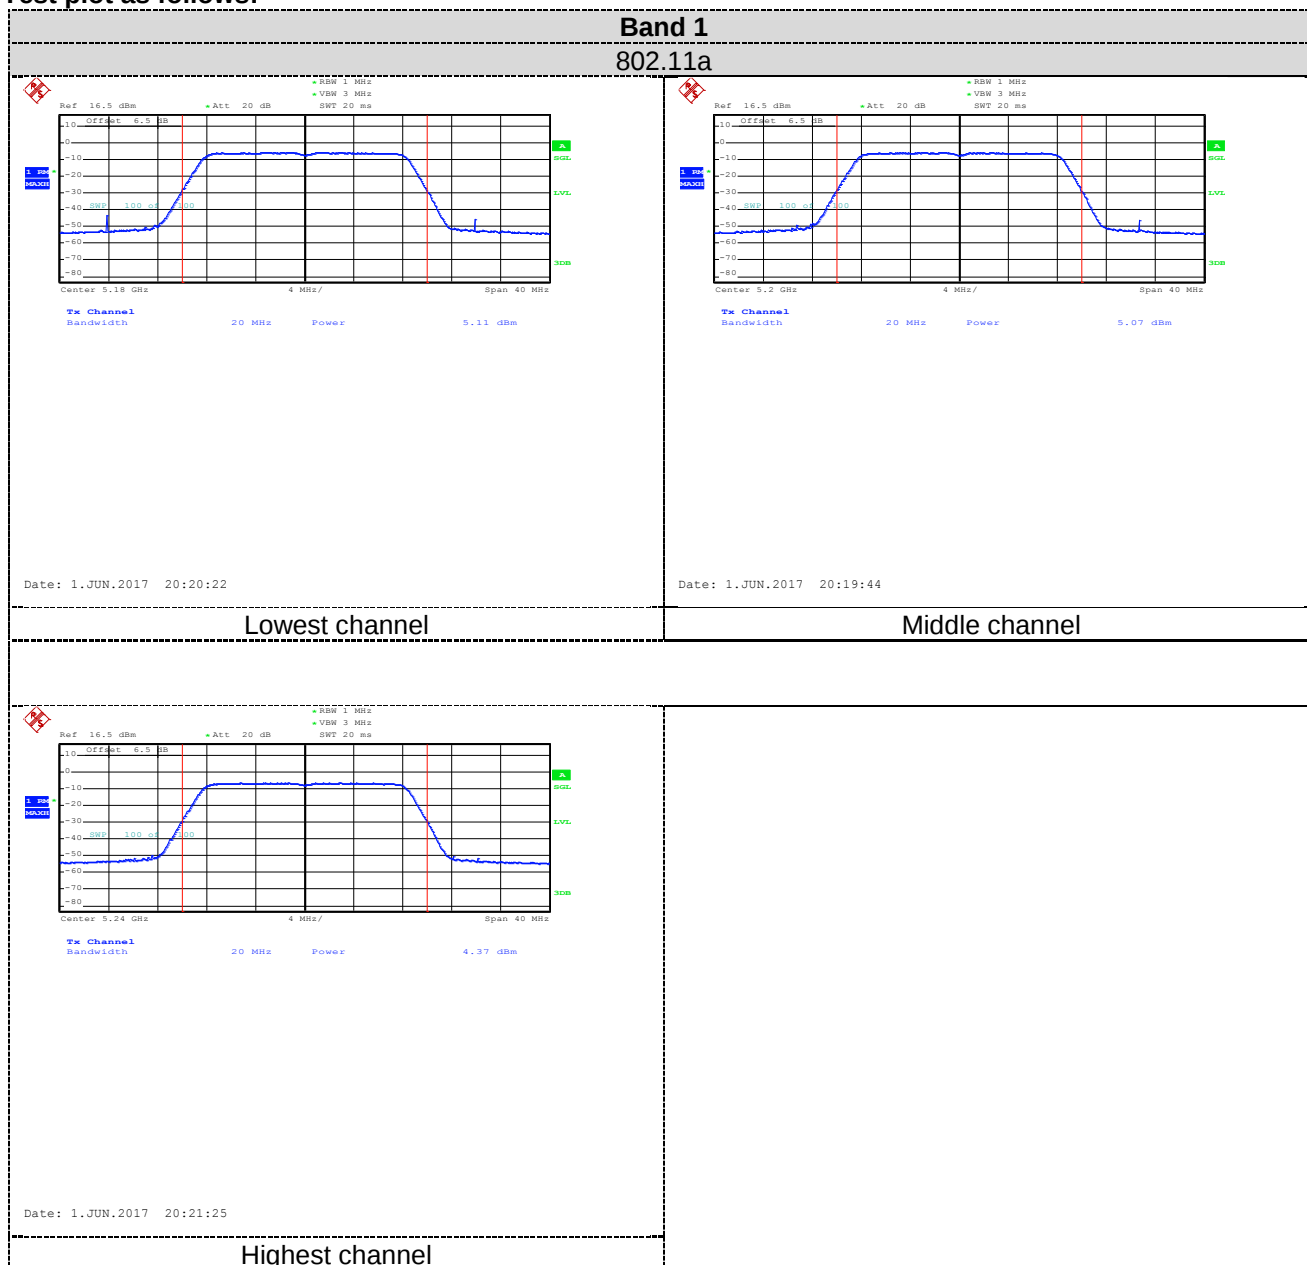

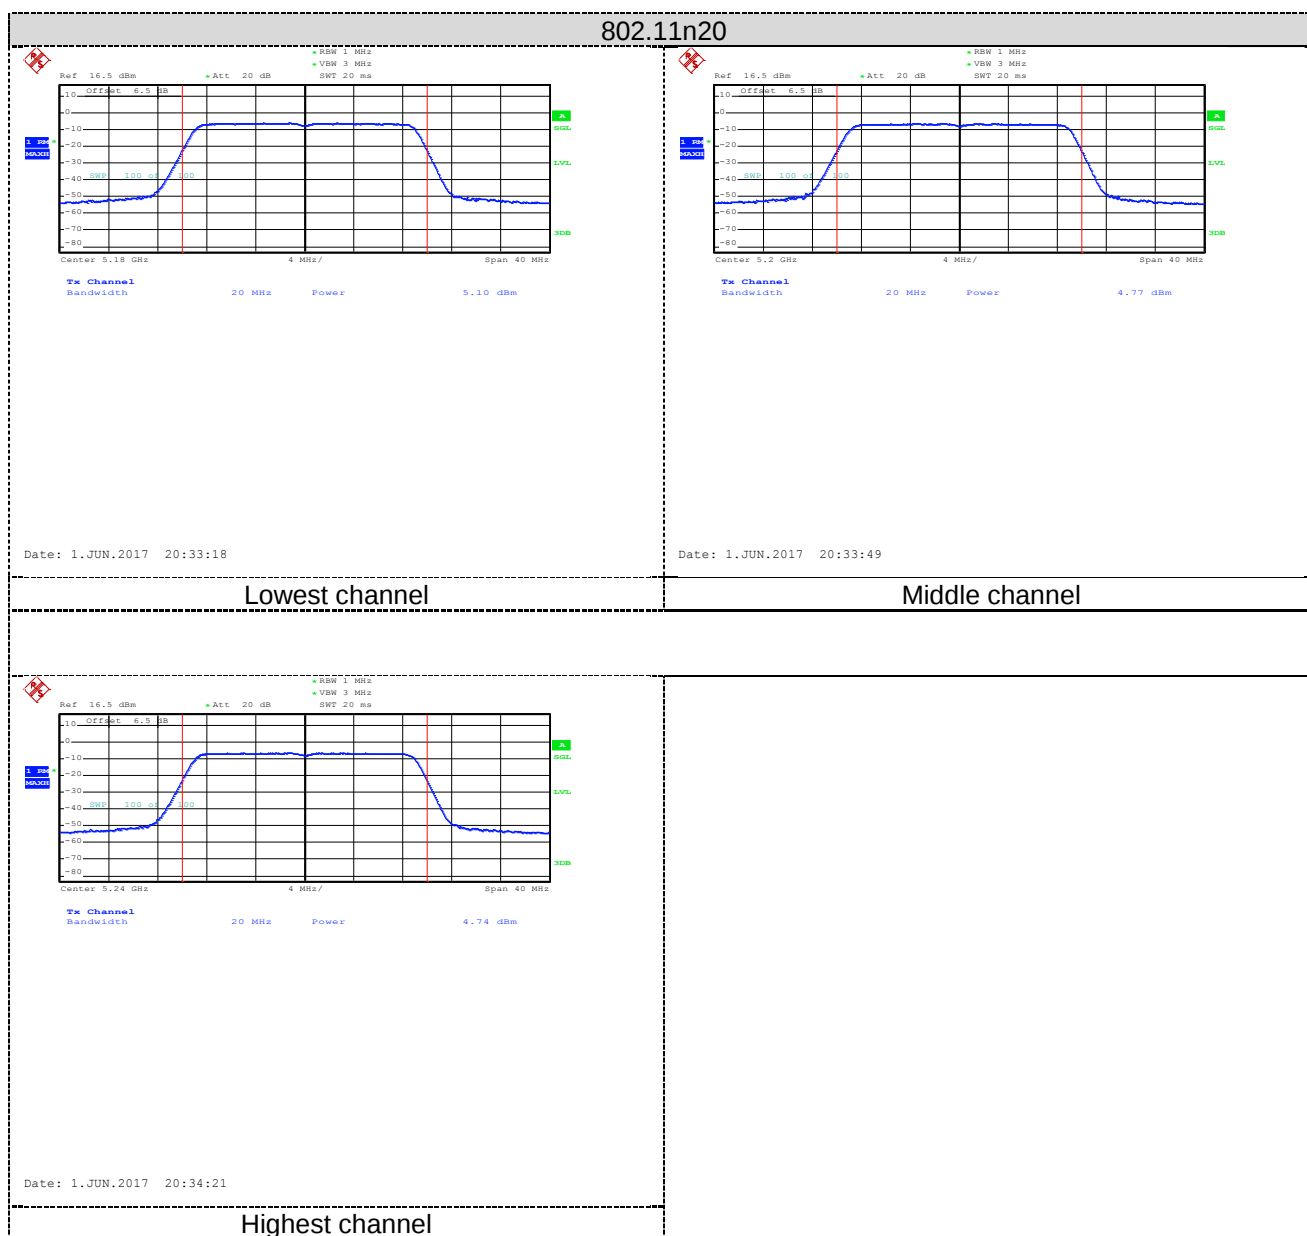

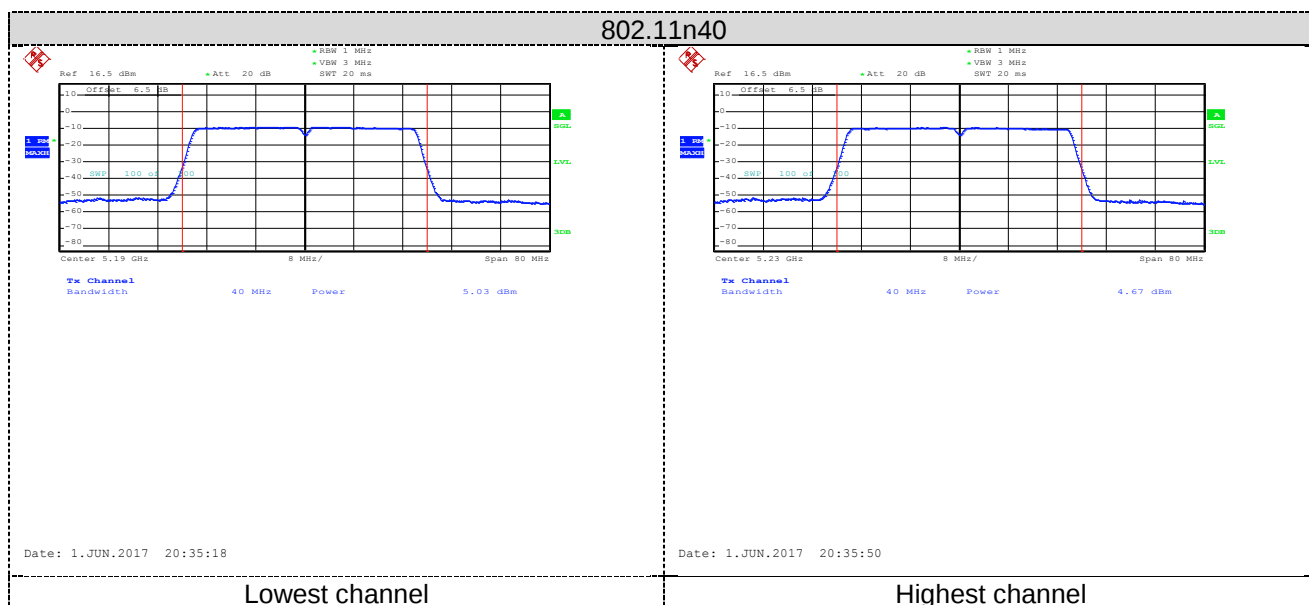

6.4 Occupy Bandwidth

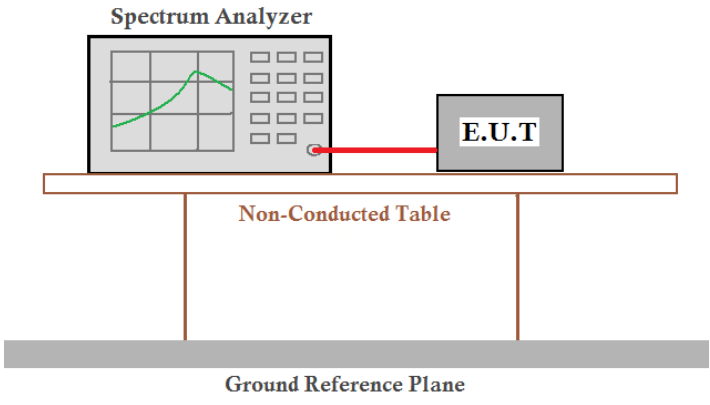Test Requirement:	FCC Part15 E Section 15.407 (a) (5)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v01r04
Limit:	Band 1: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data


Band 1:


Test Channel	26dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	19.52	19.84	38.56	N/A	N/A
Middle	19.36	19.76	---		
Highest	19.44	19.76	38.88		


Test Channel	99% Occupy Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.56	17.68	36.16	N/A	N/A
Middle	16.56	17.68	---		
Highest	16.56	17.68	36.16		

Test plot as follows:

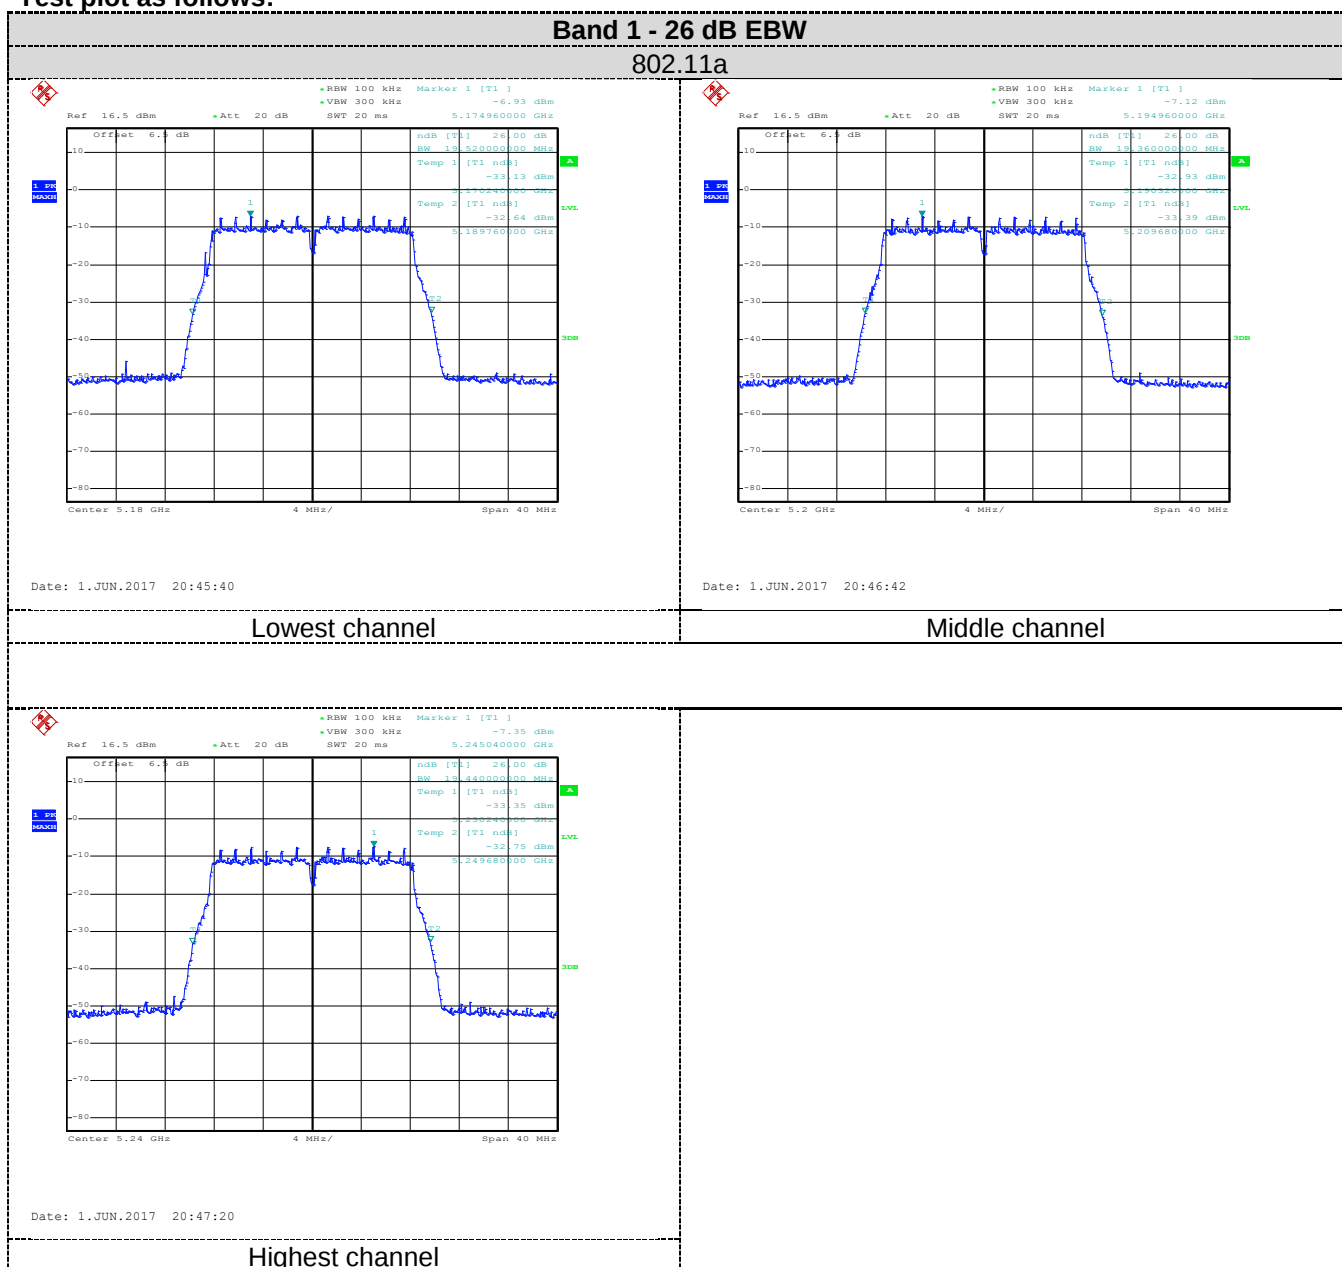


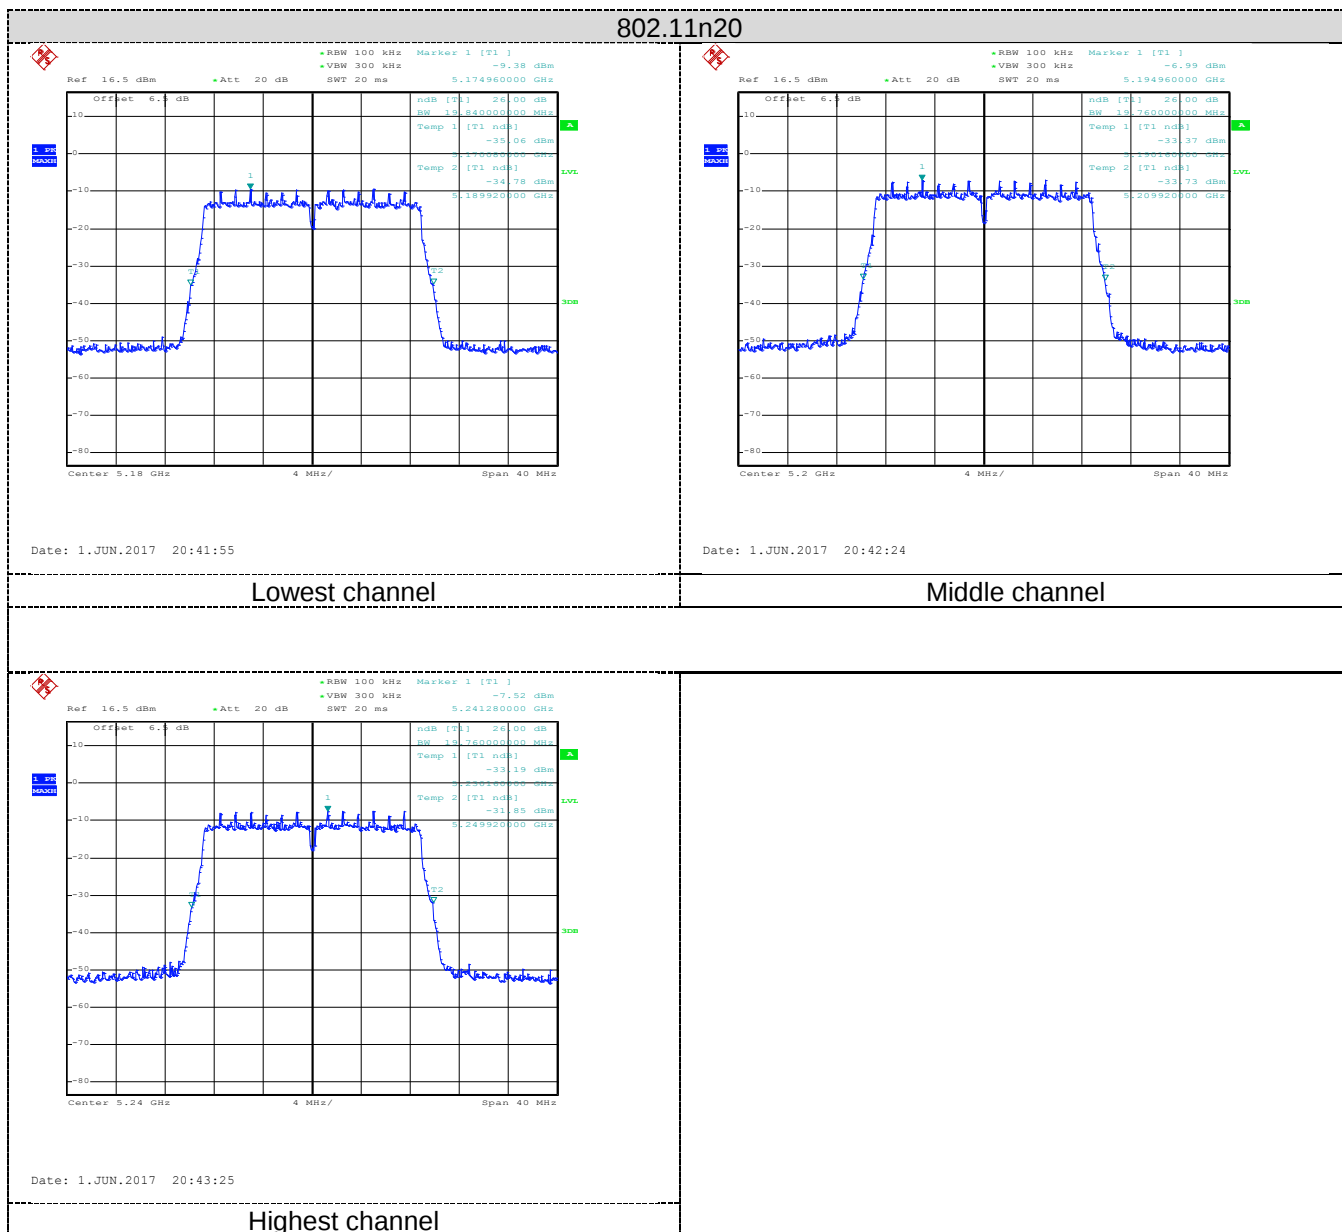


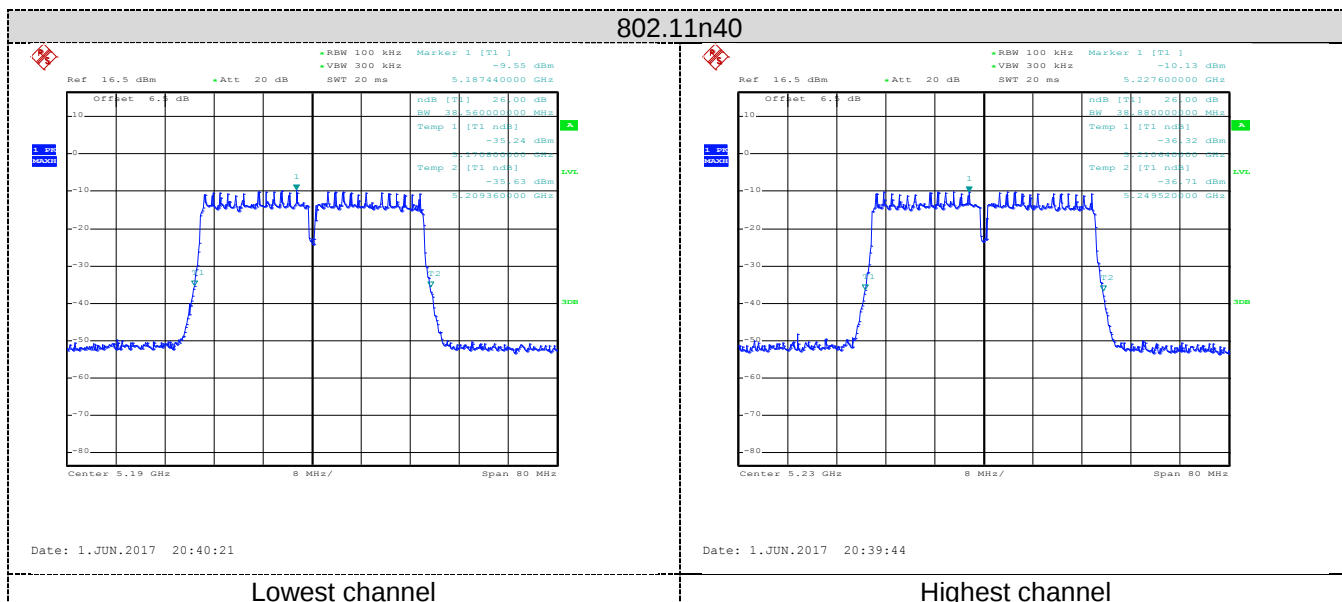

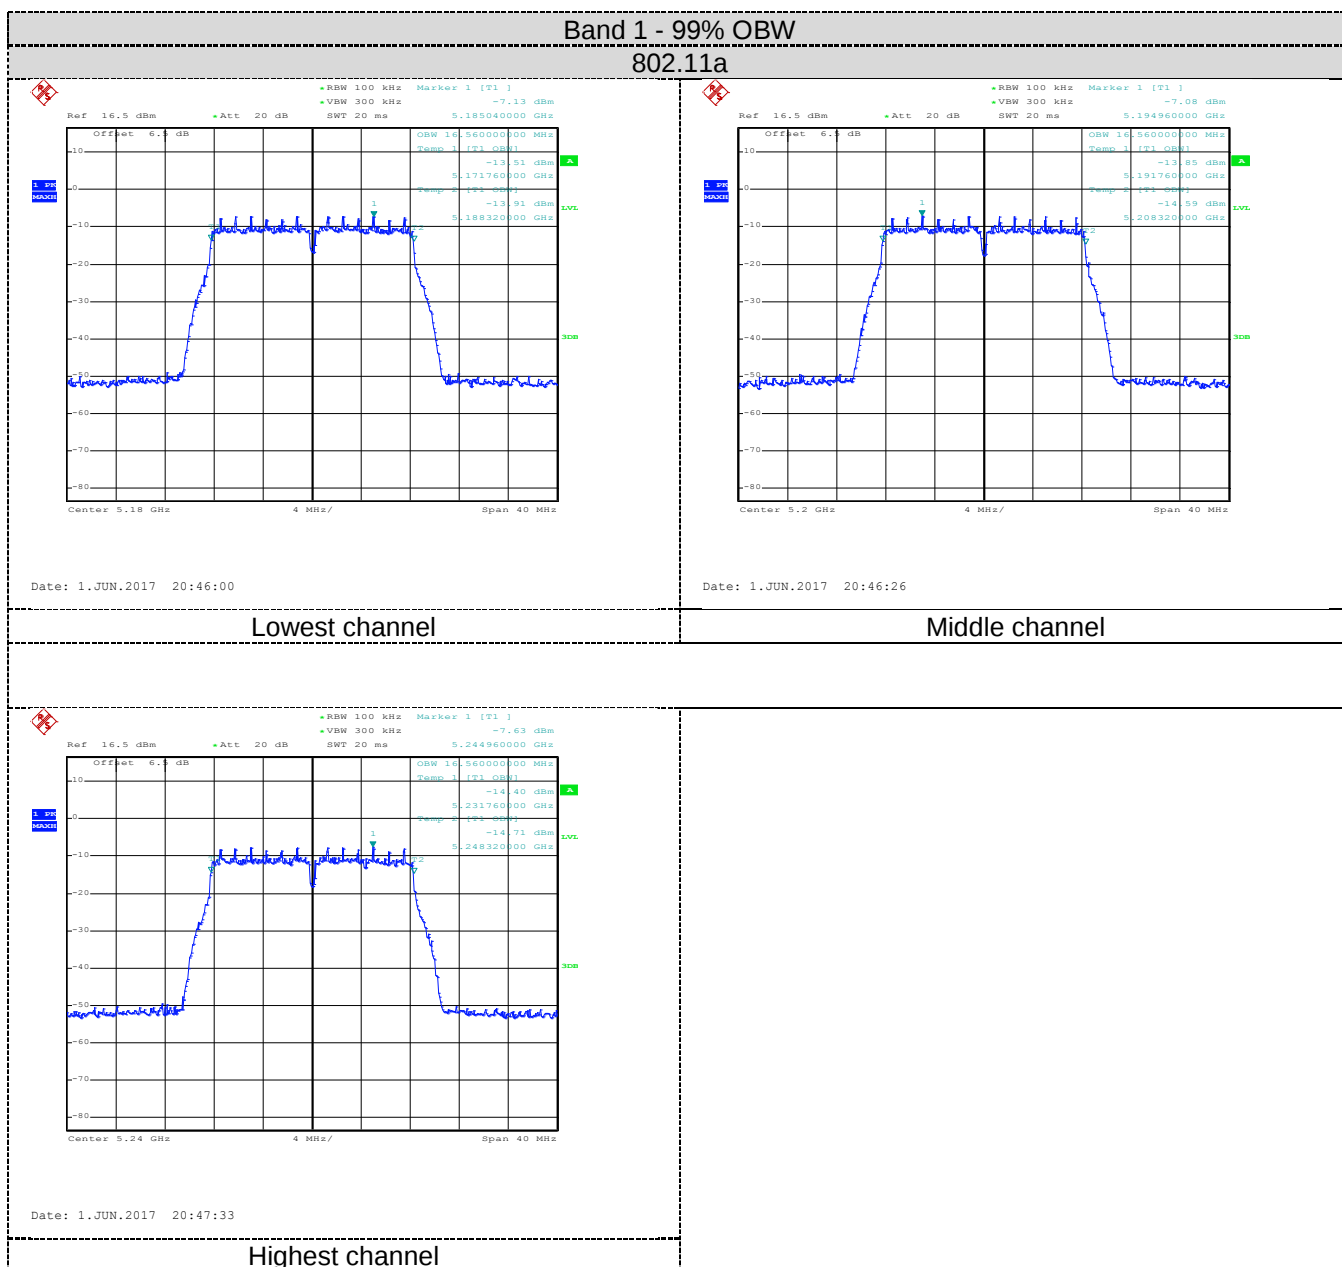


802.11n20

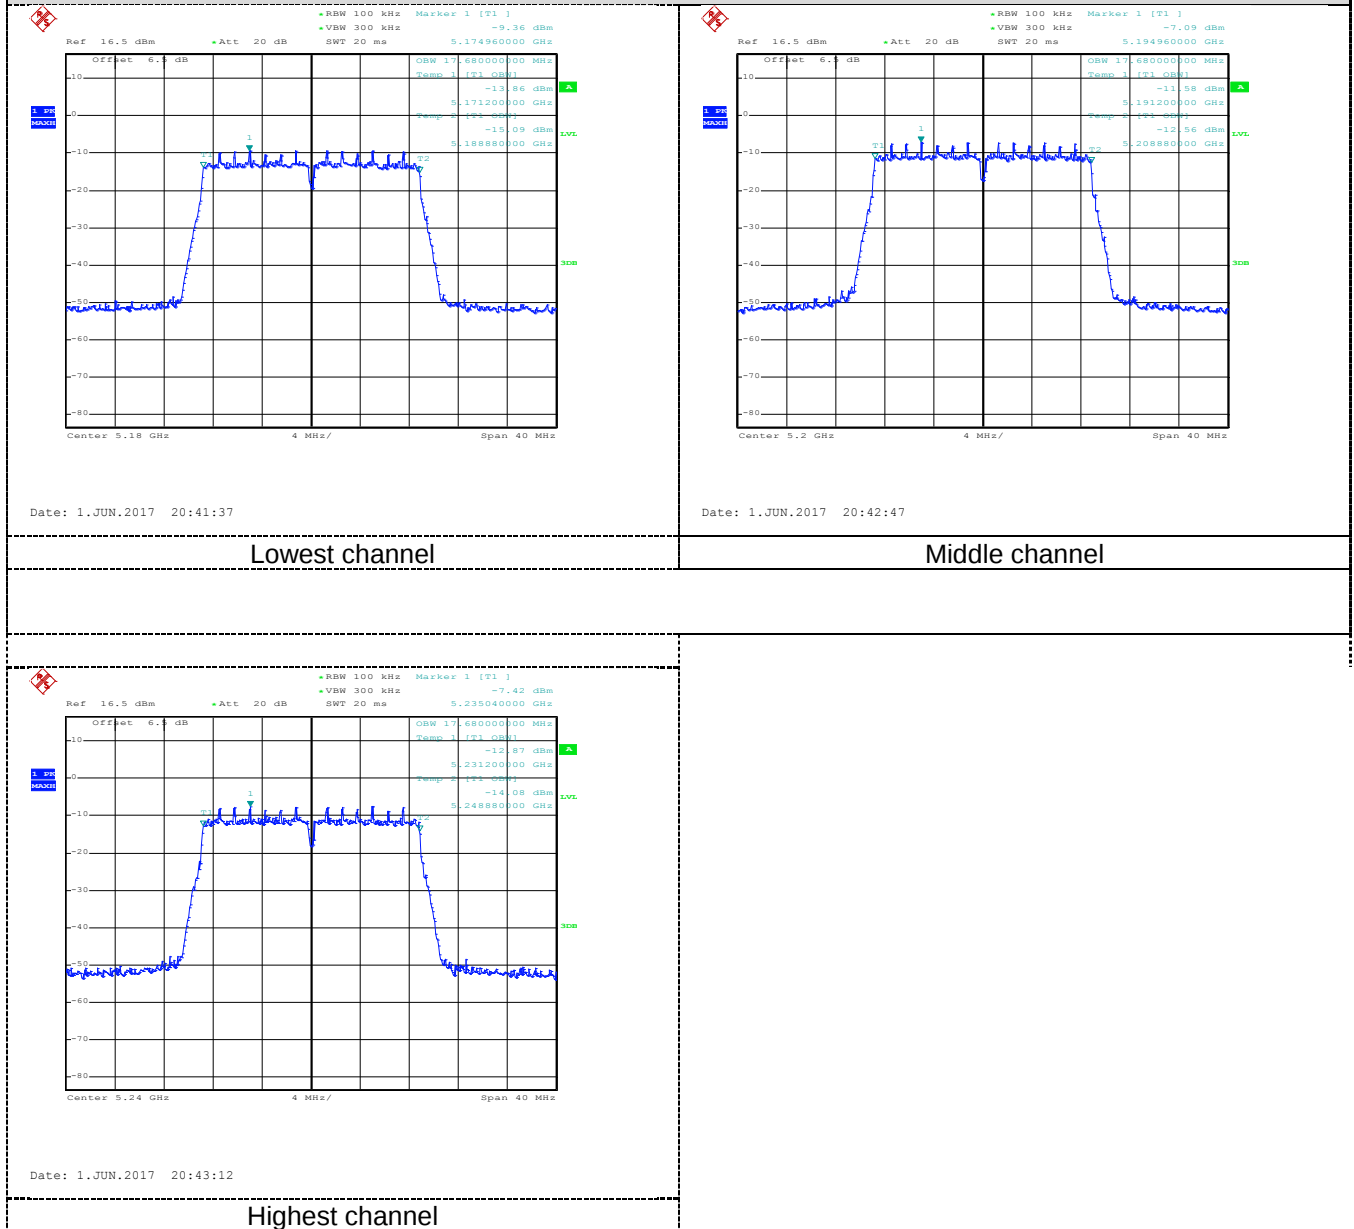

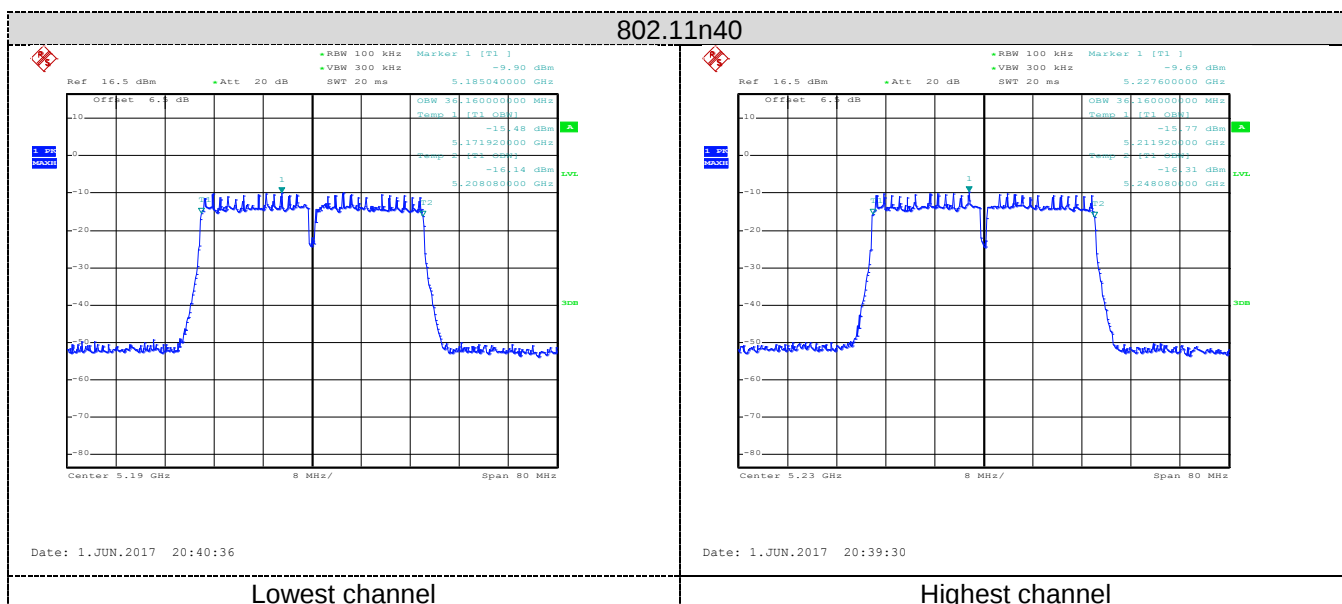


6.5 Power Spectral Density

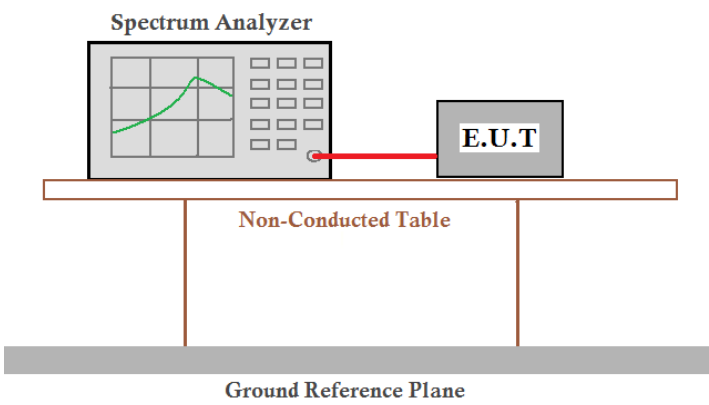Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (iv)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v01r04
Limit:	Band 1: 11 dBm/MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs that rest on a thick grey bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Band 1				
Mode	Test CH	PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	-6.28	11.00	Pass
	Middle	-6.29	11.00	Pass
	Highest	-6.67	11.00	Pass
802.11n20	Lowest	-6.28	11.00	Pass
	Middle	-6.55	11.00	Pass
	Highest	-7.02	11.00	Pass
802.11n40	Lowest	-9.43	11.00	Pass
	Highest	-9.82	11.00	Pass

Test plot as follows:

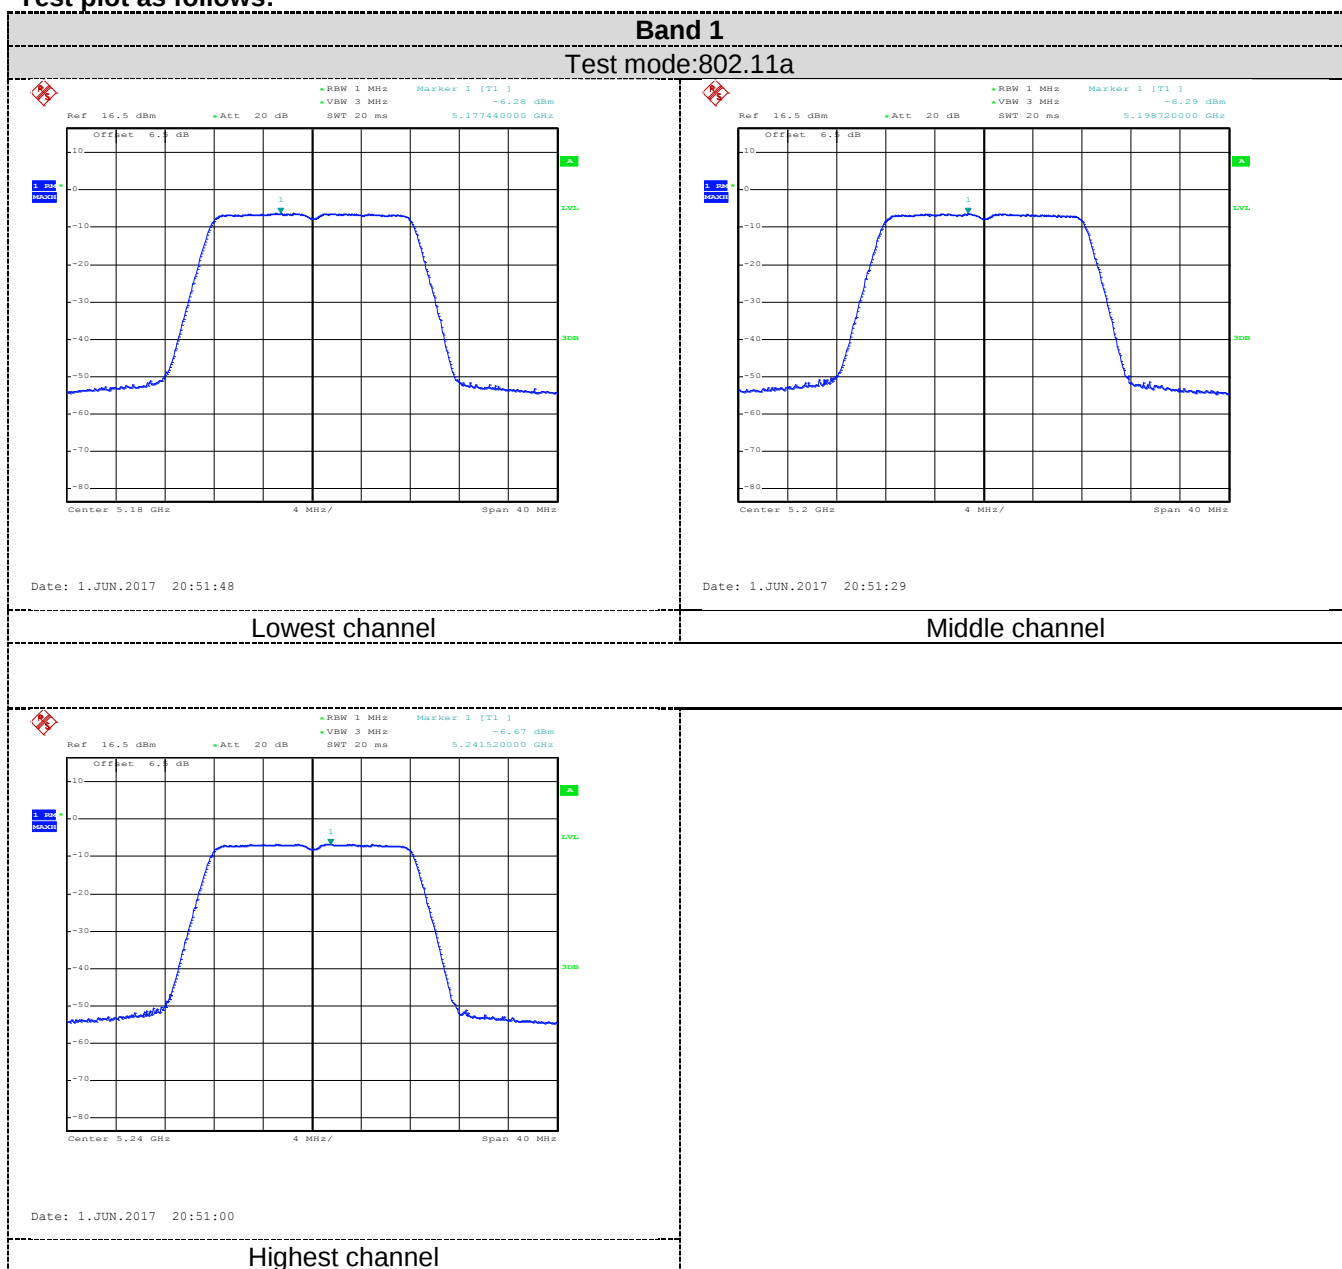


Test mode: 802.11n20

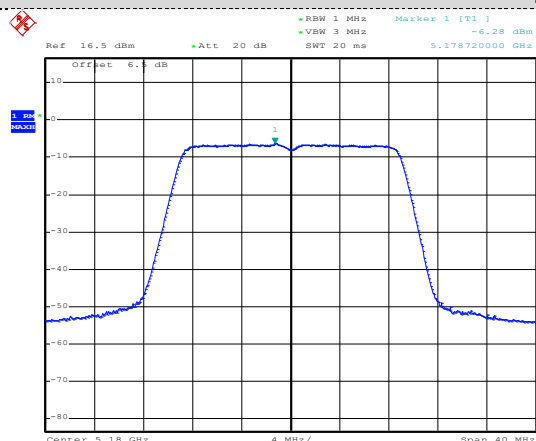


Date: 1.JUN.2017 20:52:31

Lowest channel

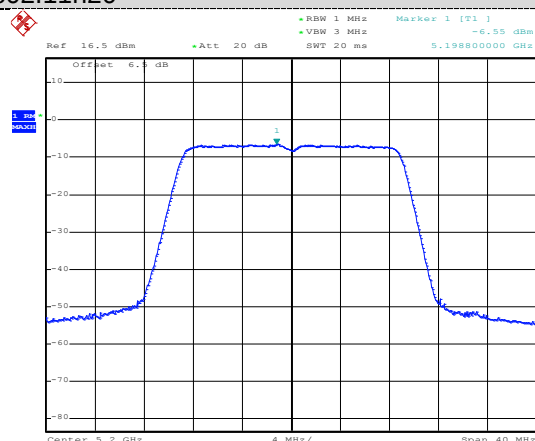


Date: 1.JUN.2017 20:52:54

Middle channel

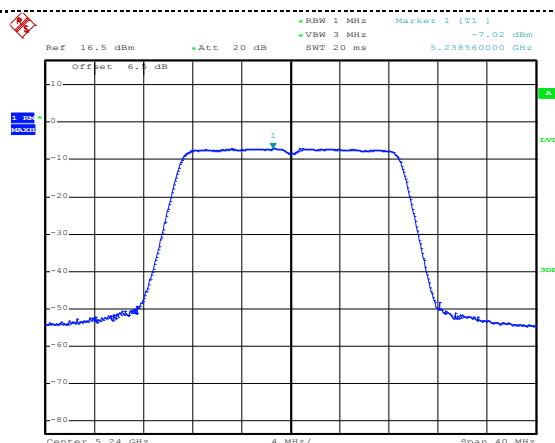


Date: 1.JUN.2017 20:53:18

Highest channel

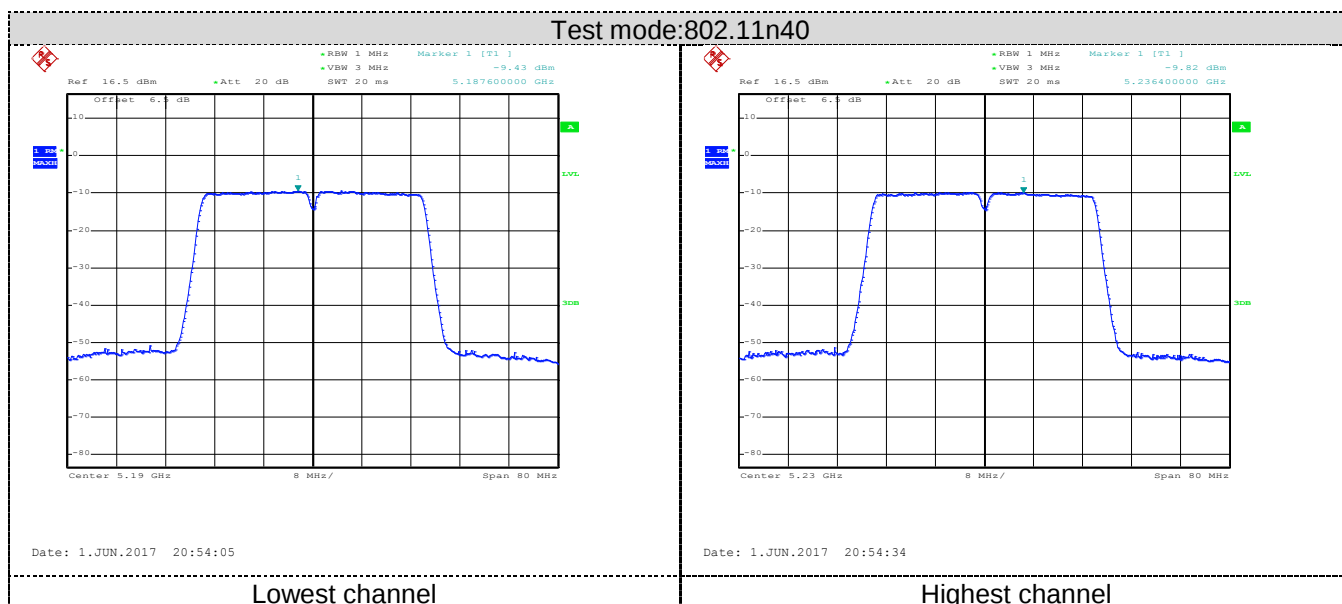

6.6 Band Edge

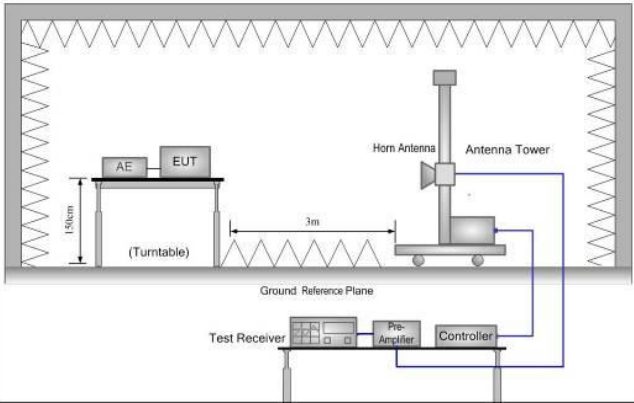Test Requirement:	FCC Part15 E Section 15.407 (b)			
Test Method:	ANSI C63.10:2013 and KDB789033 D02 General U-NII Test Procedures New Rules v01r04			
Receiver setup:	Detector	RBW	VBW	Remark
	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	RMS	1MHz	3MHz	Average Value
Limit:	Band	Limit (dBuV/m @3m)		Remark
	Band 1	68.20		Peak Value
		54.00		Average Value
	Remark:			
1. Band 1 limit: E[dBuV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m,for EIPR[dBm]=-27dBm.				
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.			
Test setup:				
Test Instruments:	Refer to section 5.7 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			

Band 1								
802.11a								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.36	36.23	7.05	41.93	43.71	68.20	-24.49	Horizontal
5150.00	41.90	36.23	7.05	41.93	43.25	68.20	-24.95	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	31.85	36.23	7.05	41.93	33.20	54.00	-20.80	Horizontal
5150.00	32.19	36.23	7.05	41.93	33.54	54.00	-20.46	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	43.85	35.37	7.11	41.89	44.44	68.20	-23.76	Horizontal
5350.00	43.16	35.37	7.11	41.89	43.75	68.20	-24.45	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	31.28	35.37	7.11	41.89	31.87	54.00	-22.13	Horizontal
5350.00	32.23	35.37	7.11	41.89	32.82	54.00	-21.18	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.30	36.23	7.05	41.93	43.65	68.20	-24.55	Horizontal
5150.00	41.85	36.23	7.05	41.93	43.20	68.20	-25.00	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	31.94	36.23	7.05	41.93	33.29	54.00	-20.71	Horizontal
5150.00	32.39	36.23	7.05	41.93	33.74	54.00	-20.26	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	43.19	35.37	7.11	41.89	43.78	68.20	-24.42	Horizontal
5350.00	42.73	35.37	7.11	41.89	43.32	68.20	-24.88	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	31.07	35.37	7.11	41.89	31.66	54.00	-22.34	Horizontal
5350.00	31.96	35.37	7.11	41.89	32.55	54.00	-21.45	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


802.11n-HT40								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.95	7.05	41.93	41.93	50.00	68.20	-18.20	Horizontal
5150.00	42.08	7.05	41.93	41.93	49.13	68.20	-19.07	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	31.57	7.05	41.93	41.93	38.62	54.00	-15.38	Horizontal
5150.00	32.09	7.05	41.93	41.93	39.14	54.00	-14.86	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	43.27	35.37	35.37	7.11	41.89	68.20	-26.31	Horizontal
5350.00	42.91	35.37	35.37	7.11	41.89	68.20	-26.31	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	32.73	35.37	7.11	41.89	33.32	54.00	-20.68	Horizontal
5350.00	32.87	35.37	7.11	41.89	33.46	54.00	-20.54	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission

6.7.1 Restricted Band

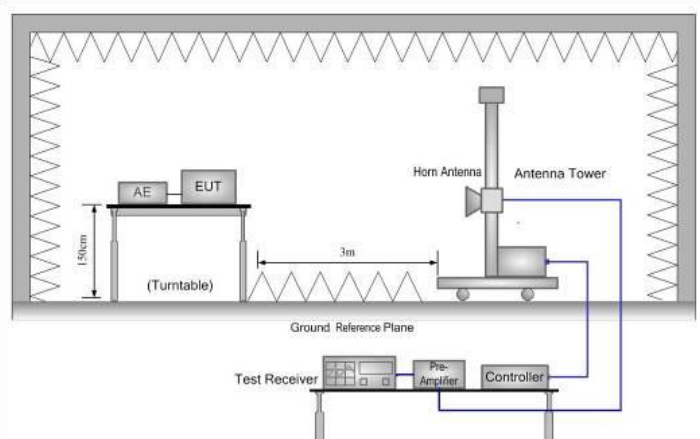Test Requirement:	FCC Part15 E Section 15.407(b)				
Test Method:	ANSI C63.10: 2013				
TestFrequencyRange:	Band 1: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		74.00		Peak Value
			54.00		Average Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.7 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

Band 1								
802.11a								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	44.36	34.50	6.80	42.05	43.61	74.00	-30.39	Horizontal
4500.00	43.80	34.50	6.80	42.05	43.05	74.00	-30.95	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	32.84	34.50	6.80	42.05	32.09	54.00	-21.91	Horizontal
4500.00	30.19	34.50	6.80	42.05	29.44	54.00	-24.56	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	42.85	34.90	7.18	41.85	43.08	74.00	-30.92	Horizontal
5460.00	43.16	34.90	7.18	41.85	43.39	74.00	-30.61	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	32.84	34.90	7.18	41.85	33.07	54.00	-20.93	Horizontal
5460.00	32.19	34.90	7.18	41.85	32.42	54.00	-21.58	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	43.96	34.50	6.80	42.05	43.21	74.00	-30.79	Horizontal
4500.00	43.15	34.50	6.80	42.05	42.40	74.00	-31.60	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	31.26	34.50	6.80	42.05	30.51	54.00	-23.49	Horizontal
4500.00	31.01	34.50	6.80	42.05	30.26	54.00	-23.74	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	42.94	34.90	7.18	41.85	43.17	74.00	-30.83	Horizontal
5460.00	43.76	34.90	7.18	41.85	43.99	74.00	-30.01	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	32.14	34.90	7.18	41.85	32.37	54.00	-21.63	Horizontal
5460.00	31.93	34.90	7.18	41.85	32.16	54.00	-21.84	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



802.11n-HT40								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	42.11	34.50	6.80	42.05	41.36	74.00	-32.64	Horizontal
4500.00	43.08	34.50	6.80	42.05	42.33	74.00	-31.67	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	32.84	34.50	6.80	42.05	32.09	54.00	-21.91	Horizontal
4500.00	31.17	34.50	6.80	42.05	30.42	54.00	-23.58	Vertical
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	42.74	34.90	7.18	41.85	42.97	74.00	-31.03	Horizontal
5460.00	43.17	34.90	7.18	41.85	43.40	74.00	-30.60	Vertical
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	32.14	34.90	7.18	41.85	32.37	54.00	-21.63	Horizontal
5460.00	32.08	34.90	7.18	41.85	32.31	54.00	-21.69	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.7.2 Unwanted Emissions out of the Restricted Bands

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
TestFrequencyRange:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Frequency		Limit (dBm/MHz)		Remark
	Above 1GHz		68.20		Peak Value
			54.00		Average Value
	Remark: 1. Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2=68.2 \text{ dBuV/m}$,for $EIPR[dBm]=-27dBm$.				
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.				

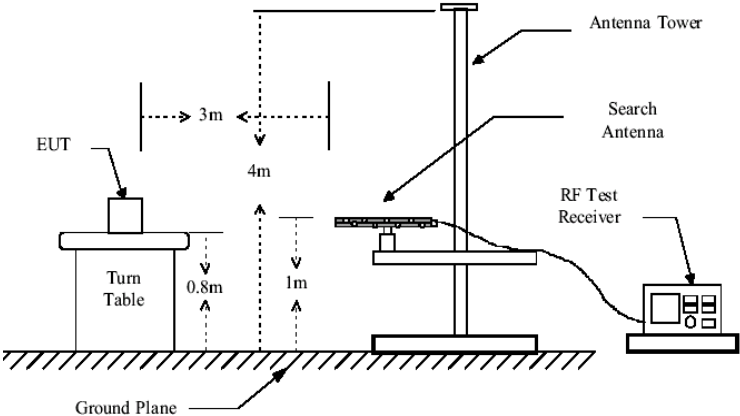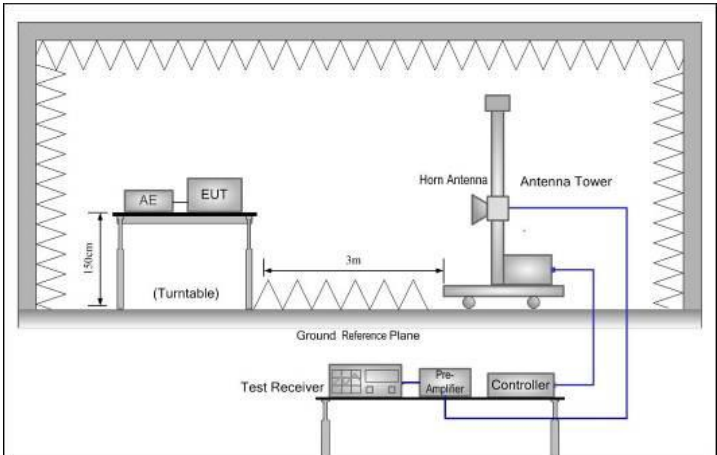Test setup:	Below 1GHz  Above 1GHz 
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Below 1GHz


Test Polarization: Horizontal

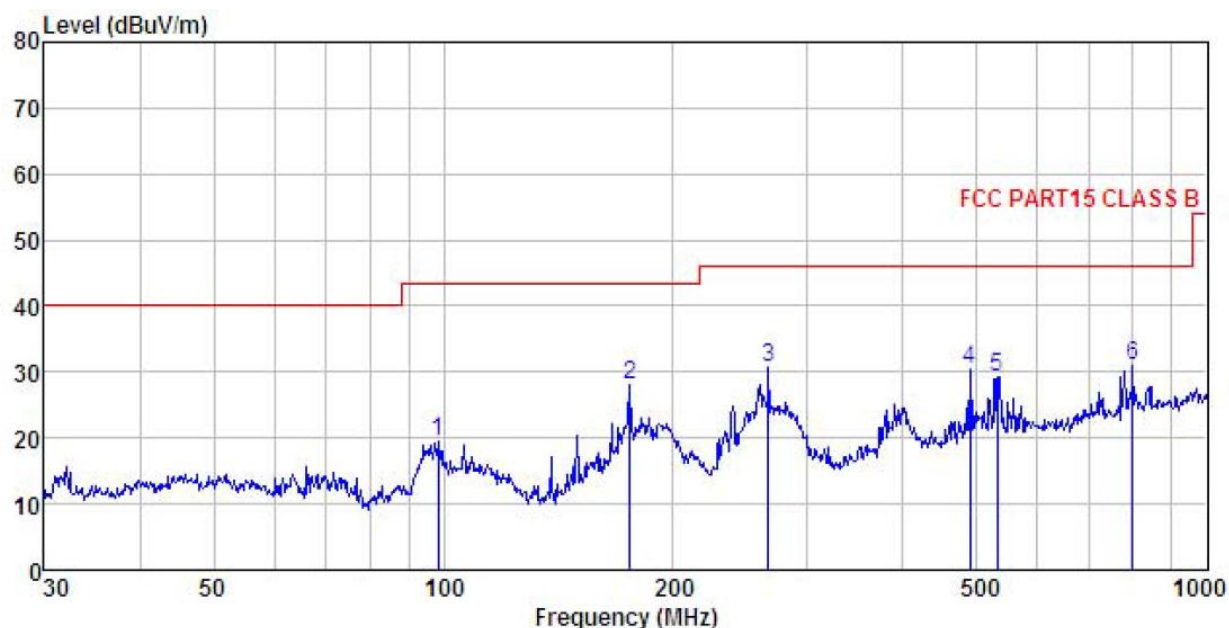

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) HORIZONTAL
EUT : Tablet PC
Model : Aprix Tab8ii
Test mode : 5G WIFI Mode
Power Rating : AC120V/60Hz
Environment : Temp:25.5°C Humi:55% 101KPa
Test Engineer: Yaro
REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB			dB	
1	98.487	35.22	11.93	1.97	29.54	19.58	43.50	-23.92	QP
2	175.652	45.02	9.30	2.70	29.01	28.01	43.50	-15.49	QP
3	266.609	44.02	12.47	2.85	28.51	30.83	46.00	-15.17	QP
4	489.027	39.61	16.15	3.53	28.93	30.36	46.00	-15.64	QP
5	531.964	37.75	16.82	3.79	29.05	29.31	46.00	-16.69	QP
6	798.980	35.24	19.51	4.35	28.20	30.90	46.00	-15.10	QP

Test Polarization: Vertical

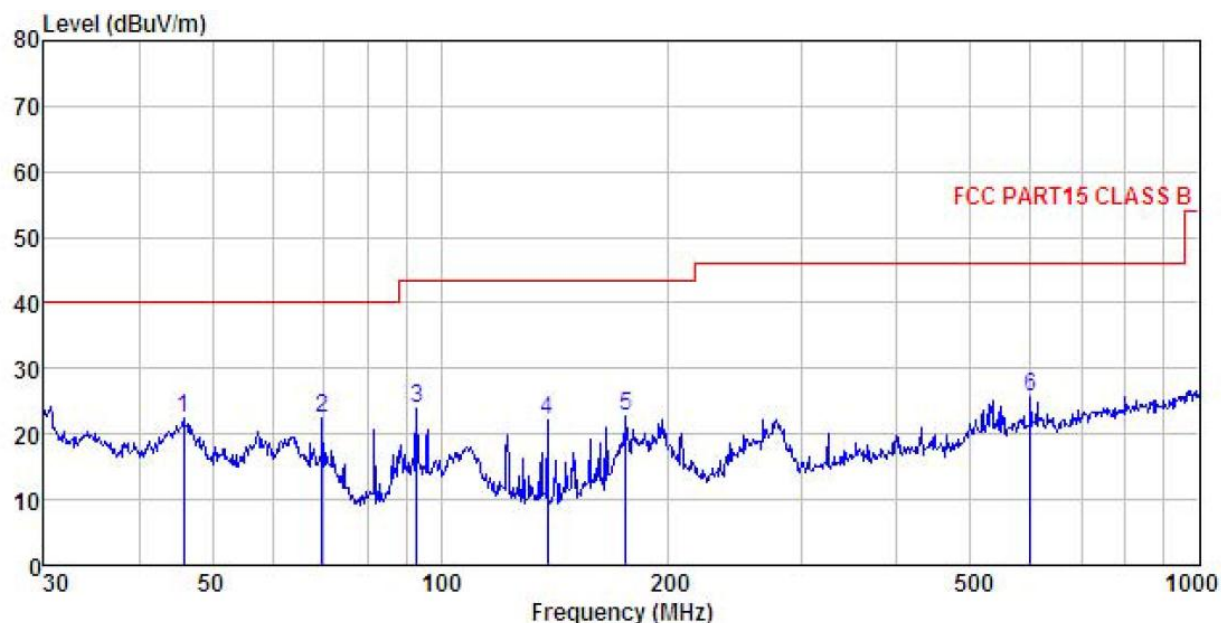

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) VERTICAL
 EUT : Tablet PC
 Model : Aprix Tab8ii
 Test mode : 5G WIFI Mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: Yaro
 REMARK :

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	45.855	36.46	14.40	1.29	29.85	22.30	40.00	-17.70 QP
2	69.845	40.33	10.20	1.52	29.72	22.33	40.00	-17.67 QP
3	93.113	40.25	11.13	2.02	29.56	23.84	43.50	-19.66 QP
4	138.387	40.72	8.36	2.38	29.28	22.18	43.50	-21.32 QP
5	175.652	39.61	9.30	2.70	29.01	22.60	43.50	-20.90 QP
6	599.321	32.06	18.50	3.94	28.94	25.56	46.00	-20.44 QP

Above 1GHz								
Band 1								
802.11a mode								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	49.31	40.10	9.82	41.97	57.26	68.20	-10.94	Vertical
10360.00	48.94	40.10	9.82	41.97	56.89	68.20	-11.31	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	39.27	40.10	9.82	41.97	47.22	54.00	-6.78	Vertical
10360.00	38.61	40.10	9.82	41.97	46.56	54.00	-7.44	Horizontal
Test channel: Middle channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	49.61	40.00	9.85	41.95	57.51	68.20	-10.69	Vertical
10400.00	49.06	40.00	9.85	41.95	56.96	68.20	-11.24	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	39.26	40.00	9.85	41.95	47.16	54.00	-6.84	Vertical
10400.00	41.36	40.00	9.85	41.95	49.26	54.00	-4.74	Horizontal
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	50.26	39.70	9.96	41.88	58.04	68.20	-10.16	Vertical
10480.00	49.27	39.70	9.96	41.88	57.05	68.20	-11.15	Horizontal
802.11a mode Highest channel (AverageValue)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	41.36	39.70	9.96	41.88	49.14	54.00	-4.86	Vertical
10480.00	41.07	39.70	9.96	41.88	48.85	54.00	-5.15	Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	49.00	40.10	9.82	41.97	56.95	68.20	-11.25	Vertical
10360.00	48.63	40.10	9.82	41.97	56.58	68.20	-11.62	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	39.97	40.10	9.82	41.97	47.92	54.00	-6.08	Vertical
10360.00	38.16	40.10	9.82	41.97	46.11	54.00	-7.89	Horizontal
Test channel: Middle channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	49.07	40.00	9.85	41.95	56.97	68.20	-11.23	Vertical
10400.00	49.36	40.00	9.85	41.95	57.26	68.20	-10.94	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	39.84	40.00	9.85	41.95	47.74	54.00	-6.26	Vertical
10400.00	41.37	40.00	9.85	41.95	49.27	54.00	-4.73	Horizontal
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	50.31	39.70	9.96	41.88	58.09	68.20	-10.11	Vertical
10480.00	49.36	39.70	9.96	41.88	57.14	68.20	-11.06	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	41.27	39.70	9.96	41.88	49.05	54.00	-4.95	Vertical
10480.00	41.16	39.70	9.96	41.88	48.94	54.00	-5.06	Horizontal

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n40 mode								
Test channel: Lowest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	49.36	40.00	9.85	41.95	57.26	68.20	-10.94	Vertical
10380.00	48.83	40.00	9.85	41.95	56.73	68.20	-11.47	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	38.26	40.00	9.85	41.95	46.16	54.00	-7.84	Vertical
10380.00	39.09	40.00	9.85	41.95	46.99	54.00	-7.01	Horizontal
Test channel: Highest channel								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	49.30	39.80	9.92	41.90	57.12	68.20	-11.08	Vertical
10460.00	49.15	39.80	9.92	41.90	56.97	68.20	-11.23	Horizontal
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	39.95	39.80	9.92	41.90	47.77	54.00	-6.23	Vertical
10460.00	40.09	39.80	9.92	41.90	47.91	54.00	-6.09	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplicifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.8 Frequency stability

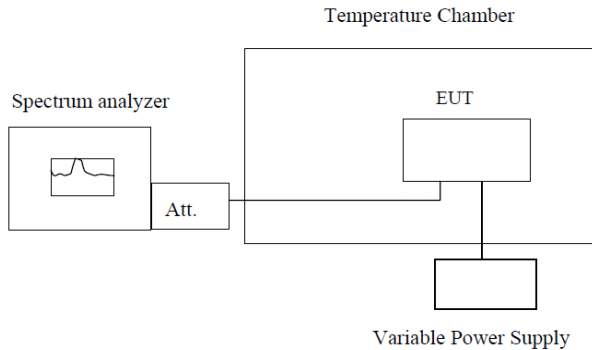Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Band 1:

Voltage vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(dc)		
20	4.37V	5179.996321	0.71
	3.80V	5179.974802	4.86
	3.23V	5179.938411	11.89

Temperature vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(dc)	Temp(°C)		
3.80V	-20	5179.987023	2.51
	-10	5179.948403	9.96
	0	5179.978029	4.24
	10	5179.948903	9.86
	20	5179.905612	18.22
	30	5179.931268	13.27
	40	5179.998104	0.37
	50	5179.963281	7.09