


1.2.1 WWAN Antenna Test Environment

The RF anechoic chamber must be lined with absorptive material rated at a minimum frequency range from 700 MHz to 3 GHz.

1.2.2 WLAN Antenna Test Environment

The RF anechoic chamber must be lined with absorptive material rated at a minimum frequency range from 2 GHz to 7 GHz.




1.2.3 Test Conditions

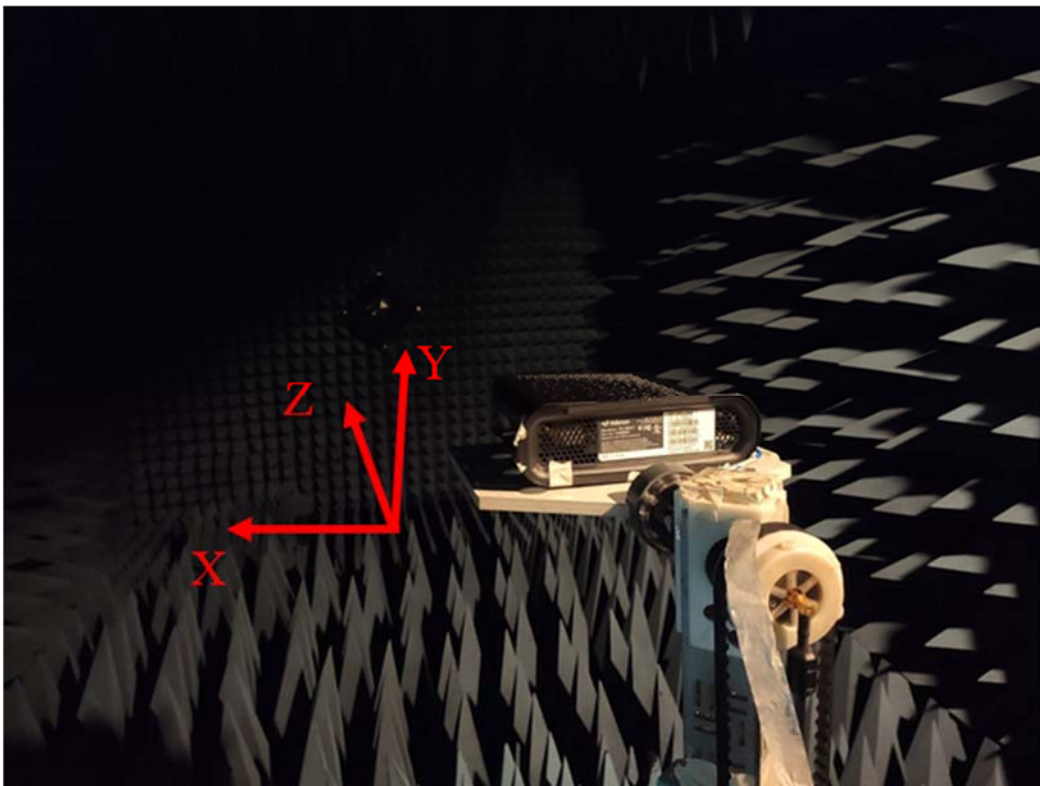

Project Name : coda5834	Author : Wippen	File Name : 3930000306E6(F-0Q-49-6003-001-00)
Date : 2022.06.14	Check : Eison	
Rev : A		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		

1.4 Antenna Drawing

Antenna Type	Dipole
--------------	--------

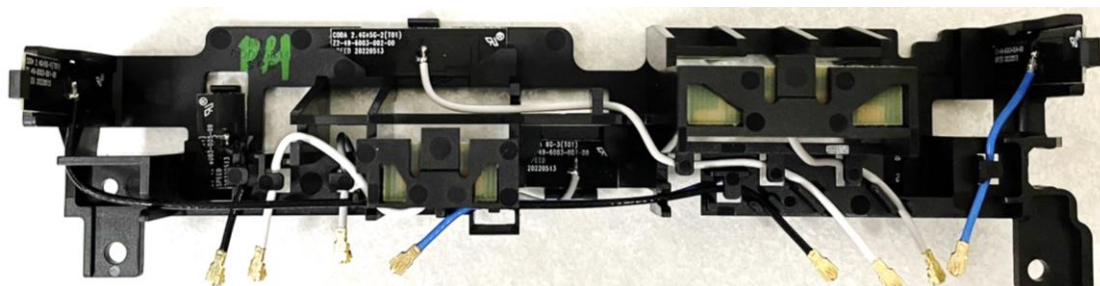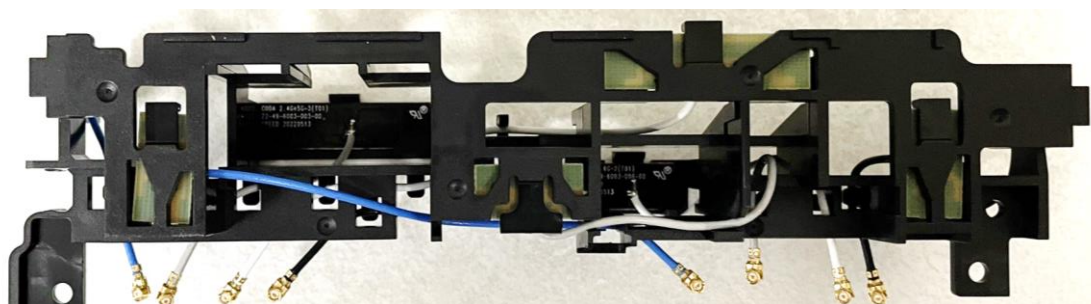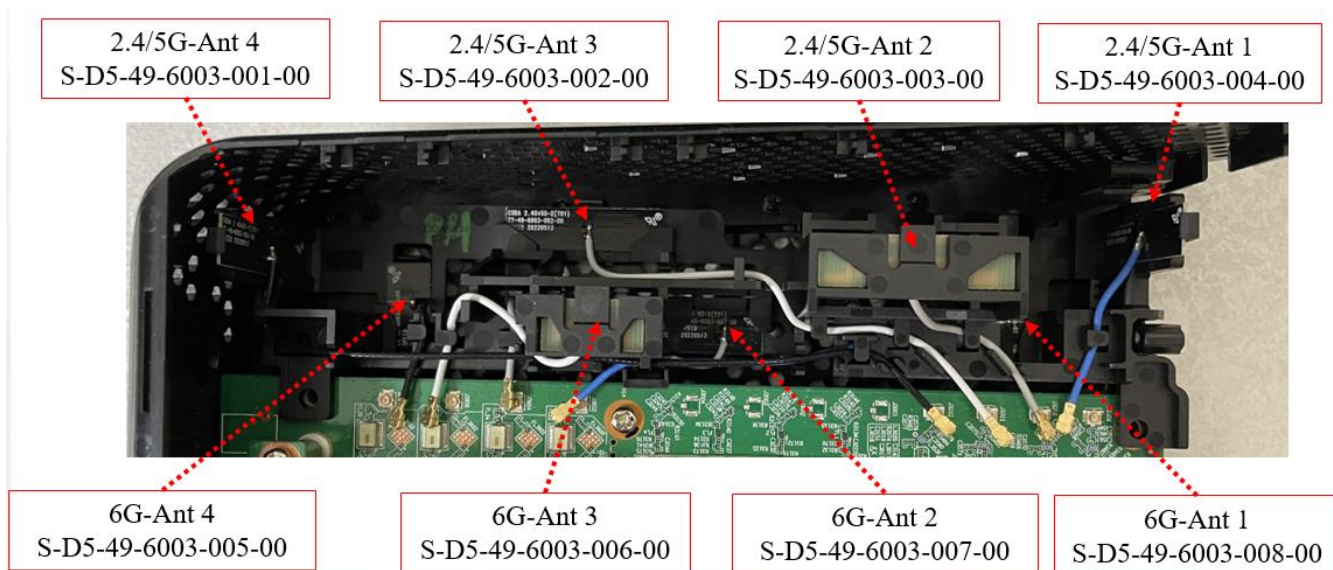

Project Name : coda5834	Author : Wippen	File Name : 3930000306E6(F-0Q-49-6003-001-00)
Date : 2022.06.14	Check : Eison	
Rev : A		
HuiZhou Speed Wireless Technology CO., LTD. / Taiwan Speed Wireless Technology Co., LTD.		