

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

Lifespan Brands LLC

1200 Thorndale Ave Elk Grove Village

Product Name:	Bluetooth Connected Body Fat Scale
Model/Type No.:	D303, D304,D330,D307,D331,D308
Trade Name:	iConnect by DETECTO
FCC ID:	2AHM2-D303
Prepared By:	Shenzhen Hongcai Testing Technology Co., Ltd. 1st-3rd Floor, Building C, Shuanghuan Xin Yi Dai Hi-Tech Industrial Park, No.8 Baoqing Road, Baolong Industrial Zone, Longgang District, Shenzhen, Guangdong, China Tel: +86-755-86337020 Fax: +86-755-86337028
Report Number:	HCT16CR062E
Tested Date:	March 15 ~ 28, 2016
Issued Date:	March 29, 2016
Tested By:	John.Zeng/


Reviewed By:



Owen.Yang

EMC Technical Supervisor

Approved By:



Tony Wu

EMC Technical Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY	5
1.3 TEST FACILITY	5
FCC – REGISTRATION No.: 970318	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 GENERAL TEST PROCEDURES	6
2.4 MEASUREMENT UNCERTAINTY	6
2.5 MEASURE RESULTS EXPLANATION EXAMPLE	7
2.6 LIST OF MEASURING EQUIPMENTS USED	8
3. SUMMARY OF TEST RESULTS	8
4. TEST OF AC POWER LINE CONDUCTED EMISSION.....	9
4.1 APPLICABLE STANDARD	9
4.2 TEST SETUP DIAGRAM	9
4.3 TEST RESULT	9
5. TEST OF HOPPING CHANNEL BANDWIDTH	10
5.1 APPLICABLE STANDARD	10
5.2 EUT SETUP	10
5.3 TEST EQUIPMENT LIST AND DETAILS	10
5.4 TEST PROCEDURE	10
5.5 TEST RESULT	11
6. TEST OF HOPPING CHANNEL SEPARATION.....	13
6.1 APPLICABLE STANDARD	13
6.2 EUT SETUP	13
6.3 TEST EQUIPMENT LIST AND DETAILS	13
6.4 TEST PROCEDURE	13
6.5 TEST RESULT	14
7. TEST OF NUMBER OF HOPPING FREQUENCY	16
7.1 APPLICABLE STANDARD	16
7.2 EUT SETUP	16
7.3 TEST EQUIPMENT LIST AND DETAILS	16
7.4 TEST PROCEDURE	16
7.5 TEST RESULT	17
8. TEST OF DWELL TIME OF EACH FREQUENCY	18
8.1 APPLICABLE STANDARD	18
8.2 EUT SETUP	18
8.3 TEST EQUIPMENT LIST AND DETAILS	18
8.4 TEST PROCEDURE	18
8.5 TEST RESULT	19
9. TEST OF MAXIMUM PEAK OUTPUT POWER	21
9.1 APPLICABLE STANDARD	21
9.2 EUT SETUP	21
9.3 TEST EQUIPMENT LIST AND DETAILS	21
9.4 TEST PROCEDURE	21
9.5 TEST RESULT	21
10. TEST OF BAND EDGES EMISSION	24
10.1 APPLICABLE STANDARD	24
10.2 EUT SETUP	24
10.3 TEST EQUIPMENT LIST AND DETAILS	24

10.4 TEST PROCEDURE	24
10.5 TEST RESULT	26
11. TEST OF SPURIOUS RADIATED EMISSION	29
11.1 APPLICABLE STANDARD	29
11.1.2 LIMITS	29
11.2 EUT SETUP	29
11.3 TEST EQUIPMENT LIST AND DETAILS	30
11.4 TEST PROCEDURE	30
11.5 TEST RESULT	31
12. ANTENNA REQUIREMENT	45
12.1 STANDARD APPLICABLE	45
12.2 ANTENNA CONNECTED CONSTRUCTION	45



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Lifespan Brands LLC
Address of applicant:	1200 Thorndale Ave Elk Grove Village
Manufacturer :	Cha's Electronic Industries(Shenzhen)Co.,Ltd
Address of applicant:	Danzhutou Ind.District,Buji,Shenzhen,China

General Description of E.U.T

Items	Description
EUT Description:	Bluetooth Connected Body Fat Scale
Model No.:	D303
Supplementary ModelNo.:	D304,D330,D307,D331,D308
Trade Name:	iConnect by DETECTO
Frequency Band:	2402~2480MHz
Channel Spacing:	2 MHz
Number of Channels:	40
Type of Modulation:	GFSK
Antenna Gain	2.5dBi
Antenna Type:	PCB Antenna
Rated Voltage:	DC4.5V from battery

Remark:* The detail difference for application is as below:

1. D303 and D304 are with same shape glass platform, just one with stainless electrode, the other with ITO electrode.
2. D331 and D308 are with same shape wide and round corner glass platform, just one with stainless electrode, the other with ITO electrode..
3. D330 and D307 are with same shape wide and square corner glass platform, just one with stainless electrode, the other with ITO electrode..
4. The PCBA and software of all above models are the same.

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test.

1.2 Related Submittal(s) / Grant (s) and Test Methodology

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China. There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

HONGCAI TESTING

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the table, which is 0.8 m above ground plane According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10-2013.

2.4 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Transmitter power conducted	+/- 0.57 dB
Transmitter power Radiated	+/- 2.20 dB
Conducted spurious emission 9KHz-40 GHz	+/- 2.20 dB
Power Line Conducted Emission	+/- 3.20 dB
Radiated Emission	+/- 4.32 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.5 Measure Results Explanation Example




For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable less and attenuator factor.
Offset= RF cable less+ attenuator factor.

Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Equipment	Manufacturer	Model No.	Frequency range(GHz)	Attenuation values(dBm)
Line	Zhenjiang south electronic	RG316	1-12	0.08
Connector	Zhenjiang south electronic	SMA-K/N-J	1-12	0.01

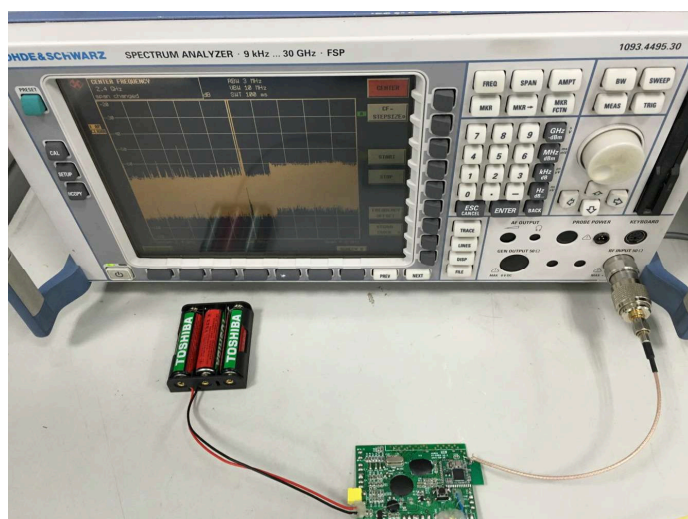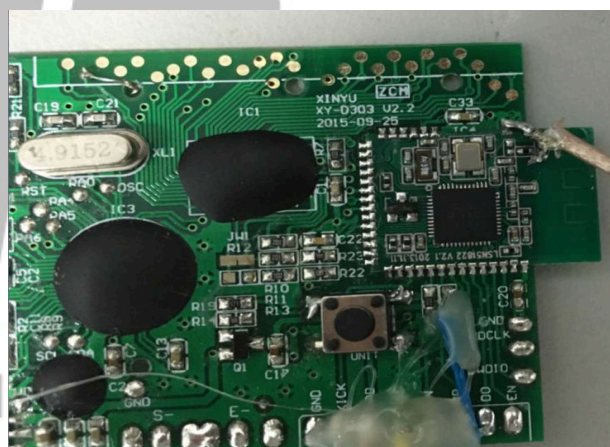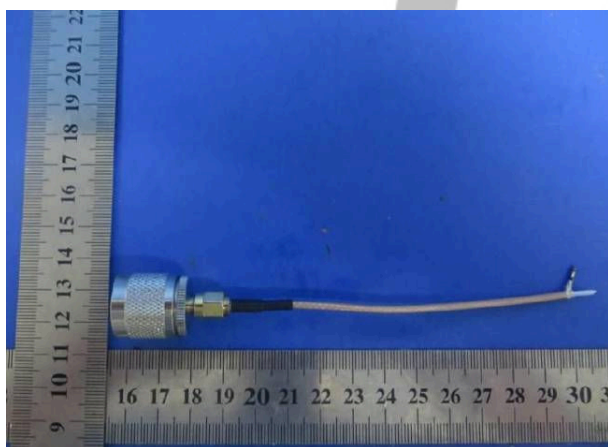

2.6 List of Measuring Equipments Used

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calibration	Due Calibration
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2015-4-25	2016-4-24
2	BCT-EMC002	EMI Test Receiver	R&S	ES PI	100097	2015-11-1	2016-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2015-4-25	2016-4-24
4	BCT-EMC018	TRILOGBroadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2015-4-25	2016-4-24
5	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2015-11-1	2016-10-31
6	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2015-4-25	2016-4-24
7	BCT-EMC029	6dB Attenuator	FRANKONIA	N/A	1001698	2015-4-25	2016-4-24
8	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2015-4-25	2016-4-24
9	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2015-11-1	2016-10-31
10	BCT-EMC037	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2015-4-25	2016-4-24
11	BCT-EMC039	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2015-4-25	2016-4-24
12	BCT-EMC038	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2015-4-5	2016-4-4
13	BCT-EMC050	Pulse power sensor	Anritsu	MA2411B	110553	2015-11-1	2016-10-31
14	BCT-EMC050	Power Meter	Anritsu	ML2487B	100345	2015-11-1	2016-10-31

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	N/A
FCC §15.247(a)(1)	Hopping Channel Bandwidth	Pass
FCC §15.247(a)(1)	Hopping Channel Separation	Pass
FCC §15.247(a)(1)	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1)	Maximum Peak Output Power	Pass
FCC §15.247(d)	Band Edges Emission	Pass
FCC §15.247(d)	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

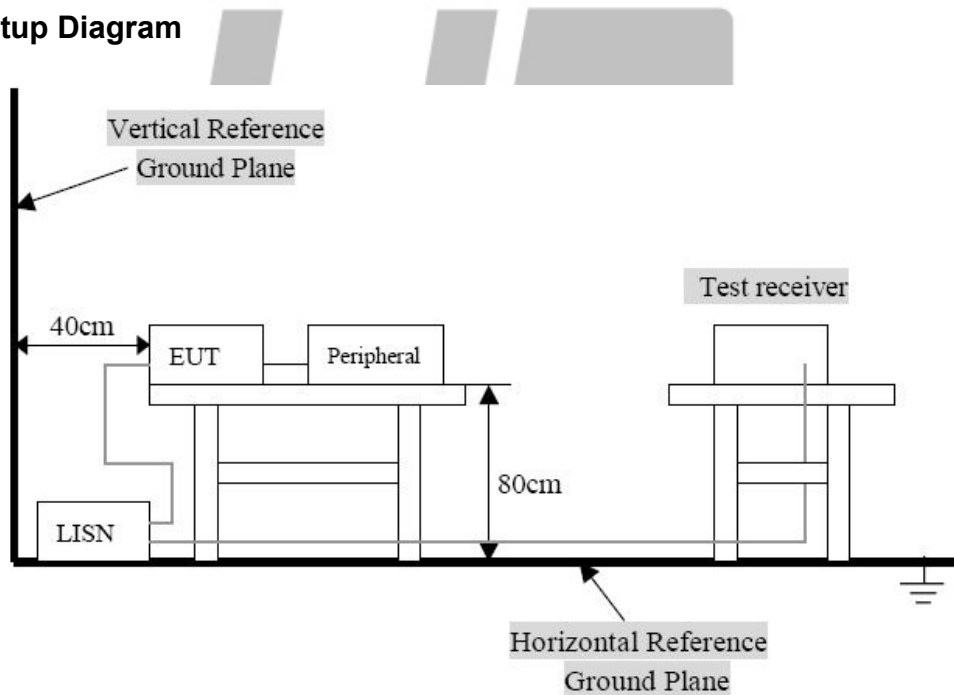

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Test Result

Not applicable.


The EUT is powered by battery.

5. Test of Hopping Channel Bandwidth

5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2 EUT Setup

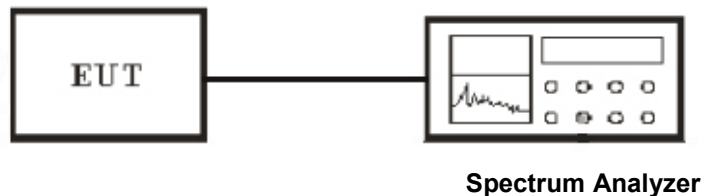

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure

1. Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = Auto

Detector function = peak

Trace = max hold


2. The spectrum width with level higher than 20dB below the peak level.
3. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.5 Test Result


Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
GFSK	Low	2402	124
GFSK	Middle	2440	200
GFSK	High	2480	192


Channel Low:

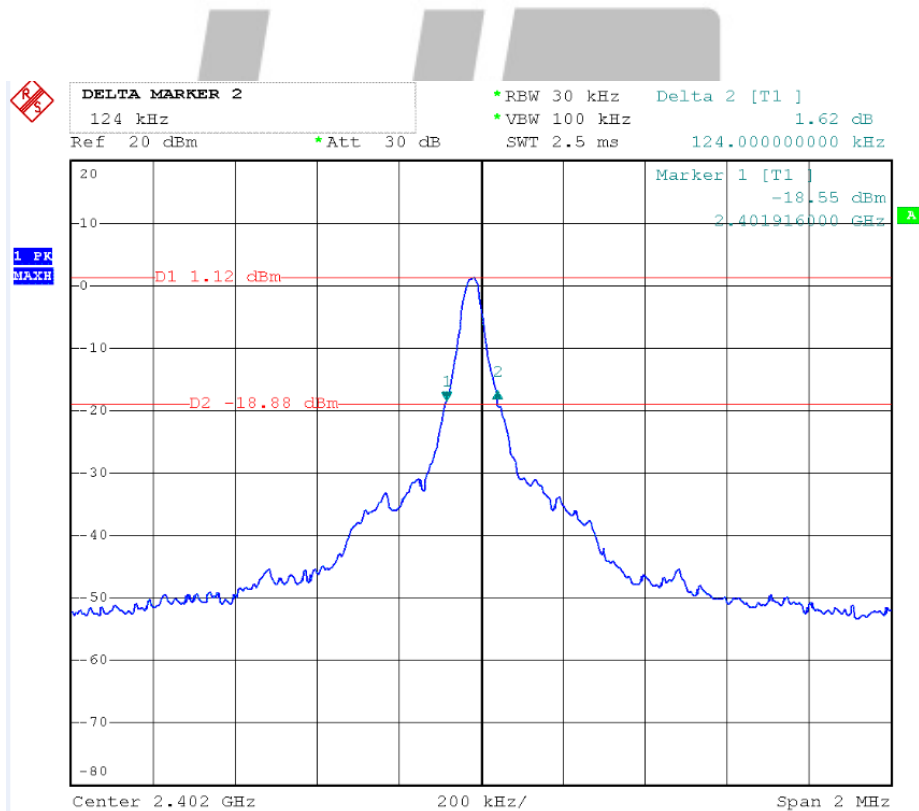

Channel Middle:

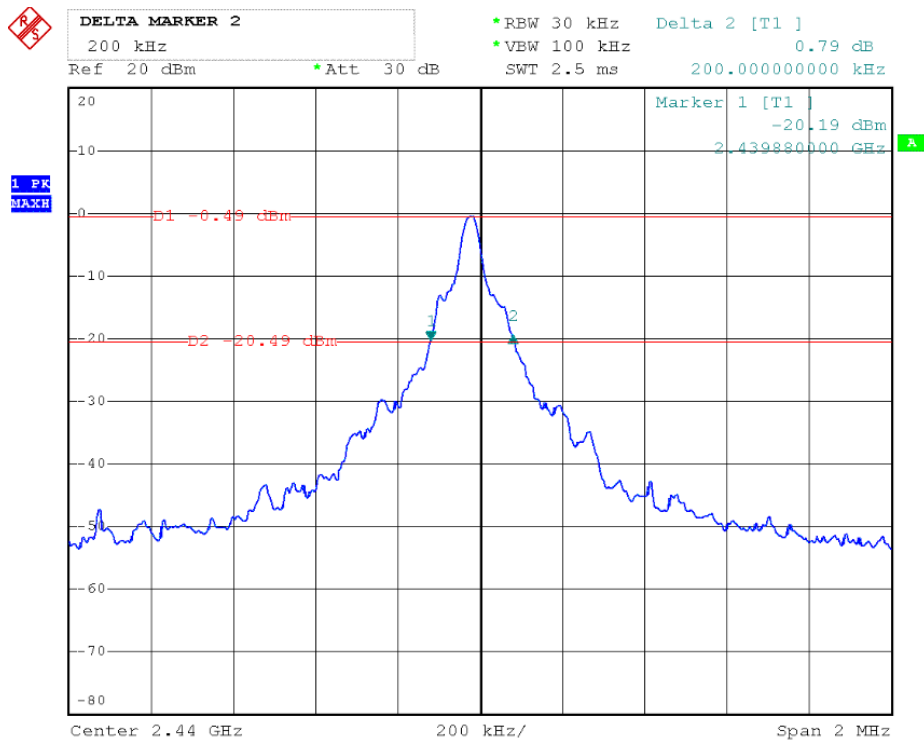

Channel High:

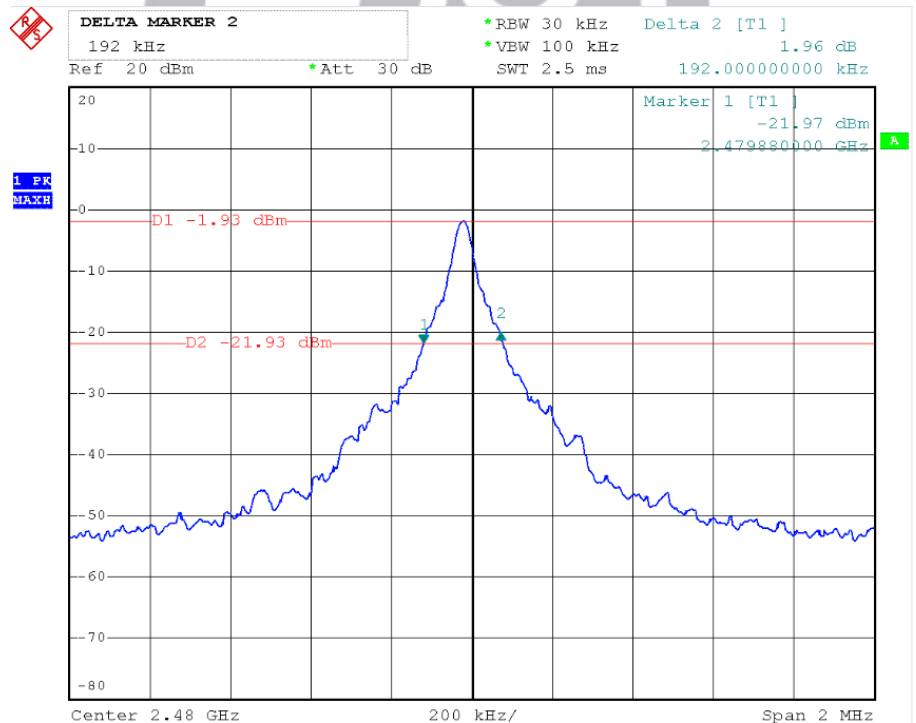


6. Test of Hopping Channel Separation

6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2 EUT Setup

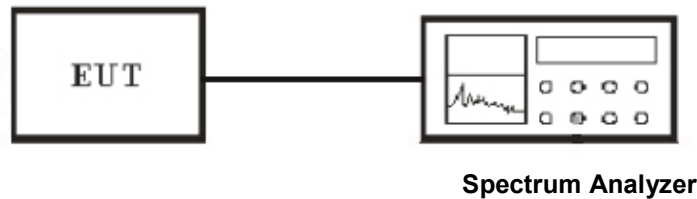

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

1. The EUT must have its hopping function enabled.
2. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.

5. Repeat above 1~3 points for the middle and highest channel of the EUT.


6.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode


Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
GFSK	2401.5~2403.5	2.004	>82.7
GFSK	2440.5~2442.5	2.004	>133.3
GFSK	2478.5~2480.5	2.004	>128

Test plot as follows:


Channel Low:

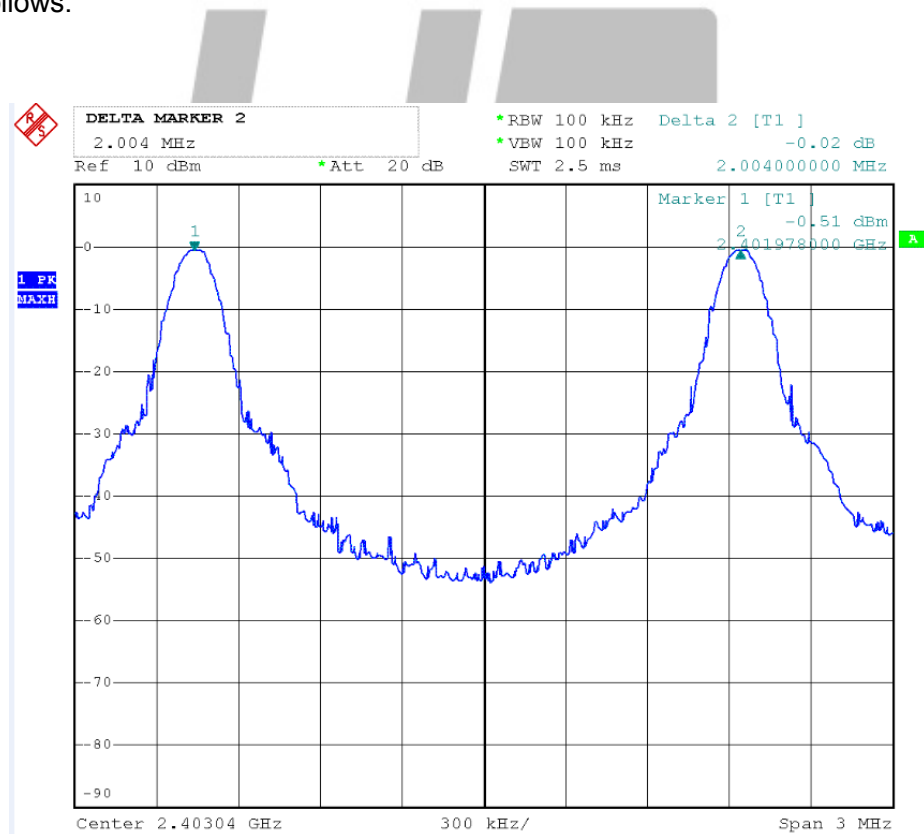

Channel Middle:

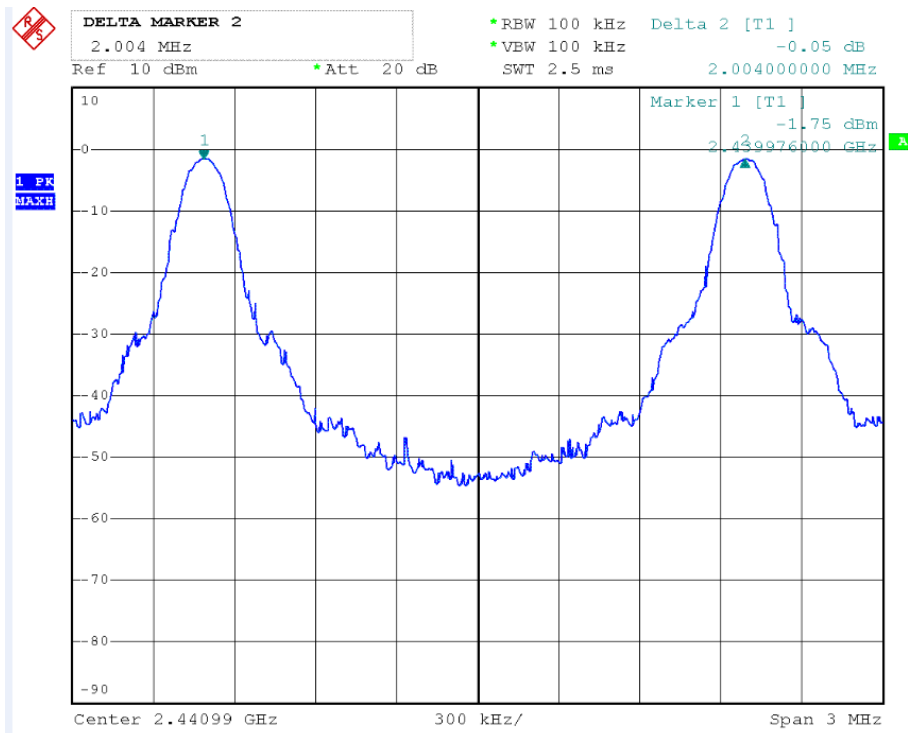

Channel High:

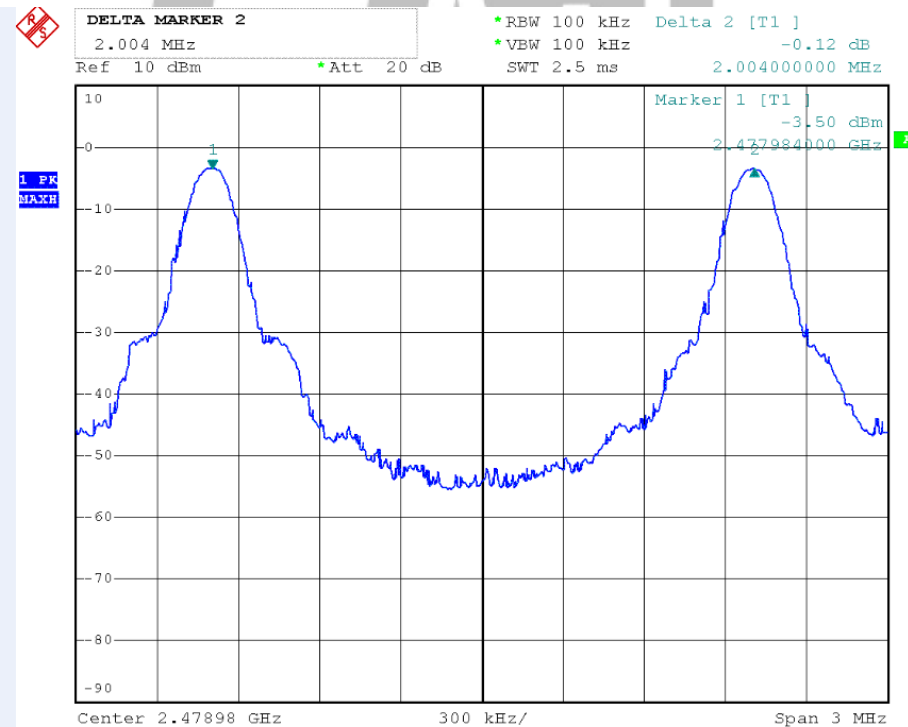


7. Test of Number of Hopping Frequency

7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

7.2 EUT Setup

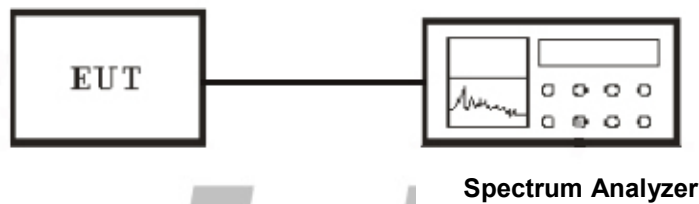

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure


1. The EUT must have its hopping function enabled.
2. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - $RBW \geq 1\%$ of the span
 - $VBW \geq RBW$
 - Sweep = Auto
 - Detector function = peak
 - Trace = max hold
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
GFSK	2402~2480	40	≥15

Test plot as follow:

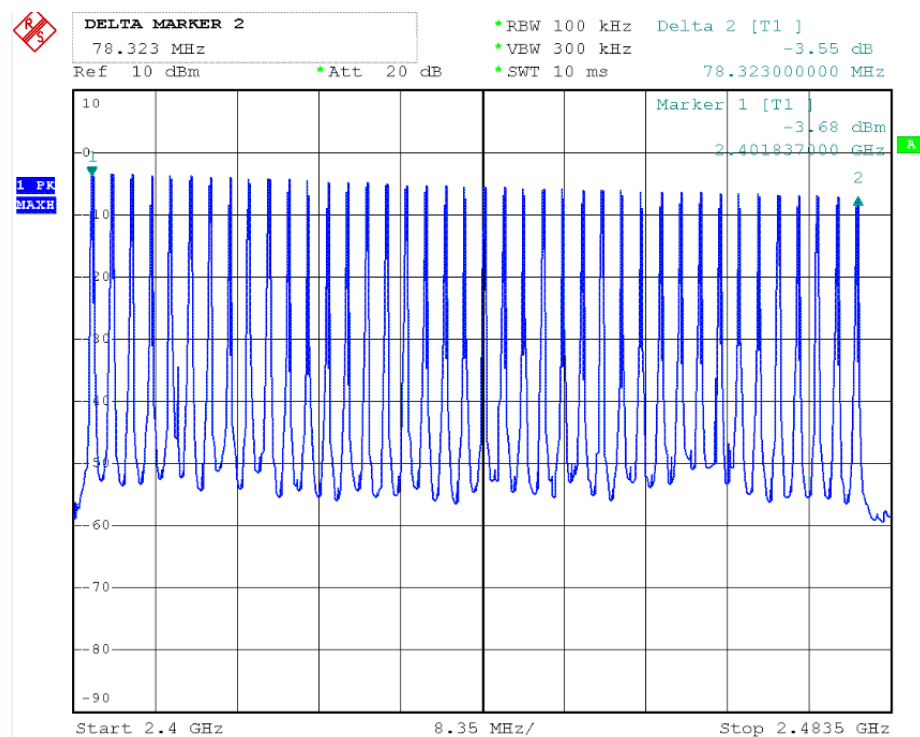


8. Test of Dwell Time of Each Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

8.2 EUT Setup

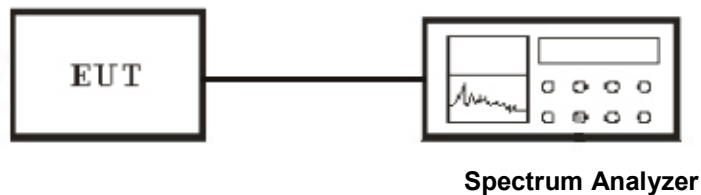

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

1. The EUT must have its hopping function enabled.
2. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

3. Measure the maximum time duration of one single pulse.

8.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	113.6	400	Pass
GFSK	DH3	89.6	400	Pass
GFSK	DH5	37.3	400	Pass

Note:


- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- for DH1:Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 40) × 16
 $= 355 \times 10^{-3} \times (1600 \div 2 \div 40) \times 16 = 113.6\text{ms}$

for DH3:Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 40) × 16
 $= 560 \times 10^{-3} \times (1600 \div 4 \div 40) \times 16 = 89.6\text{ms}$


for DH5:Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 40) × 16
 $= 350 \times 10^{-3} \times (1600 \div 6 \div 40) \times 16 = 37.3\text{ms}$

Test plot as follows:


DH1:

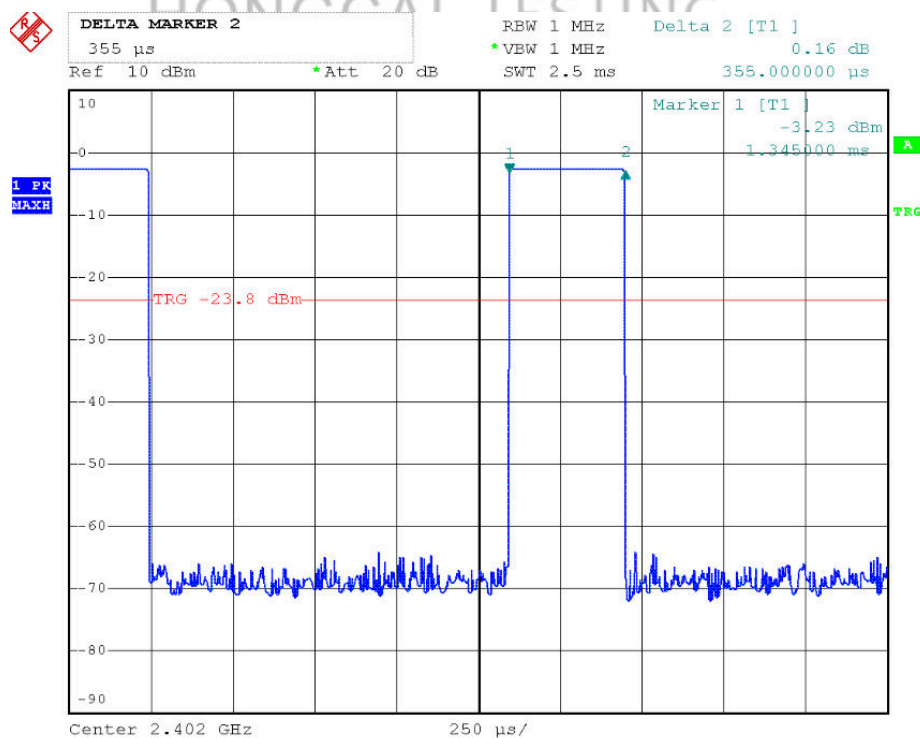

DH3:

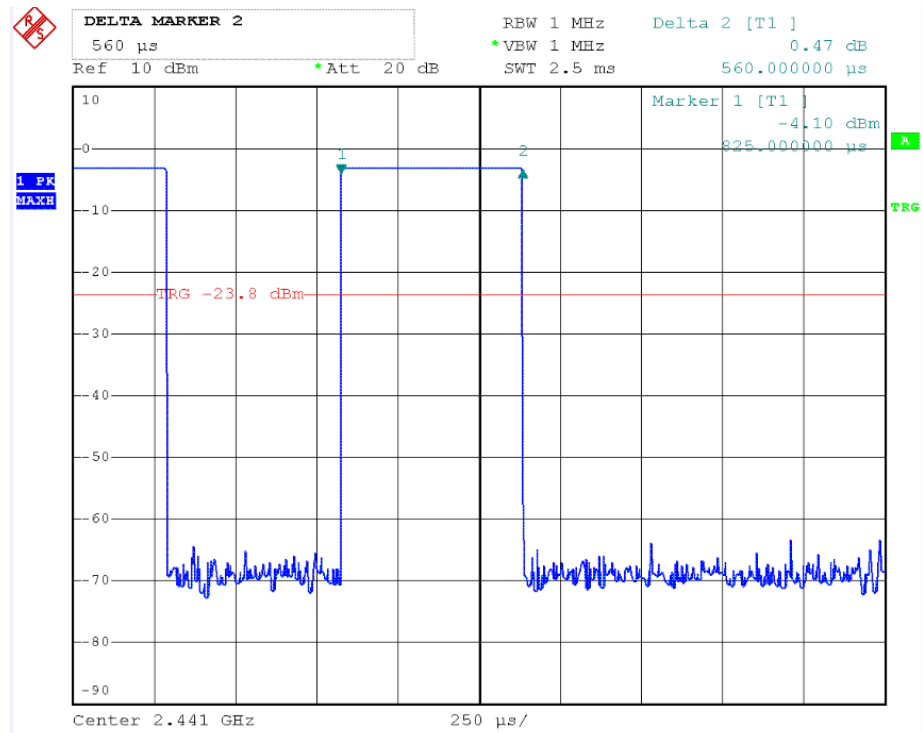

DH5:

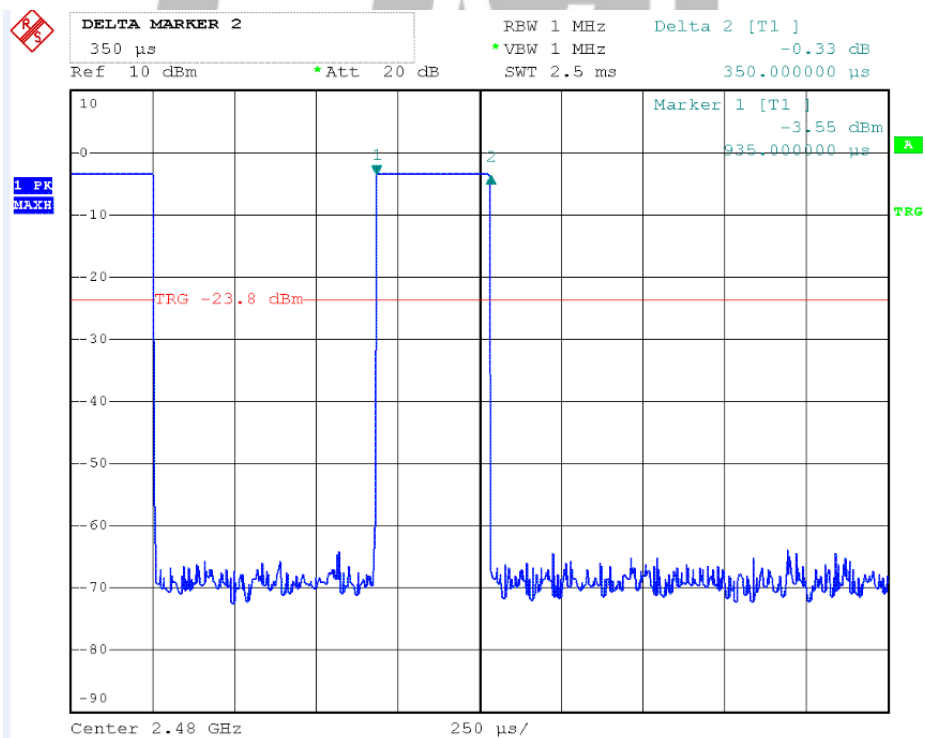

9. Test of Maximum Peak Output Power

9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

9.2 EUT Setup



9.3 Test Equipment List and Details

See section 2.5.

9.4 Test Procedure

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.


9.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode


Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
GFSK	Low	2402	-0.44	21	Pass
GFSK	Middle	2440	-2.04	21	Pass
GFSK	High	2480	-3.59	21	Pass

Test plot as follows:


Channel Low:

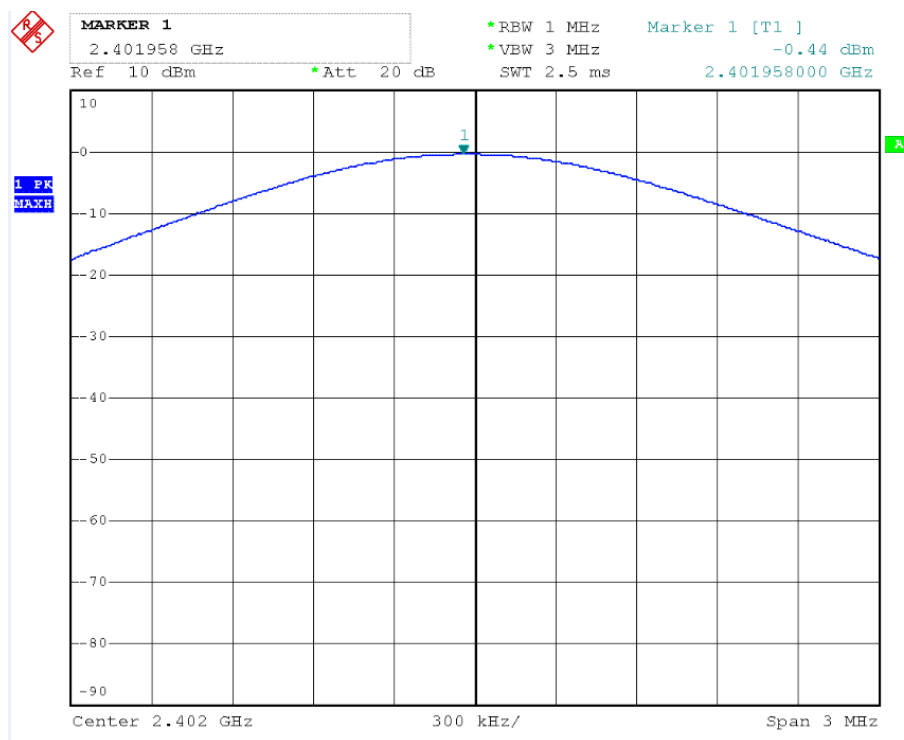

Channel Middle:

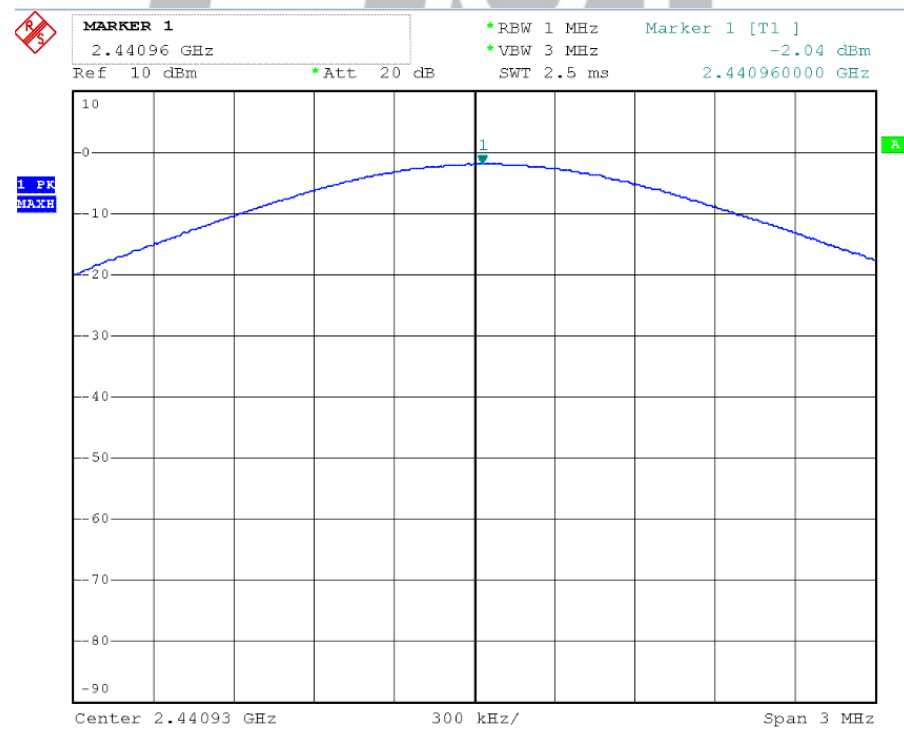

Channel High:

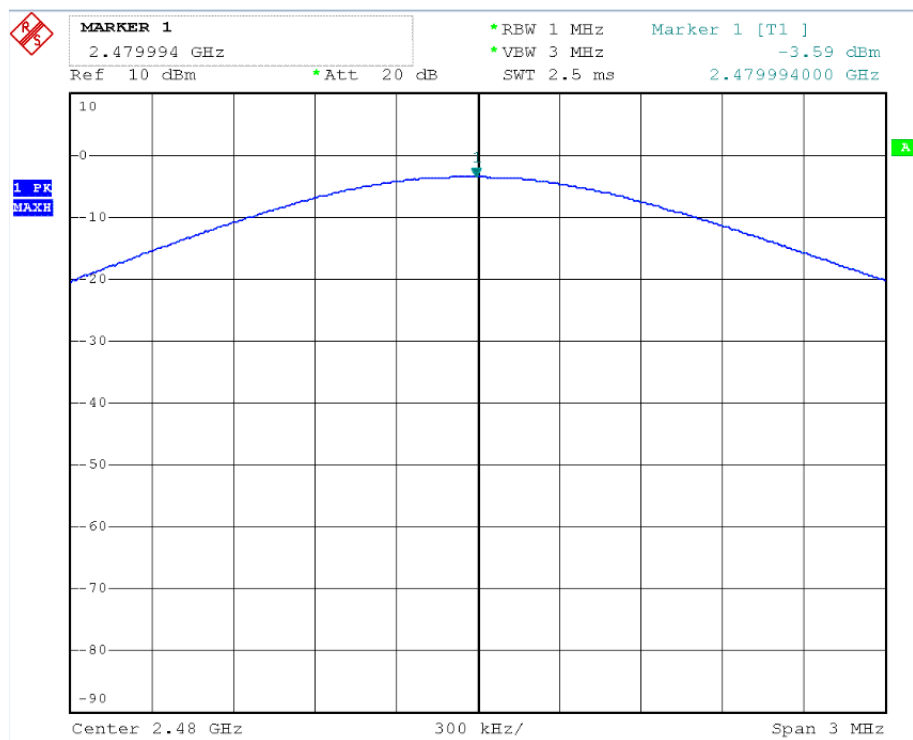


10. Test of Band Edges Emission

10.1 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup

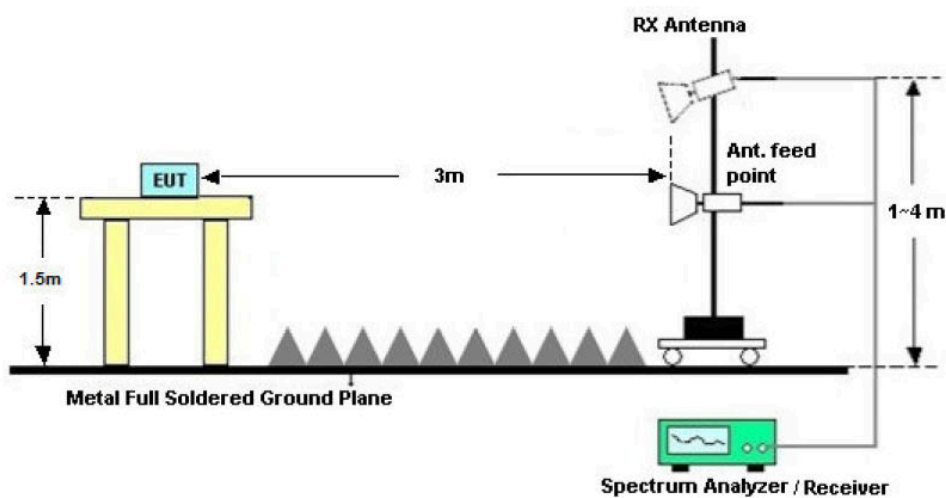

Conducted Measurement Setup

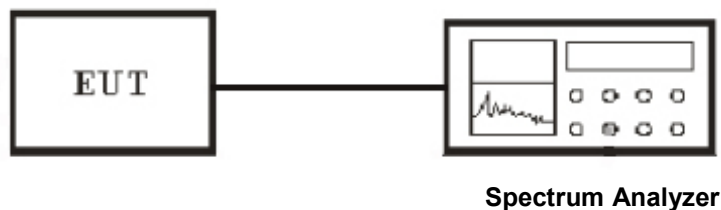

10.3 Test Equipment List and Details

See section 2.5.

10.4 Test Procedure

Conducted Measurement

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.
2. Set the RBW $\geq$ 1% of the span
3. Set the VBW $\geq$ RBW.
4. Detector = peak.

5. Sweep time = auto
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

Radiated Measurement

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = power average (RMS)
5. Sweep = auto couple.
6. Trace (RMS) averaging was performed over at least 100 traces

NOTE :

1. Configure the EUT according to ANSI C63.10-2013
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.

10.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode


For Radiated Bandedge Measurement

Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Cabel Loss (dB/m)	antenna factor	amplifier gain (dB)	Emission Level (dBμV/m)	Margin (dB)	Limits (dBμV/m)	Det.
2390.00	H	24.45	-1.12	5.02	26	54.35	-19.65	74	PK
2390.00	H	18.85	-1.15	4.95	26	48.65	-5.35	54	Av
2390.00	V	23.00	-1.21	5.09	26	52.88	-21.12	74	PK
2390.00	V	16.65	-1.18	5.05	26	46.52	-7.48	54	Av
2483.50	H	22.65	-1.16	5.12	26	52.61	-21.39	74	PK
2483.50	H	17.06	-1.22	5.03	26	46.87	-7.13	54	Av
2483.50	V	25.73	-1.25	5.15	26	55.63	-18.37	74	PK
2483.50	V	20.25	-1.23	5.09	26	50.11	-3.89	54	Av


Note:

1. Emission level (dBuV/m) = Read Value (dBuV/m) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB/m) + amplifier gain (dB)
3. Margin value = Emission level.- Limit
4. The other emission levels were very low against the limit.


For Conducted Bandedge Measurement Low Channel

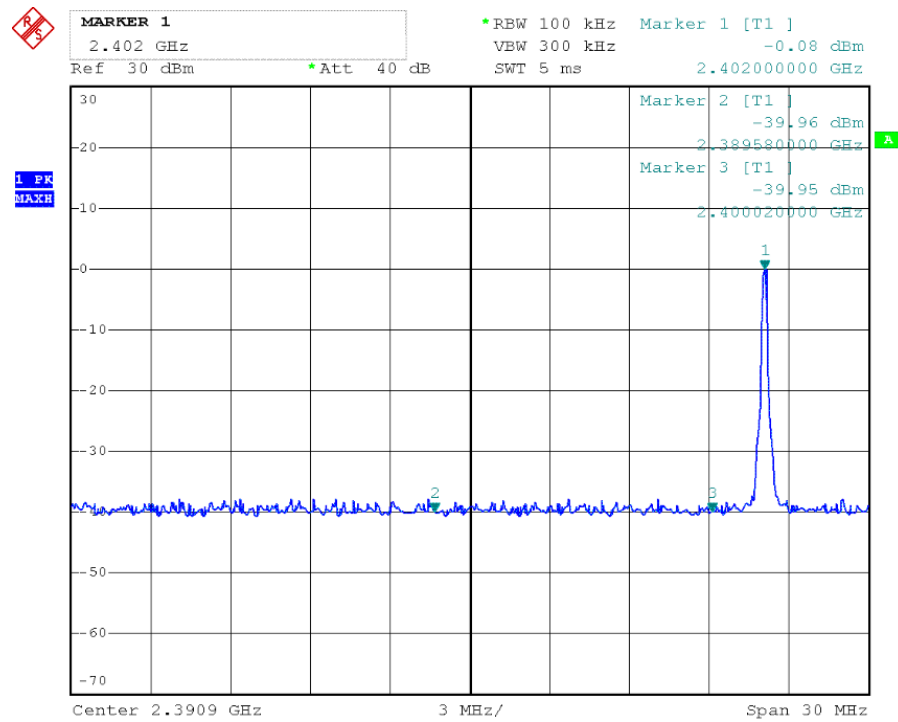


High Channel

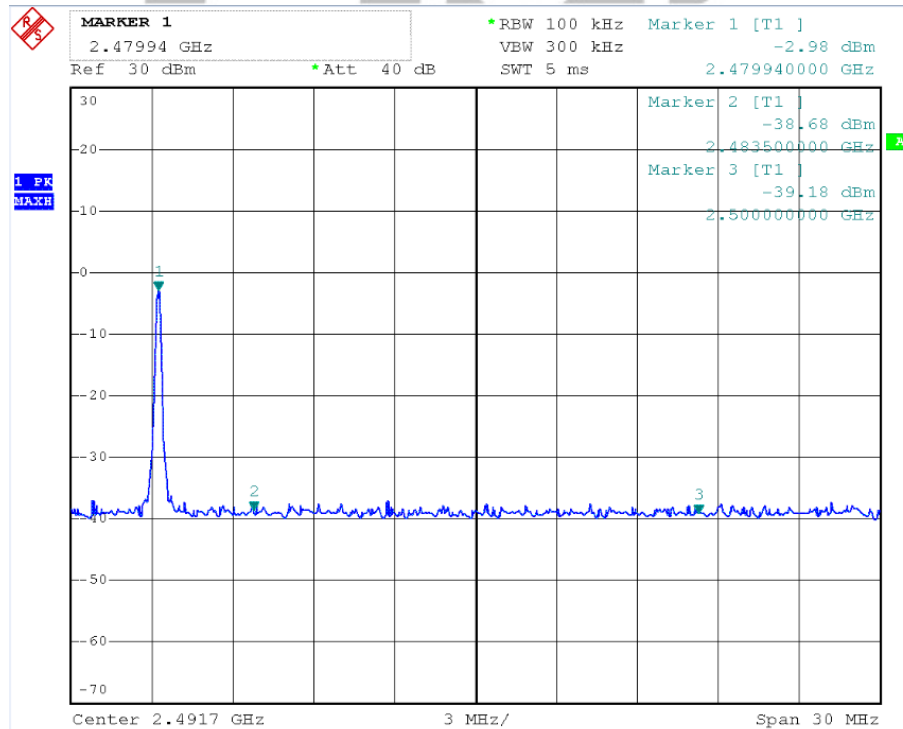

Hopping Conducted Test Result Low Channel

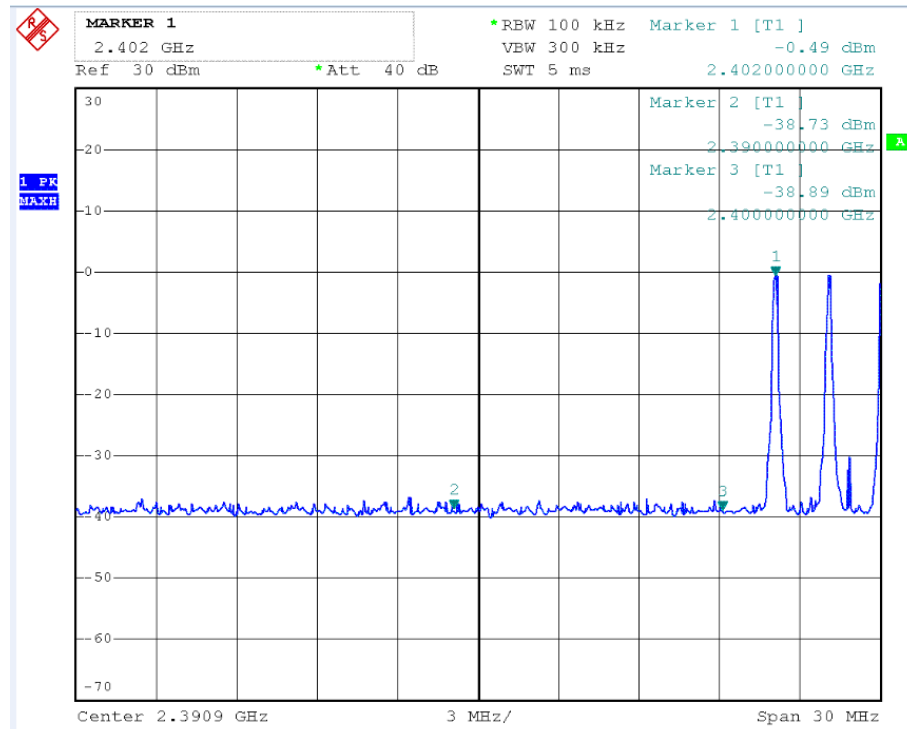

High Channel

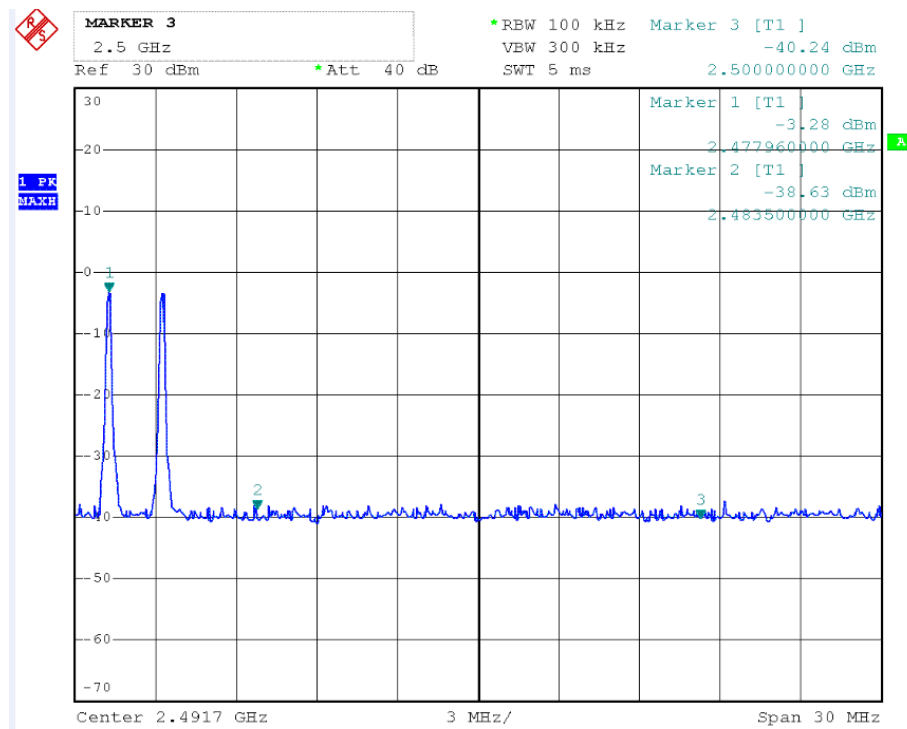

11. Test of Spurious Radiated Emission

11.1 Applicable Standard

Refer to FCC §15.205 and §15.209.

11.1.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3


11.2 EUT Setup

Radiated Measurement Setup


For radiated emission below 30MHz

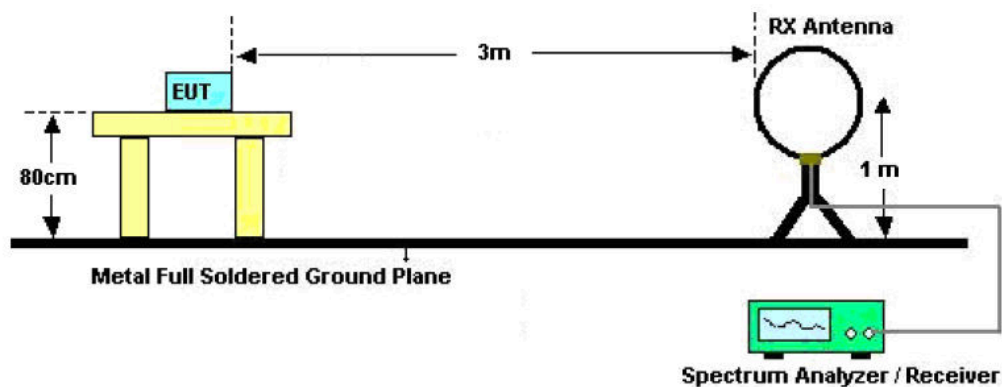


For radiated emission from 30MHz to 1GHz

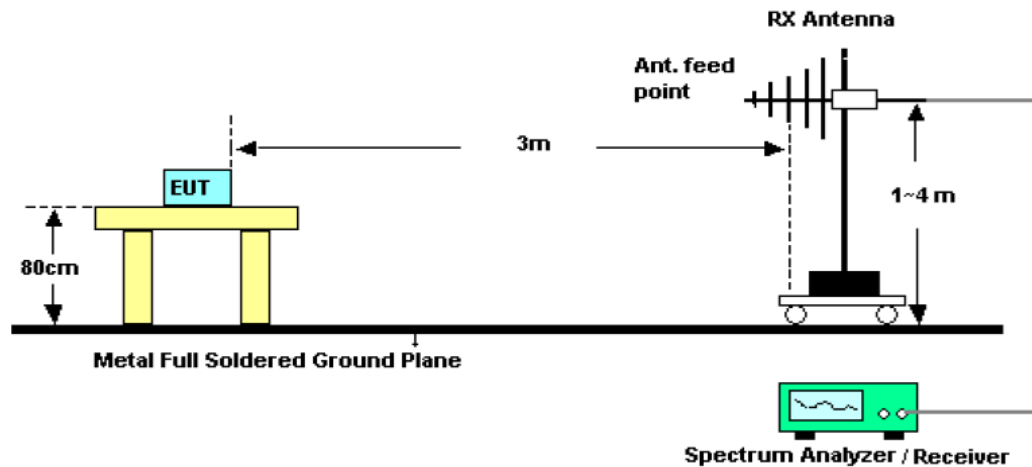

For radiated emission from above 1GHz

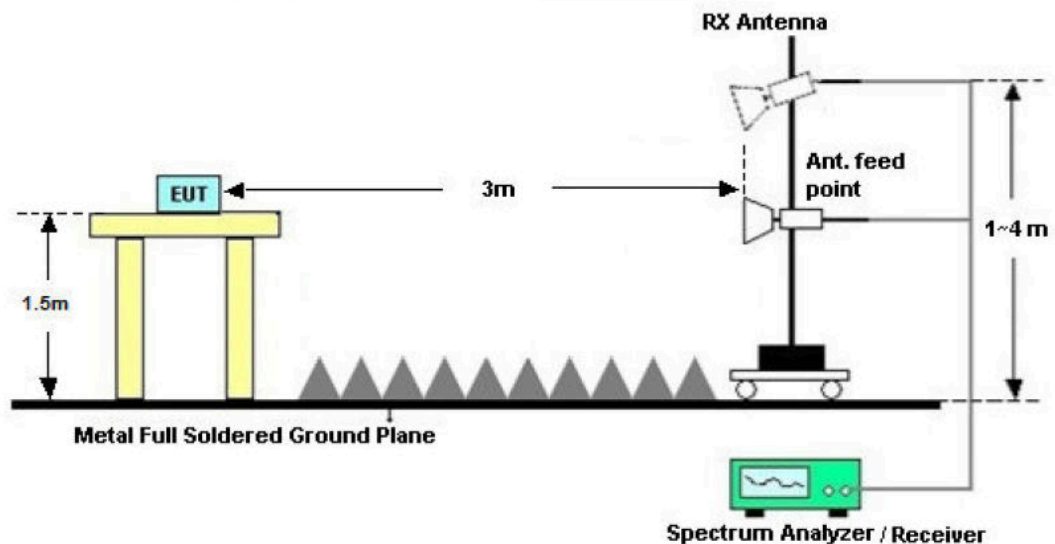

Conducted Measurement Setup

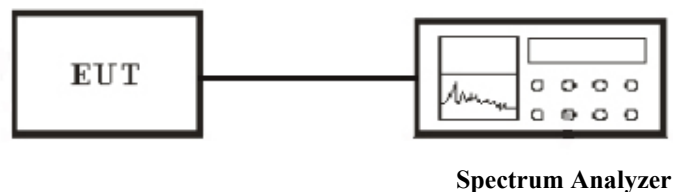

11.3 Test Equipment List and Details

See section 2.5.

11.4 Test Procedure

Conducted Measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq$ RBW.

4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

Radiated Measurement

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
3. Set VBW $\geq$ RBW
4. Detector = power average (RMS)
5. Sweep = auto couple.
6. Trace (RMS) averaging was performed over at least 100 traces

NOTE: 1. Configure the EUT according to ANSI C63.10-2013

2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.

11.5 Test Result

Temperature (°C) : 22~23	EUT: Bluetooth Connected Body Fat Scale
Humidity (%RH) : 50~54	M/N: D303
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

Test Result: PASS

Report No.: HCT16CR062E

Page 31 of 45


FCC ID: 2AHM2-D303

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

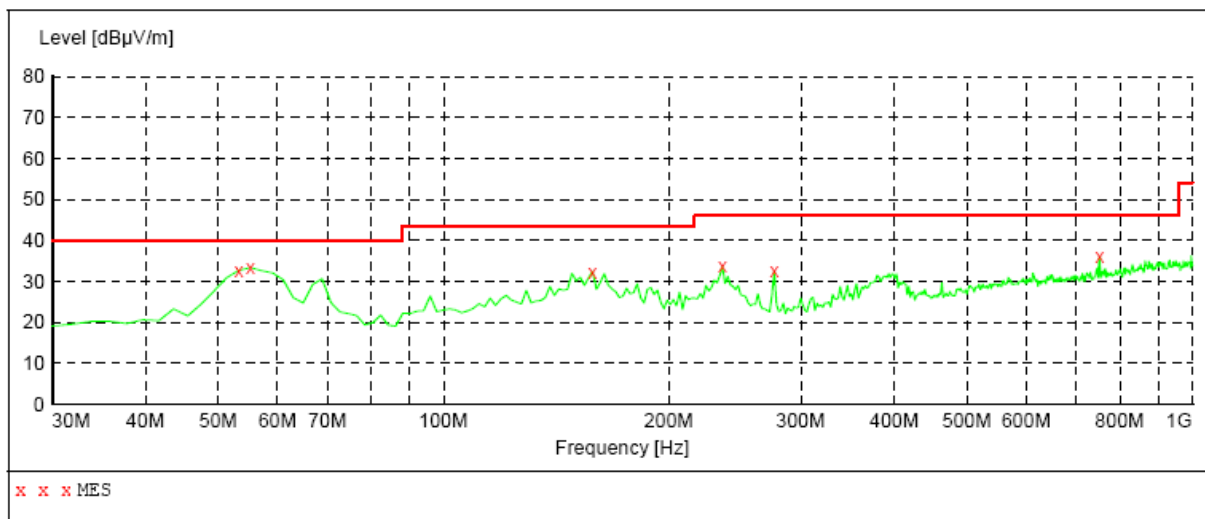

MEASUREMENT RESULT:


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	32.70	15.7	40.0	7.3	QP	100.0	0.00	HORIZONTAL
55.220000	33.30	15.6	40.0	6.7	QP	100.0	0.00	HORIZONTAL
158.040000	32.40	12.7	43.5	11.1	QP	100.0	0.00	HORIZONTAL
235.640000	33.60	16.6	46.0	12.4	QP	100.0	0.00	HORIZONTAL
276.380000	32.50	18.0	46.0	13.5	QP	100.0	0.00	HORIZONTAL
751.680000	36.00	27.3	46.0	10.0	QP	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

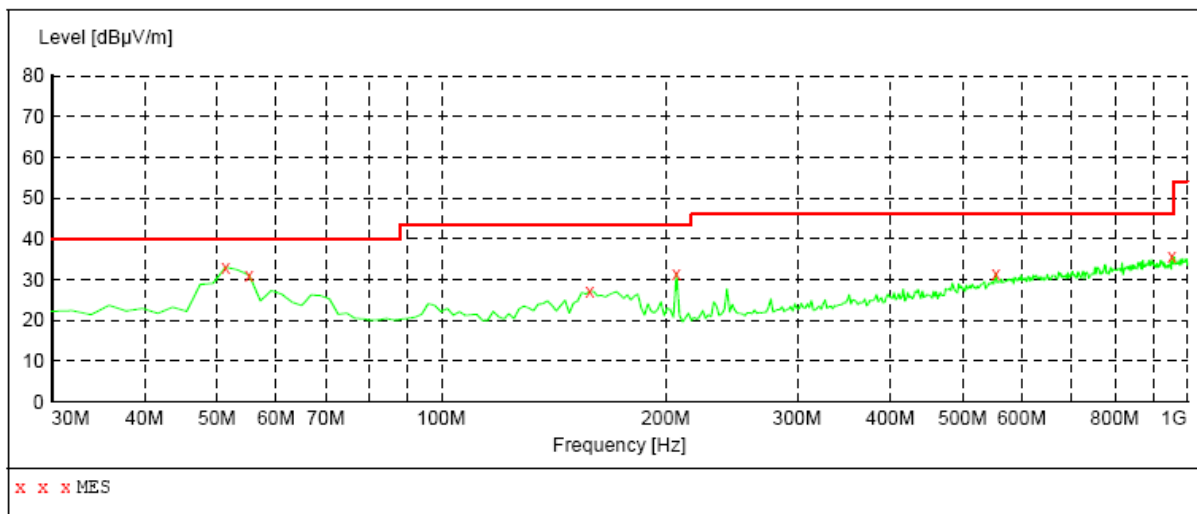

MEASUREMENT RESULT:


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	33.10	15.7	40.0	6.9	QP	100.0	0.00	VERTICAL
55.220000	31.00	15.6	40.0	9.0	QP	100.0	0.00	VERTICAL
158.040000	27.10	12.7	43.5	16.4	QP	100.0	0.00	VERTICAL
206.540000	31.60	15.0	43.5	11.9	QP	100.0	0.00	VERTICAL
553.800000	31.60	25.1	46.0	14.4	QP	100.0	0.00	VERTICAL
953.440000	35.90	29.6	46.0	10.1	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

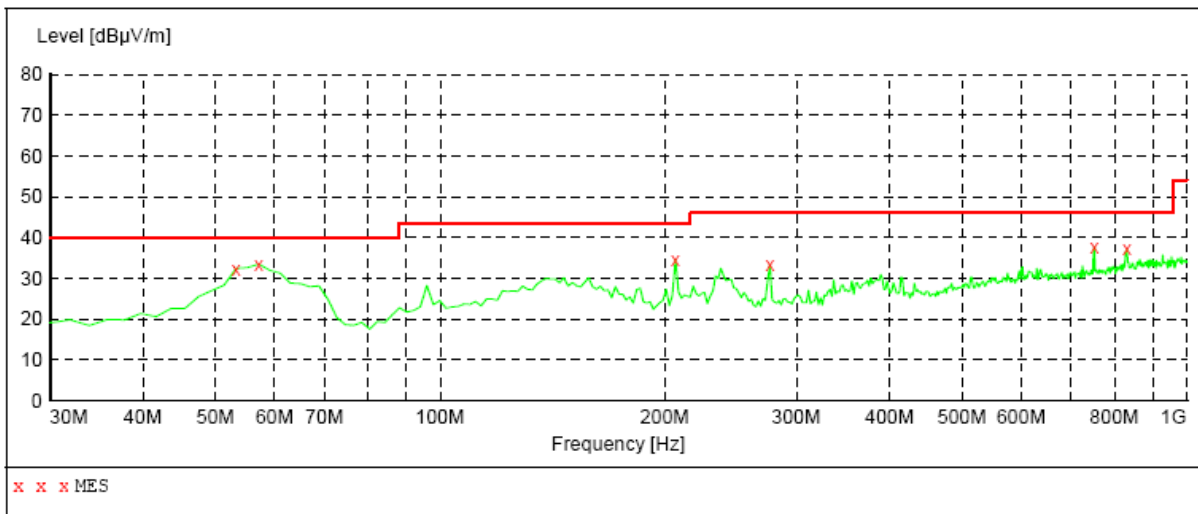

MEASUREMENT RESULT:


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	32.40	15.7	40.0	7.6	QP	100.0	0.00	HORIZONTAL
57.160000	33.50	15.1	40.0	6.5	QP	100.0	0.00	HORIZONTAL
206.540000	34.70	15.0	43.5	8.8	QP	100.0	0.00	HORIZONTAL
276.380000	33.30	18.0	46.0	12.7	QP	100.0	0.00	HORIZONTAL
751.680000	37.70	27.3	46.0	8.3	QP	100.0	0.00	HORIZONTAL
831.220000	37.10	28.4	46.0	8.9	QP	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength
Start Stop	Detector Meas. IF Transducer
Frequency Frequency	Time Bandw.
30.0 MHz 1.0 GHz	MaxPeak Coupled 100 kHz VULB9163 NEW

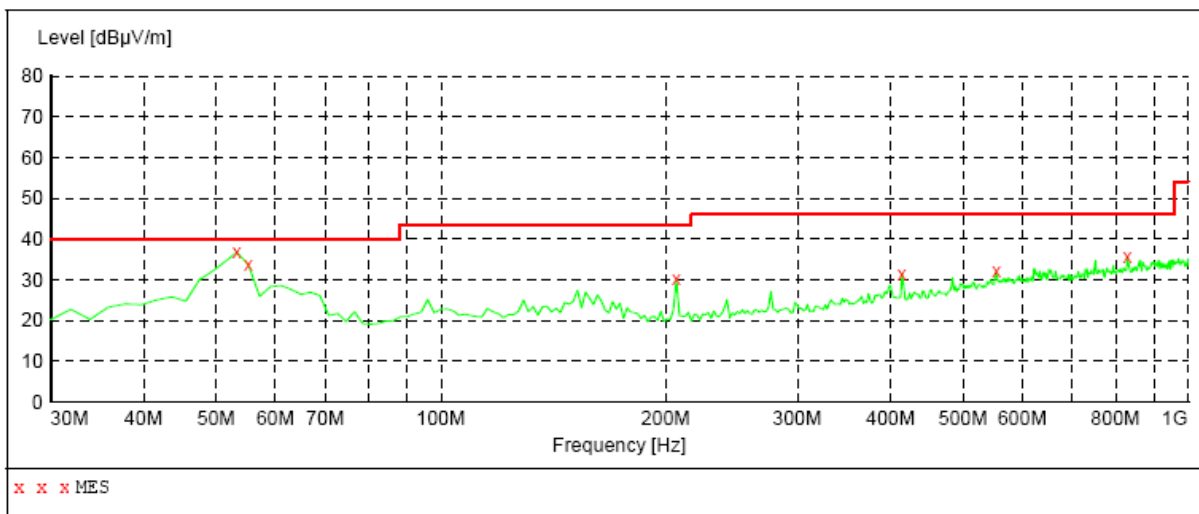

MEASUREMENT RESULT:


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	36.70	15.7	40.0	3.3	QP	100.0	0.00	VERTICAL
55.220000	33.70	15.6	40.0	6.3	QP	100.0	0.00	VERTICAL
206.540000	30.10	15.0	43.5	13.4	QP	100.0	0.00	VERTICAL
414.120000	31.50	21.8	46.0	14.5	QP	100.0	0.00	VERTICAL
553.800000	32.00	25.1	46.0	14.0	QP	100.0	0.00	VERTICAL
829.280000	35.70	28.4	46.0	10.3	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

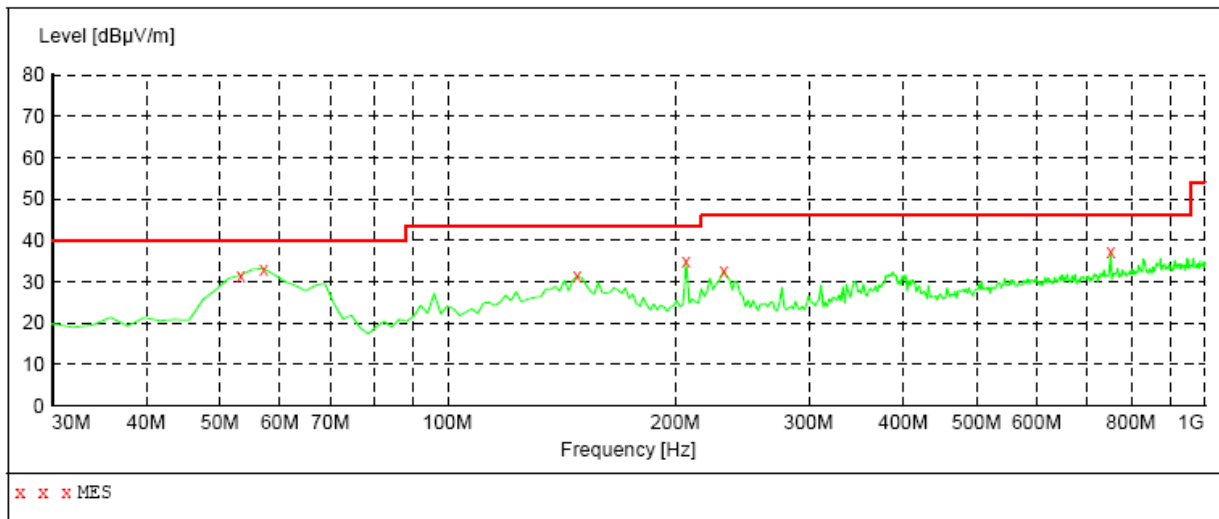

MEASUREMENT RESULT:


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	31.50	15.7	40.0	8.5	QP	100.0	0.00	HORIZONTAL
57.160000	33.10	15.1	40.0	6.9	QP	100.0	0.00	HORIZONTAL
148.340000	31.30	12.3	43.5	12.2	QP	100.0	0.00	HORIZONTAL
206.540000	34.80	15.0	43.5	8.7	QP	100.0	0.00	HORIZONTAL
231.760000	32.70	16.3	46.0	13.3	QP	100.0	0.00	HORIZONTAL
751.680000	37.30	27.3	46.0	8.7	QP	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: Bluetooth Connected Body Fat Scale
M/N: D303
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC4.5V from battery
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

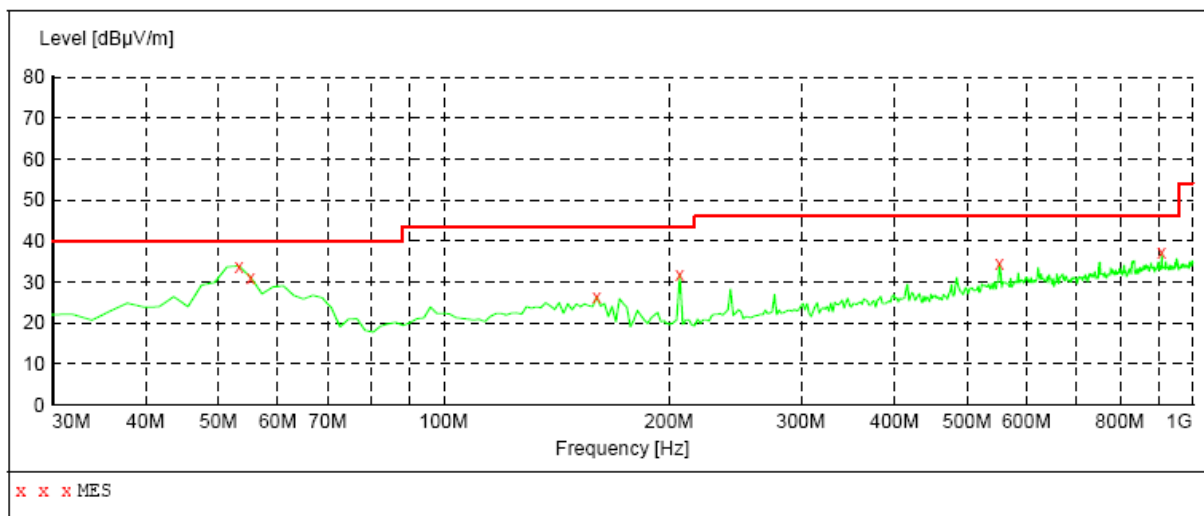

MEASUREMENT RESULT:

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	33.90	15.7	40.0	6.1	QP	100.0	0.00	VERTICAL
55.220000	31.10	15.6	40.0	8.9	QP	100.0	0.00	VERTICAL
159.980000	26.40	12.8	43.5	17.1	QP	100.0	0.00	VERTICAL
206.540000	31.70	15.0	43.5	11.8	QP	100.0	0.00	VERTICAL
551.860000	34.50	25.0	46.0	11.5	QP	100.0	0.00	VERTICAL
908.820000	37.10	29.3	46.0	8.9	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1GHz

Channel Low

Channel Low (2402MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2402	H	1	81.71	-7.15	74.56	N/A	N/A	P
			73.87	-7.15	66.72	N/A	N/A	A
2402	V	1	79.12	-7.15	71.97	N/A	N/A	P
			72.06	-7.15	64.91	N/A	N/A	A
4804	H	1	41.35	1.07	42.42	74	-31.58	P
			31.50	1.07	32.57	54	-21.43	A
4804	V	1	42.97	1.07	44.04	74	-29.96	P
			31.91	1.07	32.98	54	-21.02	A
7206	H	1	41.80	7.38	49.18	74	-24.82	P
			32.38	7.38	39.76	54	-14.24	A
7206	V	1	43.76	7.38	51.14	74	-22.86	P
			32.45	7.38	39.83	54	-14.17	A
9608	H	1	41.18	10.29	51.47	74	-22.53	P
			32.45	10.29	42.74	54	-11.26	A
9608	V	1	43.65	10.29	53.94	74	-20.06	P
			32.46	10.29	42.75	54	-11.25	A
12010	H	1	41.18	14.01	55.19	74	-18.81	P
			32.90	14.01	46.91	54	-7.09	A
12010	V	1	42.81	14.01	56.82	74	-17.18	P
			33.07	14.01	47.08	54	-6.92	A
----	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz, A(Average): RBW=1MHz, VBW=3MHz.

4. The test limit distance is 3m limit

Channel Mid

Channel Mid (2440MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2440	H	1	82.32	-6.37	75.95	N/A	N/A	P
			74.53	-6.37	68.16	N/A	N/A	A
2442	V	1	80.63	-6.37	74.26	N/A	N/A	P
			73.52	-6.37	67.15	N/A	N/A	A
4880	H	1	43.62	1.07	44.69	74	-29.31	P
			34.37	1.07	35.44	54	-18.56	A
4880	V	1	45.54	1.07	46.61	74	-27.39	P
			35.52	1.07	36.59	54	-17.41	A
7320	H	1	44.72	7.49	52.21	74	-21.79	P
			34.41	7.49	41.90	54	-12.1	A
7320	V	1	45.47	7.49	52.96	74	-21.04	P
			35.03	7.49	42.52	54	-11.48	A
9760	H	1	44.47	10.47	54.94	74	-19.06	P
			35.56	10.47	46.03	54	-7.97	A
9760	V	1	45.37	10.47	55.84	74	-18.16	P
			35.47	10.47	45.94	54	-8.06	A
12200	H	1	45.75	14.1	59.85	74	-14.15	P
			35.66	14.1	49.76	54	-4.24	A
12200	V	1	45.73	14.1	59.83	74	-14.17	P
			35.47	14.1	49.57	54	-4.43	A
----	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value
2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz, A(Average): RBW=1MHz, VBW=3MHz.
4. The test limit distance is 3m limit

Channel High


Channel High (2480MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2480	H	1	80.20	-6.05	74.15	N/A	N/A	P
			73.62	-6.05	67.57	N/A	N/A	A
2480	V	1	80.52	-6.05	74.47	N/A	N/A	P
			71.63	-6.05	65.58	N/A	N/A	A
4960	H	1	44.74	1.07	45.81	74	-28.19	P
			34.03	1.07	35.10	54	-18.90	A
4960	V	1	45.65	1.07	46.72	74	-27.28	P
			34.52	1.07	35.59	54	-18.41	A
7440	H	1	45.37	7.61	52.98	74	-21.02	P
			34.73	7.61	42.34	54	-11.66	A
7440	V	1	45.47	7.61	53.08	74	-20.92	P
			35.46	7.61	43.07	54	-10.93	A
9920	H	1	44.64	10.65	55.29	74	-18.71	P
			35.73	10.65	46.38	54	-7.62	A
9920	V	1	45.62	10.65	56.27	74	-17.73	P
			35.53	10.65	46.18	54	-7.82	A
12400	H	1	44.03	14.19	58.22	74	-15.78	P
			35.44	14.19	49.63	54	-4.37	A
12400	V	1	45.52	14.19	59.71	74	-14.29	P
			34.97	14.19	49.16	54	-4.84	A
25381.35	----	----	----	----	----	----	----	----
Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier Margin = Level-Limit Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz, A(Average): RBW=1MHz, VBW=3MHz. 4. The test limit distance is 3m limit								

Radiated Emission Below 30 MHz TX (CH Low)


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Mode
0.59	25.56	8.22	-1.01	32.77	67.00	-34.23	QP
19.55	24.45	8.17	-1.20	31.42	49.50	-18.08	QP
22.58	24.00	8.03	-1.05	30.98	49.50	-18.52	QP

Note:


1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level.- Limit value

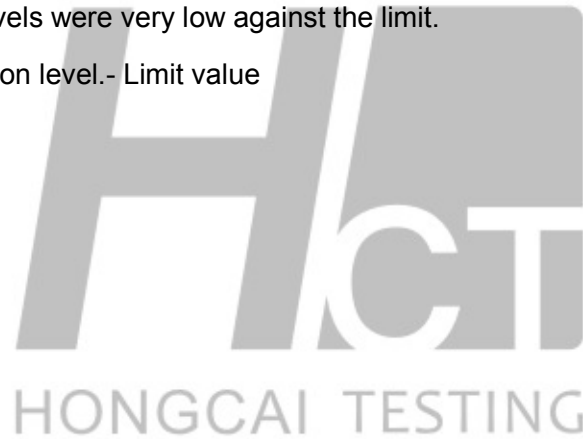


Conducted Spurious Emission Test Data Channel Low

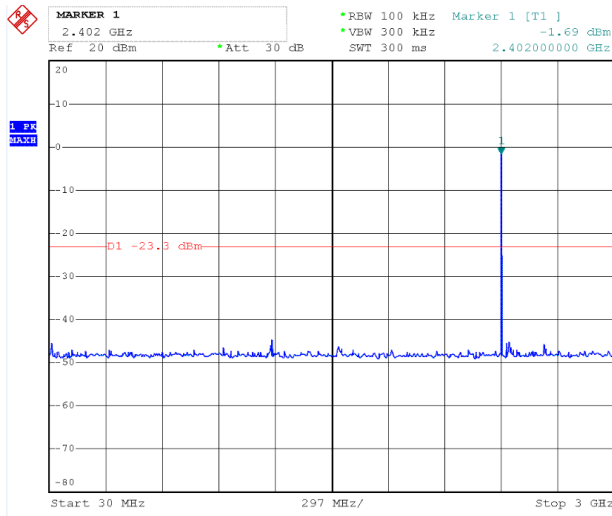

30MHz-3GHz

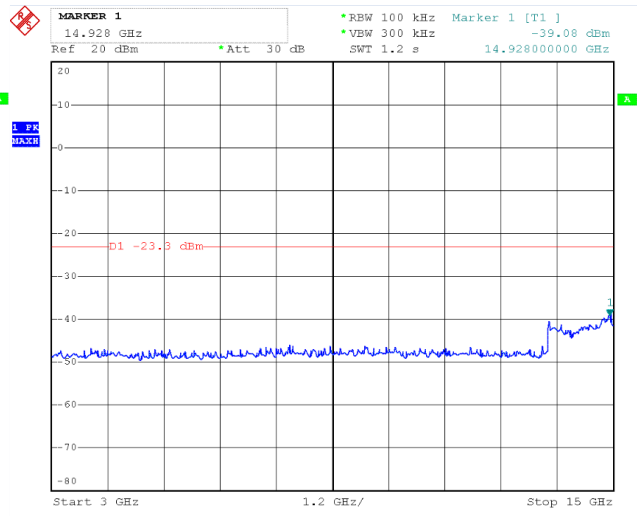


3GHz-15GHz

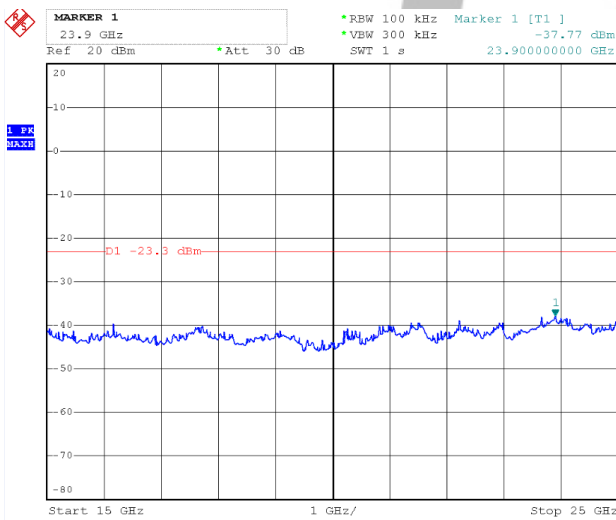


15GHz-26GHz


Channel Mid

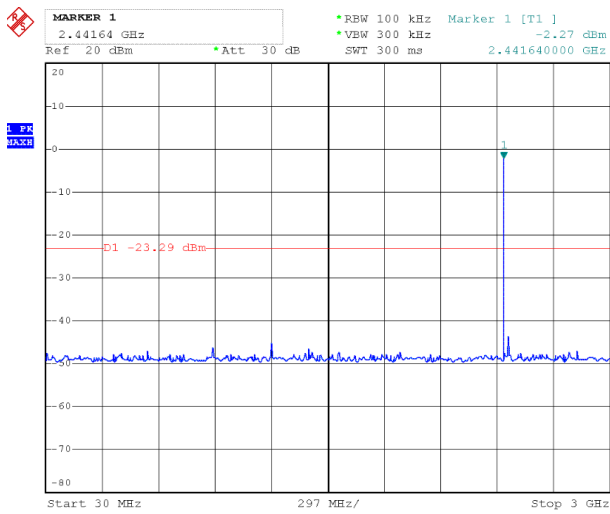

30MHz-3GHz

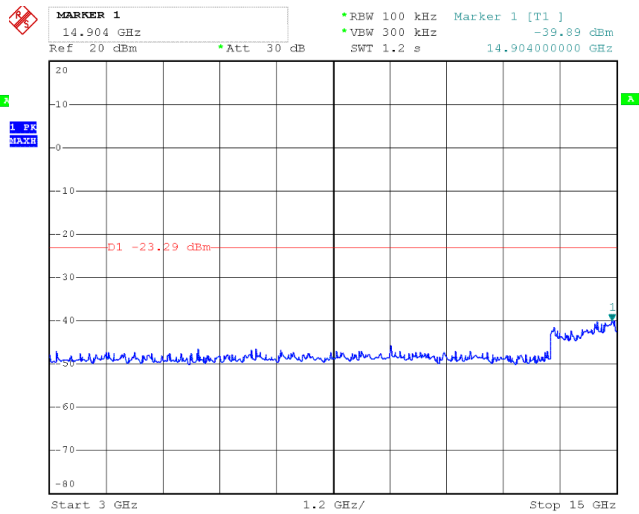


3GHz-15GHz

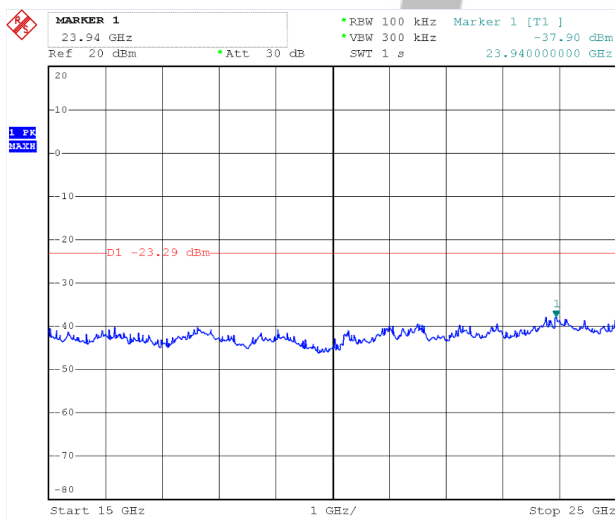


15GHz-26GHz


Channel High

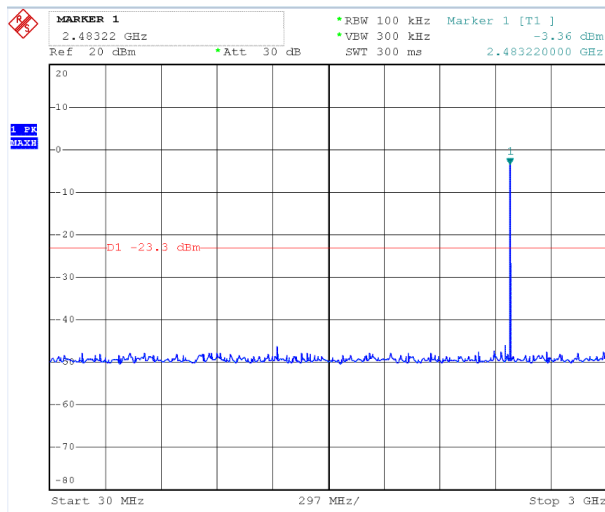

30MHz-3GHz

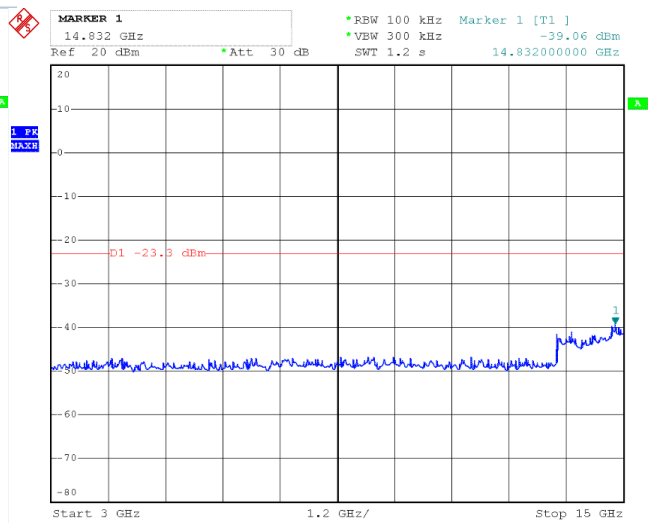

3GHz-15GHz

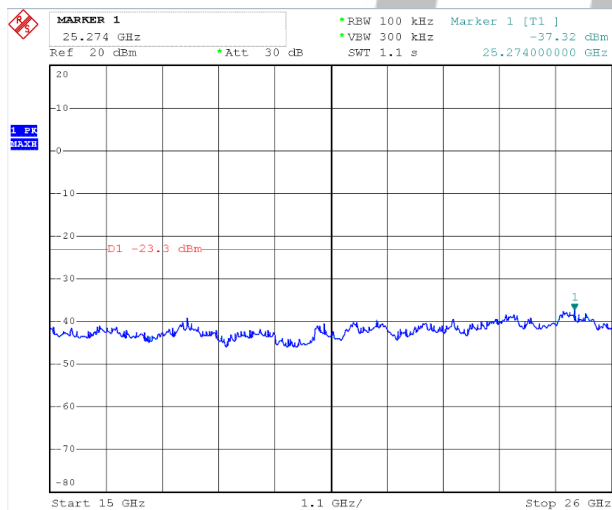

15GHz-26GHz

12. ANTENNA REQUIREMENT

12.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.

BT ANT

