

# FCC Part 15 Subpart C §15.247

## Test Report

|                             |                         |
|-----------------------------|-------------------------|
| <b>Equipment Under Test</b> | OWiN_BEACON             |
| <b>Model Name</b>           | OWB-100KR               |
| <b>Applicant</b>            | OWIN inc.               |
| <b>FCC ID</b>               | 2AHMA-OWB-100KR         |
| <b>Manufacturer</b>         | PLATEL                  |
| <b>Date of Test(s)</b>      | 2016.03.24 ~ 2016.05.27 |
| <b>Date of Issue</b>        | 2016.05.27              |

In the configuration tested, the EUT complied with the standards specified above.

| Issue to                                                                                                                                                    | Issue by                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>OWIN inc.</b><br/>4009-ho, postower, 577, Seolleung-ro,<br/>Gangnam-gu, Seoul, South Korea</p> <p>Tel.: +82-10-8968-2846<br/>Fax: +82-2-3482-4165</p> | <p><b>MOVON CORPORATION</b><br/>498-2, Geumeo-ro, Pogok-eup,<br/>Cheoin-gu, Yongin-si,<br/>Gyeonggi-do, Korea, 449-812</p> <p>Tel.: +82-31-338-8837<br/>Fax: +82-31-338-8847</p> |

### Revision history

| Revision | Date of issue | Description                       | Revised by |
|----------|---------------|-----------------------------------|------------|
| --       | May 23, 2016  | Initial                           | --         |
| 1        | May 27, 2016  | Radiated Band-edge data plots add | Nanju Yoo  |

## **Table of contents**

|                                                                                          |           |
|------------------------------------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULT .....</b>                                               | <b>4</b>  |
| <b>2. EUT DESCRIPTION.....</b>                                                           | <b>6</b>  |
| <b>3. MEASUREMENT EQUIPMENT .....</b>                                                    | <b>7</b>  |
| <b>4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS .....</b> | <b>8</b>  |
| <b>5. 6 dB BANDWIDTH .....</b>                                                           | <b>41</b> |
| <b>6. MAXIMUM OUTPUT POWER MEASUREMENT.....</b>                                          | <b>45</b> |
| <b>7. POWER SPECTRAL DENSITY MEASUREMENT .....</b>                                       | <b>49</b> |
| <b>8. ANTENNA REQUIREMENT .....</b>                                                      | <b>53</b> |
| <b>9. RF EXPOSURE EVALUATION .....</b>                                                   | <b>54</b> |

## 1. Attestation of test result

### 1.1. Details of applicant

Applicant : OWIN inc.  
Address : 4009-ho, postower, 577, Seolleung-ro, Gangnam-gu, Seoul,  
South Korea  
Contact Person : Bum Chul Lee  
Telephone : +82-10-8968-2846  
Fax : +82-2-3482-4165

### 1.2. Details of Manufacturer

Manufacturer : PLATEL  
Address : 97, Sanup-Ro, Gwonseon-ward, Suwon-city, Gyunggi  
Province, Korea

### 1.3. Summary of test results

The EUT has been tested according to the following specifications;

| Section in FCC part 15           | Description                                                             | Result |
|----------------------------------|-------------------------------------------------------------------------|--------|
| §15.205<br>§15.209<br>§15.247(d) | Transmitter radiated spurious emissions,<br>Conducted spurious emission | C      |
| §15.247(a)(2)                    | 6 dB Bandwidth                                                          | C      |
| §15.247(b)(e)                    | Maximum Conducted Output Power                                          | C      |
| §15.247(e)                       | Transmitter Power Spectral Density                                      | C      |
| §1.1307(b)(1)                    | RF exposure evaluation                                                  | C      |

The sample was tested according to the following specification:

**FCC Parts 15.247; ANSI C63.4:2009, ANSI C63.10:2013**

**FCC Public Notice KDB 558074 D01 v03r05**

**TEST SITE REGISTRATION NUMBER: FCC(670686)**


#### ※ Abbreviation

C Complied

N/A Not applicable

F Fail

### Approval Signatories
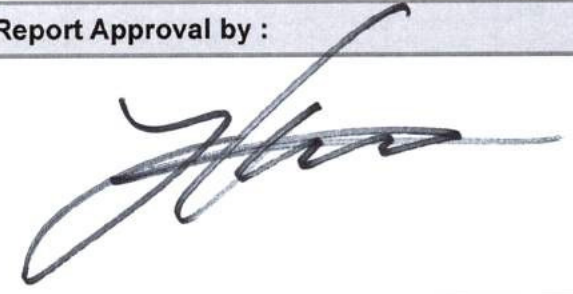
| Test and Report Completed by :                                                      | Report Approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| Nanju Yoo<br>Test Engineer<br>MOVON CORPORATION                                     | Issac Jin<br>Technical Manager<br>MOVON CORPORATION                                  |

## 2. EUT Description

|                               |                       |
|-------------------------------|-----------------------|
| Kind of product               | OWiN_BEACON           |
| FCC ID                        | 2AHMA-OWB-100KR       |
| Model Name                    | OWB-100KR             |
| Serial Number                 | N/A                   |
| Power supply                  | DC 12 V, DC 3.7 V     |
| Frequency range               | 2 402 MHz ~ 2 480 MHz |
| Modulation technique          | GFSK                  |
| Number of channels            | 40                    |
| Antenna gain                  | 1.29 dB i (Max.)      |
| Test Site Registration Number | FCC(670686)           |

### 2.1. Declarations by the manufacturer

None

### 2.2. Details of modification

None

### 3. Measurement equipment

| Equipment          | Manufacturer | Model                  | Serial number        | Calibration Interval | Calibration due. |
|--------------------|--------------|------------------------|----------------------|----------------------|------------------|
| Test Receiver      | R&S          | ESVS30                 | 829673/015           | 1 year               | 2016-12-10       |
| Signal Generator   | R&S          | SMA100A                | 102188               | 1 year               | 2016-09-23       |
| Spectrum Analyzer  | R&S          | FSV-40                 | 100832               | 1 year               | 2016-12-11       |
| Power Meter        | Agilent      | E4416A                 | GB41290645           | 1 year               | 2016-09-23       |
| Power Sensor       | Agilent      | 9327A                  | US40441490           | 1 year               | 2016-12-10       |
| Horn Antenna       | R&S          | HF906                  | 100236               | 2 year               | 2017-07-24       |
| Horn Antenna       | R&S          | HF906                  | 100235               | 2 year               | 2017-04-23       |
| Biolog Antenna     | A.H.System   | SAS-521-7              | 128                  | 2 year               | 2017-11-02       |
| Power Amplifier    | MITEQ        | AM-1431                | 1497315              | 1 year               | 2016-09-24       |
| Power Amplifier    | MITEQ        | AFS43-01002600         | 1374382              | 1 year               | 2016-09-24       |
| High Pass Filter   | Wainwright   | WHK3.0/18G-10SS        | 508                  | 1 year               | 2016-09-23       |
| Controller         | INNCO        | CO2000                 | co200/064/6961003/L  | N/A                  | N/A              |
| Antenna Master     | INNCO        | MA4000                 | MA4000/038/6961003/L | N/A                  | N/A              |
| Loop Antenna       | ETS LINDGREN | 6502                   | 00118166             | 2 year               | 2018-02-23       |
| Pre Amplifier      | MITEQ        | AFS42-00101800-25-S-42 | 973164               | 1 year               | 2016-12-11       |
| TWO LINE-V-NETWORK | R&S          | ESH3-Z5                | 100296               | 1 year               | 2016-12-10       |
| EMI TEST RECEIVER  | R&S          | ESR3                   | 101873               | 1 year               | 2016-11-06       |

#### ※ Remark;

#### Support equipment


| Description       | Manufacturer | Model          | Serial number |
|-------------------|--------------|----------------|---------------|
| Notebook computer | DELL         | Lattitude D510 | -             |

## 4. Transmitter radiated spurious emissions and conducted spurious emissions


### 4.1. Test setup

#### 4.1.1. Transmitter radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

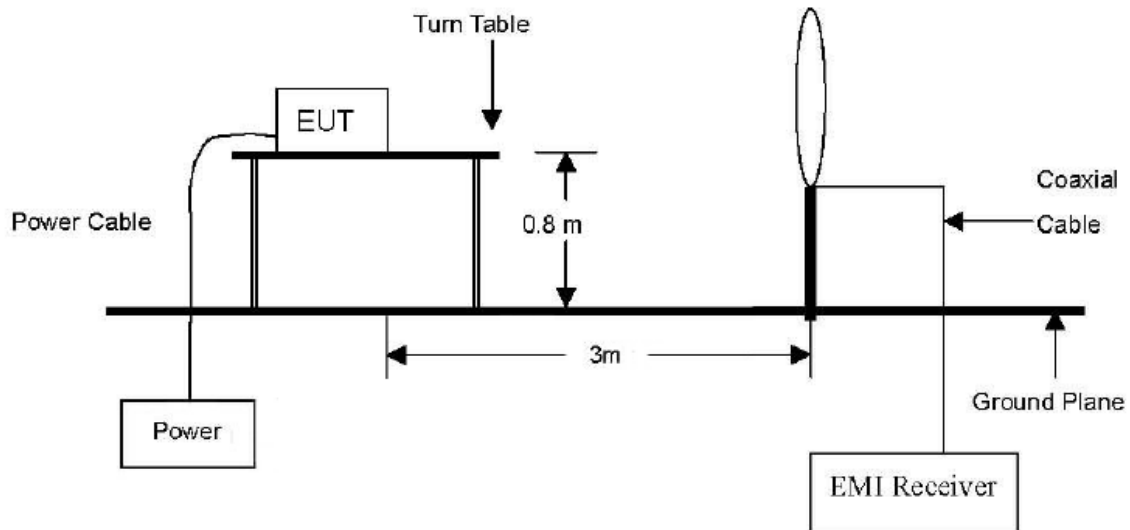

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

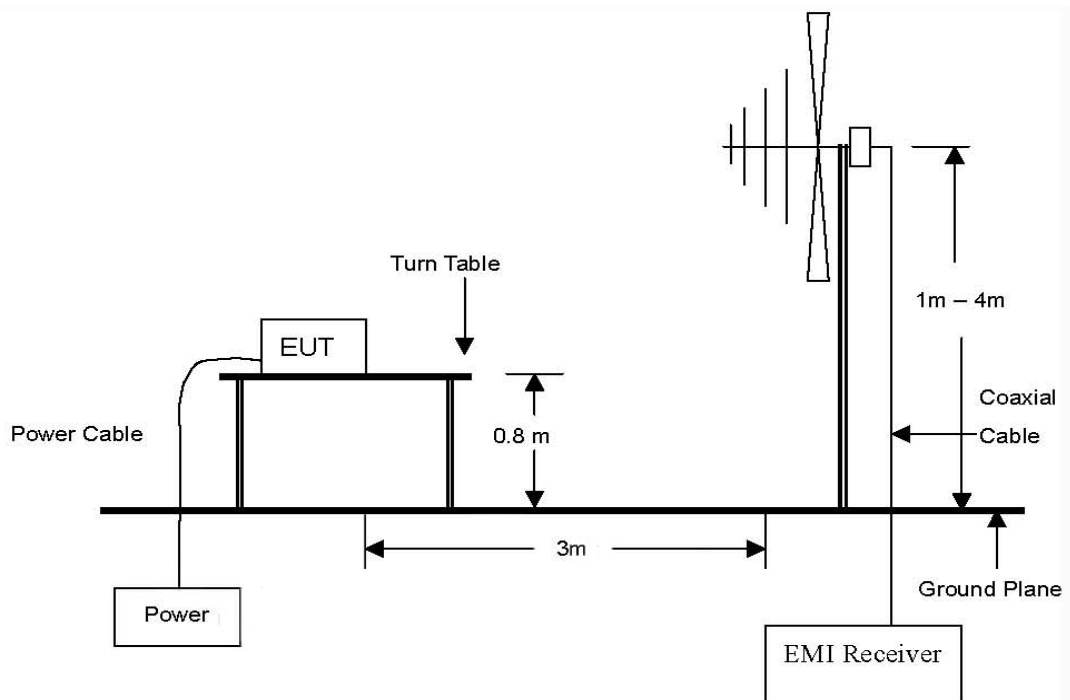

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

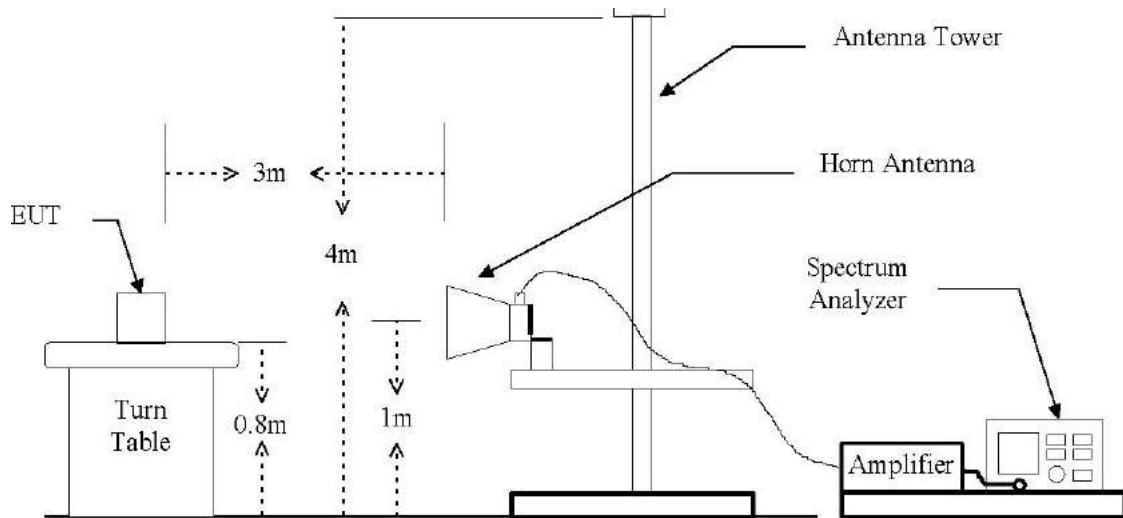

## 4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based in either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.209(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to §15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Distance (Meters) | Radiated at 3M (dBμV/m) | Radiated (μV/m) |
|-----------------|-------------------|-------------------------|-----------------|
| 0.009–0.490     | 300               | See the remark          | 2400/F(kHz)     |
| 0.490–1.705     | 30                |                         | 24000/F(kHz)    |
| 1.705–30.0      | 30                |                         | 30              |
| 30 - 88         | 3                 | 40.0                    | 100             |
| 88 – 216        | 3                 | 43.5                    | 150             |
| 216 – 960       | 3                 | 46.0                    | 200             |
| Above 960       | 3                 | 54.0                    | 500             |

According to §15.205(a), Except as provided elsewhere in this Subpart, the emissions from Restricted bands of operation shall not exceed the field strength levels specified in the following table:

| MHz                   | MHz                     | MHz             | GHz           |
|-----------------------|-------------------------|-----------------|---------------|
| 0.090 – 0.110         | 16.42 – 16.423          | 399.9 – 410     | 4.5 – 5.15    |
| 0.495 – 0.505         | 16.694 75 – 16.695 25   | 608 – 614       | 5.35 – 5.46   |
| 2.173 5 – 2.190 5     | 16.804 25 -16.804 75    | 960 – 1240      | 7.25 – 7.75   |
| 4.125 – 4.128         | 25.5 – 25.67            | 1300 – 1427     | 8.025 – 8.5   |
| 4.177 25 – 4.177 75   | 37.5 – 38.25            | 1435 – 1626.5   | 9.0 – 9.2     |
| 4.207 25 – 4.207 75   | 73 – 74.6               | 1645.5 – 1646.5 | 9.3 – 9.5     |
| 6.215 – 6.218         | 74.8 – 75.2             | 1660 – 1710     | 10.6 – 12.7   |
| 6.267 75 – 6.268 25   | 108 – 121.94            | 1718.8 – 1722.2 | 13.25 – 13.4  |
| 6.311 75 – 6.312 25   | 123 – 138               | 2200 – 2300     | 14.47 – 14.5  |
| 8.291 – 8.294         | 149.9 – 150.05          | 2310 – 2390     | 15.35 – 16.2  |
| 9.362 – 8.366         | 156.524 75 – 156.525 25 | 2483.5 – 2500   | 17.7 – 21.4   |
| 8.376 25 – 8.386 75   | 156.7 – 156.9           | 2655 – 2900     | 22.01 – 23.12 |
| 8.414 25 – 8.414 75   | 162.012 5 – 167.17      | 3260 – 3267     | 23.6 – 24.0   |
| 12.29 – 12.293        | 167.72 – 173.2          | 3332 - 3339     | 31.2 – 31.8   |
| 12.519 75 – 12.520 25 | 240 – 285               | 3345.8 – 3358   | 36.43 – 36.5  |
| 12.576 75 – 12.577 25 | 322 -335.4              | 3600 – 4400     |               |
| 13.36 – 13.41         |                         |                 |               |

\*Remark

1. Emission level in dB uV/m = 20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor = 40log(Specific distance/ test distance) (dB)  
Limit line=Specific limits(dB uV) + distance extrapolation factor.

### 4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

#### 4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

※ **Remark;**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

#### 4.3.2. Test procedures for conducted spurious emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 4.4.4. The limit for out of band spurious emission at the band edge is 30 dB below the fundamental emission level measured in a 100 kHz bandwidth.

## 4.4. Test result

Ambient temperature: 26 °C

Relative humidity: 46 % R.H.

### 4.4.1. Spurious radiated emission

The frequency spectrum from 9kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

#### -DC 12 V

##### A. Low channel (2 402 MHz)

| Radiated emissions                                                         |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|----------------------------------------------------------------------------|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)                                                            | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

##### B. Middle channel (2 440 MHz)

| Radiated emissions                                                         |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|----------------------------------------------------------------------------|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)                                                            | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

##### C. High channel (2 480 MHz)

| Radiated emissions                                                         |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|----------------------------------------------------------------------------|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)                                                            | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

#### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

# -DC 3.7 V

## A. Low channel (2 402 MHz)

| Radiated emissions                                                         |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|----------------------------------------------------------------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)                                                            | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

## B. Middle channel (2 440 MHz)

| Radiated emissions                                                         |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|----------------------------------------------------------------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)                                                            | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

## C. High channel (2 480 MHz)

| Radiated emissions                                                         |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|----------------------------------------------------------------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)                                                            | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.2. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

##### -DC 12 V

##### A. Low channel (2 402 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.50              | 6.09                 | Peak          | V    | 15.51              | 0.80   | 22.40                 | 40.00                | 17.60       |
| 119.11             | 7.09                 | Peak          | V    | 15.41              | 1.60   | 24.10                 | 43.52                | 19.42       |
| 211.94             | 9.95                 | Peak          | V    | 9.75               | 2.10   | 21.80                 | 43.52                | 21.72       |
| 363.99             | 9.48                 | Peak          | H    | 17.42              | 2.90   | 29.80                 | 46.02                | 16.22       |
| 517.73             | 9.31                 | Peak          | H    | 18.69              | 3.30   | 31.30                 | 46.02                | 14.72       |
| 568.10             | 9.16                 | Peak          | H    | 20.74              | 3.60   | 33.50                 | 46.02                | 12.52       |
| Above 600.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

##### B. Middle channel (2 440 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.48              | 6.07                 | Peak          | V    | 15.51              | 0.80   | 22.38                 | 40.00                | 17.62       |
| 119.16             | 7.05                 | Peak          | V    | 15.41              | 1.60   | 24.06                 | 43.52                | 19.46       |
| 211.98             | 9.98                 | Peak          | V    | 9.75               | 2.10   | 21.83                 | 43.52                | 21.69       |
| 363.92             | 9.53                 | Peak          | H    | 17.42              | 2.90   | 29.85                 | 46.02                | 16.17       |
| 517.65             | 9.36                 | Peak          | H    | 18.69              | 3.30   | 31.35                 | 46.02                | 14.67       |
| 568.03             | 9.19                 | Peak          | H    | 20.74              | 3.60   | 33.53                 | 46.02                | 12.49       |
| Above 600.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

### C. High channel (2 480 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.55              | 6.10                 | Peak          | V    | 15.51              | 0.80   | 22.41                 | 40.00                | 17.59       |
| 119.16             | 7.11                 | Peak          | V    | 15.41              | 1.60   | 24.12                 | 43.52                | 19.40       |
| 211.98             | 9.98                 | Peak          | V    | 9.75               | 2.10   | 21.83                 | 43.52                | 21.69       |
| 363.92             | 9.56                 | Peak          | H    | 17.42              | 2.90   | 29.88                 | 46.02                | 16.14       |
| 517.78             | 9.33                 | Peak          | H    | 18.69              | 3.30   | 31.32                 | 46.02                | 14.70       |
| 568.16             | 9.19                 | Peak          | H    | 20.74              | 3.60   | 33.53                 | 46.02                | 12.49       |
| Above 600.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

#### ※ Remark

- Actual = Reading + Ant. factor + CL (Cable loss)
- 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

# -DC 3.7 V

## A. Low channel (2 402 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.21              | 4.09                 | Peak          | V    | 15.51              | 0.80   | 20.40                 | 40.00                | 19.60       |
| 61.59              | 14.61                | Peak          | V    | 4.49               | 1.20   | 20.30                 | 40.00                | 19.70       |
| 141.35             | 0.83                 | Peak          | H    | 19.77              | 1.80   | 22.40                 | 43.52                | 21.12       |
| 437.53             | 8.78                 | Peak          | H    | 17.42              | 2.90   | 29.10                 | 46.02                | 16.92       |
| 499.99             | 8.11                 | Peak          | V    | 18.69              | 3.30   | 30.10                 | 46.02                | 15.92       |
| 665.10             | 6.05                 | Peak          | V    | 21.45              | 3.90   | 31.40                 | 46.02                | 14.62       |
| Above 700.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

## B. Middle channel (2 440 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.26              | 4.10                 | Peak          | V    | 15.51              | 0.80   | 20.41                 | 40.00                | 19.59       |
| 61.62              | 14.63                | Peak          | V    | 4.49               | 1.20   | 20.32                 | 40.00                | 19.68       |
| 141.37             | 0.88                 | Peak          | H    | 19.77              | 1.80   | 22.45                 | 43.52                | 21.07       |
| 437.55             | 8.81                 | Peak          | H    | 17.42              | 2.90   | 29.13                 | 46.02                | 16.89       |
| 499.92             | 8.16                 | Peak          | V    | 18.69              | 3.30   | 30.15                 | 46.02                | 15.87       |
| 665.16             | 6.09                 | Peak          | V    | 21.45              | 3.90   | 31.44                 | 46.02                | 14.58       |
| Above 700.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

### ※ Remark

- Actual = Reading + Ant. factor + CL (Cable loss)
- 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

### C. High channel (2 480 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |        | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|--------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor(dB/m)  | CL(dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 32.19              | 4.15                 | Peak          | V    | 15.51              | 0.80   | 20.46                 | 40.00                | 19.54       |
| 61.52              | 14.52                | Peak          | V    | 4.49               | 1.20   | 20.21                 | 40.00                | 19.79       |
| 141.36             | 0.89                 | Peak          | H    | 19.77              | 1.80   | 22.46                 | 43.52                | 21.06       |
| 437.53             | 8.72                 | Peak          | H    | 17.42              | 2.90   | 29.04                 | 46.02                | 16.98       |
| 499.92             | 8.18                 | Peak          | V    | 18.69              | 3.30   | 30.17                 | 46.02                | 15.85       |
| 665.18             | 6.11                 | Peak          | V    | 21.45              | 3.90   | 31.46                 | 46.02                | 14.56       |
| Above 700.00       | Not Detected         | -             | -    | -                  | -      | -                     | -                    | -           |

#### ※ Remark

- Actual = Reading + Ant. factor + CL (Cable loss)
- 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

#### -DC 12 V

##### A. Low channel (2 402 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 803.95           | 67.40                | Peak          | V    | 32.89              | 32.12         | 68.17                 | 74.00                | 5.83        |
| 4 803.95           | 51.08                | Average       | V    | 32.89              | 32.12         | 51.85                 | 54.00                | 2.15        |
| Above 5 000.00     | -                    | -             | -    | -                  | -             | -                     | -                    | -           |

##### B. Middle channel (2 440 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 880.43           | 71.09                | Peak          | V    | 32.89              | 32.12         | 71.86                 | 74.00                | 2.14        |
| 4 880.43           | 51.47                | Average       | V    | 32.89              | 32.12         | 52.24                 | 54.00                | 1.76        |
| 7 320.65           | 58.08                | Peak          | V    | 35.64              | 25.35         | 68.37                 | 74.00                | 5.63        |
| 7 320.65           | 40.86                | Average       | V    | 35.64              | 25.35         | 51.15                 | 54.00                | 2.85        |
| Above 8 000.00     | -                    | -             | -    | -                  | -             | -                     | -                    | -           |

#### ※ Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
5. 15.31 Measurement standards.

### C. High channel (2 480 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4 959.44           | 69.78                | Peak          | V    | 32.89              | 32.12         | 70.55                 | 74.00                | 3.45        |
| 4 959.44           | 51.09                | Average       | V    | 32.89              | 32.12         | 51.86                 | 54.00                | 2.14        |
| 7 439.44           | 57.49                | Peak          | V    | 35.64              | 25.35         | 67.78                 | 74.00                | 6.22        |
| 7 439.44           | 41.31                | Average       | V    | 35.64              | 25.35         | 51.60                 | 54.00                | 2.40        |
| Above 8 000.00     | -                    | -             | -    | -                  | -             | -                     | -                    | -           |

#### ※ Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

# -DC 3.7 V

## A. Low channel (2 402 MHz)

| Radiated emissions |                |               | Ant. | Correction factors |               | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4804.55            | 66.20          | Peak          | V    | 32.89              | 32.12         | 66.97           | 74.00          | 7.03        |
| 4804.55            | 50.23          | Average       | V    | 32.89              | 32.12         | 51.00           | 54.00          | 3.00        |
| Above 5 000.00     | -              | -             | -    | -                  | -             | -               | -              | -           |

## B. Middle channel (2 440 MHz)

| Radiated emissions |                |               | Ant. | Correction factors |               | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4881.62            | 70.25          | Peak          | V    | 32.89              | 32.12         | 71.02           | 74.00          | 2.98        |
| 4881.62            | 51.35          | Avg           | V    | 32.89              | 32.12         | 52.12           | 54.00          | 1.88        |
| 7322.52            | 58.02          | Peak          | V    | 35.64              | 25.35         | 68.31           | 74.00          | 5.69        |
| 7322.52            | 38.36          | Avg           | V    | 35.64              | 25.35         | 48.65           | 54.00          | 5.35        |
| Above 8 000.00     | -              | -             | -    | -                  | -             | -               | -              | -           |

### ※ Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
5. 15.31 Measurement standards.

### C. High channel (2 480 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 4958.26            | 68.72                | Peak          | V    | 32.89              | 32.12         | 69.49                 | 74.00                | 4.51        |
| 4958.26            | 50.26                | Avg           | V    | 32.89              | 32.12         | 51.03                 | 54.00                | 2.97        |
| 7436.35            | 56.32                | Peak          | V    | 35.64              | 25.35         | 66.61                 | 74.00                | 7.39        |
| 7436.35            | 42.02                | Avg           | V    | 35.64              | 25.35         | 52.31                 | 54.00                | 1.69        |
| Above 8 000.00     | -                    | -             | -    | -                  | -             | -                     | -                    | -           |

#### ※ Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

## 4.5 Radiated Band Edge

### 4.5.1 Limit of Radiated Band Edges

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in test restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                       | 300                           |
| 0.490 – 1.705   | 24000/F(kHz)                      | 30                            |
| 1.705 – 30.0    | 30                                | 30                            |
| 30 – 88         | 100                               | 3                             |
| 88 – 216        | 150                               | 3                             |
| 216 - 960       | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

### 4.5.2 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement. For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.


### 4.5.3. Test Result

#### -DC 12 V


##### A. 2 310 - 2 390 MHz measurement (2 402MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 360.65           | 56.77                | Peak          | V    | 28.21              | 34.77         | 50.21                 | 74.00                | 23.79       |
| 2 337.26           | 45.99                | Average       | V    | 28.21              | 34.77         | 39.43                 | 54.00                | 14.57       |
| 2 375.70           | 47.60                | Peak          | H    | 28.21              | 34.77         | 41.04                 | 74.00                | 32.96       |
| 2 337.26           | 36.32                | Average       | H    | 28.21              | 34.77         | 29.76                 | 54.00                | 24.24       |


#### Emission level measurement

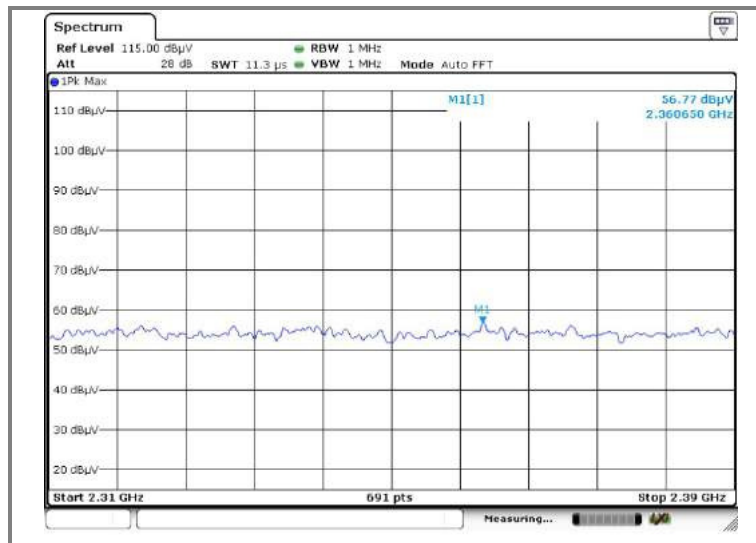


#### Emission level measurement

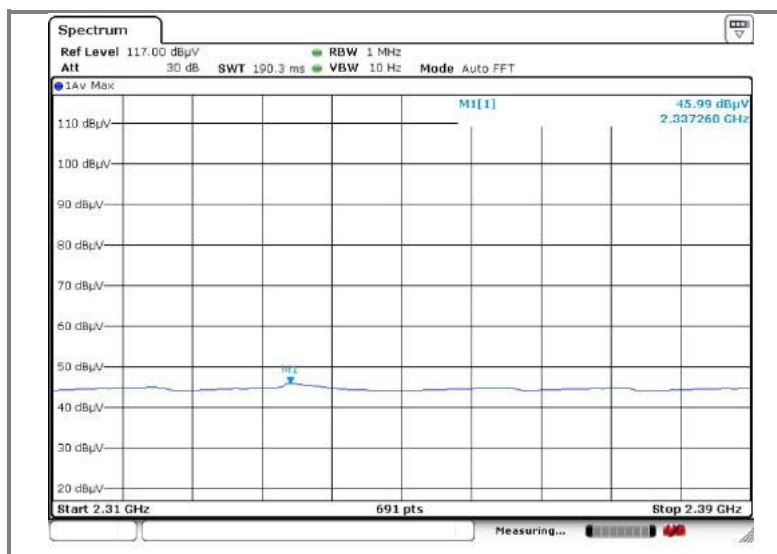

## Emission level measurement

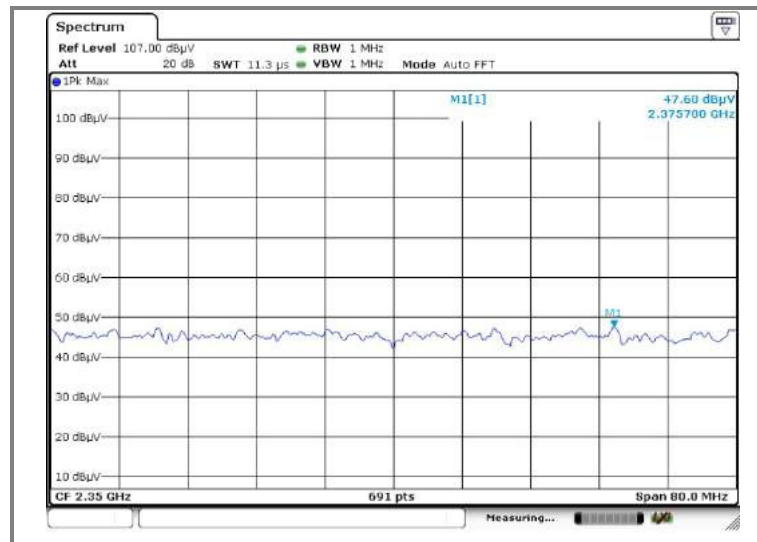


## Emission level measurement

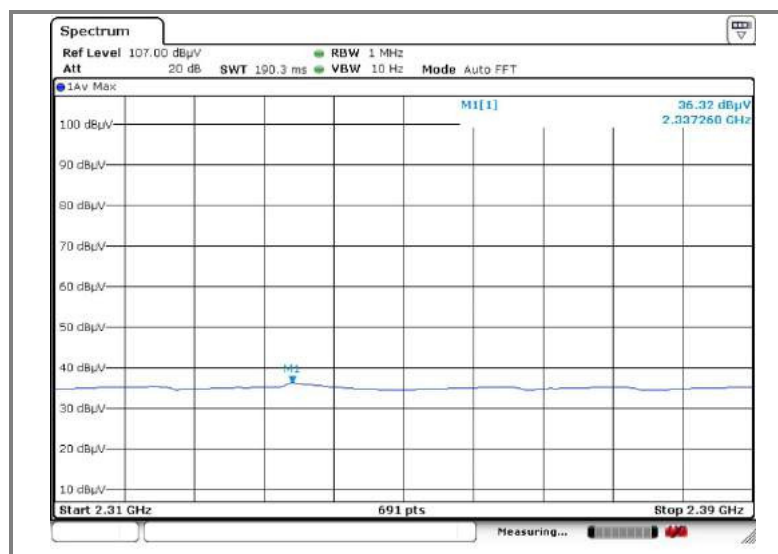


## B. 2 483.5 – 2 500 MHz measurement (2 480MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 483.68           | 61.36                | Peak          | V    | 28.21              | 34.77         | 54.80                 | 74.00                | 19.20       |
| 2 499.99           | 45.06                | Average       | V    | 28.21              | 34.77         | 38.50                 | 54.00                | 15.50       |
| 2 483.54           | 53.49                | Peak          | H    | 28.21              | 34.77         | 46.93                 | 74.00                | 27.07       |
| 2 499.99           | 35.44                | Average       | H    | 28.21              | 34.77         | 28.88                 | 54.00                | 25.12       |


### Emission level measurement

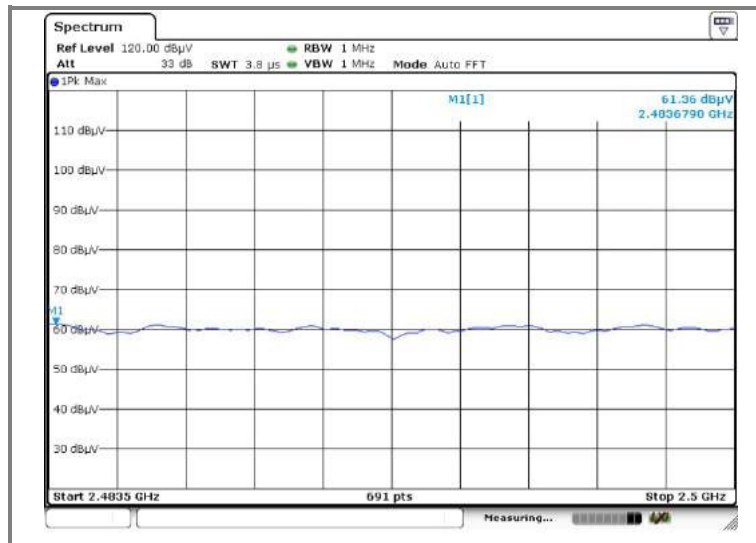


### Emission level measurement

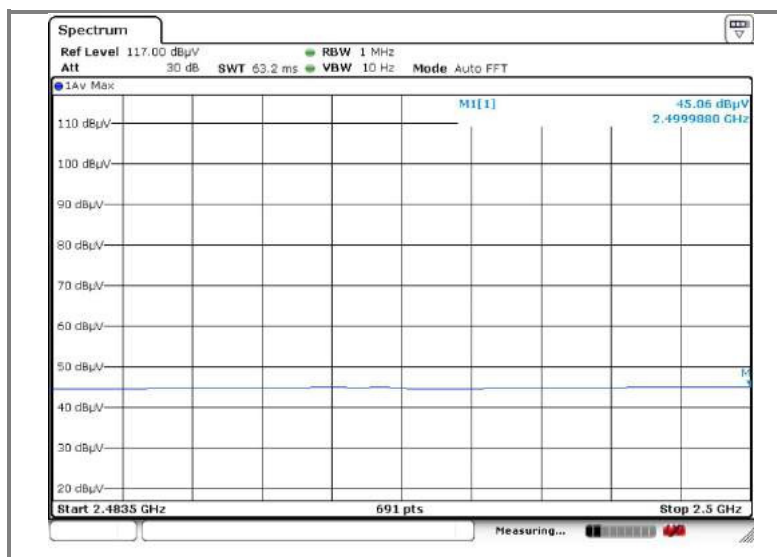

## Emission level measurement

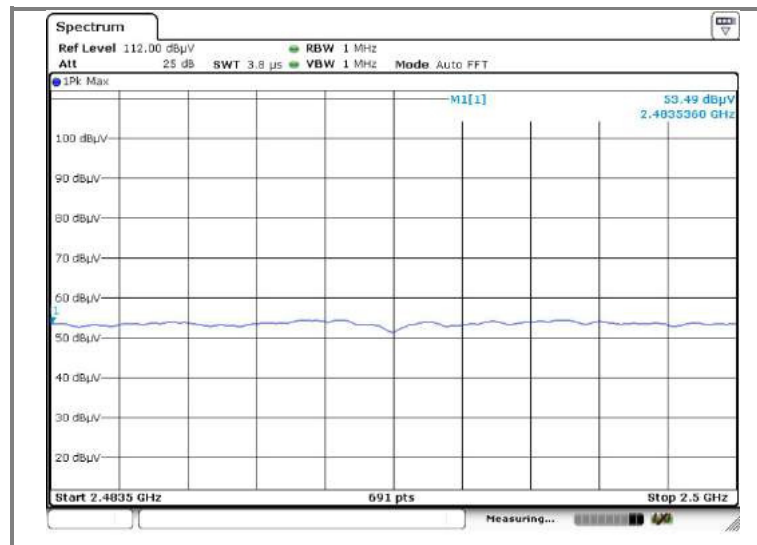

## Emission level measurement

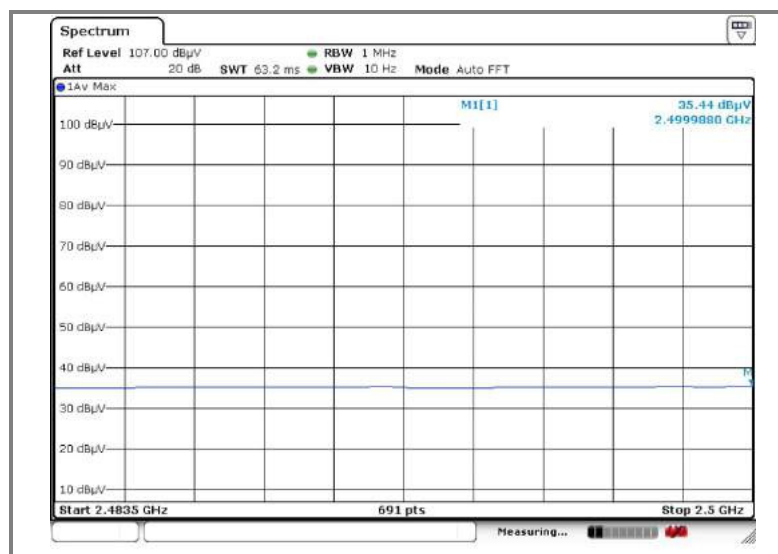


# -DC 3.7 V


## A. 2 310 - 2 390 MHz measurement (2 402MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 334.02           | 55.32                | Peak          | V    | 28.21              | 34.77         | 48.76                 | 74.00                | 25.24       |
| 2 337.26           | 42.48                | Average       | V    | 28.21              | 34.77         | 35.92                 | 54.00                | 18.08       |
| 2 372.23           | 52.04                | Peak          | H    | 28.21              | 34.77         | 45.48                 | 74.00                | 28.52       |
| 2 337.26           | 35.60                | Average       | H    | 28.21              | 34.77         | 29.04                 | 54.00                | 24.96       |


## Emission level measurement

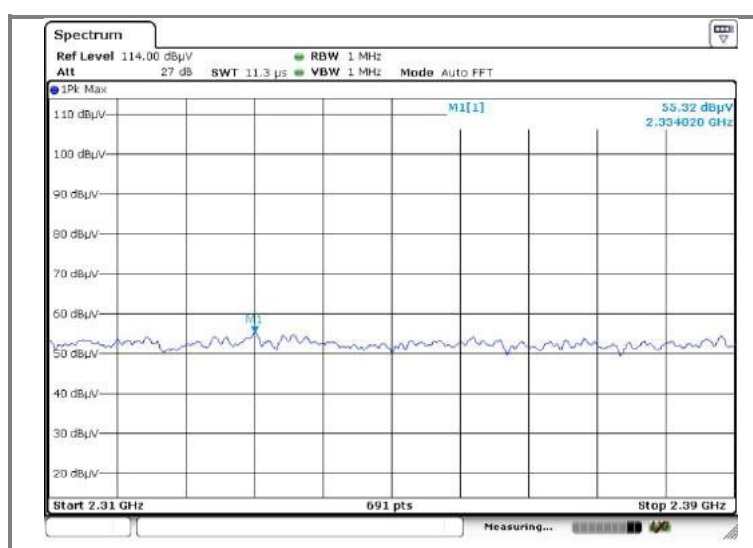


## Emission level measurement

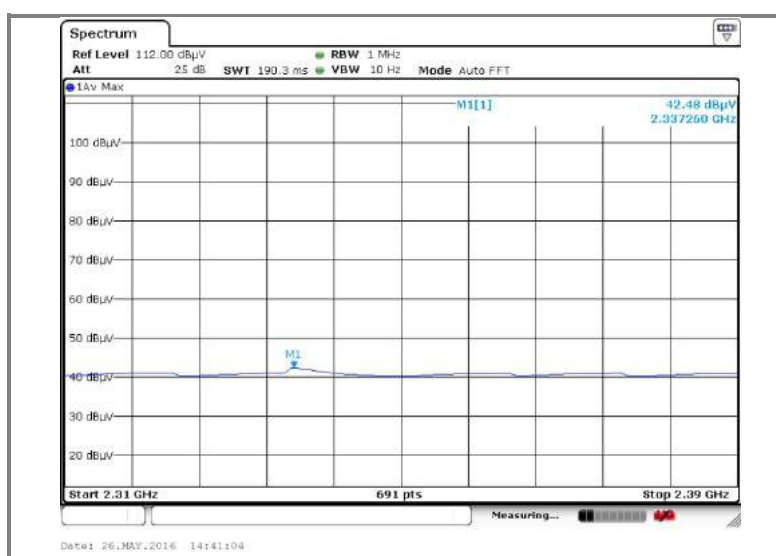

## Emission level measurement

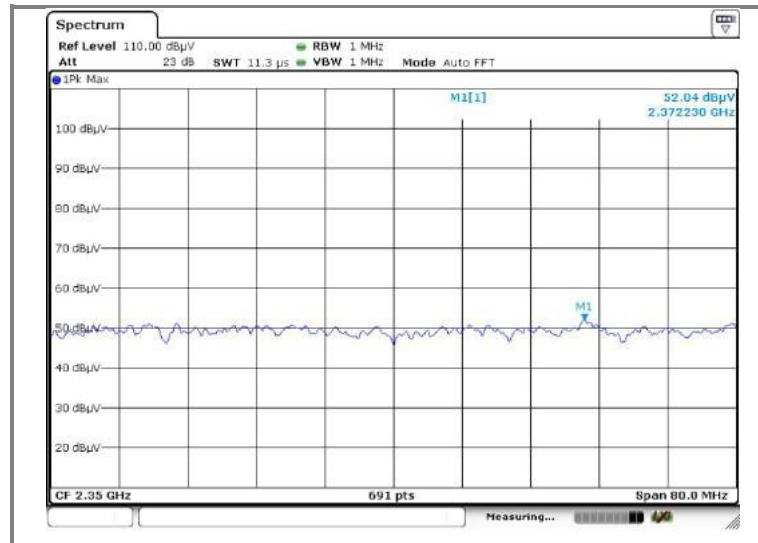


## Emission level measurement

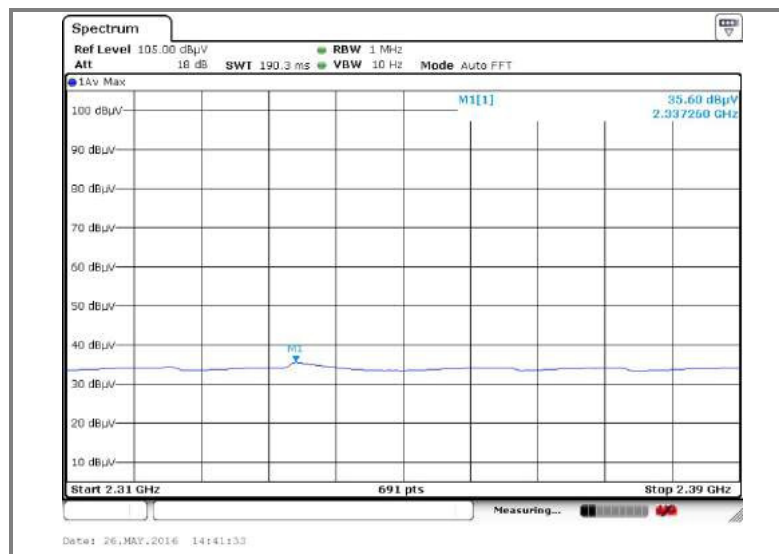


## B. 2 483.5 – 2 500 MHz measurement (2 480MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |               | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 2 483.73           | 61.05                | Peak          | V    | 28.21              | 34.77         | 54.49                 | 74.00                | 19.51       |
| 2 490.37           | 41.84                | Average       | V    | 28.21              | 34.77         | 35.28                 | 54.00                | 18.72       |
| 2 484.04           | 53.57                | Peak          | H    | 28.21              | 34.77         | 47.01                 | 74.00                | 26.99       |
| 2 488.55           | 38.02                | Average       | H    | 28.21              | 34.77         | 31.46                 | 54.00                | 22.54       |


### Emission level measurement

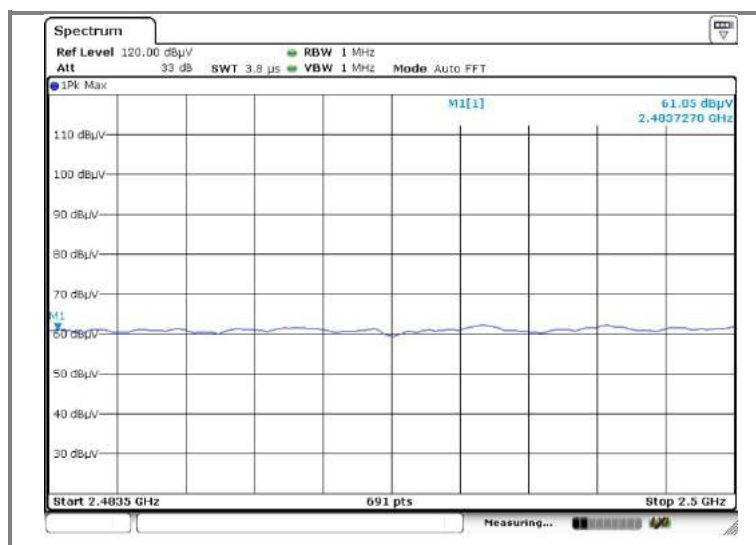


### Emission level measurement

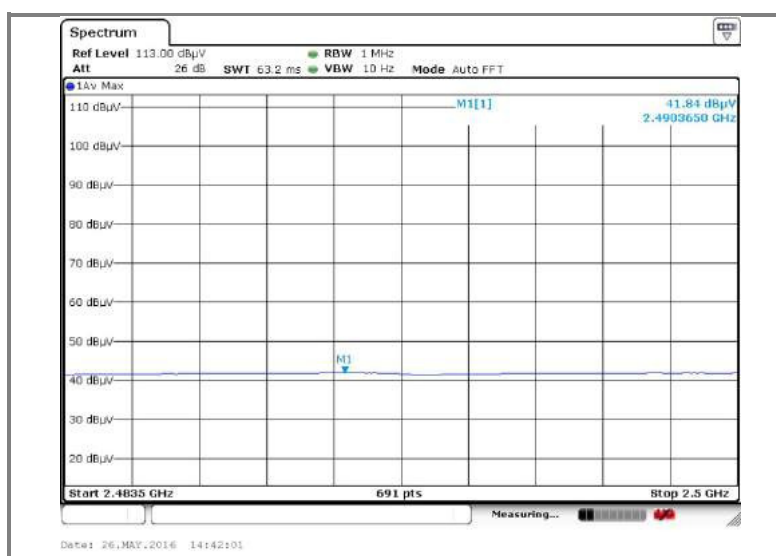

## Emission level measurement

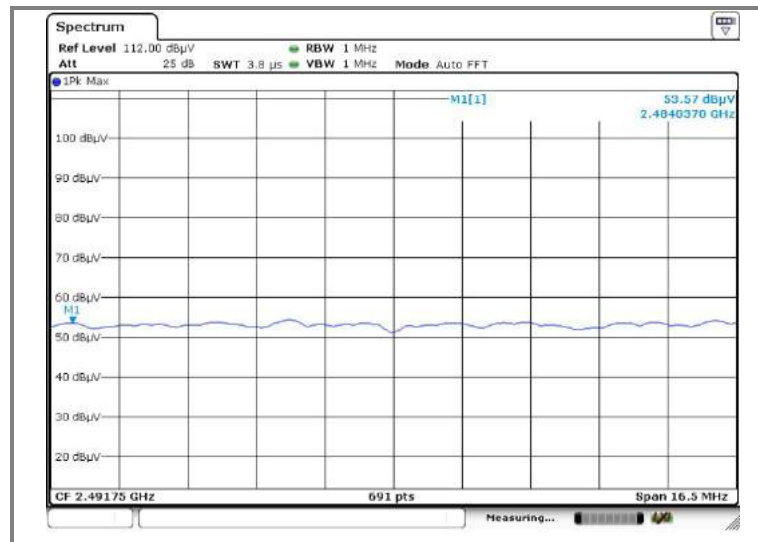

## Emission level measurement

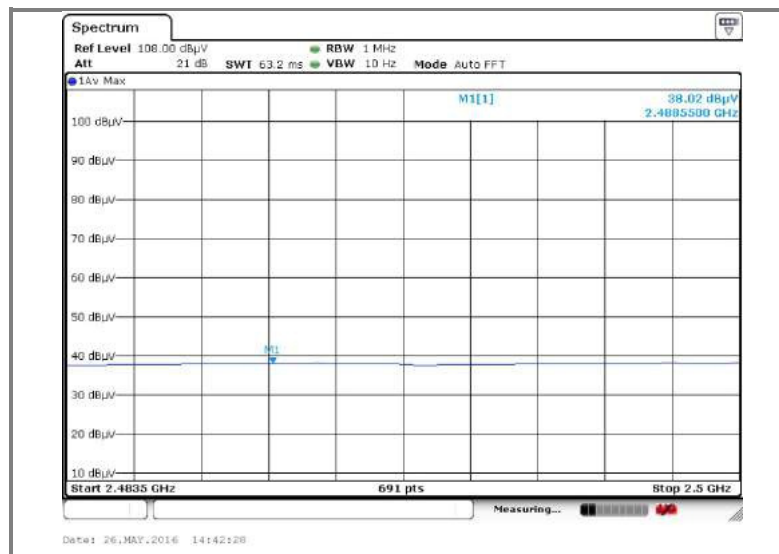

## 4.6. Out of Band Emissions in non-restricted frequency band

### 4.6.1. Test requirements and limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc). If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

### 4.6.2. Test procedure

#### Reference Level Measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow the trace to stabilize.
8. Use the peak marker function to determine the maximum PSD level.

#### Emission Level Measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz
3. Set the VBW  $\geq 3 \times$  RBW
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow the trace to stabilize.
8. Use the peak marker function to determine the maximum amplitude level.


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 100 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

**4.6.3. Test results :** **Comply** (refer to Next page – test plots)


## -DC 12 V

### A. Low channel (2 402 MHz)


#### Reference level measurement 1

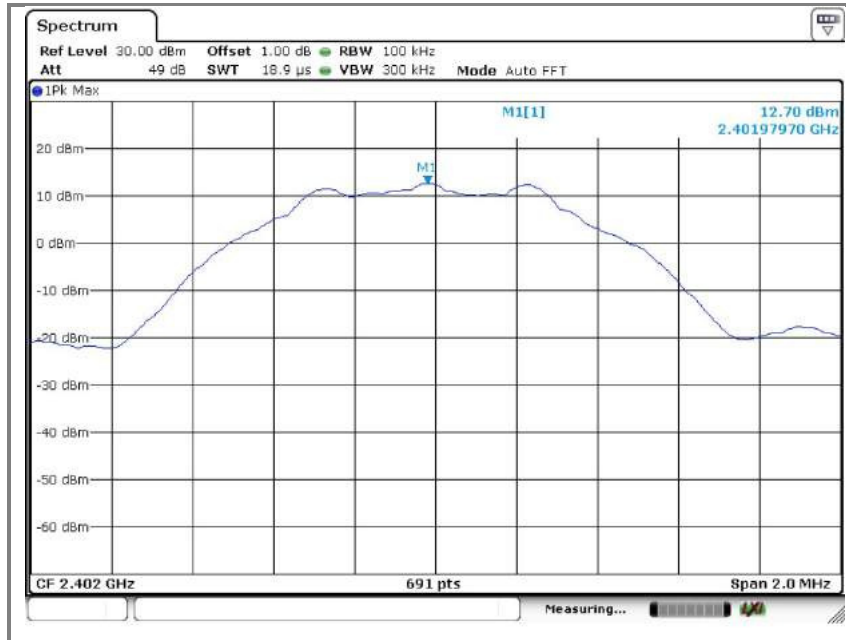

#### Emission level measurement 1

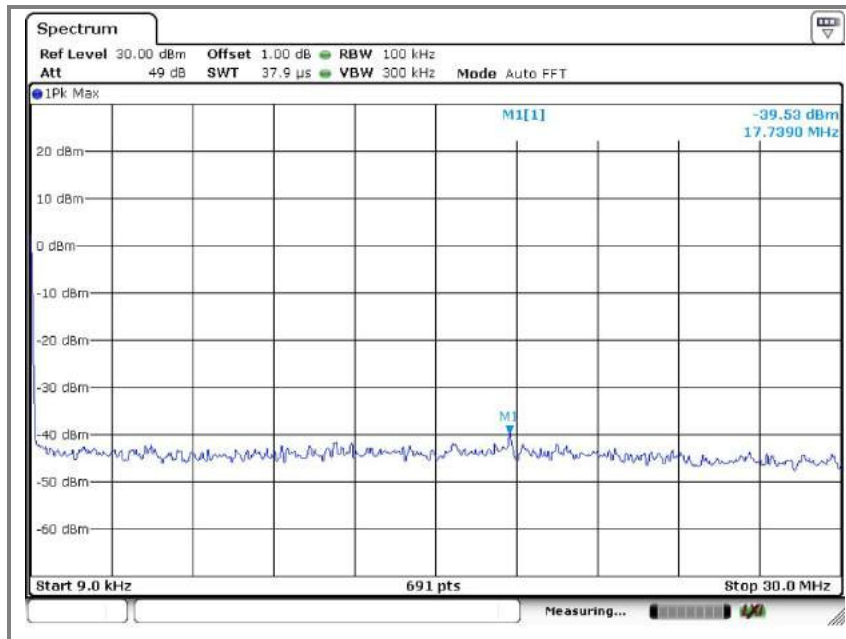


## Emission level measurement 2

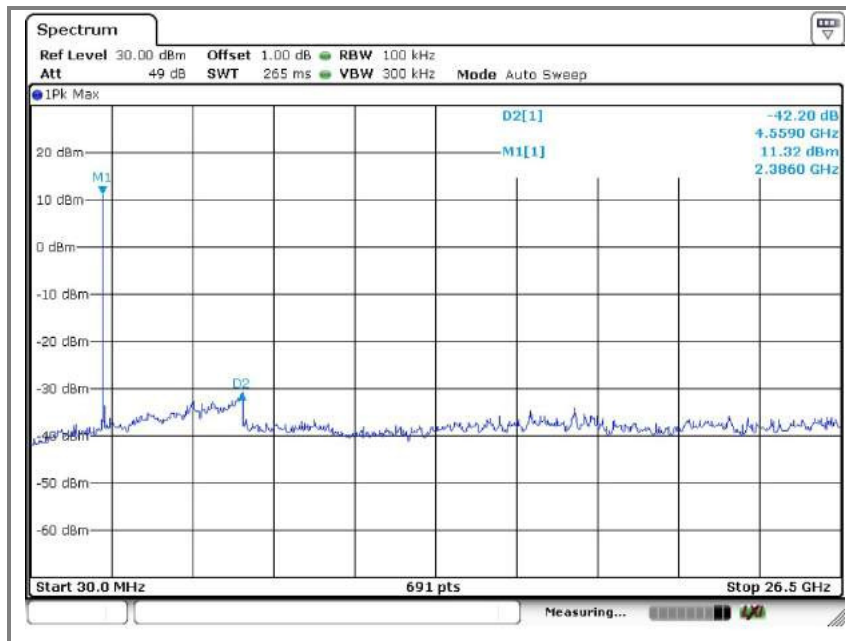


## B. Middle channel (2 440 MHz)


### Reference level measurement 1

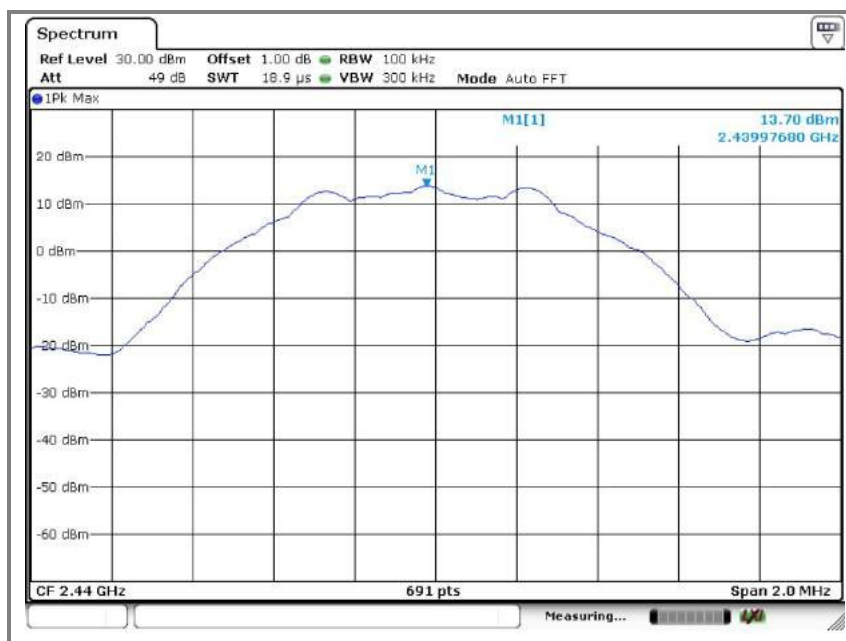

## Emission level measurement 1

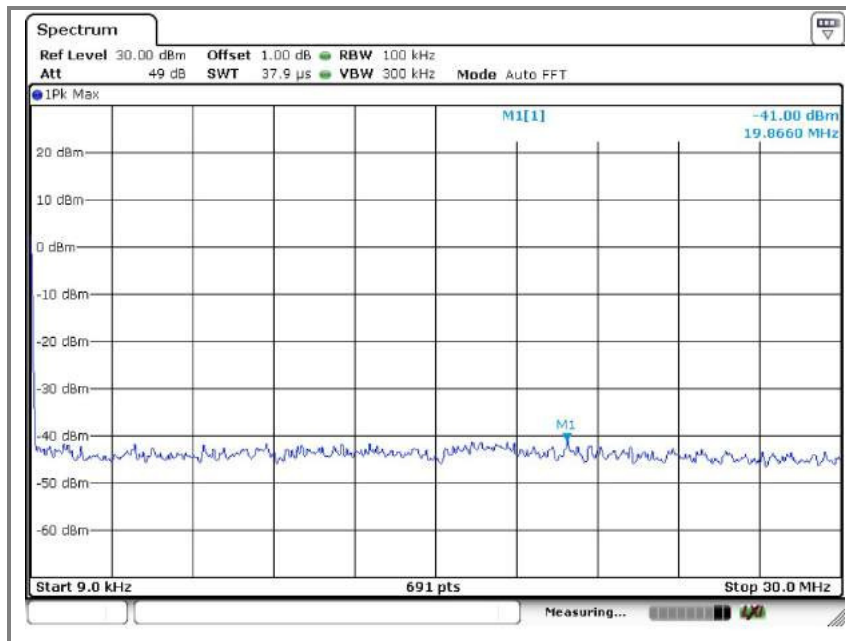


## Emission level measurement 2

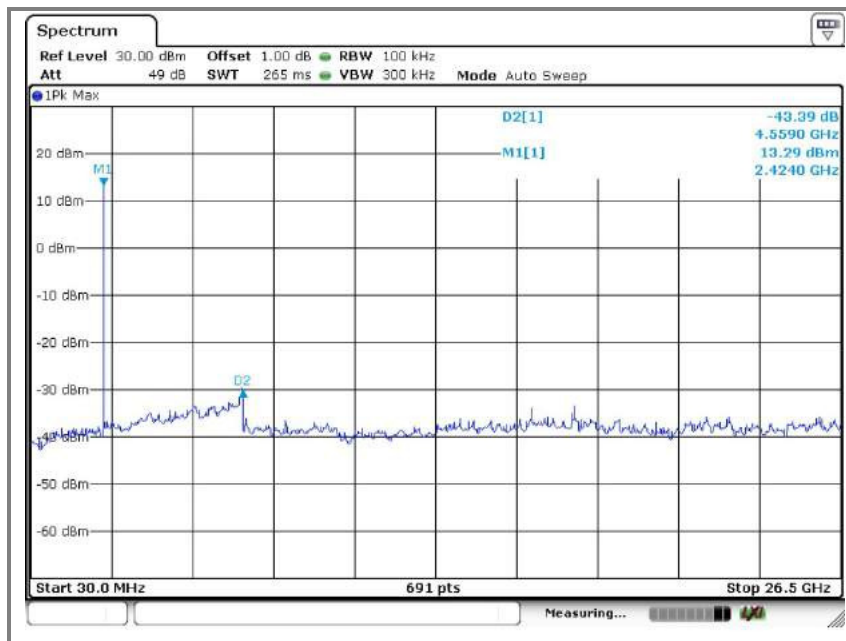


### C. High channel (2 480 MHz)


### Reference level measurement 1

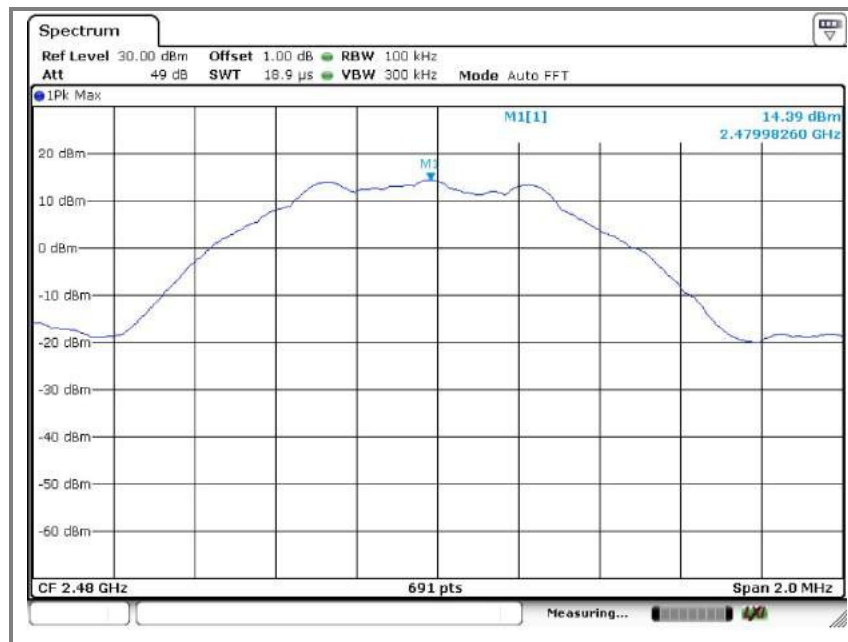

### Emission level measurement 1

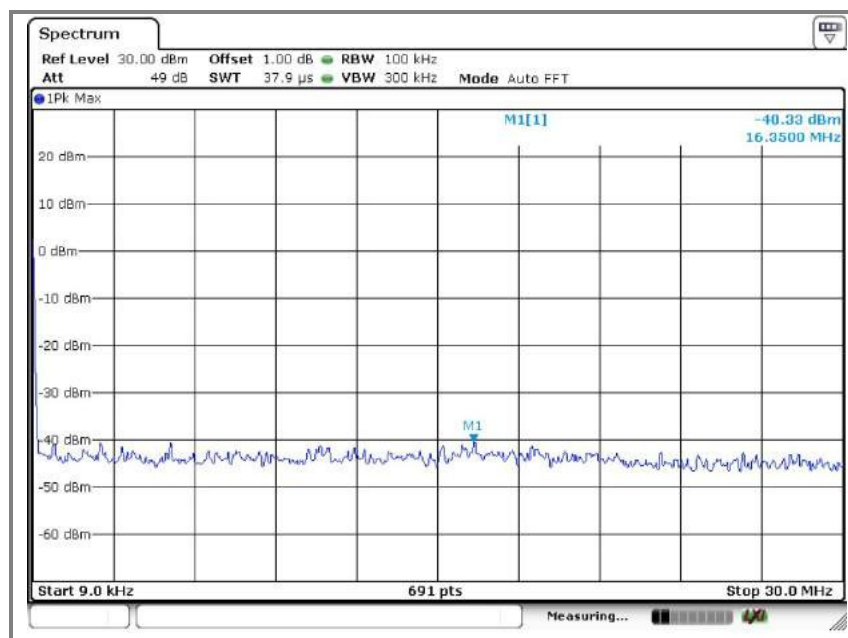

## Emission level measurement 2

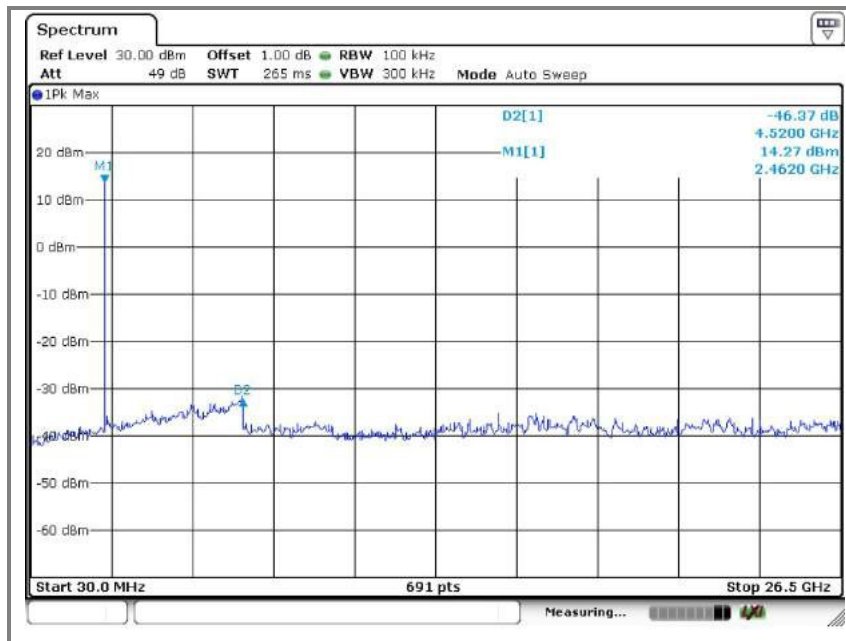


## -DC 3.7 V

### A. Low channel (2 402 MHz)


## Reference level measurement 1



## Emission level measurement 1

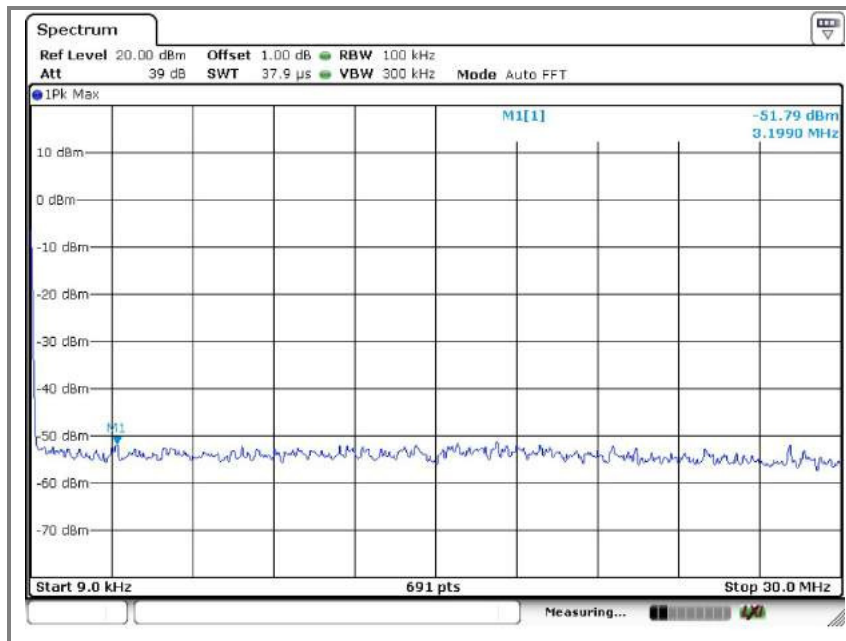


## Emission level measurement 2

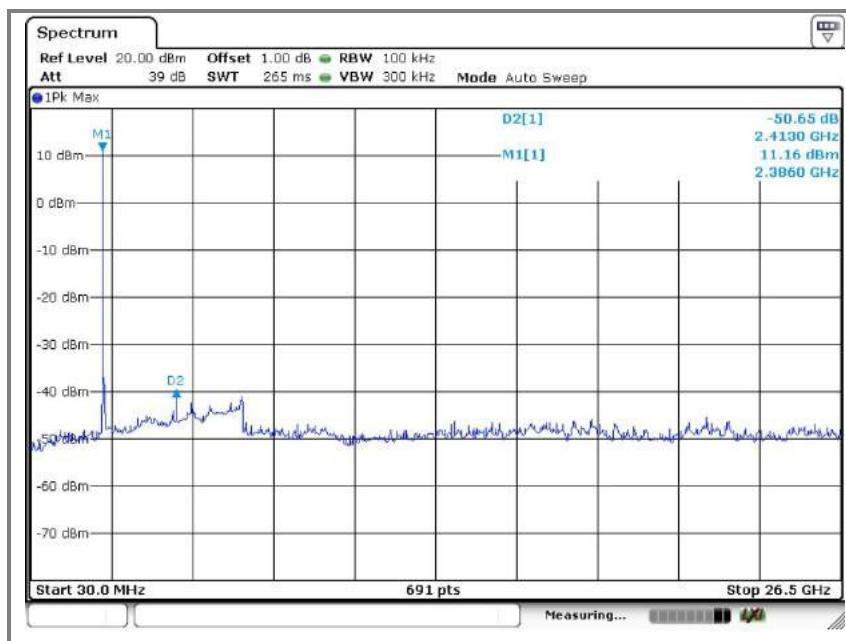


## B. Middle channel (2 440 MHz)


### Reference level measurement 1

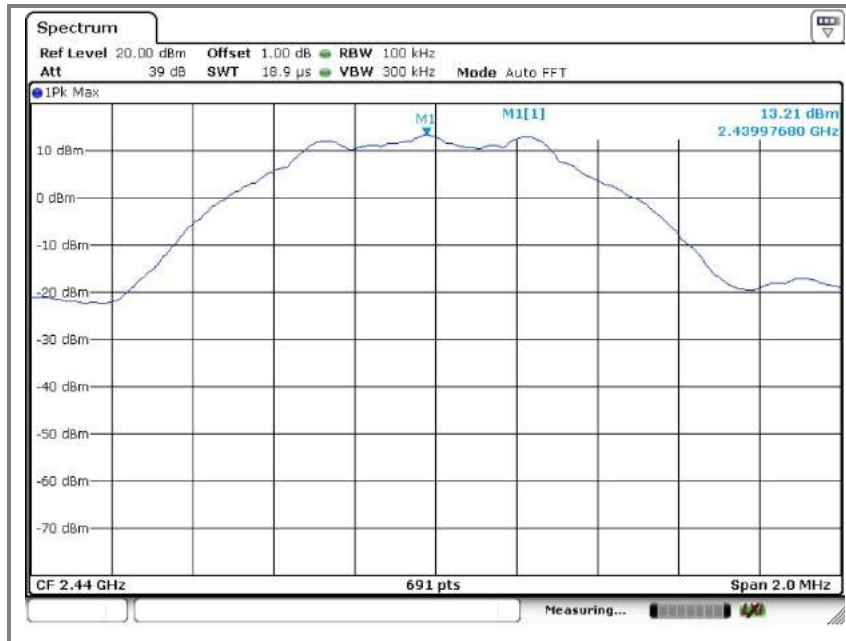

### Emission level measurement 1

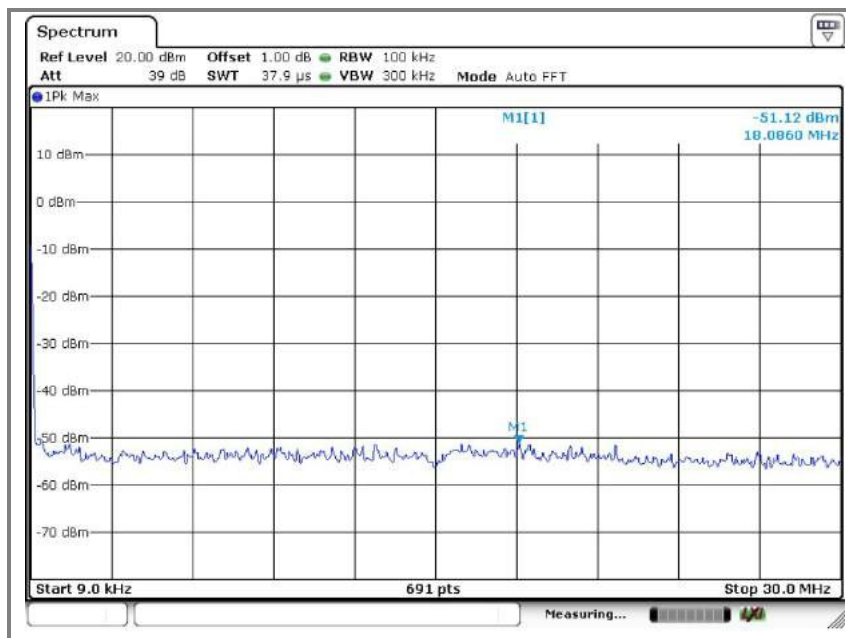


## Emission level measurement 2

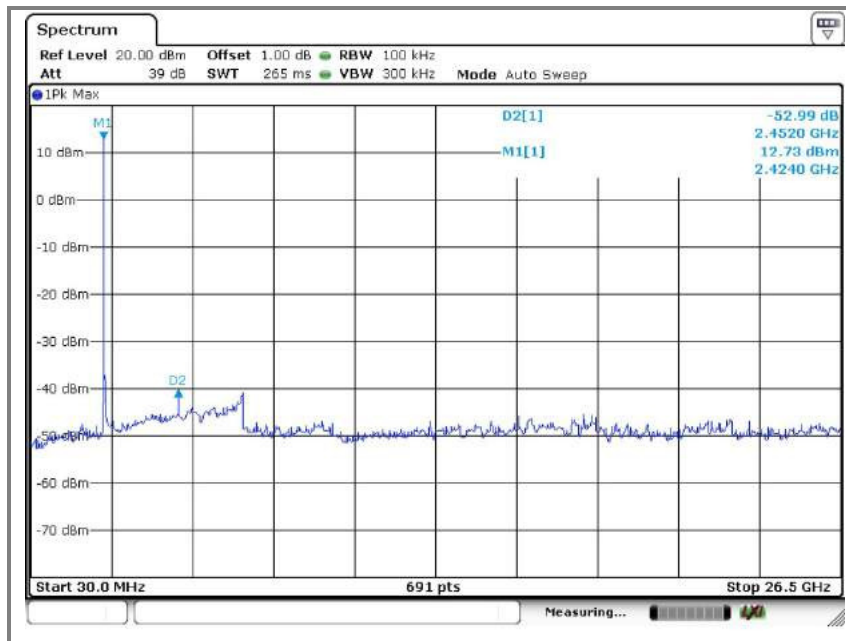


## C. High channel (2 480 MHz)


### Reference level measurement 1

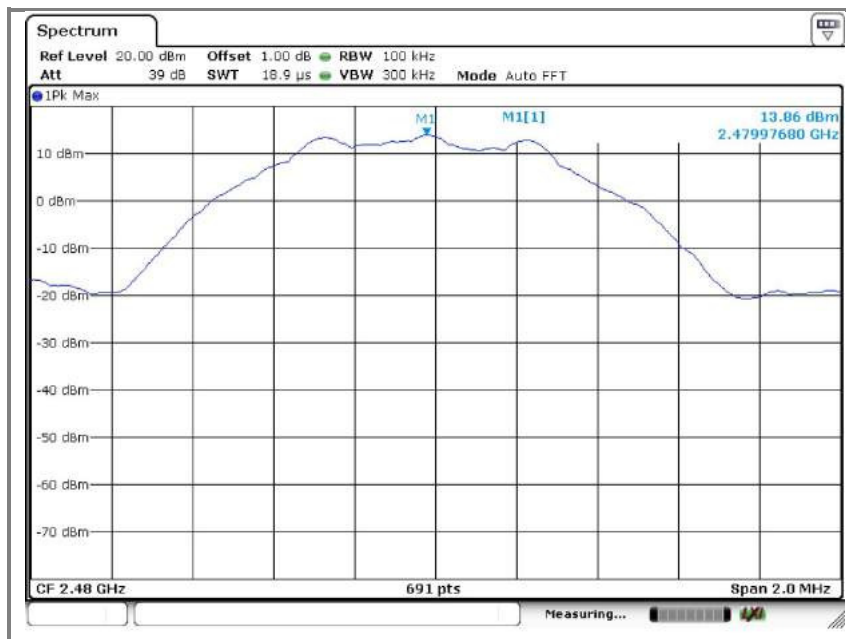

## Emission level measurement 1

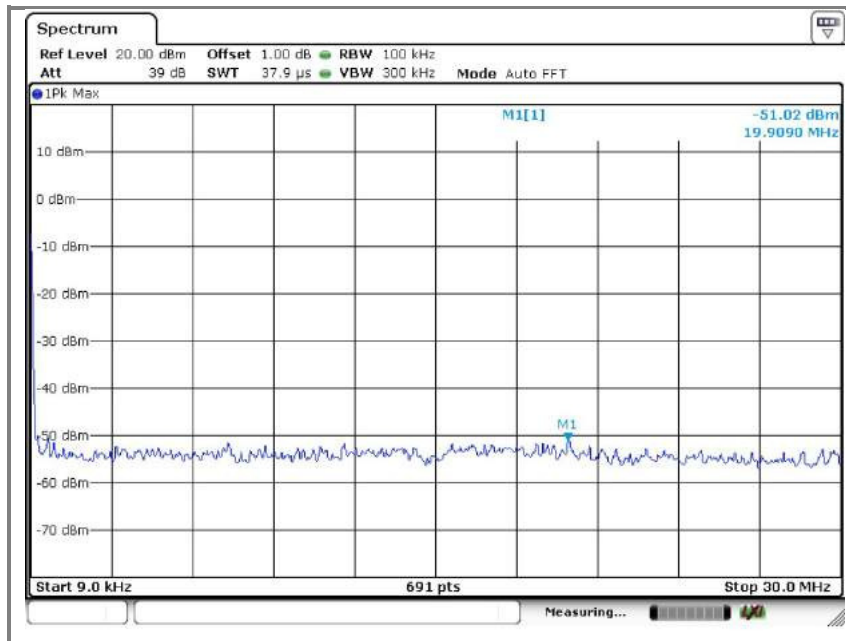


## Emission level measurement 2

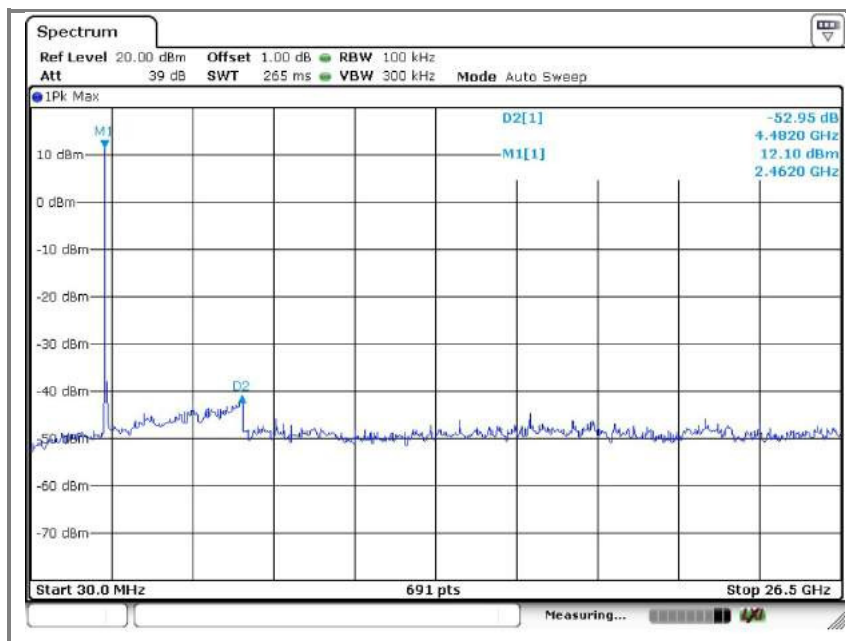

## 5. 6 dB bandwidth

### 5.1. Test setup



### 5.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz

### 5.3. Test procedure

1. The 6 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100kHz, VBW ≥ 3 x RBW, Span= 2 times the DTS bandwidth  
Detector = peak, Trace = max hold, Sweep=auto couple

### 5.4. Test results


Ambient temperature: 26 °C

Relative humidity: 46 % R.H.


| Power Supply | Frequency(MHz) | 6 dB bandwidth(MHz) |
|--------------|----------------|---------------------|
| DC 12 V      | 2 402          | 0.686               |
|              | 2 440          | 0.686               |
|              | 2 480          | 0.689               |
| DC 3.7 V     | 2 402          | 0.689               |
|              | 2 440          | 0.683               |
|              | 2 480          | 0.689               |

## -DC 12 V


### A. Low channel (2 402 MHz)

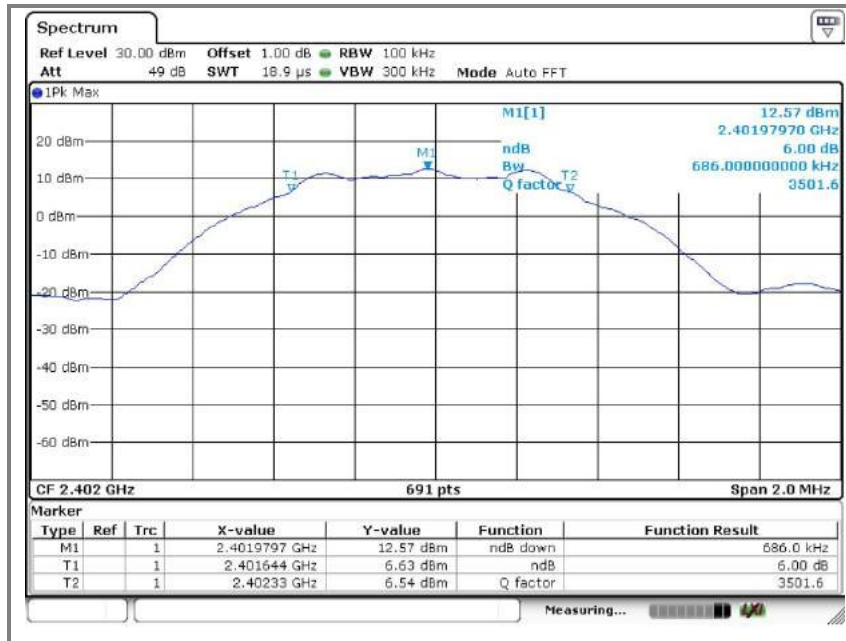

### B. Middle channel (2 440 MHz)

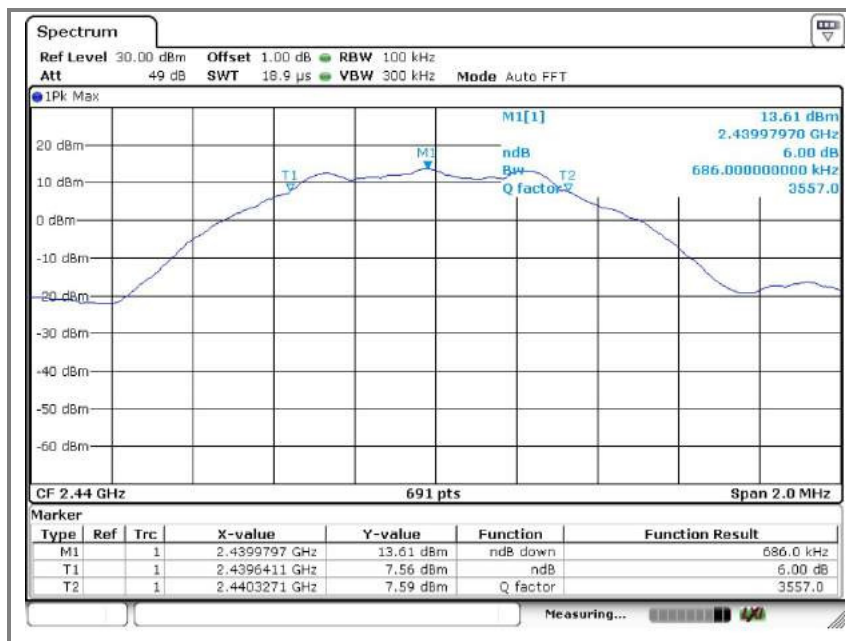


### C. High channel (2 480 MHz)

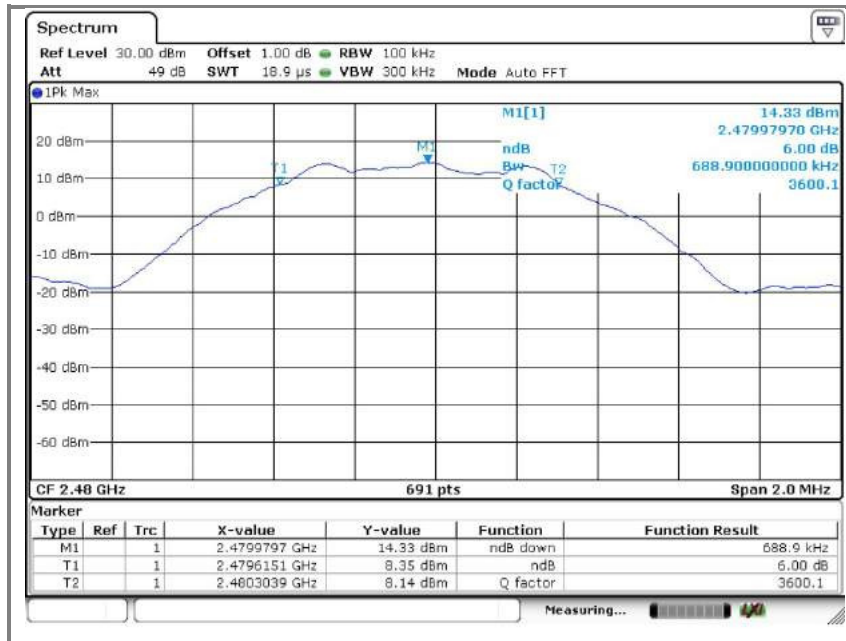


### -DC 3.7 V


#### A. Low channel (2 402 MHz)

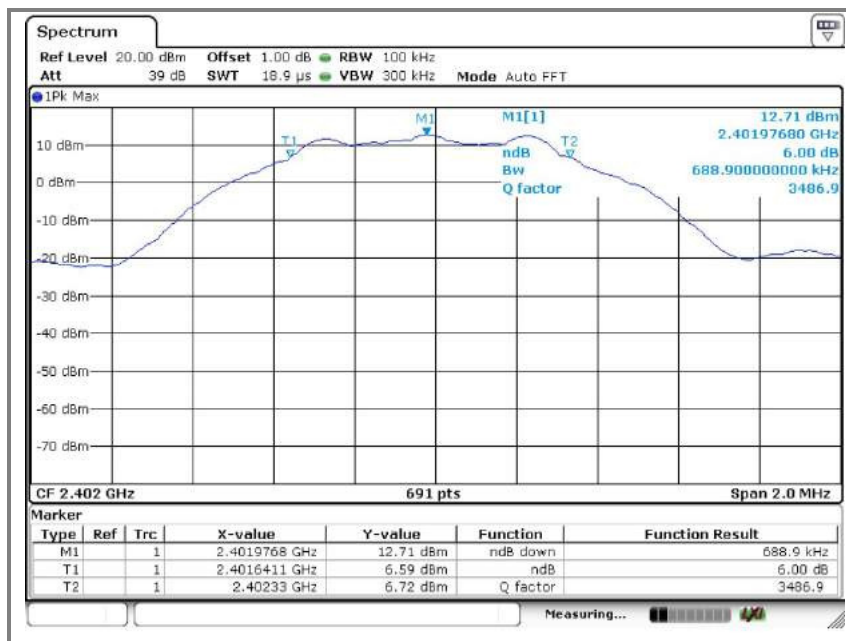

## B. Middle channel (2 440 MHz)

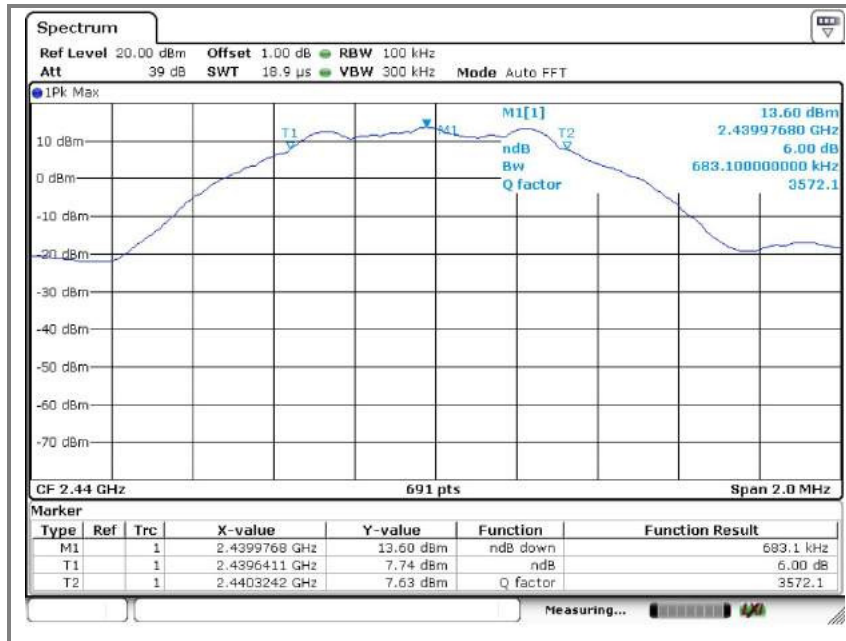


## C. High channel (2 480 MHz)

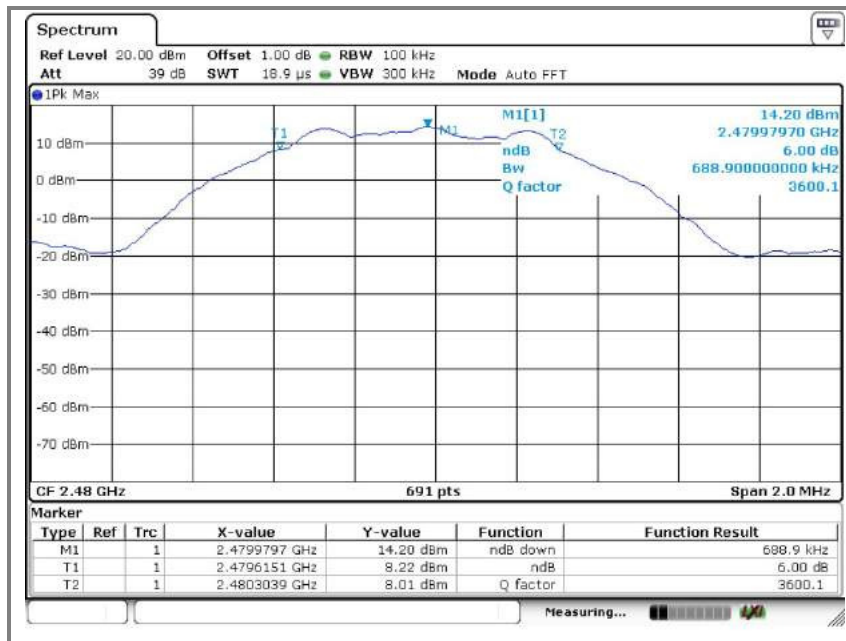

## 6. Maximum Output Power Measurement

### 6.1. Test setup.



### 6.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

- §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 6 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
- §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

### 6.3 Test procedure

Maximum Peak Conducted Output Power is measured using the following procedure (RBW ≥ DTS bandwidth).

- Set the RBW ≥ DTS bandwidth.
- Set VBW ≥ 3 x RBW. / Set span ≥ 3 x RBW.
- Sweep time = auto couple
- Detector = peak
- Trace mode = max hold
- Allow trace to fully stabilize
- Use peak marker function to determine the peak amplitude level.

### 6.4 Test results


Ambient temperature: 26 °C

Relative humidity: 46 % R.H.


| Power Supply | Frequency (MHz) | Conducted power (dBm) | Limit (dBm) |
|--------------|-----------------|-----------------------|-------------|
| DC 12 V      | 2 402           | 14.33                 | 30          |
|              | 2 440           | 15.38                 |             |
|              | 2 480           | 16.14                 |             |
| DC 3.7 V     | 2 402           | 14.21                 |             |
|              | 2 440           | 15.38                 |             |
|              | 2 480           | 16.08                 |             |

## -DC 12 V


### A. Low channel (2 402 MHz)

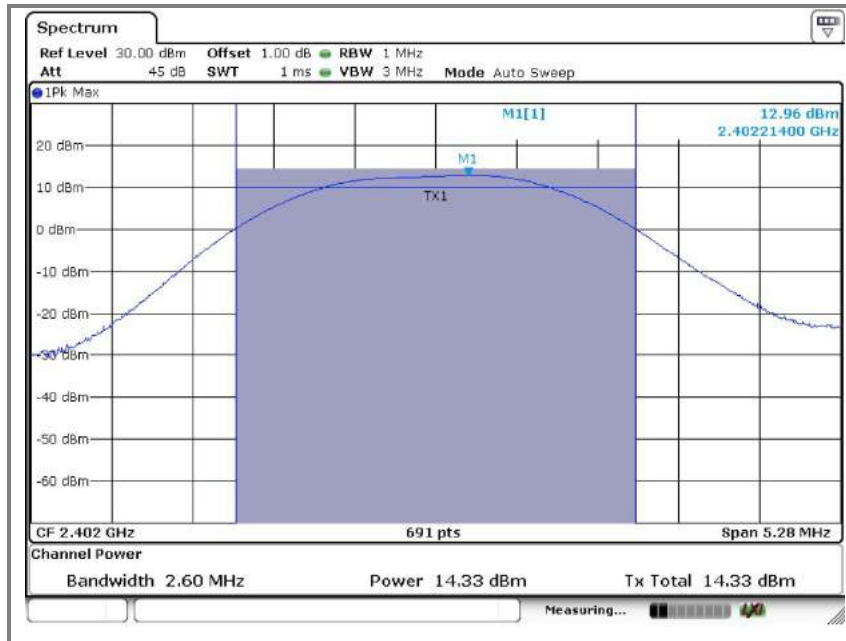

### B. Middle channel (2 440 MHz)

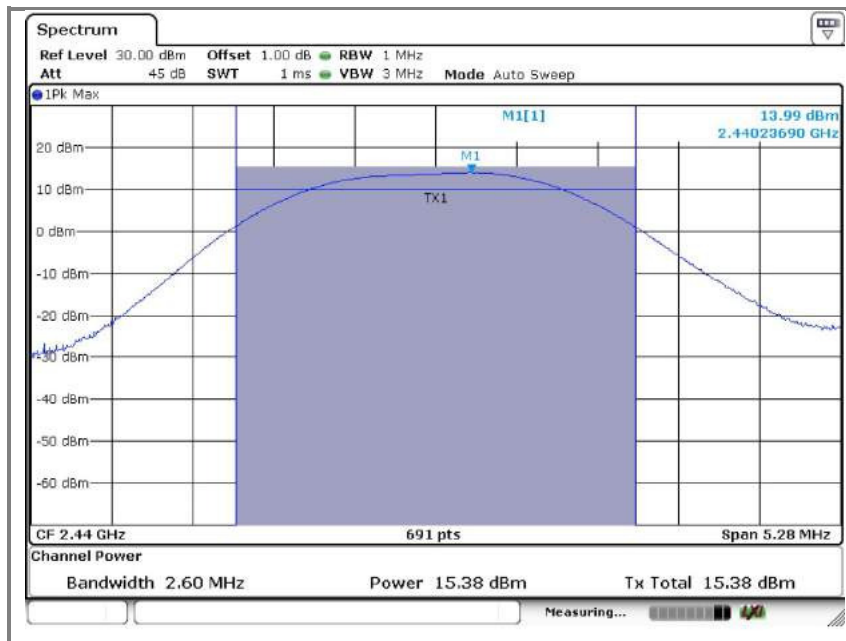


### C. High channel (2 480 MHz)

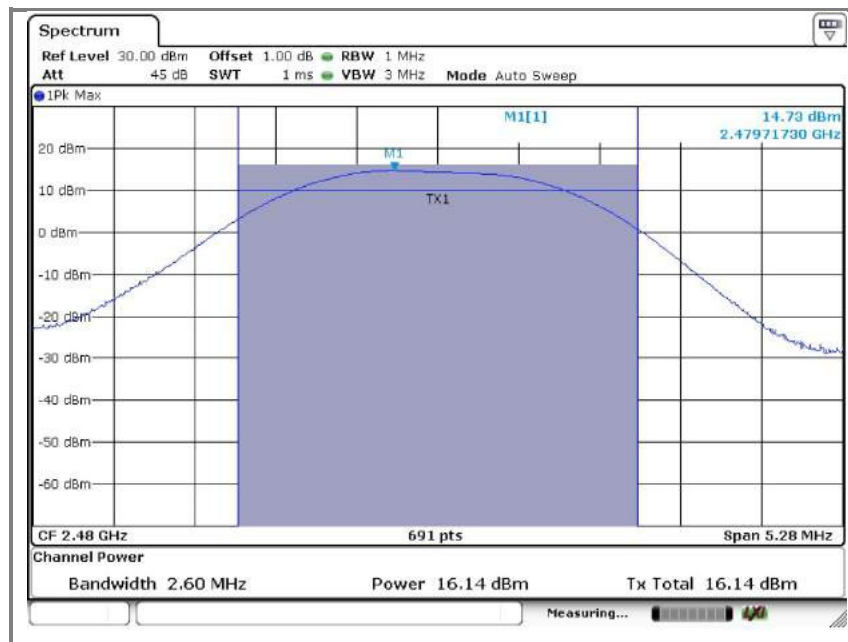


### -DC 3.7 V


#### A. Low channel (2 402 MHz)

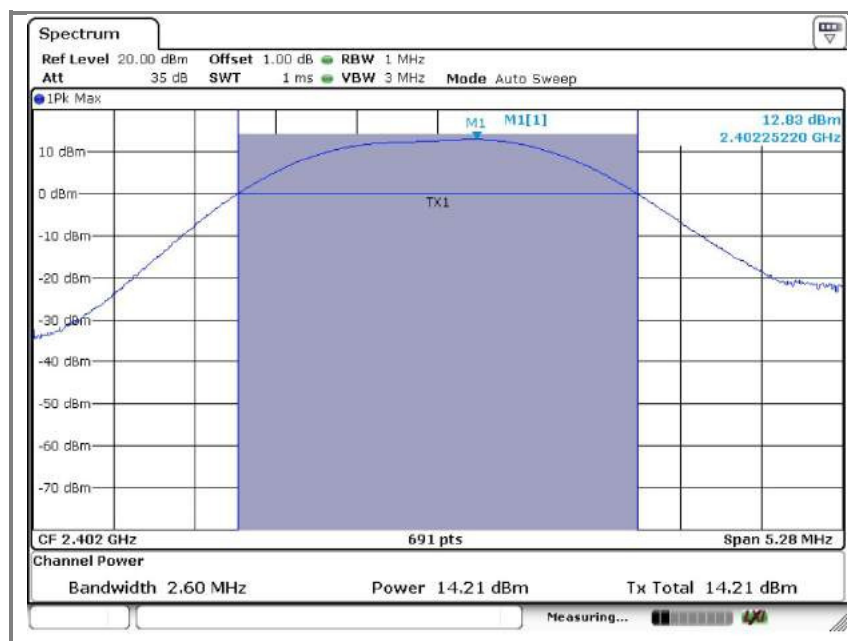

## B. Middle channel (2 440 MHz)

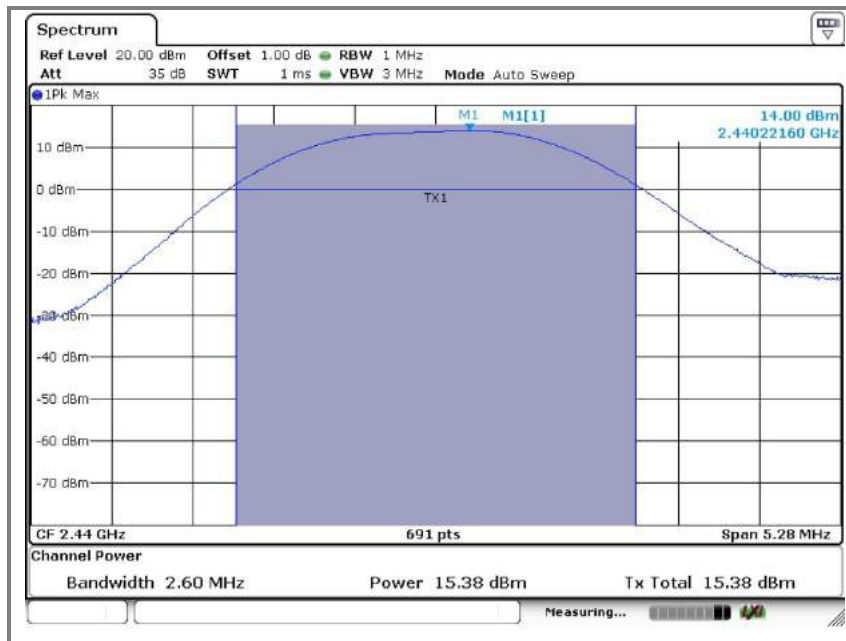


## C. High channel (2 480 MHz)

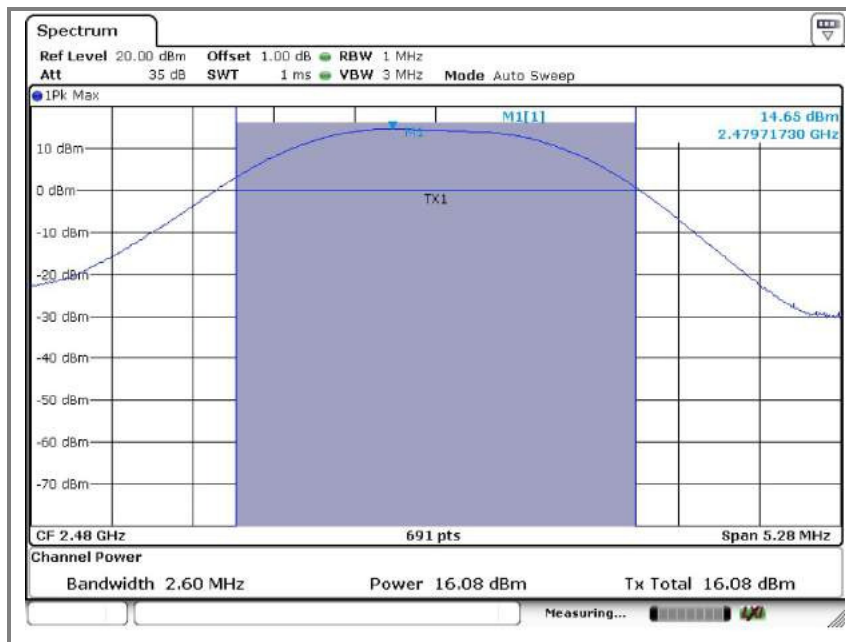

## 7. Power Spectral Density Measurement

### 7.1. Test setup



### 7.2. Limit

< 8dBm @ 3kHz BW

### 7.3. Test procedure (PKPSD)

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;  
 Span = 1.5 times the DTS bandwidth  
 $RBW = 3\text{kHz} \leq RBW \leq 100\text{kHz}$   
 $VBW \geq 3 \times RBW$ , Sweep = Auto couple  
 Detector function = peak, Trace = max hold

### 7.4. Test results


Ambient temperature: 23 °C

Relative humidity: 46 % R.H.


| Power Supply | Frequency (MHz) | Peak output power(dBm) | Limit (dBm) |
|--------------|-----------------|------------------------|-------------|
| DC 12 V      | 2 402           | -2.72                  | 8           |
|              | 2 440           | -1.60                  |             |
|              | 2 480           | -0.84                  |             |
| DC 3.7 V     | 2 402           | -2.60                  |             |
|              | 2 440           | -1.54                  |             |
|              | 2 480           | -1.29                  |             |

## -DC 12 V


### A. Low channel (2 402 MHz)

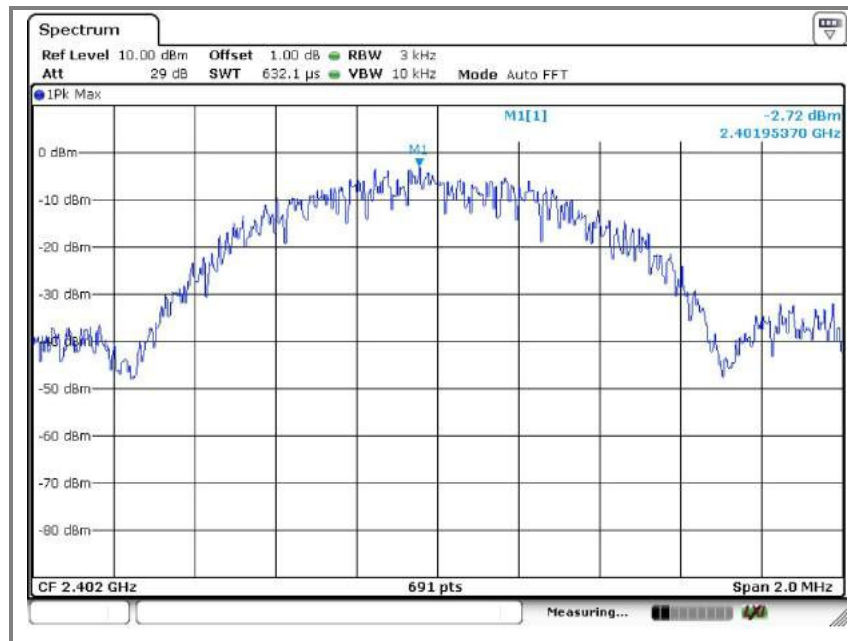

### B. Middle channel (2 440 MHz)

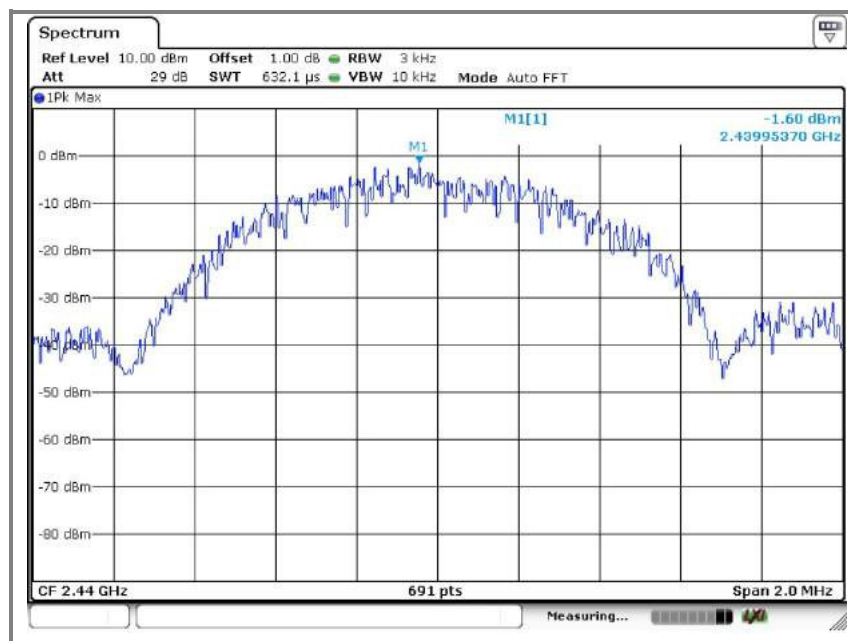


### C. High channel (2 480 MHz)

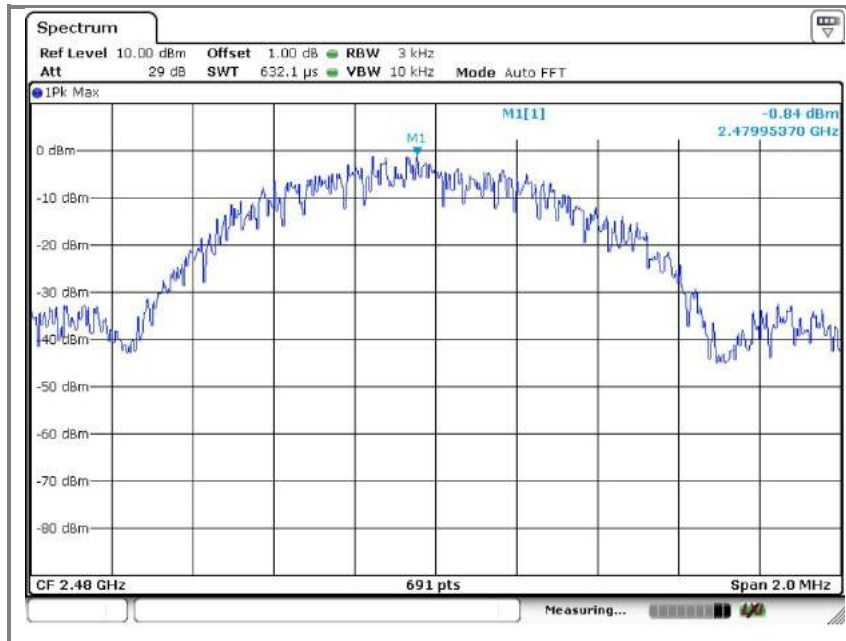


### -DC 3.7 V


#### A. Low channel (2 402 MHz)

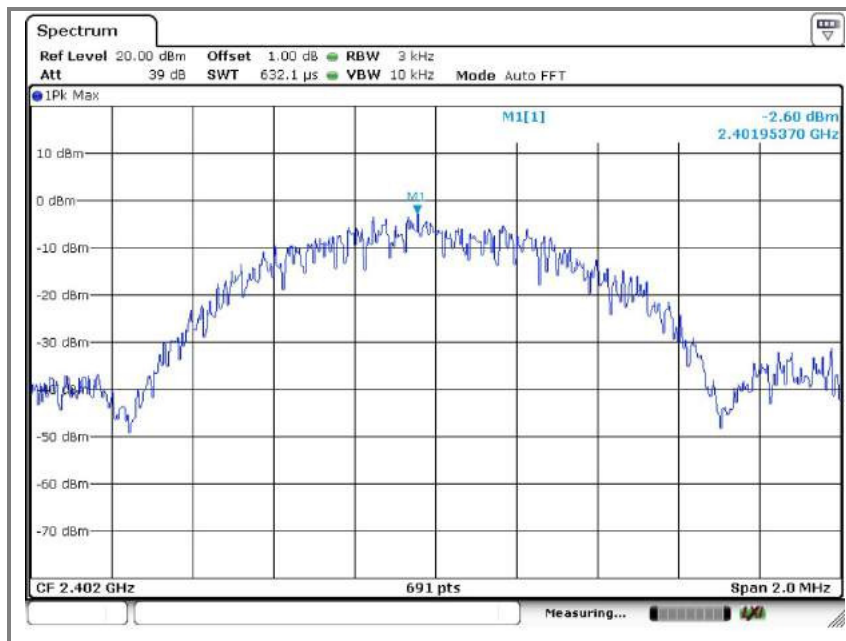

## B. Middle channel (2 440 MHz)

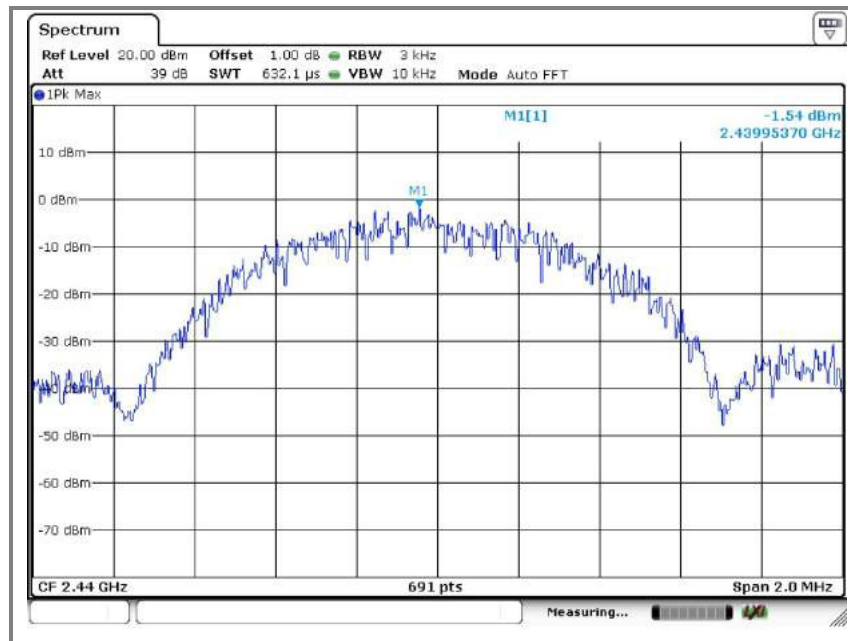

## C. High channel (2 480 MHz)

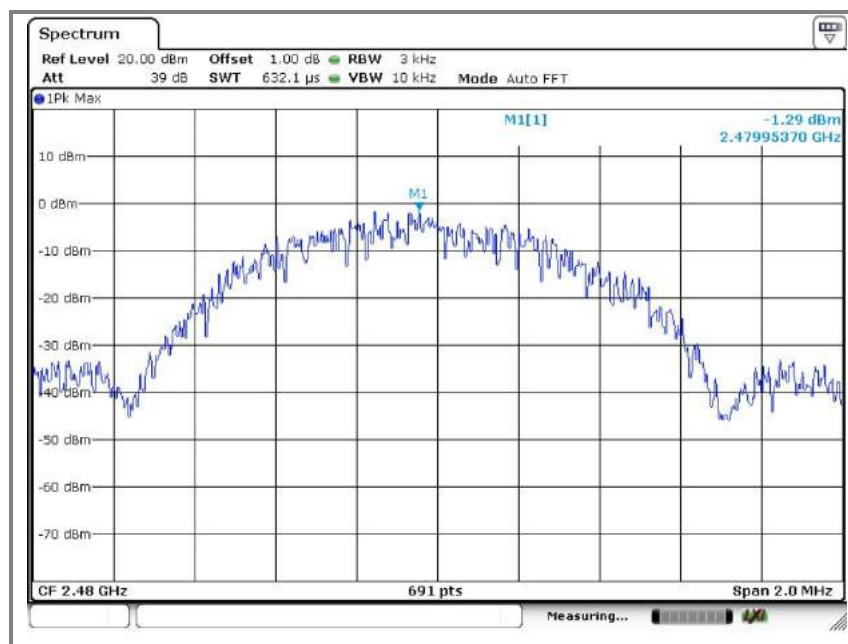

## **8. Antenna requirement**

### **8.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dBi are used.

### **8.2. Antenna Connected Construction**

Antenna used in this product is PCB antenna,  
Antenna gain is 1.29 dBi.

## 9. RF exposure evaluation

### 9.1. 10.1 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

#### Limits for maximum permissible exposure (MPE)

| Frequency range<br>(MHz)                                | Electric field<br>strength(V/m) | Magnetic field<br>strength (A/m) | Power density<br>(mW/cm <sup>2</sup> ) | Average time |
|---------------------------------------------------------|---------------------------------|----------------------------------|----------------------------------------|--------------|
| (A) Limits for Occupational / Control exposures         |                                 |                                  |                                        |              |
| 300 – 1 500                                             | --                              | --                               | F/300                                  | 6            |
| 1 500 – 100 000                                         | --                              | --                               | 5                                      | 6            |
| (B) Limits for General Population / Uncontrol Exposures |                                 |                                  |                                        |              |
| 300 – 1 500                                             | --                              | --                               | F/1 500                                | 6            |
| <u>1 500 – 100 000</u>                                  | --                              | --                               | <u>1</u>                               | <u>30</u>    |

### 9.2. Friis transmission formula : $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where

$P_d$  = Power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = Numeric gain of the antenna relative to isotropic antenna

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 9.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

### 9.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: 1.29 dBi (BLE)

| Power Supply | Frequency (MHz) | Output Peak power to antenna (dBm) | Antenna gain (dBi) | Antenna Gain (dBi) Numeric | Power density at 20 cm (mW/cm <sup>2</sup> ) | Power density Limits (mW/cm <sup>2</sup> ) |
|--------------|-----------------|------------------------------------|--------------------|----------------------------|----------------------------------------------|--------------------------------------------|
| DC 12 V      | 2 402           | 14.33                              | 1.29               | 1.35                       | 0.007                                        | 1                                          |
|              | 2 440           | 15.38                              |                    |                            | 0.009                                        |                                            |
|              | 2 480           | 16.14                              |                    |                            | 0.011                                        |                                            |
| DC 3.7 V     | 2 402           | 14.21                              | 1.29               | 1.35                       | 0.007                                        | 1                                          |
|              | 2 440           | 15.38                              |                    |                            | 0.009                                        |                                            |
|              | 2 480           | 16.08                              |                    |                            | 0.010                                        |                                            |

#### ※ Remark

The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup>.