

FCC Test Report

**Test Report
On Behalf of
Shenzhen DSQN Investment Co., Ltd
For
Digital UHF Wireless Audio System
Model No.: Saramonic K9 XTX, Saramonic K9 XTX Kit,
Saramonic K9 XTX Solo**

FCC ID: 2AHMB-51901XTX

Prepared For: Shenzhen DSQN Investment Co., Ltd
Room 2205,2206,2207,Tower 11,Phase II (Plot 02-08) Tianan Cloud
Park,Gangtou,Bantian Street, Longgang District,Shenzhen, China

Prepared By: Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Feb. 27, 2026 ~ Jun. 09, 2026

Date of Report: Jun. 09, 2026

Report Number: HK2602270244-3E

Test Result Certification

Applicant's Name : Shenzhen DSQN Investment Co., Ltd
Address : Room 2205,2206,2207,Tower 11,Phase II (Plot 02-08) Tianan Cloud Park,Gangtou,Bantian Street, Longgang District,Shenzhen, China
Manufacturer's Name : Shenzhen Jiayz photo industrial.,Ltd
Address : A16 Building,Intelligent Terminal Industrial Park of Silicon Valley Power,Guanlan Longhua District,Shenzhen, China
Product Description
Trade Mark : Saramonic
Product Name : Digital UHF Wireless Audio System
Model(s) Name : Saramonic K9 XTX, Saramonic K9 XTX Kit, Saramonic K9 XTX Solo
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.236

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
Date (s) of performance of tests : Feb. 27, 2026 ~ Jun. 09, 2026
Date of Issue : Jun. 09, 2026
Test Result : Pass

Testing Engineer

Len Liao

Len Liao

Technical Manager

Sliver Wan

Sliver Wan

Authorized Signatory

Jason Zhou

Jason Zhou

Table of Contents

1. Summary	5
1.1 Test Procedures and Results	5
1.2 Information of the Test Laboratory	5
1.3 Measurement Uncertainty	6
2. General Information	7
2.1 General Description of EUT	7
2.2 Carrier Frequency of Channels	8
2.3 Operation of EUT during Testing	8
2.4 Description of Test Setup	9
2.5 Description of Support Units	10
2.6 Measurement Instruments List	11
3. Test Results and Measurement Data	12
3.1 AC Conducted Emissions Test	12
3.2 Radiated Emission Test	15
3.3 Conducted Output Power	21
3.4 Occupied Bandwidth Measurement	22
3.5 Necessary Bandwidth	25
3.6 Frequency Stability	28
3.7 Antenna Requirement	30
4. Photograph of Test	31
5. Photograph of EUT	33

**** Issued History ****

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	Jun. 09, 2026	Jason Zhou



1. Summary

1.1 Test Procedures and Results

Test Item	Standard Section	Result
AC Conducted Emission	15.207	PASS
Conducted Peak Output Power	15.236(d)(1)	PASS
Occupied Bandwidth Emission	15.236(f)(1)	PASS
Necessary Bandwidth (MASK)	15.236 (g)	PASS
Radiated Spurious Emission	15.236(g)	PASS
Frequency Stability	15.236(f)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

1.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission 0.15~30MHz	$\pm 2.22\text{dB}$
2	All Emissions, Radiated(<1G)	$\pm 3.60\text{dB}$
3	All Emissions, Radiated(1-18G)	$\pm 3.86\text{dB}$
4	Transmitter Power Conducted	$\pm 0.37\text{dB}$
5	Occupied Bandwidth	$\pm 3.68\%$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



2. General Information

2.1 General Description of EUT

Product Name	Digital UHF Wireless Audio System
Model Name	Saramonic K9 XTX
Series Model(s)	Saramonic K9 XTX Kit, Saramonic K9 XTX Solo
Model Difference	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample mode: Saramonic K9 XTX.
Hardware Version	V1.0
Software Version	V2.56
Operation Frequency	550MHz-607.9MHz
Antenna Type	External Antenna
Antenna Gain	6.56dBi
Modulation Type	GFSK
Power Source	DC5V From Type-C or DC3V From Battery
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)
27	550.0 – 553.9
28	554.1 – 559.9
29	560.1 – 565.9
30	566.1 – 571.9
31	572.1 – 577.9
32	578.1 – 583.9
33	584.1 – 589.9
34	590.1 – 595.9
35	596.1 – 601.9
36	602.1 – 607.9

Note: The channel spacing is 0.1MHz

2.3 Operation of EUT during Testing

Operating Mode

The mode is used:


Low channel: 550.0MHz

Middle channel: 578.9MHz

High channel: 607.9MHz

2.4 Description of Test Setup


Operation of EUT during AC Conducted and Radiation below 1GHz testing:



Operation of EUT during Radiation above 1GHz testing:



Operation of EUT during RF Conducted testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The report only reflects the worst emission test results. The worst case is X position.



2.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Product Name	Trade Mark	Model Name	Specification	Remark
1	Digital UHF Wireless Audio System	Saramonic	Saramonic K9 XTX	N/A	EUT
2	USB Cable	N/A	N/A	Length: 38cm	
3	Adapter	N/A	CD289	Input: 100-240V, 50/60Hz, 2A USB-C1 Output: 5V,3A/9V,3A/12V,3A /15V,3A/20V,5A/28V,5A 140W MAX USB-C2 Output: 5V,3A/9V,3A/12V,3A /15V,3A/20V,5A 100W MAX USB-A Output: 5V,4.5A/4.5V,5A/5V,3A /9V,2A/12V,1.5A 22.5W MAX	

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Necessary Bandwidth, Frequency Stability), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



2.6 Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	2026/02/11	1 Year
2	L.I.S.N.	R&S	ENV216	HKE-059	2026/02/04	1 Year
3	EMI Test Receiver	R&S	ESR-7	HKE-005	2026/02/06	1 Year
4	Spectrum analyzer	Agilent	N9020A	HKE-025	2026/02/06	1 Year
5	Spectrum analyzer	KEYSIGHT	N9020A	HKE-117	2026/02/06	1 Year
6	Spectrum analyzer	R&S	FSV3044	HKE-126	2026/02/06	1 Year
7	Preamplifier	Schwarzbeck	EMC051845S E	HKE-006	2026/02/04	1 Year
8	Preamplifier	Agilent	83051A	HKE-016	2026/02/04	1 Year
9	Preamplifier	QJD	QJD18-40-50	HKE-030	2026/02/05	1 Year
10	6dB Attenuator	Pasternack	6dB	HKE-152	2026/02/06	1 Year
11	EMI Test Receiver	R&S	ESR-7	HKE-010	2026/02/06	1 Year
12	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2026/02/06	2 Year
13	Loop Antenna	COM-POWER	AL-130R	HKE-014	2026/02/06	2 Year
14	Horn Antenna	Schwarzbeck	9120D	HKE-013	2026/02/06	2 Year
15	Broadband Horn Antenna	A-INFO	LB-180400-K F	HKE-031	2026/02/06	2 Year
16	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
17	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
18	RF Automatic control unit	Tonscend	JS0806-2	HKE-060	2026/02/06	1 Year
19	High pass filter unit	Tonscend	JS0806-F	HKE-055	2026/02/06	1 Year
20	Wireless Communication Test Set	R&S	CMW500	HKE-027	2026/02/06	1 Year
21	High-low temperature chamber	Guangke	HT-80L	HKE-118	2026/02/06	1 Year
22	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2026/03/06	1 Year
23	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/
24	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	2026/02/04	1 Year
25	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



3. Test Results and Measurement Data

3.1 AC Conducted Emissions Test


Limit

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

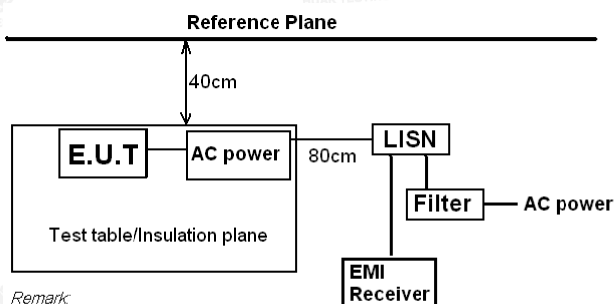

Remark

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Results

All the test modes completed for test. Only the worst result was reported as below:

Test Specification: Line

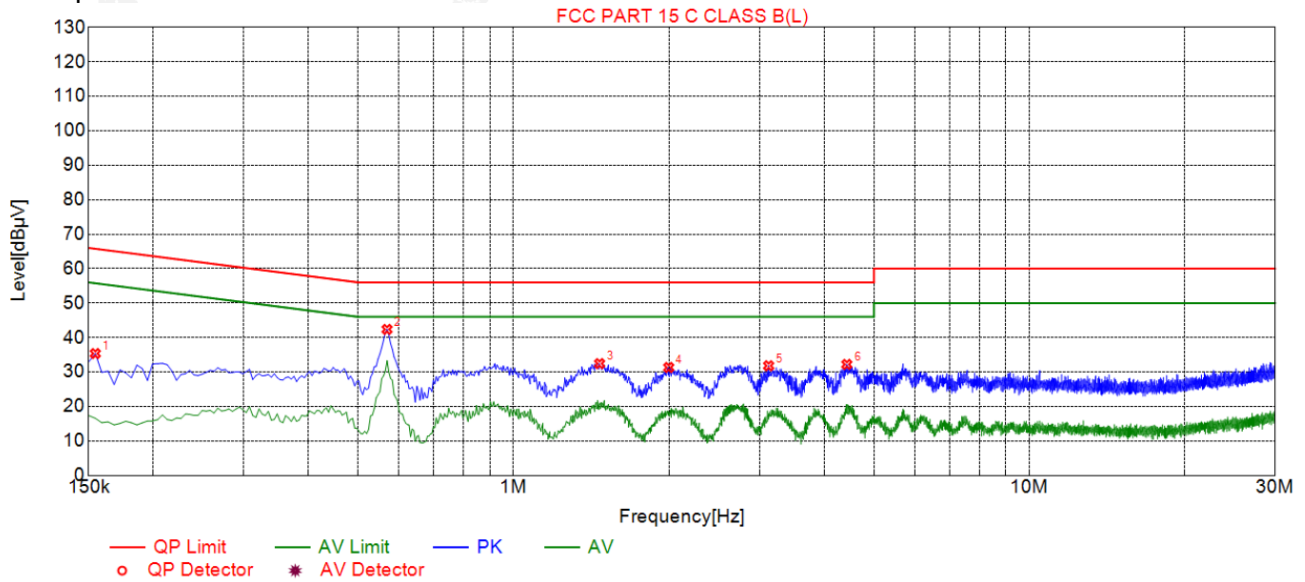

Suspected List


NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1545	35.36	19.84	65.75	30.39	15.52	PK	L
2	0.5685	42.37	19.88	56.00	13.63	22.49	PK	L
3	1.4685	32.44	19.96	56.00	23.56	12.48	PK	L
4	1.9995	31.32	20.07	56.00	24.68	11.25	PK	L
5	3.1245	31.81	20.14	56.00	24.19	11.67	PK	L
6	4.4295	32.21	20.21	56.00	23.79	12.00	PK	L

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

Test Specification: Neutral

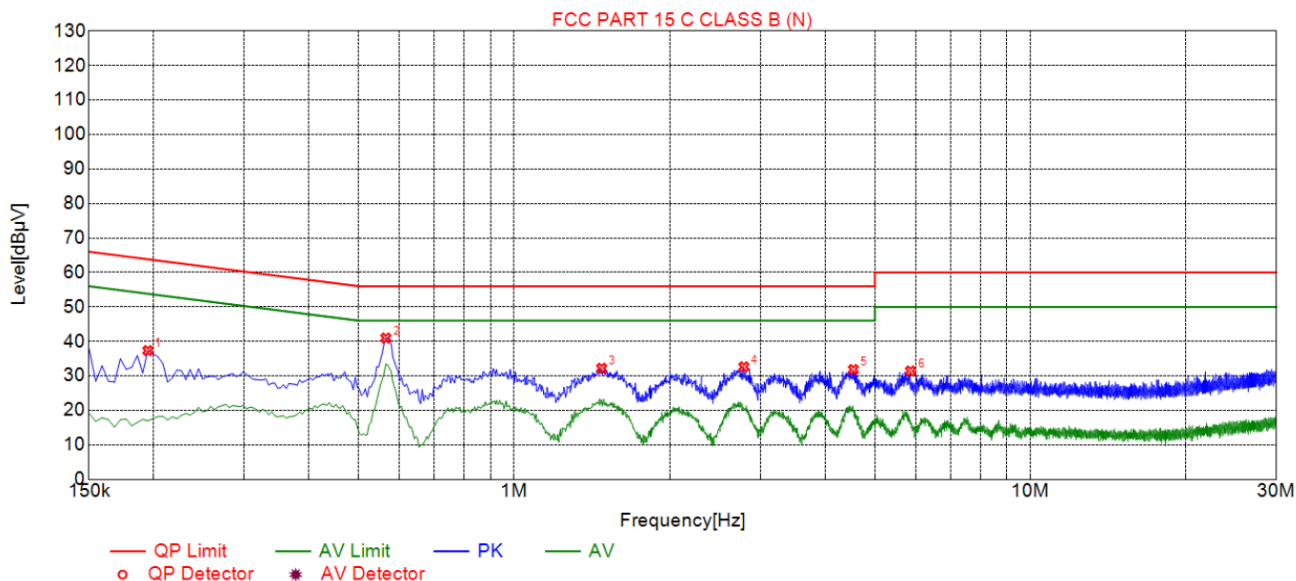

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1950	37.34	19.77	63.82	26.48	17.57	PK	N
2	0.5640	40.97	19.95	56.00	15.03	21.02	PK	N
3	1.4775	32.21	20.07	56.00	23.79	12.14	PK	N
4	2.7870	32.63	20.18	56.00	23.37	12.45	PK	N
5	4.5420	31.84	20.28	56.00	24.16	11.56	PK	N
6	5.8605	31.41	20.51	60.00	28.59	10.90	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

3.2 Radiated Emission Test


Limit

Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 4.2.4.2.2 of ETSI EN 300 422-1 V2.2.1 (2021-11).


Emissions outside of this band shall comply with the limits specified in section 4.2.4.1.2 of ETSI EN 300 422-1 V2.2.1 (2021-11).

Test Configuration


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

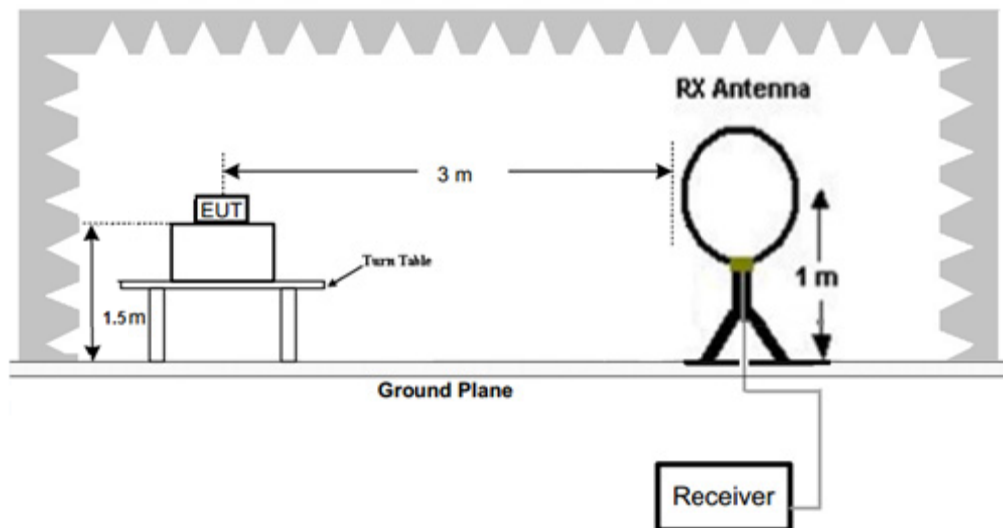

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz.

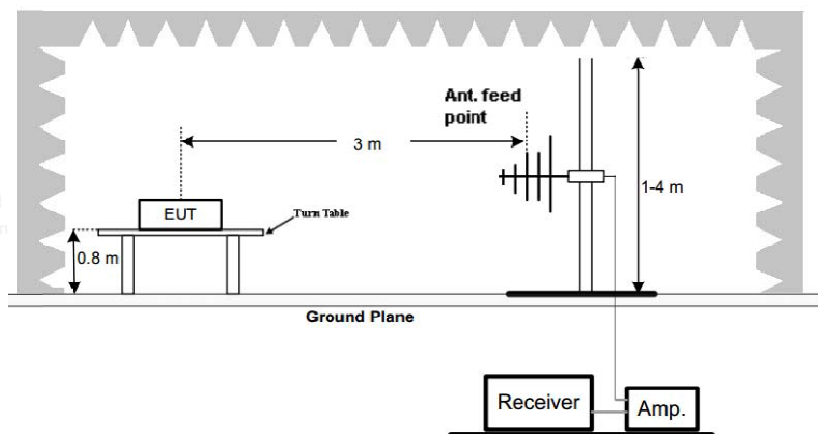

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz.

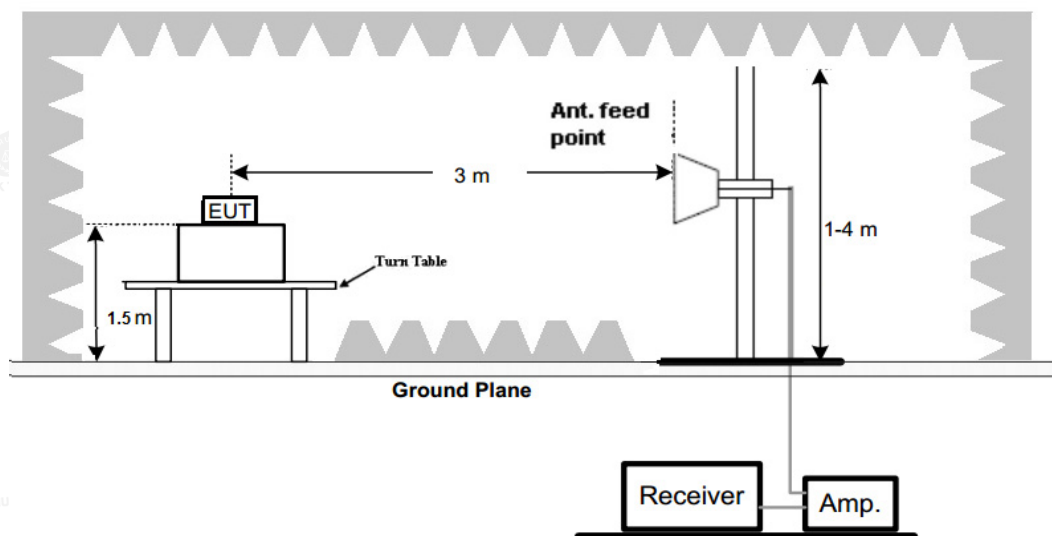

Frequency: 9kHz-30MHz	Frequency: 30MHz-1GHz	Frequency: Above 1GHz
RBW=10KHz	RBW=120KHz	RBW=1MHz
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak	Detector function = peak

Test Procedure


- 1.The setup of EUT is according with per ANSI/TIA-603 and ANSI C63.4 measurement procedure.
- 2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable.

Test Results

Below 1GHz Test Results

All the test modes completed for test. Only the worst result was reported as below:


Antenna polarity: Horizontal

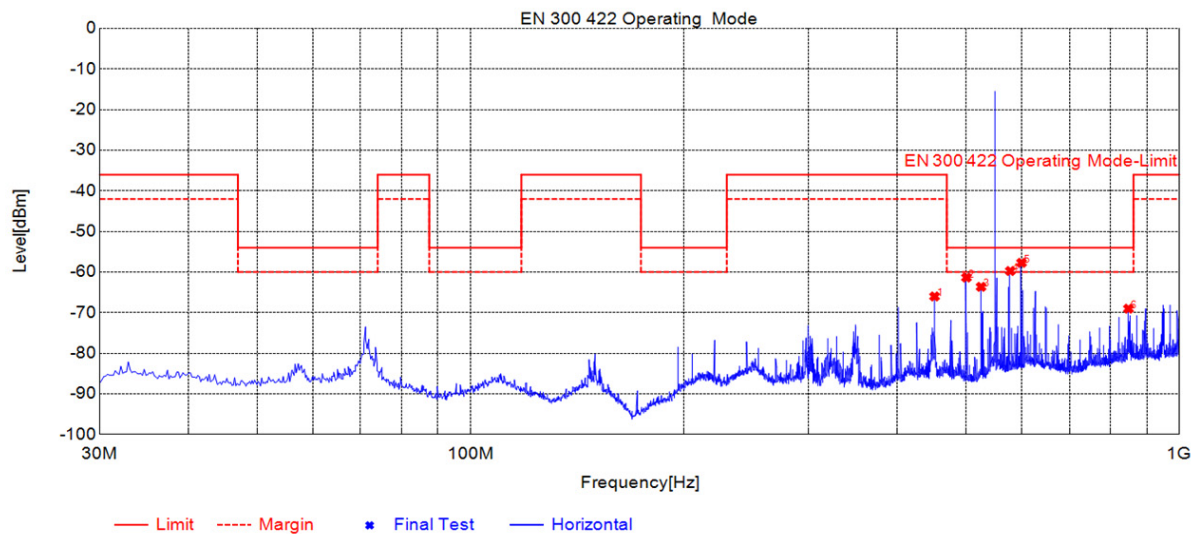

Suspected List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	451.646	-70.11	-66.01	-36.00	30.01	4.10	Horizontal
2	500.932	-64.98	-61.36	-54.00	7.36	3.62	Horizontal
3	525.381	-67.87	-63.64	-54.00	9.64	4.23	Horizontal
4	577.577	-65.40	-59.74	-54.00	5.74	5.66	Horizontal
5	599.115	-64.46	-57.72	-54.00	3.72	6.74	Horizontal
6	847.873	-78.29	-69.03	-54.00	15.03	9.26	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

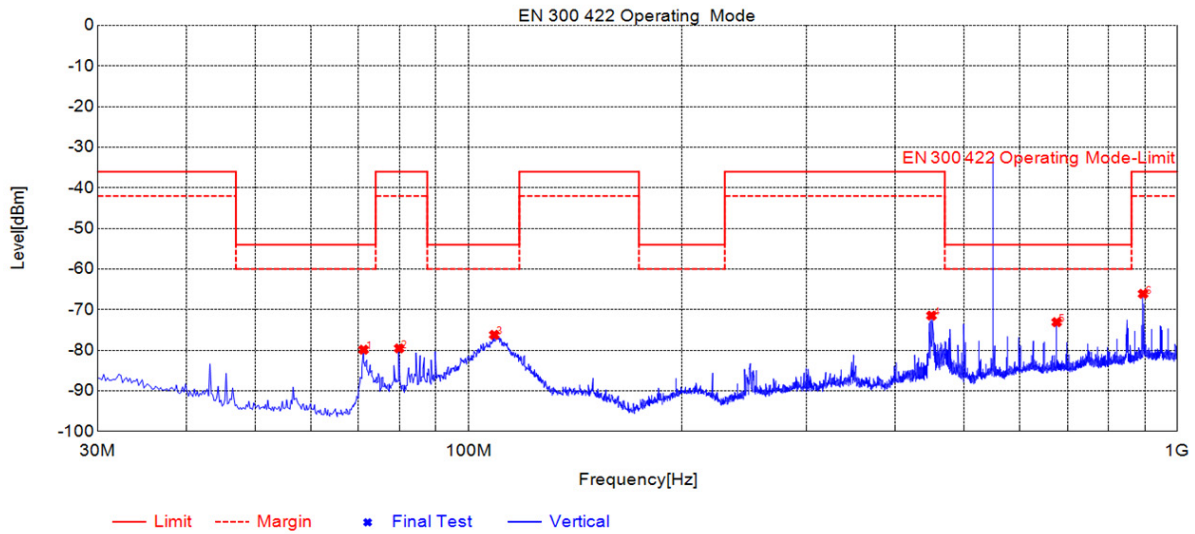

Suspected List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	71.1362	-74.41	-79.88	-54.00	25.88	-5.47	Vertical
2	79.868	-77.13	-79.55	-36.00	43.55	-2.42	Vertical
3	108.779	-88.11	-76.21	-54.00	22.21	11.90	Vertical
4	450.094	-73.63	-71.47	-36.00	35.47	2.16	Vertical
5	675.955	-79.32	-73.09	-54.00	19.09	6.23	Vertical
6	894.831	-75.40	-66.11	-36.00	30.11	9.29	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Above 1GHz Test Results

All the test modes completed for test. Only the worst result was reported as below:

Antenna polarity: Horizontal

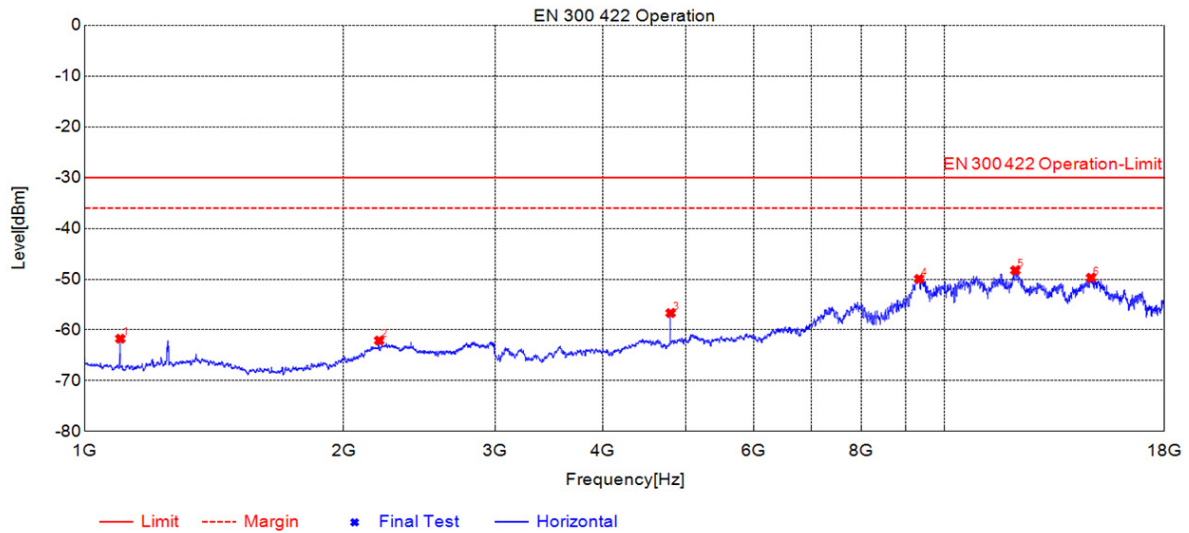


Suspected List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	1100.03	-56.86	-61.73	-30.00	31.73	-4.87	Horizontal
2	2199.73	-62.09	-62.09	-30.00	32.09	0.00	Horizontal
3	4800.36	-59.49	-56.68	-30.00	26.68	2.81	Horizontal
4	9337.26	-64.83	-49.95	-30.00	19.95	14.88	Horizontal
5	12082.8	-68.07	-48.26	-30.00	18.26	19.81	Horizontal
6	14795.3	-68.90	-49.72	-30.00	19.72	19.18	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Vertical

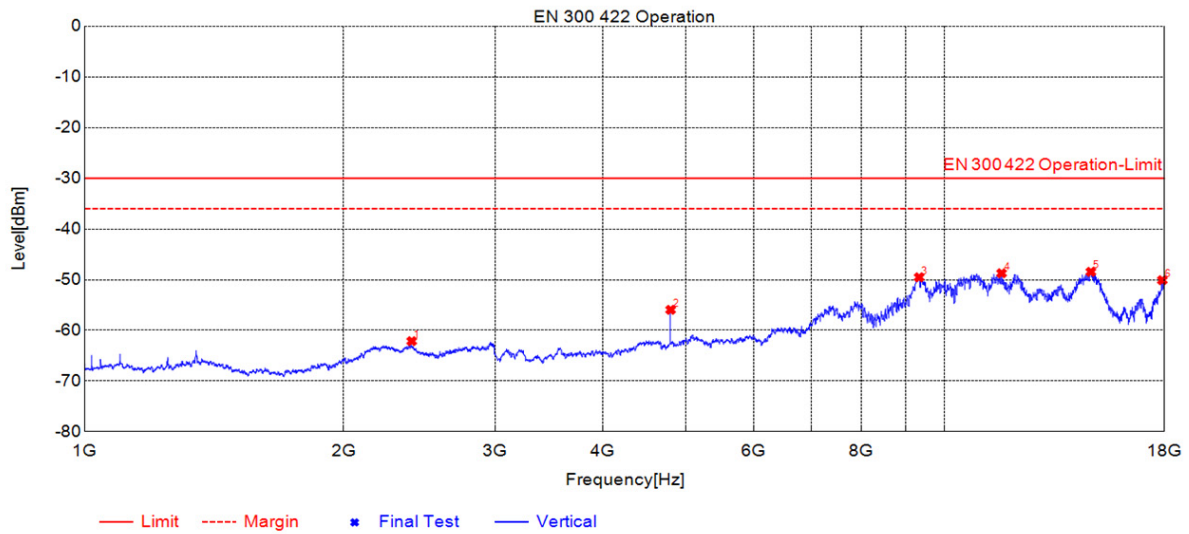

Suspected List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	2399.79	-61.82	-62.14	-30.00	32.14	-0.32	Vertical
2	4800.36	-58.78	-55.95	-30.00	25.95	2.83	Vertical
3	9337.26	-64.82	-49.53	-30.00	19.53	15.29	Vertical
4	11644.7	-67.56	-48.73	-30.00	18.73	18.83	Vertical
5	14789.3	-69.19	-48.45	-30.00	18.45	20.74	Vertical
6	17903.9	-72.06	-50.10	-30.00	20.10	21.96	Vertical


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

3.3 Conducted Output Power

Limit

According to FCC 15.236(d)(1), for low power auxiliary station operating in the 470-608, and 614-698 MHz bands, In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50mW EIRP

Test Configuration

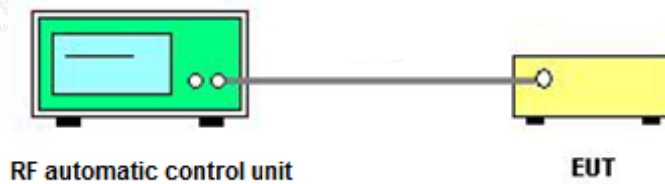

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Results

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	ANT Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
CH01	550.0	-15.919	6.56	-9.359	17	PASS
CH03	578.9	-17.010	6.56	-10.45		PASS
CH06	607.9	-17.517	6.56	-10.957		PASS


3.4 Occupied Bandwidth Measurement

Limit

According to FCC 15.236(f)(1), The operating frequency within a permissible band of operation defined in paragraph (c) of this section must comply with the following requirements.

- (i) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.
- (ii) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Configuration

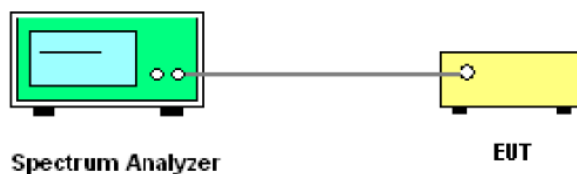


Test Procedure

According to ANSI/TIA-603 for additional Test Set-Up procedures, the occupied bandwidth of emission was measured with a Spectrum Analyzer connected to the antenna terminal while EUT was operating in 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. Then mark the -26dB Bandwidth and record it.

Test Results

Test Channel	Frequency (MHz)	-20Bandwidth (kHz)	99%Bandwidth (kHz)	Limit (kHz)	Result
CH01	550.0	130.6	115.30	200	PASS
CH03	578.9	130.3	112.15		PASS
CH06	607.9	130.2	113.78		PASS

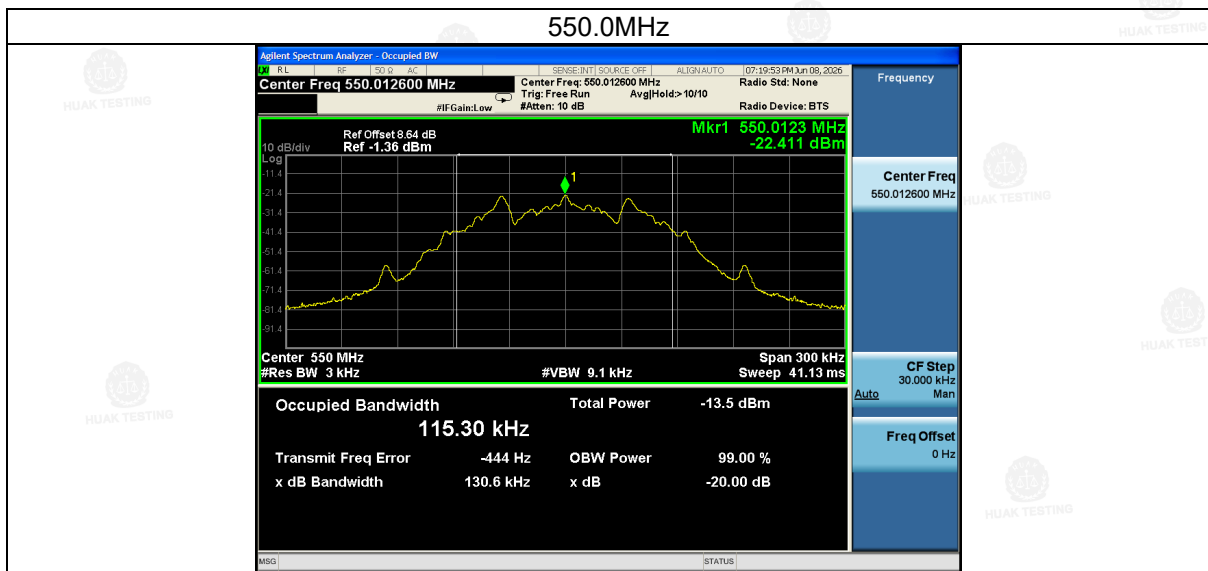



3.5 Necessary Bandwidth

Limit

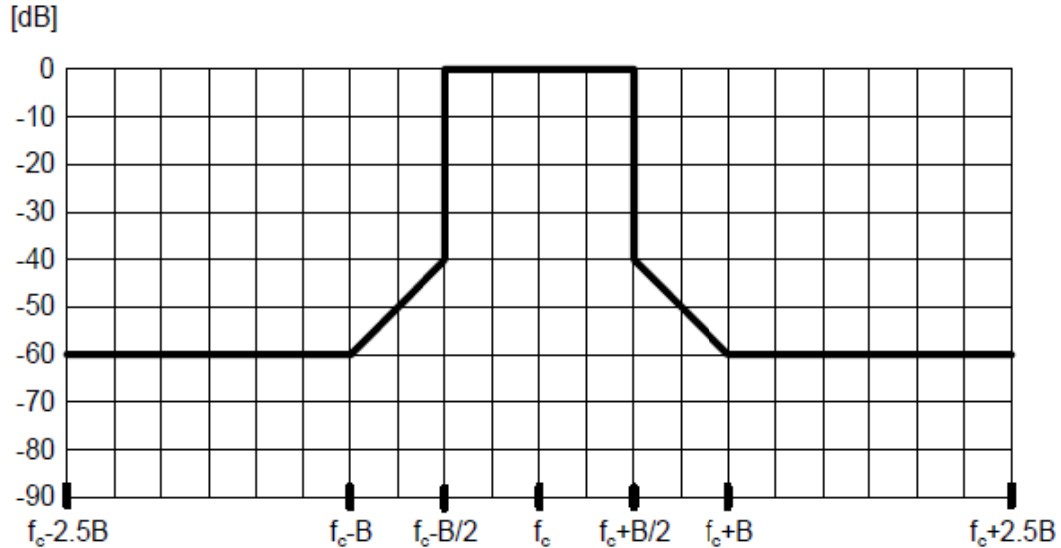


Figure 3: Transmit spectral power mask for WMAS, RBW = 100 kHz

The limits in figure 3 are provided with RBW = 100 kHz. The relevant measurements can also be performed with other RBW for certain ranges of B as given in table 3, accounting that the relevant limit given under RBW = 100 kHz needs to be converted appropriately by adding $c = 10 \times \log_{10} (\text{RBW}/100 \text{ kHz})$ for correction.

Table 6: Correction factor for different B and applicable RBW


B	RBW, VBW	c = correction factor
$B < 2 \text{ MHz}$	10 kHz	-10 dB
$2 \text{ MHz} \leq B < 5 \text{ MHz}$	25 kHz	-7 dB
$5 \text{ MHz} \leq B \leq 20 \text{ MHz}$	100 kHz	0 dB

Standard Applicable

According to §15.236 (g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Figure 3 of section 4.2.4.2.2 of ETSI EN 300 422-1 V2.2.1 (2021-11), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless UHF Microphone s in the 25 MHz to 3GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 4.2.4.1.2 of ETSI EN 300 422-1 V2.2.1 (2021-11).

According to ETSI EN 300 422-2 V2.2.1 section 4.2.4.2.2, the transmitter output spectrum shall be within the mask defined in the following figure.

Test Configuration

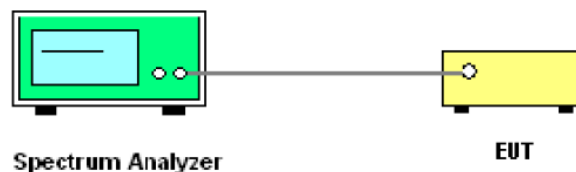

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING **Test Procedure**

The arrangement of test equipment as shown in figure B.1 shall be used. Note that the noise meter conforms to (quasi peak) without weighting filter (flat).

With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the DUT shall be adjusted to 8 dB below the limiting threshold (-8 dB (lim)) as declared by the manufacturer.

The corresponding audio output level from the demodulator shall be measured and recorded.

The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB change in input level when the meter is switched between input and output.

The audio input level shall be increased by 20 dB, i.e. to +12 dB (lim), and the corresponding change in output level shall be measured.

It shall be checked that the audio output level has increased by ≤ 10 dB.

If this condition is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8 dB (lim).

Measure the input level at the transmitter required to give +12 dB (lim).


The LF generator shall be replaced with the weighted noise source to Recommendation ITU-R BS.559-2 [i.3], band-limited to 15 kHz as described in IEC 60244-13 [2], and the level shall be adjusted such that the measured input to the transmitter corresponds to +12 dB (lim).

If the transmitter incorporates any ancillary coding or signalling channels (e.g. pilot-tones), these shall be enabled prior to any spectral measurements.

If the transmitter incorporates more than one audio input, e.g. stereo systems, the second and subsequent channels shall be simultaneously driven from the same noise source, attenuated to a level of -6 dB (lim).

- centre frequency: f_c : Transmitter (Tx) nominal frequency;
- dispersion (Span): 1 MHz;
- Resolution Bandwidth (RBW): 10 kHz;
- Video Bandwidth (VBW): 10 kHz;
- detector: Peak hold.

Test Result

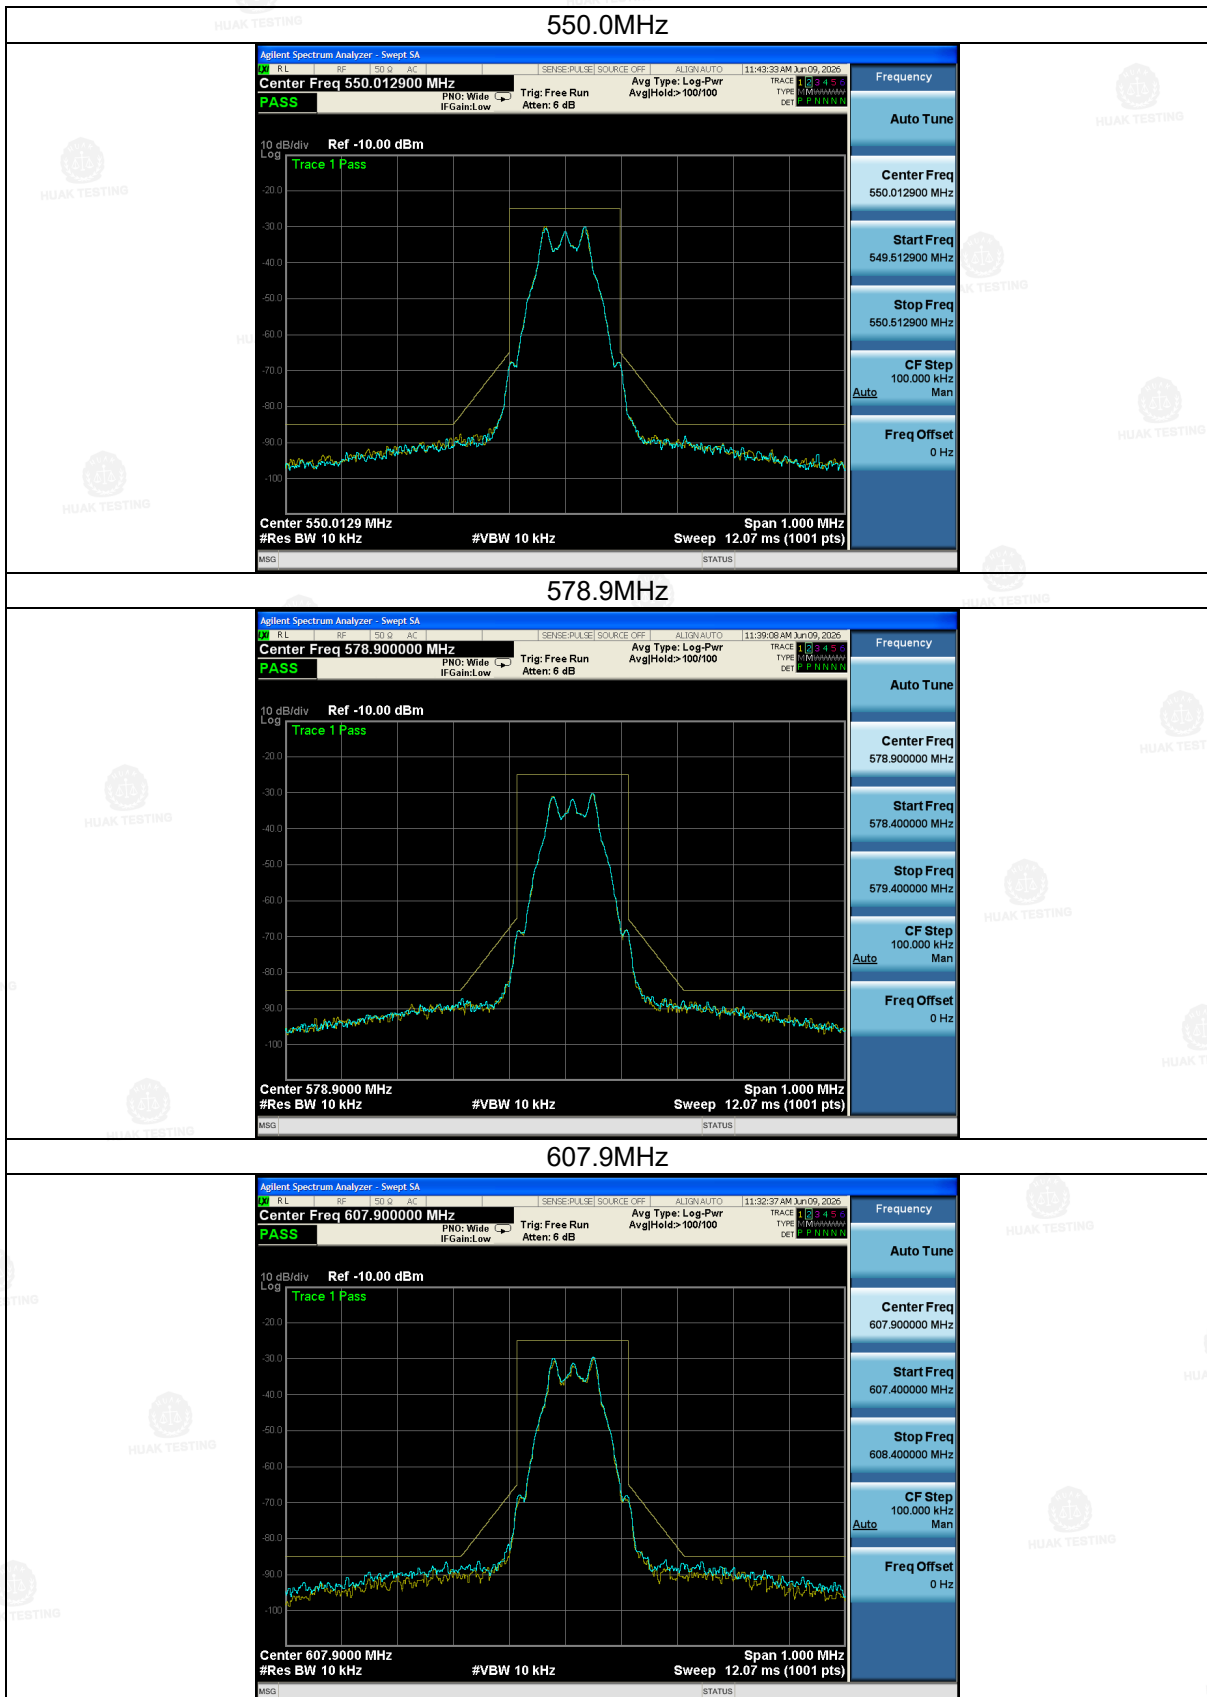

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

3.6 Frequency Stability


Limit

±50ppm

Standard Applicable

According to FCC 15.236(f)(1)(iii), The frequency tolerance of the carrier signal shall be maintained within ±0.005% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Configuration

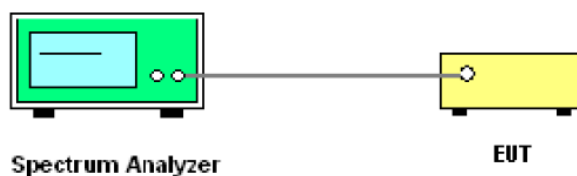

Test Procedure

1. Setup the configuration of the ambient temperature from -20°C to 50°C with sufficient time. And measure the different power of the EUT with an artificial power from highest to end point voltage.
2. Set frequency counter center frequency to the right frequency needs to be measured band.

Test Result

Test Frequency	Test Conditions		Measure Frequency	Frequency Error		Limit	Result
(MHz)	Voltage (V)	Temperature (°C)	(MHz)	(MHz)	ppm	ppm	
550.0MHz	N	N	550.0042	0.0042	7.64	±50ppm	PASS
		L	549.9953	-0.0047	-8.55		
		H	550.0096	0.0096	17.45		
	L	N	549.9912	-0.0088	-16.00		
		L	550.0013	0.0013	2.36		
		H	550.0142	0.0142	25.82		
	H	N	549.9853	-0.0147	-26.73		
		L	549.9942	-0.0058	-10.55		
		H	550.0043	0.0043	7.82		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



Test Frequency	Test Conditions		Measure Frequency	Frequency Error		Limit	Result
(MHz)	Voltage (V)	Temperature (°C)	(MHz)	(MHz)	ppm	ppm	
578.9MHz	N	N	578.8963	-0.0037	-6.39	± 50ppm	PASS
		L	578.8975	-0.0025	-4.32		
		H	578.8896	-0.0104	-17.97		
	L	N	578.9052	0.0052	8.98		
		L	578.9037	0.0037	6.39		
		H	578.8841	-0.0159	-27.47		
	H	N	578.8869	-0.0131	-22.63		
		L	578.9019	0.0019	3.28		
		H	578.9071	0.0071	12.26		

Test Frequency	Test Conditions		Measure Frequency	Frequency Error		Limit	Result
(MHz)	Voltage (V)	Temperature (°C)	(MHz)	(MHz)	ppm	ppm	
607.9MHz	N	N	607.8963	-0.0037	-6.09	± 50ppm	PASS
		L	607.8975	-0.0025	-4.11		
		H	607.8891	-0.0109	-17.93		
	L	N	607.9021	0.0021	3.45		
		L	607.9014	0.0014	2.30		
		H	607.9072	0.0072	11.84		
	H	N	607.9089	0.0089	14.64		
		L	607.8891	-0.0109	-17.93		
		H	607.8958	-0.0042	-6.91		

3.7 Antenna Requirement


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a External Antenna, with non-standard SMA connector, need professional installation. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 6.56dBi.

Antenna

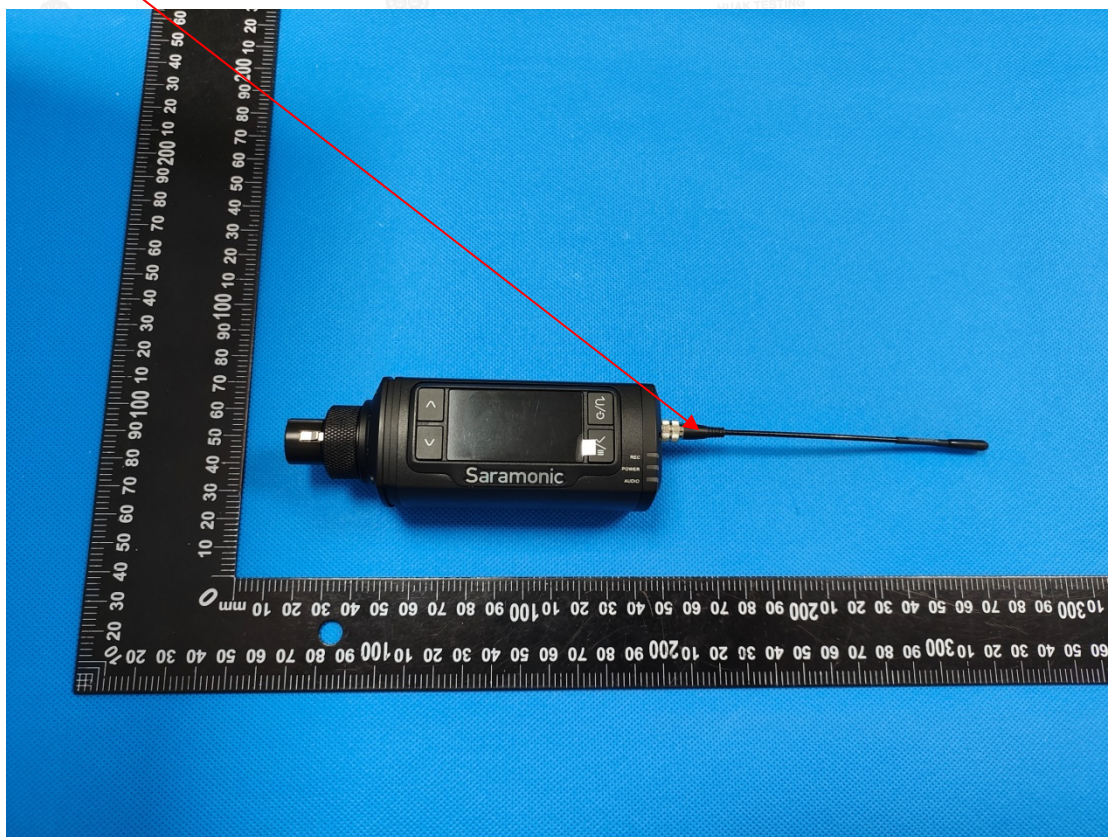




HUAKE TESTING

4. Photograph of Test

Radiated Emission

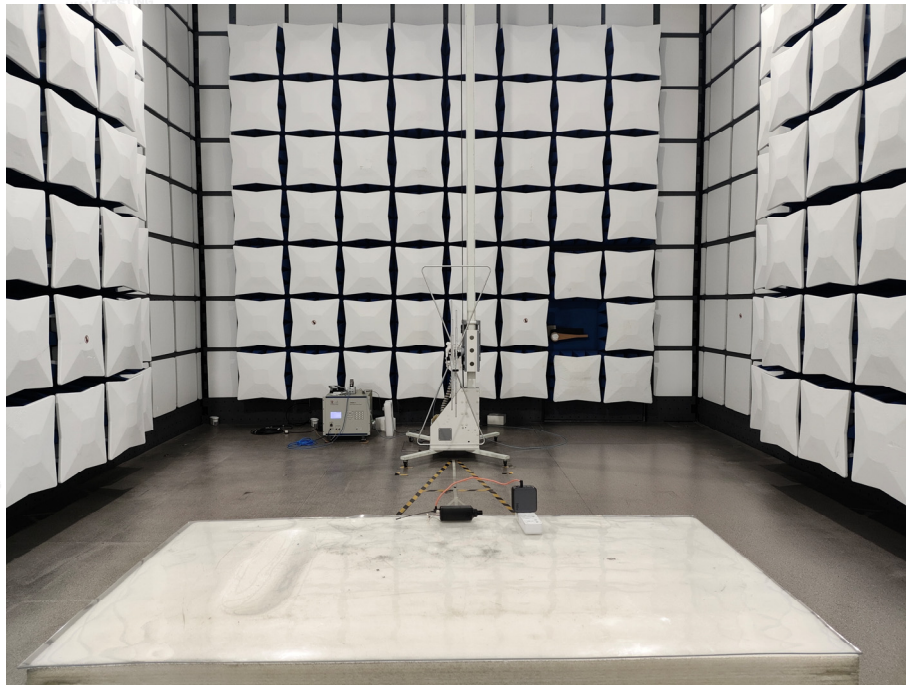


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

AC Conducted Emission



RF Conducted Emission

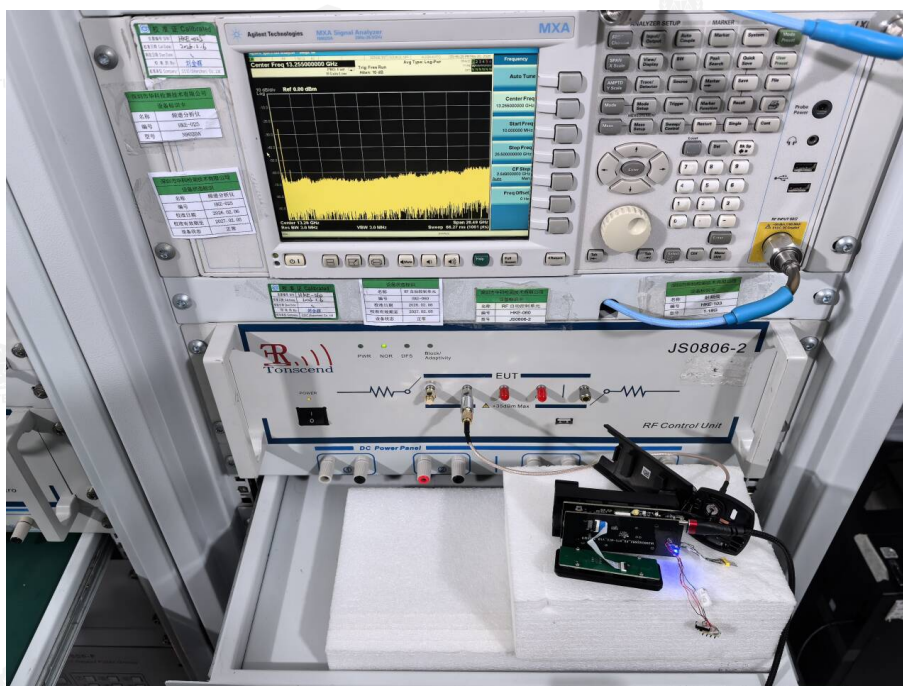

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

5. Photograph of EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----