

TEST REPORT

Product : WiFi module
Trade mark : N/A
Model/Type reference : ESP-01F
Serial Number : N/A
Report Number : EED32K00216701
FCC ID : 2AHMR-ESP01F
Date of Issue : Oct. 30, 2018
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Shenzhen Ai-Thinker Technology Co., Ltd.
6/F, Block C2, Huafeng Industrial Park, Hangcheng Road,
Baoan district, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom-chen
Tom chen (Test Project)

Compiled by:

Kevin lan
Kevin lan (Project Engineer)

Reviewed by:

Kevin Yang
Kevin yang (Reviewer)

Approved by:

Sheek Luo
Sheek Luo (Lab supervisor)

Date:

Oct. 30, 2018

Check No.: 3320249081



2 Version

Version No.	Date	Description
00	Oct. 30, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	7
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	12
Appendix A): Conducted Peak Output Power.....	13
Appendix B): 6dB Occupied Bandwidth.....	17
Appendix C): Band-edge for RF Conducted Emissions.....	21
Appendix D): RF Conducted Spurious Emissions.....	24
Appendix E): Power Spectral Density.....	31
Appendix F): Antenna Requirement.....	35
Appendix G): AC Power Line Conducted Emission.....	36
Appendix H): Restricted bands around fundamental frequency (Radiated).....	39
Appendix I): Radiated Spurious Emissions.....	50
PHOTOGRAPHS OF TEST SETUP.....	58
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	61

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

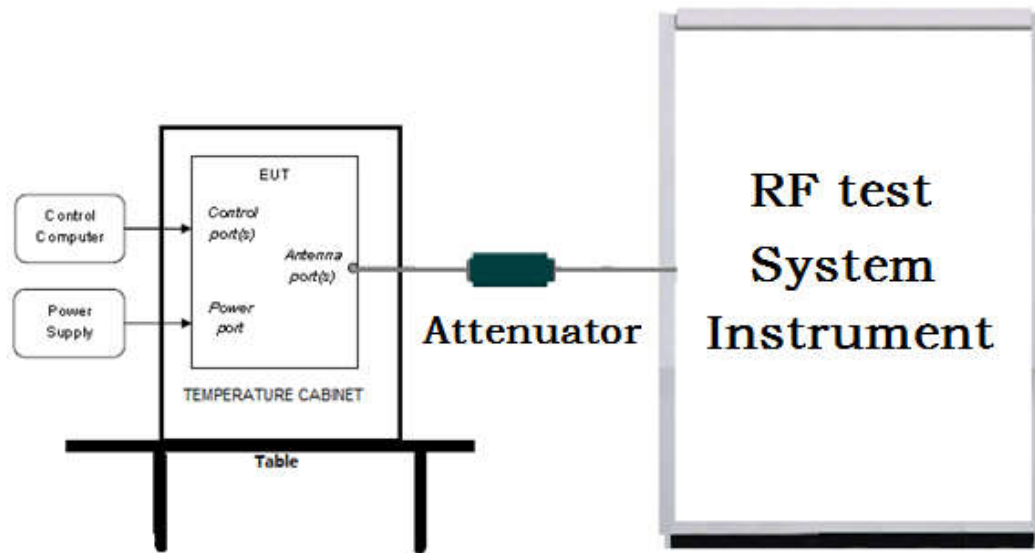

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

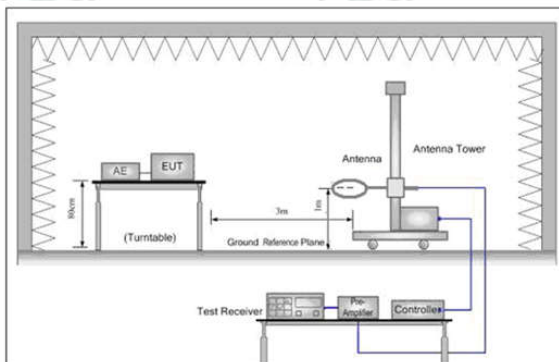


Figure 1. Below 30MHz

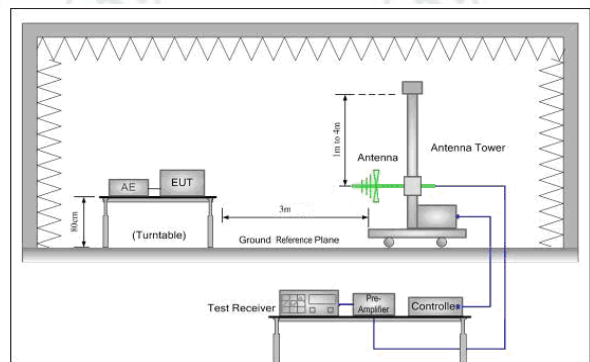


Figure 2. 30MHz to 1GHz


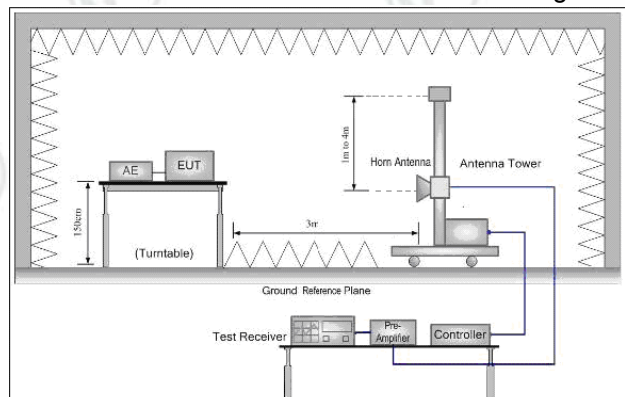


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

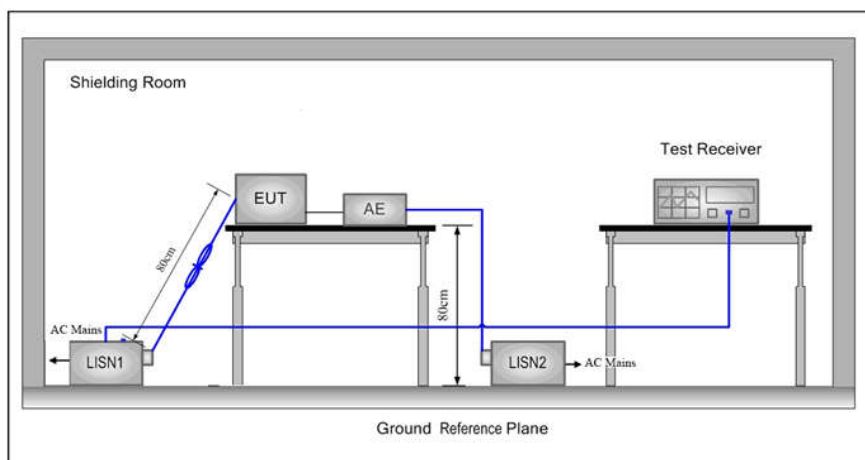

5.2 Test Environment

Operating Environment:	
Temperature:	23.6°C
Humidity:	63% RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
Transmitting mode:	The EUT transmitted the continuous signal at the specific channel(s).			

Test mode:

Pre-scan under all rate at lowest channel 1

Scan under air rate at lowest channel								
Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power(dBm)	15.13	15.19	15.21	15.44				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power(dBm)	14.64	14.55	14.23	14.41	14.18	14.52	14.14	14.12
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power(dBm)	14.05	14.00	13.85	13.62	13.62	13.74	13.57	13.85

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).

6 General Information

6.1 Client Information

Applicant:	Shenzhen Ai-Thinker Technology Co., Ltd.
Address of Applicant:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China
Manufacturer:	Shenzhen Ai-Thinker Technology Co., Ltd.
Address of Manufacturer:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China
Factory:	Shenzhen Ai-Thinker Technology Co., Ltd.
Address of Factory:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China

6.2 General Description of EUT

Product Name:	WiFi module
Model No.(EUT):	ESP-01F
Trade Mark:	N/A
EUT Supports Radios application:	WiFi 802.11b/g/n(HT20): 2412MHz to 2462MHz
Power Supply:	DC 3.3V
Sample Received Date:	Aug. 09, 2018
Sample tested Date:	Aug. 09, 2018 to Oct. 30, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20): OFDM (64QAM, 16QAM, QPSK,BPSK)
Test Power Grade:	N/A
Test Software of EUT:	ESP Series Modules FCC & CE Test Tool V2.2.3.exe (manufacturer declare)
Antenna Type:	Spring antenna
Antenna Gain:	2.78dBi
Test Voltage:	DC 3.3V

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Designation No.: CN1164

Centre Testing International Group Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The American association for Centre Testing International Group Co., Ltd. EMC laboratory accreditation Designation No.: CN1164

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A.

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-13-2018	03-12-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-13-2018	03-12-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/Humidity Indicator	Defu	TH128	/	07-02-2018	07-01-2019
Communication test set	Agilent	E5515C	GB47050 534	03-16-2018	03-15-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
LISN	R&S	ENV216	100098	05-10-2018	05-10-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-10-2018	05-10-2019
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-30-2018	05-29-2019
ISN	TESEQ	ISN T800	30297	02-06-2018	02-05-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	04-26-2018	04-25-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-22-2017	08-21-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Double ridge horn antenna	A.H.SYSTEM S	SAS-574	6042	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEM S	PAP-1840-60	6041	06-05-2018	06-04-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Multi device Controller	maturio	NCD/070/10711112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)




Appendix A): Conducted Peak Output Power




Result Table

Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	15.44	PASS
11B	MCH	15.27	PASS
11B	HCH	16.66	PASS
11G	LCH	14.64	PASS
11G	MCH	14.92	PASS
11G	HCH	14.99	PASS
11N20SISO	LCH	14.05	PASS
11N20SISO	MCH	14.23	PASS
11N20SISO	HCH	14.30	PASS

Test Graph

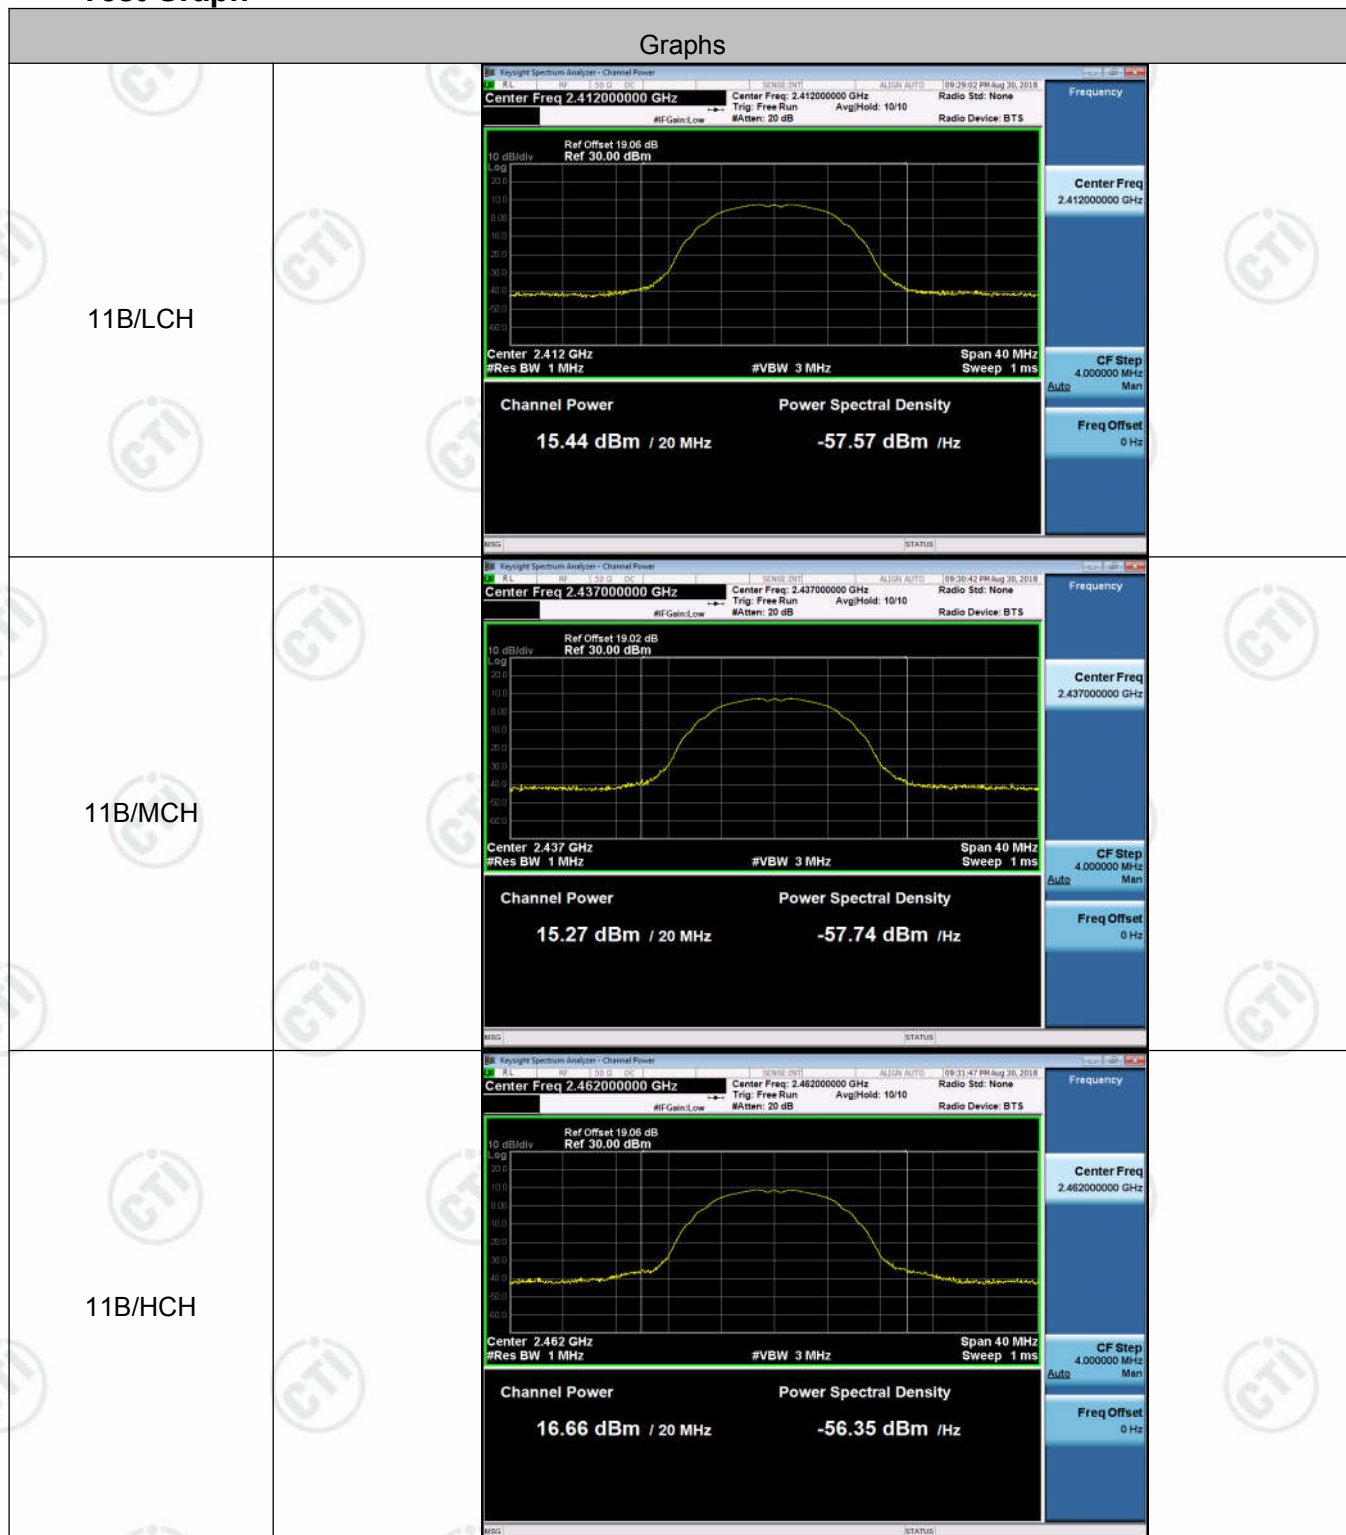

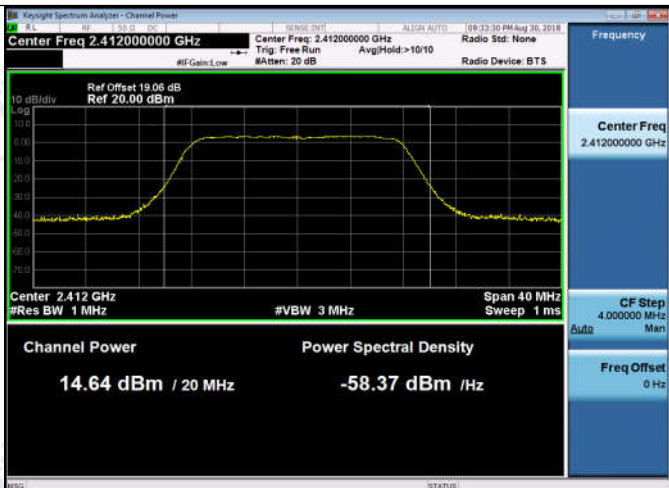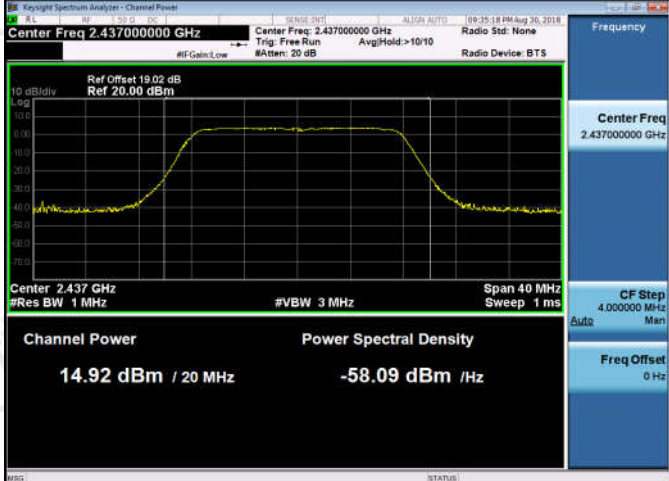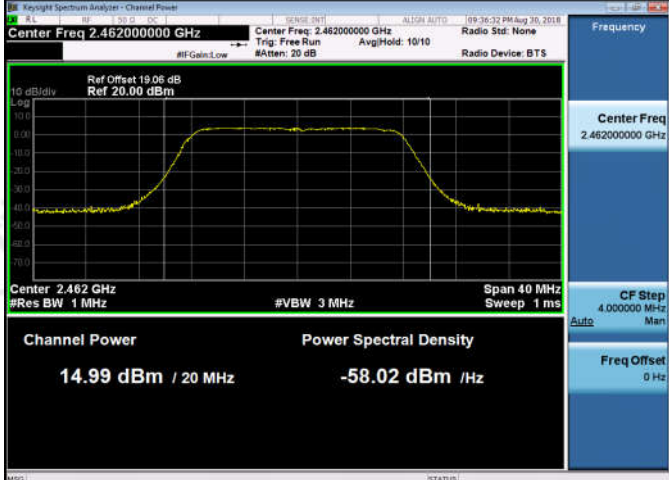11G/LCH	 Keyight Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset 19.06 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power: 14.64 dBm / 20 MHz Power Spectral Density: -58.37 dBm / Hz
11G/MCH	 Keyight Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset 19.02 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power: 14.92 dBm / 20 MHz Power Spectral Density: -58.09 dBm / Hz
11G/HCH	 Keyight Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset 19.06 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms Channel Power: 14.99 dBm / 20 MHz Power Spectral Density: -58.02 dBm / Hz

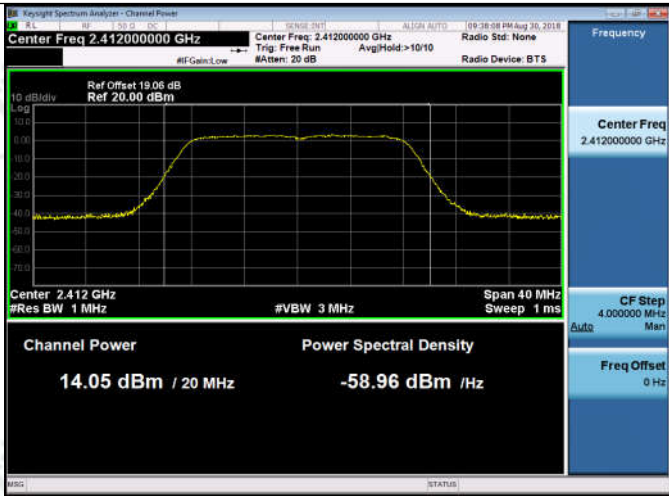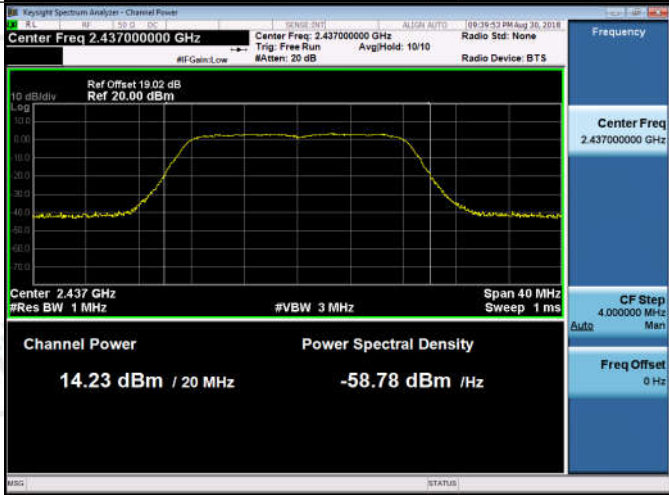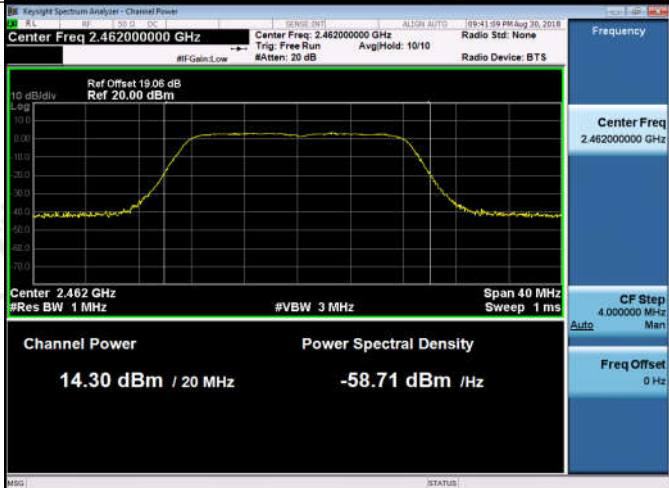
11N20SISO/LCH	 Keynote Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset 19.06 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 1 MHz Channel Power: 14.05 dBm / 20 MHz Power Spectral Density: -58.96 dBm / Hz
11N20SISO/MCH	 Keynote Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset 19.02 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 1 MHz Channel Power: 14.23 dBm / 20 MHz Power Spectral Density: -58.78 dBm / Hz
11N20SISO/HCH	 Keynote Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset 19.06 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 1 MHz Channel Power: 14.30 dBm / 20 MHz Power Spectral Density: -58.71 dBm / Hz




Appendix B): 6dB Occupied Bandwidth




Result Table

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	8.109	10.444	PASS
11B	MCH	8.082	10.429	PASS
11B	HCH	8.091	10.481	PASS
11G	LCH	15.67	16.186	PASS
11G	MCH	15.69	16.200	PASS
11G	HCH	15.50	16.203	PASS
11N20SISO	LCH	15.40	17.027	PASS
11N20SISO	MCH	15.39	17.024	PASS
11N20SISO	HCH	15.39	17.028	PASS

Test Graph

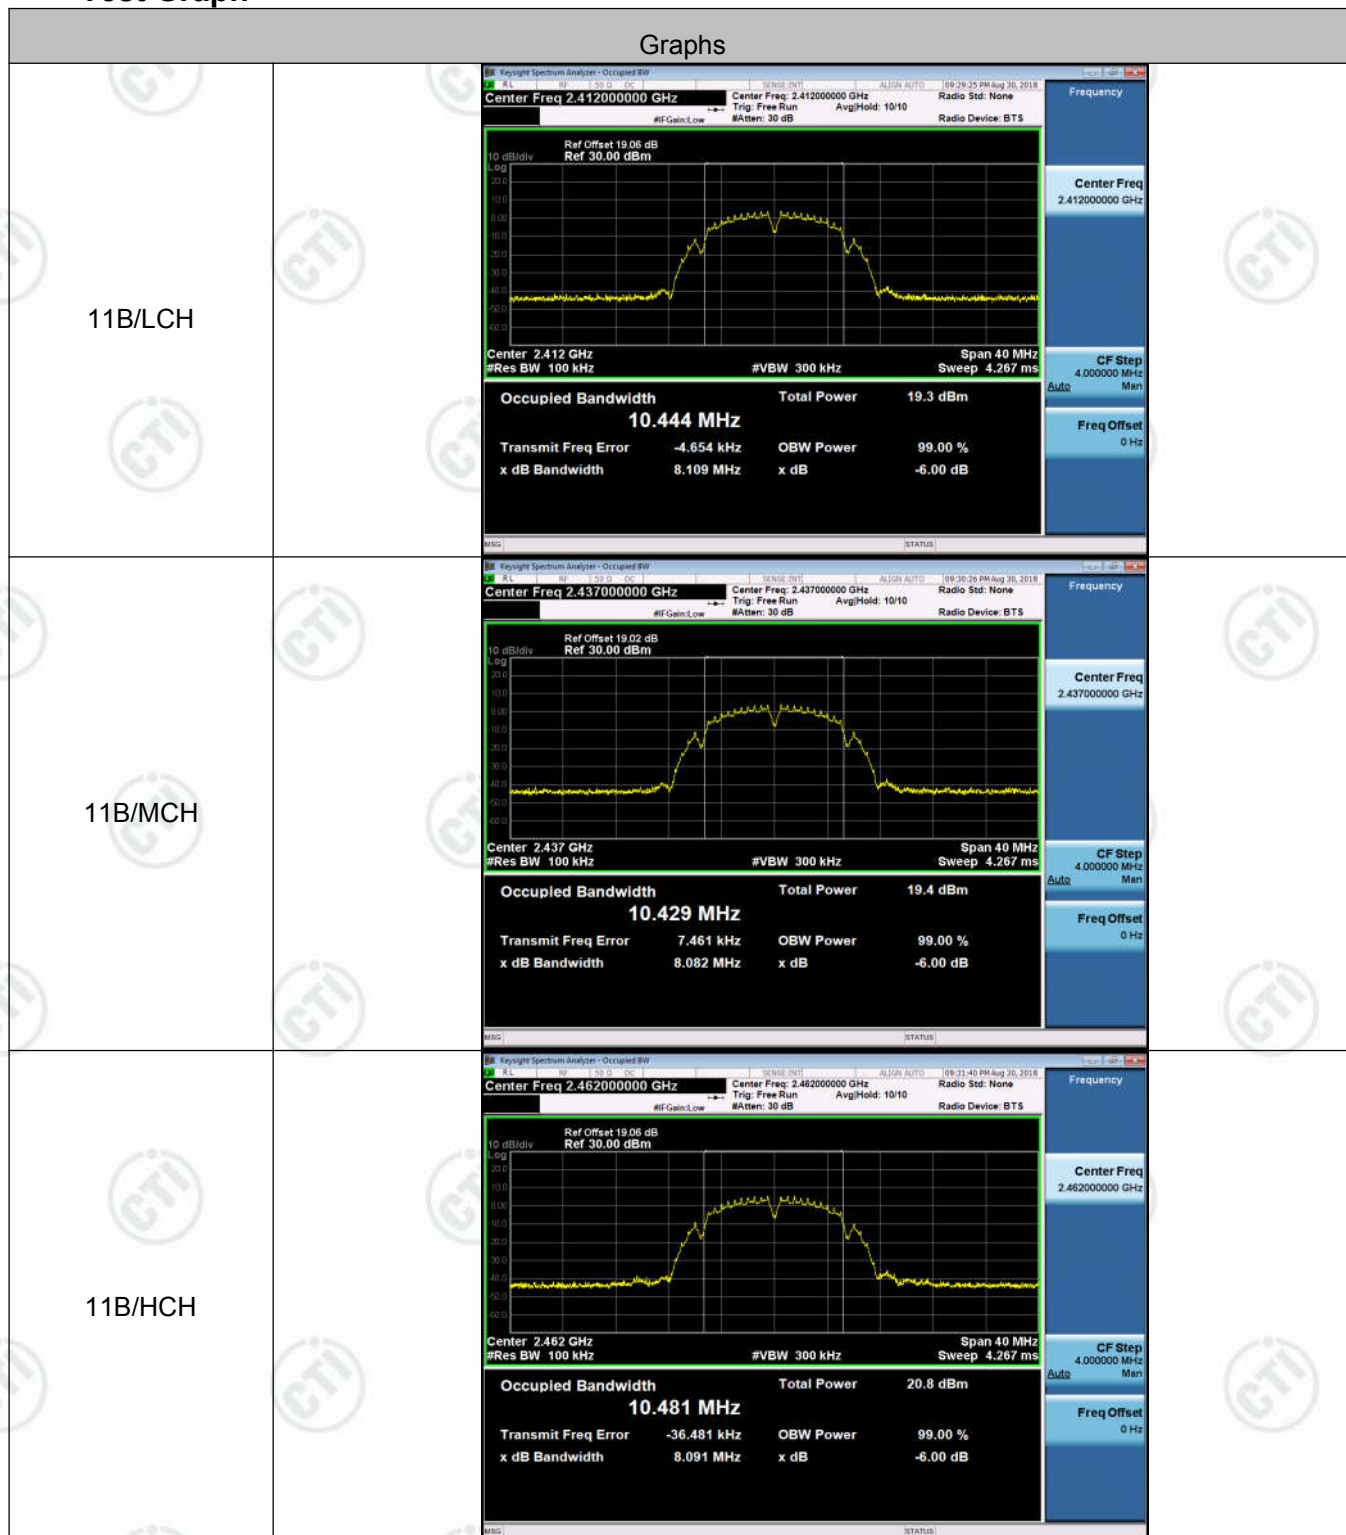

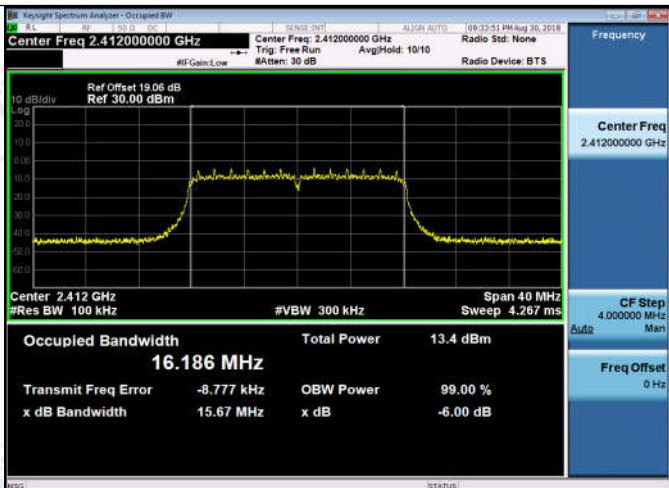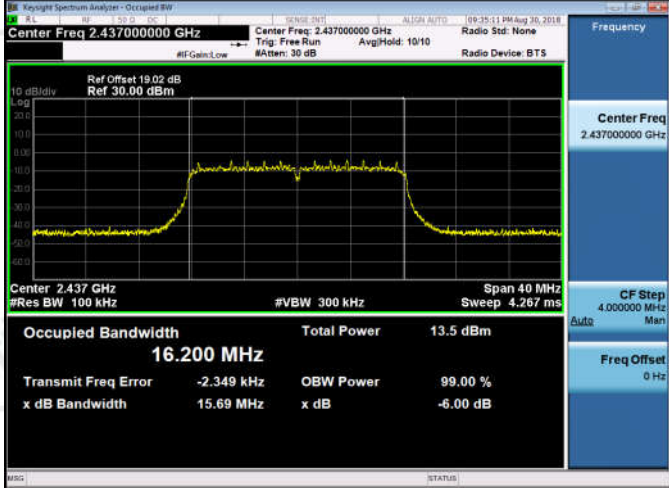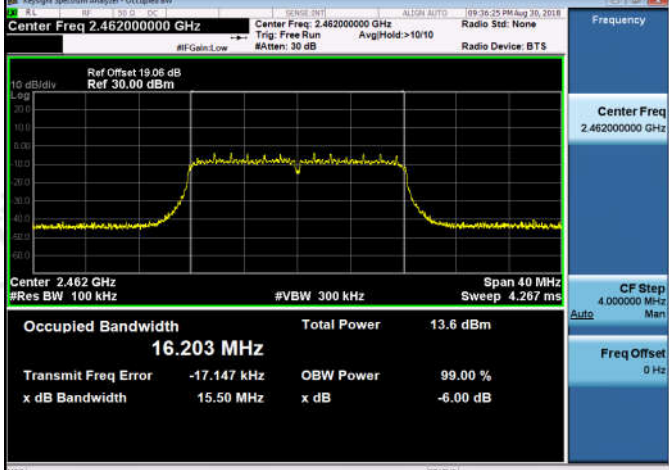11G/LCH	
11G/MCH	
11G/HCH	

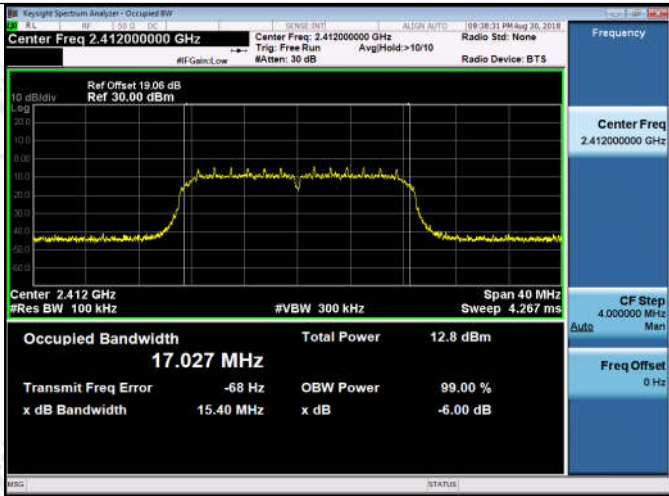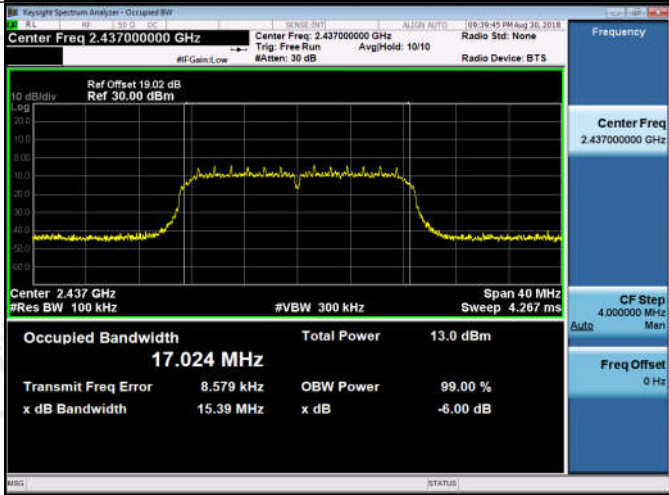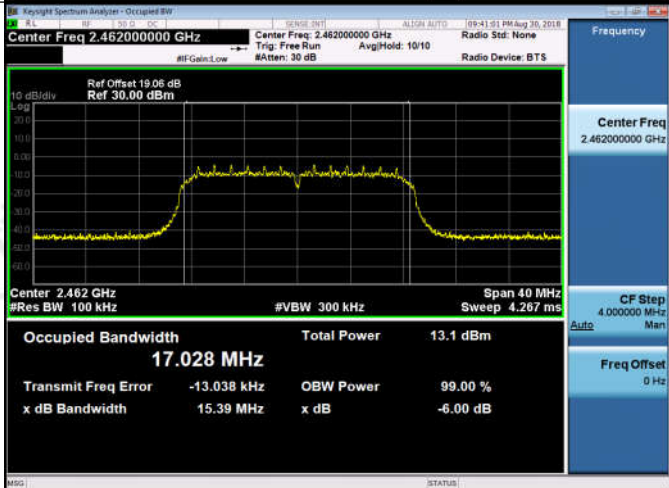11N20SISO/LCH	 Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset 19.06 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.027 MHz Total Power 12.8 dBm Transmit Freq Error -68 Hz OBW Power 99.00 % x dB Bandwidth 15.40 MHz x dB -6.00 dB
11N20SISO/MCH	 Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 19.02 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.024 MHz Total Power 13.0 dBm Transmit Freq Error 8.579 kHz OBW Power 99.00 % x dB Bandwidth 15.39 MHz x dB -6.00 dB
11N20SISO/HCH	 Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 19.06 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 17.028 MHz Total Power 13.1 dBm Transmit Freq Error -13.038 kHz OBW Power 99.00 % x dB Bandwidth 15.39 MHz x dB -6.00 dB


Appendix C): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	3.972	-50.025	-26.03	PASS
11B	HCH	5.344	-49.356	-24.66	PASS
11G	LCH	-3.844	-50.715	-33.84	PASS
11G	HCH	-3.887	-50.024	-33.89	PASS
11N20SISO	LCH	-4.333	-50.272	-34.33	PASS
11N20SISO	HCH	-4.180	-50.662	-34.18	PASS

Test Graph

Graphs

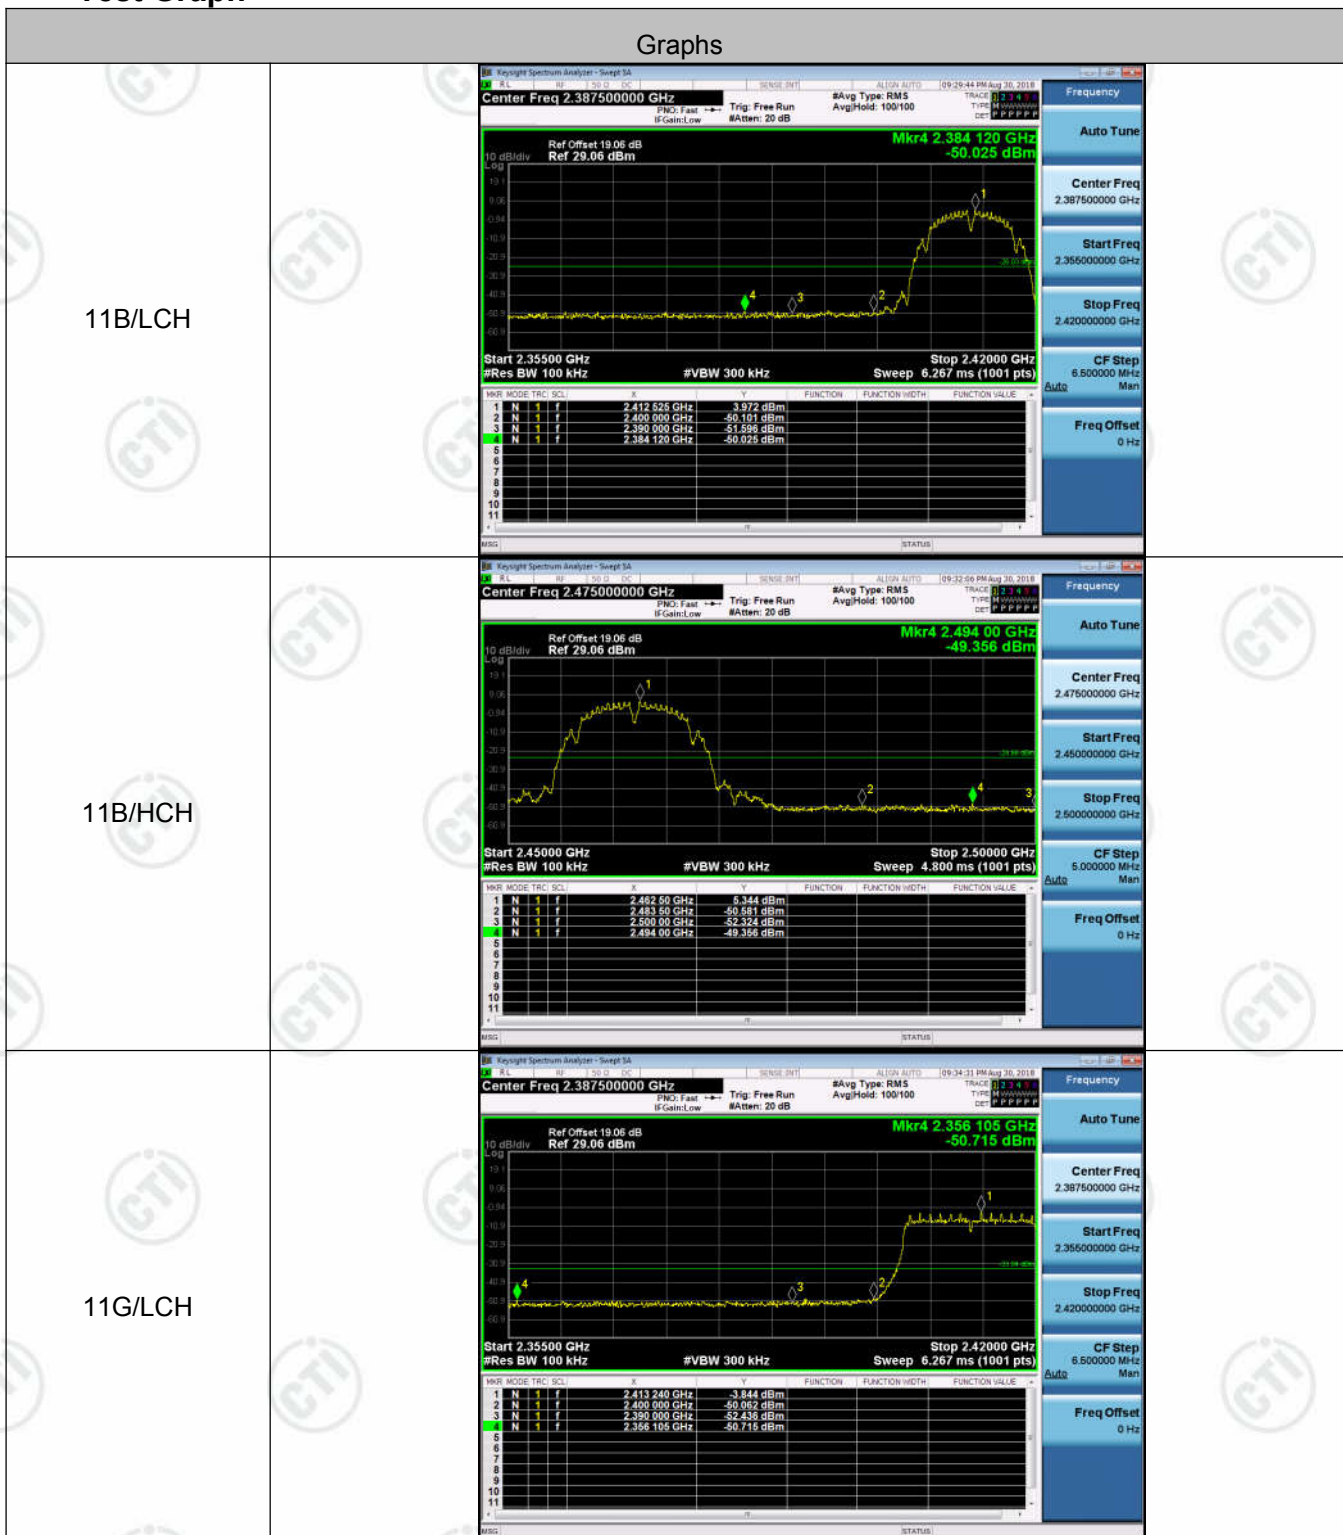

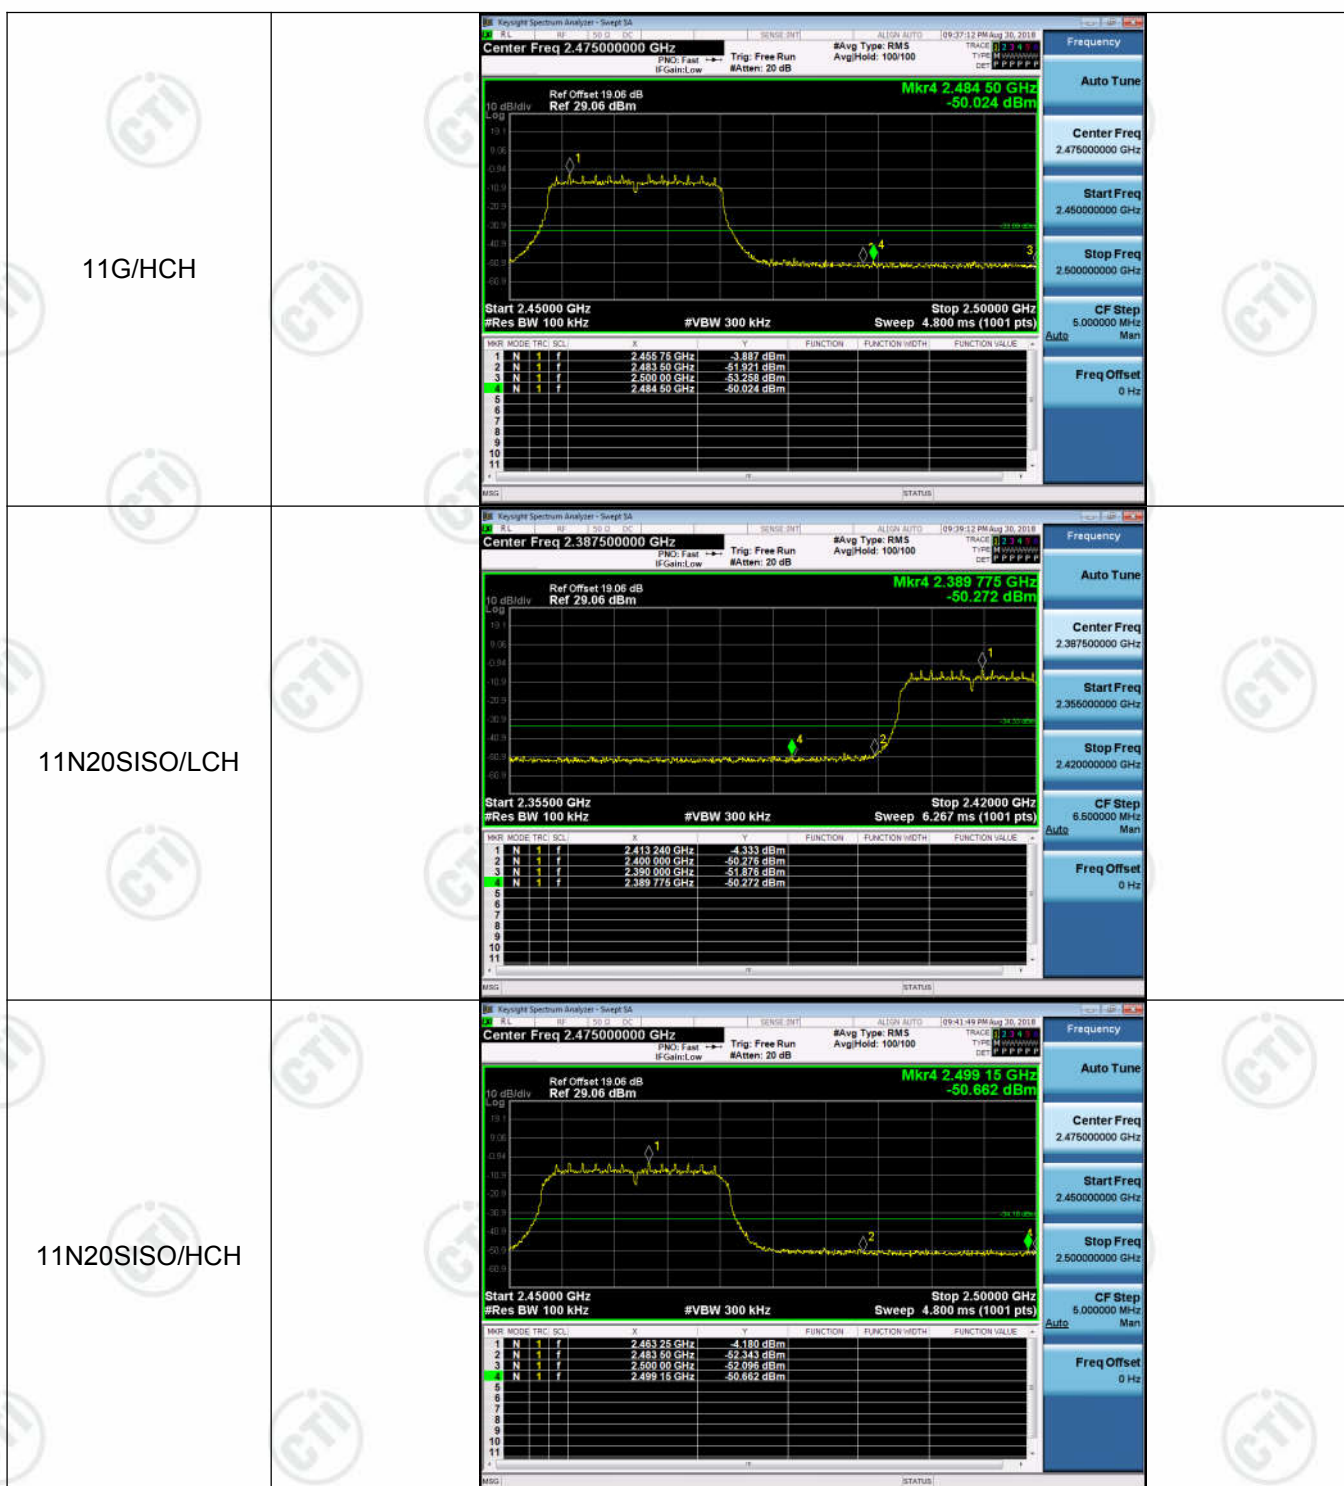



Appendix D): RF Conducted Spurious Emissions



Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	4.337	<Limit	PASS
11B	MCH	4.309	<Limit	PASS
11B	HCH	5.488	<Limit	PASS
11G	LCH	-3.82	<Limit	PASS
11G	MCH	-3.535	<Limit	PASS
11G	HCH	-3.677	<Limit	PASS
11N20SISO	LCH	-4.219	<Limit	PASS
11N20SISO	MCH	-3.99	<Limit	PASS
11N20SISO	HCH	-4.345	<Limit	PASS



Test Graph


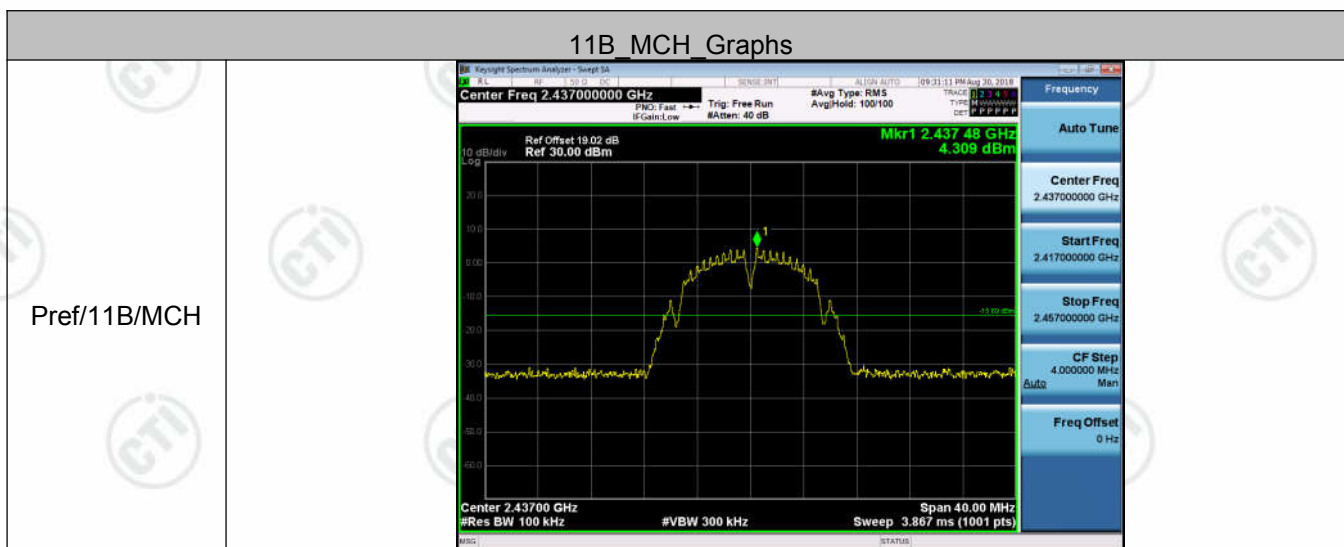


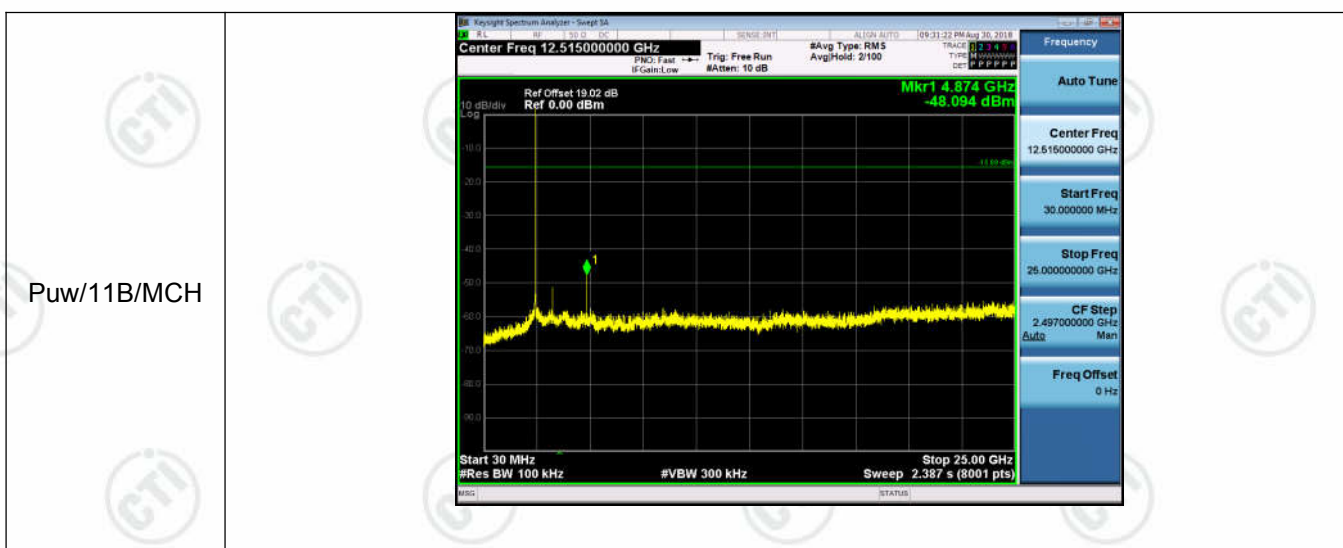

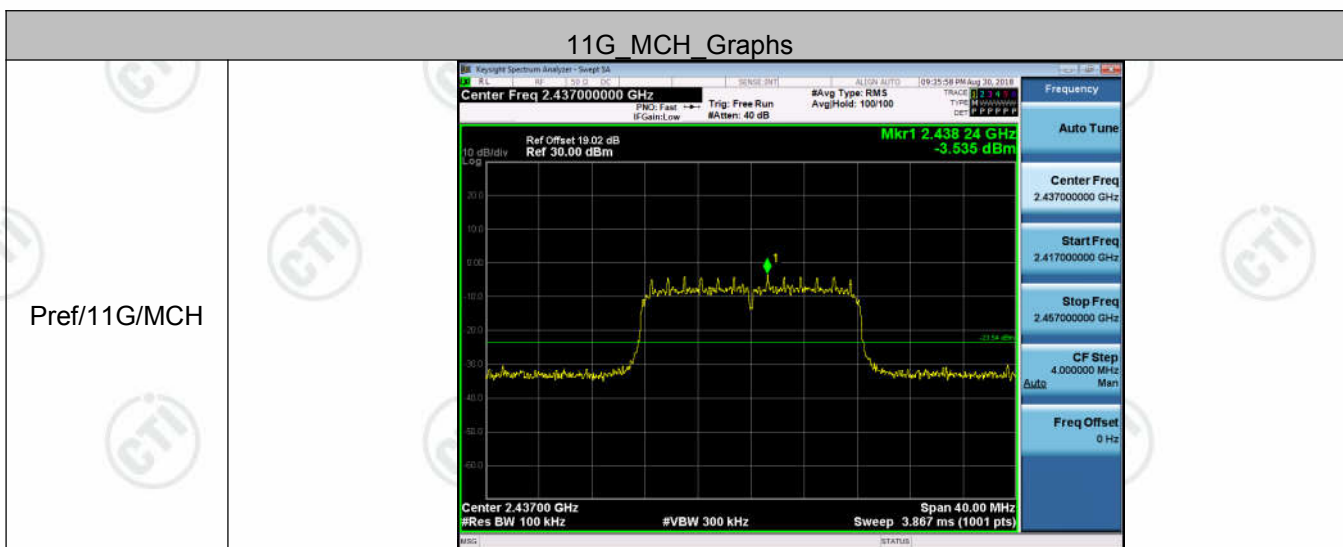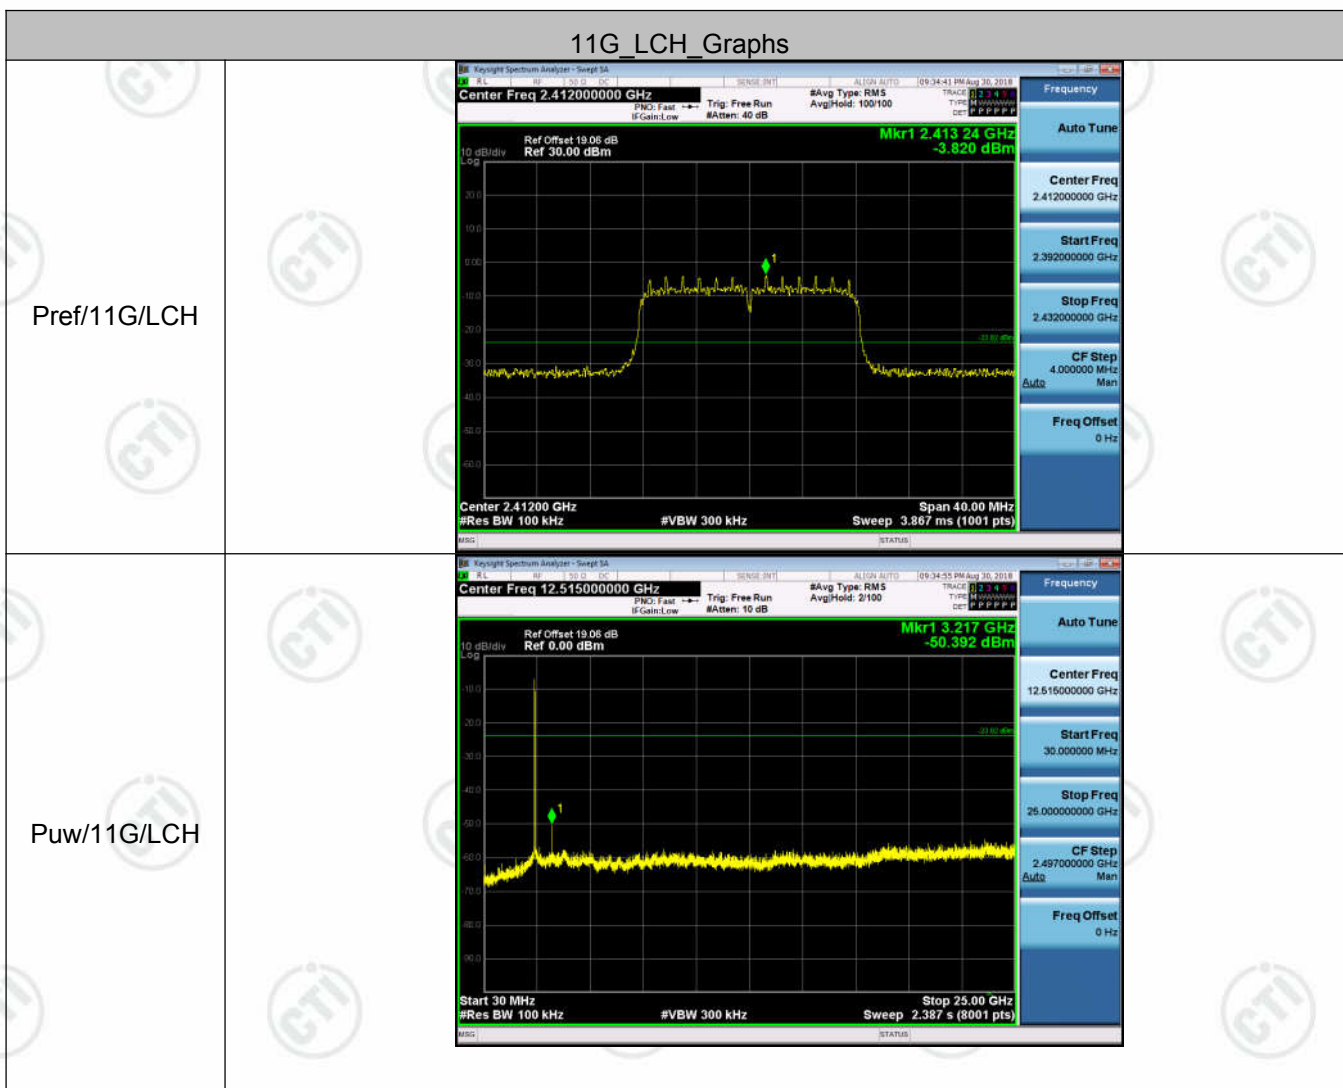

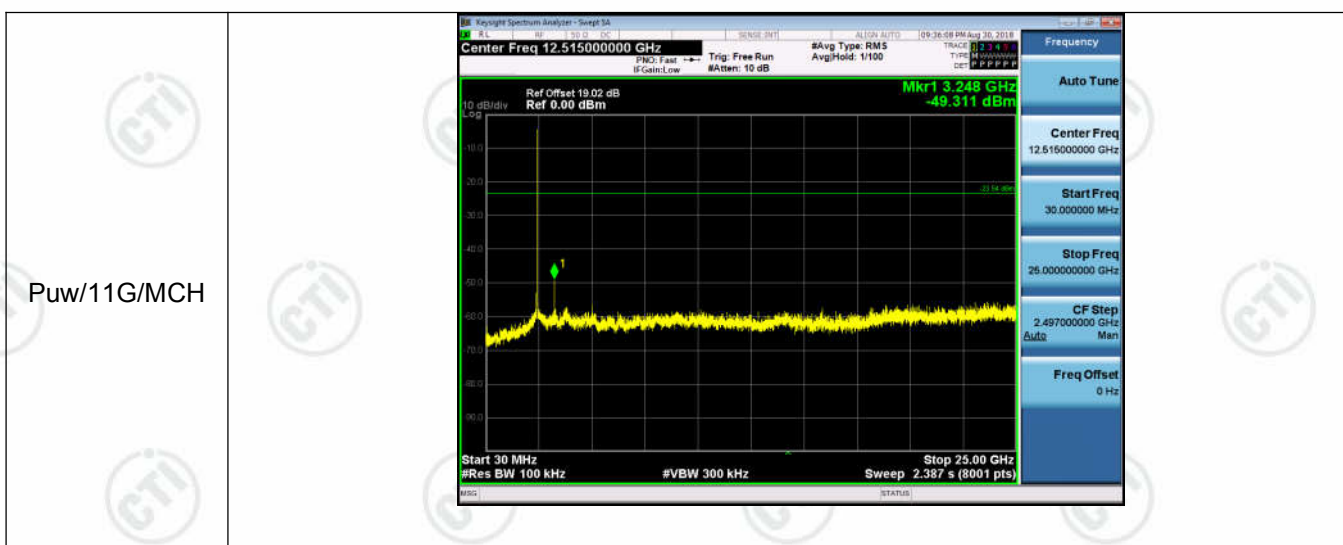

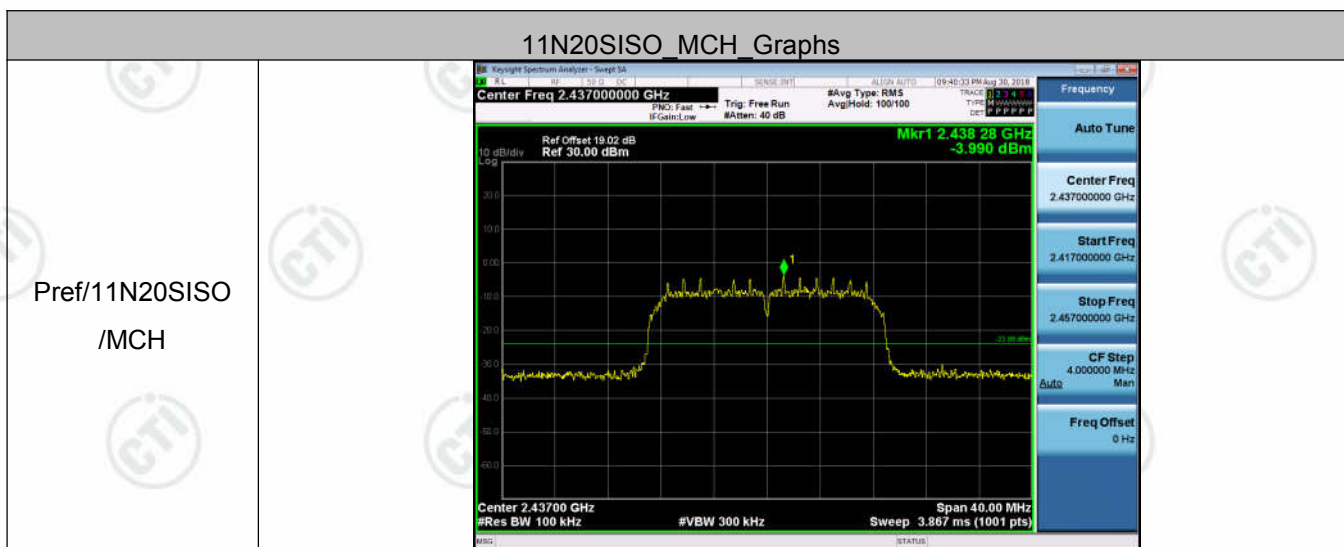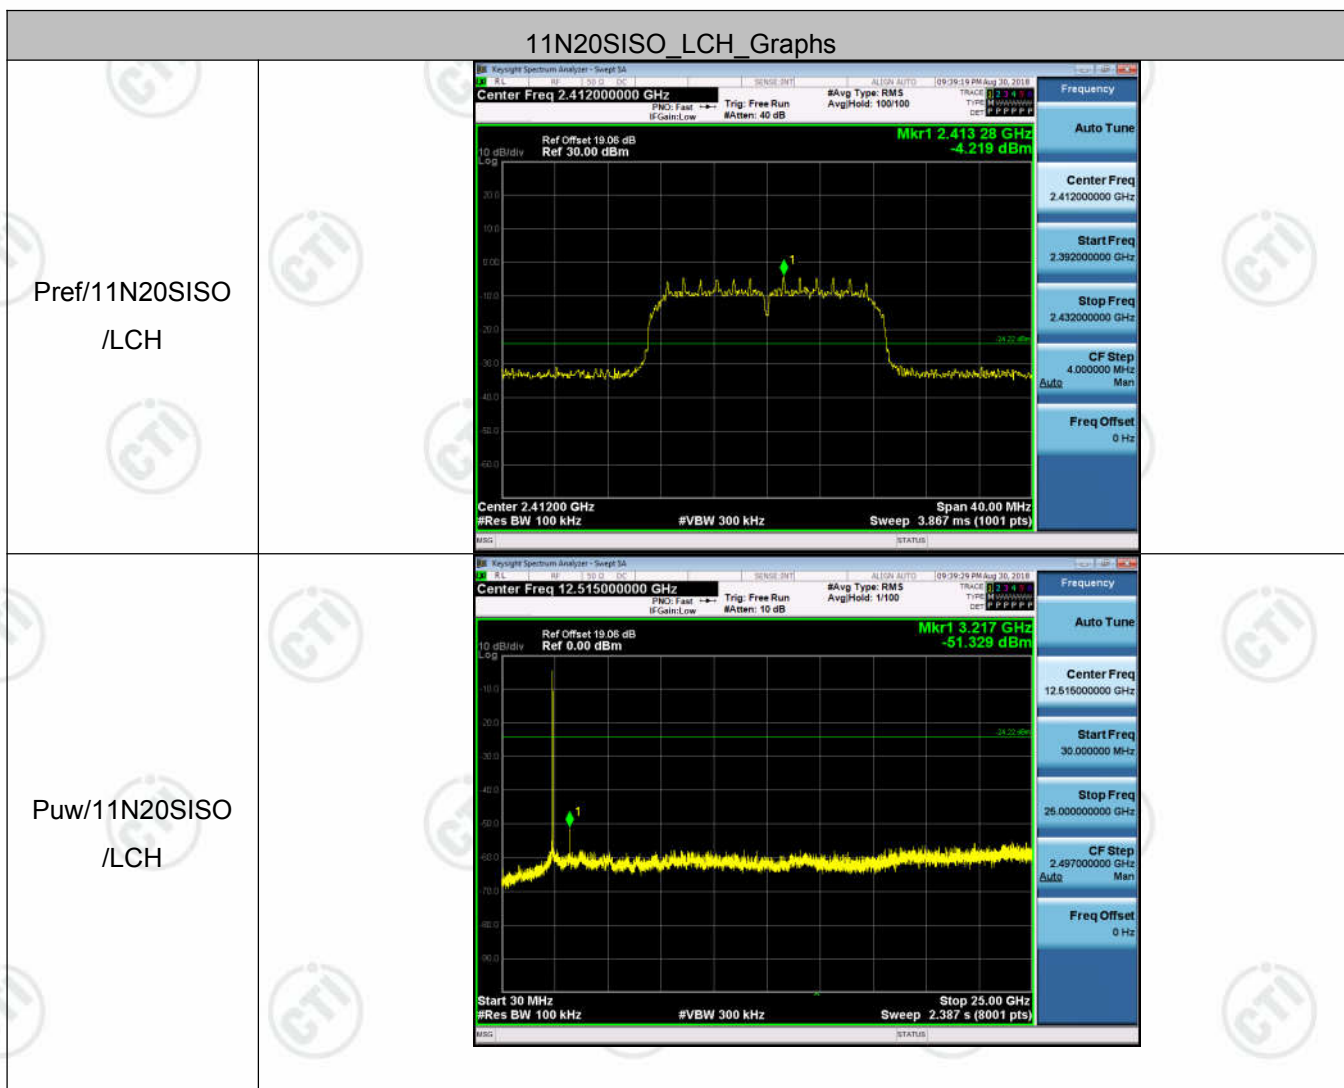

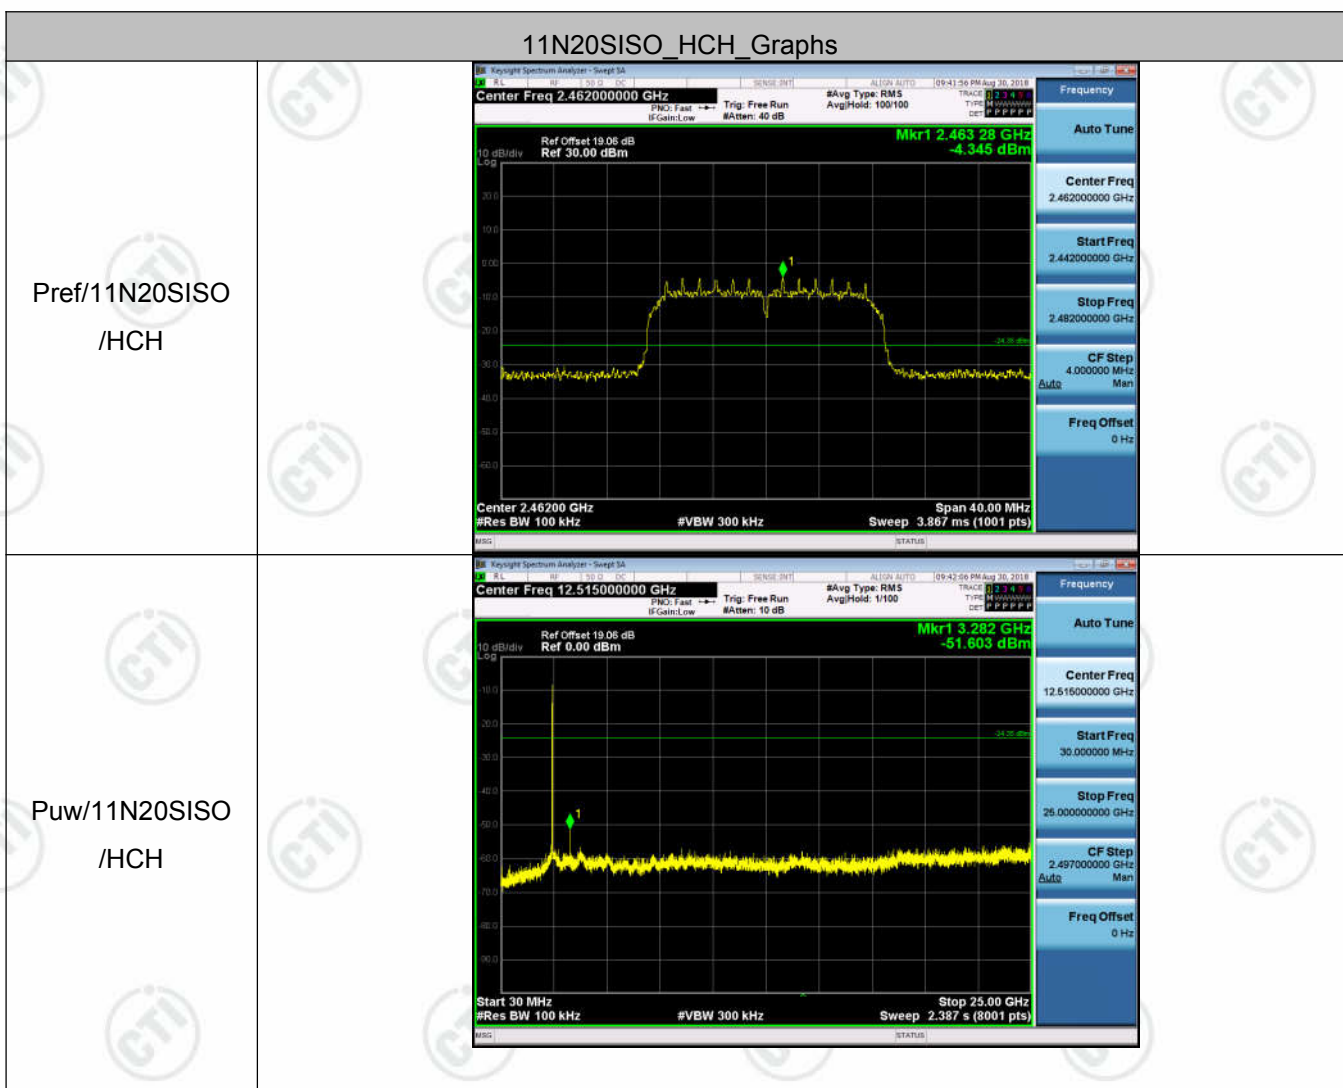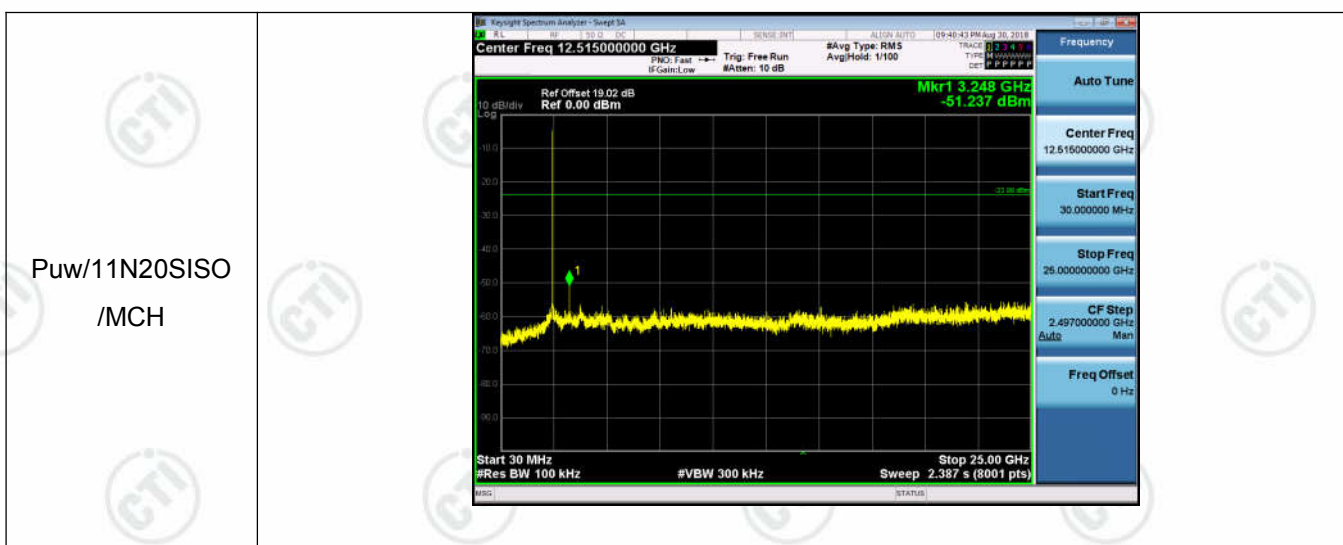


Appendix E): Power Spectral Density


Result Table

Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	LCH	-10.181	8	PASS
11B	MCH	-10.463	8	PASS
11B	HCH	-8.503	8	PASS
11G	LCH	-18.273	8	PASS
11G	MCH	-17.962	8	PASS
11G	HCH	-18.177	8	PASS
11N20SISO	LCH	-19.118	8	PASS
11N20SISO	MCH	-19.170	8	PASS
11N20SISO	HCH	-18.838	8	PASS

Test Graph

Graphs		
11B/LCH		Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 19.06 dB Ref 10.00 dBm Mkr1 2.411392 GHz -10.181 dBm Center 2.412000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 1.283 s (1001 pts) Span 12.16 MHz Frequency Auto Tune Center Freq 2.412000000 GHz Start Freq 2.406918250 GHz Stop Freq 2.418081750 GHz CF Step 1.216350 MHz Auto Man Freq Offset 0 Hz
11B/MCH		Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 19.02 dB Ref 10.00 dBm Mkr1 2.437579 GHz -10.463 dBm Center 2.437000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 1.278 s (1001 pts) Span 12.12 MHz Frequency Auto Tune Center Freq 2.437000000 GHz Start Freq 2.430938500 GHz Stop Freq 2.443061500 GHz CF Step 1.212300 MHz Auto Man Freq Offset 0 Hz
11B/HCH		Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 19.06 dB Ref 10.00 dBm Mkr1 2.461260 GHz -8.503 dBm Center 2.462000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 1.280 s (1001 pts) Span 12.14 MHz Frequency Auto Tune Center Freq 2.462000000 GHz Start Freq 2.456931750 GHz Stop Freq 2.468068250 GHz CF Step 1.213650 MHz Auto Man Freq Offset 0 Hz

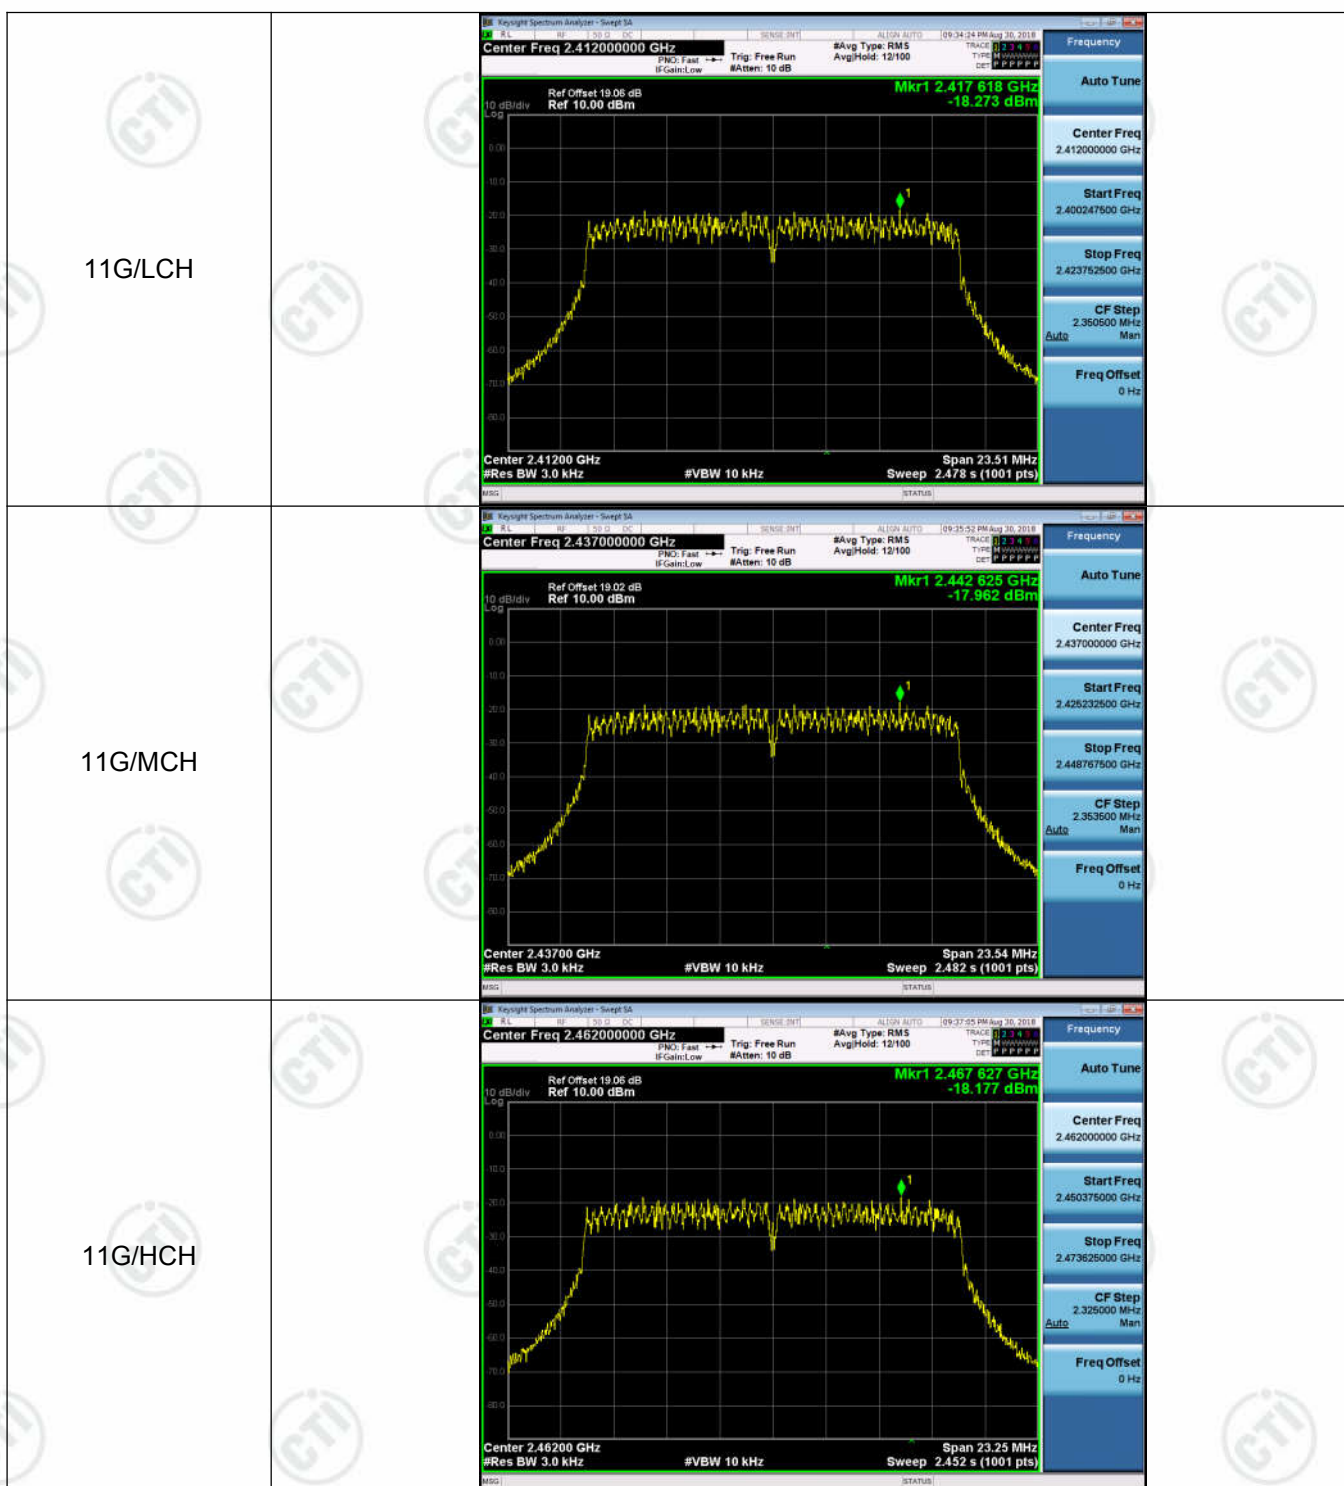

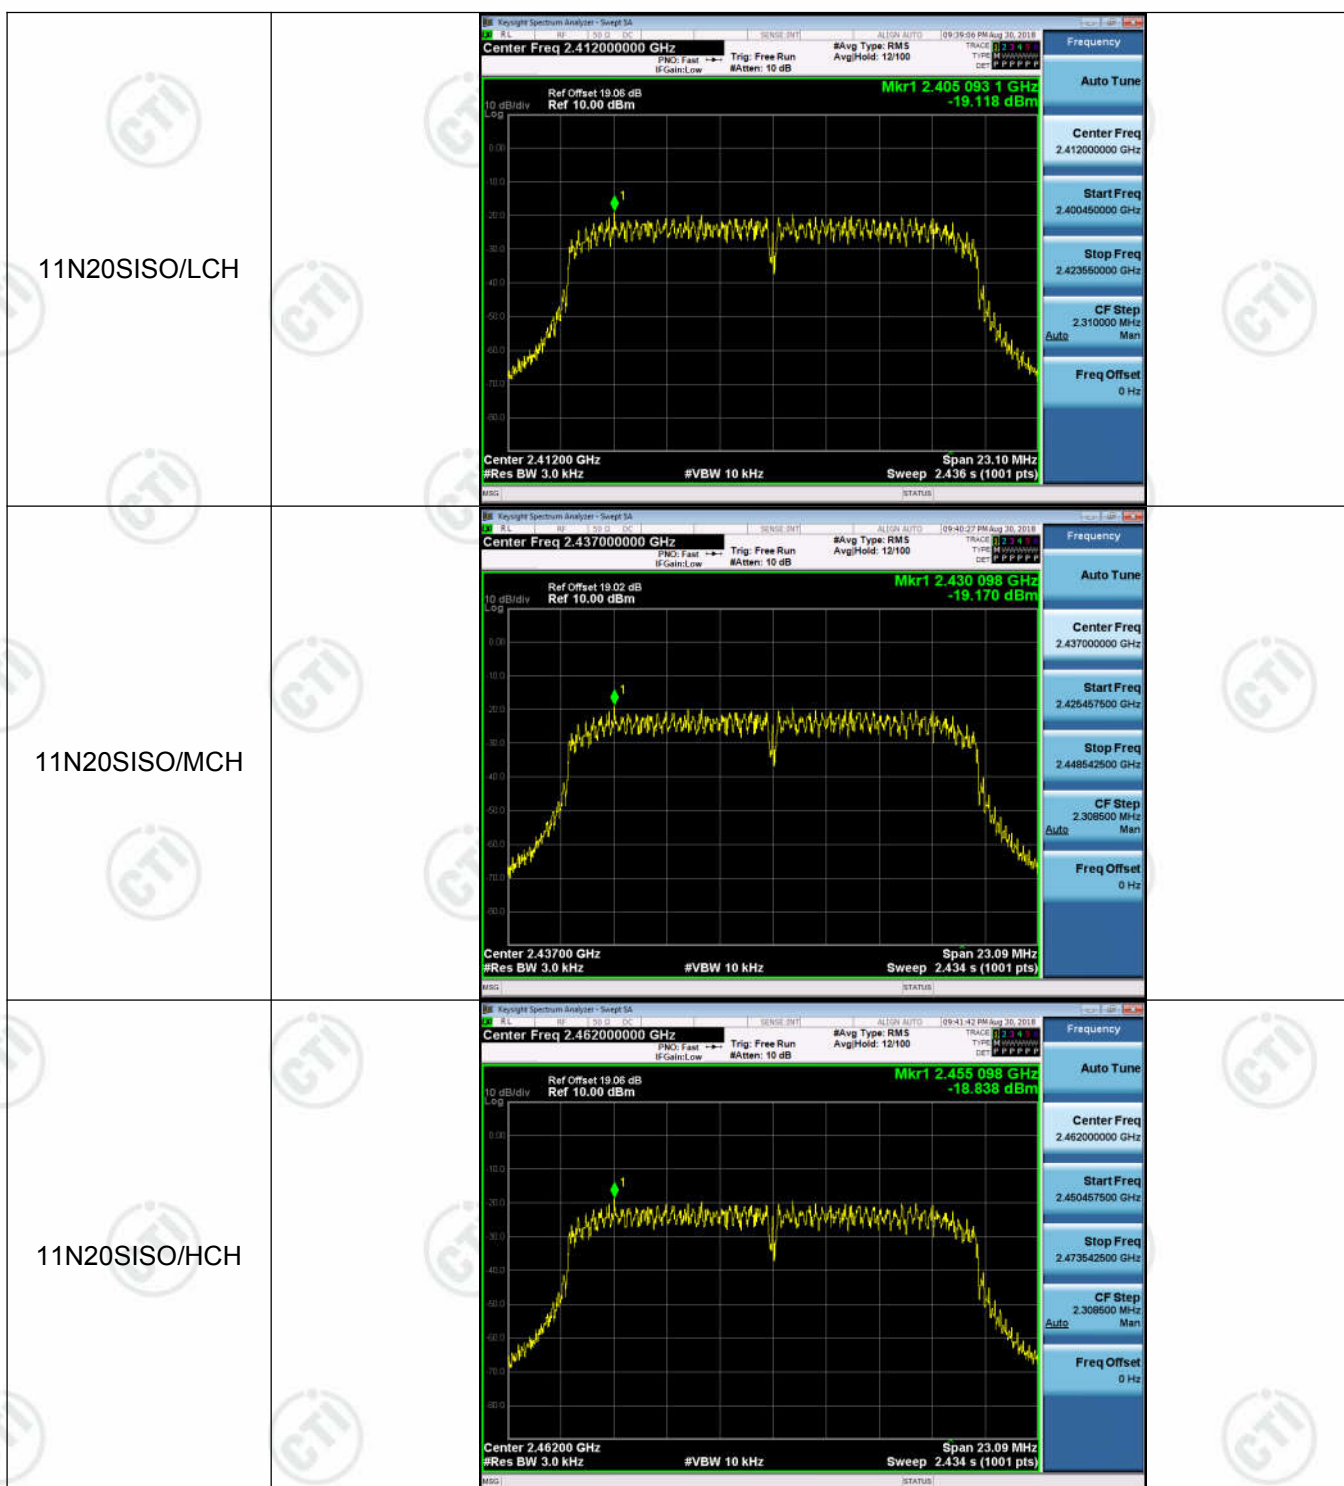

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Spring antenna and no consideration of replacement. The best case gain of the antenna is 2.78dBi.

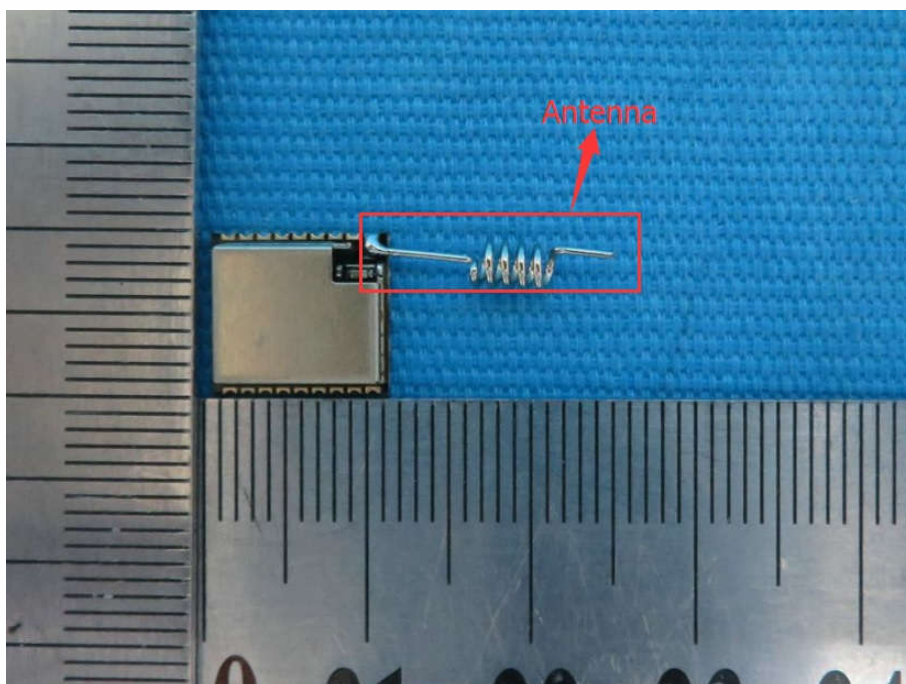

Appendix G): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

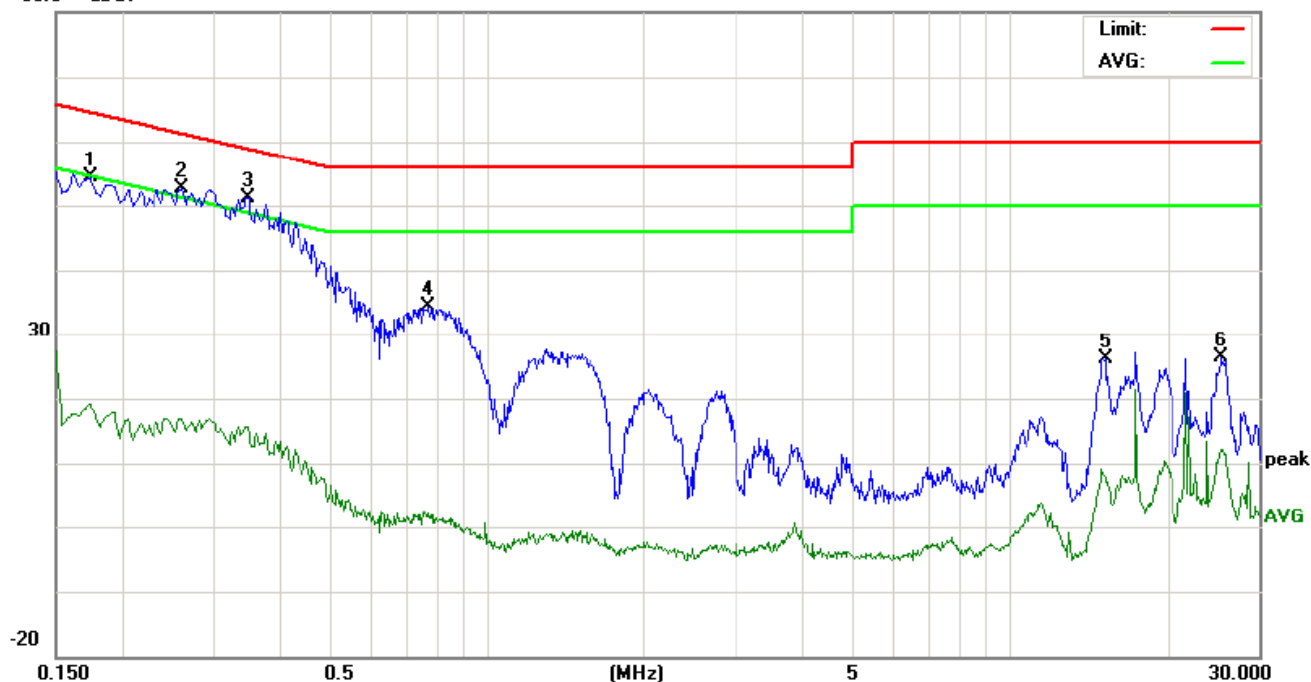

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	44.54	38.62	9.50	9.74	54.28	48.36	19.24	64.76	54.76	-16.40	-35.52	P	
2	0.2620	42.79	35.46	7.13	9.75	52.54	45.21	16.88	61.36	51.36	-16.15	-34.48	P	
3	0.3500	41.43	34.33	5.88	9.76	51.19	44.09	15.64	58.96	48.96	-14.87	-33.32	P	
4	0.7740	24.55	17.85	-7.59	9.74	34.29	27.59	2.15	56.00	46.00	-28.41	-43.85	P	
5	15.2580	16.11	9.87	-2.19	10.01	26.12	19.88	7.82	60.00	50.00	-40.12	-42.18	P	
6	25.5780	16.23	10.12	1.94	10.19	26.42	20.31	12.13	60.00	50.00	-39.69	-37.87	P	

Neutral line:

80.0 dBuV

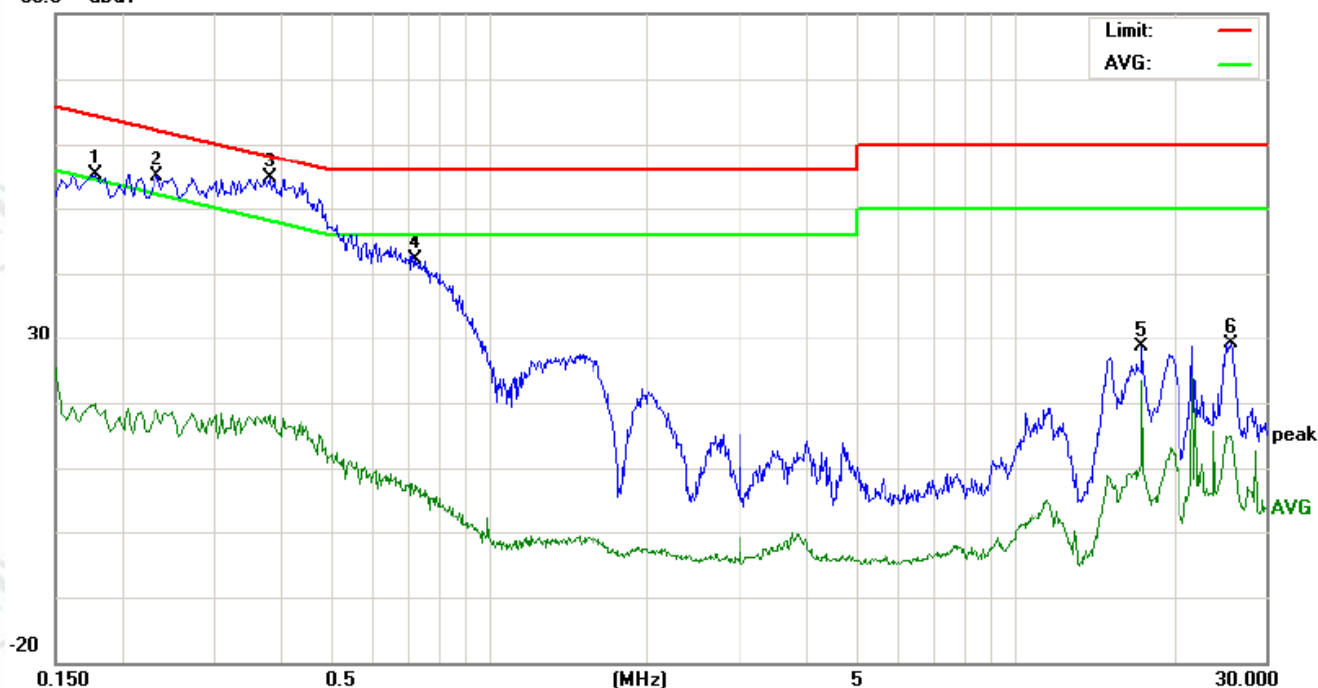

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	45.28	38.74	10.04	9.73	55.01	48.47	19.77	64.57	54.57	-16.10	-34.80	P	
2	0.2340	45.25	38.45	9.03	9.73	54.98	48.18	18.76	62.30	52.30	-14.12	-33.54	P	
3	0.3820	44.93	37.63	8.39	9.76	54.69	47.39	18.15	58.23	48.23	-10.84	-30.08	P	
4	0.7220	32.26	25.41	-2.48	9.75	42.01	35.16	7.27	56.00	46.00	-20.84	-38.73	P	
5	17.4180	18.69	12.47	13.28	10.03	28.72	22.50	23.31	60.00	50.00	-37.50	-26.69	P	
6	25.7540	19.04	12.89	4.75	10.20	29.24	23.09	14.95	60.00	50.00	-36.91	-35.05	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


Test plot as follows:

Worse case mode:	802.11b (11Mbps)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

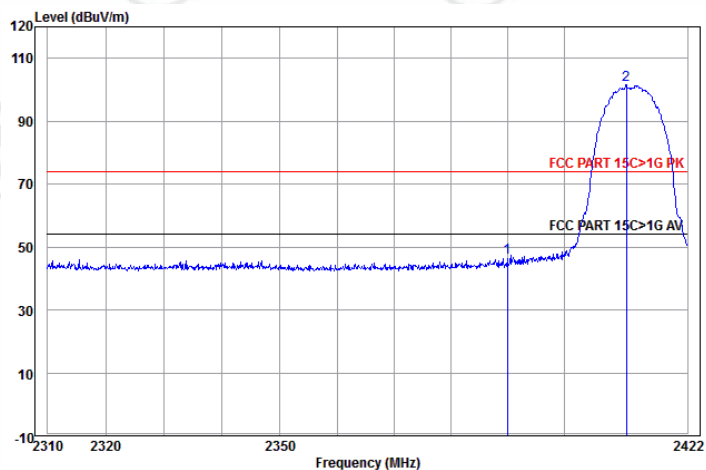


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	15.98	46.69	74.00	-27.31	Horizontal	
2 pp	2411.131	27.62	3.08	70.80	101.50	74.00	27.50	Horizontal	

Worse case mode:	802.11b (11Mbps)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

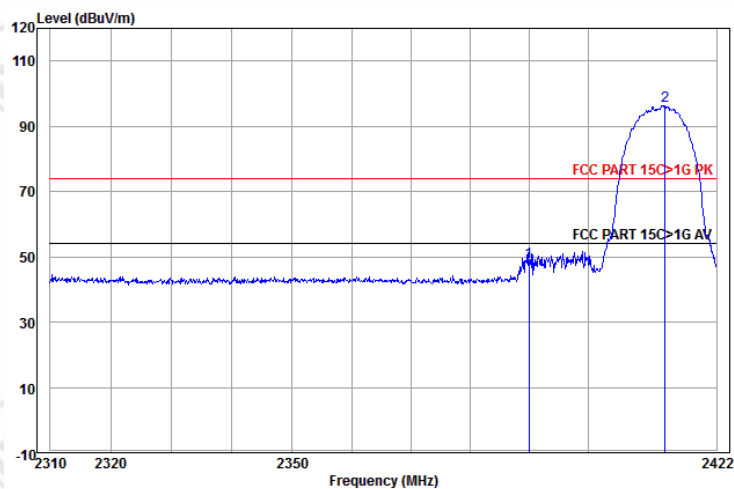


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	17.77	48.48	74.00	-25.52	Vertical	
2 pp	2413.186	27.61	3.08	65.66	96.35	74.00	22.35	Vertical	


Worse case mode:	802.11b (11Mbps)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

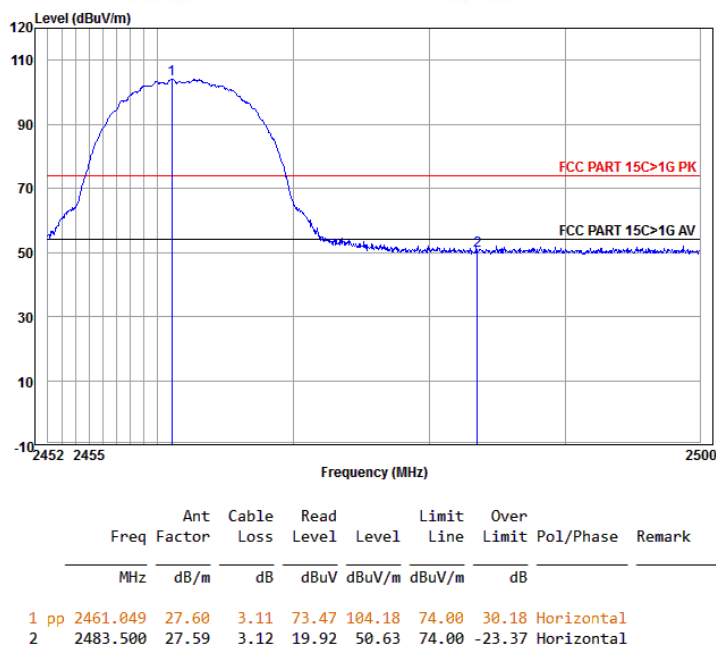

Worse case mode:	802.11b (11Mbps)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

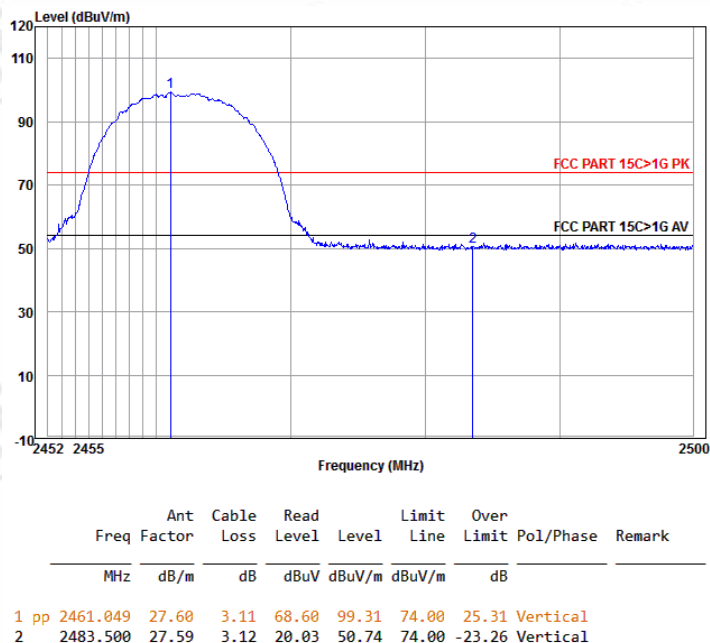


Worse case mode:	802.11g (6Mbps)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

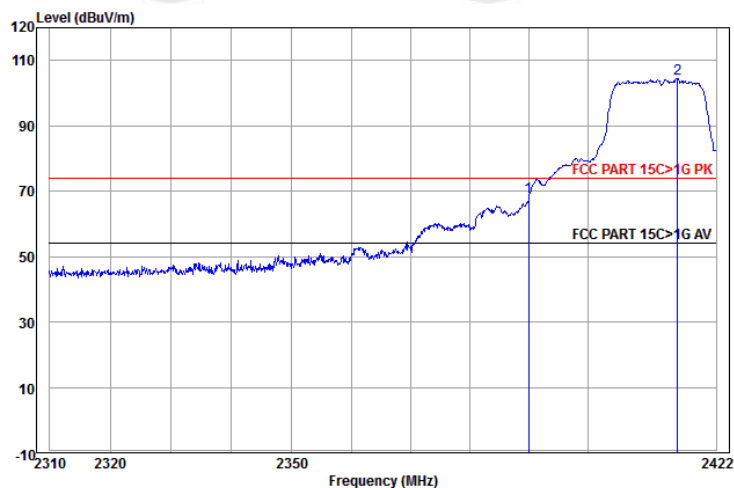


	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	37.52	68.23	74.00	-5.77	Horizontal	
2 pp	2415.358	27.61	3.08	73.73	104.42	74.00	30.42	Horizontal	

Worse case mode:	802.11g (6Mbps)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Average

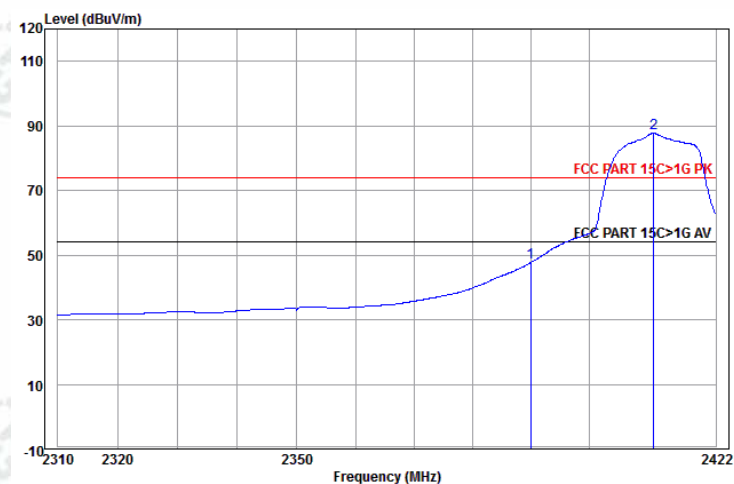


	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	17.05	47.76	54.00	-6.24	Horizontal	Average
2 pp	2411.245	27.62	3.08	57.12	87.82	54.00	33.82	Horizontal	Average

Worse case mode:	802.11g (6Mbps)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

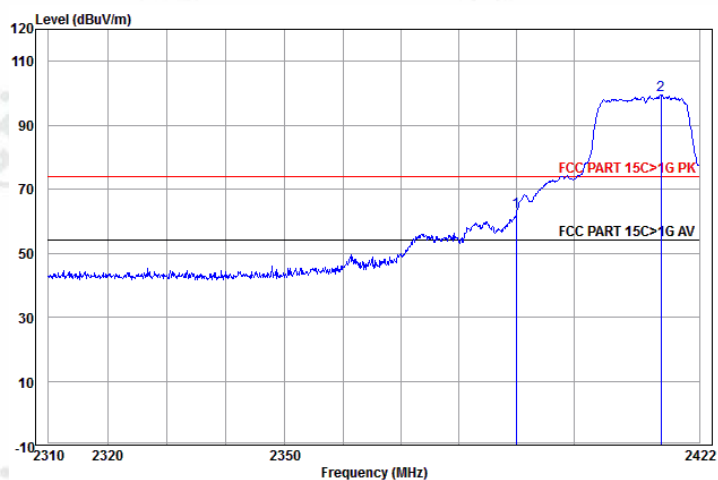


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	32.20	62.91	74.00	-11.09	Vertical	
2 pp	2415.244	27.61	3.08	68.84	99.53	74.00	25.53	Vertical	

Worse case mode:	802.11g (6Mbps)		
	Test channel: Lowest	Polarization: Vertical	Remark: Average

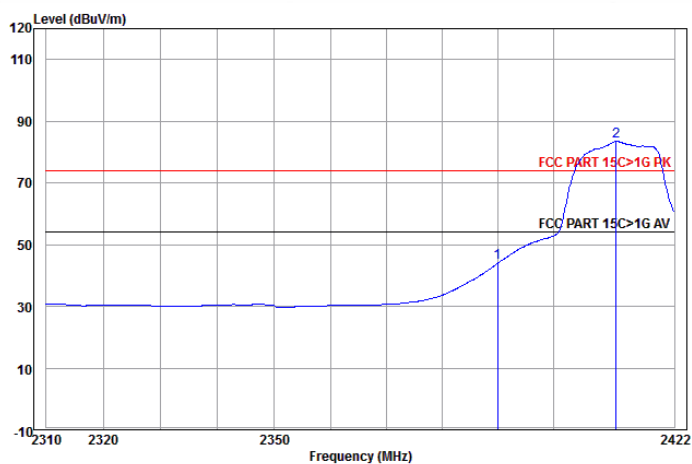


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	13.33	44.04	54.00	-9.96	Vertical	Average
2 pp	2411.359	27.62	3.08	52.78	83.48	54.00	29.48	Vertical	Average

Worse case mode:	802.11g (6Mbps)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

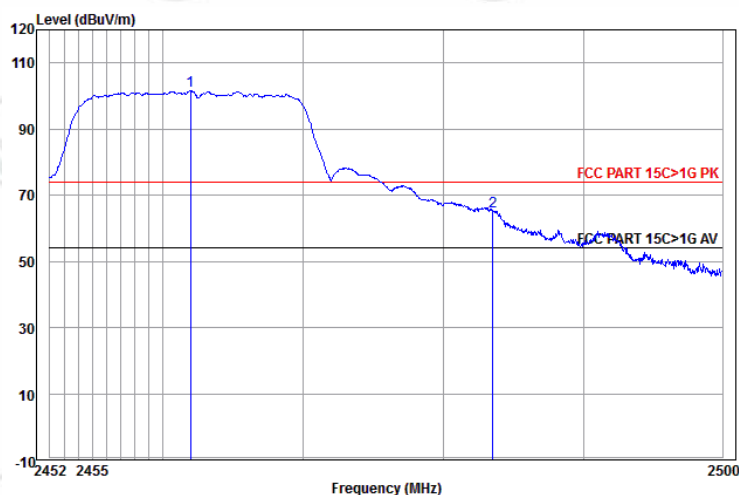


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.955	27.60	3.11	70.82	101.53	74.00	27.53	Horizontal	
2	2483.500	27.59	3.12	34.25	64.96	74.00	-9.04	Horizontal	

Worse case mode:	802.11g (6Mbps)		
	Test channel: Highest	Polarization: Horizontal	Remark: Average

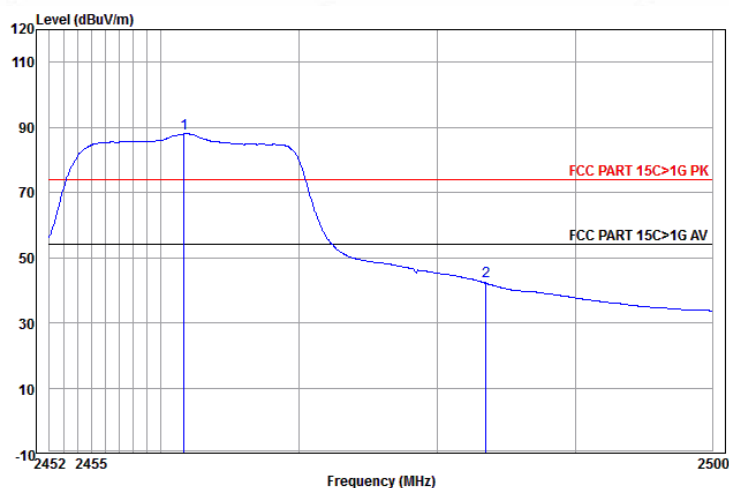


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.669	27.60	3.11	57.28	87.99	54.00	33.99	Horizontal	Average
2	2483.500	27.59	3.12	12.20	42.91	54.00	-11.09	Horizontal	Average

Worse case mode:	802.11g (6Mbps)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

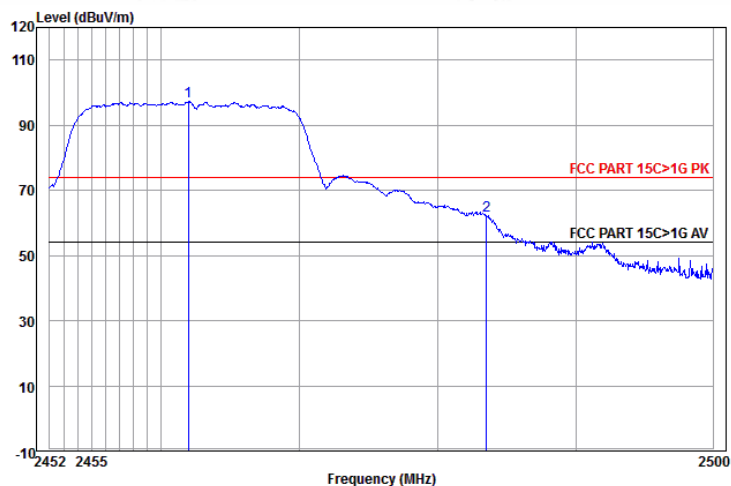


	Ant	Cable	Read	Limit	Over			
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark	
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp 2461.955	27.60	3.11	66.48	97.19	74.00	23.19	Vertical	
2 2483.500	27.59	3.12	31.54	62.25	74.00	-11.75	Vertical	

Worse case mode:	802.11g (6Mbps)		
	Test channel: Highest	Polarization: Vertical	Remark: Average

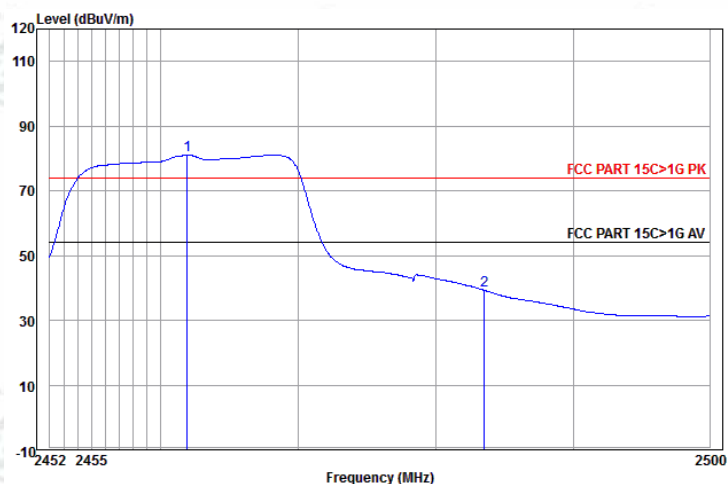


	Ant	Cable	Read	Limit	Over			
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark	
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp 2461.907	27.60	3.11	50.40	81.11	54.00	27.11	Vertical	Average
2 2483.500	27.59	3.12	8.45	39.16	54.00	-14.84	Vertical	Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

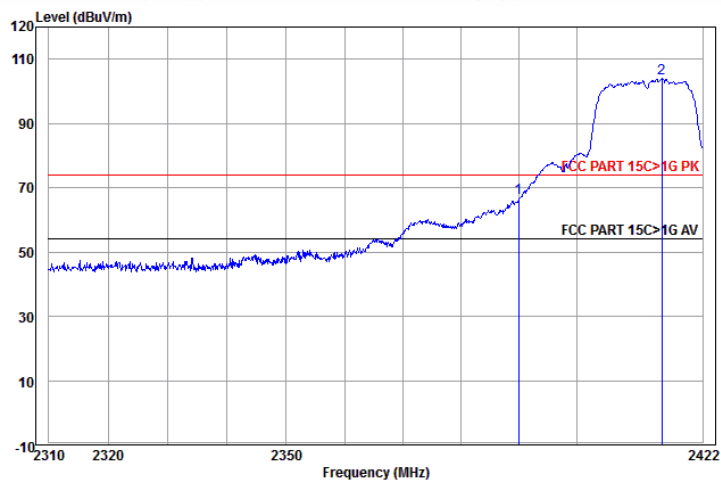


	Ant Freq	Cable Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	2390.000	27.64	3.07	36.07	66.78	74.00	-7.22	Horizontal
2 pp	2414.901	27.61	3.08	73.47	104.16	74.00	30.16	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Average

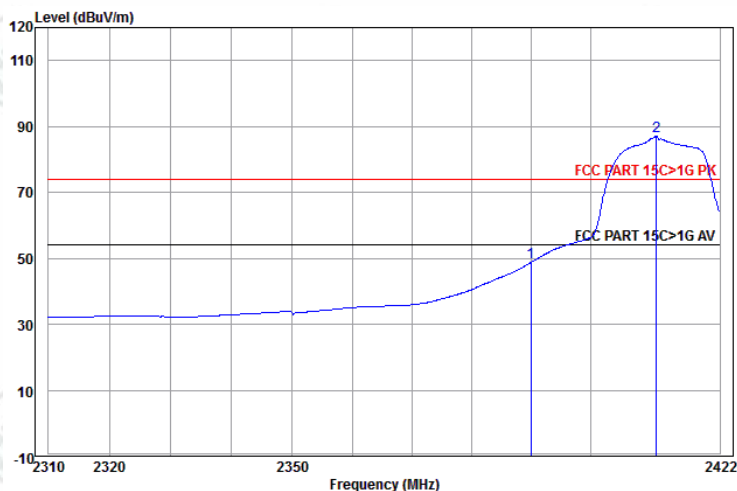


	Ant Freq	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	2390.000	27.64	3.07	18.21	48.92	54.00	-5.08	Horizontal Average
2 pp	2411.245	27.62	3.08	56.37	87.07	54.00	33.07	Horizontal Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

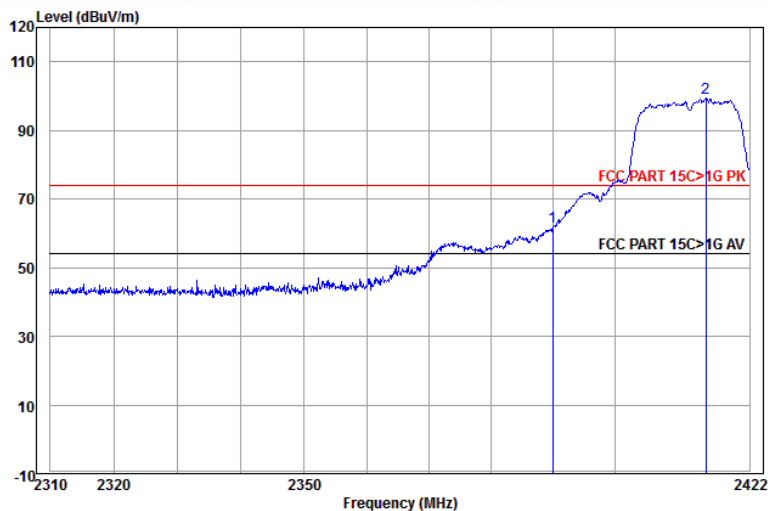


	Ant Freq	Cable Factor	Read Loss	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	27.64	3.07	31.14	61.85	74.00	-12.15	Vertical
2 pp	2414.901	27.61	3.08	68.89	99.58	74.00	25.58	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Lowest	Polarization: Vertical	Remark: Average

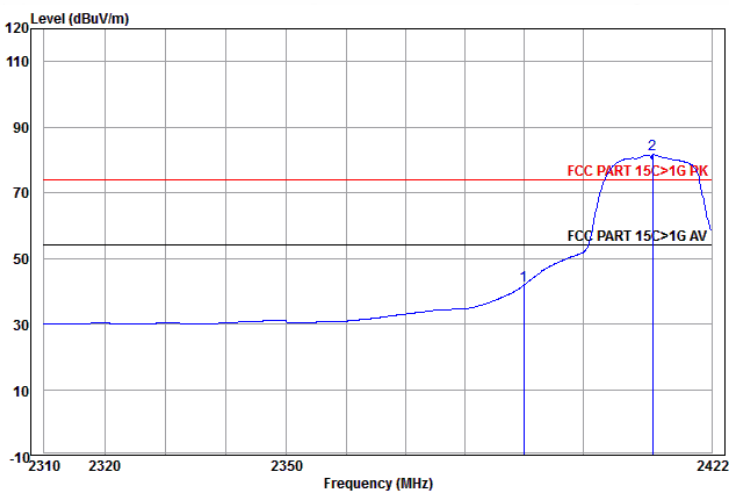


	Ant Freq	Cable Factor	Read Loss	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	27.64	3.07	11.17	41.88	54.00	-12.12	Vertical Average
2 pp	2411.930	27.62	3.08	51.03	81.73	54.00	27.73	Vertical Average


Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

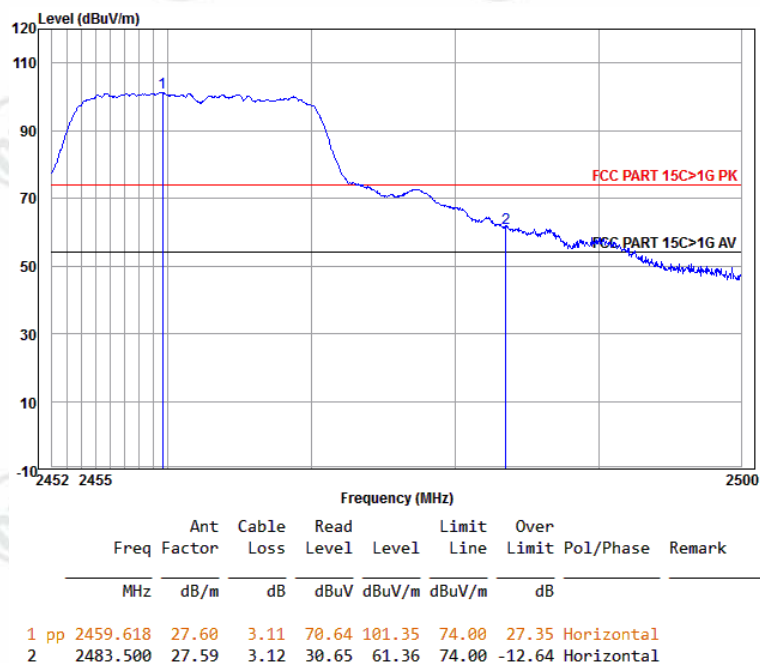

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Highest	Polarization: Horizontal	Remark: Average

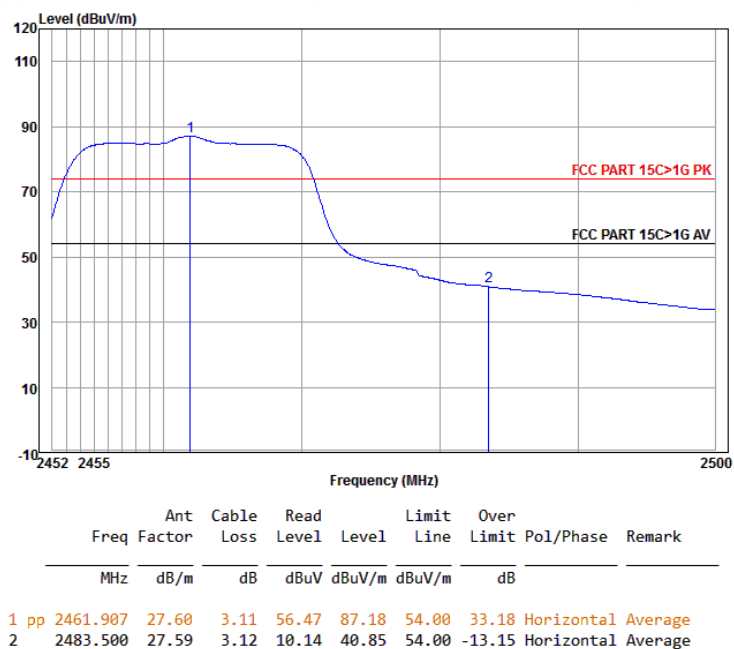


Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

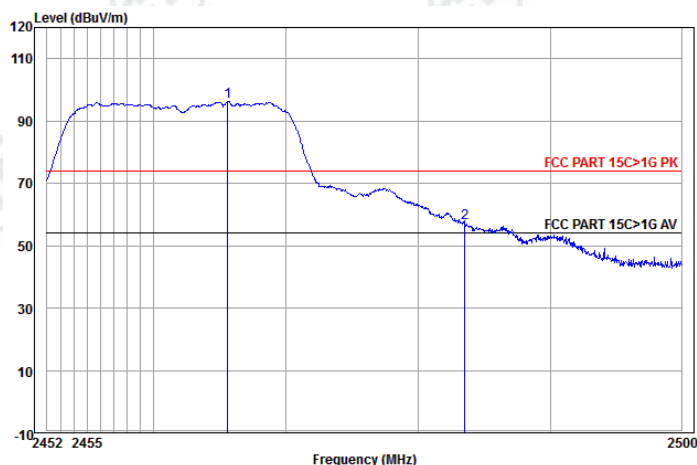

		Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp	2465.585	27.59	3.11	65.46	96.16	74.00	22.16	Vertical	
2		2483.500	27.59	3.12	26.71	57.42	74.00	-16.58	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
	Test channel: Highest	Polarization: Vertical	Remark: Average

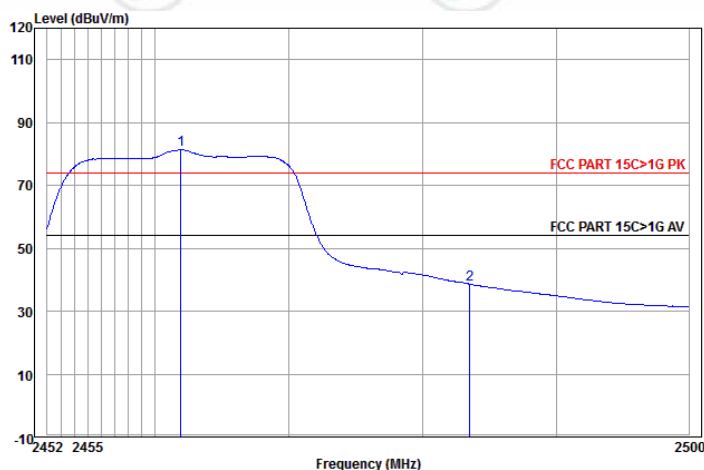

		Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
		MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp	2461.907	27.60	3.11	50.64	81.35	54.00	27.35	Vertical	Average
2		2483.500	27.59	3.12	7.93	38.64	54.00	-15.36	Vertical	Average

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Appendix I): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Test mode: 802.11 b(11Mbps)Transmitting

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	160.0060	7.90	1.47	-31.98	54.27	31.66	43.50	11.84	Pass	Horizontal
2	239.9500	11.94	1.84	-31.90	47.29	29.17	46.00	16.83	Pass	Horizontal
3	320.0880	13.64	2.12	-31.83	46.78	30.71	46.00	15.29	Pass	Horizontal
4	432.4365	15.92	2.46	-31.84	44.42	30.96	46.00	15.04	Pass	Horizontal
5	479.9760	16.68	2.61	-31.90	43.48	30.87	46.00	15.13	Pass	Horizontal
6	640.0580	19.32	3.07	-32.11	36.78	27.06	46.00	18.94	Pass	Horizontal
7	43.3887	12.91	0.74	-32.11	41.96	23.50	40.00	16.50	Pass	Vertical
8	52.5085	12.80	0.82	-32.10	40.63	22.15	40.00	17.85	Pass	Vertical
9	196.4853	10.57	1.65	-31.96	41.23	21.49	43.50	22.01	Pass	Vertical
10	208.9038	11.13	1.71	-31.94	41.91	22.81	43.50	20.69	Pass	Vertical
11	360.0600	14.52	2.27	-31.84	34.43	19.38	46.00	26.62	Pass	Vertical
12	687.5975	19.70	3.14	-32.06	32.78	23.56	46.00	22.44	Pass	Vertical

Test mode: 802.11 g(6Mbps) Transmitting

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	160.0060	7.90	1.47	-31.98	53.96	31.35	43.50	12.15	Pass	Horizontal
2	239.9500	11.94	1.84	-31.90	47.24	29.12	46.00	16.88	Pass	Horizontal
3	320.0880	13.64	2.12	-31.83	46.54	30.47	46.00	15.53	Pass	Horizontal
4	408.1816	15.53	2.41	-31.82	45.58	31.70	46.00	14.30	Pass	Horizontal
5	479.9760	16.68	2.61	-31.90	43.14	30.53	46.00	15.47	Pass	Horizontal
6	640.0580	19.32	3.07	-32.11	36.86	27.14	46.00	18.86	Pass	Horizontal
7	52.1204	12.86	0.82	-32.11	40.60	22.17	40.00	17.83	Pass	Vertical
8	71.9124	8.64	0.97	-32.05	40.13	17.69	40.00	22.31	Pass	Vertical
9	120.0340	9.19	1.30	-32.06	39.69	18.12	43.50	25.38	Pass	Vertical
10	208.9038	11.13	1.71	-31.94	41.77	22.67	43.50	20.83	Pass	Vertical
11	360.0600	14.52	2.27	-31.84	34.18	19.13	46.00	26.87	Pass	Vertical
12	687.5975	19.70	3.14	-32.06	33.05	23.83	46.00	22.17	Pass	Vertical

Test mode: 802.11 n(HT20)(6.5Mbps)

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	160.0060	7.90	1.47	-31.98	53.66	31.05	43.50	12.45	Pass	Horizontal
2	239.9500	11.94	1.84	-31.90	47.53	29.41	46.00	16.59	Pass	Horizontal
3	264.0108	12.48	1.94	-31.88	42.24	24.78	46.00	21.22	Pass	Horizontal
4	320.0880	13.64	2.12	-31.83	46.88	30.81	46.00	15.19	Pass	Horizontal
5	479.9760	16.68	2.61	-31.90	43.90	31.29	46.00	14.71	Pass	Horizontal
6	640.0580	19.32	3.07	-32.11	36.44	26.72	46.00	19.28	Pass	Horizontal
7	52.7025	12.77	0.82	-32.10	41.76	23.25	40.00	16.75	Pass	Vertical
8	71.9124	8.64	0.97	-32.05	41.60	19.16	40.00	20.84	Pass	Vertical
9	208.9038	11.13	1.71	-31.94	43.87	24.77	43.50	18.73	Pass	Vertical
10	360.0600	14.52	2.27	-31.84	34.96	19.91	46.00	26.09	Pass	Vertical
11	553.9048	18.08	2.80	-31.97	34.91	23.82	46.00	22.18	Pass	Vertical
12	687.5975	19.70	3.14	-32.06	34.98	25.76	46.00	20.24	Pass	Vertical

Transmitter Emission above 1GHz

Mode:				802.11b(11Mbps) Transmitting			Channel: 2412				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	2991.9984	33.19	4.53	-36.73	46.67	47.66	74.00	26.34	Pass	H	Peak
2	4483.1233	34.48	4.70	-36.24	45.40	48.34	74.00	25.66	Pass	H	Peak
3	4824.0000	34.50	4.61	-36.11	52.23	55.23	74.00	18.77	Pass	H	Peak
4	4824.0000	34.50	4.61	-36.11	43.95	46.95	54.00	7.05	Pass	H	Average
5	6464.5215	35.89	5.51	-36.25	44.90	50.05	74.00	23.95	Pass	H	Peak
6	7236.0000	36.34	5.79	-36.44	42.21	47.90	74.00	26.10	Pass	H	Peak
7	9648.0000	37.66	6.72	-36.92	43.32	50.78	74.00	23.22	Pass	H	Peak
8	3025.3525	33.21	4.88	-36.80	46.60	47.89	74.00	26.11	Pass	V	Peak
9	4166.2166	34.03	4.50	-36.31	45.00	47.22	74.00	26.78	Pass	V	Peak
10	4824.0000	34.50	4.61	-36.11	47.20	50.20	74.00	23.80	Pass	V	Peak
11	6357.2607	35.87	5.44	-36.16	44.84	49.99	74.00	24.01	Pass	V	Peak
12	7236.0000	36.34	5.79	-36.44	41.78	47.47	74.00	26.53	Pass	V	Peak
13	9648.0000	37.66	6.72	-36.92	42.76	50.22	74.00	23.78	Pass	V	Peak

Mode:				802.11b(11Mbps) Transmitting			Channel: 2437				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	1796.5593	30.36	3.31	-36.81	51.00	47.86	74.00	26.14	Pass	H	Peak
2	3218.4218	33.29	4.58	-36.74	47.05	48.18	74.00	25.82	Pass	H	Peak
3	4874.0000	34.50	4.78	-36.09	51.41	54.60	74.00	19.40	Pass	H	Peak
4	4874.0000	34.50	4.78	-36.09	42.99	46.18	54.00	7.82	Pass	H	Average
5	6959.8710	36.08	5.78	-36.24	44.56	50.18	74.00	23.82	Pass	H	Peak
6	7311.0000	36.41	5.85	-36.31	42.17	48.12	74.00	25.88	Pass	H	Peak
7	9748.0000	37.70	6.77	-36.79	45.24	52.92	74.00	21.08	Pass	H	Peak
8	9748.0000	37.70	6.77	-36.80	31.44	39.11	54.00	14.89	Pass	H	Average
9	3473.8974	33.39	4.46	-36.58	45.55	46.82	74.00	27.18	Pass	V	Peak
10	4874.0000	34.50	4.78	-36.09	45.82	49.01	74.00	24.99	Pass	V	Peak
11	5760.5011	35.42	4.95	-36.11	44.96	49.22	74.00	24.78	Pass	V	Peak
12	6564.9565	35.93	5.40	-36.17	44.44	49.60	74.00	24.40	Pass	V	Peak
13	7311.0000	36.41	5.85	-36.31	41.97	47.92	74.00	26.08	Pass	V	Peak
14	9748.0000	37.70	6.77	-36.79	43.13	50.81	74.00	23.19	Pass	V	Peak

Mode:				802.11b(11Mbps) Transmitting			Channel: 2462				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	3000.9751	33.20	4.93	-36.71	46.90	48.32	74.00	25.68	Pass	H	Peak
2	3547.0297	33.44	4.44	-36.45	45.34	46.77	74.00	27.23	Pass	H	Peak
3	4924.0000	34.50	4.85	-36.17	48.76	51.94	74.00	22.06	Pass	H	Peak
4	4924.0000	34.50	4.85	-36.17	44.10	47.28	54.00	6.72	Pass	H	Average
5	6206.1206	35.84	5.24	-36.34	44.77	49.51	74.00	24.49	Pass	H	Peak
6	7386.0000	36.49	5.85	-36.34	42.88	48.88	74.00	25.12	Pass	H	Peak
7	9848.0000	37.74	6.83	-36.93	44.13	51.77	74.00	22.23	Pass	H	Peak
8	9848.0000	37.74	6.83	-36.93	31.02	38.66	54.00	15.34	Pass	H	Average
9	2592.3185	32.55	4.10	-36.63	48.71	48.73	74.00	25.27	Pass	V	Peak
10	2977.5955	33.16	4.48	-36.75	47.22	48.11	74.00	25.89	Pass	V	Peak
11	4924.0000	34.50	4.85	-36.17	43.50	46.68	74.00	27.32	Pass	V	Peak
12	5825.8326	35.52	5.03	-36.01	44.71	49.25	74.00	24.75	Pass	V	Peak
13	7386.0000	36.49	5.85	-36.34	42.90	48.90	74.00	25.10	Pass	V	Peak
14	9848.0000	37.74	6.83	-36.93	42.53	50.17	74.00	23.83	Pass	V	Peak

Mode:				802.11 g(6Mbps) Transmitting			Channel: 2412				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	3060.4560	33.22	4.81	-36.86	47.03	48.20	74.00	25.80	Pass	H	Peak
2	4466.5467	34.45	4.76	-36.22	44.97	47.96	74.00	26.04	Pass	H	Peak
3	4824.0000	34.50	4.61	-36.11	49.58	52.58	74.00	21.42	Pass	H	Peak
4	4824.0000	34.50	4.61	-36.11	30.00	33.00	54.00	21.00	Pass	H	Average
5	6370.9121	35.87	5.40	-36.22	44.80	49.85	74.00	24.15	Pass	H	Peak
6	7236.0000	36.34	5.79	-36.44	42.38	48.07	74.00	25.93	Pass	H	Peak
7	9648.0000	37.66	6.72	-36.92	44.70	52.16	74.00	21.84	Pass	H	Peak
8	9648.0000	37.66	6.72	-36.91	30.72	38.19	54.00	15.81	Pass	H	Average
9	2588.7177	32.54	4.10	-36.62	48.77	48.79	74.00	25.21	Pass	V	Peak
10	4824.0000	34.50	4.61	-36.11	43.43	46.43	74.00	27.57	Pass	V	Peak
11	5433.8434	34.93	4.90	-36.06	44.15	47.92	74.00	26.08	Pass	V	Peak
12	5995.4996	35.79	5.34	-36.30	44.42	49.25	74.00	24.75	Pass	V	Peak
13	7236.0000	36.34	5.79	-36.44	42.71	48.40	74.00	25.60	Pass	V	Peak
14	9648.0000	37.66	6.72	-36.92	44.74	52.20	74.00	21.80	Pass	V	Peak
15	9648.0000	37.66	6.72	-36.91	30.83	38.30	54.00	15.70	Pass	V	Average

Mode:				802.11 g(6Mbps) Transmitting			Channel: 2437				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1998.1996	31.69	3.47	-36.74	49.33	47.75	74.00	26.25	Pass	H	Peak
2	3320.8071	33.33	4.56	-36.76	46.32	47.45	74.00	26.55	Pass	H	Peak
3	4874.0000	34.50	4.78	-36.09	49.60	52.79	74.00	21.21	Pass	H	Peak
4	4874.0000	34.50	4.78	-36.09	36.57	39.76	54.00	14.24	Pass	H	Average
5	6887.7138	36.06	5.78	-36.31	44.11	49.64	74.00	24.36	Pass	H	Peak
6	7311.0000	36.41	5.85	-36.31	40.81	46.76	74.00	27.24	Pass	H	Peak
7	9748.0000	37.70	6.77	-36.79	43.17	50.85	74.00	23.15	Pass	H	Peak
8	2119.4239	31.87	3.61	-36.52	49.01	47.97	74.00	26.03	Pass	V	Peak
9	3028.2778	33.21	4.87	-36.80	45.86	47.14	74.00	26.86	Pass	V	Peak
10	4874.0000	34.50	4.78	-36.09	44.03	47.22	74.00	26.78	Pass	V	Peak
11	6340.6841	35.87	5.46	-36.15	44.29	49.47	74.00	24.53	Pass	V	Peak
12	7311.0000	36.41	5.85	-36.31	41.25	47.20	74.00	26.80	Pass	V	Peak
13	9748.0000	37.70	6.77	-36.79	43.16	50.84	74.00	23.16	Pass	V	Peak

Mode:				802.11 g(6Mbps) Transmitting			Channel: 2462				
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1795.7592	30.35	3.31	-36.80	53.41	50.27	74.00	23.73	Pass	H	Peak
2	3352.9853	33.34	4.52	-36.70	46.01	47.17	74.00	26.83	Pass	H	Peak
3	4924.0000	34.50	4.85	-36.17	46.55	49.73	74.00	24.27	Pass	H	Peak
4	5932.1182	35.69	5.23	-36.18	45.06	49.80	74.00	24.20	Pass	H	Peak
5	7386.0000	36.49	5.85	-36.34	42.30	48.30	74.00	25.70	Pass	H	Peak
6	9848.0000	37.74	6.83	-36.93	44.93	52.57	74.00	21.43	Pass	H	Peak
7	9848.0000	37.74	6.83	-36.93	31.00	38.64	54.00	15.36	Pass	H	Average
8	2193.0386	31.97	3.65	-36.53	50.79	49.88	74.00	24.12	Pass	V	Peak
9	2987.1974	33.18	4.51	-36.73	48.05	49.01	74.00	24.99	Pass	V	Peak
10	4924.0000	34.50	4.85	-36.17	43.17	46.35	74.00	27.65	Pass	V	Peak
11	6725.8476	35.99	5.60	-36.22	44.70	50.07	74.00	23.93	Pass	V	Peak
12	7386.0000	36.49	5.85	-36.34	42.10	48.10	74.00	25.90	Pass	V	Peak
13	9848.0000	37.74	6.83	-36.93	43.26	50.90	74.00	23.10	Pass	V	Peak

Mode:				802.11 n(HT20)(6.5Mbps) Transmitting					Channel: 2412		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	3198.9199	33.28	4.65	-36.70	47.24	48.47	74.00	25.53	Pass	H	Peak
2	4824.0000	34.50	4.61	-36.11	47.41	50.41	74.00	23.59	Pass	H	Peak
3	5403.6154	34.90	4.86	-35.90	44.41	48.27	74.00	25.73	Pass	H	Peak
4	6566.9067	35.93	5.41	-36.17	44.88	50.05	74.00	23.95	Pass	H	Peak
5	7236.0000	36.34	5.79	-36.44	42.47	48.16	74.00	25.84	Pass	H	Peak
6	9648.0000	37.66	6.72	-36.92	44.77	52.23	74.00	21.77	Pass	H	Peak
7	9648.0000	37.66	6.72	-36.91	31.16	38.63	54.00	15.37	Pass	H	Average
8	2596.7193	32.55	4.10	-36.63	50.01	50.03	74.00	23.97	Pass	H	Peak
9	4429.4929	34.40	4.72	-36.17	45.08	48.03	74.00	25.97	Pass	V	Peak
10	4824.0000	34.50	4.61	-36.11	43.45	46.45	74.00	27.55	Pass	V	Peak
11	5533.3033	35.05	5.16	-36.07	44.18	48.32	74.00	25.68	Pass	V	Peak
12	7236.0000	36.34	5.79	-36.44	44.85	50.54	74.00	23.46	Pass	V	Peak
13	9648.0000	37.66	6.72	-36.92	43.32	50.78	74.00	23.22	Pass	V	Peak

Mode:				802.11 n(HT20)(6.5Mbps) Transmitting					Channel: 2437		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	2822.7646	32.92	4.24	-36.91	48.11	48.36	74.00	25.64	Pass	H	Peak
2	4874.0000	34.50	4.78	-36.09	48.04	51.23	74.00	22.77	Pass	H	Peak
3	4874.0000	34.50	4.78	-36.09	36.48	39.67	54.00	14.33	Pass	H	Average
4	5197.8698	34.70	4.91	-35.91	44.71	48.41	74.00	25.59	Pass	H	Peak
5	6118.3618	35.82	5.26	-36.28	44.32	49.12	74.00	24.88	Pass	H	Peak
6	7311.0000	36.41	5.85	-36.31	41.71	47.66	74.00	26.34	Pass	H	Peak
7	9748.0000	37.70	6.77	-36.79	42.89	50.57	74.00	23.43	Pass	H	Peak
8	4476.2976	34.47	4.72	-36.23	45.01	47.97	74.00	26.03	Pass	V	Peak
9	4874.0000	34.50	4.78	-36.09	42.27	45.46	74.00	28.54	Pass	V	Peak
10	6380.6631	35.88	5.37	-36.26	45.10	50.09	74.00	23.91	Pass	V	Peak
11	7311.0000	36.41	5.85	-36.31	42.75	48.70	74.00	25.30	Pass	V	Peak
12	7807.2307	36.48	6.08	-36.62	44.68	50.62	74.00	23.38	Pass	V	Peak
13	9748.0000	37.70	6.77	-36.79	42.61	50.29	74.00	23.71	Pass	V	Peak

Mode:				802.11 n(HT20)(6.5Mbps) Transmitting					Channel: 2462		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1793.7588	30.34	3.31	-36.81	51.30	48.14	74.00	25.86	Pass	H	Peak
2	4472.3972	34.46	4.74	-36.23	44.39	47.36	74.00	26.64	Pass	H	Peak
3	4924.0000	34.50	4.85	-36.17	47.61	50.79	74.00	23.21	Pass	H	Peak
4	7133.4383	36.23	5.71	-36.32	43.86	49.48	74.00	24.52	Pass	H	Peak
5	7386.0000	36.49	5.85	-36.34	41.59	47.59	74.00	26.41	Pass	H	Peak
6	9848.0000	37.74	6.83	-36.93	41.74	49.38	74.00	24.62	Pass	H	Peak
7	1594.9190	29.03	3.07	-37.00	52.38	47.48	74.00	26.52	Pass	H	Peak
8	4924.0000	34.50	4.85	-36.17	41.49	44.67	74.00	29.33	Pass	V	Peak
9	5760.5011	35.42	4.95	-36.11	45.03	49.29	74.00	24.71	Pass	V	Peak
10	6427.4677	35.89	5.43	-36.31	44.21	49.22	74.00	24.78	Pass	V	Peak
11	7386.0000	36.49	5.85	-36.34	42.12	48.12	74.00	25.88	Pass	V	Peak
12	9848.0000	37.74	6.83	-36.93	42.11	49.75	74.00	24.25	Pass	V	Peak

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: ESP-01F

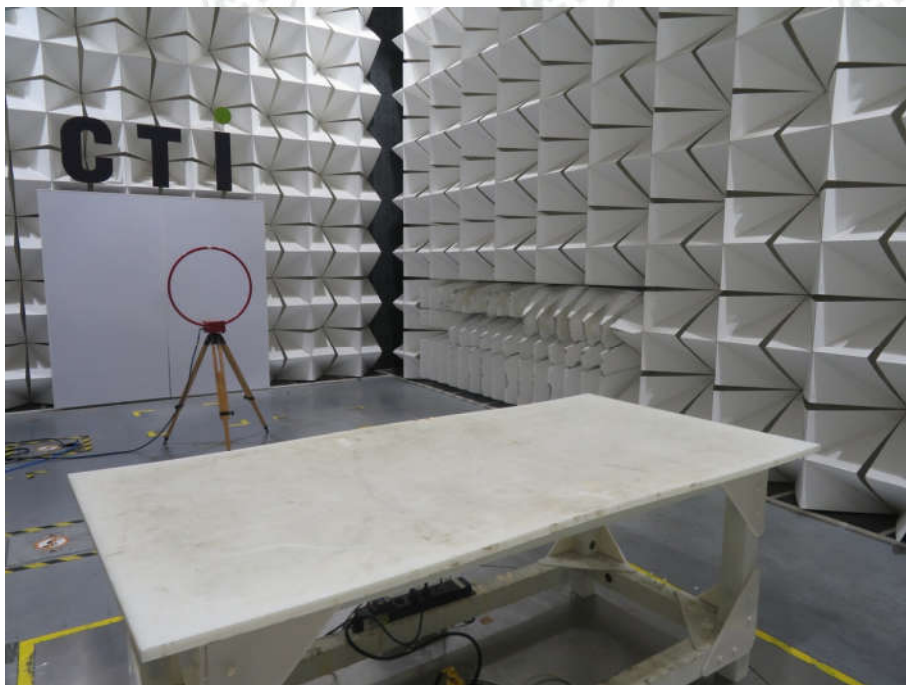


Radiated spurious emission Test Setup-1(Below 30MHz)



Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

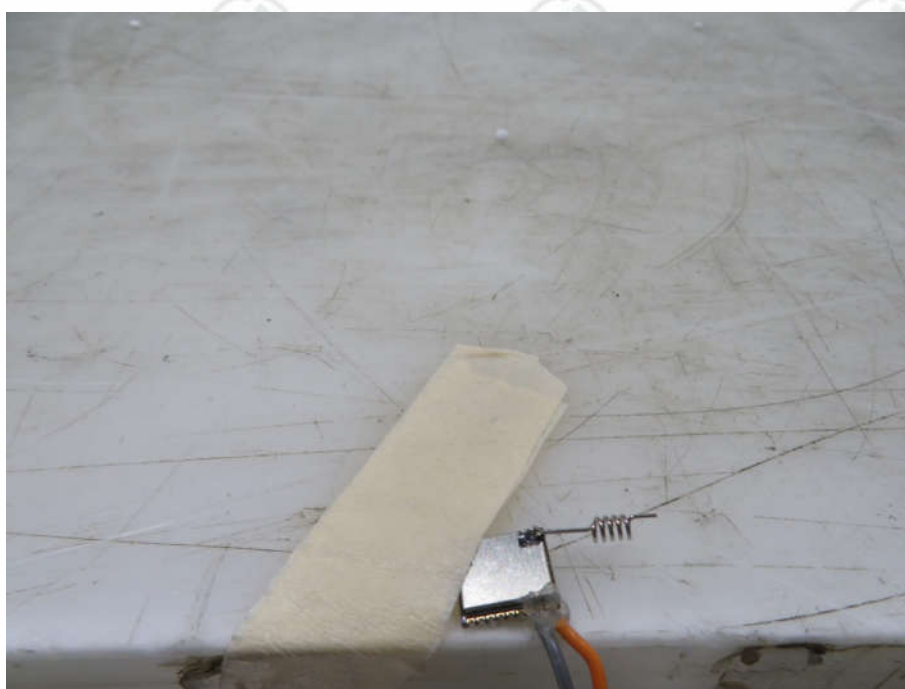


Radiated spurious emission Test Setup-4(Close-up)




Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: ESP-01F

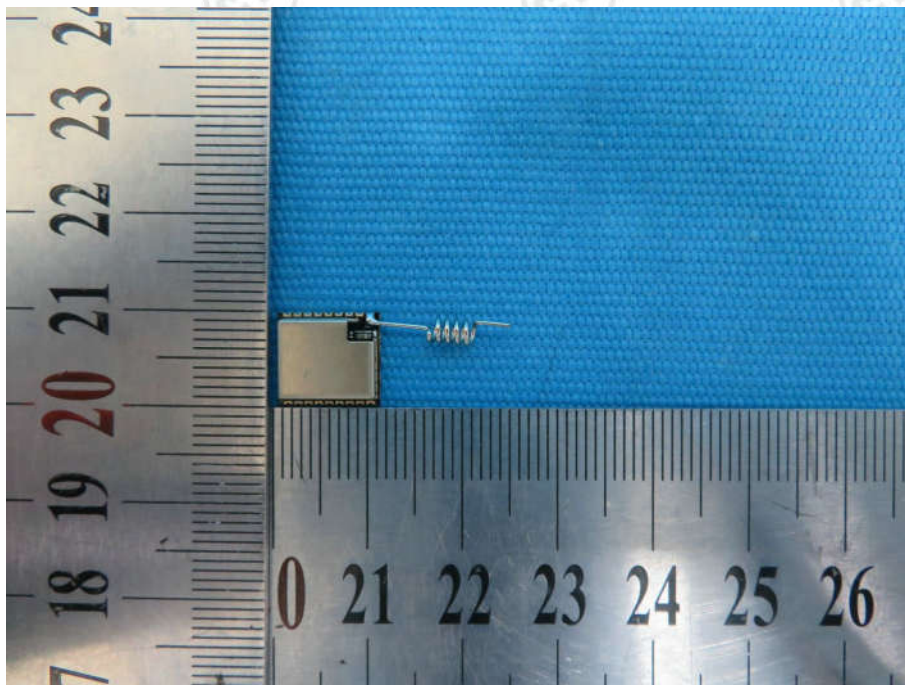


View of Product-1

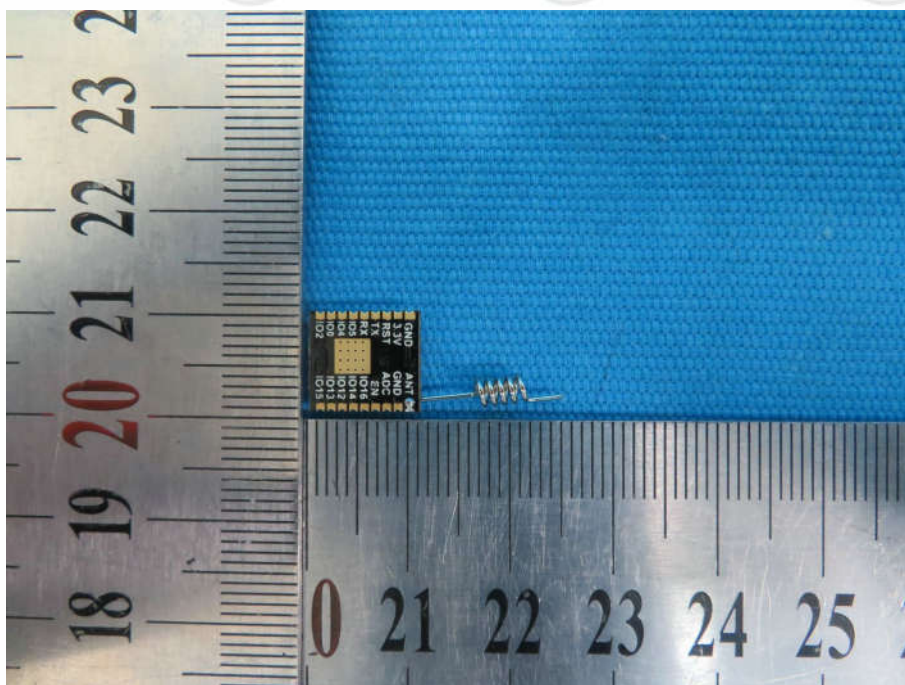


View of Product-2

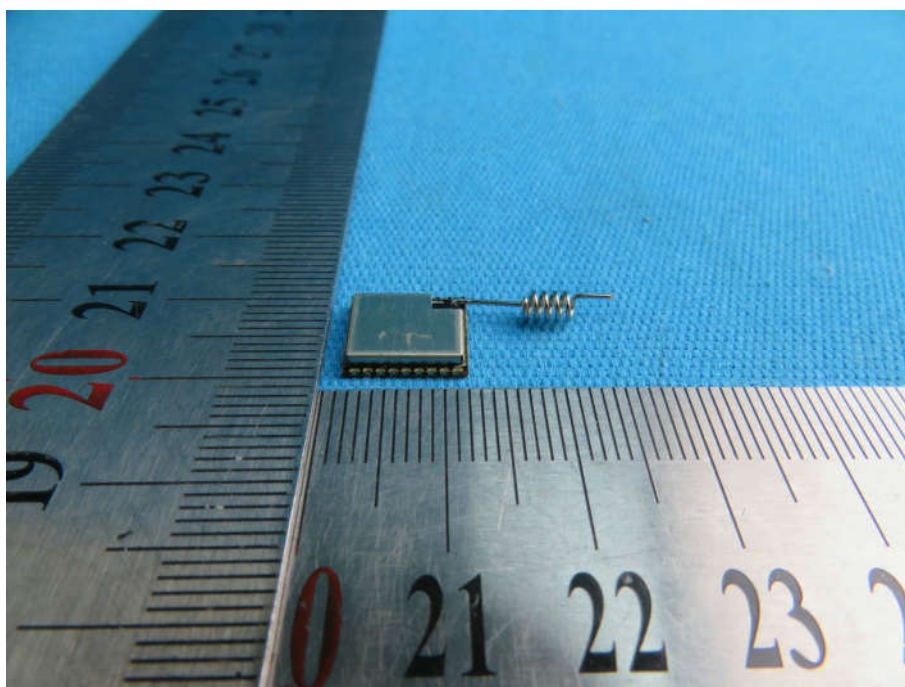


View of Product-3

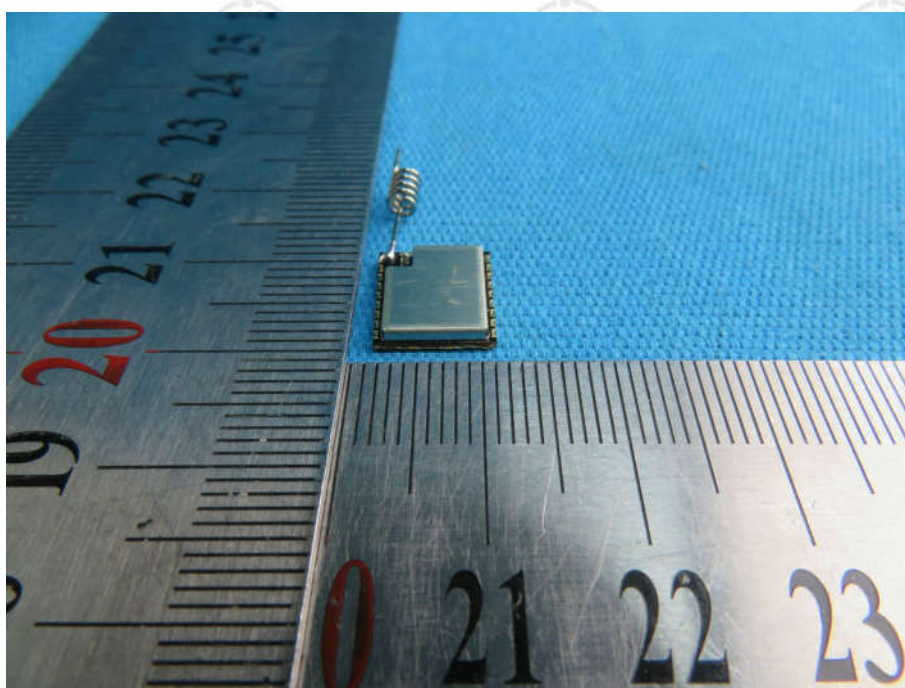


View of Product-4

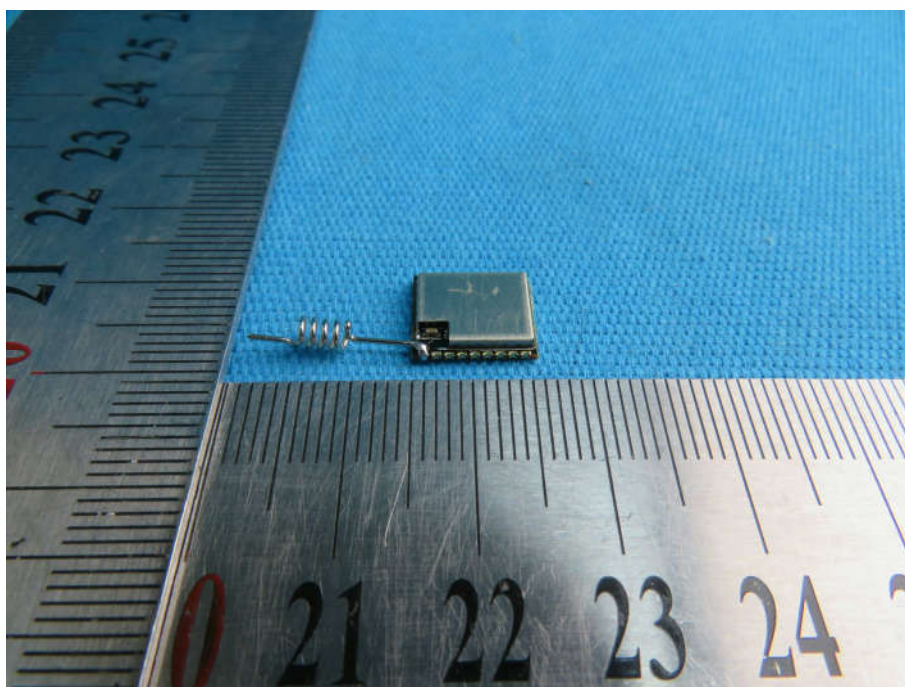


View of Product-5

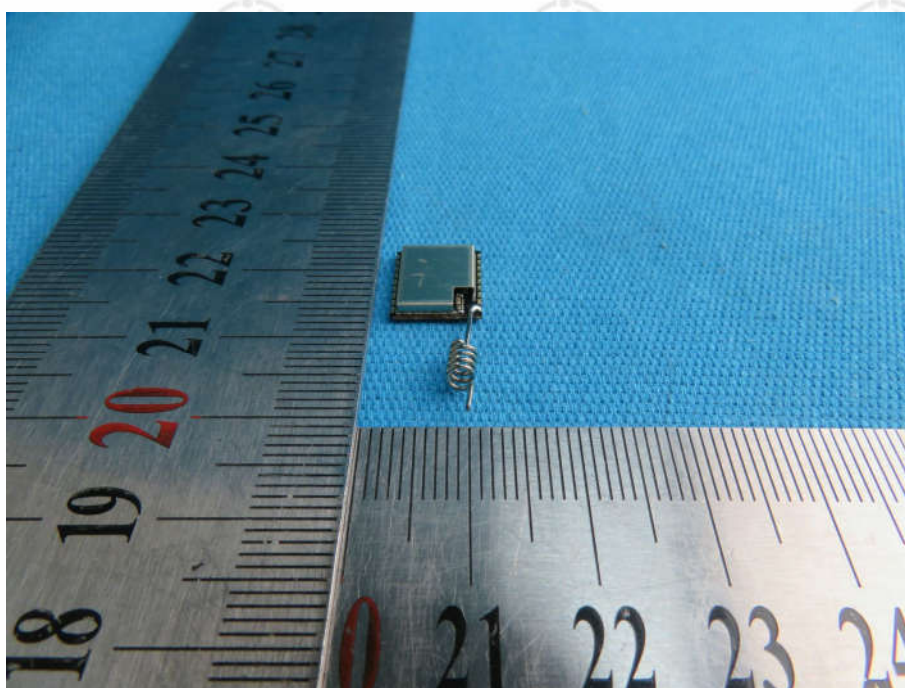

View of Product-6

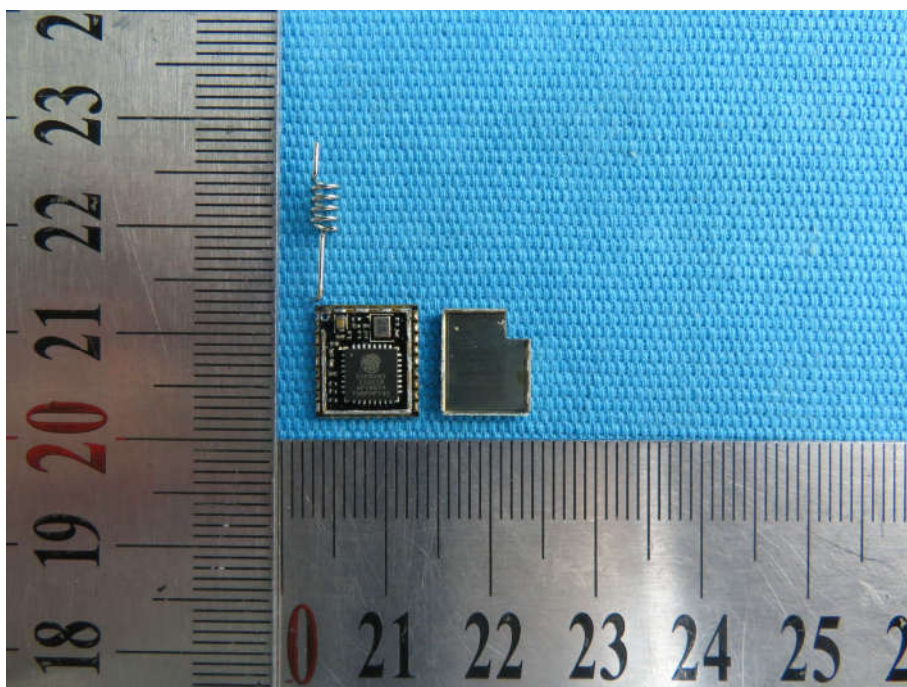

View of Product-7

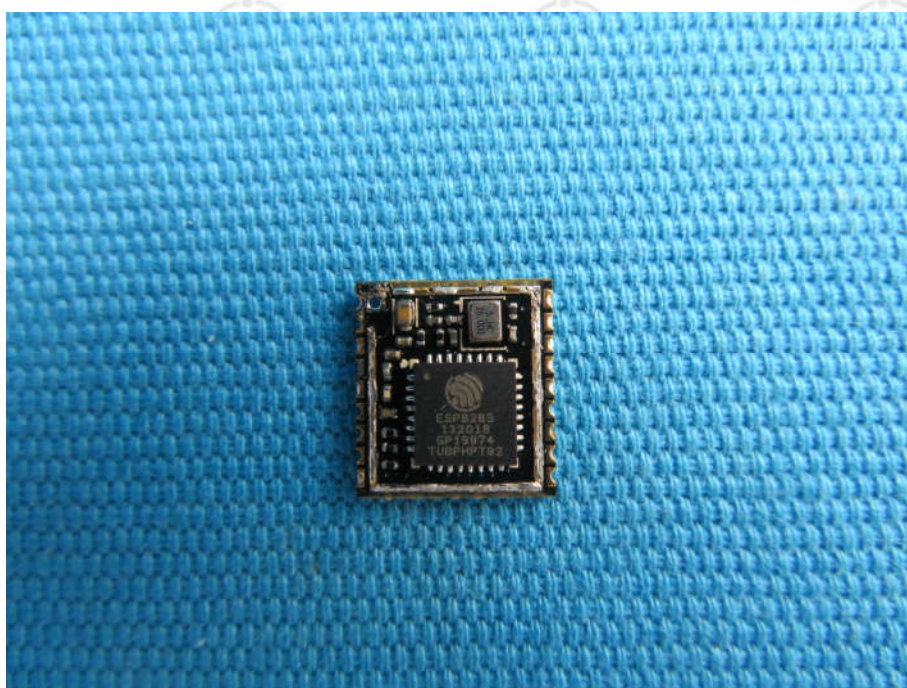

View of Product-8

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.