

FCC LISTED, REGISTRATION
NUMBER: 720267

Informe de ensayo nº:
Test report No:

IC LISTED REGISTRATION
NUMBER IC 4621A-2

NIE: 47788RRF.003A1

Test report (Modification 1) USA FCC Part 15.247, 15.209 CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and
5725 - 5850 MHz.

Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and Licence-Exempt
Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

Identificación del objeto ensayado.....: Identification of item tested	Analog wireless datalogger
Marca Trademark	Loadsensing G6
Modelo y/o referencia tipo Model and /or type reference	LS-G6-ANALOG-4
Other identification of the product	FCC ID: 2AHN4-LS-G6-ANALOG4 IC: 21260-LSG6ANALOG4
Final HW version	4
Final SW version	2.15
Características Features	---
Fabricante Manufacturer	WORLDSENSING SL c/Aragó, 383, 4t, 08013 Barcelona. SPAIN.
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 15.247 10-1-14 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 10-1-14 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 1 (May 2015). CANADA RSS-Gen Issue 4 (November 2014). FCC part 15.247 and Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum System DA 00-705 Released March 30, 2000. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Resultado.....: Summary	IN COMPLIANCE

Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager  Firmado digitalmente por ALEJANDRO LLAMAS RODRIGUEZ Fecha: 2016.09.28 10:29:40 +02'00'
Fecha de realización Date of issue	2016-09-28
Formato de informe No. Report template No	FDT11_18

Index

General conditions.....	4
Uncertainty	4
Usage of samples.....	4
Test sample description	5
Testing period.....	5
Environmental conditions.....	5
Modifications to the reference test report.....	6
Remarks and comments.....	6
Testing verdicts	7
Appendix A – Test result.....	8

Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-2.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
47788E/022	Analog wireless datalogger	LS-G6-ANALOG-4	2034	2015-12-09
47788E/029	Antenna	---	---	2015-12-09
47788E/008	Load cells	TPF-1A	189112	2015-12-09
47788E/009	Electronic sensor device	---	---	2015-12-09
47788E/010	Electronic sensor device	---	698480	2015-12-09
47788E/011	Electronic sensor device	---	698475	2015-12-09

1. Sample S/01 has undergone following test(s).

All tests indicated in appendix A.

Test sample description

The test sample consists of an equipment for data collection from analog sensors for industrial, geotechnical and scientific applications. The data is taken at regular intervals, is stored locally, and transmitted using a wireless long-range radio.

Identification of the client

WORLDSENSING SL

c/Aragó, 383, 4t, 08013 Barcelona. SPAIN.

Testing period

The performed test started on 2016-01-08 and finished on 2016-01-09.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 k Ω
Reference resistance to earth	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 k Ω
Reference resistance to earth	< 1 Ω
Normal site attenuation (NSA)	< ± 4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 47788RRF.003 related with the same samples, in the next clauses and sub-clauses:

Clauses / Sub-clauses	Modification	Justification
Cover sheet / Other identification of the product/FCC ID	FCC code is changed to 2AHN4-LS-G6-ANALOG4	Typographical error

This modification test report cancels and replaces the test report 47788RRF.003.

Remarks and comments

1: The equipment under test is a hybrid system which uses both digital modulation and frequency hopping techniques at the same time on the same carrier.

2: Test not requested. Only radiated spurious emissions test was requested.

3: Used instrumentation:

Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	BiconicalLog antenna ETS LINDGREN 3142E	2014/03	2017/03
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2013/11	2016/11
5.	Broadband Horn antenna 18-40 GHz SCHWARZBECK BBHA 9170	2014/03	2017/03
6.	EMI Test Receiver R&S ESU 40	2014/02	2016/02
7.	EMI Test Receiver R&S ESU 26	2015/11	2017/11
8.	RF pre-amplifier 10 MHz-6 GHz SCHWARZBECK BBV9743	2015/03	2016/03
9.	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-3A	2015/05	2016/05

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

FCC PART 15 PARAGRAPH / RSS-247		VERDICT			
		NA	P	F	NM ²
FCC 15.247 Subclause (a) (1) / RSS-247 Clause 5.1 (2)	20 dB Bandwidth and Carrier frequency separation				NM ²
FCC 15.247 Subclause (f) / RSS-247 Clause 5.3 (1)	Time of occupancy (Dwell Time)				NM ²
FCC 15.247 Subclause (b) (2) / RSS-247 Clause 5.4 (1)	Maximum output power and antenna gain				NM ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Band-edge compliance of conducted (Transmitter)				NM ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations conducted (Transmitter)				NM ²
FCC 15.247 Subclause (f) / RSS-247 5.3. (2)	Power spectral density				NM ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations radiated (Transmitter)		P		

2: See section “Remarks and comments”.

Appendix A – Test result

INDEX

TEST CONDITIONS	10
FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5. Emission limitations radiated (Transmitter)	12

TEST CONDITIONS

Power supply (V):

$V_{\text{nominal}} = 3.6 \text{ Vdc}$

Type of power supply = DC voltage from internal battery.

Type of antenna = External attachable antenna.

Declared Gain for antenna (maximum) = 3 dBi

TEST FREQUENCIES:

Lowest channel: 902.3 MHz

Middle channel: 908.7 MHz

Highest channel: 914.9 MHz

RADIATED MEASUREMENTS


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-10 GHz (1 GHz-18 GHz Double ridge horn antenna).

For radiated emissions in the range 1 GHz-10 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive (wooden) platform 1.5 meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz

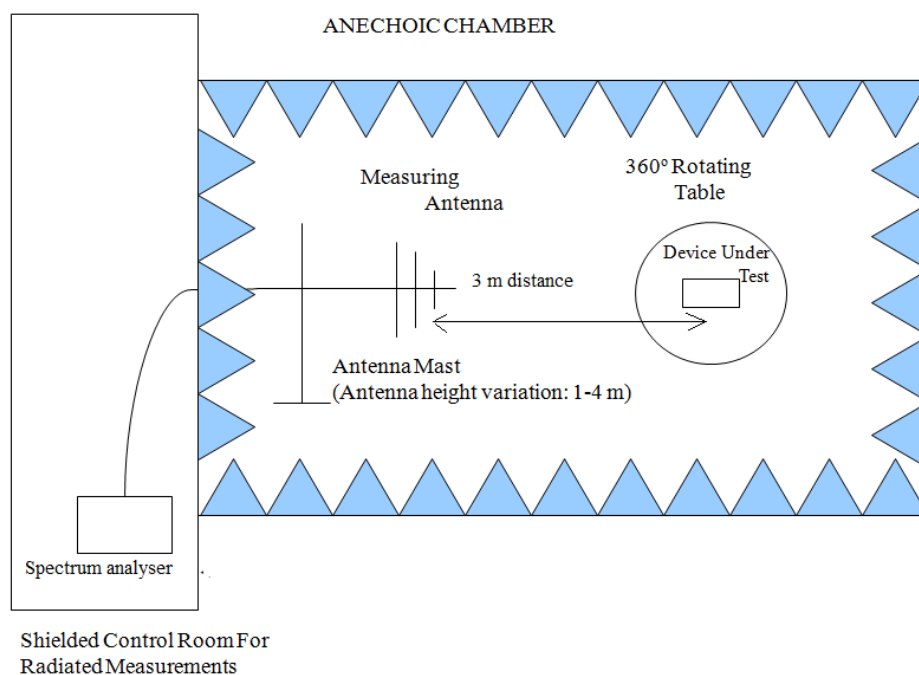

Radiated measurements setup $f > 1$ GHz

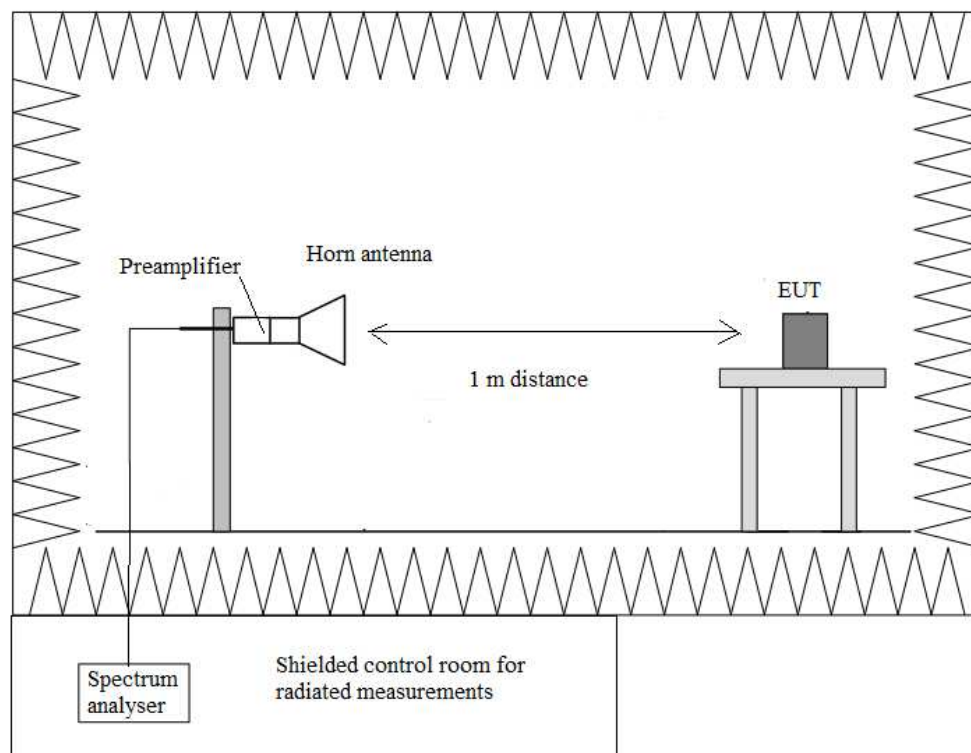

FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-10 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

Highest spurious levels at less than 20 dB respect to the limit:

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμ V/m)	Measurement Uncertainty (dB)
188.2070	V	Quasi-Peak	28.68	± 3.88
222.4480	V	Quasi-Peak	31.42	± 3.88
276.2830	V	Quasi-Peak	33.61	± 3.88
337.4900	V	Quasi-Peak	33.48	± 3.88

Frequency range 1 GHz-10 GHz

1. CHANNEL: LOWEST (902.3 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμ V/m)	Measurement Uncertainty (dB)
1.80430	V	Peak	49.66	± 4.69
		AVG	49.29	± 4.69
2.70670	H	Peak	49.29	± 4.69
		AVG	48.68	± 4.69
3.60880	H	Peak	51.62	± 4.69
		AVG	50.99	± 4.69
4.51150	H	Peak	45.98	± 4.69
		AVG	44.66	± 4.69
5.41390	V	Peak	43.58	± 4.69
		AVG	41.07	± 4.69
6.31630	H	Peak	40.36	± 4.69
		AVG	36.60	± 4.69
7.21870	H	Peak	44.41	± 4.69
		AVG	41.63	± 4.69
8.12110	V	Peak	43.12	± 4.69
		AVG	38.04	± 4.69

2. CHANNEL: MIDDLE (908.7 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
1.8172	V	Peak	48.30	± 4.69
		AVG	47.73	± 4.69
2.7262	H	Peak	49.77	± 4.69
		AVG	49.17	± 4.69
3.6349	H	Peak	54.82	± 4.69
		AVG	53.89	± 4.69
4.5430	H	Peak	46.79	± 4.69
		AVG	45.88	± 4.69
5.4520	V	Peak	43.28	± 4.69
		AVG	41.20	± 4.69
6.3600	H	Peak	39.73	± 4.69
		AVG	35.15	± 4.69
7.2697	H	Peak	44.33	± 4.69
		AVG	41.20	± 4.69
8.1778	H	Peak	43.67	± 4.69
		AVG	38.06	± 4.69


3. CHANNEL: HIGHEST (914.9 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμ V/m)	Measurement Uncertainty (dB)
1.8295	V	Peak	47.92	± 4.69
		AVG	47.54	± 4.69
2.7484	H	Peak	49.99	± 4.69
		AVG	49.45	± 4.69
3.6292	H	Peak	54.51	± 4.69
		AVG	53.87	± 4.69
4.5742	H	Peak	48.15	± 4.69
		AVG	47.11	± 4.69
5.4895	V	Peak	45.05	± 4.69
		AVG	43.13	± 4.69
6.4042	H	Peak	39.35	± 4.69
		AVG	34.53	± 4.69
7.3195	H	Peak	43.55	± 4.69
		AVG	40.13	± 4.69
8.2342	V	Peak	42.37	± 4.69
		AVG	37.97	± 4.69

Verdict: PASS


FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: Lowest (902.3 MHz).

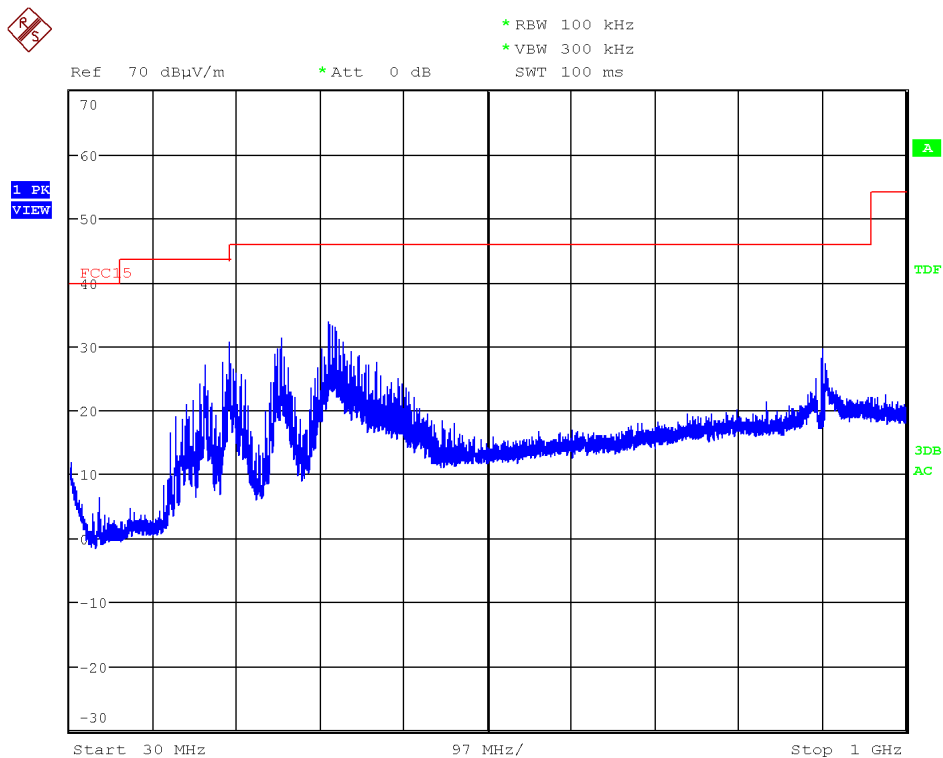


Note: The carrier was attenuated using a Notch filter.

CHANNEL: Middle (908.7 MHz).

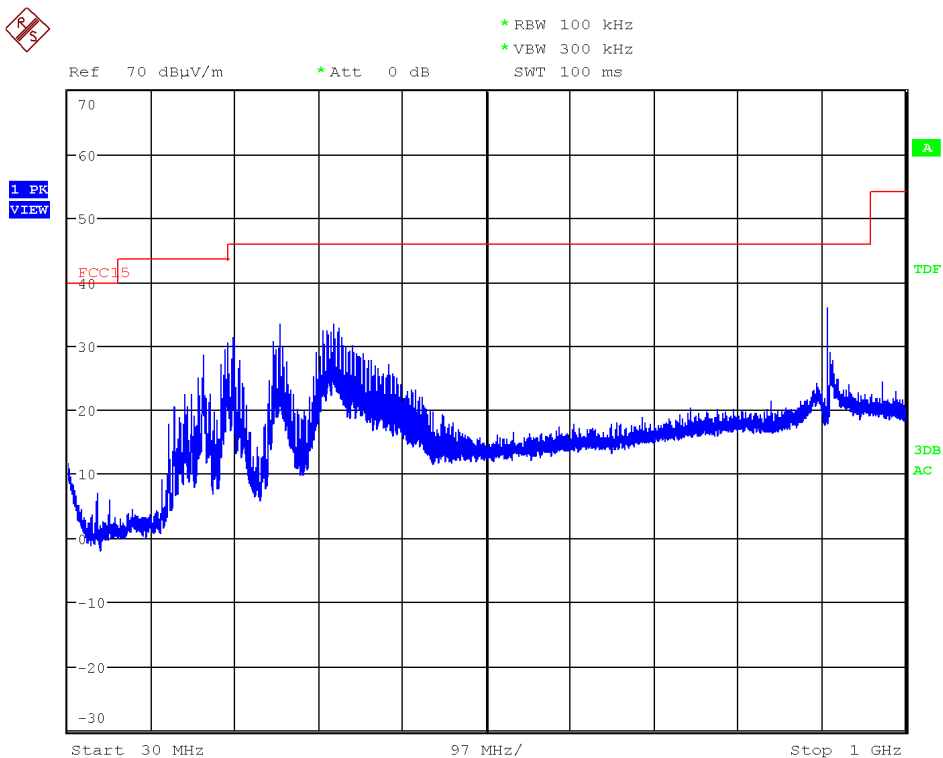

Note: The carrier was attenuated using a Notch filter.


CHANNEL: Highest (914.9 MHz).

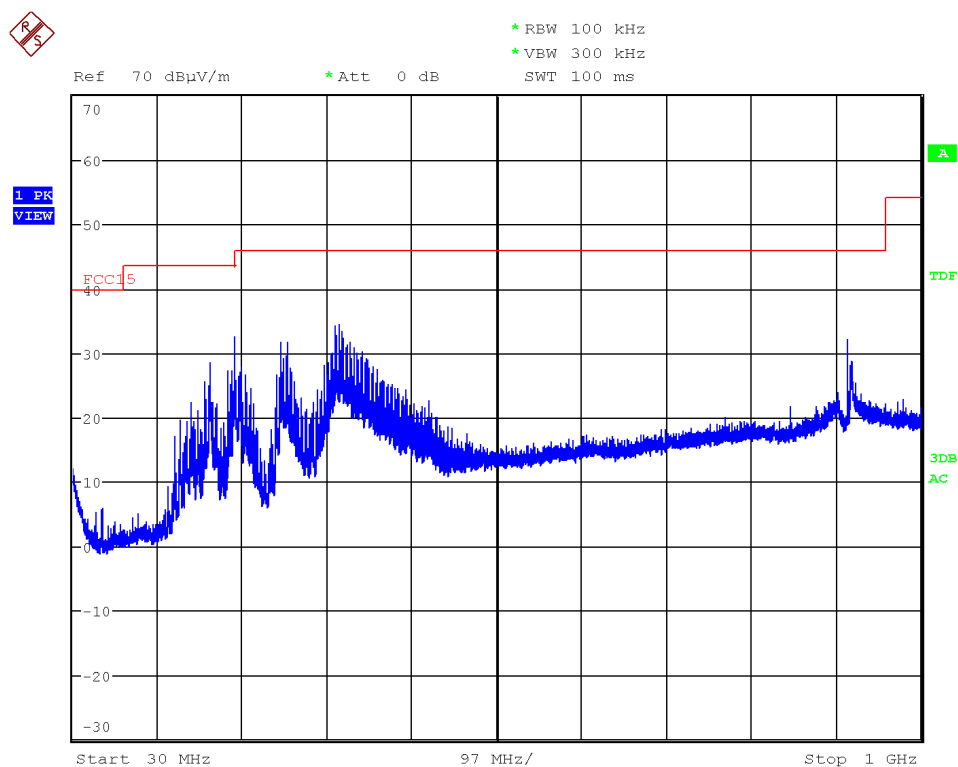


Note: The carrier was attenuated using a Notch filter.

FREQUENCY RANGE 1 GHz to 10 GHz.

CHANNEL: Lowest (902.3 MHz).

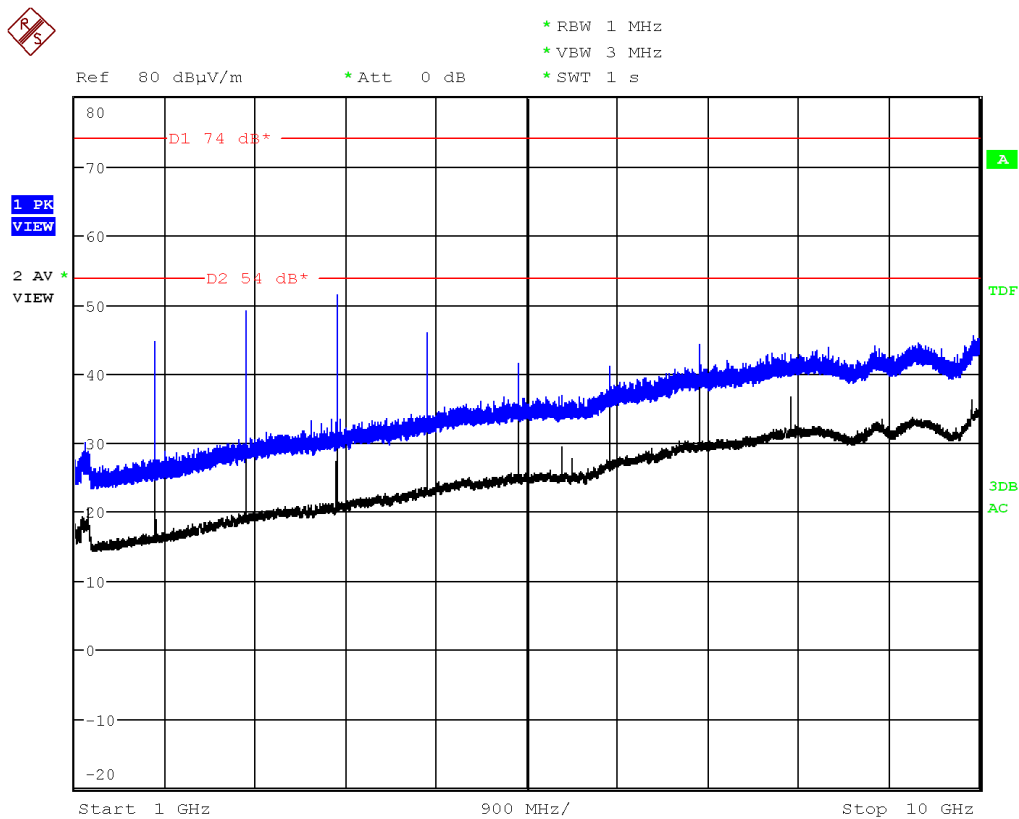

CHANNEL: Middle (908.7 MHz).

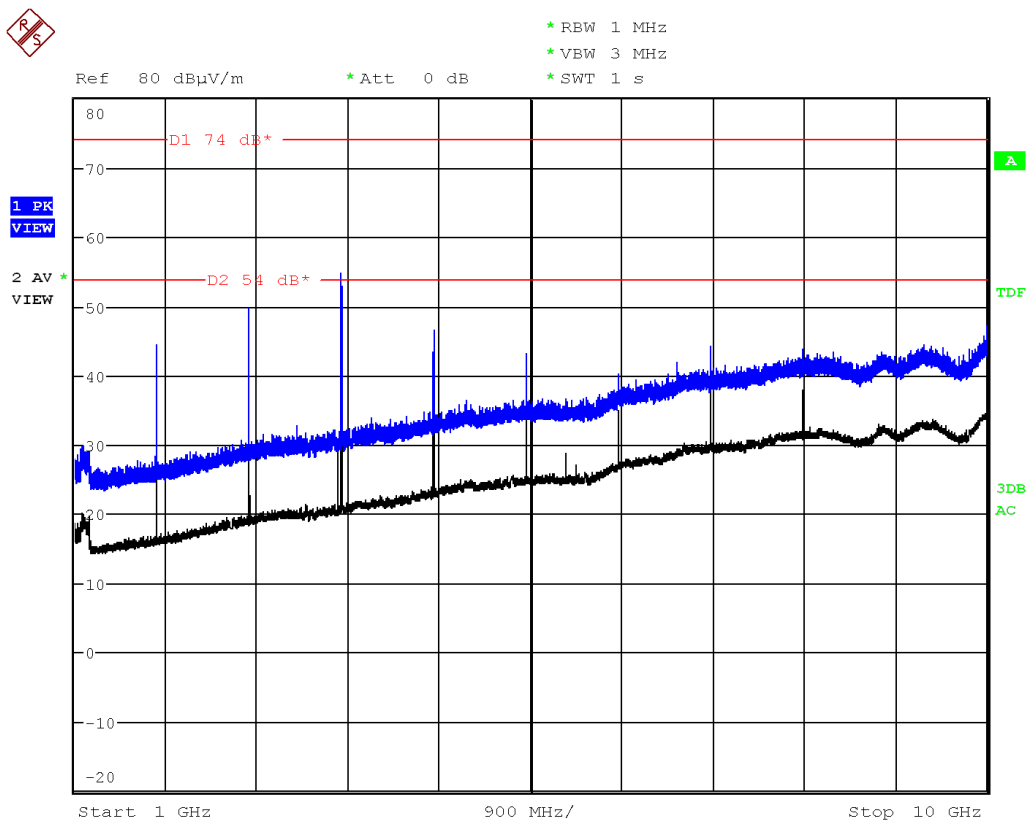

CHANNEL: Highest (914.9 MHz).

