

Report on the FCC Testing of the

Enco Electronic Systems, LLC HACS1

In accordance with FCC Rule Part 15.231

Prepared for: Enco Electronic Systems, LLC
165 Hostdale Road
Dothan, AL 36303

FCC ID: 2AHPO-HACS1

COMMERCIAL-IN-CONFIDENCE

Document Number: BO72142056.100 | Issue: 01



America

**Add value.
Inspire trust.**

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Pete Walsh	Service Line Manager	Authorized Signatory	2018-November-26

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation
Designation Number US1063 Tampa, FL Test Laboratory

Innovation, Science, and Economic Development Canada
Accreditation
Main Site Number 2087A-2 Tampa, FL Test Laboratory
Satellite Site Number: 4175C Boca Raton, FL Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC Rule Part 15.231



A2LA Cert. No. 2955.15

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America
5610 West Sligh Ave., Suite 100
Tampa, FL 33634

Phone: 813-284-2715
www.tuv-sud-america.com

TÜV SÜD

TÜV®

TABLE OF CONTENTS

1	GENERAL.....	3
1.1	Purpose	3
1.2	Manufacturer Information	3
1.3	Product description	3
1.4	Test Methodology and Considerations	3
2	TEST FACILITIES	4
2.1	Location	4
2.2	Laboratory Accreditations/Recognitions/Certifications	4
2.3	Radiated & Conducted Emissions Test Site Description	5
2.3.1	Semi-Anechoic Chamber Test Site	5
2.3.2	Conducted Emissions Test Site Description	6
3	APPLICABLE STANDARD REFERENCES	6
4	LIST OF TEST EQUIPMENT	7
5	SUPPORT EQUIPMENT	8
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....	8
7	SUMMARY OF TESTS	9
7.1	Antenna Requirement – FCC: Section 15.203.....	9
7.2	20dB Bandwidth: FCC: Section 15.231(c)	9
7.2.1	Measurement Procedure.....	9
7.2.2	Measurement Results	9
7.3	Radiated Spurious Emissions – FCC: Section 15.231(e)	11
7.3.1	Measurement Procedure.....	11
7.3.2	Duty Cycle Correction	11
7.3.3	Measurement Results	11
7.3.4	Sample Calculation	15
7.4	Duration of Transmission – FCC: CFR 47 15.231(e).....	16
7.4.1	Test Methodology.....	16
7.4.2	Measurement Results	16
8	CONCLUSION	19

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations.

1.2 Manufacturer Information

Enco Electronic Systems, LLC
165 Hostdale Road
Dothan, AL 36303

1.3 Product description

The Enco Electronic Systems, LLC model HACS1 is an ambient sensor designed to be installed in residential, commercial and industrial facilities. The device is used to monitor ambient temperature, humidity, lighting level and substrate moisture content. The device includes a 319.5 MHz transceiver.

Technical Details

Frequency of Operation: 319.5 MHz

Number of Channels: 1

Modulation: OOK

Antenna / Gain: PCB Loop Capacitor Loaded Antenna, 0 dBi

Input Voltage: 3 VDC (CR2450 Coin Button Cell Battery)

Test Sample Serial Number(s): S70110 (radiated Emissions), 1104DE Timing Measurements

Test Sample Condition: The samples were in good operating condition without any physical damages.

1.4 Test Methodology and Considerations

The EUT is battery operated only without any provisions for connection to the public AC mains. The EUT is exempted from the power line conducted emissions requirements.

The EUT was evaluated for radiated emissions in three orthogonal orientations. The EUT output power is not configurable. The EUT was operating at maximum output power per the equipment manufacturer.

The bandwidth and timing parameters were measured using a near field probe.

The EUT was also evaluated for unintentional emissions. The test results are documented in a Supplier's Declaration of Conformity (SDOC) test report.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
<http://www.tuv-sud-america.com>

Innovation, Science and Economic Development Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by American Association for Laboratory Accreditation (A2LA) and has been issued certificate number 2955.15 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

Main Site Information:

TÜV SÜD America, Inc.
5610 West Sligh Ave., Suite 100
Tampa, FL 33634
Phone: 813-284-2715
www.tuv-sud-america.com

FCC Designation Number US1063
FCC Test Firm Registration #: 160606
Innovation, Science, and Economic Development Canada Lab Code: 2087A-2

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which can support a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

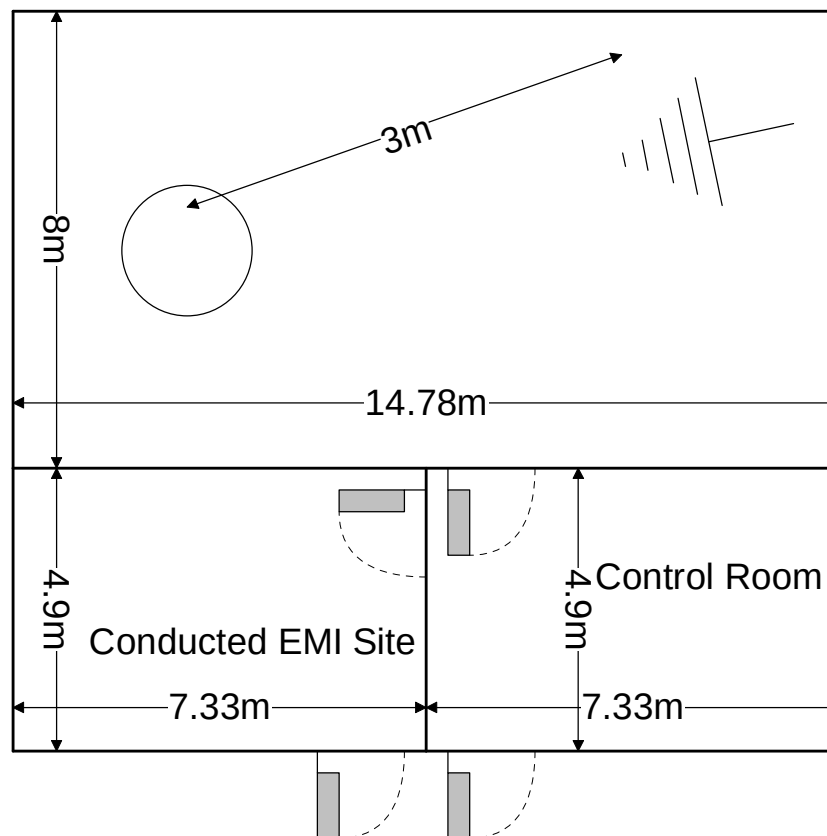


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m³. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω /50 μ H and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

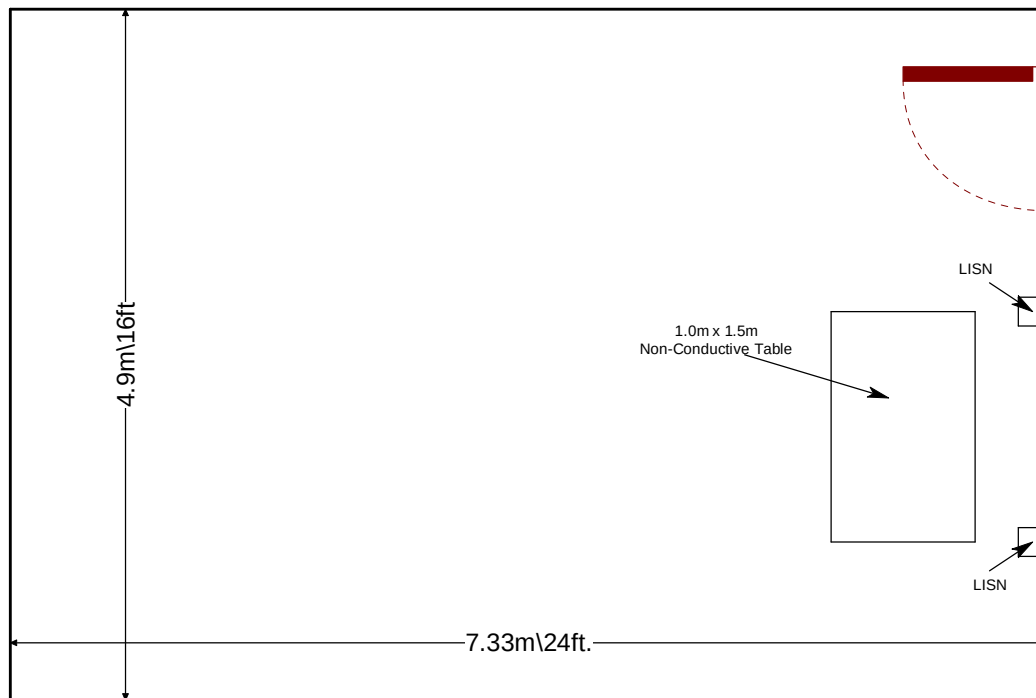


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2018.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2018.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
BEMC00078	EMCO	6502	Active Loop Antenna	9104-2608	5/9/2018	5/9/2020
BEMC00079	ETS Lindgren (EMCO)	7405	E & H Near Field Probe Set	93	NCR	NCR
BEMC00283	Rohde & Schwarz	FSP40	Spectrum Analyzer	1000033	11/28/2017	11/28/2019
BEMC00523	Agilent	E7405A	9kHz-26.5GHz EMC analyzer/HYZ	MY45103293	12/9/2016	12/9/2018
BEMC02002	EMCO	3108	30 MHz to 200 MHz Biconical Antenna	2147	11/28/2017	11/30/2019
BEMC02004	EMCO	3146	200 MHz to 1 GHz Log Periodic Antenna	1385	12/27/2017	12/27/2019
BEMC02006	EMCO	3115	Linear Polarized Horn antenna, 1-18 GHz	2573	4/7/2017	4/7/2019
BEMC02011	Hewlett-Packard	HP 8447D	100 kHz to 1.3 GHz low-noise, high gain amplifier	2443A03952	10/18/2018	10/18/2019
BEMC02083	Mini-Circuits	NHP-600	600 MHz High Pass Filter	2083	5/17/2018	5/17/2019
BEMC02094	Mini Circuits	SHP-1000+	High Pass Filter, 1000-3000 MHz, 50 OHM	R UU27401137	2/28/2018	2/28/2019
BEMC02095	ETS Lindgren	TILE4! - Version 4.2.A	Tile Automation Software	85242	NCR	NCR
BEMC02121	Teledyne Storm Products	A81-0303	Radiated Cable Set	2121	7/26/2018	7/26/2019
BEMC02138	Hewlett Packard	8449B	Pre-Amplifier	3008A00320	12/1/2017	12/1/2018
BEMC02148	Pasternack	PE360-24	PE-P160 40 GHz Cable		7/23/2018	7/23/2019

Notes:

- NCR=No Calibration Required
- The assets calibration cycle information is provided to cover the entire test period. The assets were only used during the active period of the calibration cycle.

5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment – Radiated Emissions

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Enco Electronic Systems, LLC	HACS1	S70110

Table 5-2: Cable Description – Radiated Emissions

Cable #	Cable Type	Length	Shield	Termination
A	The EUT is a stand-alone equipment without any provision for connection to external devices.			

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM




Figure 6-1: EUT Test Setup Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

Test Begin Date: November 5, 2018
Test End Date: November 12, 2018

Table 7-1: Summary of Tests

Test Description	FCC 47 CFR Rule Part	Test Results
Antenna Requirements	FCC: Section 15.203	Compliant
20dB Bandwidth	FCC: Section 15.231(c)	Compliant
Field Strength of Fundamental and Spurious Emissions	FCC: Sections 15.231(e)	Compliant
Duration of Transmission	FCC: Sections 15.231(e)	Compliant
Power Line Conducted Emissions	FCC: Section 15.207	N/A

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses a 0 dBi trace antenna that is integral to the PCB. The antenna is not removable and therefore meets the requirements of FCC Section 15.203.

7.2 20dB Bandwidth: FCC: Section 15.231(c)

7.2.1 Measurement Procedure

The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set from 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta Marker function of the analyzer set at 20 dB below the maximum level of the fundamental emission was utilized to determine the 20-dB bandwidth of the emission.


7.2.2 Measurement Results

0.25% of the 319.5 MHz center frequency is equivalent to 0.8 MHz. Therefore the 20 dB bandwidth of the emission is less than 0.25% of the center frequency.

Performed by: Thierry Jean-Charles

Table 7.2.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]
319.5	57.05

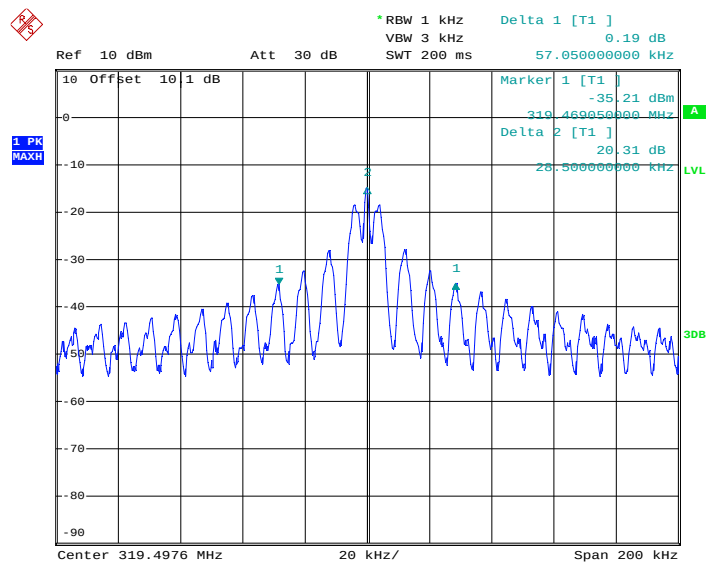

Date: 5.NOV.2018 12:16:16

Figure 7.2.2-1: 20dB Bandwidth

7.3 Radiated Spurious Emissions – FCC: Section 15.231(e)

7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 3.2 GHz, 10 times the highest fundamental frequency.

Measurements below 30 MHz were performed in a semi-anechoic chamber with a 3-meter separation distance between the EUT and measurement antenna. The EUT was rotated 360° to maximize each emission. The magnetic loop receiving antenna was positioned with its lowest point 1 meter above the ground. The loop antenna was aligned along the site axis, orthogonal to the site axis, and ground-parallel to the site axis.

The spectrum analyzer's resolution and video bandwidths were set to 200 Hz and 1000 Hz respectively for frequencies below 150 kHz and 9 kHz and 30 kHz respectively for frequencies above 150 kHz and below 30 MHz.

For measurements above 30 MHz, the EUT was rotated through 360° and the receive antenna height was varied from 1 meter to 4 meters so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000 MHz, measurements were made with RBW of 1 MHz and a VBW of 3 MHz.

An average detector was used for all measurement. The peak emissions were also compared to a limit corresponding to 20 dB above the maximum permitted average limit according to Part 15.35. The final measurements were then corrected by antenna correction factors and cable loss for comparison to the limits. Further, compliance with the provisions of 15.205 was demonstrated using the measurement instrumentation specified in that section where applicable.

7.3.2 Duty Cycle Correction

A Duty Cycle Correction of 7.92% corresponding to $20 \cdot \log(7.92/100) = -22.03$ dB was applied to the average measurements for the corrected average results. The justification of the duty cycle is provided in the equipment's theory of operation document.

7.3.3 Measurement Results

Performed by: Thierry Jean-Charles, Jean Rene

Radiated spurious emissions found in the band of 9 kHz to 3.2 GHz are reported.

Table 7.3.3-1: Radiated Spurious Emissions Tabulated Data – EUT Flat

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
319.5	70.00	70.00	H	16.31	86.31	64.29	87.9	67.9	1.6	3.6
319.5	56.40	56.40	V	16.31	72.71	50.69	87.9	67.9	15.2	17.2
Spurious Emissions										
639	63.19	63.19	H	-4.74	58.45	36.42	67.9	47.9	9.5	11.5
639	56.57	56.57	V	-4.74	51.83	29.80	67.9	47.9	16.1	18.1
958.5	40.87	40.87	H	0.07	40.94	18.91	67.9	47.9	27.0	29.0
958.5	42.68	42.68	V	0.07	42.75	20.72	67.9	47.9	25.2	27.2
1278	53.44	53.44	H	-4.80	48.64	26.61	74	54	25.4	27.4
1278	50.37	50.37	V	-4.80	45.57	23.54	74	54	28.4	30.5
1597.5	50.49	50.49	H	-2.91	47.58	25.56	74	54	26.4	28.4
1597.5	46.89	46.89	V	-2.91	43.98	21.96	74	54	30.0	32.0
1917	43.23	43.23	H	-0.34	42.89	20.86	74	54	31.1	33.1
2236.5	46.65	46.65	H	0.90	47.55	25.52	74	54	26.4	28.5
2236.5	44.99	44.99	V	0.90	45.89	23.86	74	54	28.1	30.1
2556	47.56	47.56	H	1.72	49.28	27.26	74	54	24.7	26.7
2556	45.02	45.02	V	1.72	46.74	24.72	74	54	27.3	29.3
2875.5	47.74	47.74	H	2.75	50.49	28.46	74	54	23.5	25.5
2875.5	44.76	44.76	V	2.75	47.51	25.48	74	54	26.5	28.5

Notes:

- The fundamental emissions were measured using RBW = 1 MHz which is greater than the measured occupied bandwidth.
- A duty cycle correction factor of -22.03 dB was applied to the peak measurements for the average spurious emissions levels.

Table 7.3.3-2: Radiated Spurious Emissions Tabulated Data – EUT on Side

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
319.5	63.10	63.10	H	16.31	79.41	57.39	87.9	67.9	8.5	10.5
319.5	65.36	65.36	V	16.31	81.67	59.65	87.9	67.9	6.2	8.3
Spurious Emissions										
639	57.10	57.10	H	-4.74	52.36	30.33	67.9	47.9	15.5	17.6
639	63.76	63.76	V	-4.74	59.02	36.99	67.9	47.9	8.9	10.9
958.5	38.95	38.95	H	0.07	39.02	16.99	67.9	47.9	28.9	30.9
958.5	41.40	41.40	V	0.07	41.47	19.44	67.9	47.9	26.4	28.5
1278	48.08	48.08	H	-4.80	43.28	21.25	74	54	30.7	32.7
1278	52.86	52.86	V	-4.80	48.06	26.03	74	54	25.9	28.0
1597.5	48.36	48.36	H	-2.91	45.45	23.43	74	54	28.5	30.6
1597.5	47.12	47.12	V	-2.91	44.21	22.19	74	54	29.8	31.8
1917	41.94	41.94	H	-0.34	41.60	19.57	74	54	32.4	34.4
1917	41.87	41.87	V	-0.34	41.53	19.50	74	54	32.5	34.5
2236.5	46.32	46.32	H	0.90	47.22	25.19	74	54	26.8	28.8
2236.5	45.49	45.49	V	0.90	46.39	24.36	74	54	27.6	29.6
2556	46.94	46.94	H	1.72	48.66	26.64	74	54	25.3	27.4
2556	45.11	45.11	V	1.72	46.83	24.81	74	54	27.2	29.2
2875.5	43.90	43.90	H	2.75	46.65	24.62	74	54	27.4	29.4
2875.5	45.98	45.98	V	2.75	48.73	26.70	74	54	25.3	27.3

Notes:

- The fundamental emissions were measured using RBW = 1 MHz which is greater than the measured occupied bandwidth.
- A duty cycle correction factor of -22.03 dB was applied to the peak measurements for the average spurious emissions levels.

Table 7.3.3-3: Radiated Spurious Emissions Tabulated Data – EUT Standing

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
319.5	63.61	63.61	H	16.31	79.92	57.90	87.9	67.9	8.0	10.0
319.5	64.73	64.73	V	16.31	81.04	59.02	87.9	67.9	6.9	8.9
Spurious Emissions										
639	60.70	60.70	H	-4.74	55.96	33.93	67.9	47.9	11.9	14.0
639	62.16	62.16	V	-4.74	57.42	35.39	67.9	47.9	10.5	12.5
958.5	42.91	42.91	H	0.07	42.98	20.95	67.9	47.9	24.9	26.9
958.5	39.40	39.40	V	0.07	39.47	17.44	67.9	47.9	28.4	30.5
1278	53.56	53.56	H	-4.80	48.76	26.73	74	54	25.2	27.3
1278	47.73	47.73	V	-4.80	42.93	20.90	74	54	31.1	33.1
1597.5	47.92	47.92	H	-2.91	45.01	22.99	74	54	29.0	31.0
1597.5	47.33	47.33	V	-2.91	44.42	22.40	74	54	29.6	31.6
1917	42.58	42.58	V	-0.34	42.24	20.21	74	54	31.8	33.8
2236.5	45.91	45.91	H	0.90	46.81	24.78	74	54	27.2	29.2
2236.5	47.00	47.00	V	0.90	47.90	25.87	74	54	26.1	28.1
2556	44.52	44.52	H	1.72	46.24	24.22	74	54	27.8	29.8
2556	46.98	46.98	V	1.72	48.70	26.68	74	54	25.3	27.3
2875.5	41.92	41.92	H	2.75	44.67	22.64	74	54	29.3	31.4
2875.5	44.05	44.05	V	2.75	46.80	24.77	74	54	27.2	29.2

Notes:

- The fundamental emissions were measured using RBW = 1 MHz which is greater than the measured occupied bandwidth.
- A duty cycle correction factor of -22.03 dB was applied to the peak measurements for the average spurious emissions levels.

7.3.4 Sample Calculation

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $53.44 + (-4.80) = 48.64 \text{ dB}\mu\text{V/m}$

Margin: $74.00 \text{ dB}\mu\text{V/m} - 48.64 \text{ dB}\mu\text{V/m} = 25.36 \text{ dB}$

Example Calculation: Average

Corrected Level: $53.44 + (-4.80) - 22.03 = 26.61 \text{ dB}\mu\text{V/m}$

Margin: $54.00 \text{ dB}\mu\text{V} - 26.61 \text{ dB}\mu\text{V/m} = 27.39 \text{ dB}$


7.4 Duration of Transmission – FCC: CFR 47 15.231(e)

7.4.1 Test Methodology

Devices shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


7.4.2 Measurement Results

Performed by: Thierry Jean-Charles

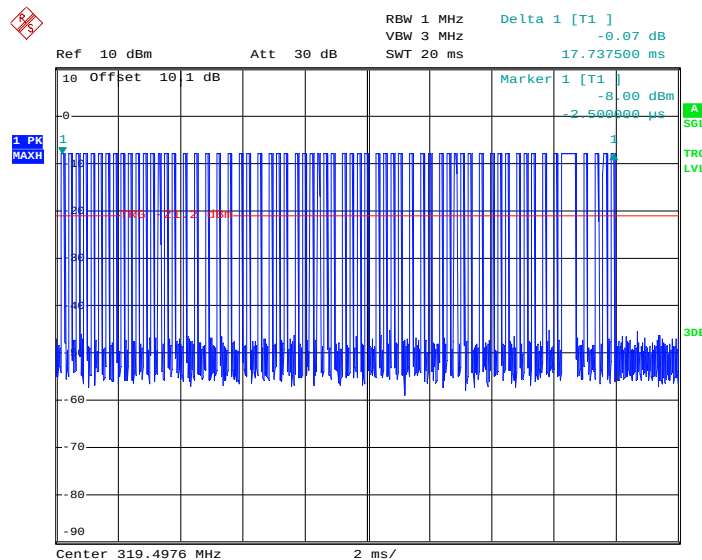


Date: 5.NOV.2018 15:56:10

Figure 7.4.2-1: Duration of Transmission –Individual Packet

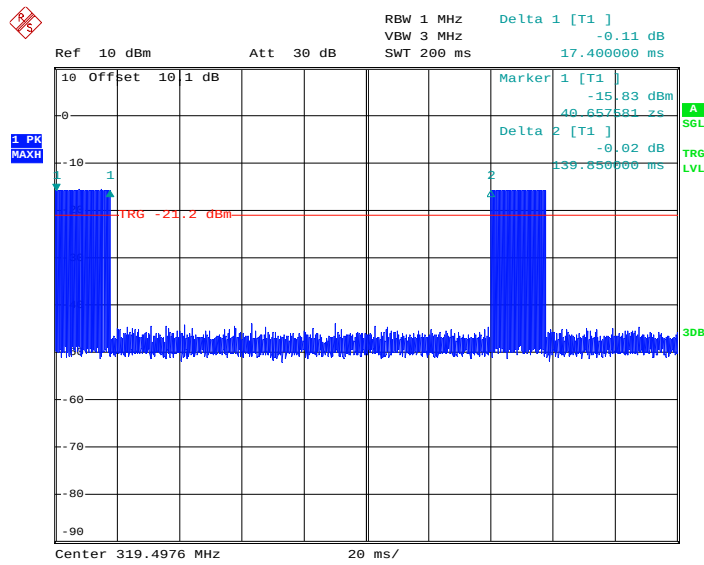


Date: 5.NOV.2018 14:22:02

Figure 7.4.2-2: Duration of Transmission – 200 ms

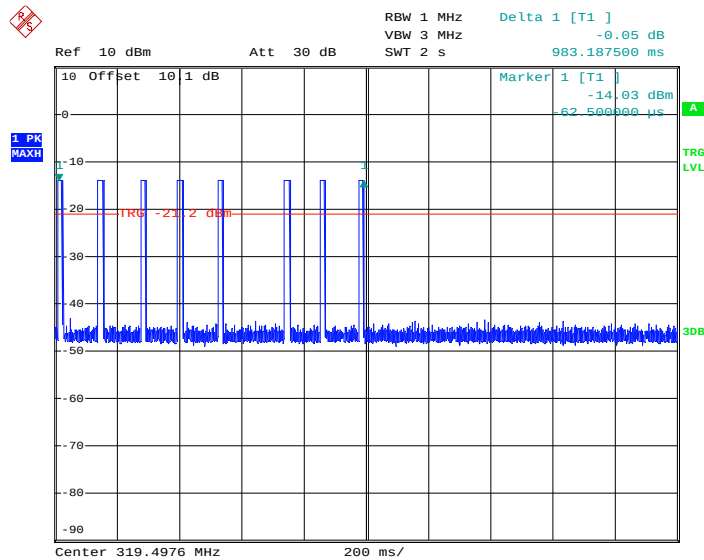

Date: 5.NOV.2018 13:58:39

Figure 7.4.2-3: Duration of Transmission – 2 Seconds

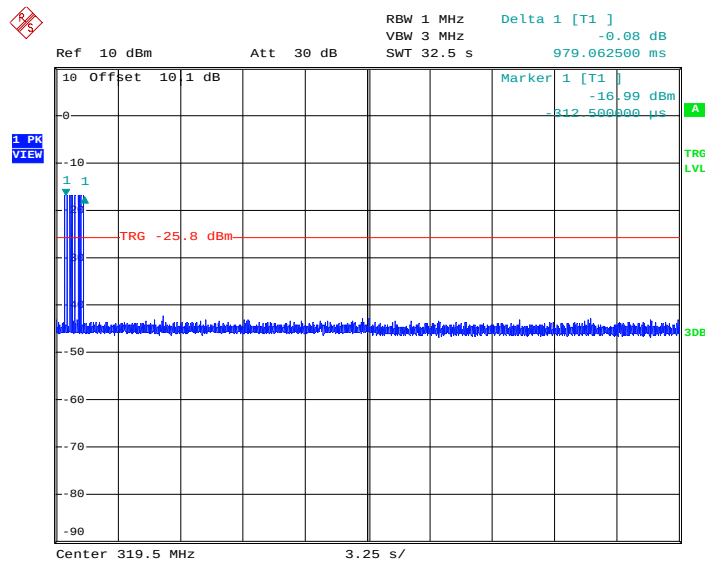

Date: 12.NOV.2018 18:27:14

Figure 7.4.2-4: Duration of Transmission –30 Seconds

MEASUREMENT UNCERTAINTIES

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 8-1: Measurement Uncertainties

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 1.15 \text{ dB}$
Power Spectral Density	$\pm 1.15 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.15 \text{ dB}$
Radiated Emissions $\leq 1\text{GHz}$	$\pm 5.86 \text{ dB}$
Radiated Emissions $> 1\text{GHz}$	$\pm 4.65 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.72 \text{ dB}$

8 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the model HACS1, manufactured by Enco Electronic Systems, LLC meets the requirements of FCC Part 15 subpart C.

END REPORT