

Index:

- 1. Specification / Page 2**
- 2. Characteristics and Reliability Test / Page 3**
- 3. Antenna - S Parameter Test Data / Page 4**
- 4. Antenna - Radiation Pattern Test Data / Page 5 ~ 7**
- 5. Mechanical and Packing Drawing / Page 8 ~ 9**
- 6. Material Description and RoHS Test Report / Page 10 ~ end**

Product Number: AN2400-5701SM

Product Name: Antenna

1. Specification

Sample Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz
S.W.R.	≤ 2.0
Antenna Gain	2 dBi
Polarization	Linear
Impedance	50 Ohm
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Material of Plastic	Body: TPE Hinge: PA+ABS Holder: PA+ABS
Cable Type	RG-178
Connector Type	SMA Male Reverse
Connector Pull Test	≥ 3 Kg
Connector Torque Test	200~600g.cm
C. Environmental	
Operation Temperature	- 40 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 80 °C

Product Number: AN2400-5701SM

Product Name: Antenna


2. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements
C1	S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification
C2	Antenna Gain	Set DUT on Antenna Chamber; make individual calibration to test	Directive DUT specification
M1	Vibration	MIL-STD-202G, 201A Amplitude: 0.03 inch (0.76mm); Freq: 10 to 55 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.<= 5%
M2	Random Drop	Height: 1.5 Meter; 3 directions; 1 time for each direction	1. No parts separated 2. Frequency Tol.<= 5%
M3	Solderability	MIL-STD-202G, 210F, cond. A Solder iron: 350±10°C; Duration: 5 seconds	1. Mounted on PCB 2. No Visual Damage
M4	Terminal-Pull Test	MIL-STD-202G, 211A, cond. A Holding with individual specification; force applied to axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M5	Terminal-Torque Test	MIL-STD-202G, 211A, cond. E Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M6	Dimension	Inspection of dimension, color, material, package, surface process	Directive DUT specification
E1	Salt Spray	MIL-STD-202G, 101E, cond. B Temp: 35°C; RH: >= 95%; NaCl solution: >= 5%; Time: 48 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E2	Humidity	MIL-STD-202G, 103B, cond. B Temp: 40°C; RH: >= 95%; Time: 48 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E3	Thermal Shock	1 Cycle: - 40°C (30 minutes) to + 80°C (30 minutes) Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E4	Life (High Temp.)	MIL-STD-202G, 108A, cond. A Temp: 85°C; Time: 96 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
R1	RoHS	With Reference to IEC 62321:2008 with flow chart	Directive RoHS 2002/95/EC
R2	PFOS	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC
R3	PFOA	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC

Product Number: AN2400-5701SM

Product Name: Antenna

3. Antenna - S Parameter Test Data

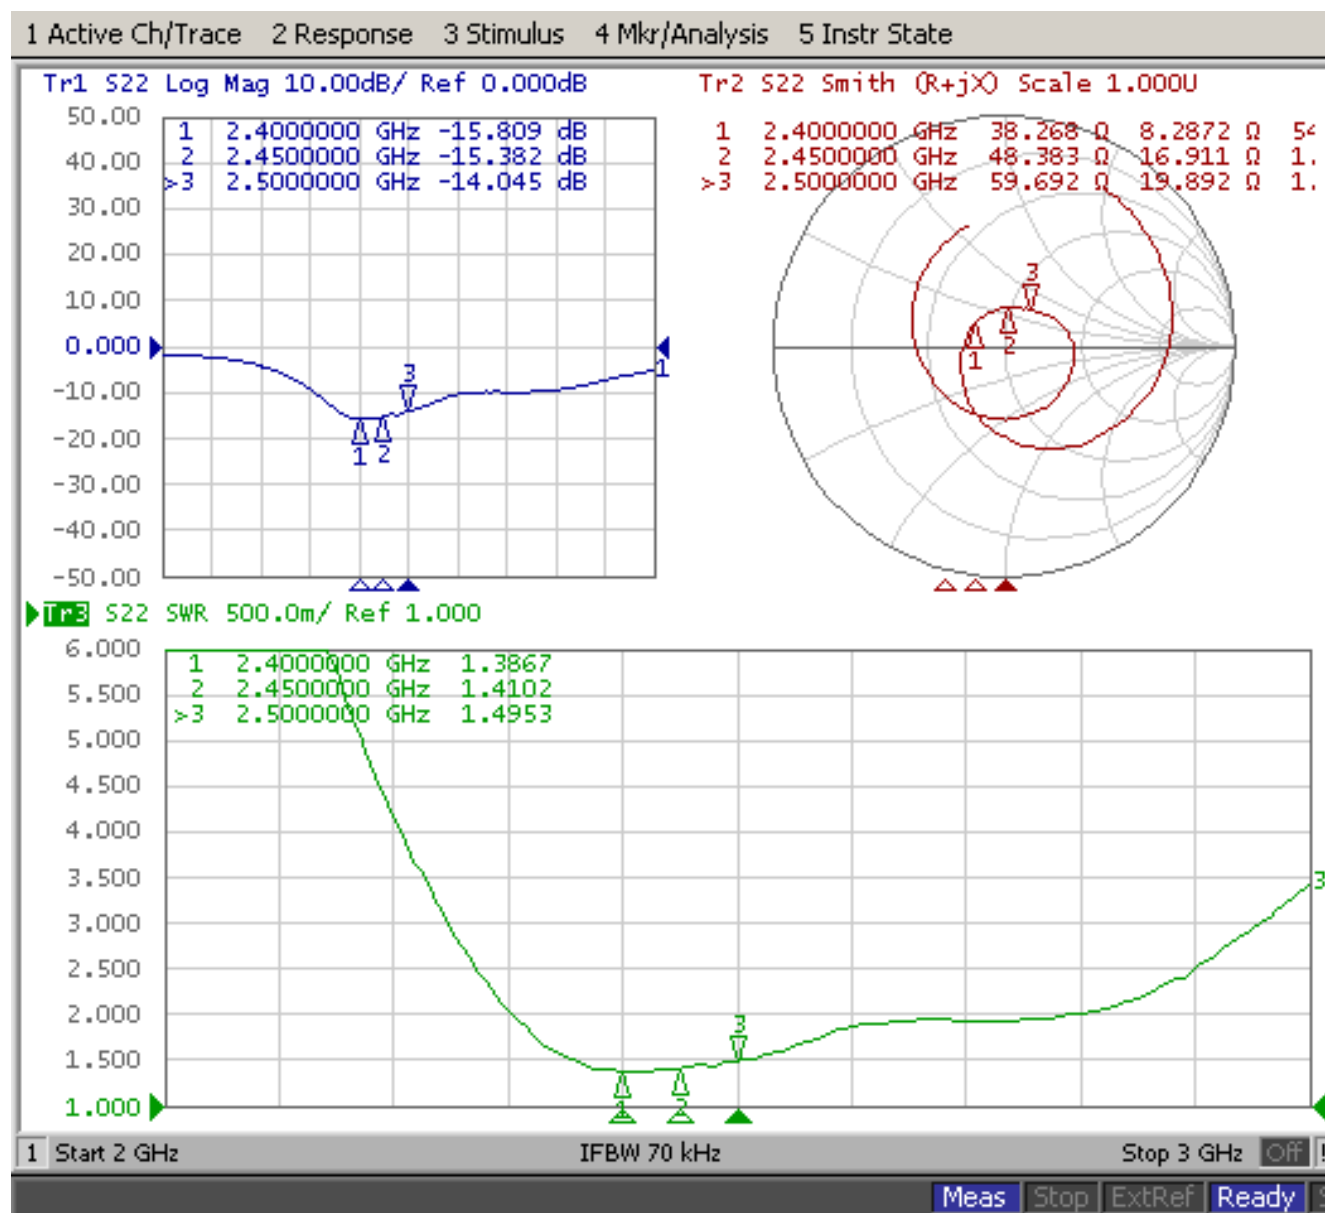

Product Number: AN2400-5701SM

Product Name: Antenna

4. Antenna - Radiation Pattern Test Data

Testing Equipment Specification:

Antenna Anechoic Chamber Dimension: 8 x 4 x 4 m


Quiet Zone: 600mm @1 GHz

Isolation: >100dB @ 1 MHz ~ 10 GHz

Testing Equipment: Agilent 5071B


Received Antenna: 0.7 ~ 6.0 GHz for Gain Calibration

Double Ridged Horn Antenna

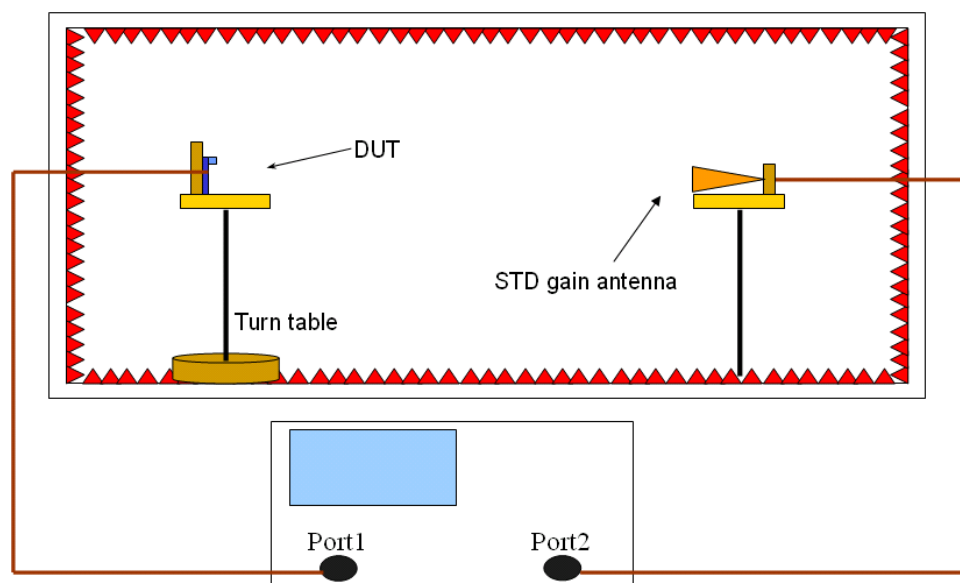

5. Mechanical Drawing

See attached files

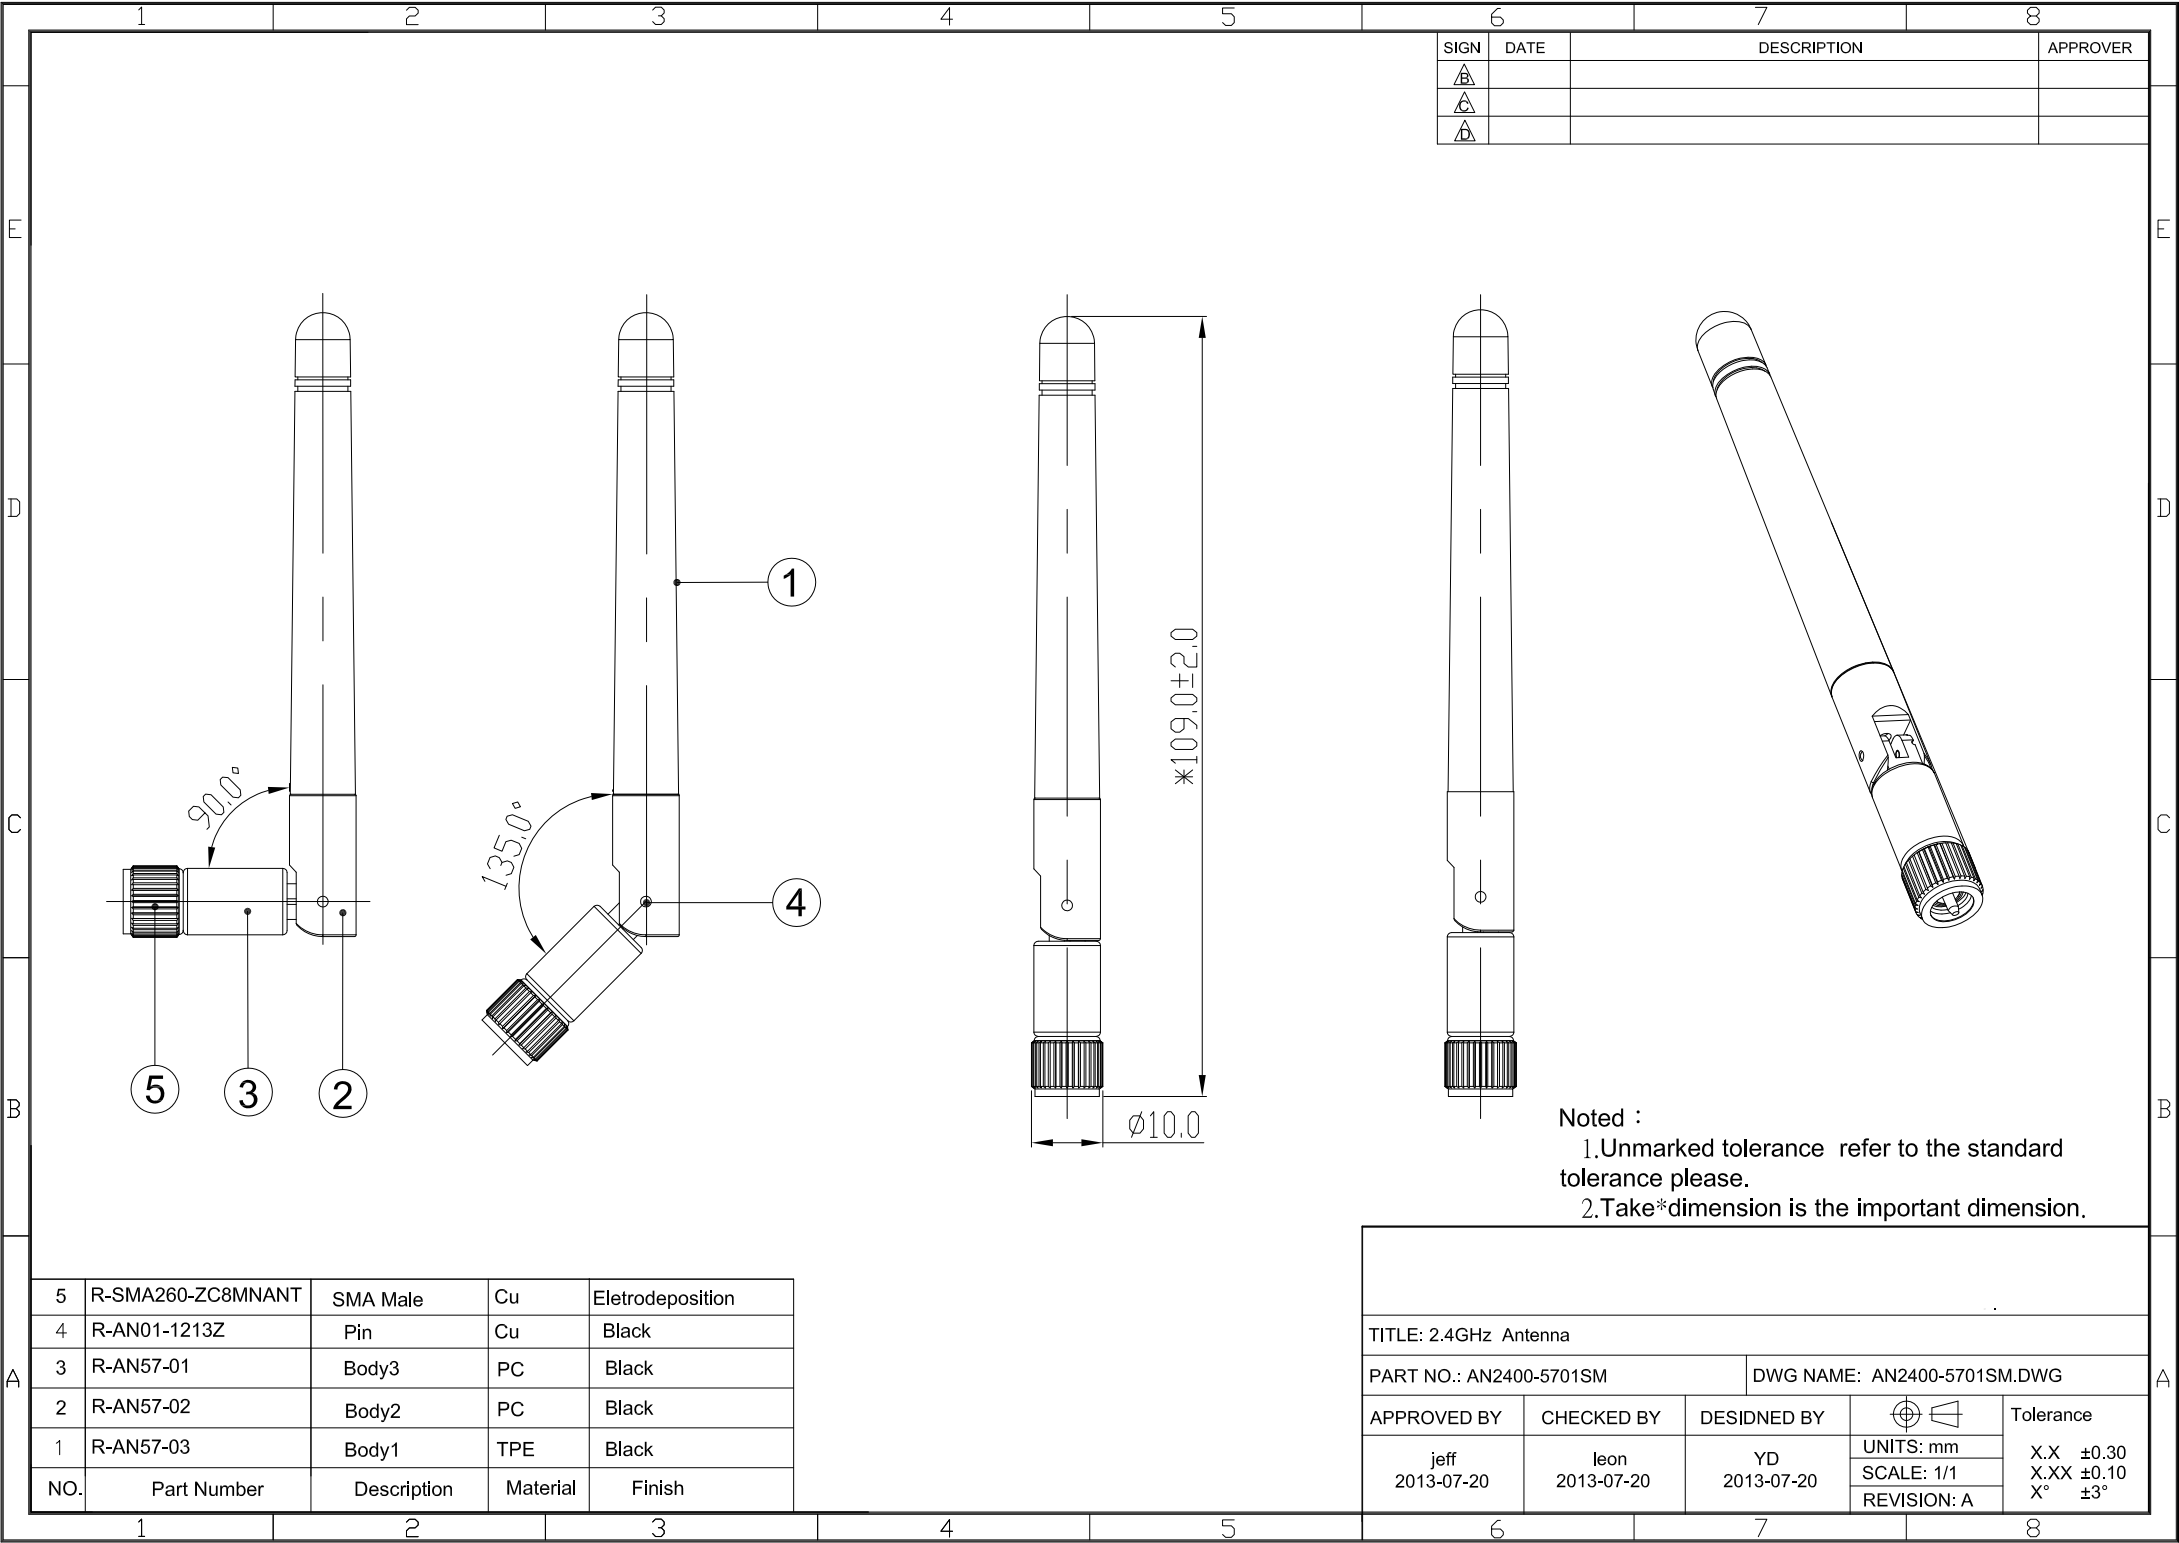

SIGN	DATE	DESCRIPTION	APPROVER

5	R-SMA260-ZC8MNANT	SMA Male	Cu	Eletrodeposition
4	R-AN01-1213Z	Pin	Cu	Black
3	R-AN57-01	Body3	PC	Black
2	R-AN57-02	Body2	PC	Black
1	R-AN57-03	Body1	TPE	Black
NO.	Part Number	Description	Material	Finish

TITLE: 2.4GHz Antenna				
PART NO.: AN2400-5701SM			DWG NAME: AN2400-5701SM.DWG	
APPROVED BY	CHECKED BY	DESIDNED BY		Tolerance
jeff 2013-07-20	leon 2013-07-20	YD 2013-07-20	UNITS: mm	X.X ±0.30
			SCALE: 1/1	X.XX ±0.10
			REVISION: A	X° ±3°

Noted :
1.Unmarked tolerance refer to the standard tolerance please.
2.Take*dimension is the important dimension.