FCC 47 CFR PART 15 SUBPART C

for

750M Wireless Router
Model: WR7502, WR7**（* from 0 to 9）, RP-ND007, iB-WRD75EU**

Brand: AMTC, IBALL, ravpower

Test Report Number:
C160627Z06-RP1-1
Issued Date: August 1, 2016

Issued for

Shen Zhen MTC Co., LTD
MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China

Issued by:

Compliance Certification Services (Shenzhen) Inc.
No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China
TEL: 86-755-28055000
FAX: 86-755-28055221

ACCREDITED
TESTING CERT #2861.01

Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 1, 2016	Initial Issue	ALL	Sabrina Wang

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

TABLE OF CONTENTS

1 TEST CERTIFICATION 4
2 TEST RESULT SUMMARY 4
3 EUT DESCRIPTION 6
4 TEST METHODOLOGY 8
4.1. DESCRIPTION OF TEST MODES 8
5 SETUP OF EQUIPMENT UNDER TEST 9
5.1. DESCRIPTION OF SUPPORT UNITS 9
5.2. CONFIGURATION OF SYSTEM UNDER TEST 9
6 FACILITIES AND ACCREDITATIONS 10
6.1. FACILITIES 10
6.2. ACCREDITATIONS 10
6.3. MEASUREMENT UNCERTAINTY 10
7 FCC PART 15.247 REQUIREMENTS 11
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT 11
7.2. SPURIOUS EMISSIONS MEASUREMENT 18
7.3. 6dB BANDWIDTH MEASUREMENT 69
7.4. ANTENNA GAIN 83
7.5. PEAK OUTPUT POWER 84
7.6. BAND EDGES MEASUREMENT 89
7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT 115

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

1 TEST CERTIFICATION

Product	750M Wireless Router
Model	WR7502, WR7****（* from 0 to 9）, RP-ND007, iB-WRD75EU
Brand	AMTC, IBALL, ravpower
Tested	June 17~August 1, 2016
Applicant	**Shen Zhen MTC Co., LTD** MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China
Manufacturer	**Shen Zhen MTC Co., LTD** MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China

APPLICABLE STANDARDS			
Standard	**Test Type**	**Standard**	**Test Type**
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.
The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:



Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	**Test Type**	**Result**	**Remark**
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

3 EUT DESCRIPTION

Product	750M Wireless Router
Model Number	WR7502, WR7****（* from 0 to 9）, RP-ND007, iB-WRD75EU
Brand	AMTC, IBALL, ravpower
Model Discrepancy	1. "*" from 0 to 9; 2. Model numbers are identical in circuitry and electrical, mechanical and physical construction; the only differences are the model name and the trademark, Trademark for trading purpose.
Identify Number	C160627Z06-RP1-1
Received Date	June 27, 2016
Power Supply	DC 5V supplied by the adapter
Adapter Manufacturer/ Model Name	ShenZhen SOY Technology Co., Ltd. / SOY-0500150US I/P:100-240Vac,50/60Hz,0.3A O/P: 5V,1.5A DC Output Cable: Unshielded,1.80m
Transmit Power	IEEE 802.11b mode: 19.91dBm (Antenna 0) IEEE 802.11b mode: 16.75dBm (Antenna 1) IEEE 802.11g mode: 22.47dBm (Antenna 0) IEEE 802.11g mode: 21.37dBm (Antenna 1) IEEE 802.11n HT20 MHz mode: 23.89dBm(Combine with Antenna 0 and Antenna 1) IEEE 802.11n HT40 MHz mode: 23.85dBm(Combine with Antenna 0 and Antenna 1)
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 130Mbps with fall back rates of 130/117/104/ 78/52/39/26/13Mbps IEEE 802.11n HT40: 270Mbps with fall back rates of 270/243/216/ 162/108/81/54/27Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Dipole Antenna with 5dBi gain (Max)
Directional Gain	Directional Gain=$Gain_{Ant}$ + Array Gain=5+10log(2)=8.01dBi
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
Temperature Range	0°C ~ +40°C
Hardware Version	WR7501-01-01
Software Version	MTC-WR7502-V002R001C01B***

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Note: *1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*

*2. This submittal(s) (test report) is intended for FCC ID: **2AHVHWR7502** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	**Mode 1:** 10Mbps 10% (120V/60Hz)	**Mode 2** **Mode 4**
	Mode 2: 100Mbps 10%(120V/60Hz)	
	Mode 3: 10Mbps 10% (240V/50Hz)	
	Mode 4: 100Mbps 10%(240V/50Hz)	
Radiated Emission	**Mode 1:** TX	**Mode 1**

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid(2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 27Mbps data rate were chosen for full testing.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook 1#	E335	R9-WN1EF	N/A	Thinkpad	Unshielded 1.80m (RJ45 Cable)	Shielded 1.60m (AC Cable) Unshielded 1.80m (DC Cable)
2	Notebook 2#	Probook 5310M	N/A	N/A	HP	Unshielded 1.80m (RJ45 Cable)	Shielded 1.60m (AC Cable) Unshielded 1.80m (DC Cable)

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	**A2LA**
China	**CNAS**

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	**FCC**
Japan	**VCCI (C-4815,R-4320,T-2317, G-10624)**
Canada	**INDUSTRY CANADA**

Copies of granted accreditation certificates are available for downloading from our web site, http://www.ccssz.com

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:
(1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2016	02/20/2017
LISN	EMCO	3825/2	8901-1459	02/21/2016	02/20/2017
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.4. TEST SETUP

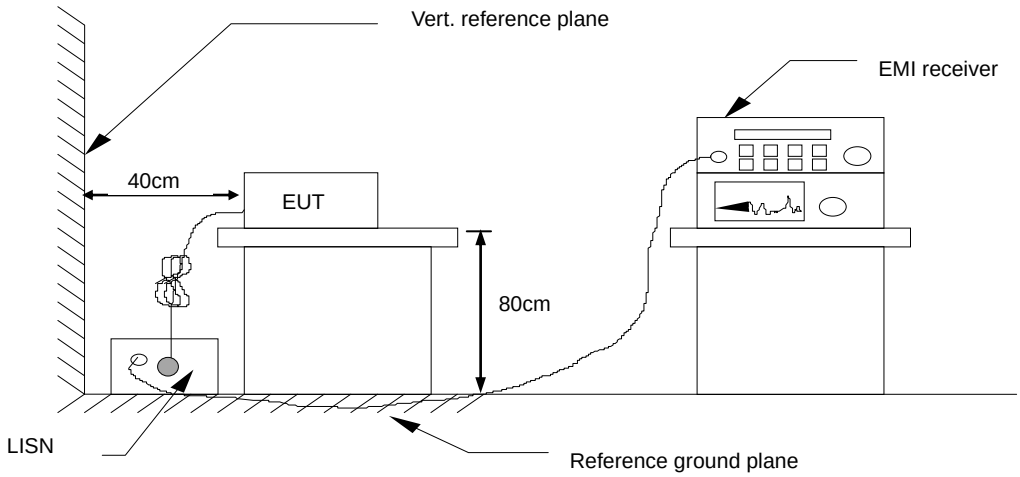

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.6. TEST RESULTS

Model No.	WR7502	**RBW,VBW**	9 kHz
Environmental Conditions	22°C, 45% RH	**Test Mode**	Mode 2
Tested by	Saber Huang	**Line**	L1
Tested Date	2016/06/27		

(The chart below shows the highest readings taken from the final data.)

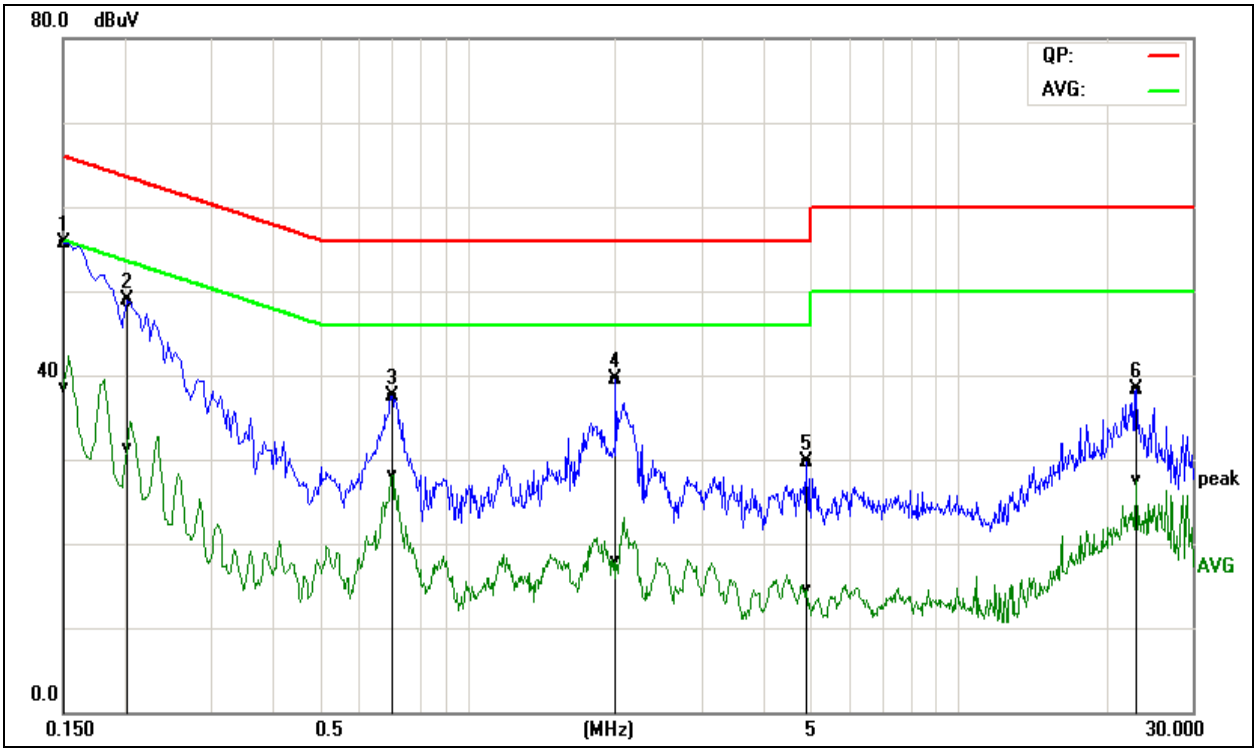

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	46.18	28.86	9.58	55.76	38.44	65.99	56.00	-10.23	-17.56	Pass
0.2020	39.11	21.58	9.69	48.80	31.27	63.52	53.53	-14.72	-22.26	Pass
0.7019	27.68	18.23	9.79	37.47	28.02	56.00	46.00	-18.53	-17.98	Pass
2.0020	29.77	8.27	9.73	39.50	18.00	56.00	46.00	-16.50	-28.00	Pass
4.9220	20.11	4.75	9.68	29.79	14.43	56.00	46.00	-26.21	-31.57	Pass
23.1299	28.43	17.62	9.87	38.30	27.49	60.00	50.00	-21.70	-22.51	Pass

REMARKS: *L1 = Line One (Live Line)*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Model No.	WR7502	**RBW,VBW**	9 kHz
Environmental Conditions	22°C, 45% RH	**Test Mode**	Mode 2
Tested by	Saber Huang	**Line**	L2
Tested Date	2016/06/27		

(The chart below shows the highest readings taken from the final data.)

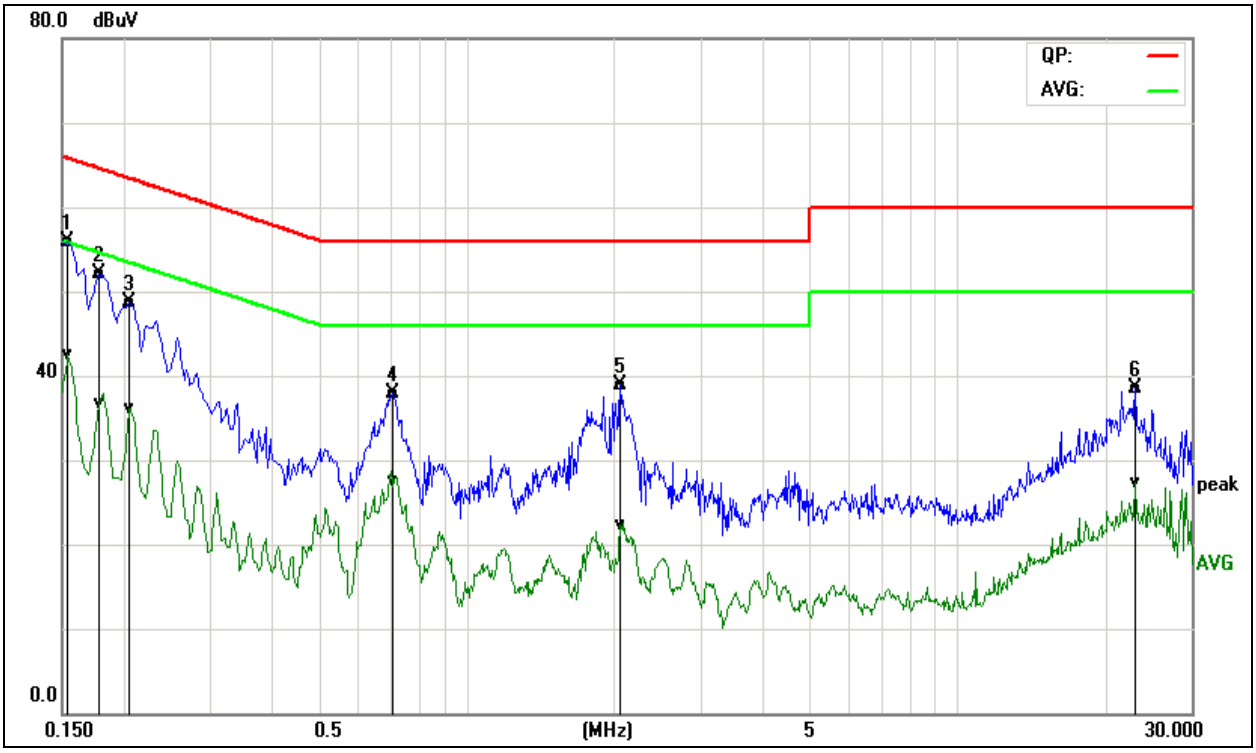

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1539	46.07	32.65	9.78	55.85	42.43	65.78	55.79	-9.93	-13.36	Pass
0.1780	42.33	26.83	9.79	52.12	36.62	64.57	54.58	-12.45	-17.96	Pass
0.2060	38.98	26.33	9.79	48.77	36.12	63.36	53.37	-14.59	-17.25	Pass
0.7060	28.24	17.75	9.69	37.93	27.44	56.00	46.00	-18.07	-18.56	Pass
2.0620	29.11	12.55	9.73	38.84	22.28	56.00	46.00	-17.16	-23.72	Pass
23.1259	28.67	17.49	9.77	38.44	27.26	60.00	50.00	-21.56	-22.74	Pass

REMARKS: *L2 = Line Two (Neutral Line).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Model No.	WR7502	**RBW,VBW**	9 kHz
Environmental Conditions	22°C, 45% RH	**Test Mode**	Mode 4
Tested by	Saber Huang	**Line**	L1
Tested Date	2016/06/27		

(The chart below shows the highest readings taken from the final data.)

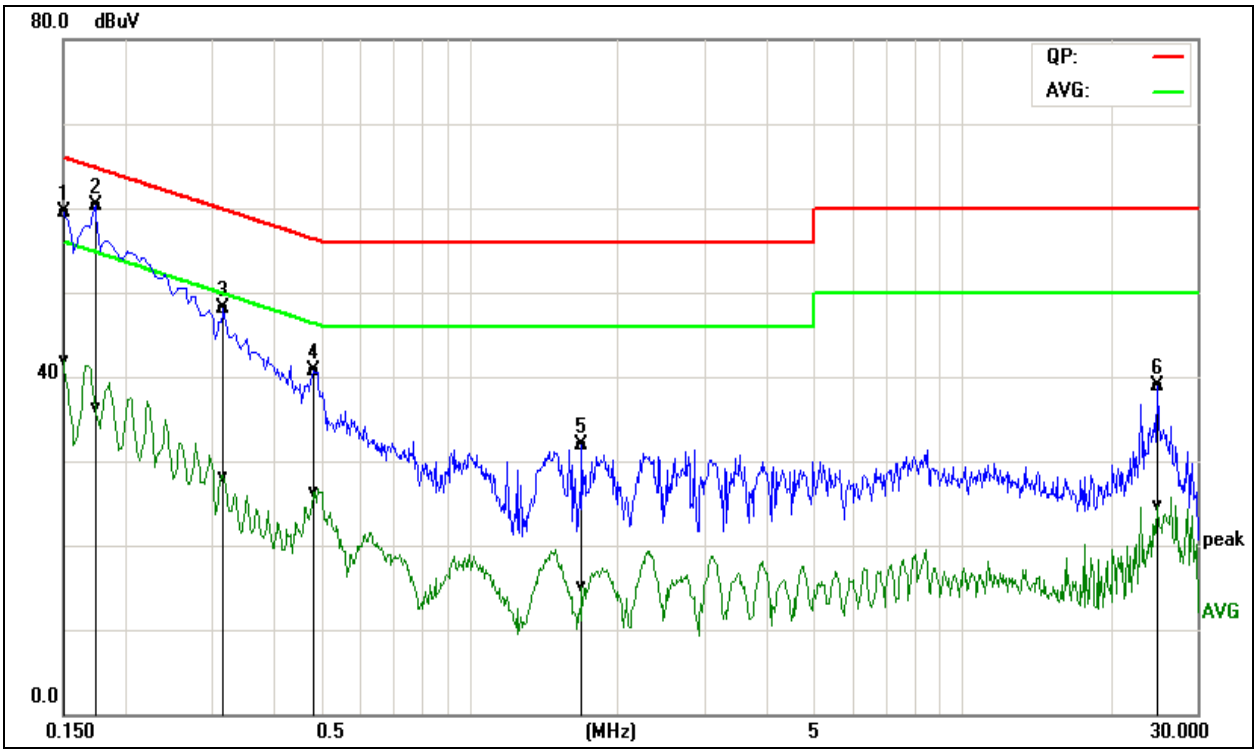

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	49.92	32.30	9.58	59.50	41.88	65.99	56.00	-6.49	-14.12	Pass
0.1740	50.74	26.62	9.63	60.37	36.25	64.76	54.77	-4.39	-18.52	Pass
0.3180	38.39	18.37	9.69	48.08	28.06	59.76	49.76	-11.68	-21.70	Pass
0.4820	31.04	16.68	9.68	40.72	26.36	56.30	46.30	-15.58	-19.94	Pass
1.6940	22.12	5.33	9.72	31.84	15.05	56.00	46.00	-24.16	-30.95	Pass
24.8819	28.95	14.77	9.89	38.84	24.66	60.00	50.00	-21.16	-25.34	Pass

REMARKS: *L1 = Line One (Live Line)*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Model No.	WR7502	**RBW,VBW**	9 kHz
Environmental Conditions	22°C, 45% RH	**Test Mode**	Mode 4
Tested by	Saber Huang	**Line**	L2
Tested Date	2016/06/27		

(The chart below shows the highest readings taken from the final data.)

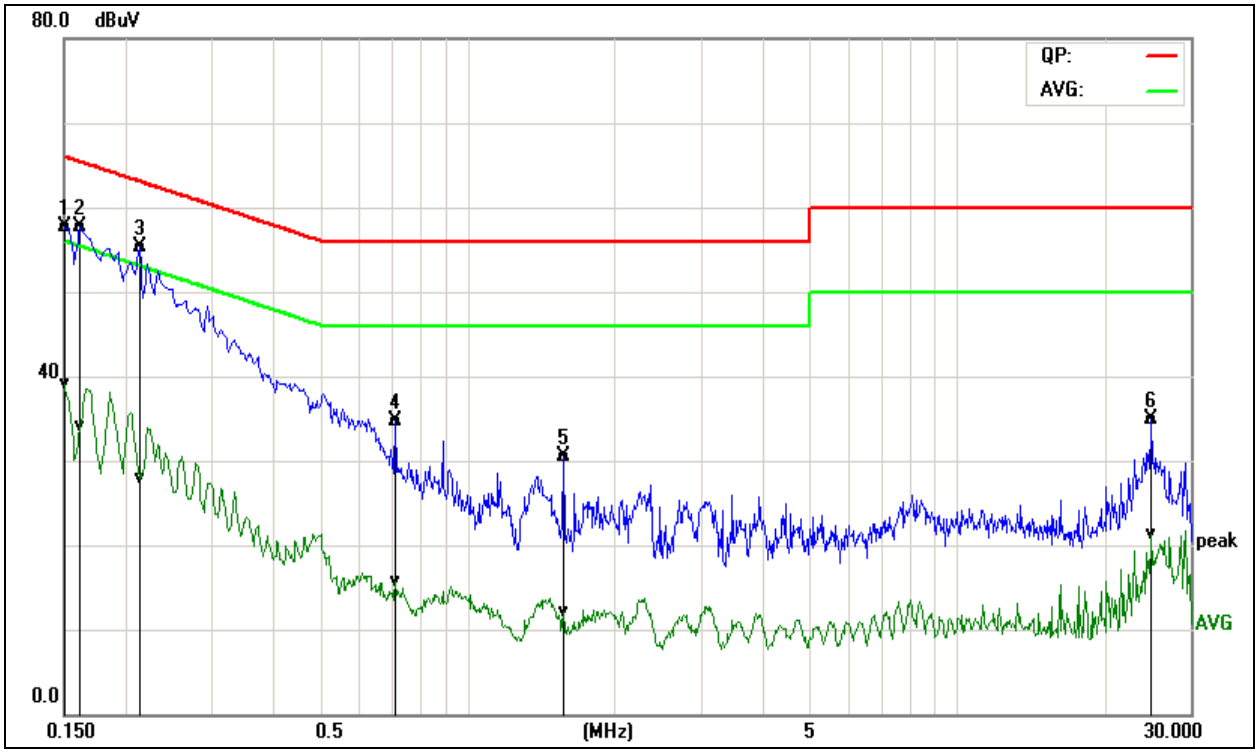

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	47.89	29.26	9.78	57.67	39.04	65.99	56.00	-8.32	-16.96	Pass
0.1620	47.89	24.32	9.78	57.67	34.10	65.36	55.36	-7.69	-21.26	Pass
0.2140	45.43	18.14	9.79	55.22	27.93	63.04	53.05	-7.82	-25.12	Pass
0.7140	24.95	5.96	9.69	34.64	15.65	56.00	46.00	-21.36	-30.35	Pass
1.5740	20.66	2.26	9.76	30.42	12.02	56.00	46.00	-25.58	-33.98	Pass
25.0419	25.12	11.56	9.79	34.91	21.35	60.00	50.00	-25.09	-28.65	Pass

REMARKS: *L2 = Line Two (Neutral Line).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d)specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:
If the peakoutput power procedure is used to measure the fundamental emission powerto demonstrate compliance to 15.247(b)(3)requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency bandshall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
If the averageoutput power procedure is used to measure the fundamental emission powerto demonstrate compliance to 15.247(b)(3)requirements,then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measuredin-band average PSD level.
In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.
The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.
Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz，it is only recorded 10MHz to 26GHz.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.1.4. TEST RESULTS

Test Plot

IEEE 802.11b mode (Antenna 0)

CH Low (10MHz ~26.5GHz)

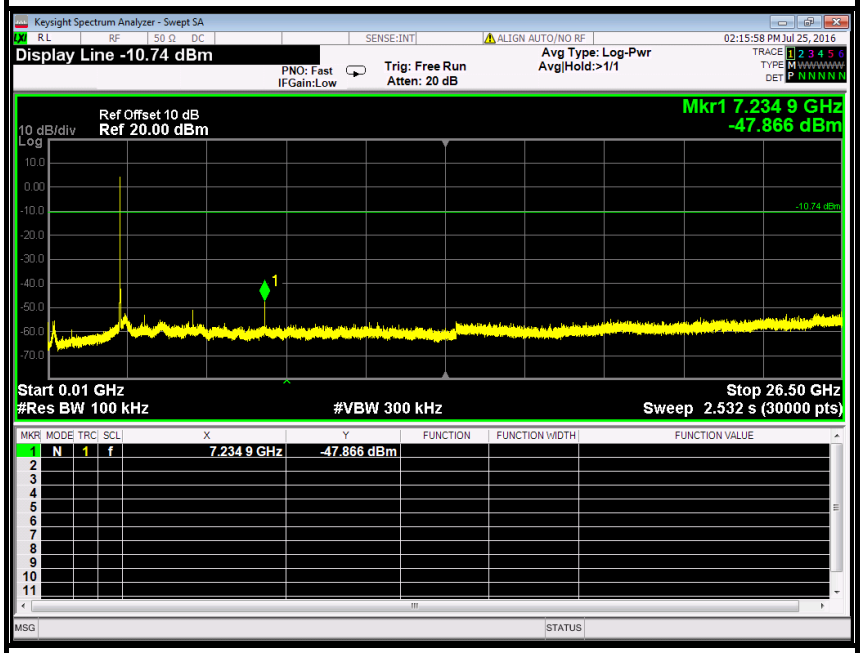

CH Low (2.31GHz ~2.43GHz)

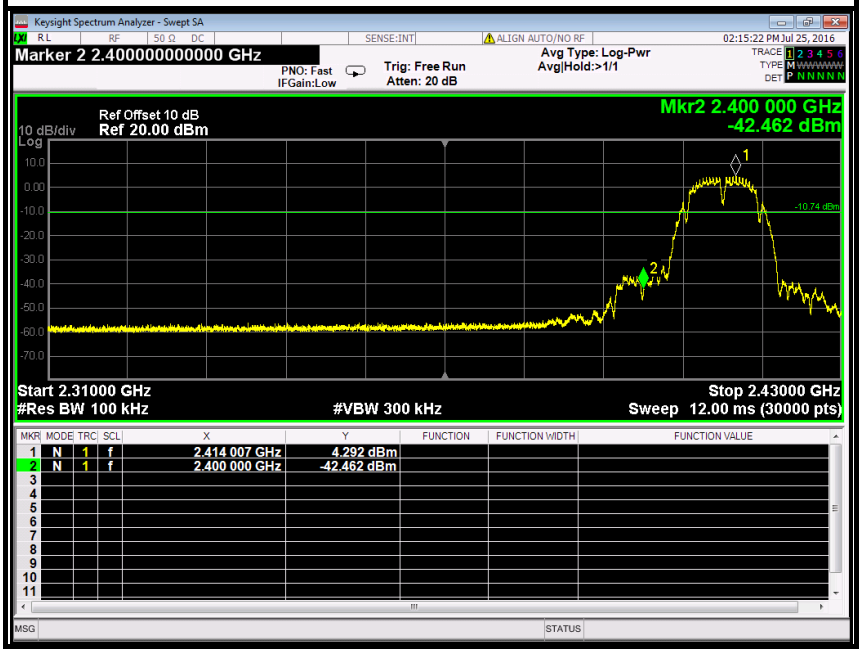

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

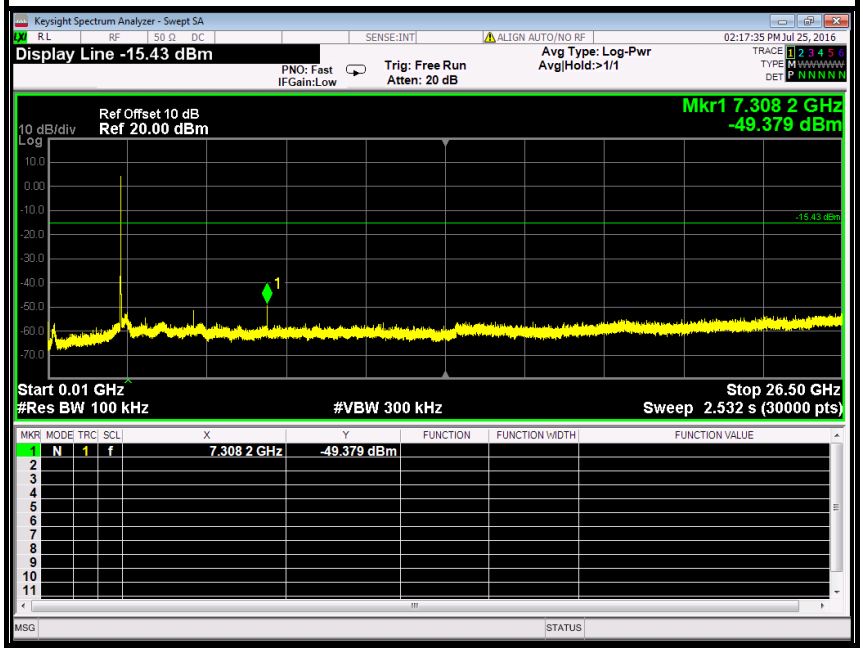

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

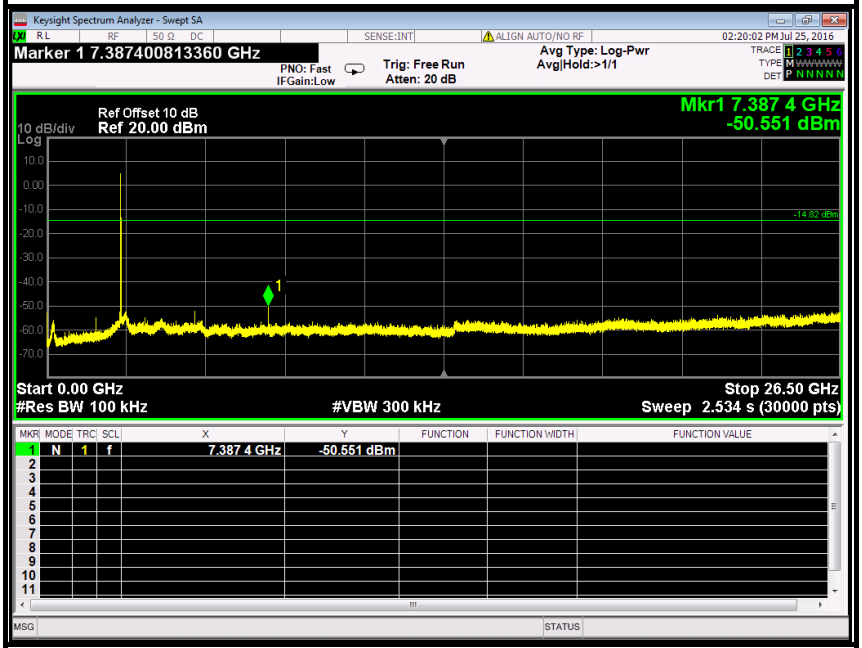

CH High (2.45GHz ~2.5GHz)

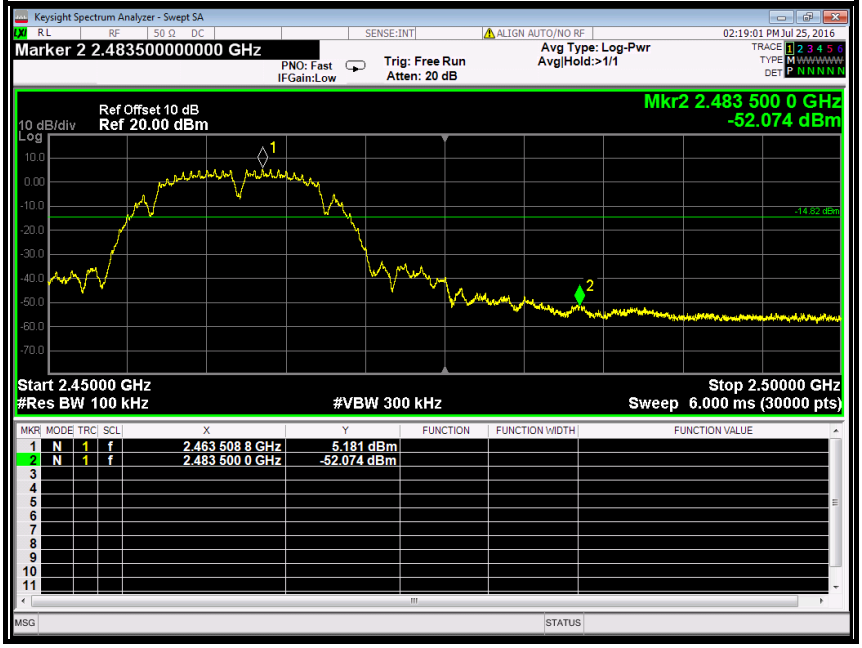

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11b mode (Antenna 1)

CH Low (10MHz ~26.5GHz)

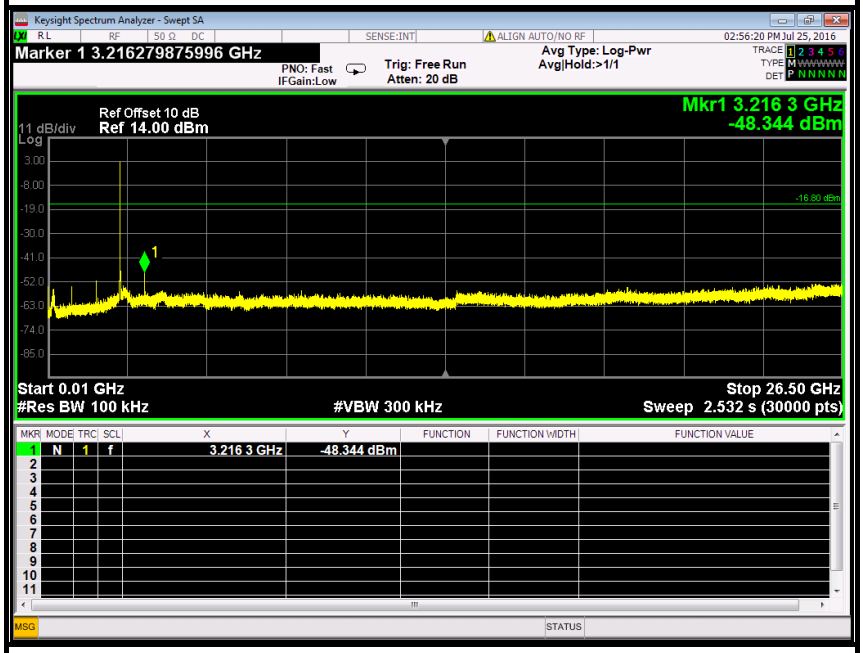

CH Low (2.31GHz ~2.43GHz)

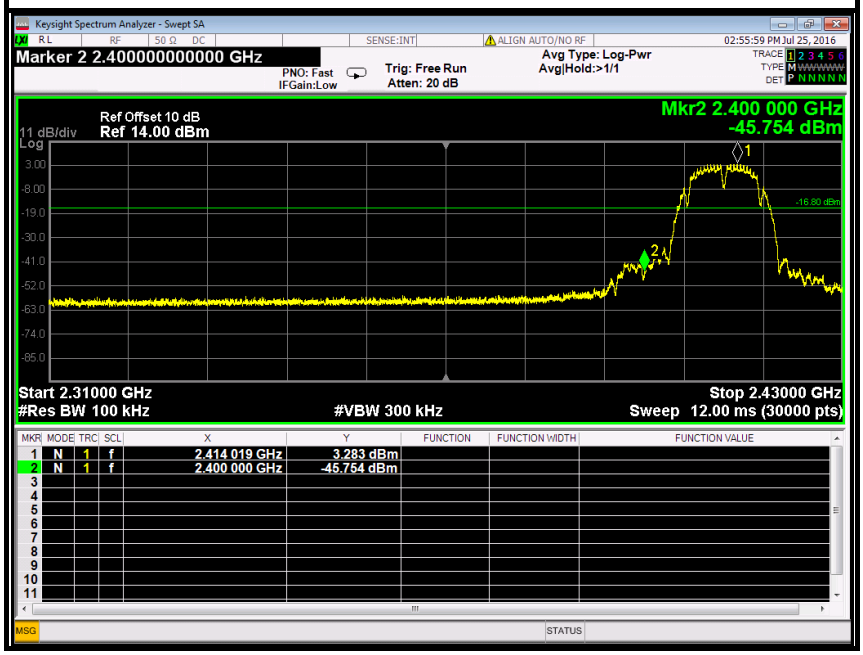

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

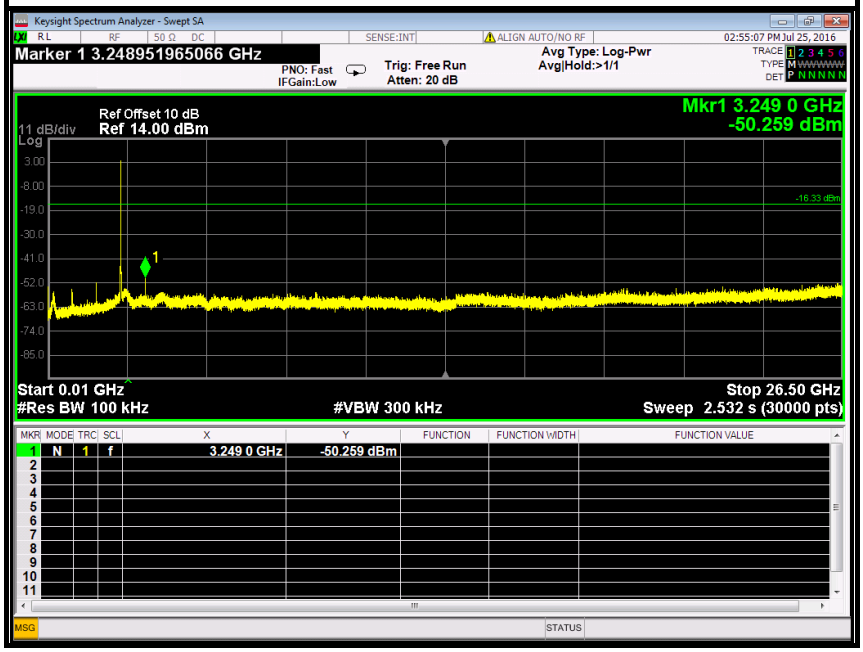

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

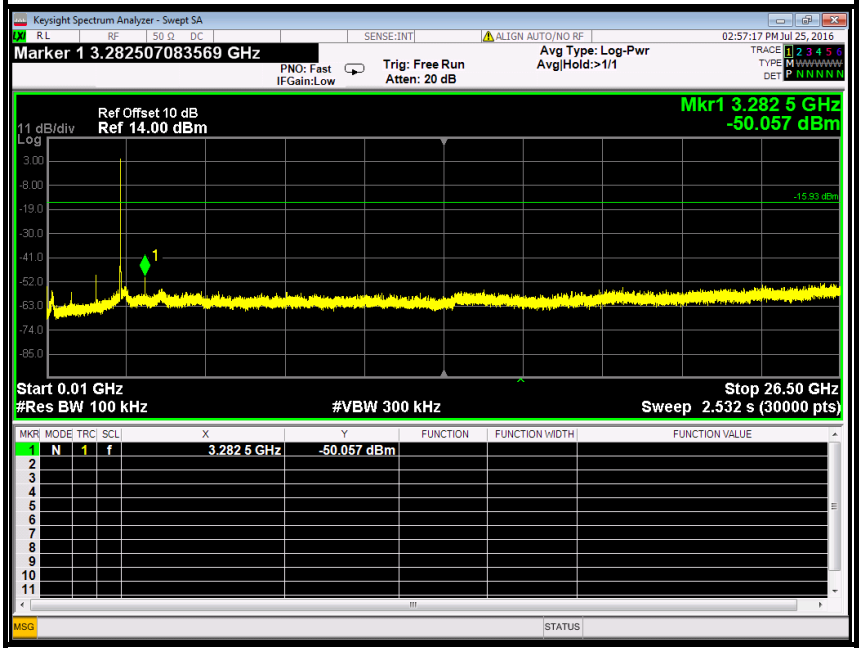

CH High (2.45GHz ~2.5GHz)

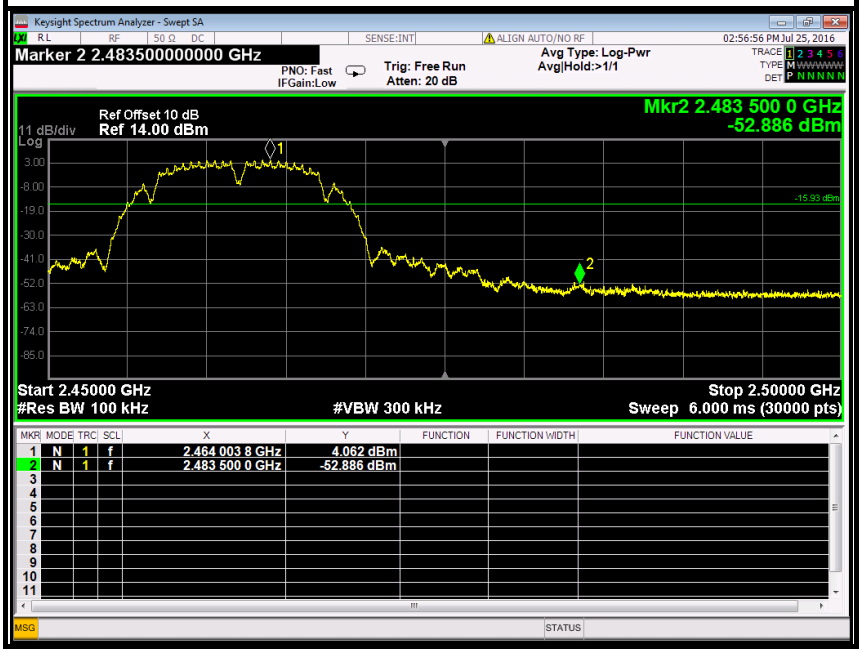

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11g mode (Antenna 0)

CH Low (10MHz ~26.5GHz)

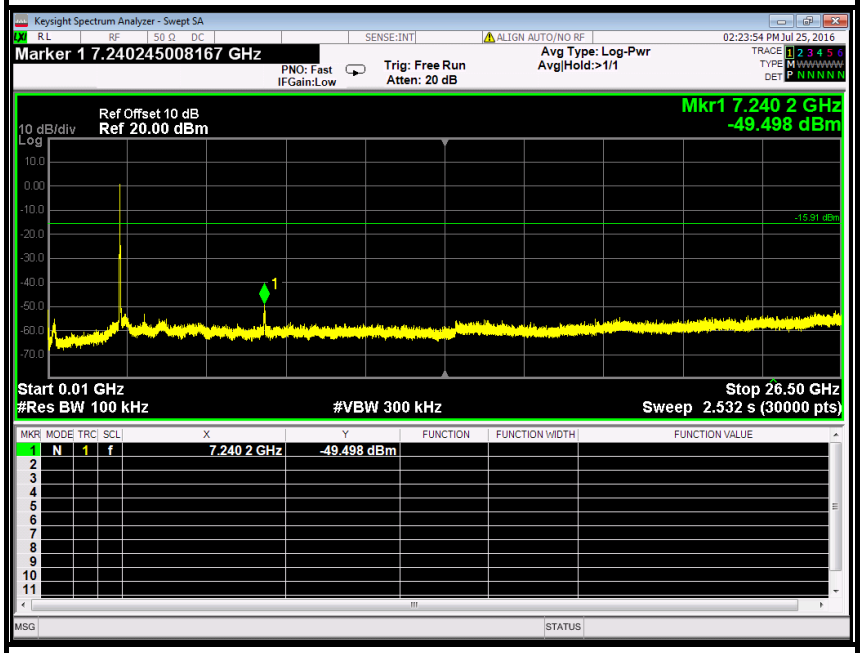

CH Low (2.31GHz ~2.43GHz)

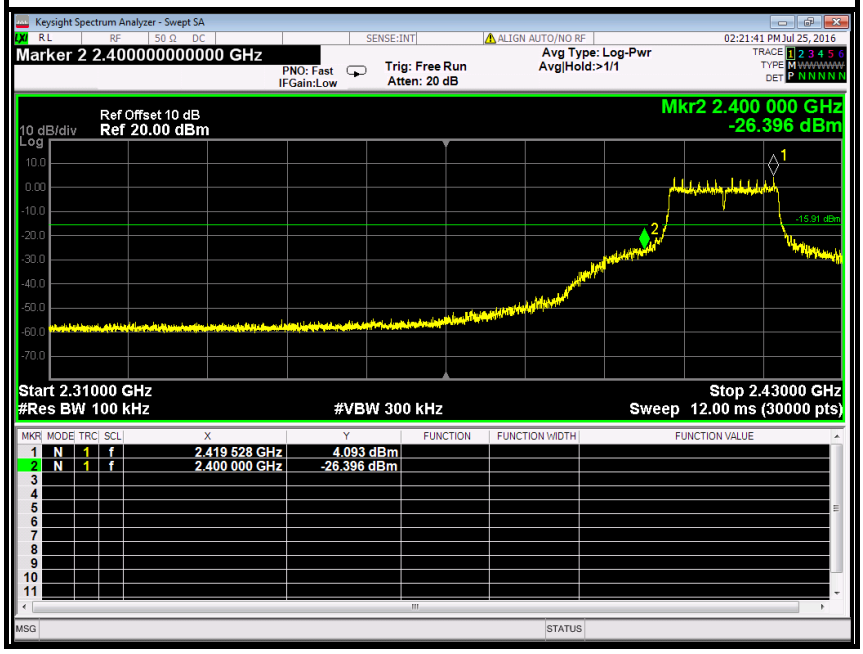

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

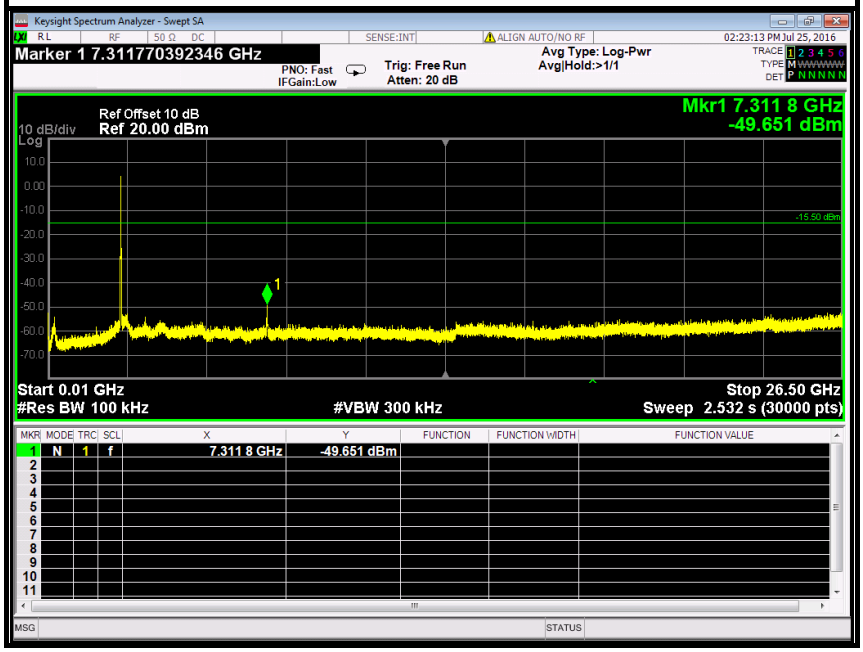

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

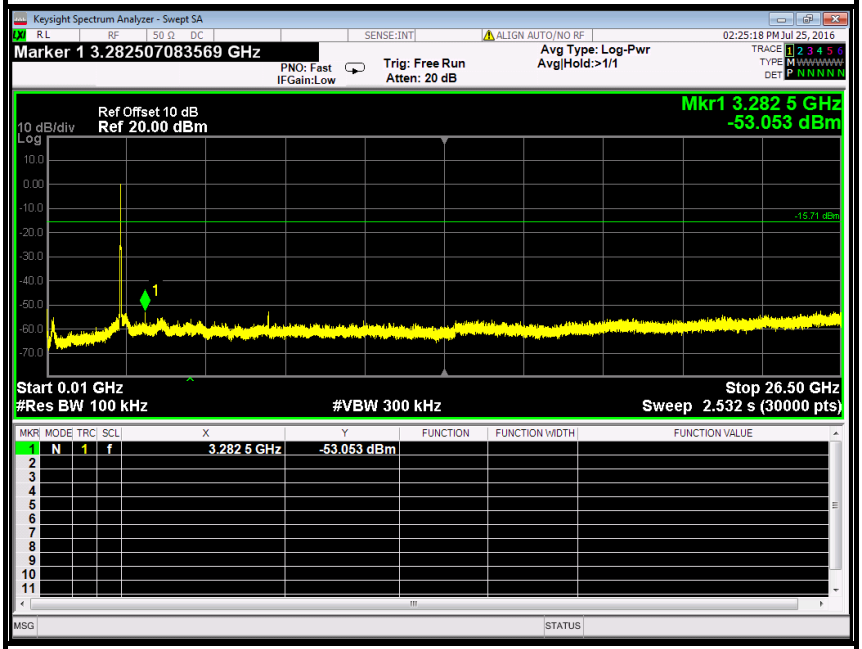

CH High (2.45GHz ~2.5GHz)

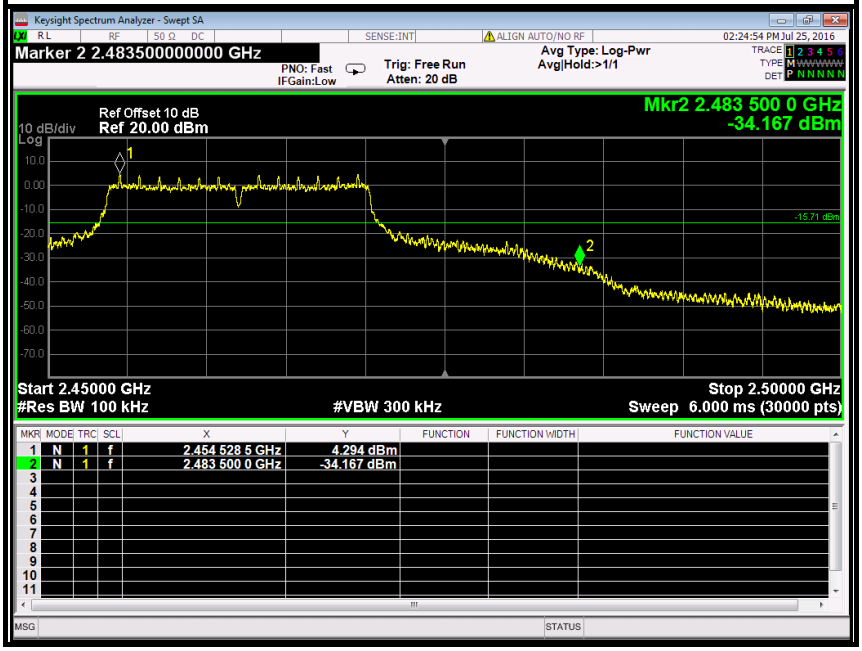

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11g mode (Antenna 1)

CH Low (10MHz ~26.5GHz)

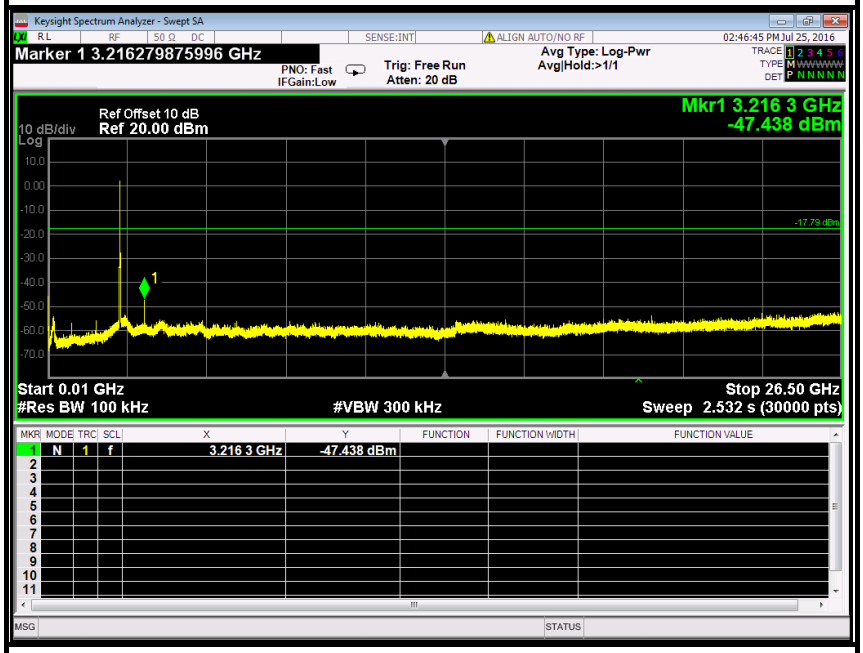

CH Low (2.31GHz ~2.43GHz)

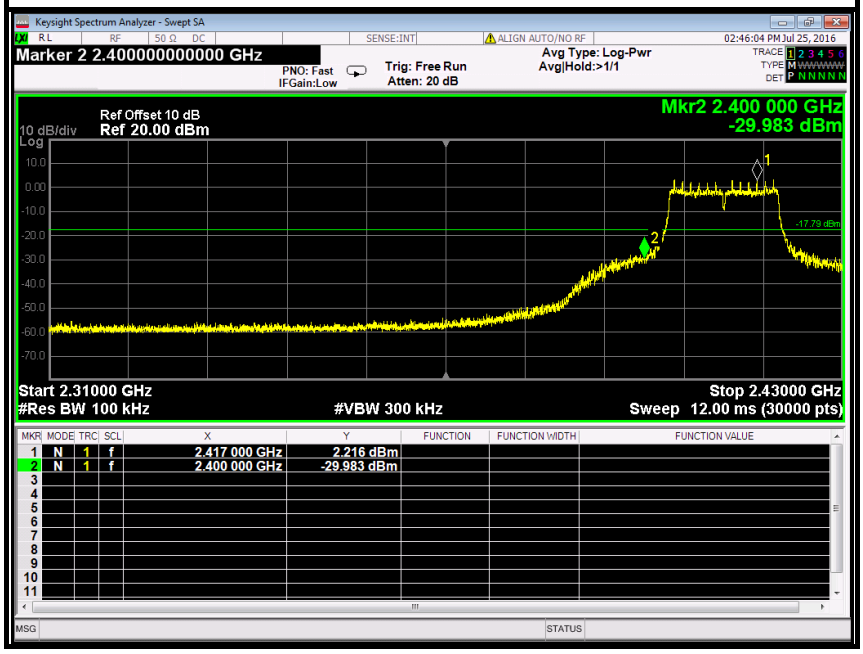

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

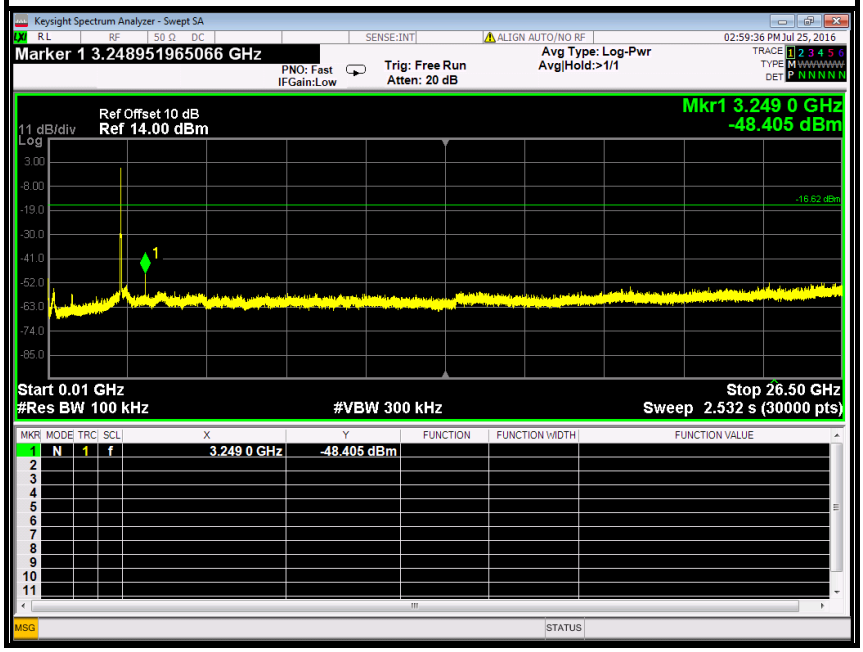

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

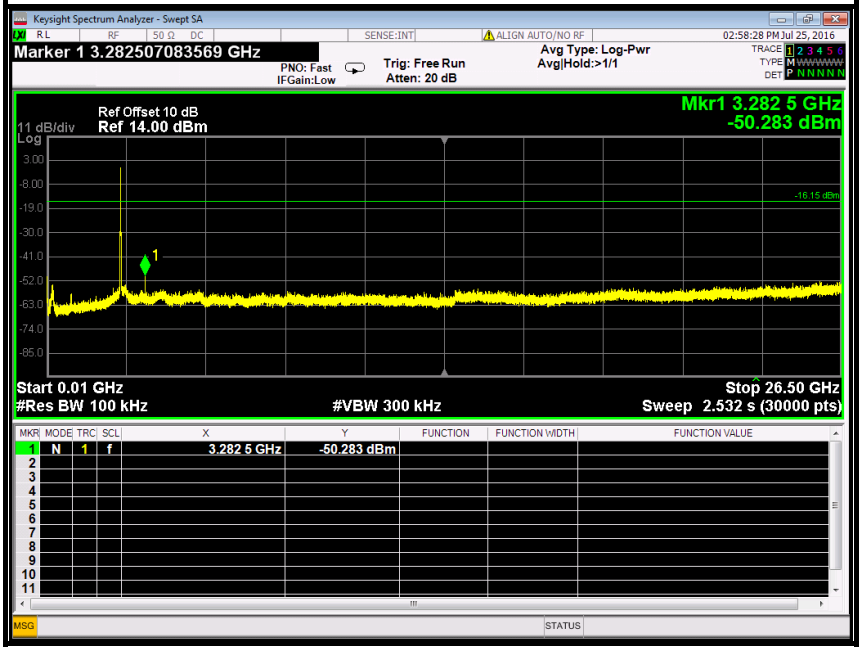

CH High (2.45GHz ~2.5GHz)

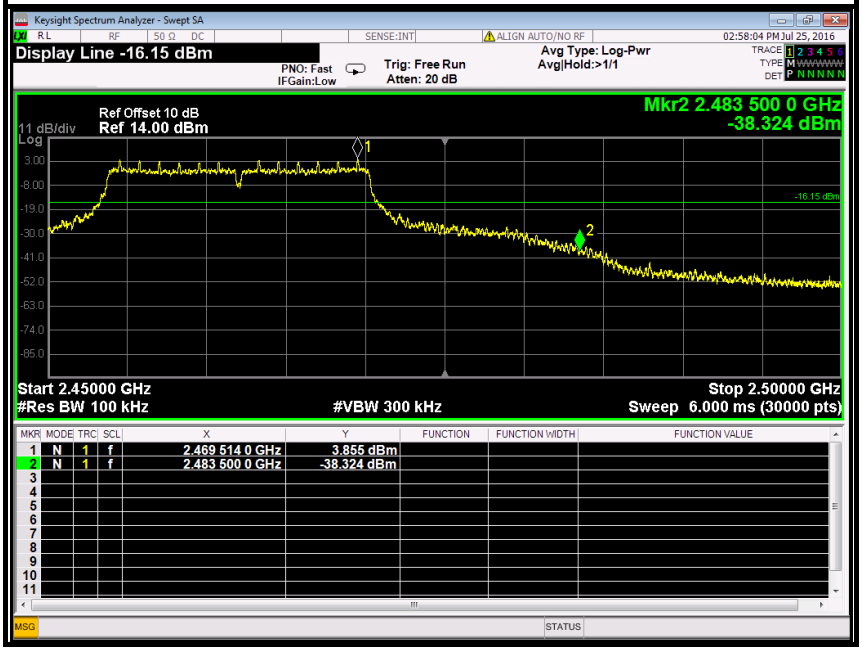

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT20 MHz mode (Antenna 0)

CH Low (10MHz ~26.5GHz)

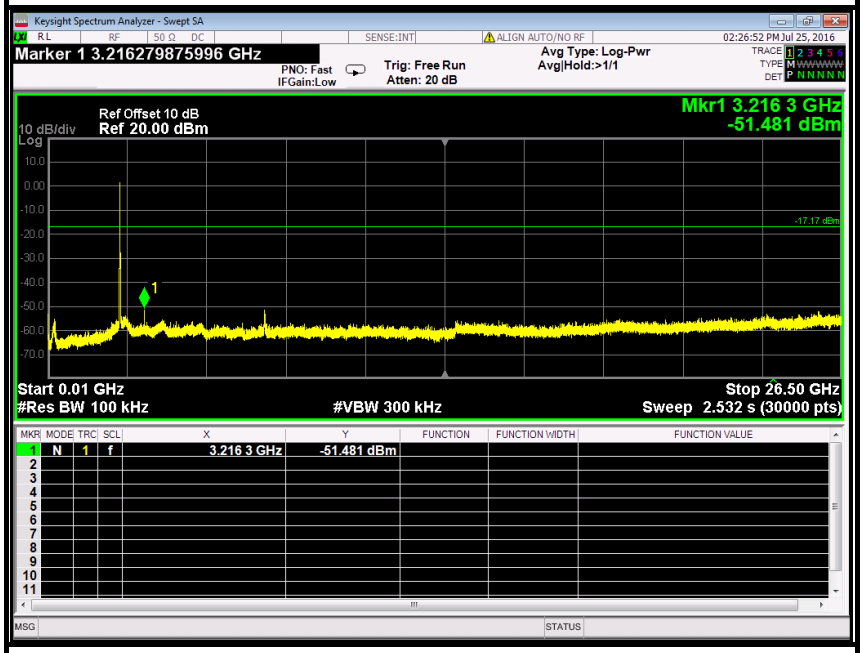

CH Low (2.31GHz ~2.43GHz)

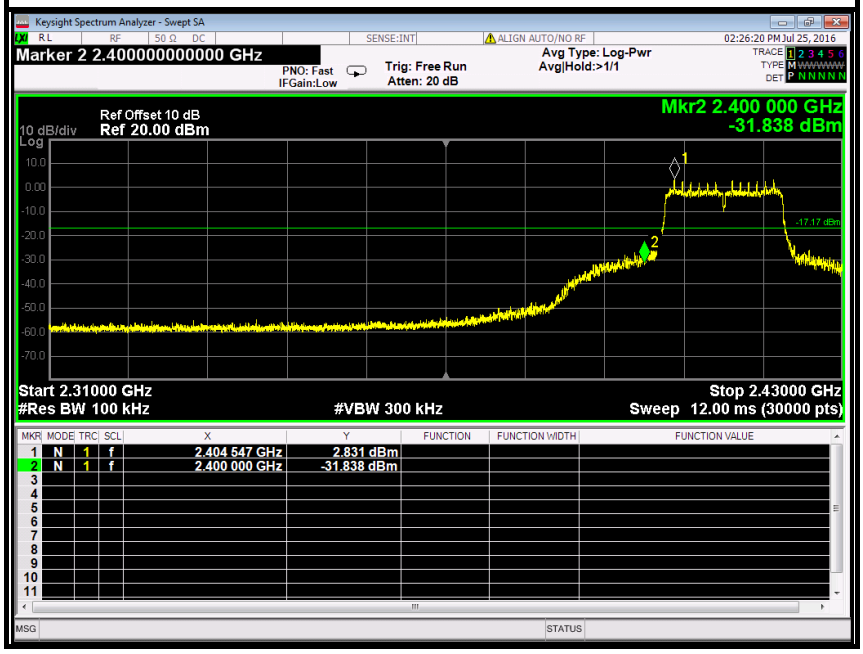

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

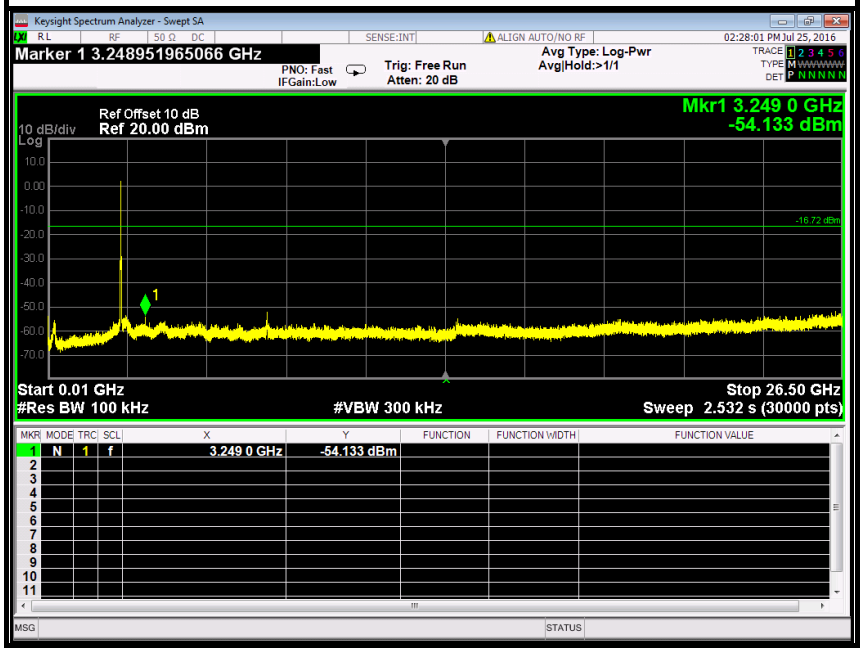

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

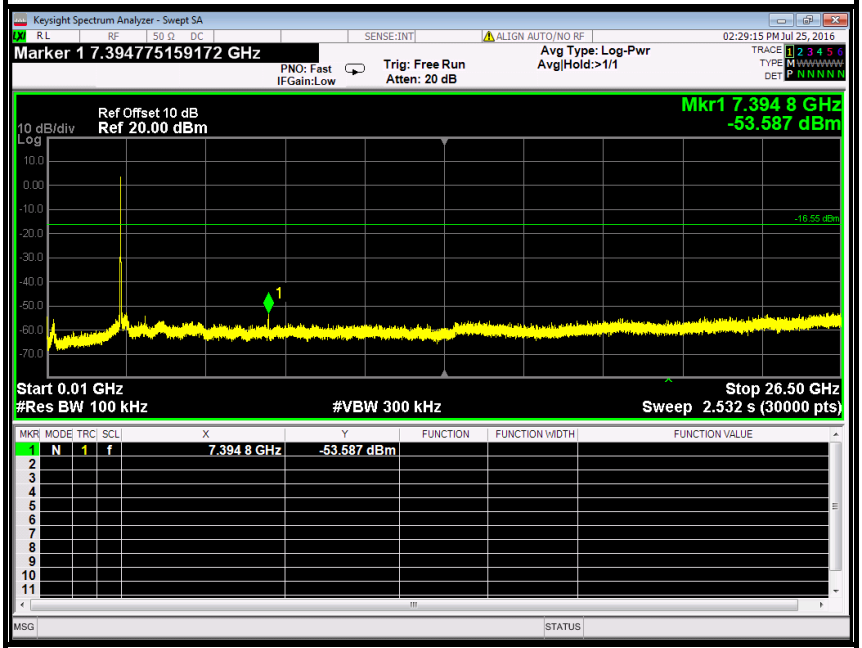

CH High (2.45GHz ~2.5GHz)

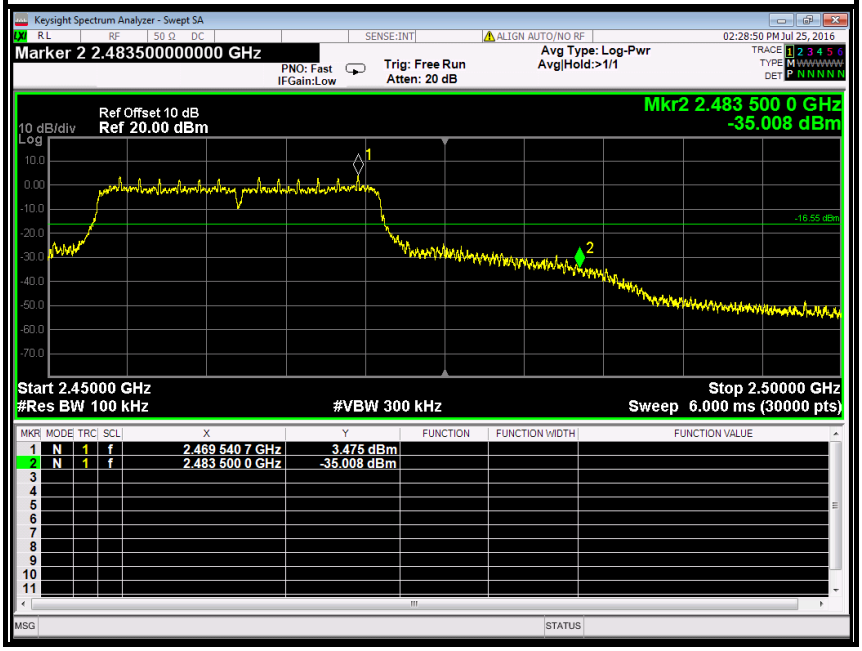

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT20 MHz mode (Antenna 1)

CH Low (10MHz ~26.5GHz)

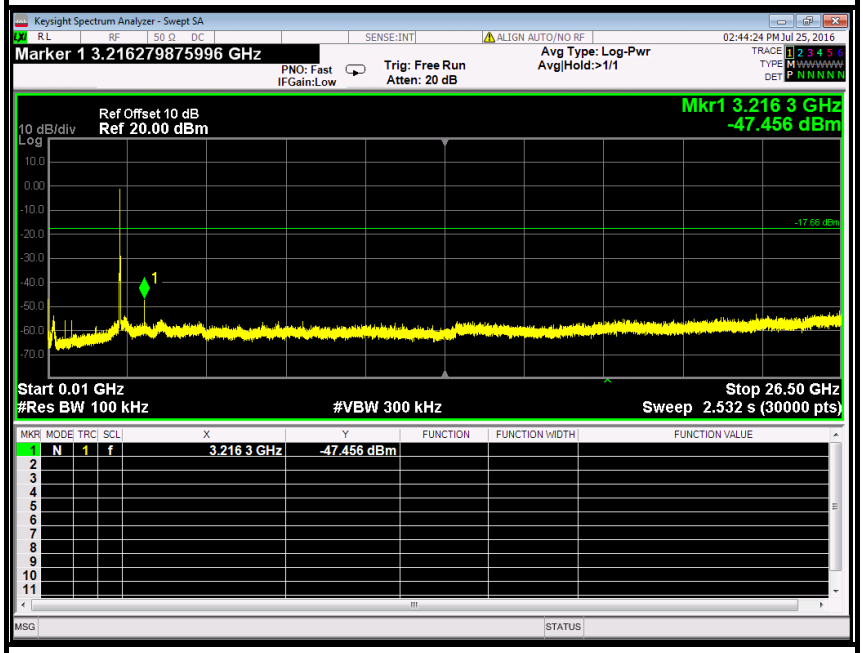

CH Low (2.31GHz ~2.43GHz)

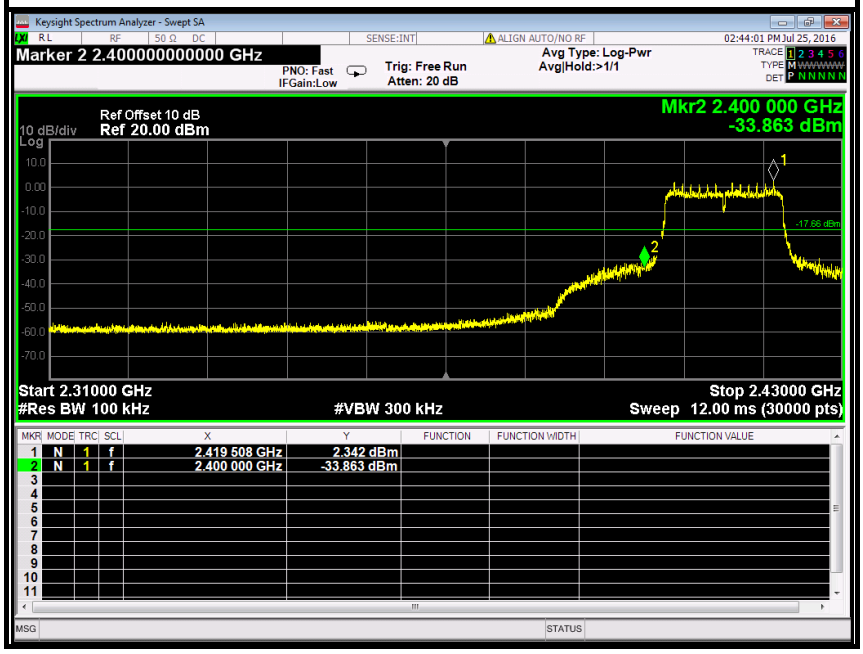

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

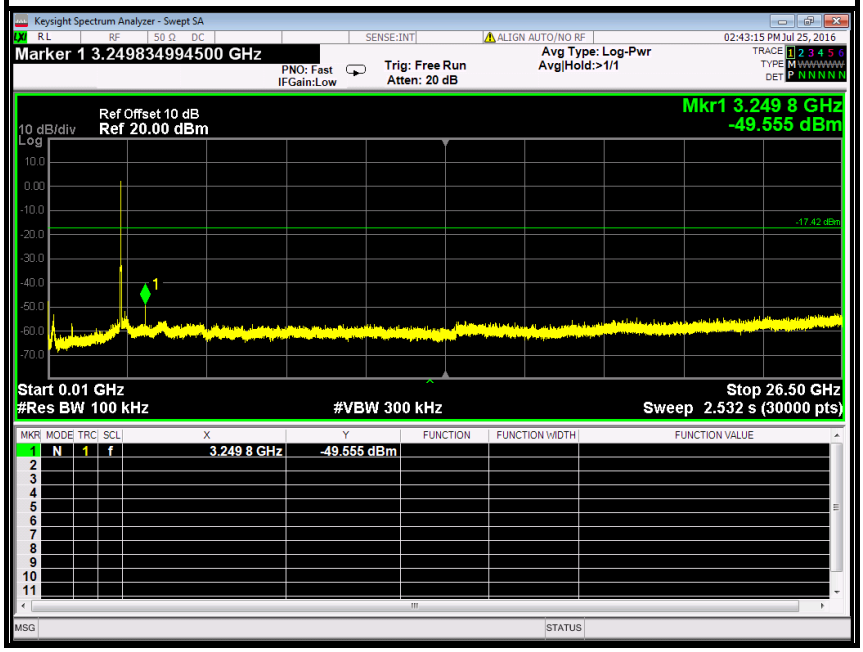

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

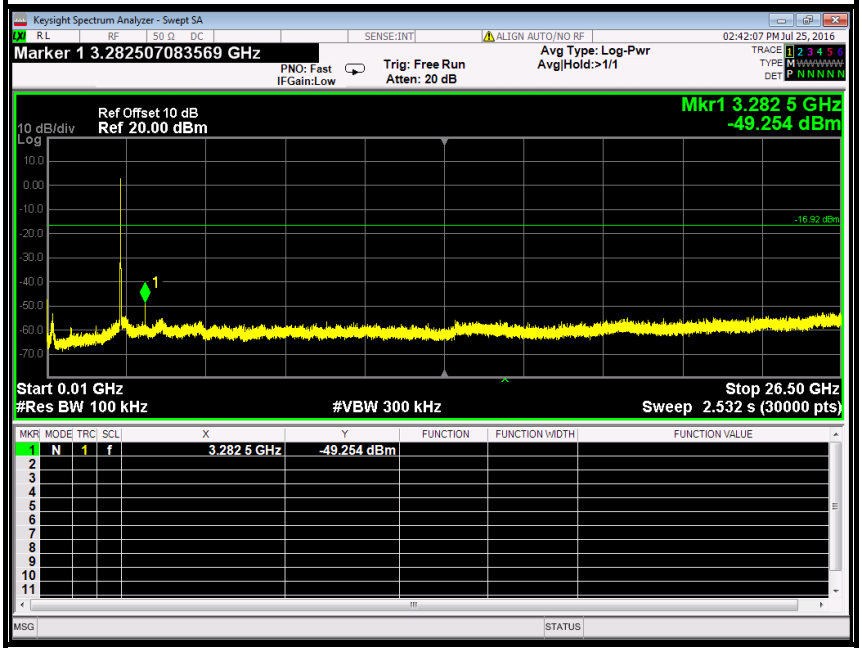

CH High (2.45GHz ~2.5GHz)

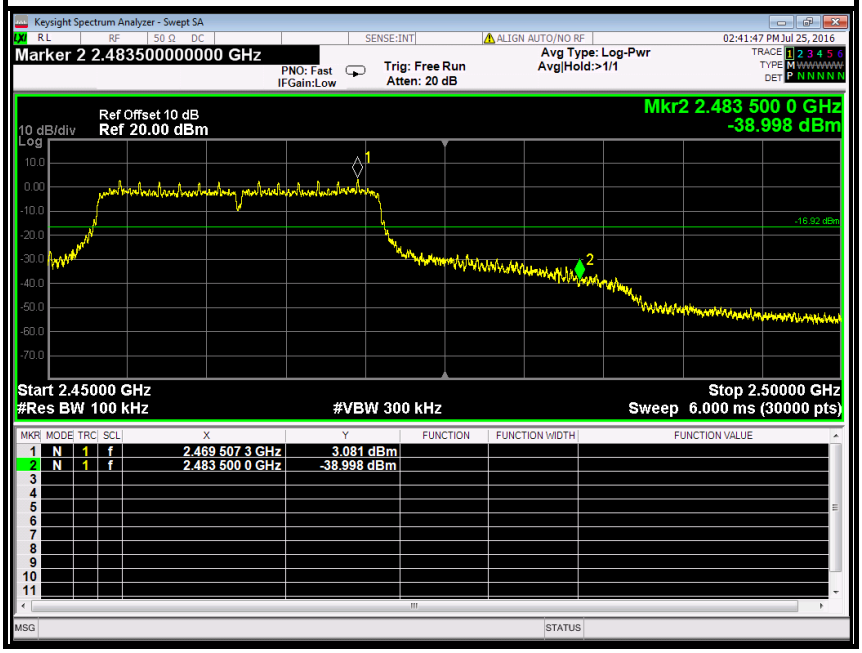

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT40 MHz mode (Antenna 0)

CH Low (10MHz ~26.5GHz)

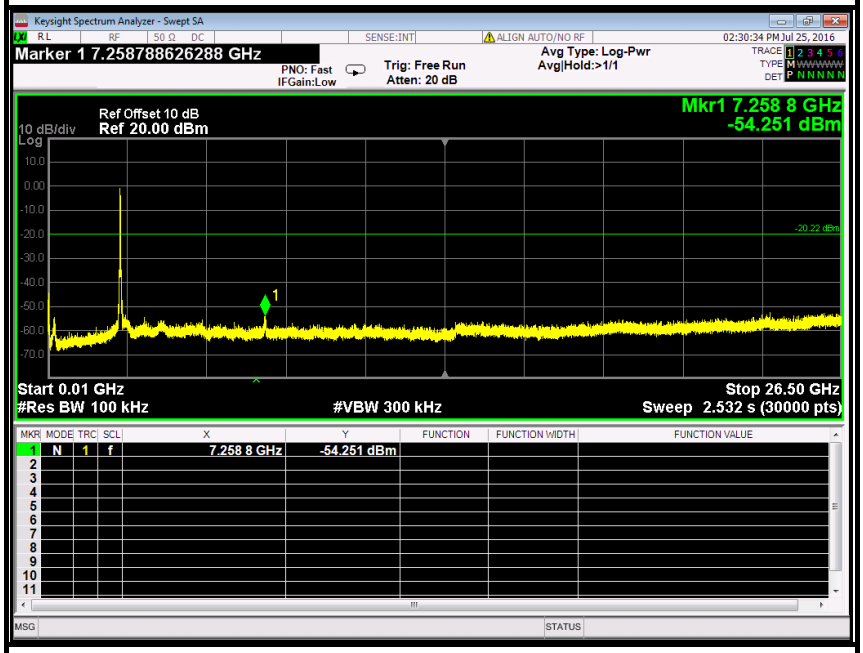

CH Low (2.31GHz ~2.45GHz)

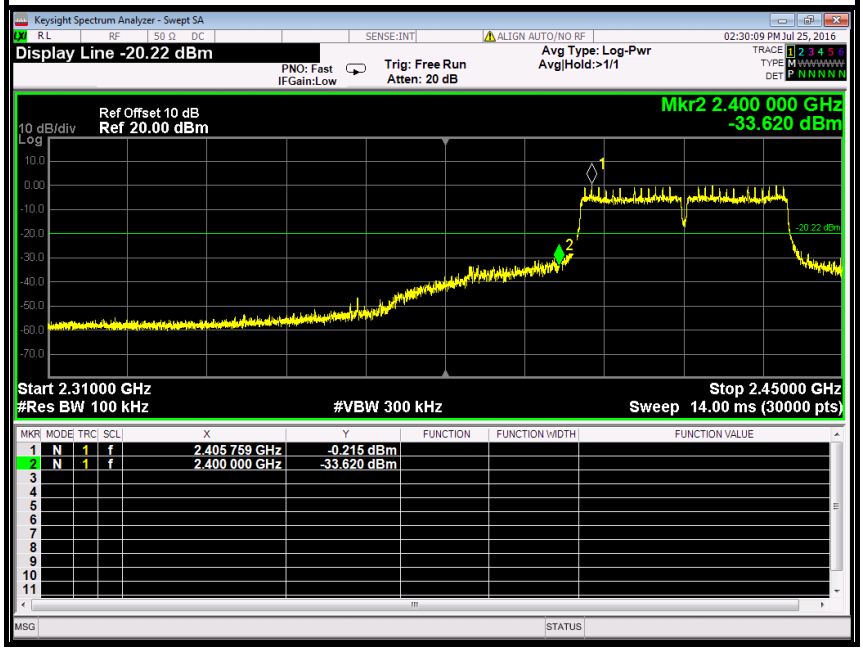

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

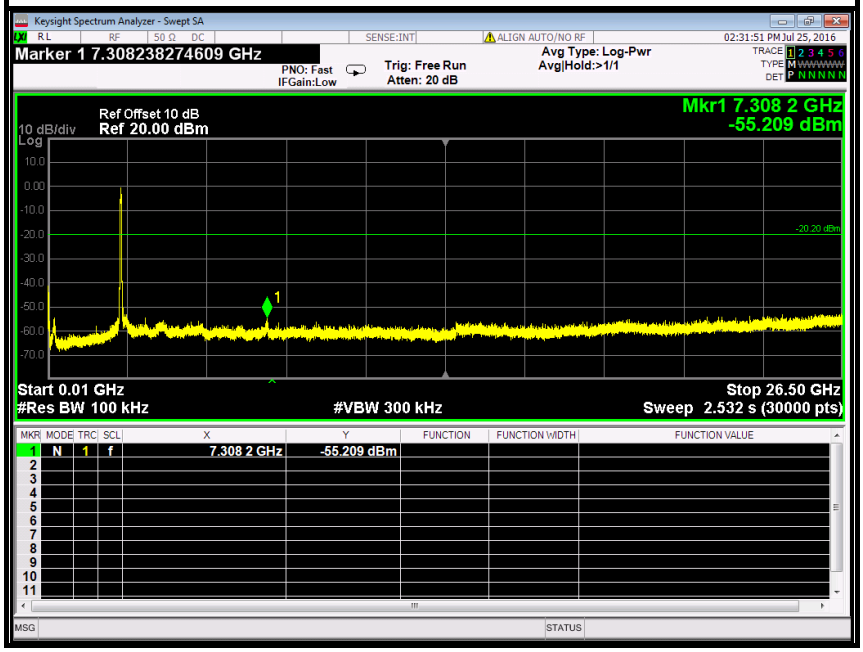

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

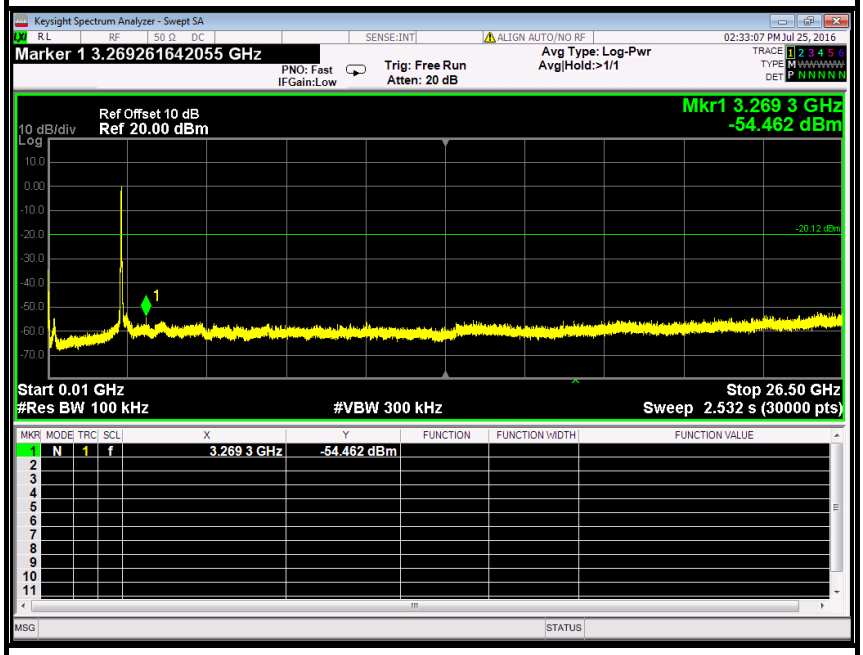

CH High (2.43GHz ~2.5GHz)

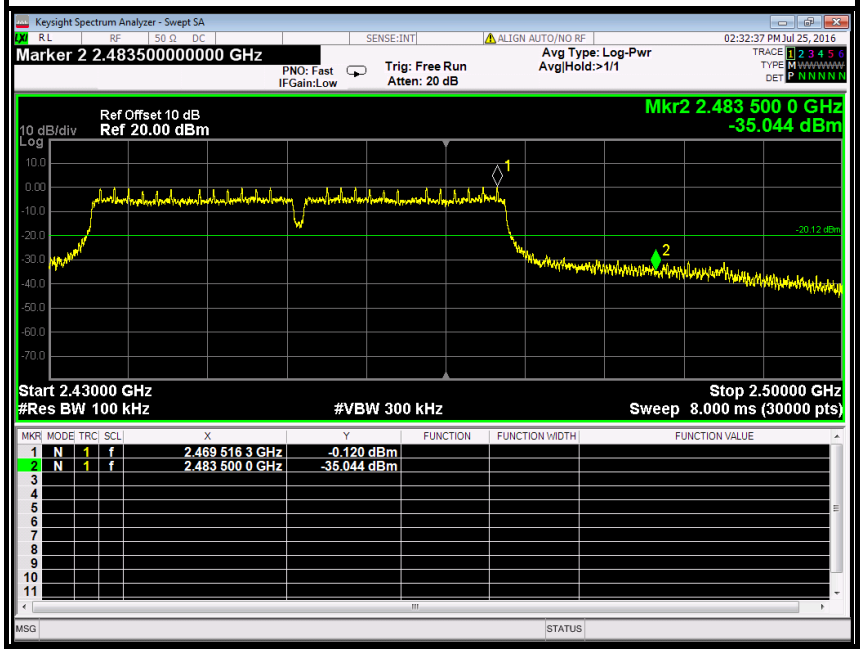

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT40 MHz mode (Antenna 1)

CH Low (10MHz ~26.5GHz)

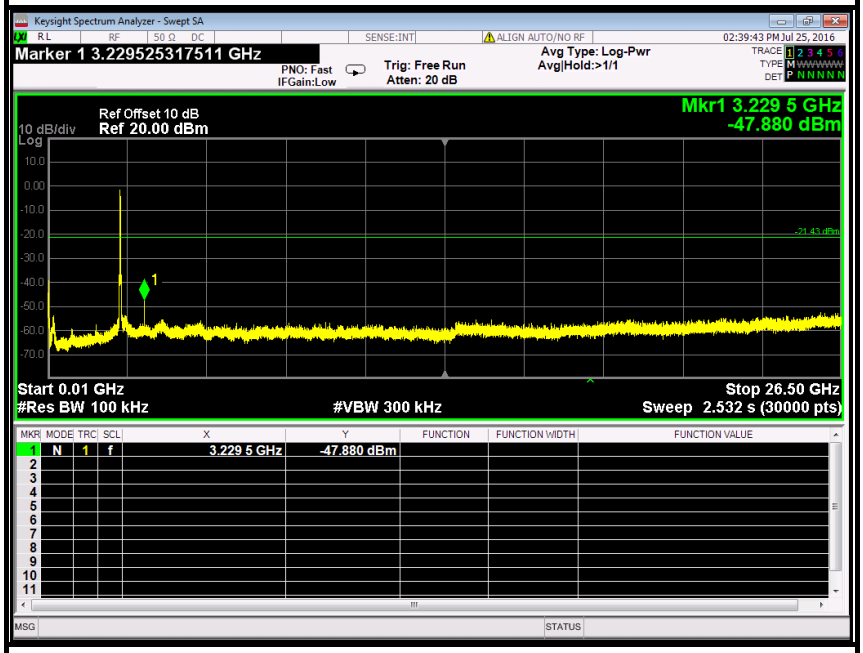

CH Low (2.31GHz ~2.45GHz)

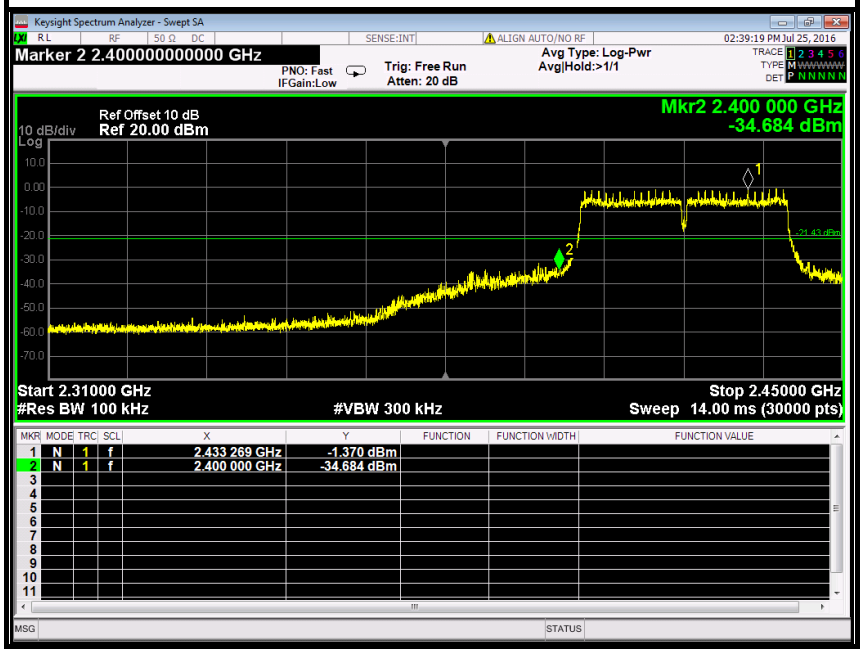

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH Mid (10MHz ~26.5GHz)

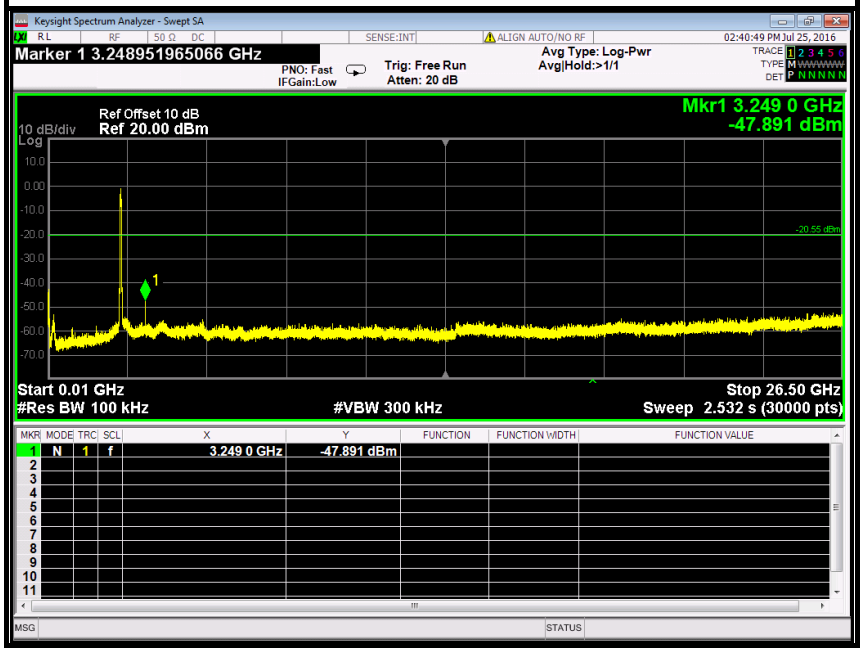

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CH High (10MHz ~26.5GHz)

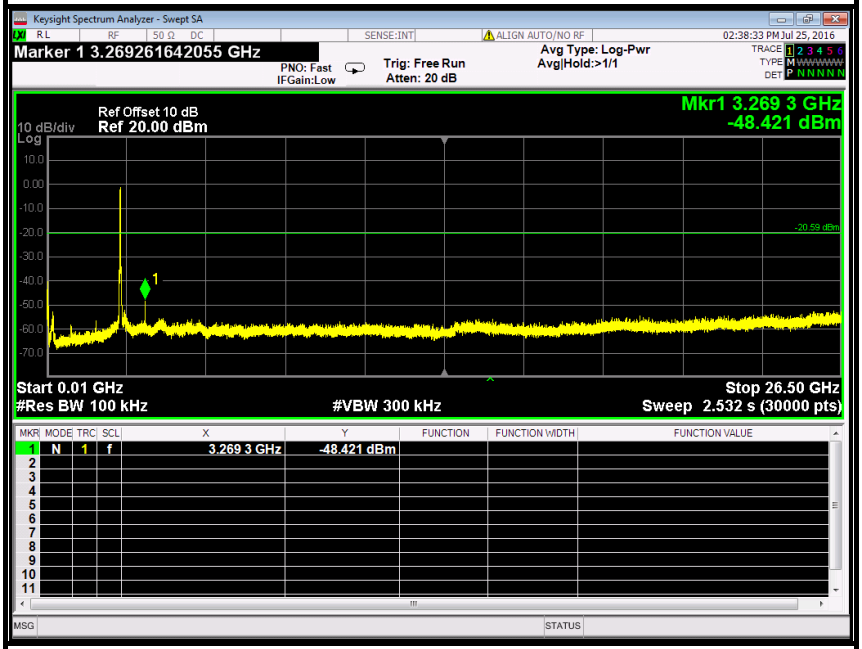

CH High (2.43GHz ~2.5GHz)

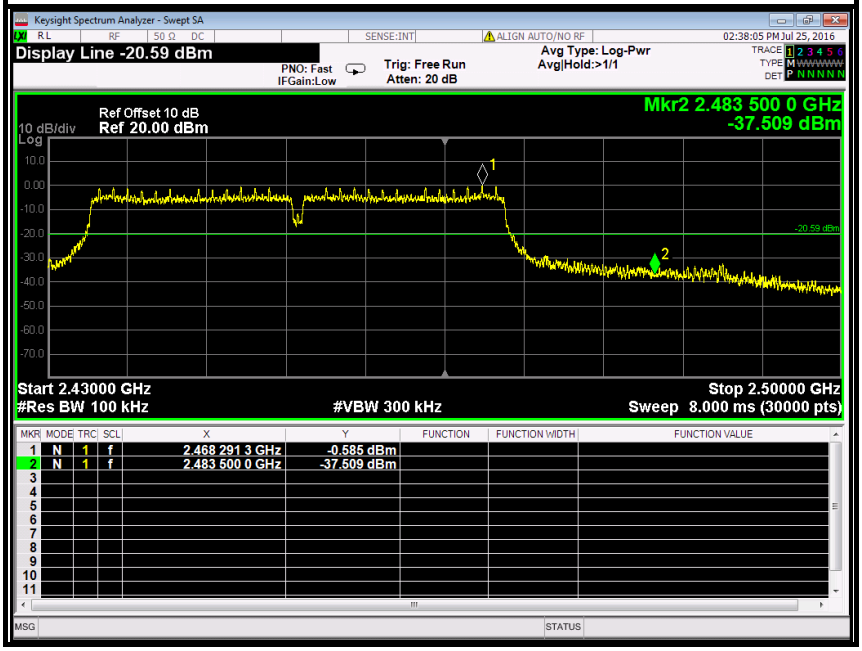

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2.2. TEST INSTRUMENTS

Radiated Emission Test Site 966（2）					
Name of Equipment	**Manufacturer**	**Model Number**	**Serial Number**	**Last Calibration**	**Due Calibration**
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

   Below 1GHz:

   RBW=100kHz / VBW=300kHz / Sweep=AUTO

   Above 1GHz:

   (a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO

   (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=PEAK
7. Repeat above procedures until the measurements for all frequencies are complete.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2.4. TEST SETUP

Below 30MHz

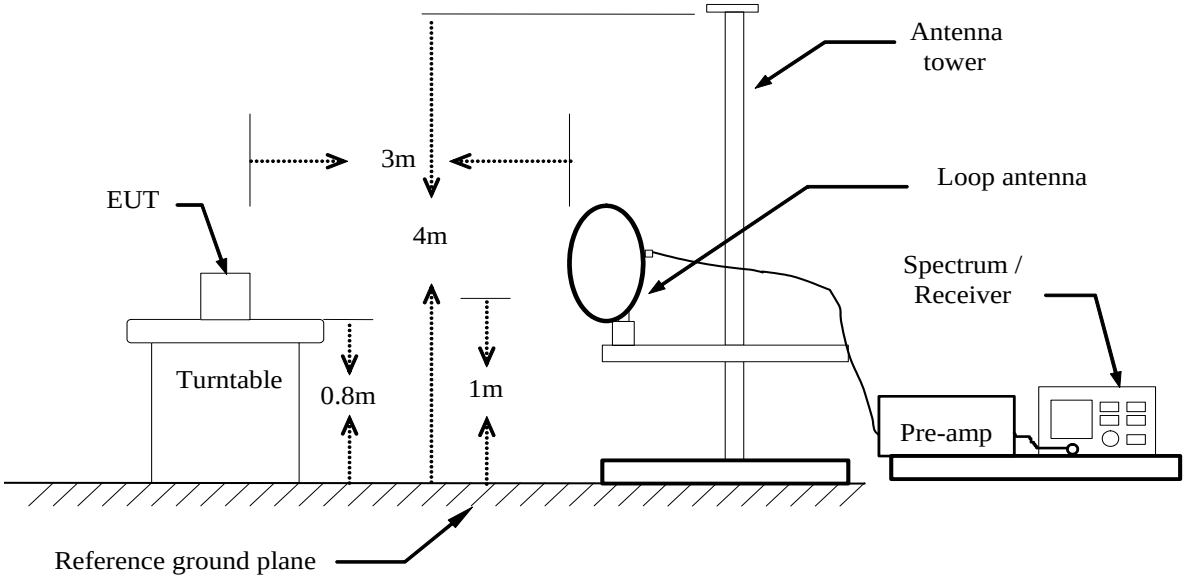

Below 1 GHz

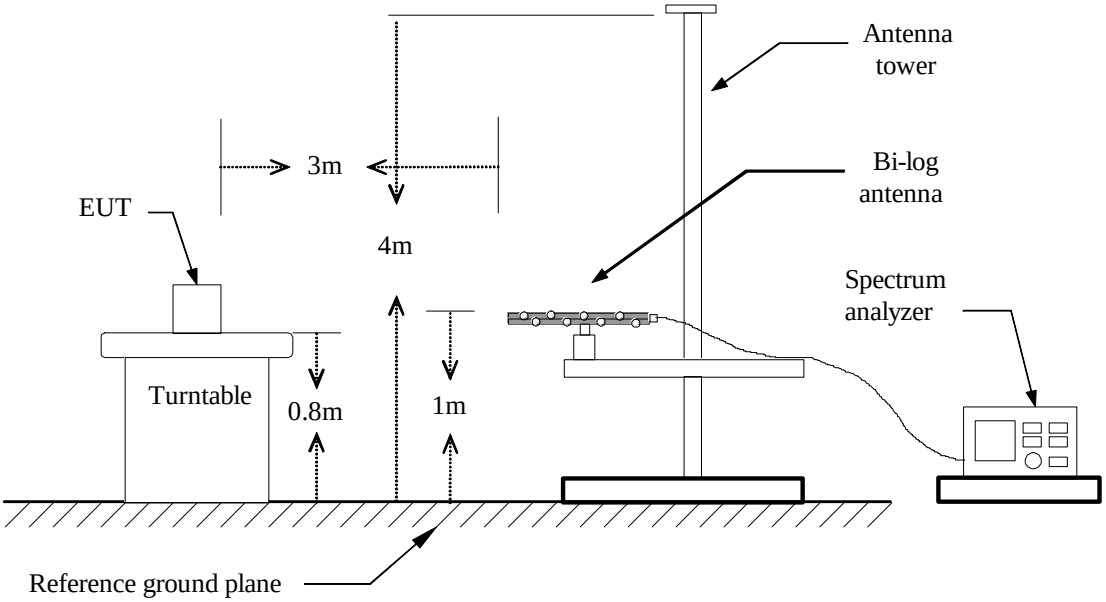

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Above 1 GHz

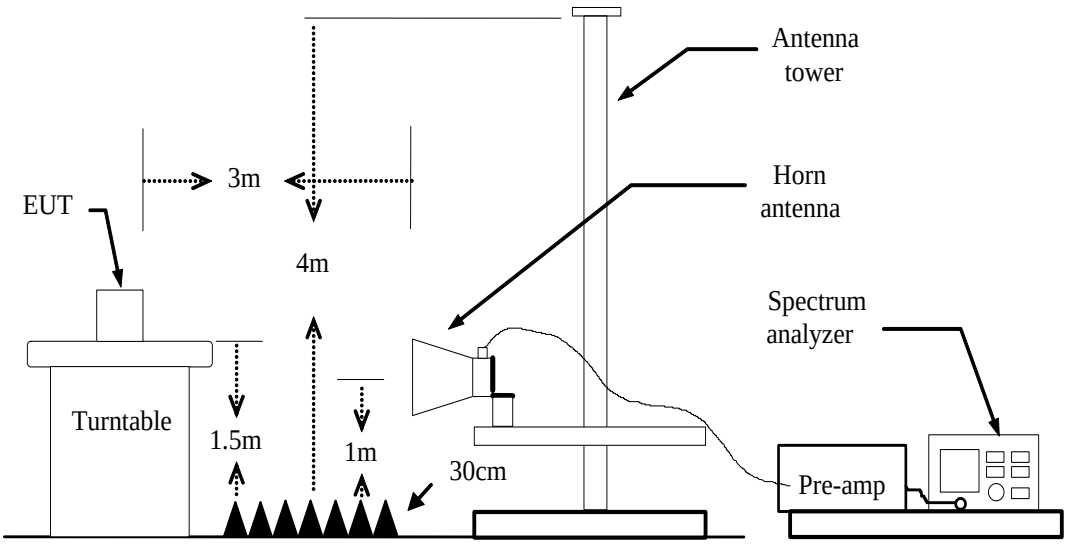

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2.5. DATA SAPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Uncorrected Analyzer / Receiver reading
Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
Peak = Peak Reading
AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
Result (dBuV/m) = Reading (dBuV) + Correction Factor

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.2.6. TEST RESULTS

Below 1 GHz

Test Mode: TX **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 3, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
126.0300	53.36	-20.90	32.46	43.50	-11.04	V	QP
210.4200	55.29	-21.46	33.83	43.50	-9.67	V	QP
263.7700	57.60	-20.13	37.47	46.00	-8.53	V	QP
384.0500	48.60	-16.45	32.15	46.00	-13.85	V	QP
480.0800	45.30	-14.36	30.94	46.00	-15.06	V	QP
755.5600	41.83	-11.10	30.73	46.00	-15.27	V	QP
104.6900	55.35	-22.81	32.54	43.50	-10.96	H	QP
210.4200	53.17	-21.46	31.71	43.50	-11.79	H	QP
335.5500	48.02	-18.26	29.76	46.00	-16.24	H	QP
527.6100	45.69	-13.95	31.74	46.00	-14.26	H	QP
600.3600	44.55	-12.86	31.69	46.00	-14.31	H	QP
888.4500	43.45	-9.91	33.54	46.00	-12.46	H	QP

*****Remark:*** *No emission found between lowest internal used/generated frequency to 30MHz.*

Notes:

1. *Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.*
2. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
3. *The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.*
4. *Frequency (MHz). = Emission frequency in MHz*
   Reading (dBμV/m) = Receiver reading
   Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
   Limit (dBμV/m) = Limit stated in standard
   Margin (dB) = Measured (dBμV/m) – Limits (dBμV/m)
   Antenna Pol e(H/V) = Current carrying line of reading

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Vertical

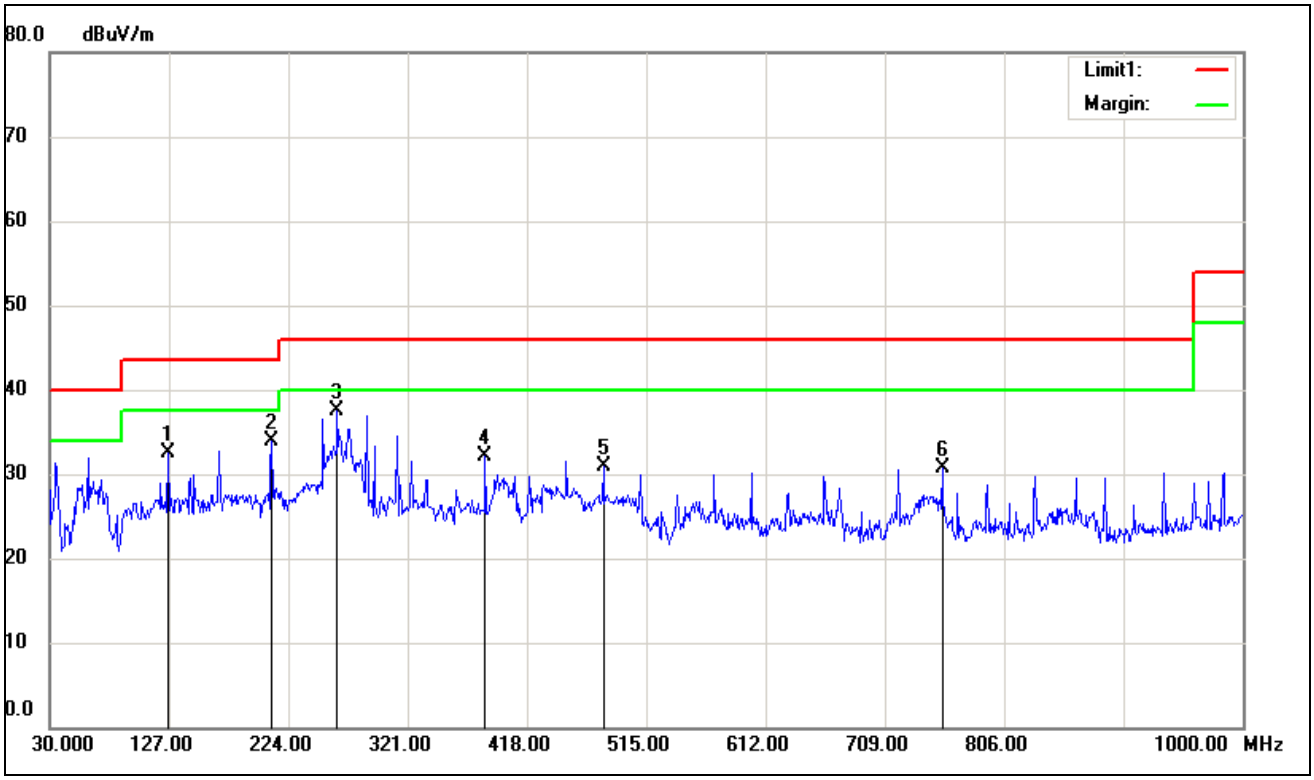

Horizontal

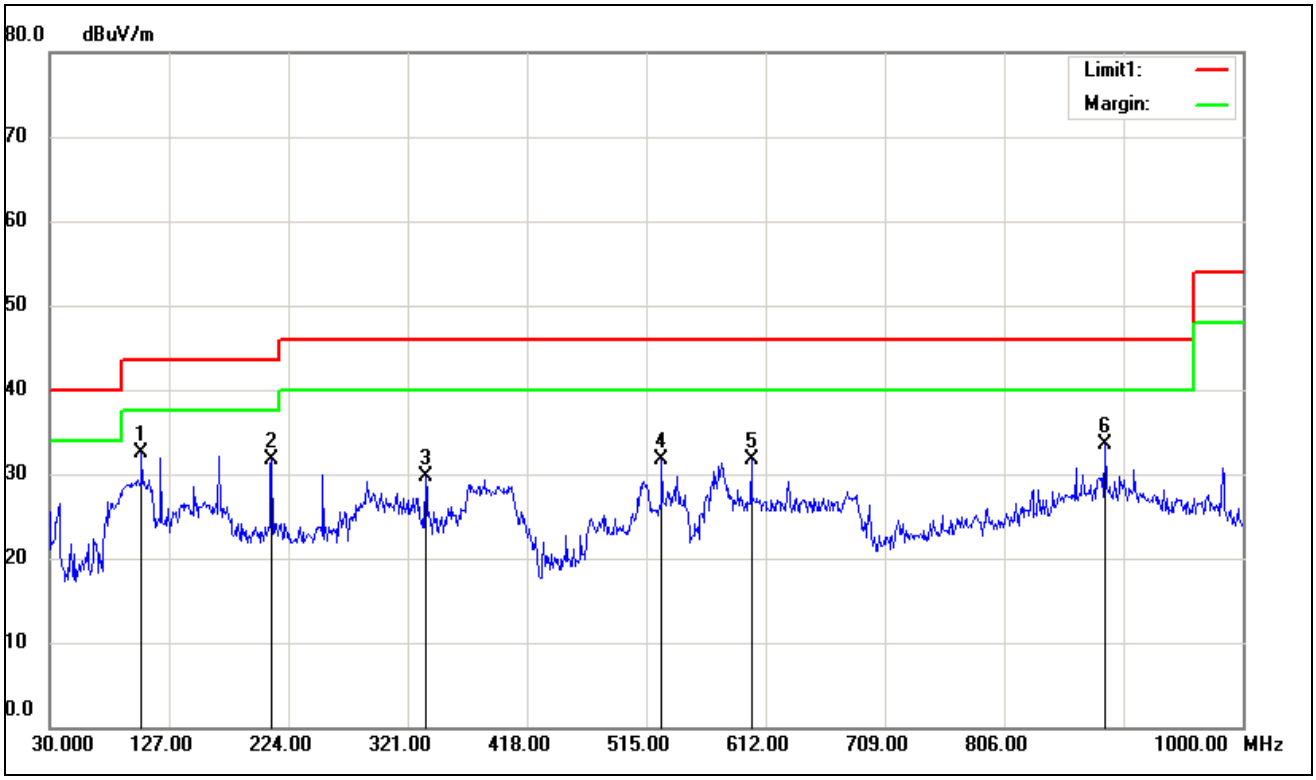

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Above 1 GHz

Antenna 0

Test Mode: TX / IEEE 802.11b(CH Low) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3853.0000	42.58	0.97	43.55	74.00	-30.45	V	peak
4402.0000	40.90	3.01	43.91	74.00	-30.09	V	peak
5230.0000	40.30	5.39	45.69	74.00	-28.31	V	peak
5806.0000	41.08	6.00	47.08	74.00	-26.92	V	peak
6976.0000	41.09	7.66	48.75	74.00	-25.25	V	peak
7687.0000	39.96	9.04	49.00	74.00	-25.00	V	peak
3286.0000	43.35	-0.88	42.47	74.00	-31.53	H	Peak
3934.0000	42.16	1.31	43.47	74.00	-30.53	H	Peak
4897.0000	42.50	4.64	47.14	74.00	-26.86	H	peak
6013.0000	40.55	6.10	46.65	74.00	-27.35	H	peak
6967.0000	40.77	7.65	48.42	74.00	-25.58	H	peak
8497.0000	40.61	9.38	49.99	74.00	-24.01	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11b (CH Mid) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
4492.0000	40.82	3.32	44.14	74.00	-29.86	V	Peak
5014.0000	41.10	5.00	46.10	74.00	-27.90	V	Peak
5761.0000	40.23	5.98	46.21	74.00	-27.79	V	Peak
6526.0000	39.34	6.93	46.27	74.00	-27.73	V	Peak
7210.0000	39.61	8.11	47.72	74.00	-26.28	V	Peak
7723.0000	40.16	9.11	49.27	74.00	-24.73	V	Peak
2827.0000	44.04	-1.67	42.37	74.00	-31.63	H	Peak
3799.0000	41.51	0.74	42.25	74.00	-31.75	H	Peak
4708.0000	41.78	4.03	45.81	74.00	-28.19	H	Peak
6292.0000	40.13	6.55	46.68	74.00	-27.32	H	Peak
7201.0000	40.35	8.09	48.44	74.00	-25.56	H	Peak
7750.0000	40.26	9.16	49.42	74.00	-24.58	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11b (CH High) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
4267.0000	41.73	2.53	44.26	74.00	-29.74	V	Peak
4411.0000	41.62	3.04	44.66	74.00	-29.34	V	Peak
5347.0000	40.93	5.60	46.53	74.00	-27.47	V	Peak
6346.0000	40.73	6.64	47.37	74.00	-26.63	V	Peak
6922.0000	40.06	7.57	47.63	74.00	-26.37	V	Peak
7579.0000	40.42	8.83	49.25	74.00	-24.75	V	Peak
1747.0000	49.86	-6.38	43.48	74.00	-30.52	H	Peak
4402.0000	41.41	3.01	44.42	74.00	-29.58	H	Peak
5734.0000	40.76	5.97	46.73	74.00	-27.27	H	Peak
6148.0000	40.89	6.32	47.21	74.00	-26.79	H	Peak
6958.0000	41.07	7.63	48.70	74.00	-25.30	H	Peak
7588.0000	40.91	8.85	49.76	74.00	-24.24	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Antenna 1

Test Mode: TX / IEEE 802.11b(CH Low) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1783.0000	50.97	-6.31	44.66	74.00	-29.34	V	peak
3214.0000	44.07	-1.00	43.07	74.00	-30.93	V	peak
4051.0000	42.06	1.77	43.83	74.00	-30.17	V	peak
6121.0000	40.93	6.28	47.21	74.00	-26.79	V	peak
7534.0000	40.57	8.74	49.31	74.00	-24.69	V	peak
7741.0000	41.47	9.14	50.61	74.00	-23.39	V	peak
1747.0000	51.01	-6.38	44.63	74.00	-29.37	H	Peak
4402.0000	42.02	3.01	45.03	74.00	-28.97	H	Peak
4744.0000	41.62	4.15	45.77	74.00	-28.23	H	Peak
5473.0000	41.27	5.82	47.09	74.00	-26.91	H	peak
6445.0000	40.15	6.80	46.95	74.00	-27.05	H	peak
6949.0000	41.24	7.62	48.86	74.00	-25.14	H	peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11b (CH Mid) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1747.0000	56.05	-6.38	49.67	74.00	-24.33	V	Peak
3250.0000	43.88	-0.94	42.94	74.00	-31.06	V	Peak
4375.0000	41.49	2.91	44.40	74.00	-29.60	V	Peak
4915.0000	40.82	4.70	45.52	74.00	-28.48	V	Peak
5455.0000	40.76	5.79	46.55	74.00	-27.45	V	Peak
6949.0000	40.80	7.62	48.42	74.00	-25.58	V	Peak
1729.0000	48.86	-6.42	42.44	74.00	-31.56	H	Peak
4141.0000	42.54	2.09	44.63	74.00	-29.37	H	Peak
5581.0000	40.74	5.90	46.64	74.00	-27.36	H	Peak
6967.0000	40.74	7.65	48.39	74.00	-25.61	H	Peak
7966.0000	40.56	9.58	50.14	74.00	-23.86	H	Peak
8362.0000	41.19	9.45	50.64	74.00	-23.36	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11b (CH High) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3736.0000	43.15	0.48	43.63	74.00	-30.37	V	Peak
4555.0000	41.51	3.53	45.04	74.00	-28.96	V	Peak
5311.0000	41.19	5.53	46.72	74.00	-27.28	V	Peak
6922.0000	40.70	7.57	48.27	74.00	-25.73	V	Peak
7723.0000	40.73	9.11	49.84	74.00	-24.16	V	Peak
7993.0000	40.39	9.64	50.03	74.00	-23.97	V	Peak
1711.0000	55.60	-6.46	49.14	74.00	-24.86	H	Peak
3898.0000	43.31	1.16	44.47	74.00	-29.53	H	Peak
5338.0000	41.07	5.58	46.65	74.00	-27.35	H	Peak
6958.0000	40.41	7.63	48.04	74.00	-25.96	H	Peak
7678.0000	41.17	9.02	50.19	74.00	-23.81	H	Peak
8380.0000	40.71	9.44	50.15	74.00	-23.85	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Antenna 0

Test Mode: TX / IEEE 802.11g(CH Low) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
4420.0000	41.97	3.07	45.04	74.00	-28.96	V	peak
5005.0000	41.26	4.99	46.25	74.00	-27.75	V	peak
5590.0000	42.03	5.91	47.94	74.00	-26.06	V	peak
6994.0000	40.67	7.69	48.36	74.00	-25.64	V	peak
7687.0000	41.08	9.04	50.12	74.00	-23.88	V	peak
8236.0000	40.60	9.52	50.12	74.00	-23.88	V	peak
3844.0000	42.57	0.93	43.50	74.00	-30.50	H	Peak
4546.0000	41.71	3.50	45.21	74.00	-28.79	H	Peak
5356.0000	40.98	5.61	46.59	74.00	-27.41	H	Peak
6778.0000	40.79	7.34	48.13	74.00	-25.87	H	peak
7444.0000	40.25	8.57	48.82	74.00	-25.18	H	peak
8254.0000	41.11	9.51	50.62	74.00	-23.38	H	peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11g (CH Mid) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3250.0000	44.96	-0.94	44.02	74.00	-29.98	V	Peak
4843.0000	40.99	4.47	45.46	74.00	-28.54	V	Peak
5482.0000	40.99	5.84	46.83	74.00	-27.17	V	Peak
6310.0000	40.76	6.58	47.34	74.00	-26.66	V	Peak
7651.0000	40.59	8.97	49.56	74.00	-24.44	V	Peak
8362.0000	41.19	9.45	50.64	74.00	-23.36	V	Peak
2800.0000	45.25	-1.72	43.53	74.00	-30.47	H	Peak
4771.0000	40.68	4.23	44.91	74.00	-29.09	H	Peak
5149.0000	41.58	5.25	46.83	74.00	-27.17	H	Peak
6445.0000	40.66	6.80	47.46	74.00	-26.54	H	Peak
7048.0000	40.46	7.79	48.25	74.00	-25.75	H	Peak
7696.0000	39.98	9.06	49.04	74.00	-24.96	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11g (CH High) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1783.0000	53.15	-6.31	46.84	74.00	-27.16	V	Peak
3286.0000	44.72	-0.88	43.84	74.00	-30.16	V	Peak
4276.0000	42.13	2.56	44.69	74.00	-29.31	V	Peak
5032.0000	41.22	5.04	46.26	74.00	-27.74	V	Peak
6364.0000	41.25	6.67	47.92	74.00	-26.08	V	Peak
7768.0000	40.89	9.20	50.09	74.00	-23.91	V	Peak
1747.0000	48.90	-6.38	42.52	74.00	-31.48	H	Peak
4825.0000	40.77	4.41	45.18	74.00	-28.82	H	Peak
5473.0000	40.84	5.82	46.66	74.00	-27.34	H	Peak
6877.0000	40.93	7.50	48.43	74.00	-25.57	H	Peak
7759.0000	40.47	9.18	49.65	74.00	-24.35	H	Peak
8371.0000	40.72	9.45	50.17	74.00	-23.83	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Antenna 1

Test Mode: TX / IEEE 802.11g(CH Low) **Tested by:** Jack Chen

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** July 5, 2016

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.0000	53.30	-6.35	46.95	74.00	-27.05	V	Peak
3907.0000	43.42	1.20	44.62	74.00	-29.38	V	Peak
4402.0000	42.30	3.01	45.31	74.00	-28.69	V	Peak
5509.0000	41.47	5.87	47.34	74.00	-26.66	V	Peak
6121.0000	41.08	6.28	47.36	74.00	-26.64	V	Peak
7624.0000	41.04	8.92	49.96	74.00	-24.04	V	Peak
1765.0000	51.38	-6.35	45.03	74.00	-28.97	H	Peak
4276.0000	42.49	2.56	45.05	74.00	-28.95	H	Peak
5023.0000	41.95	5.02	46.97	74.00	-27.03	H	Peak
6031.0000	41.72	6.13	47.85	74.00	-26.15	H	Peak
7480.0000	41.55	8.64	50.19	74.00	-23.81	H	Peak
7750.0000	41.52	9.16	50.68	74.00	-23.32	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.