


|               |                   |                |           |
|---------------|-------------------|----------------|-----------|
| Test_Mode     | GFSK Transmitting | Test_Frequency | 2480MHz   |
| Test_Engineer | \                 | Test_Date      | 2026/9/29 |


Test Graph

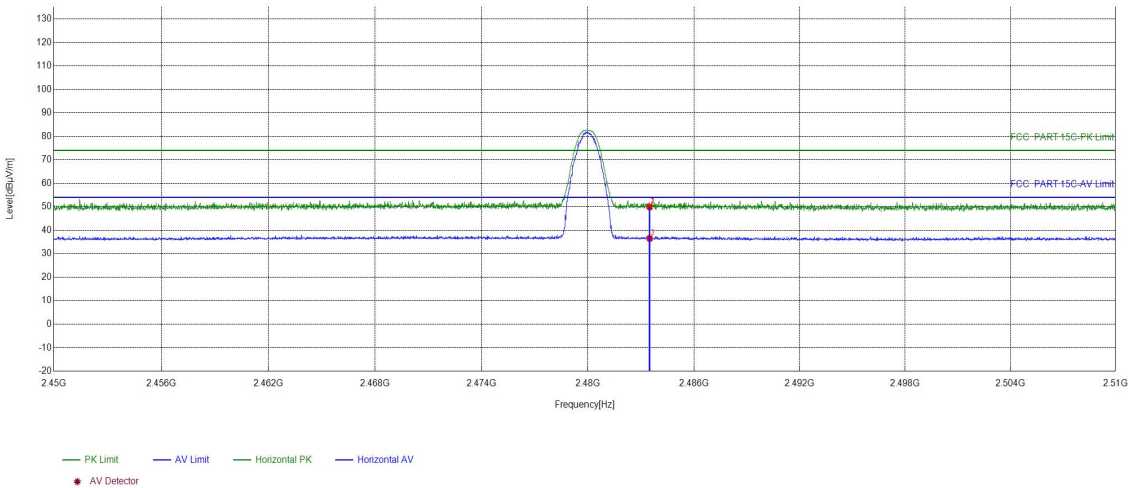

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2483.5      | 16.29       | 33.65          | 49.94          | 74.00          | 24.06       | PASS   | Horizontal | PK     |
| 2              | 2483.5      | 16.29       | 33.65          | 49.94          | 74.00          | 24.06       | PASS   | Horizontal | PK     |
| 3              | 2483.5      | 16.29       | 20.24          | 36.53          | 54.00          | 17.47       | PASS   | Horizontal | AV     |

|               |                   |                |           |
|---------------|-------------------|----------------|-----------|
| Test_Mode     | GFSK Transmitting | Test_Frequency | 2480MHz   |
| Test_Engineer | \                 | Test_Date      | 2026/9/29 |

Test Graph

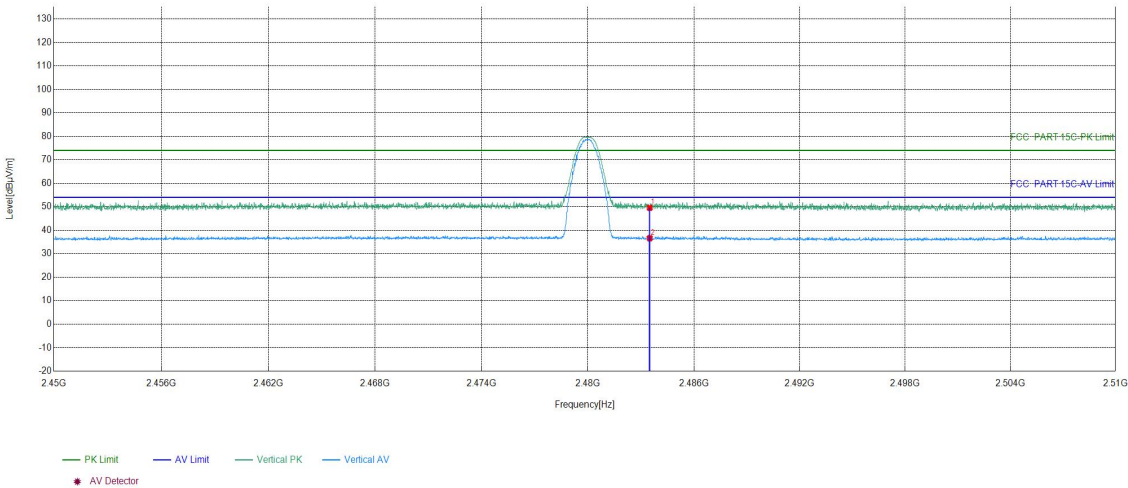

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 33.29          | 49.58          | 74.00          | 24.42       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 20.33          | 36.62          | 54.00          | 17.38       | PASS   | Vertical | AV     |

Note:  
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading - Correct Factor  
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## 5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S823118

**6 PHOTOGRAPHS**

Refer to Appendix Photographs of Report No. EED32S823118.

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*