

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS),
RSS-247 issue 1

FOR:

LikeAGlove Ltd.

LikeAGlove smart garment

Models: LIKE03, LIKE04

FCC ID:2AHX3LIKE03

IC:21478-LIKE03

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Auxiliary equipment	5
6.3	Operating frequencies	5
6.4	Test configuration	5
6.5	Changes made in the EUT	5
6.6	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Peak output power	12
7.3	Field strength of spurious emissions	18
7.4	Band edge radiated emissions	38
7.5	Peak spectral power density	42
7.6	Antenna requirements	47
8	APPENDIX A Test equipment and ancillaries used for tests	48
9	APPENDIX B Measurement uncertainties	49
10	APPENDIX C Test laboratory description	50
11	APPENDIX D Specification references	50
12	APPENDIX E Test equipment correction factors	51
13	APPENDIX F Abbreviations and acronyms	59
14	APPENDIX G Manufacturer's declaration	60

1 Applicant information

Client name: LikeAGlove Ltd.
Address: 17 Ha-Mefalsim street, Petah Tikva 4951447, Israel
Telephone: +1-855-938-3837
E-mail: info@likeaglove.co.il
Contact name: Mr. Simon Cooper

2 Equipment under test attributes

Product name: Smart garment
Product type: Transmitter
Model(s): LIKE03
Serial number: 3a000600003e315c
Hardware version: v2.1
Software release: v2.0
Receipt date 14-Apr-16

3 Manufacturer information

Manufacturer name: LikeAGlove Ltd.
Address: 17 Ha-Mefalsim street, Petah Tikva 4951447, Israel
Telephone: +1-855-938-3837
E-Mail: info@likeaglove.co.il
Contact name: Mr. Simon Cooper

4 Test details

Project ID: 28234
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 04-Apr-16
Test completed: 20-Apr-16
Test specification(s): FCC 47CFR part 15 subpart C § 15.247 (DTS);
RSS-247 issue 1

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 8.3, Antenna requirement	Pass
FCC section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	April 20, 2016	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	May 15, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	June 6, 2016	

6 EUT description

6.1 General information

The EUT, LikeAGlove smart garment, is intended to measure your body shape in seconds and to send the data over Bluetooth to free application. The application then matches the measurements against denim database and finds brands, styles and sizes that fit applicable shape.

The EUT uses Bluetooth Low Energy (BLE) for data transferring. The EUT is powered by 3V internal battery.

According to manufacturer's declaration provided in Appendix G of the test report, both Smart Leggings, model LIKE03 and Smart Shorts, model LIKE04 are electrically/electronically identical. That is why only LIKE03 was tested.


6.2 Auxiliary equipment

Description	Manufacturer	Model number	Application version
Ipad Air	Apple	Ipad Air ios 7	v1.1

6.3 Operating frequencies

Source	Frequency, MHz					
Tx/Rx	2400	NA	NA	NA	NA	NA
Clock	1.3	2.5	NA	NA	NA	NA

6.4 Test configuration

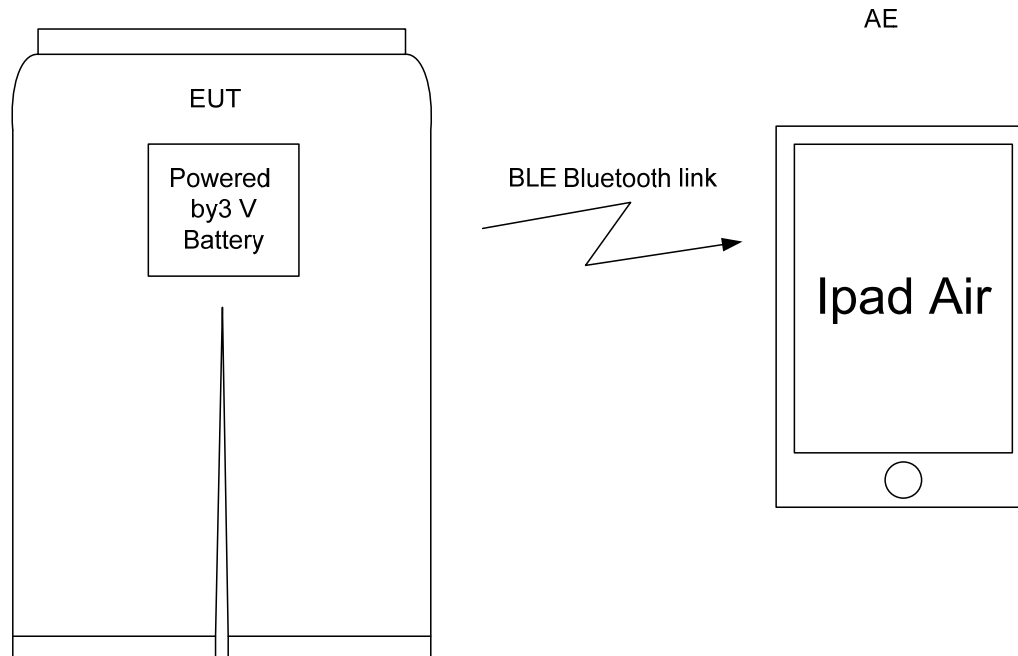

6.5 Changes made in the EUT

No changes were implemented in the EUT during the testing.

6.6 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
	mobile	Always at a distance more than 20 cm from all people				
X	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency ranges		2400 -2483.5 MHz				
Operating frequencies		2402-2480 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm	
		Peak output power			-3.25 dBm	
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				minimum RF power		
				maximum RF power		
Antenna connection						
unique coupling	standard connector	X	integral	with temporary RF connector		
				X without temporary RF connector		
Antenna/s technical characteristics						
Type	Manufacturer	Model number		Gain		
Integral	LikeAGlove Ltd.	Printed		0 dBi		
Transmitter aggregate data rate		1 Mbps				
Type of modulation		GFSK				
Transmitter power source						
X	Battery	Nominal rated voltage	3 VDC	Battery type		
	DC	Nominal rated voltage				
	AC mains	Nominal rated voltage		Frequency		
Common power source for transmitter and receiver			X	yes	no	

Test specification:	FCC section 15.247(a)(2), RSS-247 section 5.2(1), 6 dB bandwidth		
Test procedure:	ANSI C63.10 section 11.8.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Apr-16		
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

Table 7.1.2 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
902.0 – 928.0	99%	>500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.3 and the associated plots.

Figure 7.1.1 The 6 dB bandwidth test setup





Test specification:		FCC section 15.247(a)(2), RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Table 7.1.3 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: GFSK
 BIT RATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2402	725	500	225	Pass
2440	730	500	230	Pass
2480	740	500	240	Pass

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2402	1144	500	644	Pass
2440	1130	500	630	Pass
2480	1146	500	646	Pass


Reference numbers of test equipment used

HL 0521	HL 1984	HL 4278	HL 4353					
---------	---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:		FCC section 15.247(a)(2), RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

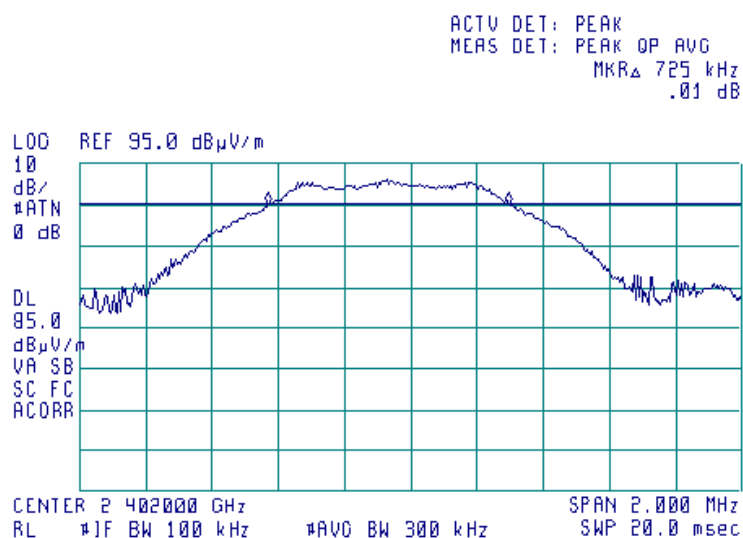


Plot 7.1.2 The 6 dB bandwidth test result at mid frequency

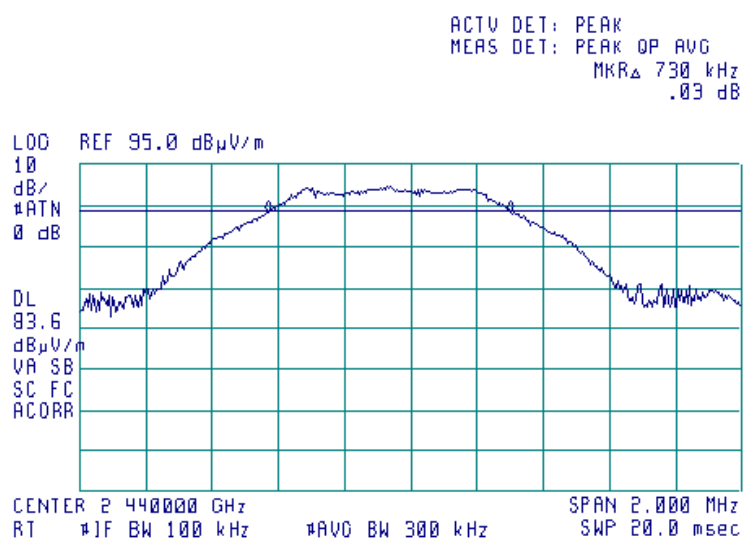


Test specification: FCC section 15.247(a)(2), RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure: ANSI C63.10 section 11.8.1	
Test mode: Compliance	Verdict: PASS
Date(s): 04-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa
	Relative Humidity: 45 %
	Power Supply: 3V battery
Remarks:	

Plot 7.1.3 The 6 dB bandwidth test result at high frequency

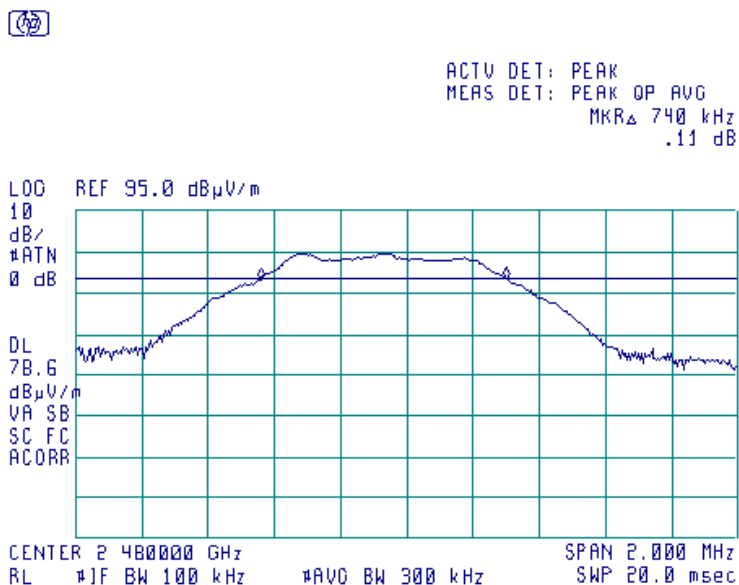

Plot 7.1.4 The 99% bandwidth test result at low frequency

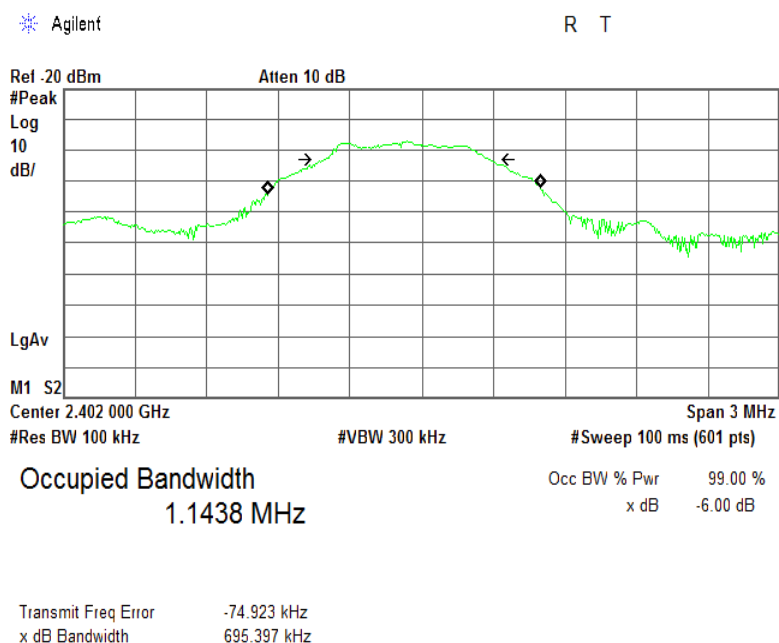





HERMON LABORATORIES

Test specification:		FCC section 15.247(a)(2), RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.1.5 The 99% bandwidth test result at mid frequency

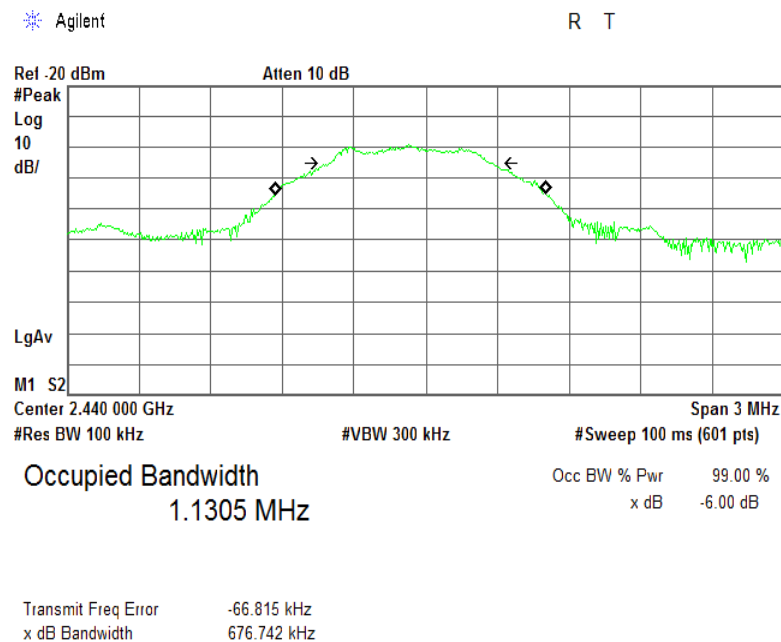

Plot 7.1.6 The 99% bandwidth test result at high frequency

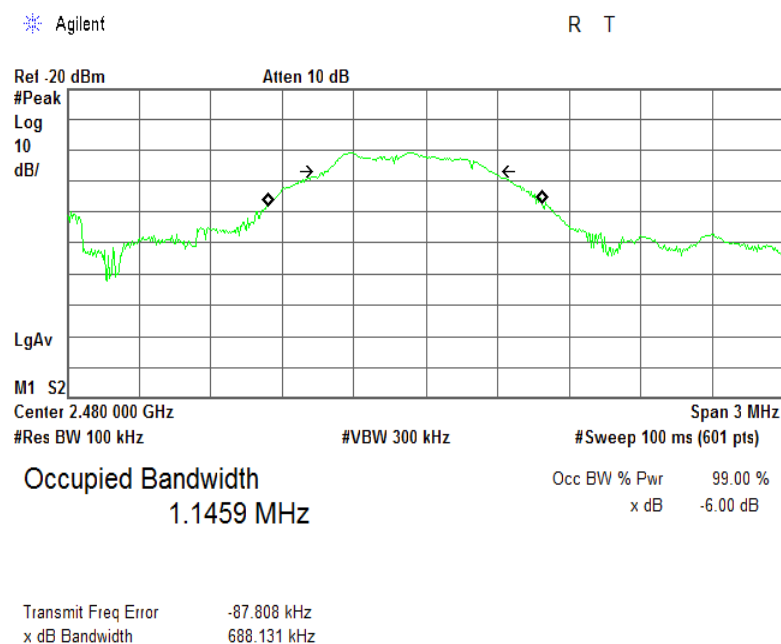



Test specification:	FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power		
Test procedure:	ANSI C63.10 section 11.9		
Test mode:	Compliance	Verdict: PASS	
Date(s):	06-Apr-16		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;

by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and the associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.

Test specification:		FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power	
Test procedure:		ANSI C63.10 section 11.9	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

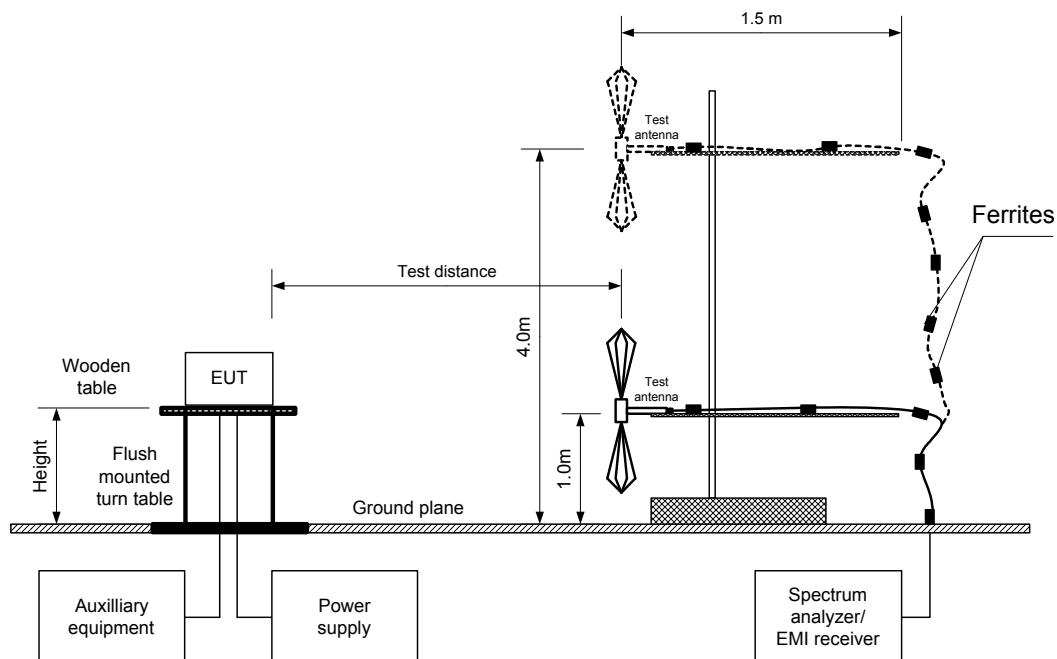



HERMON LABORATORIES

Test specification:		FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power	
Test procedure:		ANSI C63.10 section 11.9	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	91.95	H	1.5	40	0	-3.25	30	-33.25	Pass
2440	91.49	H	1.5	30	0	-3.71	30	-33.71	Pass
2480	88.58	H	1.5	80	0	-6.62	30	-36.62	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power - specification limit.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 4278	HL 4353				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power	
Test procedure:		ANSI C63.10 section 11.9	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency at vertical antenna polarization

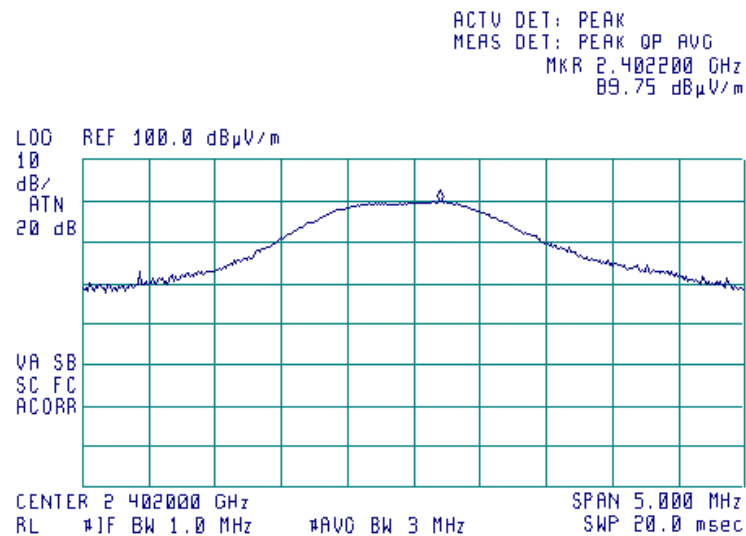

Plot 7.2.2 Field strength of carrier at low frequency at horizontal antenna polarization

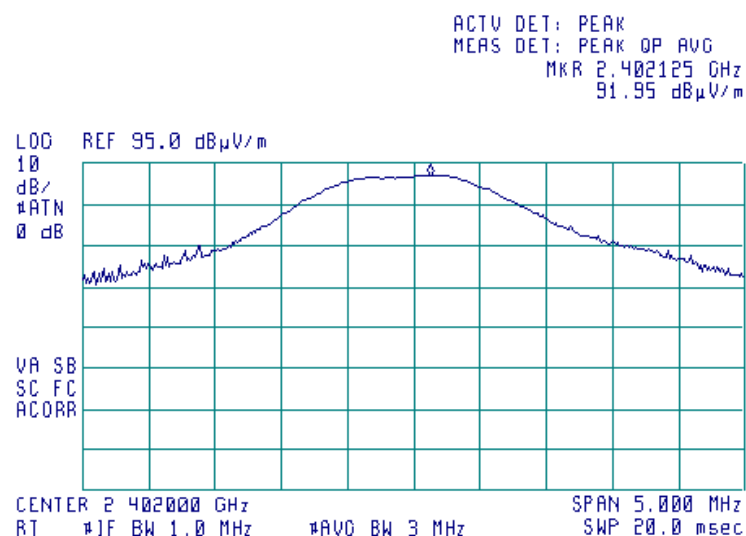





HERMON LABORATORIES

Test specification:		FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power	
Test procedure:		ANSI C63.10 section 11.9	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Plot 7.2.3 Field strength of carrier at mid frequency at vertical antenna polarization

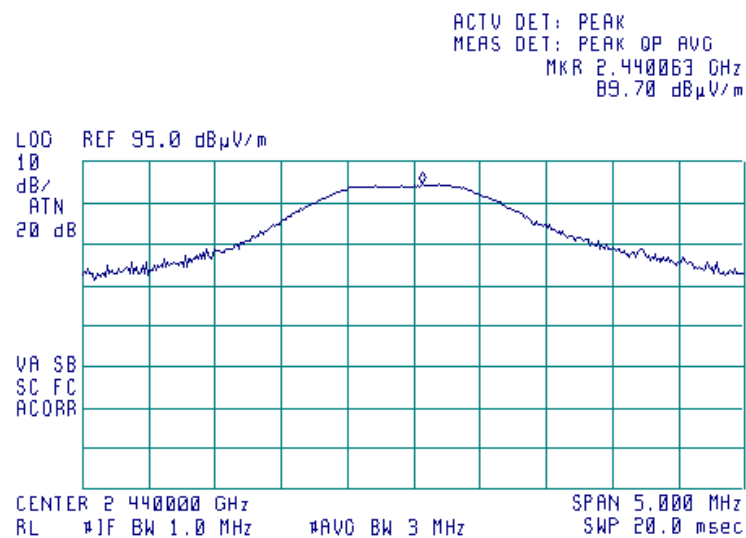

Plot 7.2.4 Field strength of carrier at mid frequency at horizontal antenna polarization

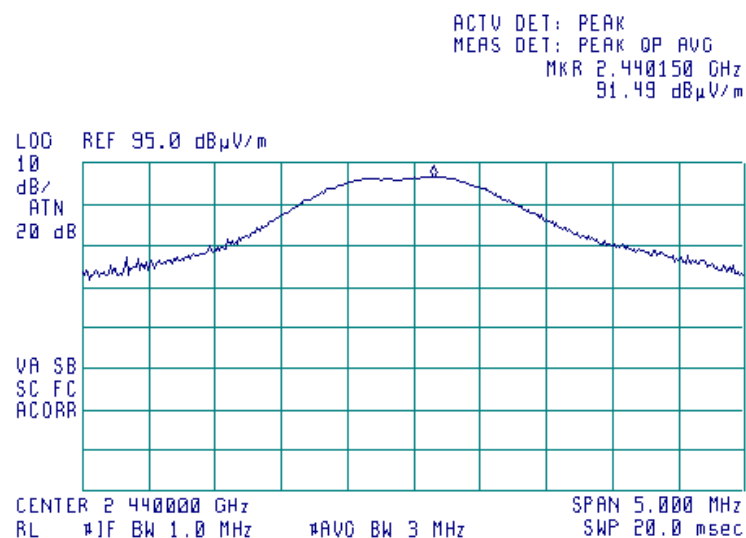





HERMON LABORATORIES

Test specification:		FCC section 15.247(b)3, RSS-247 section 5.4(4), Peak output power	
Test procedure:		ANSI C63.10 section 11.9	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Plot 7.2.5 Field strength of carrier at high frequency at vertical antenna polarization

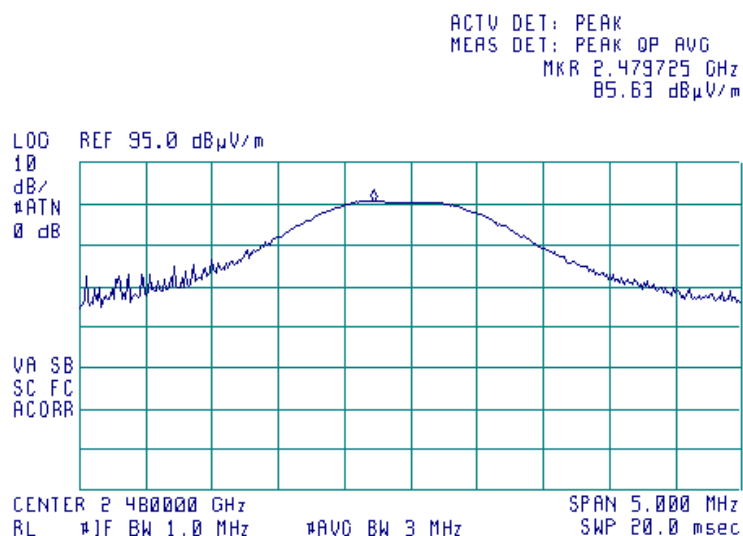

Plot 7.2.6 Field strength of carrier at high frequency at horizontal antenna polarization

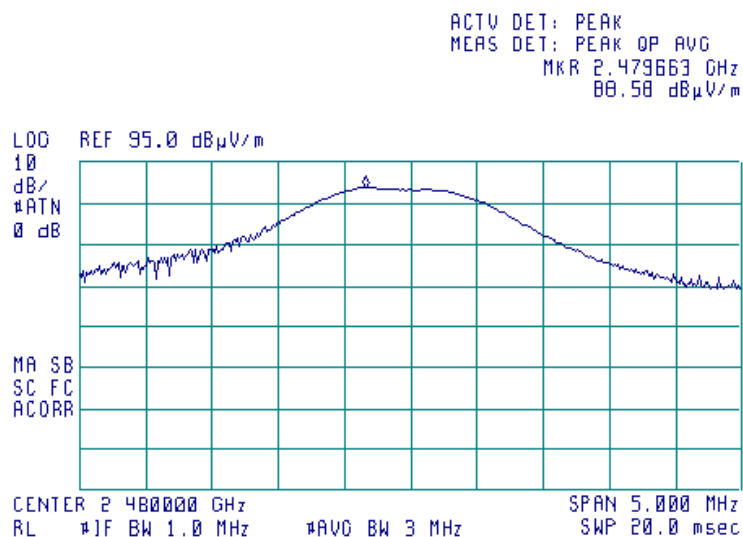

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	30.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification: FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Apr-16 - 06-Apr-16			
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


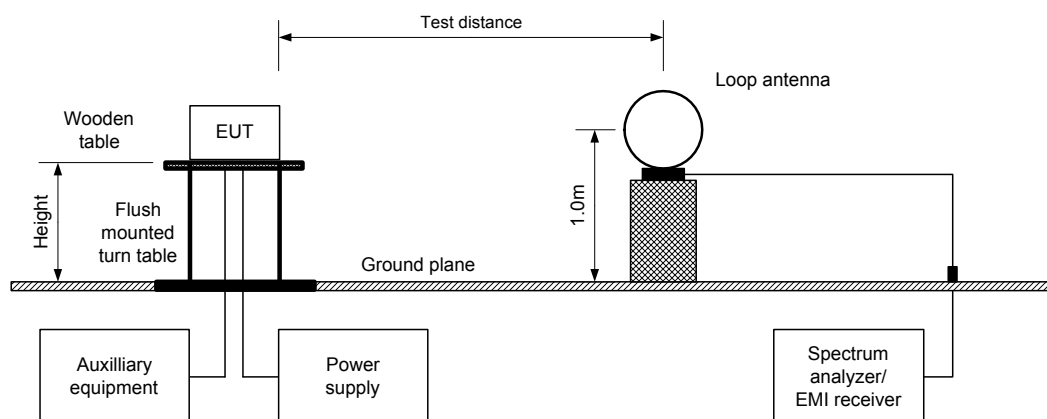


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz



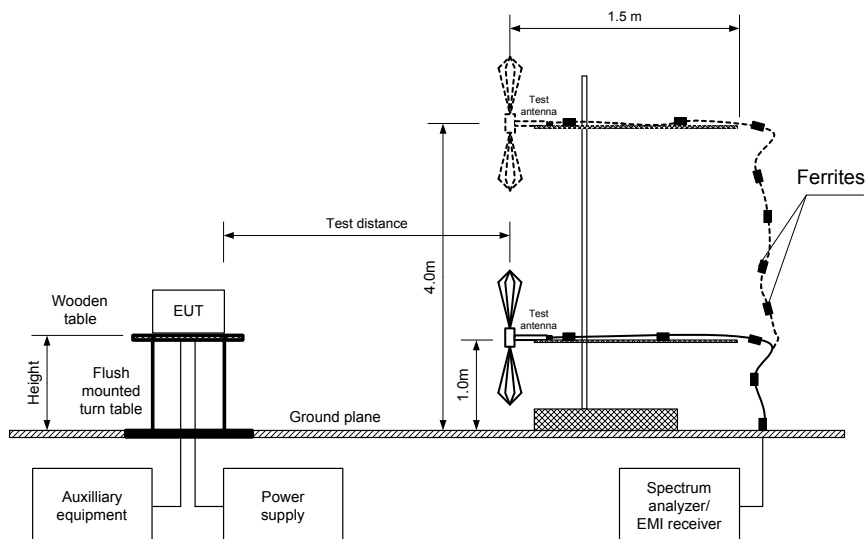

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
2399.977	57.09	Horizontal	1.5	320	90.98	33.89	30.0	3.89	Pass

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:	FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Apr-16 - 06-Apr-16		
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Antenna				Peak field strength(VBW=3 MHz)			Average field strength				Verdict
Frequency, MHz	Polarization	Height, m	Azimuth, degrees*	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
4804	Vertical	1.2	120	50.72	74	-23.28	50.72	5.22	54	-48.78	Pass
Mid carrier frequency											
4880	Vertical	1.2	150	49.92	74	-24.08	49.92	4.42	54	-49.58	Pass
High carrier frequency											
4960	Vertical	1.2	160	48.53	74	-25.47	48.53	3.03	54	-50.97	Pass

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Measured field strength - specification limit.

*** - Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	0.527	480	NA	-45.5

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
256.0	26.0	24.3	46	-21.7	Horizontal	1.0	0	Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1984	HL 3347	HL 3818	HL 3901	HL 4278
HL 4338	HL 4353	HL 4933	HL 4956				

Full description is given in Appendix A.



Test specification:	FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions				
Test procedure:	ANSI C63.10 section 11.12.1				
Test mode:	Compliance	Verdict:		PASS	
Date(s):	04-Apr-16 - 06-Apr-16				
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %		Power Supply: 3V battery	
Remarks:					

Table 7.3.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.3.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

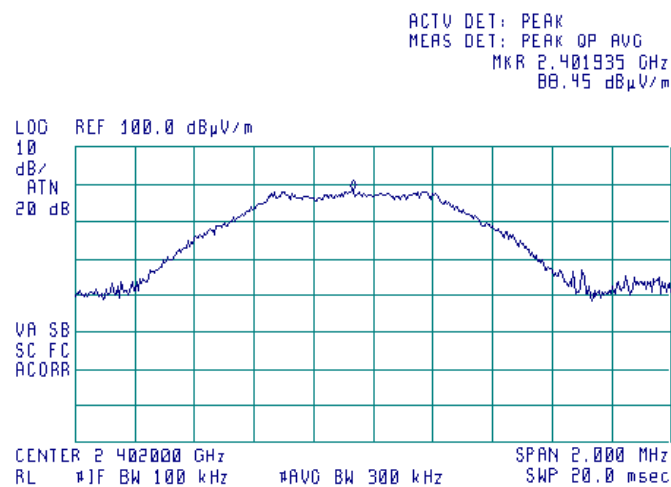

Plot 7.3.2 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

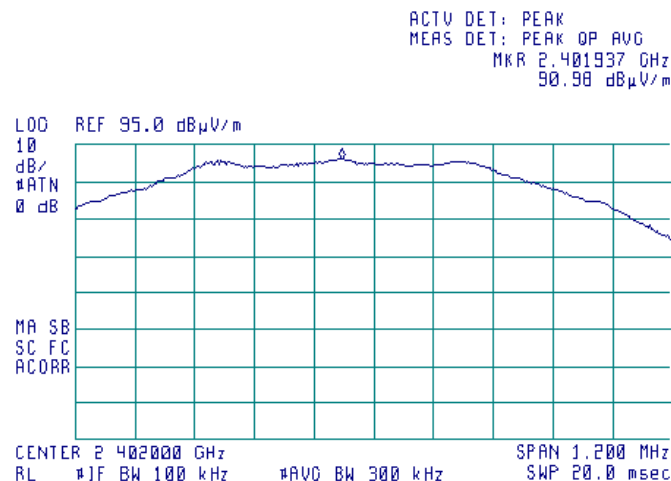




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

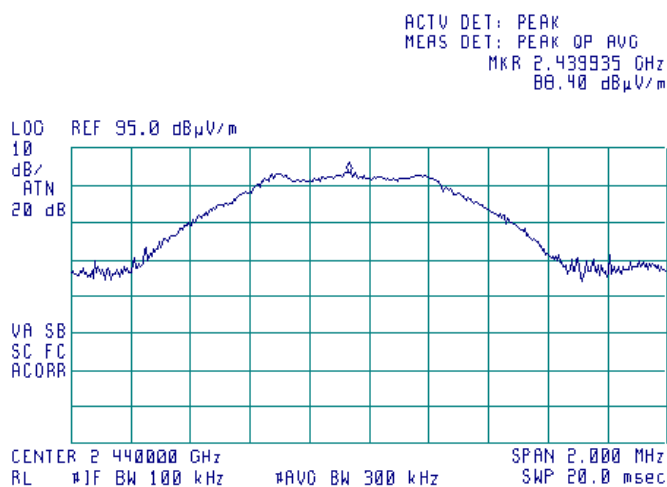

Plot 7.3.4 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

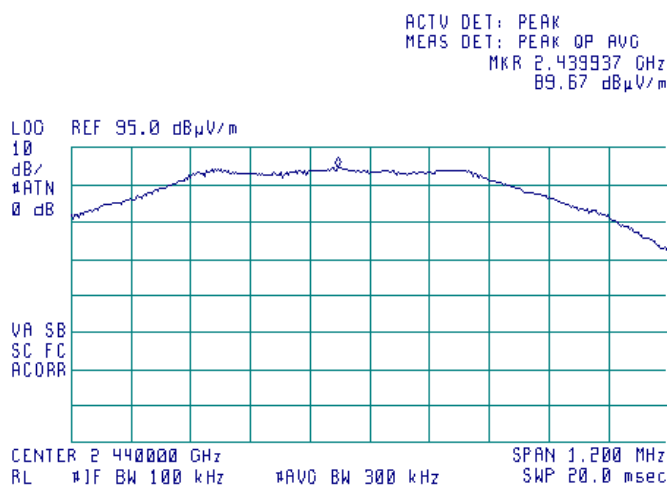



HERMON LABORATORIES


Report ID: LIKRAD_FCC.28234.docx

Date of Issue: 6-Jun-16

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.5 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

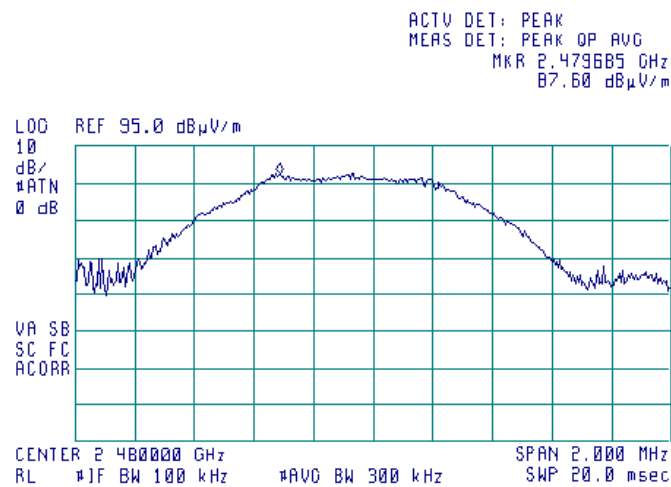

Plot 7.3.6 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

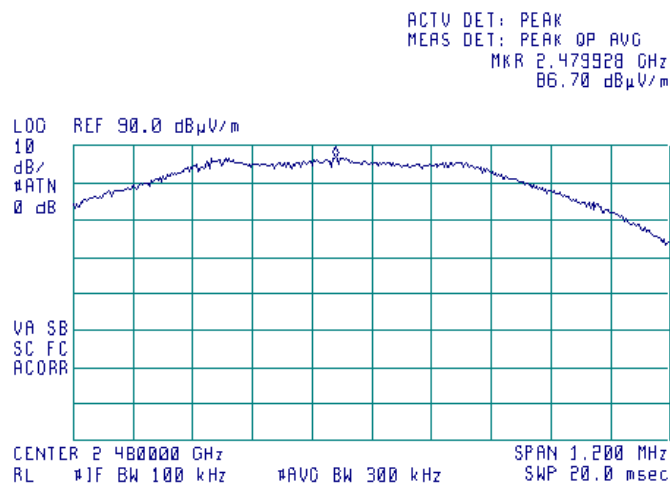




HERMON LABORATORIES

Report ID: LIKRAD_FCC.28234.docx
Date of Issue: 6-Jun-16

Test specification:	FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Apr-16 - 06-Apr-16		
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.7 Radiated emission measurements from 9 to 150 kHz at the low, mid, high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

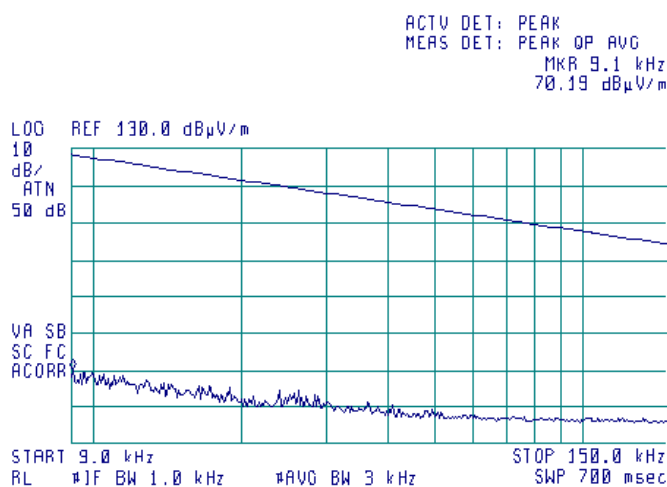

Plot 7.3.8 Radiated emission measurements from 0.15 to 30 MHz at the low, mid, high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

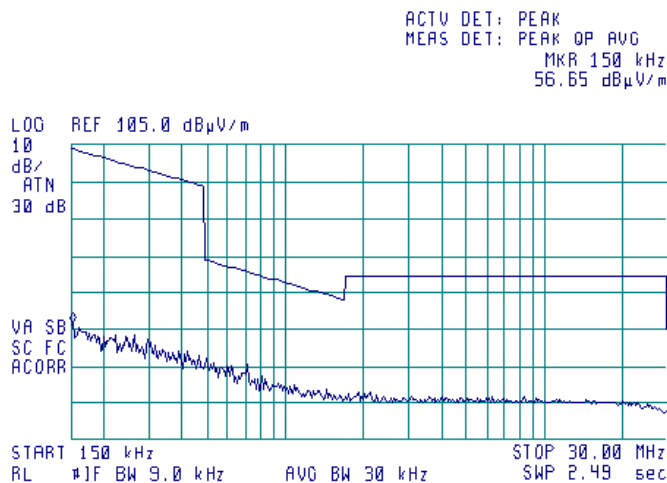

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.3.9 Radiated emission measurements from 30 to 1000 MHz at the low, mid, high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

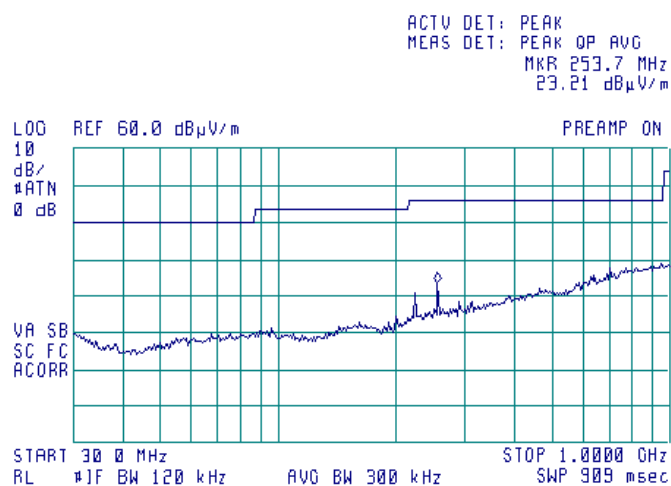




HERMON LABORATORIES

Test specification: FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Apr-16 - 06-Apr-16			
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.10 Radiated emission measurements from 1000 to 2390 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

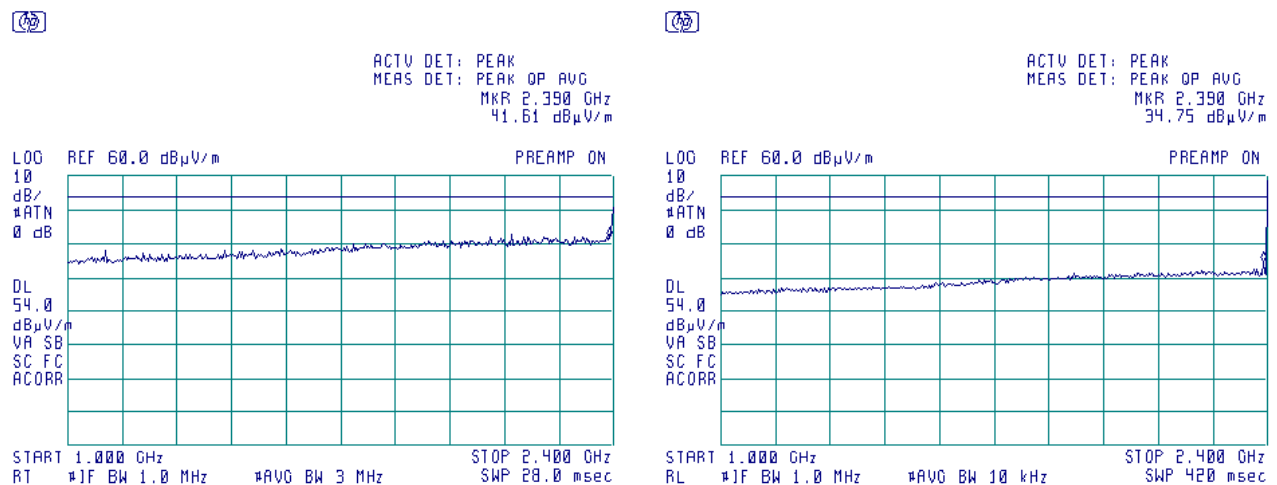

Plot 7.3.11 Radiated emission measurements from 2483.5 to 2900 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

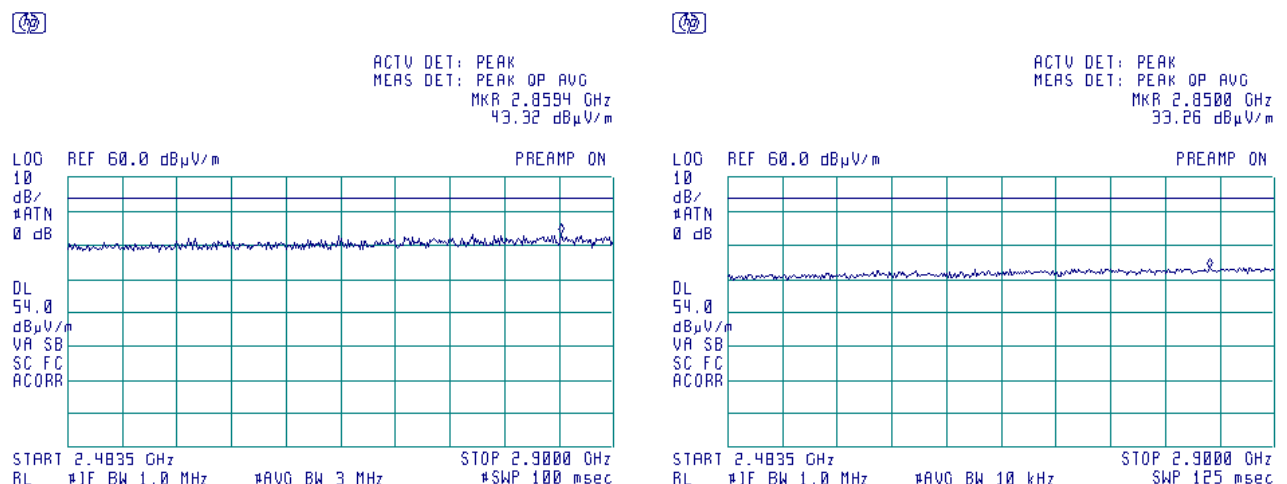

Test specification:	FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Apr-16 - 06-Apr-16		
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.12 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

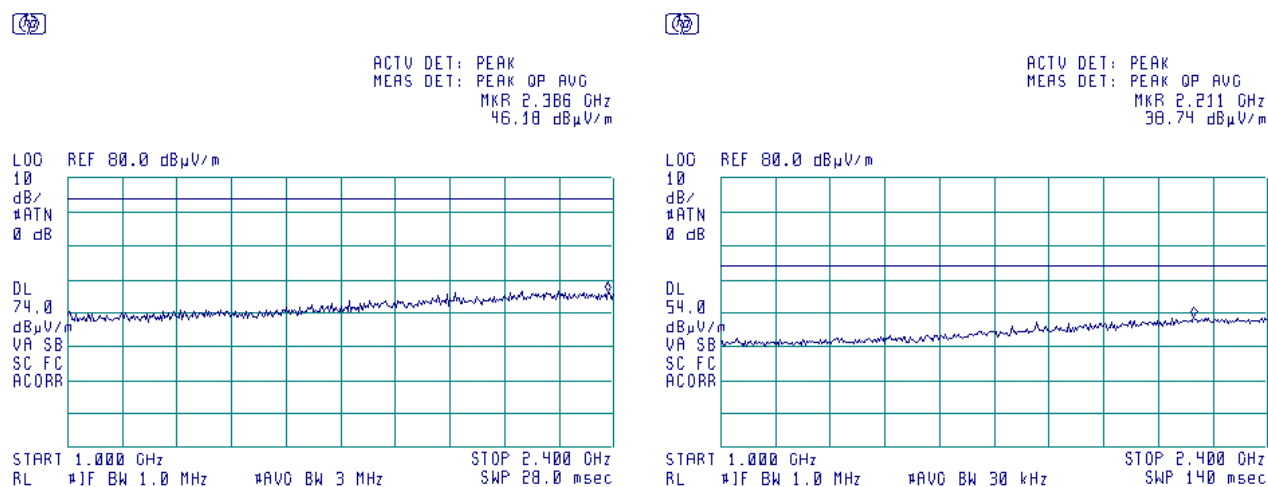

Plot 7.3.13 Radiated emission measurements from 2483.5 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

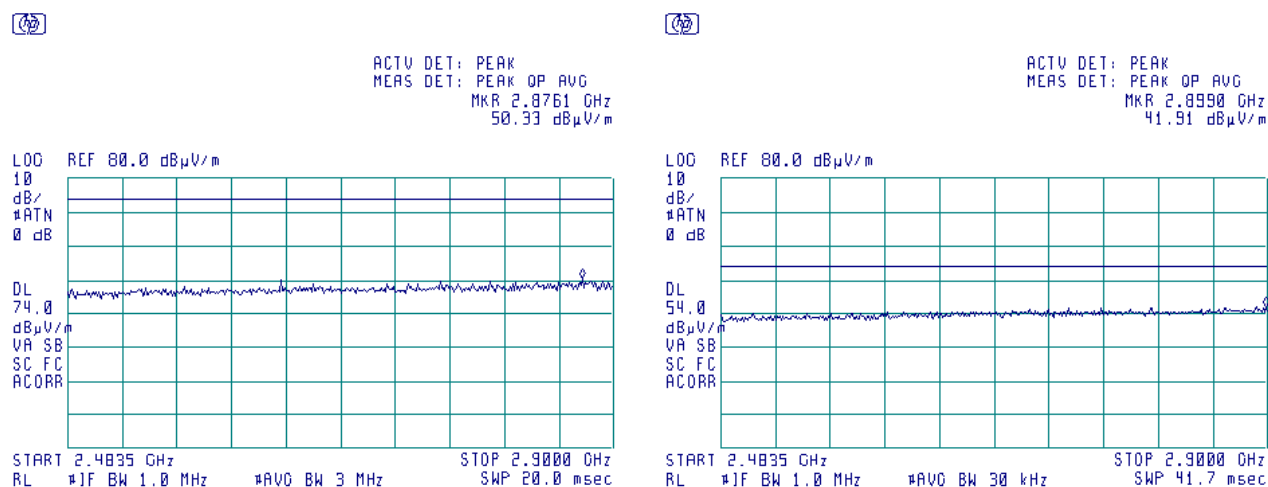




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.14 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

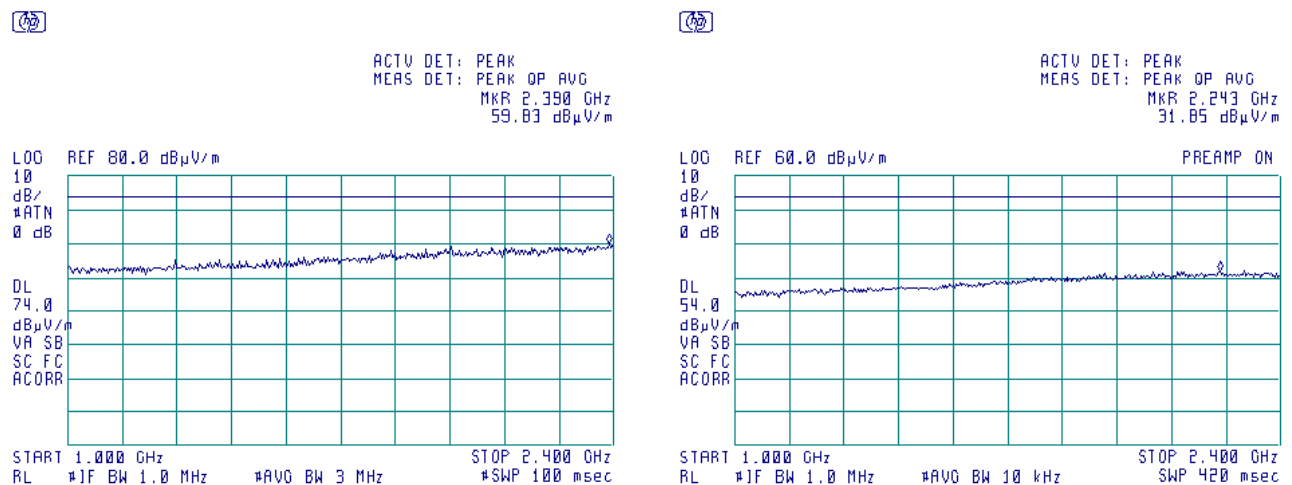

Plot 7.3.15 Radiated emission measurements from 2483.5 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

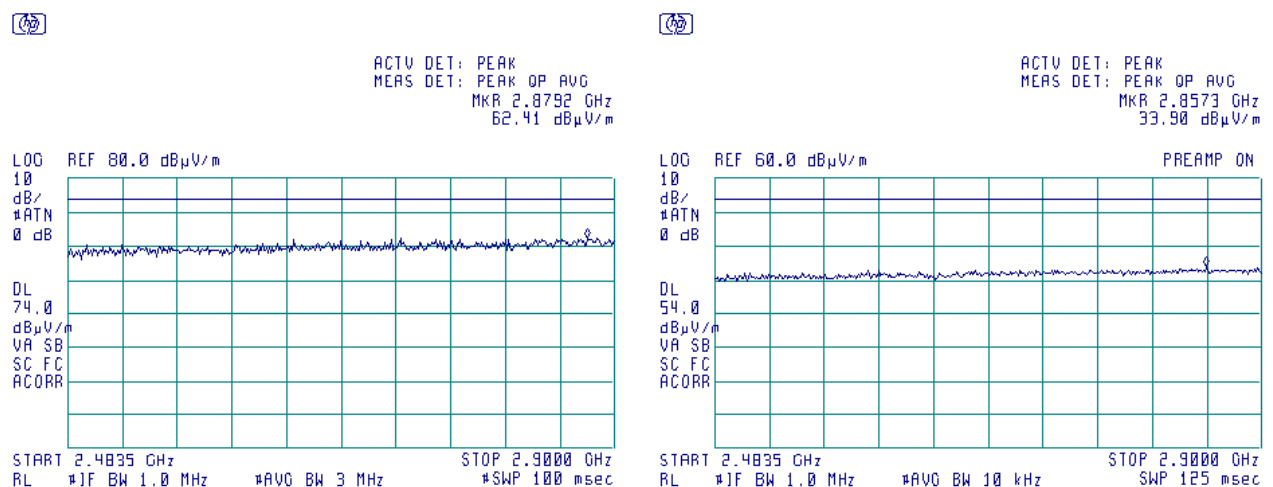




HERMON LABORATORIES

Report ID: LIKRAD_FCC.28234.docx
Date of Issue: 6-Jun-16

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.16 Radiated emission measurements from 2900 to 6500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

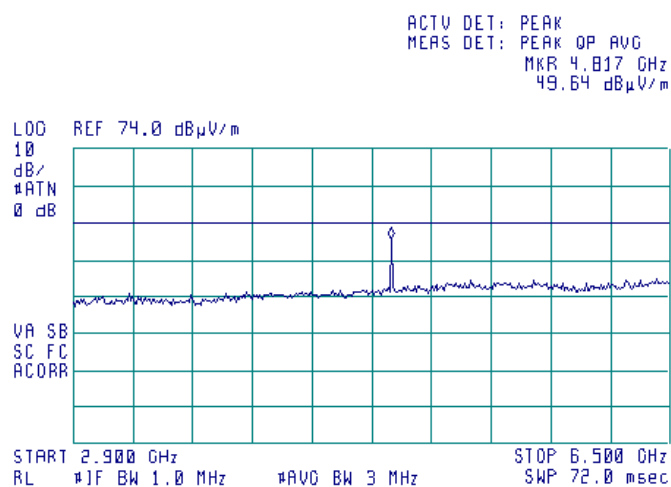

Plot 7.3.17 Radiated emission measurements from 2900 to 6500 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

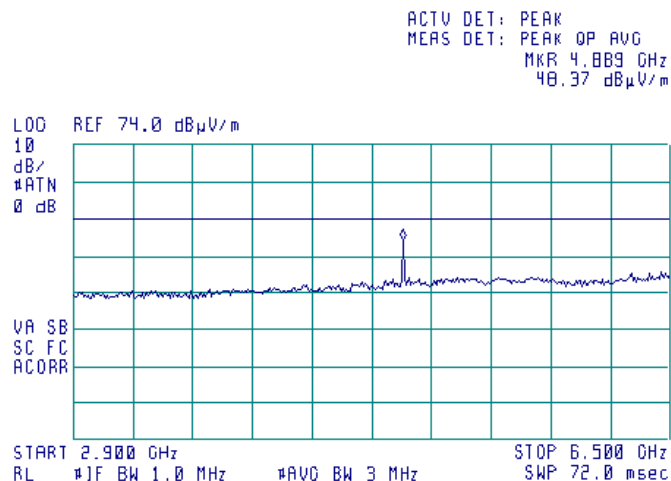

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.18 Radiated emission measurements from 2900 to 6500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

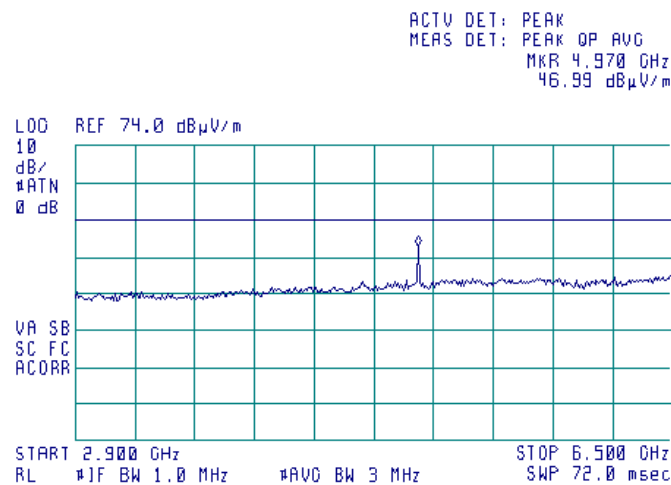

Plot 7.3.19 Radiated emission measurements from 6500 to 13000 MHz at the low, mid, high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

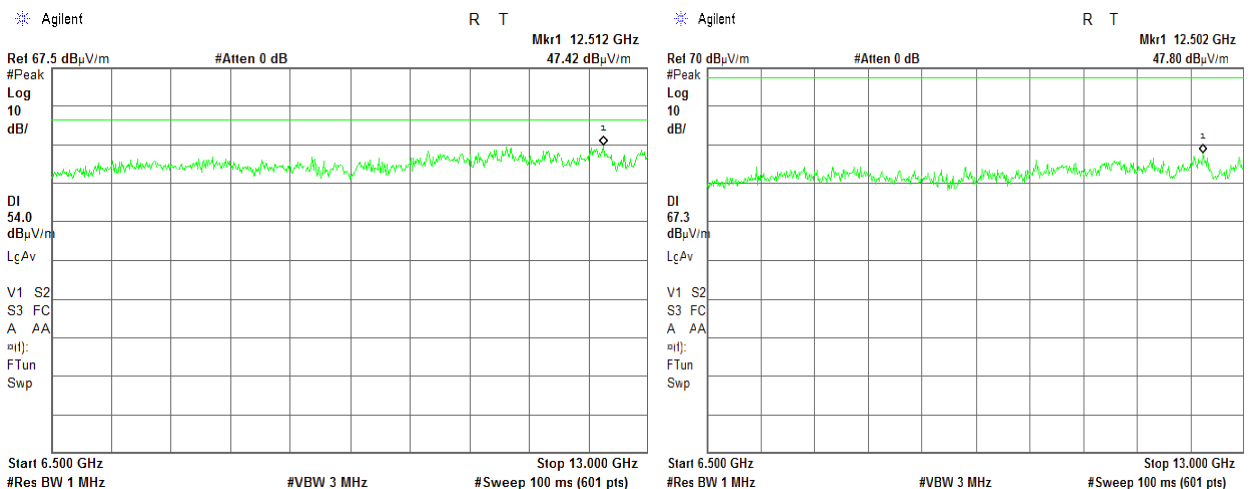

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.3.20 Radiated emission measurements from 18000 to 25000 MHz at the low, mid, high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

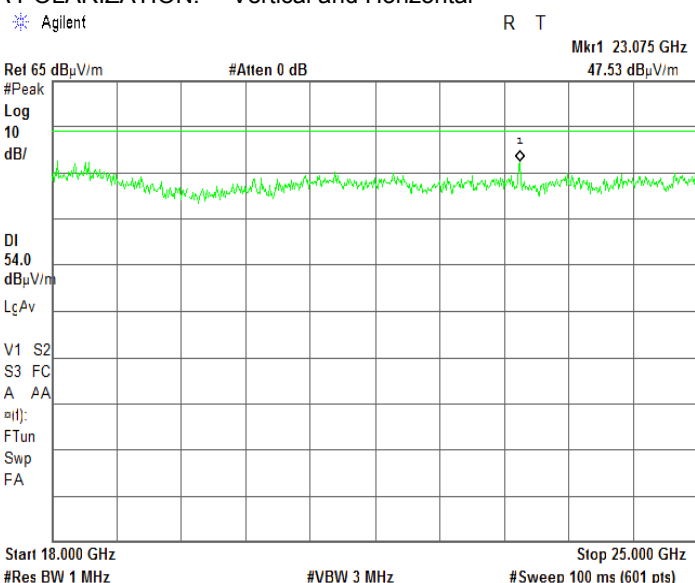


Note: the 23 GHz is ambient signal

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.21 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

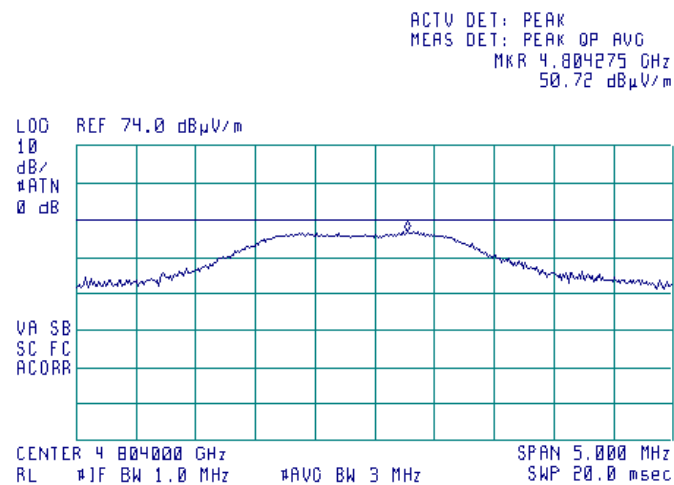

Plot 7.3.22 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

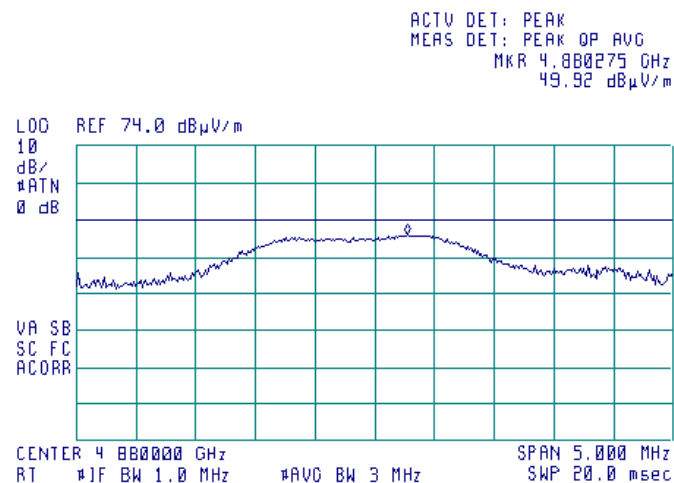



HERMON LABORATORIES


Report ID: LIKRAD_FCC.28234.docx

Date of Issue: 6-Jun-16

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			


Plot 7.3.23 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

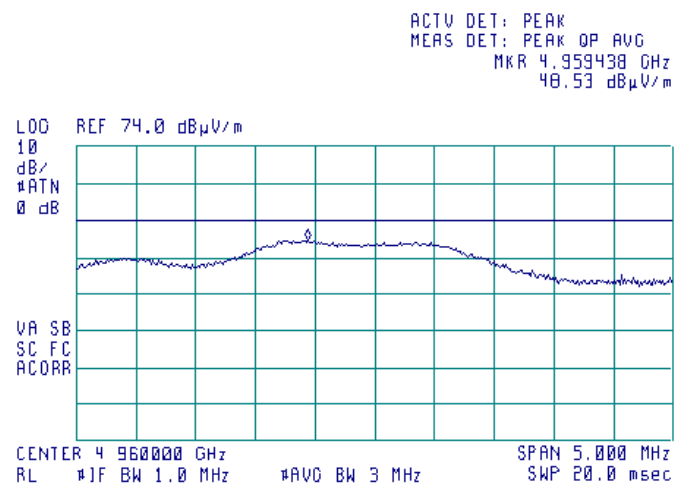


Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.3.24 Transmission pulse duration

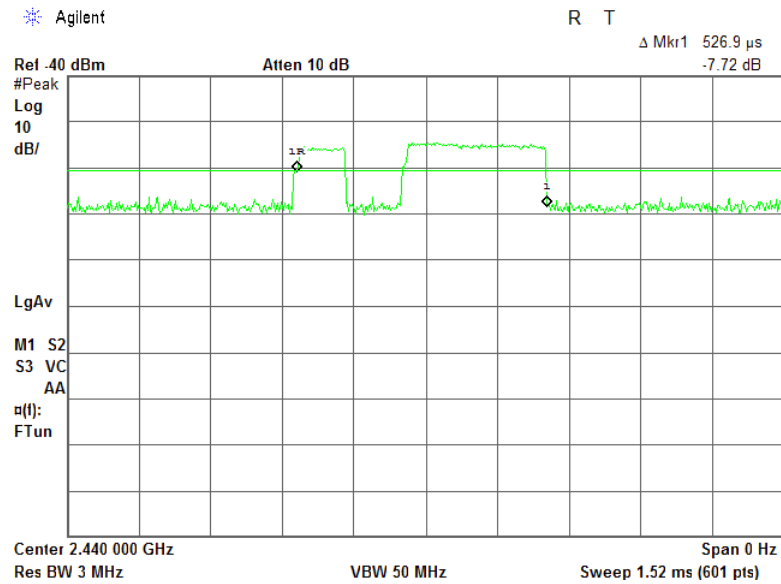

Plot 7.3.25 Transmission pulse period

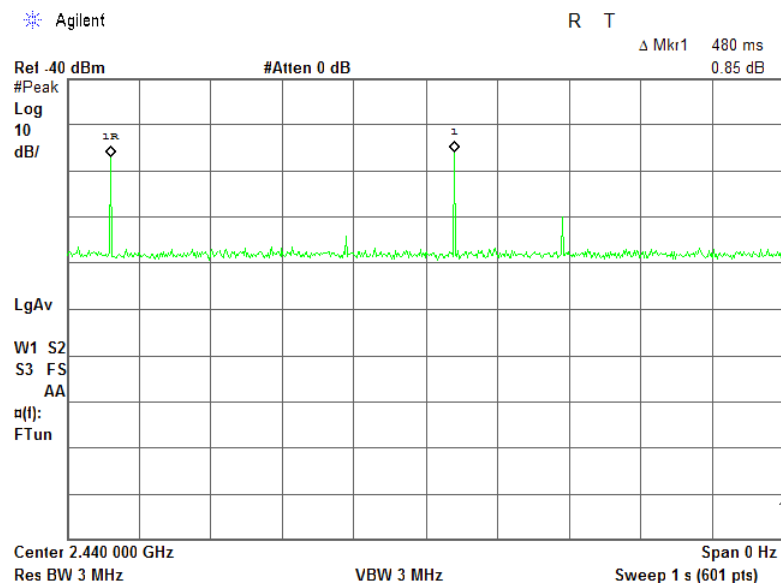

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Band edge emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μ V/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.4.1 Band edge emission test setup





Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Band edge emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Table 7.4.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Band edge emission, dBm		Emission at carrier, dBm		Attenuation below carrier, dBc		Limit, dBc	Margin, dB*	Verdict		
2399.977	57.09		90.98		33.89		20.0	13.89	Pass		
Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
2483.500	Horizontal	1.5	320	57.94	74	-16.06	57.94	12.44	54	-41.56	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 3818	HL 4278	HL 4353			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Band edge emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.4.1 The highest emission level within the assigned band at low carrier frequency

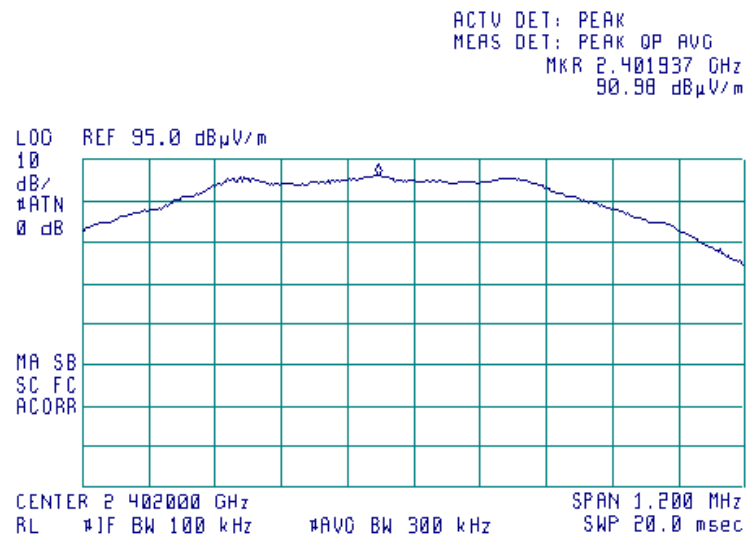


Plot 7.4.2 The highest emission level within the assigned band at high carrier frequency

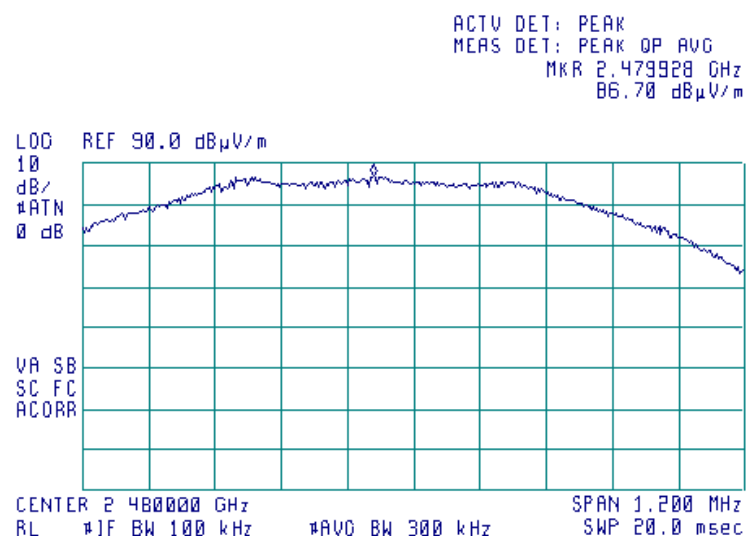


Test specification:		FCC section 15.247(d), RSS-247 section 5.5, Band edge emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Apr-16 - 06-Apr-16	
Temperature: 22 °C	Air Pressure: 1012 hPa	Relative Humidity: 45 %	Power Supply: 3V battery
Remarks:			

Plot 7.4.3 The highest band edge emission at low carrier frequency

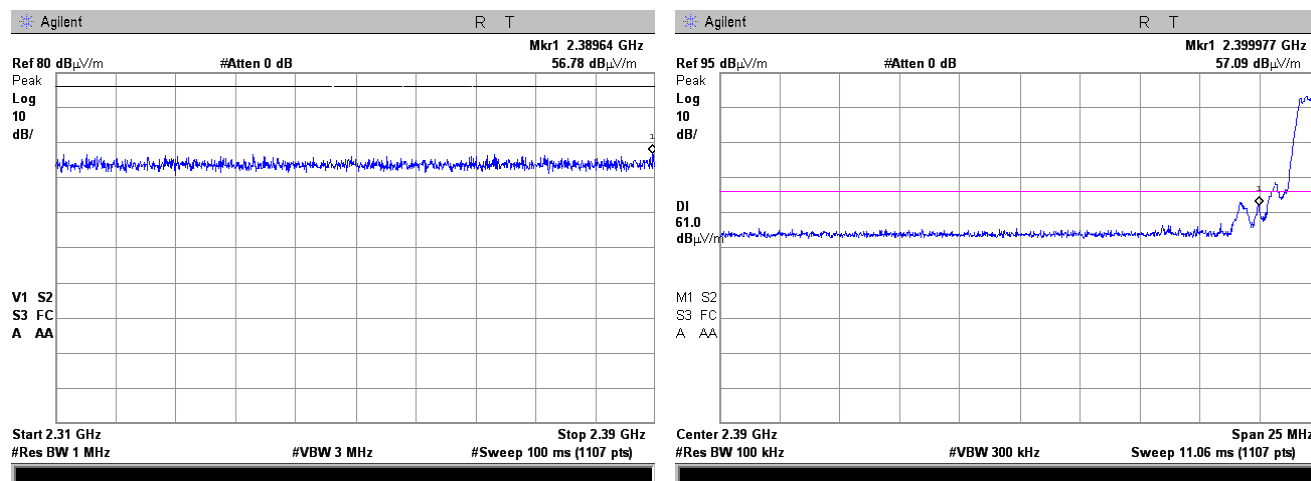

Plot 7.4.4 The highest band edge emission at high carrier frequency

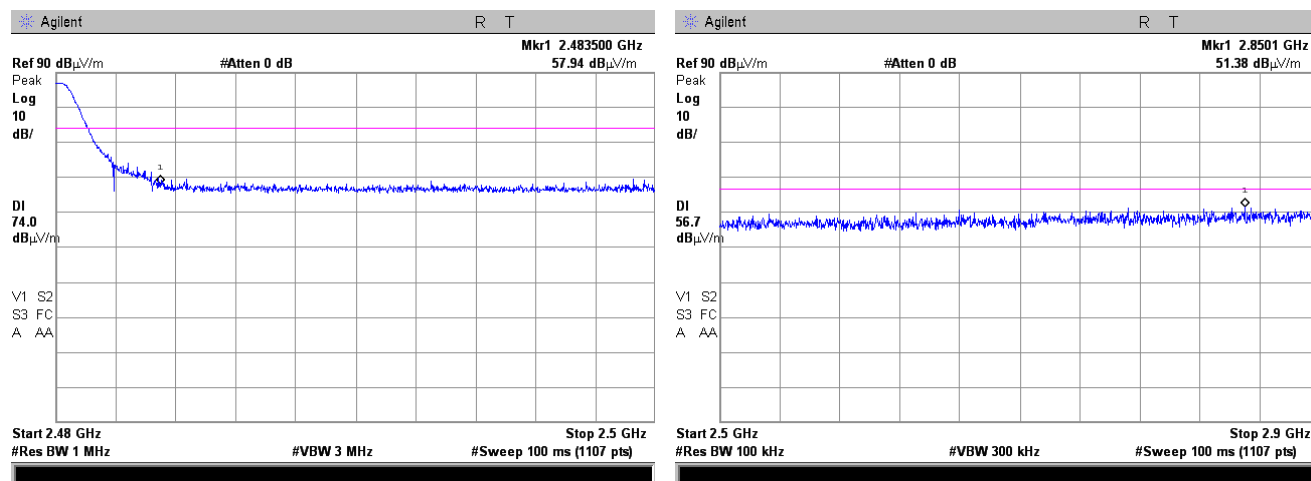



Test specification:		FCC section 15.247(e), RSS-247 section 5.2(2), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.2	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.


7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 100 kHz, video bandwidth ≥ 3 resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.5.2.5 Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and the associated plots.

Test specification:		FCC section 15.247(e), RSS-247 section 5.2(2), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.2	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

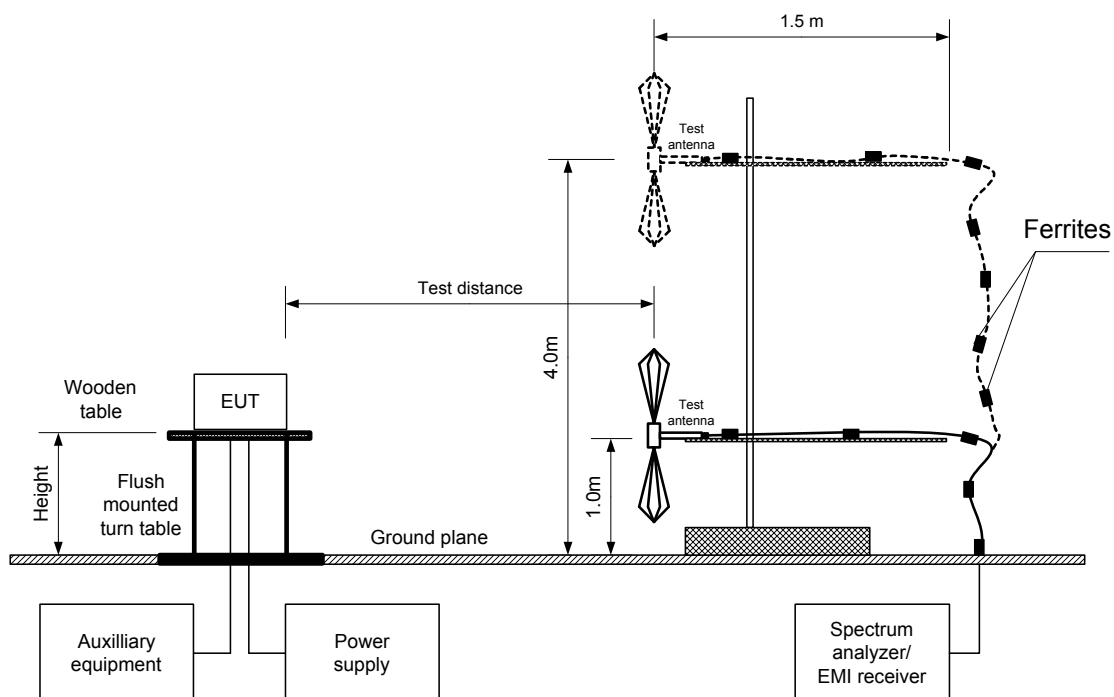



Test specification:		FCC section 15.247(e), RSS-247 section 5.2(2), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.2	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE:	2400 – 2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	1.5 m
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Double ridged guide
MODULATION:	GFSK
BIT RATE:	1 Mbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2402	90.98	0	103.2	-12.22	Horizontal	1.5	30
2440	89.67	0	103.2	-13.53	Horizontal	1.5	30
2480	86.70	0	103.2	-16.50	Horizontal	1.6	30

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 4278	HL 4353				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: LIKRAD_FCC.28234.docx


Date of Issue: 6-Jun-16

Test specification:		FCC section 15.247(e), RSS-247 section 5.2(2), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.2	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Plot 7.5.1 Peak spectral power density at low frequency

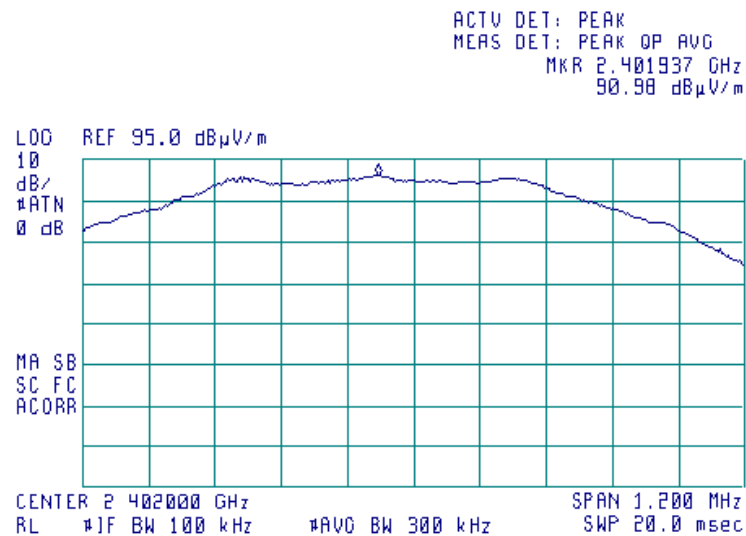

Plot 7.5.2 Peak spectral power density at mid frequency

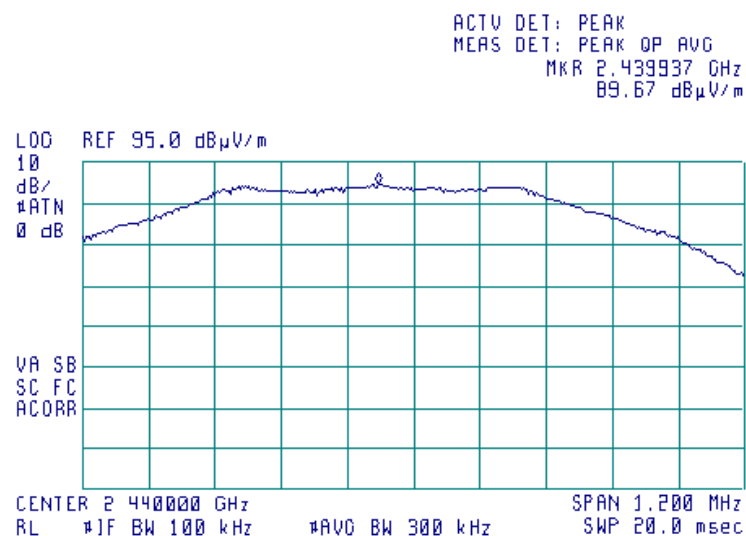




HERMON LABORATORIES

Report ID: LIKRAD_FCC.28234.docx

Date of Issue: 6-Jun-16

Test specification:		FCC section 15.247(e), RSS-247 section 5.2(2), Peak power density	
Test procedure:		ANSI C63.10, section 11.10.2	
Test mode:		Compliance	Verdict: PASS
Date(s):		06-Apr-16	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 54 %	Power Supply: 3V battery
Remarks:			

Plot 7.5.3 Peak spectral power density at high frequency

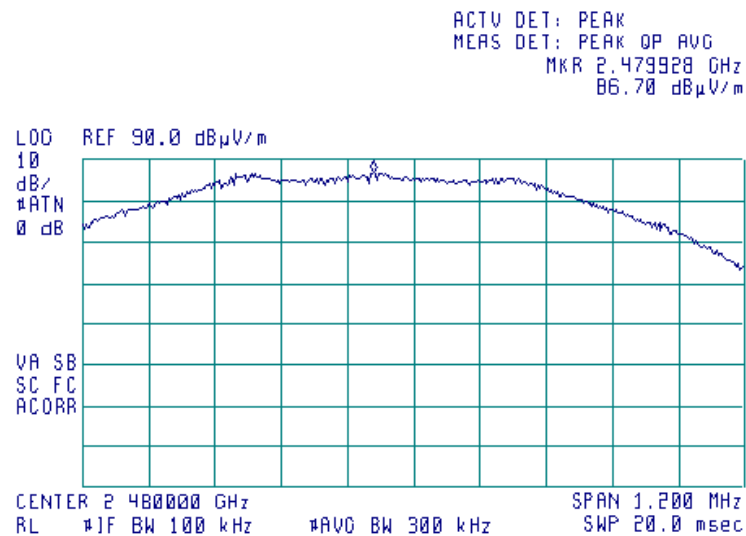



Test specification: Section 15.203, RSS-Gen section 8.3, Antenna requirements			
Test procedure:			
Test mode:	Compliance	Verdict: PASS	
Date(s):	20-Apr-16		
Temperature: 23 °C	Air Pressure: 1010 hPa	Relative Humidity: 60 %	Power Supply: 3V battery
Remarks:			

7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.6.1 Antenna view

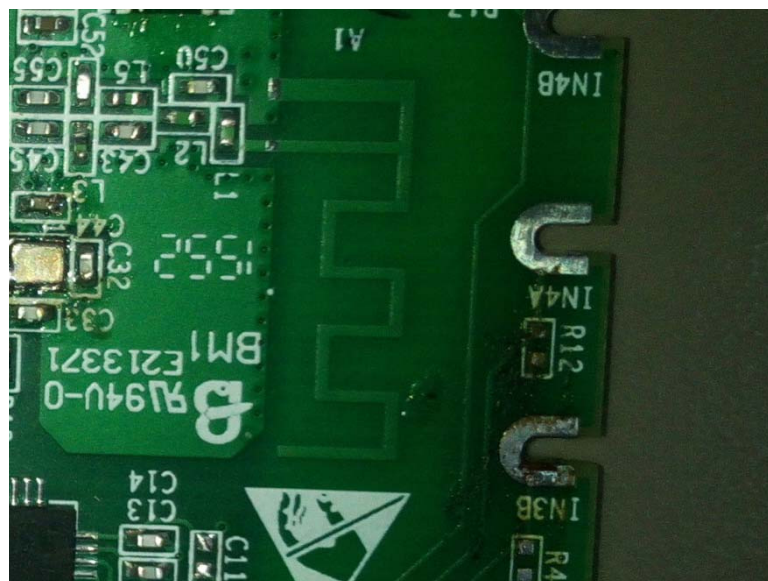

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-16	15-May-17
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
3347	High Pass Filter, 50 Ohm, 6000 to 11500 MHz.	Mini-Circuits	VHF-5500+	NA	01-Oct-15	01-Oct-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	15-Feb-16	15-Feb-17
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	BRM 50702-02	023	08-May-16	08-May-17
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	04-Sep-15	04-Sep-16
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	09-Nov-15	09-Nov-16

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file number IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-247 Issue 1: 2015	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 4: 2014	General Requirements for Compliance of Radio Apparatus

12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-118		
Serial Number:			701046		
Calibration Distance:			3 Meter		
Polarization:			Horizontal		
Calibration Date:			11/12/2014		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
Antenna Factor to be added to receiver reading:					
Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Antenna factor, HL 4956

**Active Horn Antenna Factor Calibration**

18 GHz to 40 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-840		
Serial Number:			105004		
Calibration Distance:			3 meter		
Polarization:			Horizontal		
Calibration Date:			1/26/2015		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna) Corrected Reading (dBμV/m) = Meter Reading (dBμV) + AFE(dB/m)					

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

Cable loss
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF TEST REPORT

14 APPENDIX G Manufacturer's declaration

LikeAGlove LTD

Declaration of Identity

We, the undersigned,

Company: LikeAGlove LTD
Address: Ha-Mefalsim 17, Petah Tikva, 4951447, Israel
Country: Israel
Telephone number: +1-855-938-3837
Fax number:

declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
LikeAGlove Smart Garment	LIKE03	Smart Leggings

is electronically identical to the following equipment (including Software/Hardware version(s)):

Brand/Item	Type/Model	Short Product description
LikeAGlove Smart Garment	LIKE04	Smart Shorts

The reason for name change is: simpler and shorter variation of the same product.

לייק א גלוב בע"מ
LIKE A GLOVE LTD
ח.פ. 515089209

.....
(company stamp)

17/05/2016

(date)

.....

(signature)

Simon Cooper

(printed name)

SEO

(position)

END OF DOCUMENT