



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

# TEST REPORT

## FCC PART 15.247& RSS 247

Report Reference No. ....: CTL1703033021-WF02

Compiled by:  
( position+printed name+signature)

Allen Wang  
(File administrators)

*Allen Wang*

Tested by:  
( position+printed name+signature)

Nice Nong  
(Test Engineer)

*Nice Nong*

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

*Ivan Xie*

Product Name.....: Mirror with bluetooth player

Model/Type reference .....: Verse, Vezzo ,Vero, Vetta

Trade Mark .....: Viio

FCC ID .....: 2AHXP-MI0000

IC .....: 21435-MI0000

Applicant's name .....: GTR technologies Inc.

Address of applicant .....: 1420 Lumsden Rd, Port Orchard, WA 98367 USA

Test Firm .....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,  
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: 47 CFR FCC Part 15 Subpart C 15.247  
RSS 247 Issue 2, February 2017

TRF Originator .....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF .....: Dated 2011-01

Date of Receipt.....: Mar. 03, 2017

Date of Test Date.....: Mar. 03, 2017–Mar. 13, 2017

Data of Issue.....: Mar. 13, 2017

Result.....: Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

|                          |                           |                                |
|--------------------------|---------------------------|--------------------------------|
| <b>Test Report No. :</b> | <b>CTL1703033021-WF02</b> | Mar. 13, 2017<br>Date of issue |
|--------------------------|---------------------------|--------------------------------|

Equipment under Test : Mirror with bluetooth player

Model /Type : Verse, Vezzo ,Vero, Vetta

**Applicant** : **GTR technologies Inc.**

Address : 1420 Lumsden Rd, Port Orchard, WA 98367 USA

**Manufacturer** : **Veetom Technologies Co, Ltd**

Address : 2590 Nanhuan Road, Binjiang Economic  
Development Zone, Hangzhou, 310052, China

|                    |               |
|--------------------|---------------|
| <b>Test result</b> | <b>Pass *</b> |
|--------------------|---------------|

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**\*\* Modified History \*\***


| Revisions   | Description                 | Issued Data | Report No.         | Remark   |
|-------------|-----------------------------|-------------|--------------------|----------|
| Version 1.0 | Initial Test Report Release | 2017-03-13  | CTL1703033021-WF02 | Tracy Qi |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |
|             |                             |             |                    |          |



## Table of Contents

## Page

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                                  | <b>5</b>  |
| 1.1. TEST STANDARDS .....                               | 5         |
| 1.2. TEST DESCRIPTION.....                              | 5         |
| 1.3. TEST FACILITY .....                                | 6         |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....      | 6         |
| <b>2. GENERAL INFORMATION.....</b>                      | <b>7</b>  |
| 2.1. ENVIRONMENTAL CONDITIONS .....                     | 7         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 7         |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....  | 7         |
| 2.4. EQUIPMENTS USED DURING THE TEST .....              | 8         |
| 2.5. RELATED SUBMITTAL(S) / GRANT (S).....              | 8         |
| 2.6. MODIFICATIONS.....                                 | 8         |
| <b>3. TEST CONDITIONS AND RESULTS .....</b>             | <b>9</b>  |
| 3.1. CONDUCTED EMISSIONS TEST .....                     | 9         |
| 3.2. RADIATED EMISSIONS AND BAND EDGE .....             | 12        |
| 3.3. MAXIMUM CONDUCTED OUTPUT POWER.....                | 15        |
| 3.4. POWER SPECTRAL DENSITY .....                       | 20        |
| 3.5. 6dB BANDWIDTH.....                                 | 22        |
| 3.6. OUT-OF-BAND EMISSIONS .....                        | 24        |
| 3.7. ANTENNA REQUIREMENT.....                           | 28        |
| <b>4. TEST SETUP PHOTOS OF THE EUT .....</b>            | <b>29</b> |
| <b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b> | <b>29</b> |

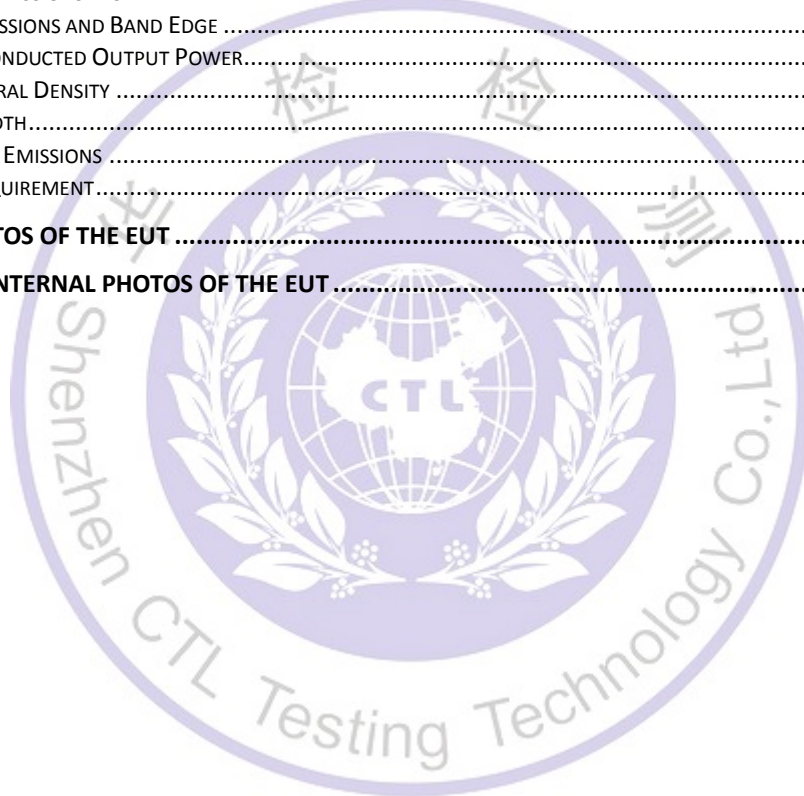

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

**ANSI C63.10: 2013:** American National Standard for Testing Unlicensed Wireless Devices

**ANSI C63.4: 2014:** –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz  
Range of 9 kHz to 40GHz

**KDB558074 D01 V03r05:** Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

**RSS-247-Issue 2:** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

**RSS-Gen Issue 4:** General Requirements for Compliance of Radio Apparatus

## 1.2. Test Description

| FCC and IC Requirements                                 |                                |      |
|---------------------------------------------------------|--------------------------------|------|
| FCC Part 15.207<br>RSS-Gen 8.8                          | AC Power Conducted Emission    | PASS |
| FCC Part 15.247(a)(2)<br>RSS 247 5.2 (1)<br>RSS GEN 6.6 | 6dB Bandwidth & 99% Bandwidth  | PASS |
| FCC Part 15.247(d)<br>RSS 247 5.5                       | Spurious RF Conducted Emission | PASS |
| FCC Part 15.247(b)<br>RSS 247 5.4 (4)                   | Maximum Conducted Output Power | PASS |
| FCC Part 15.247(e)<br>RSS 247 5.2 (2)                   | Power Spectral Density         | PASS |
| FCC Part 15.205/ 15.209<br>RSS-Gen 8.9 8.10             | Radiated Emissions             | PASS |
| FCC Part 15.247(d)<br>RSS 247 5.5                       | Band Edge                      | PASS |

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

#### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test                                    | Measurement Uncertainty | Notes |
|-----------------------------------------|-------------------------|-------|
| Transmitter power conducted             | $\pm 0.57$ dB           | (1)   |
| Transmitter power Radiated              | $\pm 2.20$ dB           | (1)   |
| Conducted spurious emission 9KHz-40 GHz | $\pm 2.20$ dB           | (1)   |
| Occupied Bandwidth                      | $\pm 0.01$ ppm          | (1)   |
| Radiated Emission 30~1000MHz            | $\pm 4.10$ dB           | (1)   |
| Radiated Emission Above 1GHz            | $\pm 4.32$ dB           | (1)   |
| Conducted Disturbance 0.15~30MHz        | $\pm 3.20$ dB           | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2. General Description of EUT

|                       |                                                                               |
|-----------------------|-------------------------------------------------------------------------------|
| Product Name:         | Mirror with bluetooth player                                                  |
| Model/Type reference: | Verse                                                                         |
| Power supply:         | DC 12V from battery, charged by AC adapter                                    |
| Adapter information:  | Model: BX-1202000B<br>Input: 100-240V~, 50/60Hz, 0.8A Max<br>Output: 12V---2A |
| <b>Bluetooth BLE</b>  |                                                                               |
| Supported type:       | Version 4.0 for low Energy                                                    |
| Modulation:           | GFSK                                                                          |
| Operation frequency:  | 2402MHz to 2480MHz                                                            |
| Channel number:       | 40                                                                            |
| Channel separation:   | 2 MHz                                                                         |
| Antenna type:         | PCB Antenna                                                                   |
| Antenna gain:         | 0dBi                                                                          |

Note: For more details, please refer to the user's manual of the EUT.

### 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 39 channels provided to the EUT and Channel 00/19/39 were selected for BT4.0 test.

#### Operation Frequency List BT4.0 :

| Channel   | Frequency (MHz) |
|-----------|-----------------|
| <b>00</b> | <b>2402</b>     |
| 02        | 2404            |
| 03        | 2406            |
| ⋮         | ⋮               |
| <b>19</b> | <b>2440</b>     |
| ⋮         | ⋮               |
| 37        | 2476            |
| 38        | 2478            |
| <b>39</b> | <b>2480</b>     |

Note: The line display in grey were the channel selected for testing

## 2.4. Equipments Used during the Test

| Test Equipment             | Manufacturer         | Model No.                 | Serial No.       | Calibration Date | Calibration Due Date |
|----------------------------|----------------------|---------------------------|------------------|------------------|----------------------|
| LISN                       | R&S                  | ENV216                    | 3560.6550.1<br>2 | 2016/06/02       | 2017/06/01           |
| LISN                       | R&S                  | ESH2-Z5                   | 860014/010       | 2016/06/02       | 2017/06/01           |
| Bilog Antenna              | Sunol Sciences Corp. | JB1                       | A061713          | 2016/06/02       | 2017/06/01           |
| EMI Test Receiver          | R&S                  | ESCI                      | 103710           | 2016/06/02       | 2017/06/01           |
| Spectrum Analyzer          | Agilent              | E4407B                    | MY41440676       | 2016/05/21       | 2017/05/20           |
| Spectrum Analyzer          | Agilent              | N9020                     | US46220290       | 2017/01/16       | 2018/01/17           |
| Power Meter                | Anritsu              | ML2487B                   | 110553           | 2016/06/02       | 2017/06/01           |
| Power Sensor               | Anritsu              | MA2411B                   | 100345           | 2016/05/21       | 2017/05/20           |
| Controller                 | EM Electronics       | Controller EM 1000        | N/A              | 2016/05/21       | 2017/05/20           |
| Horn Antenna               | Sunol Sciences Corp. | DRH-118                   | A062013          | 2016/05/19       | 2017/05/18           |
| Active Loop Antenna        | SCHWARZBECK          | FMZB1519                  | 1519-037         | 2016/05/19       | 2017/05/18           |
| Amplifier                  | Agilent              | 8349B                     | 3008A02306       | 2016/05/19       | 2017/05/18           |
| Amplifier                  | Agilent              | 8447D                     | 2944A10176       | 2016/05/19       | 2017/05/18           |
| Temperature/Humidity Meter | Gangxing             | CTH-608                   | 02               | 2016/05/20       | 2017/05/19           |
| High-Pass Filter           | K&L                  | 9SH10-2700/X1<br>2750-O/O | N/A              | 2016/05/20       | 2017/05/19           |
| High-Pass Filter           | K&L                  | 41H10-1375/U1<br>2750-O/O | N/A              | 2016/05/20       | 2017/05/19           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX<br>104PEA-10M    | 10m              | 2016/06/02       | 2017/06/01           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX<br>104PEA-3M     | 3m               | 2016/06/02       | 2017/06/01           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX<br>104PEA-3M     | 3m               | 2016/06/02       | 2017/06/01           |
| RF Cable                   | Megalon              | RF-A303                   | N/A              | 2016/06/02       | 2017/06/01           |

The calibration interval was one year

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

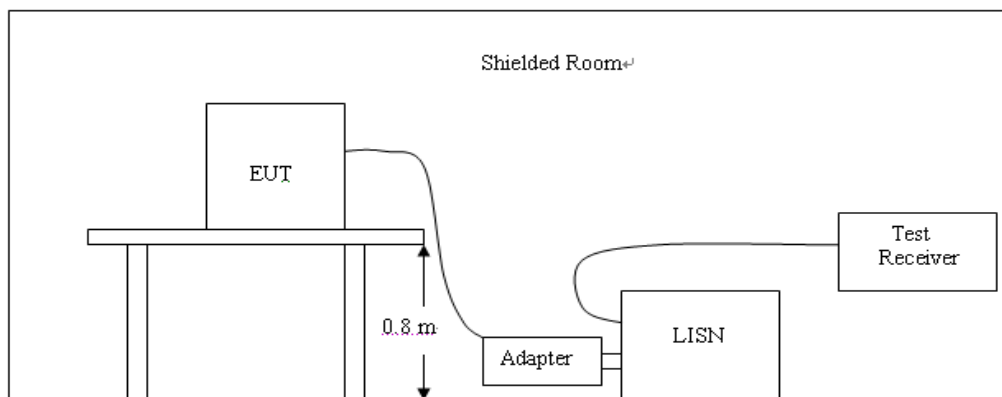


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

##### TEST RESULTS

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

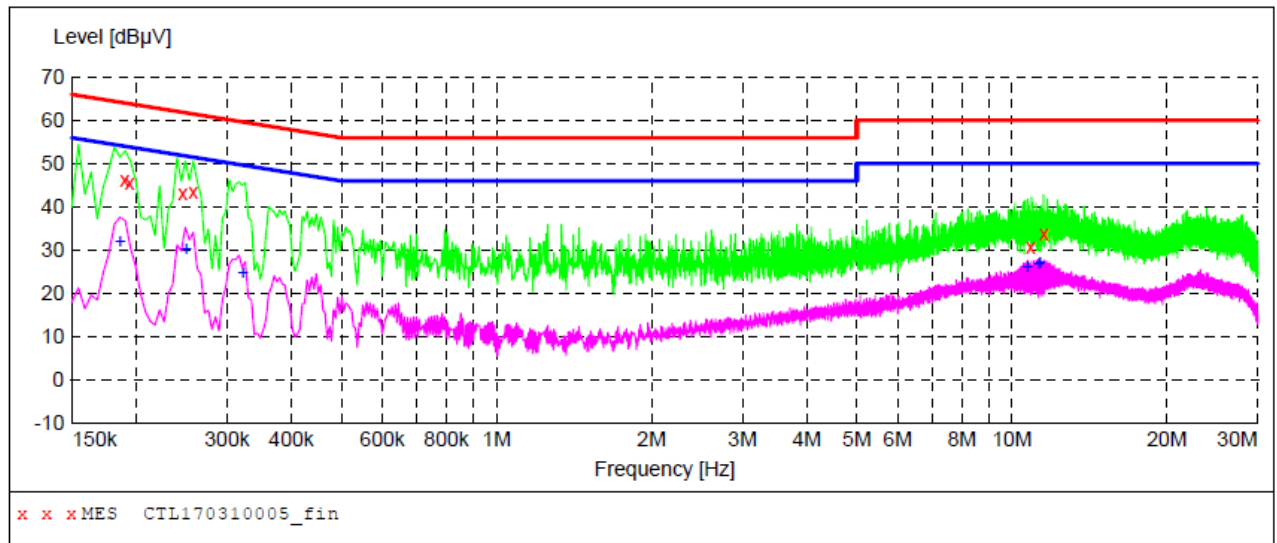**MEASUREMENT RESULT: "CTL170310005\_fin"**

3/10/2017 7:18PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.190000         | 46.10         | 10.2         | 64            | 17.9         | QP       | L1   | GND |
| 0.194000         | 45.50         | 10.2         | 64            | 18.4         | QP       | L1   | GND |
| 0.246000         | 43.10         | 10.2         | 62            | 18.8         | QP       | L1   | GND |
| 0.258000         | 43.30         | 10.2         | 62            | 18.2         | QP       | L1   | GND |
| 10.874000        | 30.60         | 10.6         | 60            | 29.4         | QP       | L1   | GND |
| 11.534000        | 33.80         | 10.6         | 60            | 26.2         | QP       | L1   | GND |


**MEASUREMENT RESULT: "CTL170310005\_fin2"**

3/10/2017 7:18PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.186000         | 32.00         | 10.2         | 54            | 22.2         | AV       | L1   | GND |
| 0.250000         | 30.40         | 10.2         | 52            | 21.4         | AV       | L1   | GND |
| 0.322000         | 24.70         | 10.2         | 50            | 25.0         | AV       | L1   | GND |
| 10.712000        | 26.30         | 10.6         | 50            | 23.7         | AV       | L1   | GND |
| 11.270000        | 27.00         | 10.6         | 50            | 23.0         | AV       | L1   | GND |
| 11.336000        | 27.30         | 10.6         | 50            | 22.7         | AV       | L1   | GND |

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

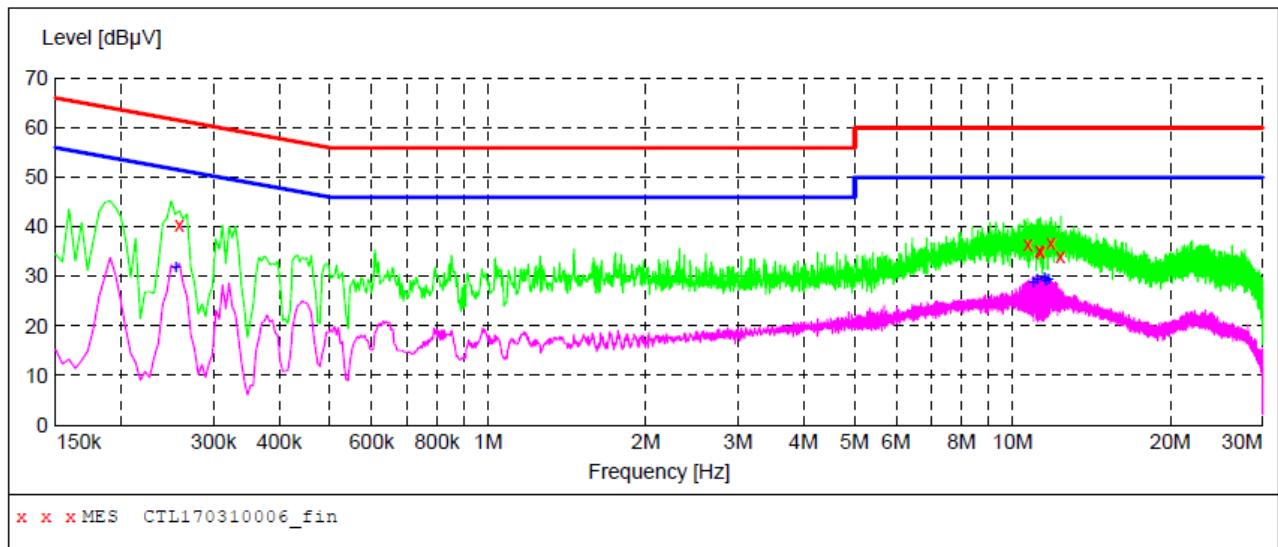**MEASUREMENT RESULT: "CTL170310006\_fin"**

3/10/2017 7:22PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.258000         | 40.40         | 10.2         | 62            | 21.1         | QP       | N    | GND |
| 10.706000        | 36.50         | 10.6         | 60            | 23.5         | QP       | N    | GND |
| 11.252000        | 35.40         | 10.6         | 60            | 24.6         | QP       | N    | GND |
| 11.312000        | 35.10         | 10.6         | 60            | 24.9         | QP       | N    | GND |
| 11.840000        | 36.80         | 10.6         | 60            | 23.2         | QP       | N    | GND |
| 12.344000        | 34.10         | 10.6         | 60            | 25.9         | QP       | N    | GND |

**MEASUREMENT RESULT: "CTL170310006\_fin2"**

3/10/2017 7:22PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.254000         | 31.90         | 10.2         | 52            | 19.7         | AV       | N    | GND |
| 10.952000        | 28.90         | 10.6         | 50            | 21.1         | AV       | N    | GND |
| 11.132000        | 29.50         | 10.6         | 50            | 20.5         | AV       | N    | GND |
| 11.516000        | 29.80         | 10.6         | 50            | 20.2         | AV       | N    | GND |
| 11.576000        | 29.30         | 10.6         | 50            | 20.7         | AV       | N    | GND |
| 11.708000        | 29.60         | 10.6         | 50            | 20.4         | AV       | N    | GND |

### 3.2. Radiated Emissions and Band Edge

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission


Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

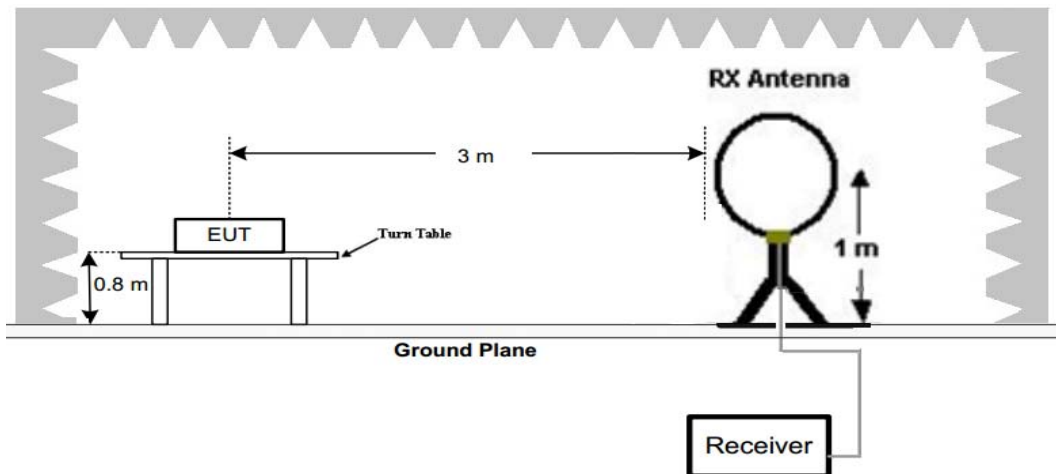

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

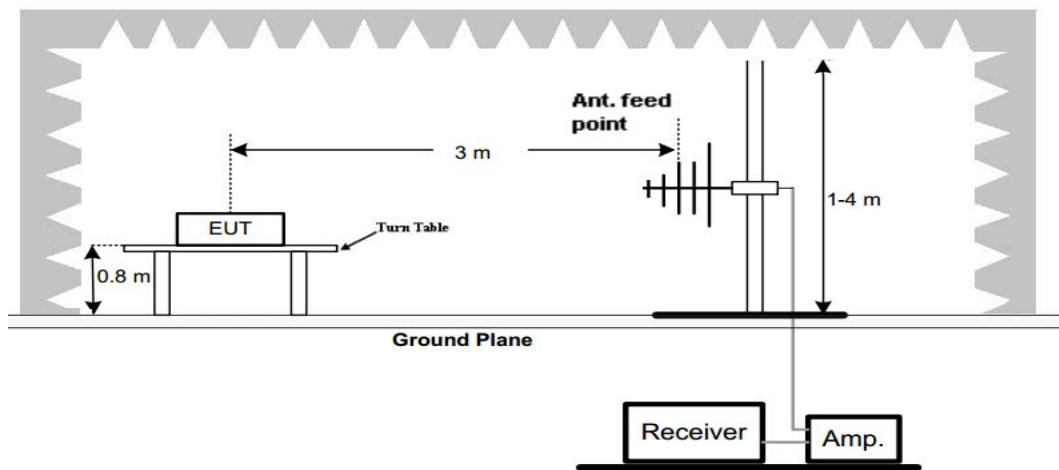

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

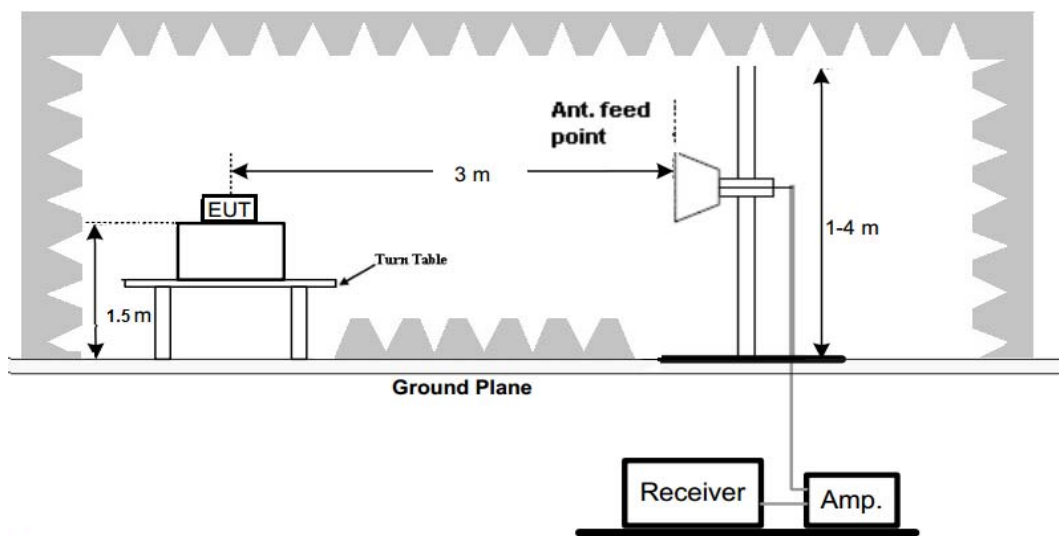

### Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

### TEST RESULTS

Remark:


1. For below 1GHz testing recorded worst at BLE low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

## For 30MHz-1GHz

## Horizontal

**SWEEP TABLE: "test (30M-1G)"**

|                    |           |                |          |         |            |
|--------------------|-----------|----------------|----------|---------|------------|
| Short Description: |           | Field Strength |          |         |            |
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |
| Frequency          | Frequency |                | Time     | Bandw.  |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | JB1        |

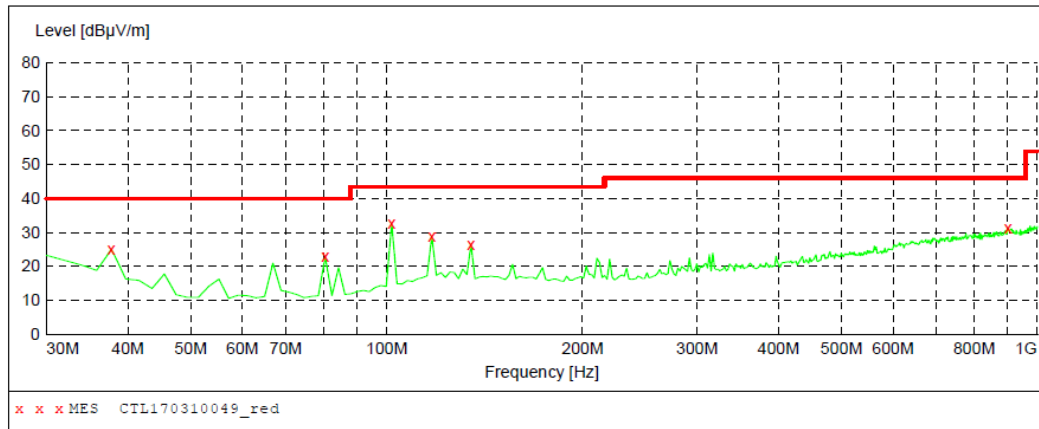**MEASUREMENT RESULT: "CTL170310049\_red"**


3/10/2017 6:48PM

| Frequency<br>MHz | Level<br>dBμV/m | Transd<br>dB | Limit<br>dBμV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 37.760000        | 25.00           | 14.8         | 40.0            | 15.0         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 80.440000        | 22.80           | 8.5          | 40.0            | 17.2         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 101.780000       | 32.70           | 11.6         | 43.5            | 10.8         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 117.300000       | 28.90           | 14.7         | 43.5            | 14.6         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 134.760000       | 26.50           | 14.4         | 43.5            | 17.0         | ---  | 0.0          | 0.00           | HORIZONTAL   |
| 901.060000       | 31.20           | 26.0         | 46.0            | 14.8         | ---  | 0.0          | 0.00           | HORIZONTAL   |

## Vertical

**SWEEP TABLE: "test (30M-1G)"**

|                    |           |                |          |         |            |
|--------------------|-----------|----------------|----------|---------|------------|
| Short Description: |           | Field Strength |          |         |            |
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |
| Frequency          | Frequency |                | Time     | Bandw.  |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | JB1        |

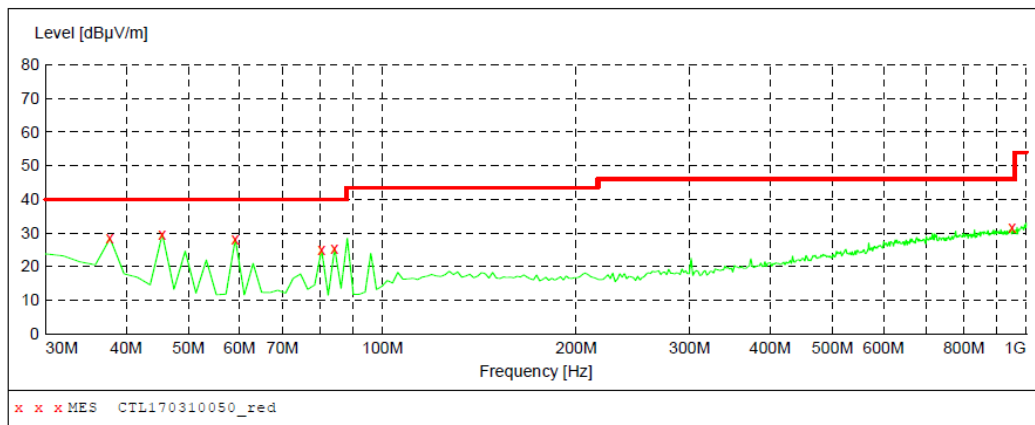**MEASUREMENT RESULT: "CTL170310050\_red"**

3/10/2017 6:50PM

| Frequency<br>MHz | Level<br>dBμV/m | Transd<br>dB | Limit<br>dBμV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 37.760000        | 28.40           | 14.8         | 40.0            | 11.6         | ---  | 0.0          | 0.00           | VERTICAL     |
| 45.520000        | 29.70           | 9.5          | 40.0            | 10.3         | ---  | 0.0          | 0.00           | VERTICAL     |
| 59.100000        | 28.20           | 8.0          | 40.0            | 11.8         | ---  | 0.0          | 0.00           | VERTICAL     |
| 80.440000        | 25.00           | 8.5          | 40.0            | 15.0         | ---  | 0.0          | 0.00           | VERTICAL     |
| 84.320000        | 25.40           | 8.8          | 40.0            | 14.6         | ---  | 0.0          | 0.00           | VERTICAL     |
| 951.500000       | 31.60           | 26.5         | 46.0            | 14.4         | ---  | 0.0          | 0.00           | VERTICAL     |

**For 1GHz to 25GHz****BT4.0 Mode (above 1GHz)**

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804.00         | 50.36                   | PK | 74.00          | 23.64       | 45.85            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 4804.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5122.50         | 43.92                   | PK | 74.00          | 30.08       | 36.71            | 34.38                 | 7.10              | 34.27              | 7.21                     |
| 5122.50         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7206.00         | 47.14                   | PK | 74.00          | 26.86       | 36.04            | 36.95                 | 9.18              | 35.03              | 11.10                    |
| 7206.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804.00         | 49.97                   | PK | 74.00          | 24.03       | 45.46            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 4804.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5350.50         | 42.61                   | PK | 74.00          | 31.39       | 35.05            | 34.69                 | 7.23              | 34.36              | 7.56                     |
| 5350.50         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7206.00         | 46.85                   | PK | 74.00          | 27.15       | 35.75            | 36.95                 | 9.18              | 35.03              | 11.10                    |
| 7206.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2440           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4880.00         | 50.17                   | PK | 74.00          | 23.83       | 43.92            | 33.60                 | 6.95              | 34.30              | 6.25                     |
| 4880.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5233.75         | 43.62                   | PK | 74.00          | 30.38       | 35.99            | 34.57                 | 7.16              | 34.10              | 7.63                     |
| 5233.75         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7320.00         | 47.01                   | PK | 74.00          | 26.99       | 35.32            | 37.46                 | 9.23              | 35.00              | 11.69                    |
| 7320.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2440           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4880.00         | 50.94                   | PK | 74.00          | 23.06       | 44.69            | 33.60                 | 6.95              | 34.30              | 6.25                     |
| 4880.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5235.75         | 42.41                   | PK | 74.00          | 31.59       | 34.77            | 34.58                 | 7.16              | 34.10              | 7.64                     |
| 5235.75         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7320.00         | 46.38                   | PK | 74.00          | 27.62       | 34.69            | 37.46                 | 9.23              | 35.00              | 11.69                    |
| 7320.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960.00         | 51.22                   | PK | 74.00          | 22.78       | 46.30            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 4960.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5325.50         | 43.16                   | PK | 74.00          | 30.84       | 35.62            | 34.67                 | 7.22              | 34.35              | 7.54                     |
| 5325.50         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7440.00         | 47.04                   | PK | 74.00          | 26.96       | 35.09            | 37.64                 | 9.28              | 34.97              | 11.95                    |
| 7440.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960.00         | 50.74                   | PK | 74.00          | 23.26       | 45.82            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 4960.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 5115.25         | 43.05                   | PK | 74.00          | 30.95       | 35.86            | 34.36                 | 7.10              | 34.27              | 7.19                     |
| 5115.25         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| 7440.00         | 48.03                   | PK | 74.00          | 25.97       | 36.08            | 37.64                 | 9.28              | 34.97              | 11.95                    |
| 7440.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Results of Band Edges Test (Radiated)**

| Frequency(MHz):    |                               |    | 2402              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2402.00            | 96.02                         | PK | --                | --             | 62.63                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2402.00            | 89.74                         | AV | --                | --             | 56.35                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2357.75            | 43.41                         | PK | 74.00             | 30.59          | 10.33                  | 28.52                       | 4.56                    | 0.00                      | 33.08                          |
| 2357.75            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 2390.00            | 45.72                         | PK | 74.00             | 28.28          | 12.40                  | 28.72                       | 4.60                    | 0.00                      | 33.32                          |
| 2390.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |
| 2400.00            | 46.39                         | PK | 74.00             | 27.61          | 13.00                  | 28.78                       | 4.61                    | 0.00                      | 33.39                          |
| 2400.00            | --                            | AV | 54.00             | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2402              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2402.00            | 95.88                         | PK | --                | --             | 62.49                  | 28.78                       | 4.61                    | 0                         | 33.39                          |
| 2402.00            | 89.02                         | AV | --                | --             | 55.63                  | 28.78                       | 4.61                    | 0                         | 33.39                          |
| 2357.75            | 42.15                         | PK | 74                | 31.85          | 9.07                   | 28.52                       | 4.56                    | 0                         | 33.08                          |
| 2357.75            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2390.00            | 46.37                         | PK | 74                | 27.63          | 13.05                  | 28.72                       | 4.60                    | 0                         | 33.32                          |
| 2390.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2400.00            | 46.14                         | PK | 74                | 27.86          | 12.75                  | 28.78                       | 4.61                    | 0                         | 33.39                          |
| 2400.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | HORIZONTAL                |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2480.00            | 97.24                         | PK | --                | --             | 63.62                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2480.00            | 91.08                         | AV | --                | --             | 57.46                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2483.50            | 43.61                         | PK | 74                | 30.39          | 9.98                   | 28.93                       | 4.70                    | 0.00                      | 33.63                          |
| 2483.50            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2491.95            | 42.98                         | PK | 74                | 31.02          | 9.32                   | 28.95                       | 4.71                    | 0.00                      | 33.66                          |
| 2491.95            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2500.00            | 47.06                         | PK | 74                | 26.94          | 13.38                  | 28.96                       | 4.72                    | 0.00                      | 33.68                          |
| 2500.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

| Frequency(MHz):    |                               |    | 2480              |                | Polarity:              |                             |                         | VERTICAL                  |                                |
|--------------------|-------------------------------|----|-------------------|----------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-<br>amplifier<br>(dB) | Correction<br>Factor<br>(dB/m) |
| 2480.00            | 98.07                         | PK | --                | --             | 64.45                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2480.00            | 92.14                         | AV | --                | --             | 58.52                  | 28.92                       | 4.70                    | 0.00                      | 33.62                          |
| 2483.50            | 43.25                         | PK | 74                | 30.75          | 9.62                   | 28.93                       | 4.70                    | 0.00                      | 33.63                          |
| 2483.50            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2489.05            | 43.06                         | PK | 74                | 30.94          | 9.4                    | 28.95                       | 4.71                    | 0.00                      | 33.66                          |
| 2489.05            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |
| 2500.00            | 46.91                         | PK | 74                | 27.09          | 13.23                  | 28.96                       | 4.72                    | 0.00                      | 33.68                          |
| 2500.00            | --                            | AV | 54                | --             | --                     | --                          | --                      | --                        | --                             |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.



### 3.3. Maximum Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

| BT4.0 |         |                       |             |        |
|-------|---------|-----------------------|-------------|--------|
| Type  | Channel | PK Output power (dBm) | Limit (dBm) | Result |
| GFSK  | 00      | 1.021                 | 30.00       | Pass   |
|       | 19      | 3.021                 |             |        |
|       | 39      | 3.056                 |             |        |

Note: 1.The test results including the cable lose.

### 3.4. Power Spectral Density

#### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

#### Test Configuration




#### Test Results

##### BT4.0


| Type | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|------|---------|-----------------------------------|------------------|--------|
| GFSK | 00      | -14.302                           | 8.00             | Pass   |
|      | 19      | -12.065                           |                  |        |
|      | 39      | -12.229                           |                  |        |

Test plot as follows:


## BT4.0

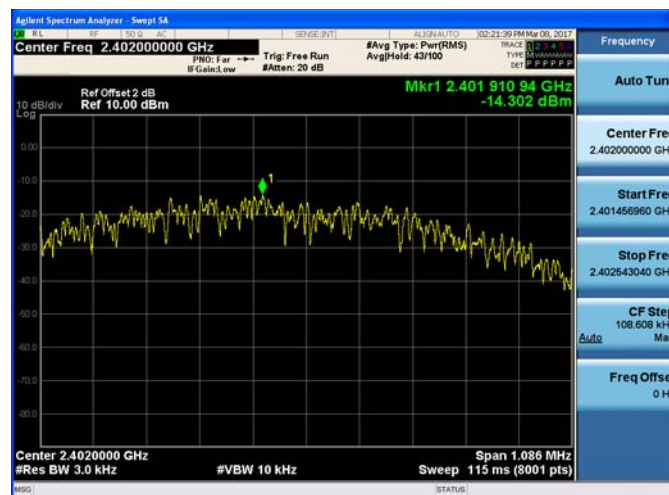

## CH00

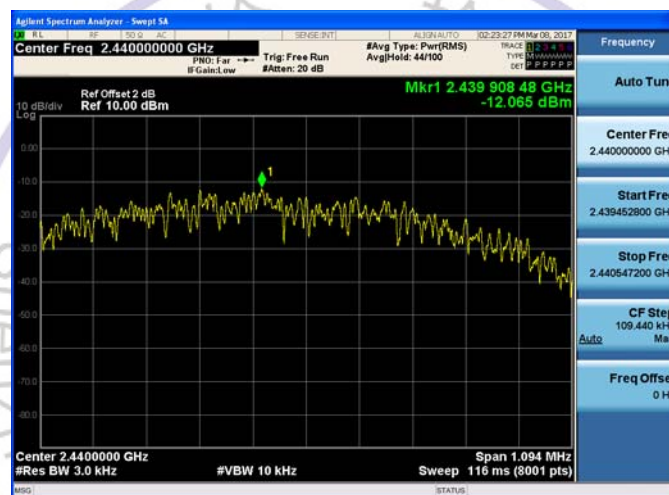

## CH19

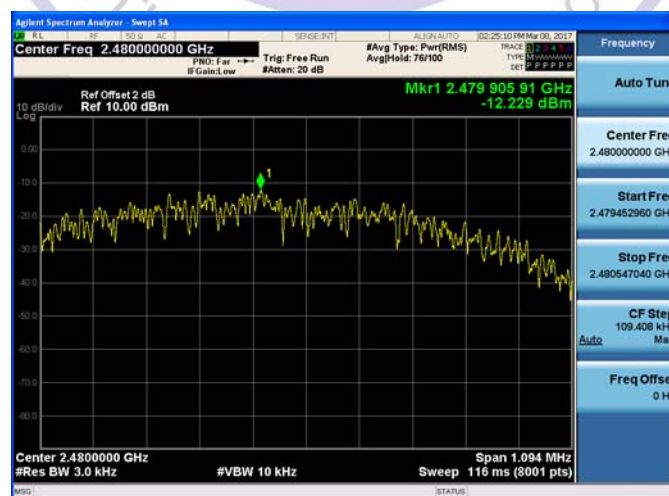

## CH39

### 3.5. 6dB Bandwidth

#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### Test Configuration




#### Test Results


| BT4.0 |         |                     |               |             |        |
|-------|---------|---------------------|---------------|-------------|--------|
| Type  | Channel | 6dB Bandwidth (MHz) | 99% OBW (MHz) | Limit (KHz) | Result |
| GFSK  | 00      | 0.6788              | 1.0469        | ≥500        | Pass   |
|       | 19      | 0.6840              | 1.0522        |             |        |
|       | 39      | 0.6838              | 1.0506        |             |        |

Test plot as follows:


## BT4.0

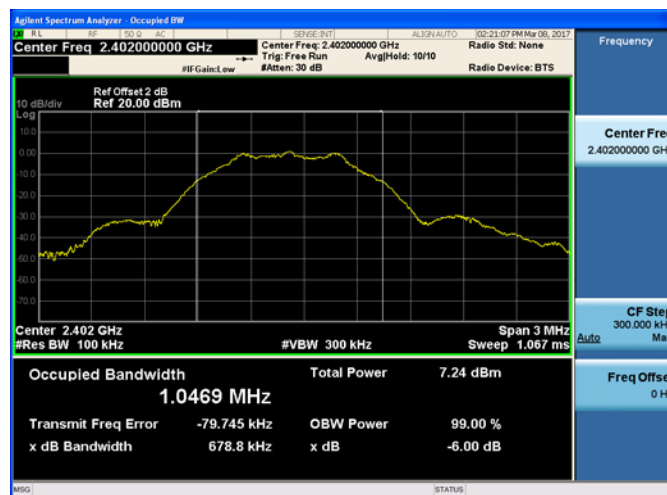

## CH00

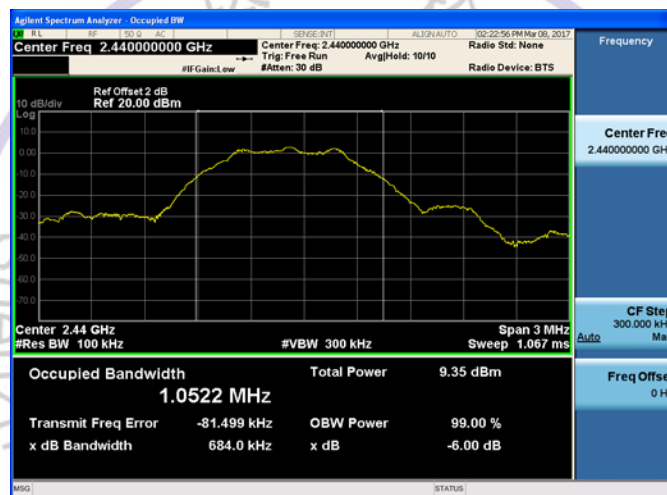

## CH19

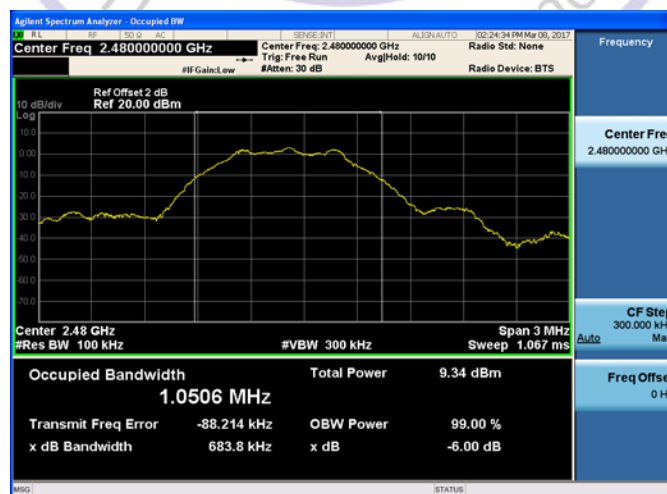

## CH39

### 3.6. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of §15.247 and RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in §15.209(a) and RSS-Gen are not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

#### Test Configuration




#### Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:


BT4.0 CH00

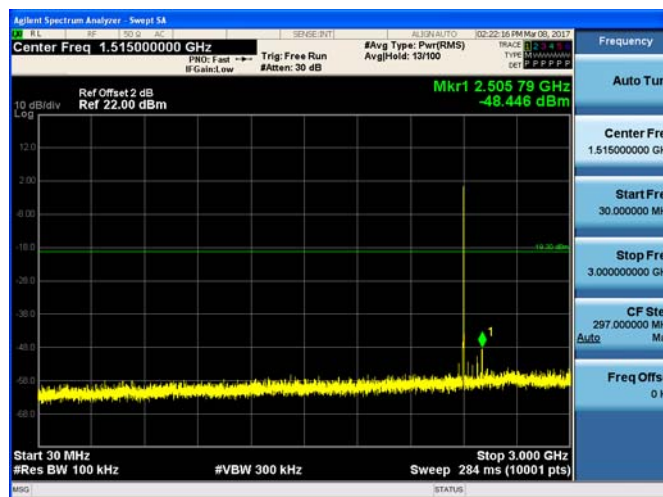


BT4.0 CH19

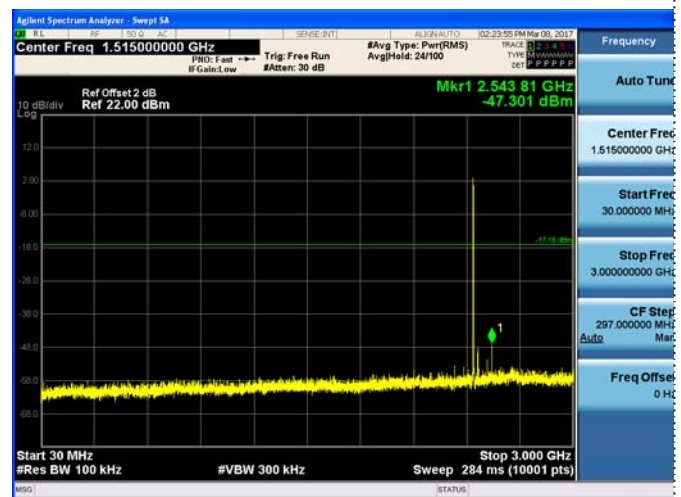

30MHz-3GHz

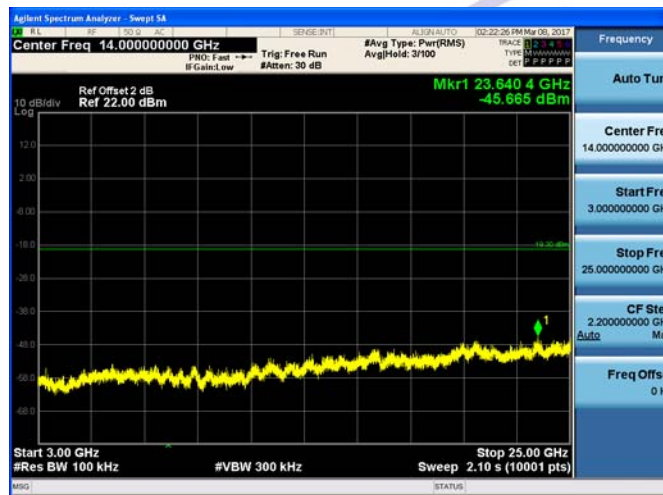

30MHz-3GHz

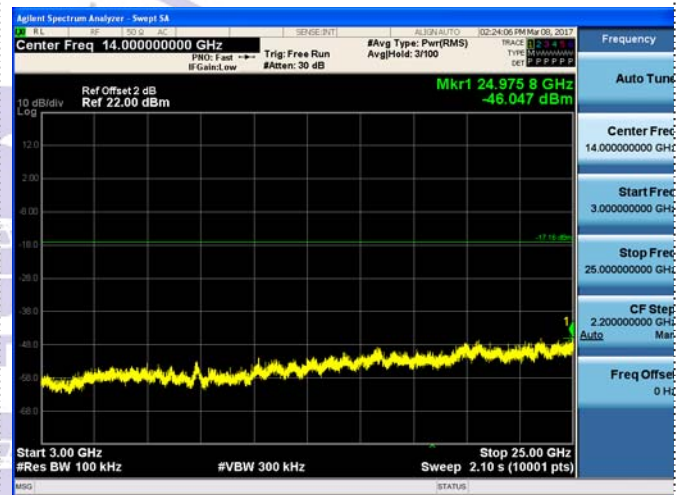


3GHz-25GHz


3GHz-25GHz



## BT4.0 CH39

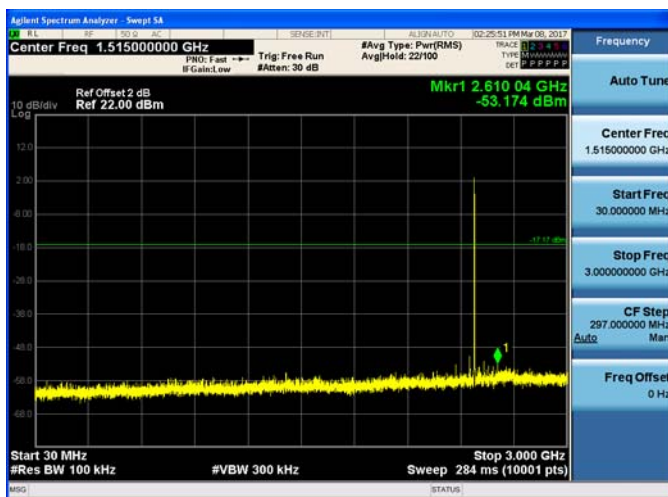


## 30MHz-3GHz

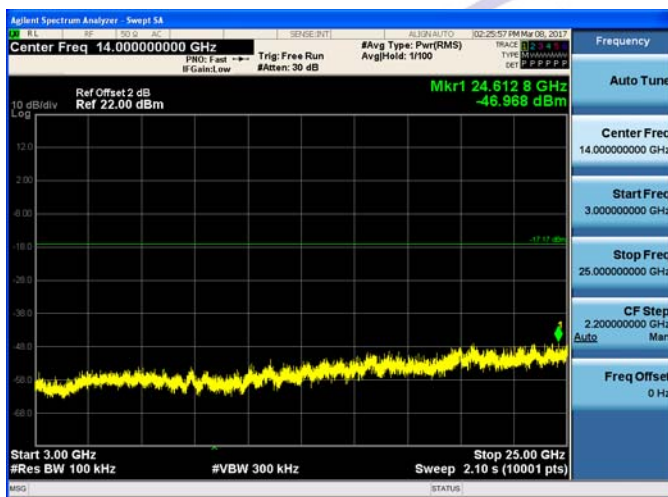

## 3GHz-25GHz

**Band-edge Measurements for RF Conducted Emissions:**

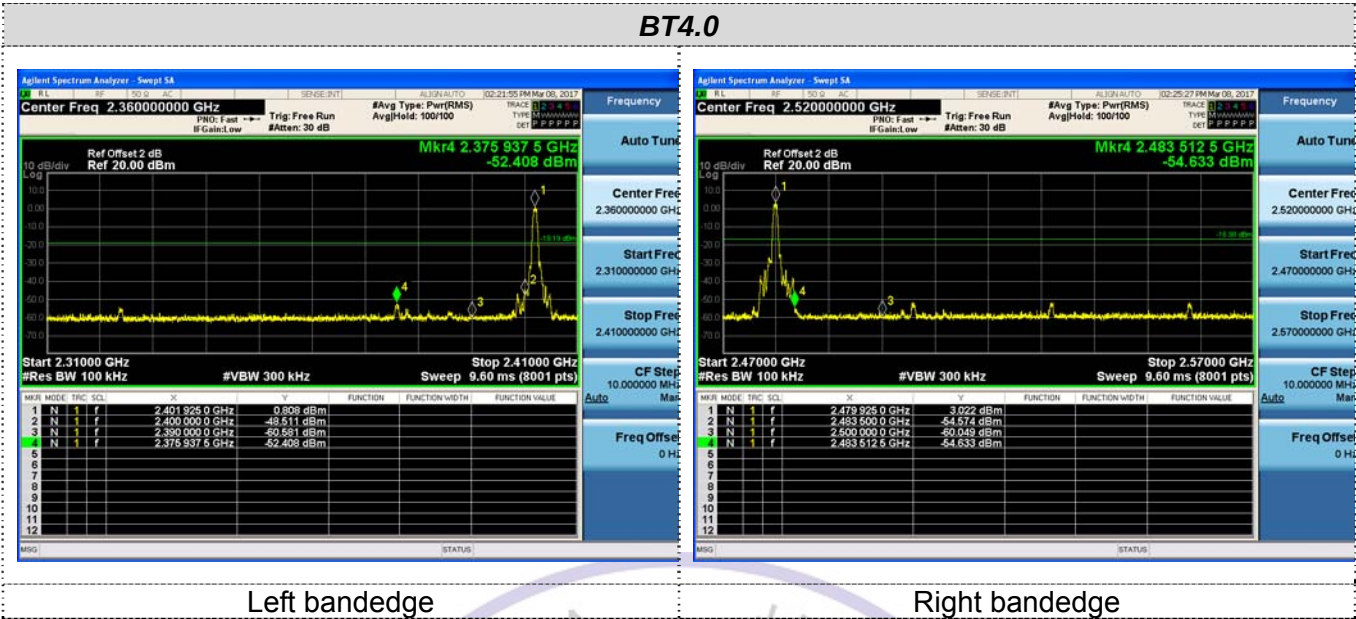

### 3.7. Antenna Requirement

#### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.



#### Test Result:

The maximum gain of antenna was 0dBi.



Antenna

#### 4. Test Setup Photos of the EUT

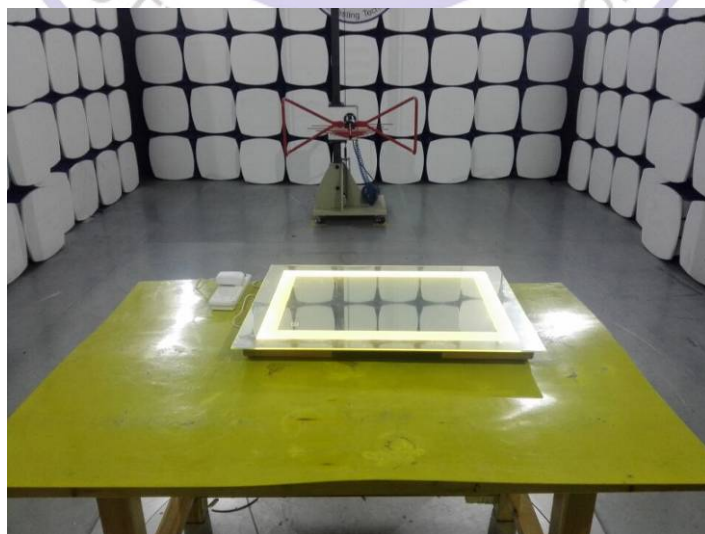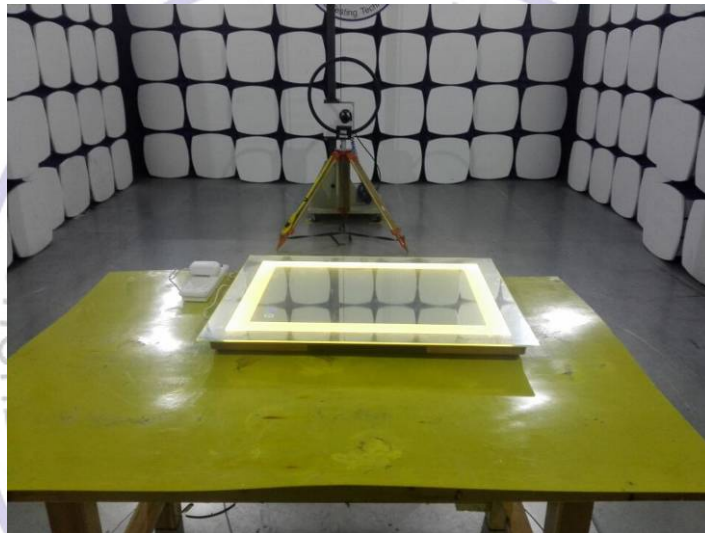




## 5. External and Internal Photos of the EUT



### External Photos of EUT




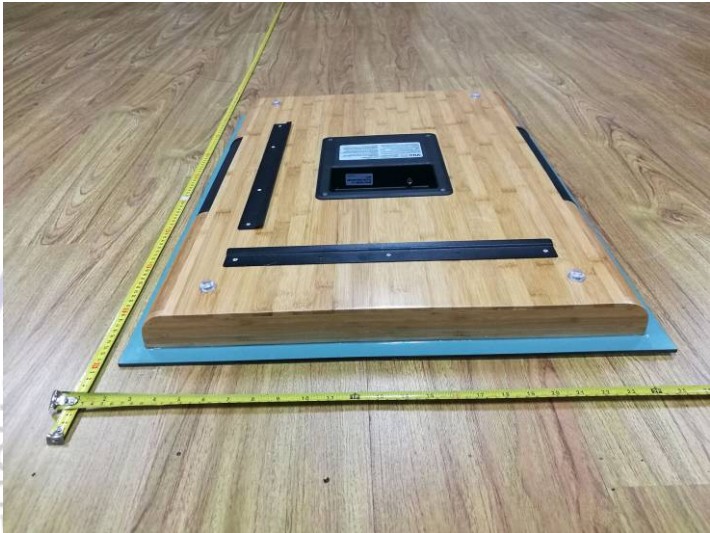



### Internal Photos of EUT

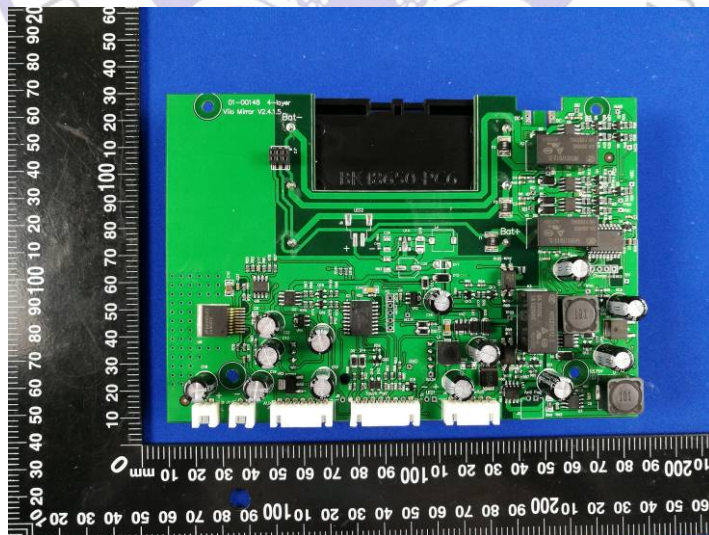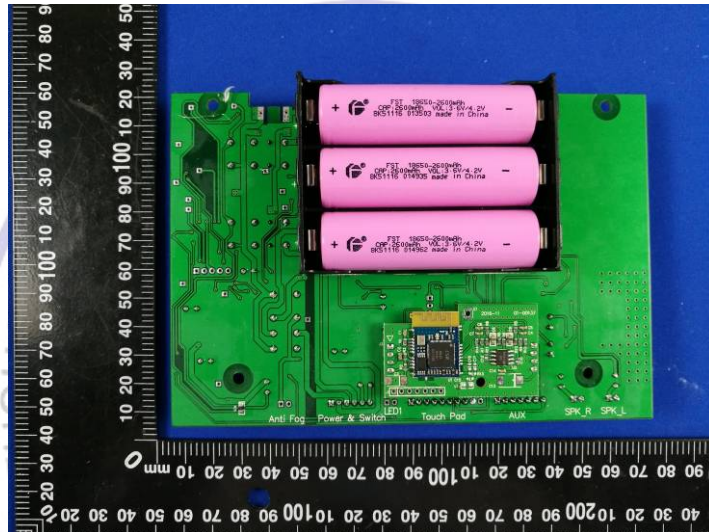

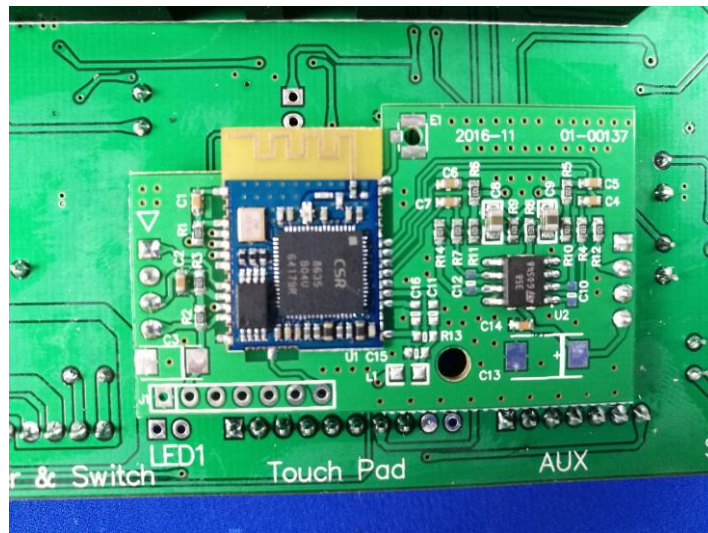

\*\*\*\*\* End of Report \*\*\*\*\*

