

Test report No:
25A0570R.701B

FCC TEST REPORT

Product Name	Tablet
Model and /or type reference	Rugged X20
Trademark	Cybernet
FCC ID	2AHZW-RUGGEDX20
Applicant's name / address	Cybernet Manufacturing Inc. 5 HOLLAND. BLDG.201 IRVINE, CA92618 USA
Test method requested, standard	47 CFR FCC Part 2 (Section 2.1093) IEEE Std 1528-2013 EN IEC/IEEE 62209-1528:2021 ANSI C95.1-2019 RSS-102.SAR.MEAS: 2025
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He / Technical Manager 
Date of issue	2026-02-04
Report Version	V1.0
Report template No	Template_FCC SAR-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Statement of Compliance	7
Used Equipment	8
Uncertainty	9
1 General Information.....	14
1.1 DUT Antenna Locations.....	15
1.2 Test Specification	16
1.3 RF exposure limits.....	17
2 SAR Measurements System Configuration.....	18
2.1 DASY6 SAR System Description	19
2.2 DASY6 Power Density System Description.....	20
2.3 Applications.....	21
2.4 Area & Zoom Scan Procedures	21
2.5 Uncertainty of Inter-/Extrapolation and Averaging	23
2.6 DASY6 E-Field Probe & EUmmWV Probe	24
2.7 Boundary Detection Unit and Probe Mounting Device.....	26
2.8 DATA Acquisition Electronics (DAE) and Measurement Server	26
2.9 Robot	27
2.10 Light Beam Unit.....	27
2.11 Device Holder.....	28
2.12 SAM Phantom.....	29
3 Tissue Simulating Liquid.....	30
3.1 The composition of the tissue simulating liquid.....	30
3.2 Measurement for Tissue Simulate Liquid	31
4 System Check.....	32
4.1 Justification for Extended Dipole Calibrations	33
4.2 Measurement for System Check.....	34
5 Test Configuration.....	35
5.1 SAR Test Reduction Procedure.....	35

5.2	Operation Configurations	35
5.2.1.	Wi-Fi Test Configuration	35
6	Description of Test Position	40
6.1	SAR Test Reduction Procedure	40
6.1.1.	Body-worn Test Position Conditions	40
6.1.2.	Hotspot Mode Test Position Conditions	41
6.2	Product Specific 10g Exposure Consideration	42
6.3	Measurement Process Diagram	42
7	Test Result	43
7.1	Measurement of RF conducted Power	43
7.2	Measurement of SAR and Power Density Test Results	53
7.2.1.	Measurement of SAR Test Data	53
7.2.2.	Measurement of Power Density Test Data	54
7.2.3.	SAR Measurement Variability	55
8	SAR And Power Density Validation Data	56
9	SAR And Power Density Test Data	58
10	Calibration Certificate	60
11	Test Setup Photo	61

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Jul. 24, 2025
Date (start test)	Aug. 18, 2025
Date (finish test)	Aug. 19, 2025

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	18 °C – 25 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
25A0570R.701B	V1.0	Initial issue of report.	2026-02-04

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. This report is based on the SAR test report 2570726R.701B. Update the applicant's information, product name and model, and these changes have no effect on RF performance. After technical evaluation, there is no need to retest any projects. All test data are taken from RF test report 2570726R.701B. The test results of these device samples are intended to demonstrate compliance with FCC 47CFR §2.1093, IEEE Std. 1528-2013, EN IEC/IEEE 62209-1528:2021, ANSI C95.1-2019, and RSS-102.SAR.MEAS:2025 requirements.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1 General Information.

STATEMENT OF COMPLIANCE

The maximum results of Specific Absorption Rate (SAR) and Power Density found during testing for Tablet, xTablet T1175, are as follows.

Equipment Class	Frequency Band		Maximum SAR (W/kg)
			Body SAR
6XD	WLAN	WLAN 6G	0.807
SAR Limited(W/kg)			1.60
Equipment Class	Frequency Band	Frequency Band	Total psPD(W/m^2)
6XD	WLAN	WLAN 6G	5.08
PD Limited(W/m^2)			10

USED EQUIPMENT

SAR Test and Power Density Test / TR6

Instrument	Manufacturer	Model No.	Serial No.	Next Cal. Date
Stäubli Robot TX60L	Stäubli	TX60L	F10/5C90A1/A/01	N/A
Controller	Stäubli	SP1	S-0034	N/A
Dipole Validation Kits	Speag	D6.5GHzV2	1084	2025.09.11
Dipole Validation Kits	Speag	5G Verification Source 10GHz	1055	2027.09.13
SAM Twin Phantom	Speag	SAM	TP-1562	N/A
Device Holder	Speag	SD 000 H01 HA	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1220	2026.03.13
E-Field Probe	Speag	EX3DV4	7761	2025.09.18
E-Field Probe	Speag	EUmmWV4	9681	2025.09.15
SAR Software	Speag	DASY6	V5.2 Build 162	N/A
Power Amplifier	MVE	MPC1018.50	C30002D	2026.05.16
Dual Directional Coupler	woken	0110A05A82Z-20	CMLC66W1A1	2026.05.16
Tissue fluid test probe	SPEAG	DAK 3.5	1308	N/A
Tissue fluid test probe	SPEAG	DAK 12.0	1204	N/A
Vector Network	Agilent	E5071C	MY46103316	2026.07.24
Signal Generator	R&S	SMBV100A	263697	2026.05.09
Power Meter	Keysight	N1912A	MY60300004	2026.05.16
Temperature/Humidity Meter	Rites	RTS-1909	THM-034	2026.04.29
Temperature/Humidity Meter	Rites	RTS-1909	THM-035	2026.04.29
Temperaturer	LKM	DTM3000	3777	2026.05.18

SAR Test and Power Density Test / TR6

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software Version
SAR Software	Speag	DASY6	V5.2 Build 162	N/A	V16.2.4.2448
Power Amplifier	MVE	MPC1018.50	C30002D	A.14.03	N/A
Vector Network	Agilent	E5071C	MY46103316	A.11.31	N/A
Signal Generator	R&S	SMBV100A	263697	V4.15.125.49	N/A
Power Meter	Keysight	N1912A	MY60300004	A2.06.01	N/A

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Uncertainty for System Validation 4MHz – 300 MHz								
Error Description	Unc. ±%	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) veff
Measurement System								
Probe Calibration	±13.3%	N	2	1	1	±6.65%	±6.65%	∞
Axial Isotropy	±0.5%	R	$\sqrt{3}$	0.7	0.7	±0.2%	±0.2%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±0.6%	R	$\sqrt{3}$	1	1	±0.4%	±0.4%	∞
Modulation	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%	∞
Integration Time	±0.0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%	∞
RF Ambient Noise	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
RF Ambient Reflections	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Max. SAR Eval.	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Dipole Related								
Deviation from exp. dipole	±5.5%	R	$\sqrt{3}$	0	0	±0.0%	±0.0%	∞
Dipole axis to liquid distance	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Dipole input power and SAR drift	±3.4%	R	$\sqrt{3}$	1	1	±2.0%	±2.0%	∞
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
SAR correction for deviations in conductivity and permittivity(target)	±5%	R	$\sqrt{3}$	1	0.84	±2.9%	±2.4%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%	∞
Liquid conductivity - temperature uncertainty	±1.7%	R	$\sqrt{3}$	0.78	0.71	±0.8%	±0.7%	
Liquid permittivity - temperature uncertainty	±0.3%	R	$\sqrt{3}$	0.23	0.26	±0.0%	±0.0%	
Combined Std. Uncertainty						±10.6%	±10.4%	
Expanded Std. Uncertainty						±21.2%	±20.9%	

DASY6 SAR Uncertainty								
Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram.								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±5.5%	N	1	1	1	±5.5%	±5.5%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%	∞
Combined Std. Uncertainty						±10.6%	±10.5%	361
Expanded STD Uncertainty						±21.2%	±21.1%	

DASY6 SAR Uncertainty								
Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram / 10 gram.								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.65%	N	1	1	1	±6.65%	±6.65%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%	∞
Max. SAR Eval.	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%	∞
Combined Std. Uncertainty						±12.0%	±12.0%	784
Expanded STD Uncertainty						±24.0%	±23.9%	

DASY6 SAR Uncertainty (Frequency band: 6 GHz–10 GHz range)								
Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(ci) (1 g)	(ci) (10 g)	Std. Unc. (1 g)	Std. Unc. (10 g)
Measurement System Errors								
CF	Probe Calibration	±18.6%	N	2	1	1	±9.3%	±9.3%
CF _{drift}	Probe Calibration Drift	±1.7%	R	√3	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±2.8%	R	√3	1	1	±1.6%	±1.6%
ISO	Probe Isotropy	±7.6%	R	√3	1	1	±4.4%	±4.4%
DAE	Other Probe+Electronic	±2.4%	N	1	1	1	±2.4%	±2.4%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±0.005 mm	N	1	0.5	0.5	±0.25%	±0.25%
DAT	Data Processing	±3.5%	N	1	1	1	±3.5%	±3.5%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) <i>DAK</i>	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
LIQ(Tσ)	Conductivity (temp.) <i>BB</i>	±2.4%	R	√3	0.78	0.71	±1.1%	±1.0%
EPS	Phantom Permittivity	±14.0%	R	√3	0.5	0.5	±4.0%	±4.0%
DIS	Distance DUT – TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D	Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
MOD	DUT Modulation <i>m</i>	±2.4%	R	√3	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±1.7%	R	√3	1	1	±1.0%	±1.0%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. <i>val</i>	±0.0%	N	1	1	1	±0%	±0%
RF _{in}	Unc. Input Power <i>val</i>	±0.0%	N	1	1	1	±0%	±0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling <i>p</i>	±0%	R	√3	1	1	±0%	±0%
u	Random uncertainty	±0.6% for 1g and ±0.5% for 10g	N	1	1	1	±0.6%	±0.5%
u(ΔSAR)	Combined Uncertainty						±14.2%	±13.9%
U	Expanded Uncertainty						±28.4%	±28.3%


cDASY6 Module mmWave Uncertainty Budget
Evaluation Distances to the Antennas > $\lambda/2\pi$
In Compliance with IEC/IEEE 63195

Symbol	Error Description	Uncertainty Value ($\pm$ dB)	Probability	Divisor	(Ci)	Standard Uncertainty ($\pm$ dB)
Uncertainty terms dependent on the measurement system						
CAL	Probe Calibration	0.49	N	1	1	0.49
COR	Probe correction	0.00	R	1.732	1	0.00
FRS	Frequency response	0.20	R	1.732	1	0.12
SCC	Sensor cross coupling	0.00	R	1.732	1	0.00
ISO	Isotropy	0.50	R	1.732	1	0.29
LIN	Linearity	0.20	R	1.732	1	0.12
PSC	Probe scattering	0.00	R	1.732	1	0.00
PPO	Probe positioning offset	0.30	R	1.732	1	0.17
PPR	Probe positioning repeatability	0.04	R	1.732	1	0.02
SMO	Sensor mechanical offset	0.00	R	1.732	1	0.00
PSR	Probe spatial resolution	0.00	R	1.732	1	0.00
FLD	Field impedance dependence	0.00	R	1.732	1	0.00
APD	Amplitude and phase drift	0.00	R	1.732	1	0.00
APN	Amplitude and phase noise	0.04	R	1.732	1	0.02
TR	Measurement area truncation	0.00	R	1.732	1	0.00
DAQ	Data acquisition	0.03	N	1	1	0.03
SMP	Sampling	0.00	R	1.732	1	0.00
REC	Field reconstruction	2.00	R	1.732	1	1.15
TRA	Forward transformation	0.00	R	1.732	1	0.00
SCA	Power density scaling	0.00	R	1.732	1	0.00
SAV	Spatial averaging	0.10	R	1.732	1	0.06
SDL	System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors						
PC	Probe coupling with DUT	0.00	R	1.732	1	0.00
MOD	Modulation response	0.40	R	1.732	1	0.23
IT	Integration time	0.00	R	1.732	1	0.00
RT	Response time	0.00	R	1.732	1	0.00
DH	Device holder influence	0.10	R	1.732	1	0.06
DA	DUT alignment	0.00	R	1.732	1	0.00
AC	RF ambient conditions	0.04	R	1.732	1	0.02
AR	Ambient reflections	0.04	R	1.732	1	0.02
MSI	Immunity / secondary reception	0.00	R	1.732	1	0.00
DRI	Drift of the DUT	0.00	R	1.732	1	0.00
u	Random uncertainty	0.00	N	1	1	0.00
u(P D)	Combined Std. Uncertainty					1.34
U	Expanded STD Uncertainty (95%)					2.68

1 GENERAL INFORMATION

Product Name	Tablet	
Model Name	Rugged X20	
Trademark	Cybernet	
FCC ID	2AHZW-RUGGEDX20	
Power Supply	Battery 7.74 Vdc, 12662 mAh, 98.1 Wh, 100 - 240 Vac, 50Hz / 60Hz	
Manufacturer	Cybernet Manufacturing Inc.	
Manufacturer Address	5 HOLLAND. BLDG.201 IRVINE.CA92618 USA	
SN	9S7ND821104SZNB000006	
Wireless specification	802.11n / ac / ax	
Frequency Range	U-NII 5: 5925 MHz~ 6425 MHz	
	U-NII 6: 6425 MHz~ 6525 MHz	
	U-NII 7: 6525 MHz~ 6875 MHz	
	U-NII 8: 6875 MHz~ 7125 MHz	
Channel Bandwidth	802.11n 20 MHz, 40 MHz	
	802.11ac 20 MHz, 40 MHz, 80 MHz, 160 MHz	
	802.11ax 20 MHz, 40 MHz, 80 MHz, 160 MHz	
Product Type	Indoor Client: 6XD	
Modulation technology	OFDM / OFDMA	
Smart System	☒	SISO
	☒	MIMO-CDD

1.1 DUT Antenna Locations

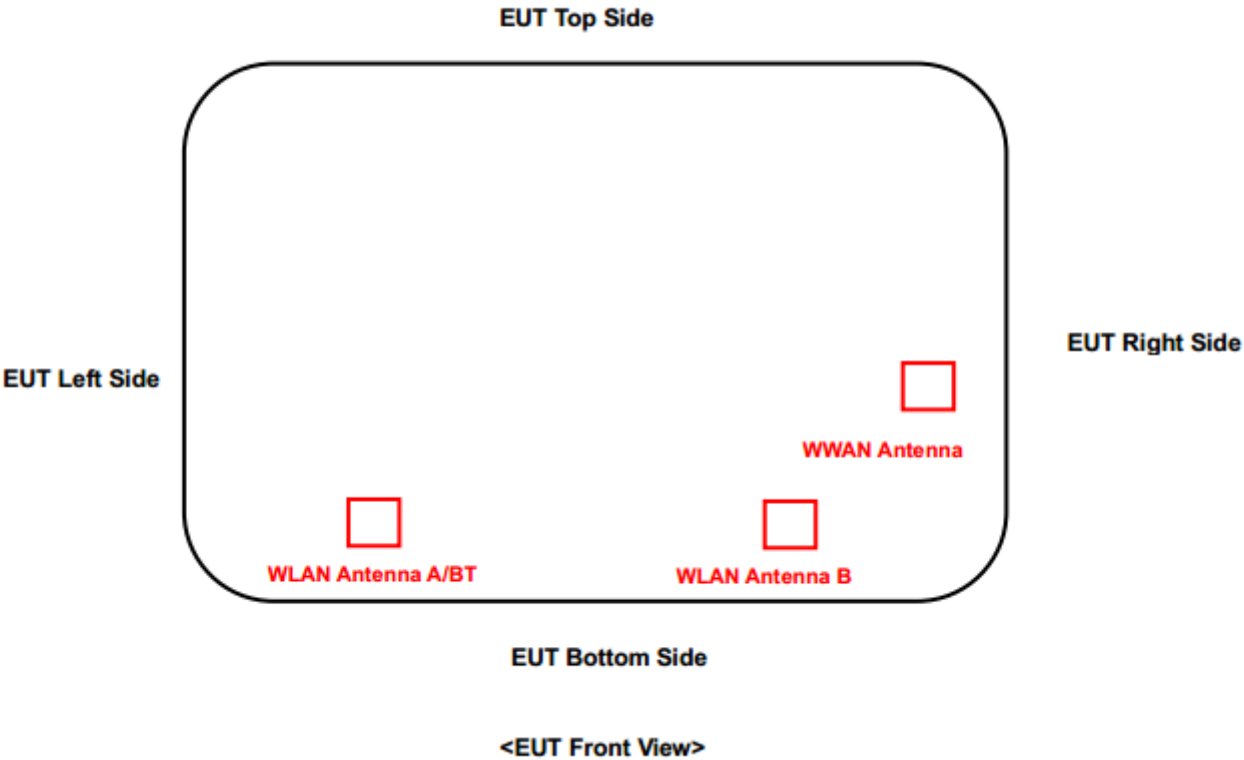

Note:

1) The test device is a Tablet Computer. The overall dimensions of this equipment are 295*195mm in length and width. Per KDB 616217 D04, because the diagonal distance of this device is $\geq 200\text{mm}$, Therefore, tests should be conducted at intervals of 0mm.

According to the distance between Wi-Fi antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing						
Mode	Exposure Condition	Back	Left Side	Right Side	Top Side	Bottom Side
WLAN Antenna	Product specific 1g SAR	Yes	Yes	Yes	Yes	Yes

Note:

1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

Remark:

As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information.

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
RSS-102.SAR.MEAS	Measurement Procedure for Assessing Specific Absorption Rate (SAR) Compliance in Accordance with RSS-102
IEC TR 63170	Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz
IEC/IEEE 63195-1	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) – Part 1: Measurement procedure
IEC/IEEE 63195-2	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) – Part 2: Computational procedure
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
EN IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz) (IEC/IEEE 62209-1528)
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02

1.3 RF exposure limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimetres of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device; it is 1.6 W/kg as averaged over any 1 gram of tissue.

SAR Exposure Limit		
	General Population / Uncontrolled Exposure ¹ (W/kg)	Occupational / Controlled Exposure ² (W/kg)
Spatial Peak SAR ³ (head or Body)	1.60	8.00
Spatial Peak SAR ⁴ (Whole Body)	0.08	0.40
Spatial Peak SAR ⁵ (Hands / Feet / Ankle / Wrist)	4.00	20.00
Power Density Exposure Limit (1,500 - 100,000 MHz)		
	General Population / Uncontrolled Exposure (mW/cm²) ⁶	Occupational / Controlled Exposure (mW/cm²)
Power Density (S)	1.0	5.0

Notes:

1. **General Population / Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.
2. **Occupational / Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
4. The Spatial Average value of the SAR averaged over the whole body.
5. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
6. $1 \text{ mW/cm}^2 = 10 \text{ W/m}^2$,

2 SAR MEASUREMENTS SYSTEM CONFIGURATION

SAR Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

SAR is expressed in units of Watts per kilogram (W/kg).

Power Tensity Definition

The power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:


$$S = \frac{1}{2} \text{Re}\{E \times H^*\} \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.

$$S_{av} = \frac{1}{2A} \Re \left(\int E \times H^* \cdot \hat{n} dA \right)$$

2.1 DASY6 SAR System Description

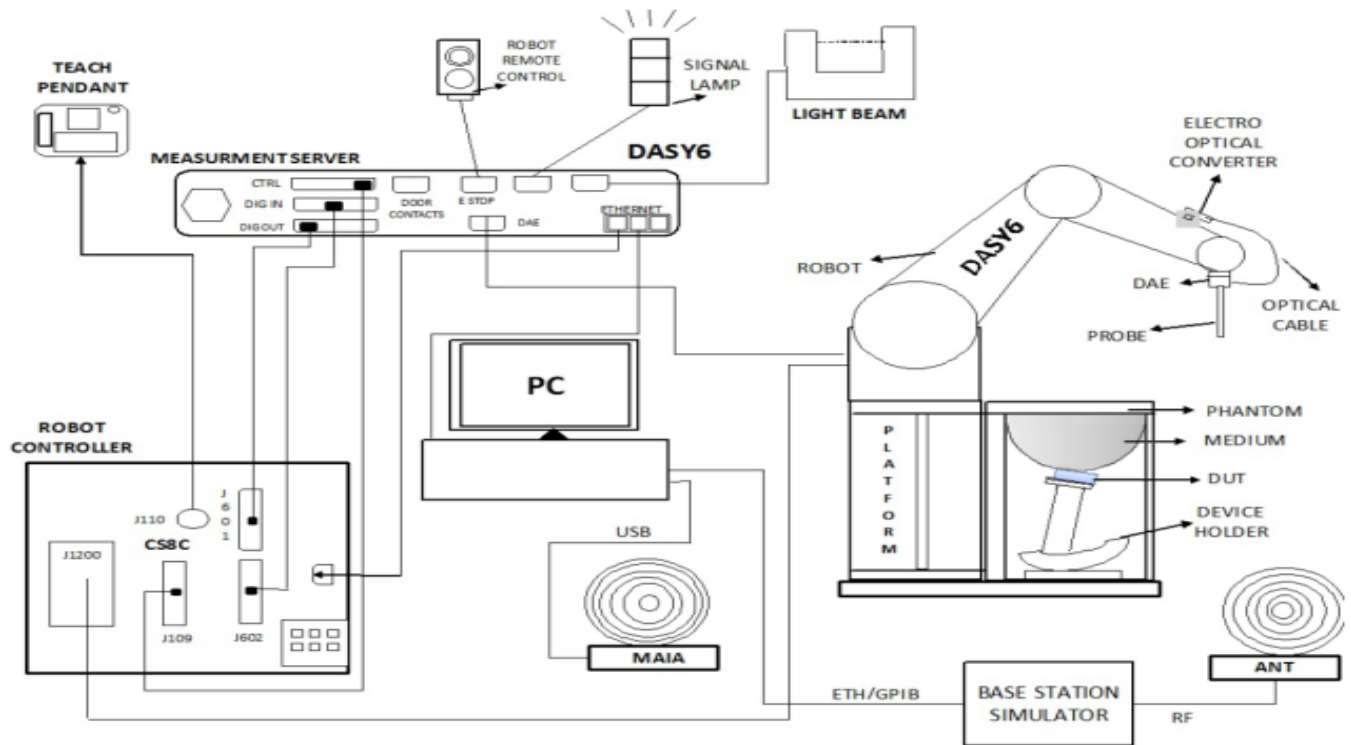


The DASY6 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
3. The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
4. The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
5. A computer running Windows 11 and the DASY6 software.
6. Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
7. The phantom, the device holder and other accessories according to the targeted measurement.

2.2 DASY6 Power Density System Description

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

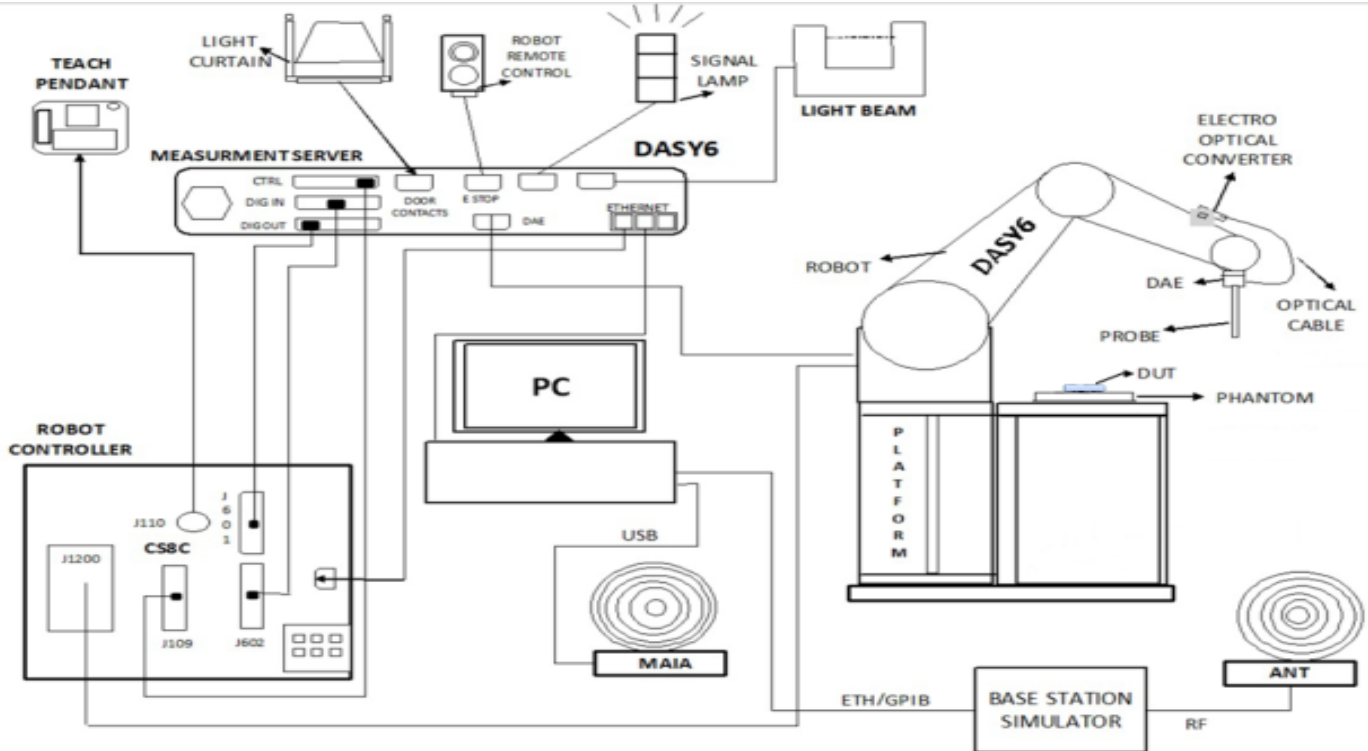

EUmmWVx probe:

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consists of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DuT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted.

2.3 Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEC/IEEE 62209-1528 others.

2.4 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution. The measure settings are referred in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area, Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom, Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
		Δz Zoom (n>1): between subsequent points		4–5 GHz: ≤ 2.5 mm 5–6 GHz: ≤ 2 mm
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

Note:

1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

2.5 Uncertainty of Inter-/Extrapolation and Averaging

To evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY6 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEC/IEEE 62209-1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = A e^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi}{2} \frac{\sqrt{x'^2 + y'^2}}{5a} \right)$$

$$f_2(x, y, z) = A e^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi}{2} \frac{y'}{3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$



2.6 DASY6 E-Field Probe & EUmmWV Probe

The SAR measurement is conducted with the diametric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The diametric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEC/IEEE 62209-1528, etc.) under ISO 17025. The calibration data are in Appendix D.

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	4 MHz to 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity	±0.1 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Calibration	ISO/IEC 17025 calibration service available
	
	
EX3DV4 E-Field Probe	
Probe setup on robot	

The EUmmWV3 probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. It has two dipoles optimally arranged to obtain pseudo-vector information. It has minimum 3 measurements/point, 120° rotated around probe axis. Sensors (0.8 mm length) printed on glass substrate protected by high density foam. Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.

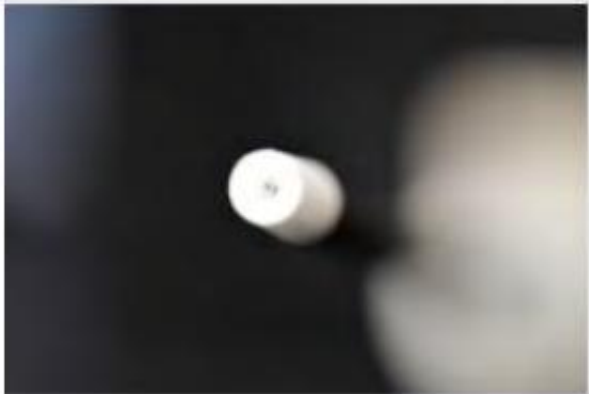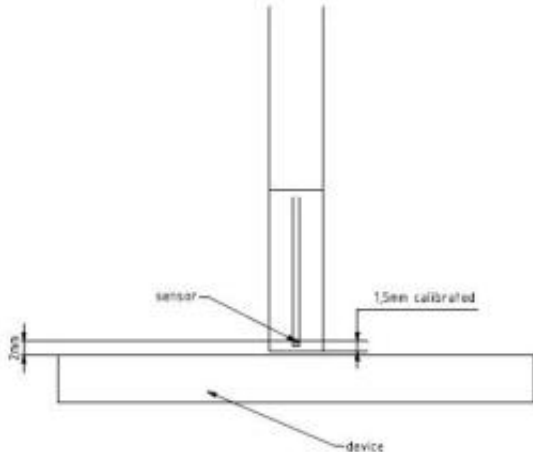Frequency Range	750 MHz - 110 GHz		
Dynamic Range	< 20 V/m - 10'000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)		
Position Precision	< 0.2 mm		
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm		
Applications	Electric field measurements of 5G devices and other mm-wave transmitters operating above 10 GHz in <2 mm distance from device (free-space) Power density, magnetic field, and far-field analysis using total field reconstruction (cDASY6 5G or ICEy-mmW module required)		
compatibility	cDASY6 + 5G-Module SW1.0 and higher		
			
E-Field mm-Wave Probe		Sensor to DUT Surface	

2.7 Boundary Detection Unit and Probe Mounting Device

The DASY probes use a precise connector and an additional holder for the probe, consisting of a plastic tube and a flexible silicon ring to center the probe. The connector at the DAE is flexibly mounted and held in the default position with magnets and springs. Two switching systems in the connector mount detect frontal and lateral probe collisions and trigger the necessary software response.




2.8 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

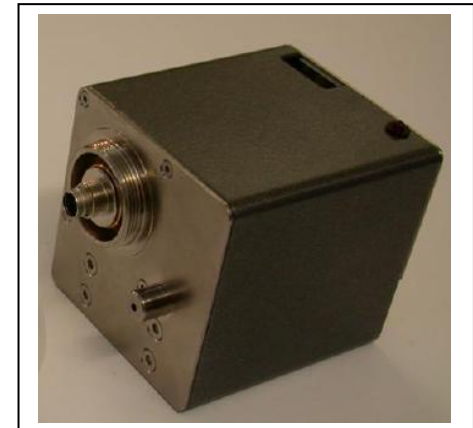

The DASY6 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board



2.9 Robot

The DASY6 system uses the high precision robots TX60 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY6 system, the CS8C robot controller version from Stäubli is used. The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



2.10 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



2.11 Device Holder

The DASY6 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY6 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

The DASY6 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



2.12 SAM Phantom

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



ELI Phantom

The SAM phantom is a fiberglass shell phantom with 2mm shell thickness. It has one measurement areas:

- ELI phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.



3 TISSUE SIMULATING LIQUID

3.1 The composition of the tissue simulating liquid

Simulate 10MHz~10000MHz liquid, manufactured by SPEAG

Table F.1 – Suggested recipes for achieving target dielectric properties, 30 MHz to 900 MHz

Frequency (MHz)	30	50		144		450		835	900	
Recipe source number	3	3	2	2	3	2	4	2	2	4
Ingredients (% by weight)										
De-ionized water	48,30	48,30	53,53	55,12	48,30	48,53	56	50,36	50,31	56
Tween 20			44,70	43,31		49,51		48,39	48,34	
Oxidized mineral oil							44			44
Diethyleneglycol monoethylether										
Triton X-100										
Diacetin	50,00	50,00			50,00					
DGBE										
NaCl	1,60	1,60	1,77	1,57	1,60	1,96		1,25	1,35	
Additives and salt	0,10	0,10			0,10					
Measured temperature dependence										
Temp. (°C)			21	21		21	20	21	21	20
$\epsilon_{\text{liquid temp. unc.}}$ (%)	0,8	0,1			0,1	0,1		0,04	0,04	
$\sigma_{\text{liquid temp. unc.}}$ (%)	2,8	2,8			2,6	4,2		1,6	1,6	

Table F.2 – Suggested recipes for achieving target dielectric properties, 1 800 MHz to 10 000 MHz

Frequency (MHz)	1 800		2 450	4 000	5 000	5 200	5 800	6 000	8 000	10 000
Recipe source number	2	4	4	4	4	1	1	4	5	5
Ingredients (% by weight)										
De-ionized water	54,23	56	56	56	56	65,53	65,53	56	67,8	66,0
Tween	45,27								31,1	33,0
Oxidized mineral oil		44	44	44	44			44		
Diethyleneglycol monoethylether						17,24	17,24			
Triton X-100						17,24	17,24			
Diacetin										
DGBE										
NaCl	0,50									
Additives and salt										
Measured temperature dependence										
Temp. (°C)	21	20	20	20	20	22	22	20	20	20
$\epsilon_{\text{liquid temp. unc.}}$ (%)	0,4					1,7	1,8			
$\sigma_{\text{liquid temp. unc.}}$ (%)	2,3					2,7	2,6			

NOTE 1 Multiple columns under a single frequency indicate optional recipes.

NOTE 2 Recipe source numbers: 1 verified by different labs, 2 Reference [59], 3 developed by IT'IS Foundation, 4 developed by IT'IS Foundation, 5 Reference [60].

NOTE 3 The values of $\epsilon_{\text{liquid temp. unc.}}$ and $\sigma_{\text{liquid temp. unc.}}$ are liquid temperature uncertainties described in O.9.6, based on measurements of the applicable liquid recipes given above. These are not part of the original publications but have been subsequently developed by the project team.

NOTE 4 The recipes at 8 000 MHz and 10 000 MHz are sufficiently broadband that they cover the frequency range of 6 000 MHz to 10 000 MHz within a tolerance of ± 10 % for permittivity and conductivity.


3.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent E5071C Network Analyzer (600 KHz-10000 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22 \pm 2 \text{ }^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp.($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
6500 Head	6500	34.5 (32.78~36.23)	6.07 (5.77~6.37)	35.29	6.24	22.00	2025.08.18

4 SYSTEM CHECK

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250Mw (below 3GHz) or 100Mw (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above $15\pm 0.5\text{ cm}$ in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

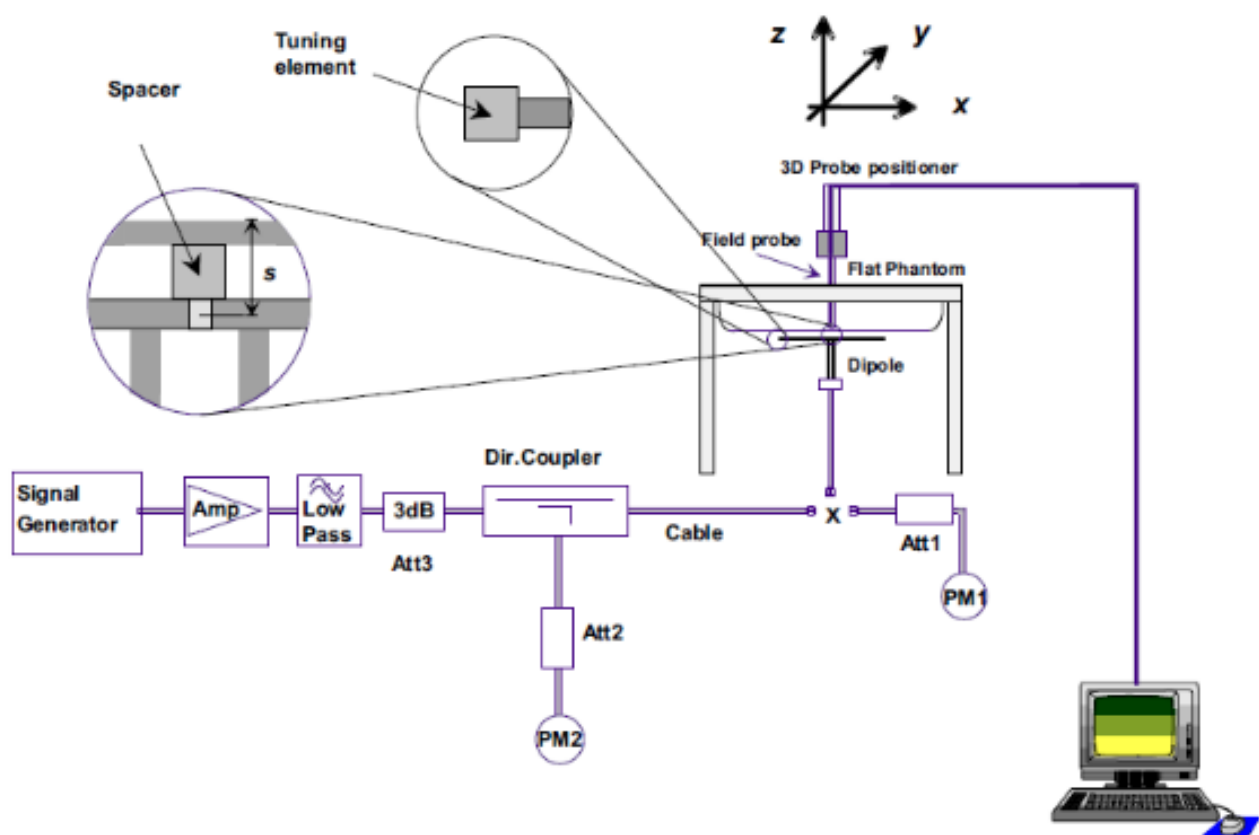

F-1. The microwave circuit arrangement used for SAR system check

4.1 Justification for Extended Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyser probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



4.2 Measurement for System Check

Validation Kit		Measured SAR 100mW		Measured SAR 1W		Normalized to 1W Target (±10%)		Liquid Temp.(°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)		
D6500V2	Head	27.4	5.62	274.0	56.20	293.0 (263.7~322.3)	54.10 (48.69~59.51)	22.00	2025.08.18

Validation Kit	Measur ed Max E-field 93.3 mW	Measured Power Density 93.3 mW	Measured Power Density 93.3 mW	Max E-field	Target Power Density	Target Power Density	Measured Date
	(V/m)	1cm ² Total PD (W/m ²)	4cm ² Total PD (W/m ²)	(V/m)	1cm ² Total PD (W/m ²)	4cm ² Total PD (W/m ²)	
5G Verification Source 10 GHz	144	59.2	54.3	152 (136.8~167.2)	60.4 (54.36~66.44)	56.1 (50.49~61.71)	2025.08.19

5 TEST CONFIGURATION

5.1 SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

5.2 Operation Configurations

5.2.1. Wi-Fi Test Configuration

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are

required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the *reported* SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.

Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for

an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM&OFDMA SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM&OFDMA configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following :

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for

SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

- **OFDM&OFDMA Transmission Mode SAR Test Configuration and Channel Selection Requirements**

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

- **SAR Test Requirements for OFDM&OFDMA configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode

configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6 GHz WiFi SAR Procedures

Initial Test Configuration: An initial test configuration is determined for OFDMA transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for subsequent test configuration.

- **Power Density Test Requirements**

Per October 2020 & April 2021 TCB Workshop interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub.248227 v02r02. WLAN 6GHz SAR is measured by using 6-7GHz parameters per IEC/IEEE 62209-1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.

- 1) Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ with the grid step (0.0625λ) for determining compliance at $d=2\text{mm}$.
- 2) According to October 2020 TCB Workshop Interim procedures power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty $> 30\%$. Total expanded uncertainty of 2.68 dB (85%) was used to determine the psPD measurement scaling factor.
- 3) Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations

6 DESCRIPTION OF TEST POSITION



6.1 SAR Test Reduction Procedure

6.1.1. Body-worn Test Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

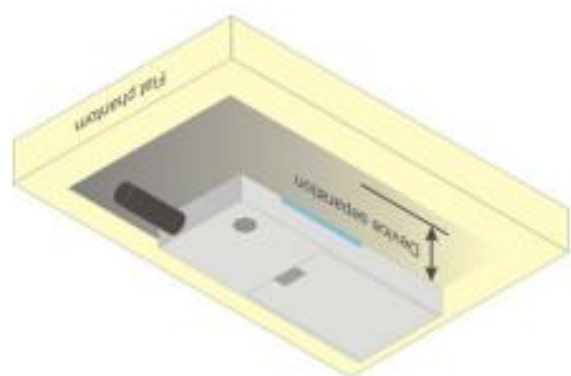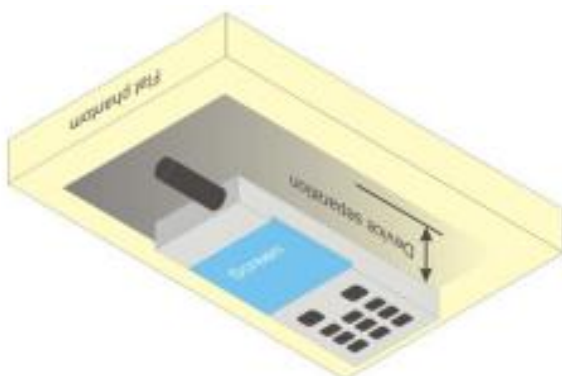

6.1.2. Hotspot Mode Test Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

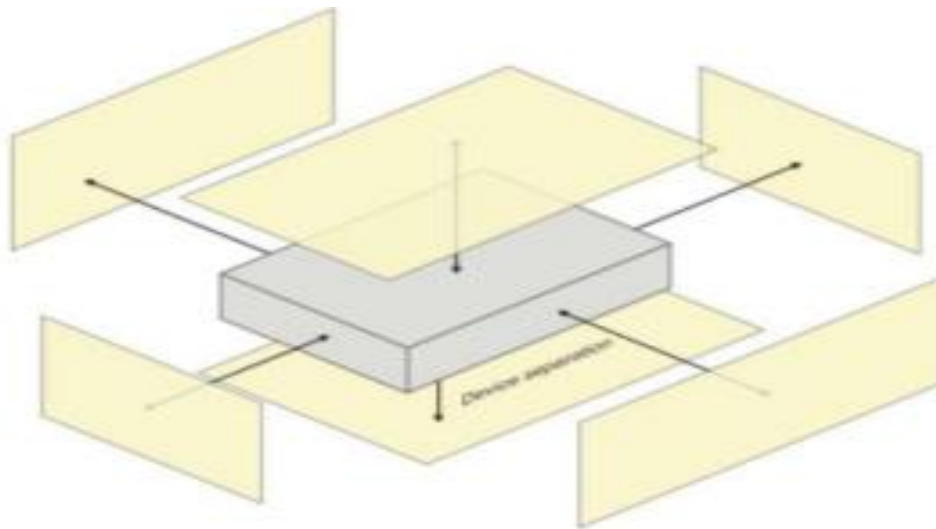


6.2 Product Specific 10g Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modems and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

6.3 Measurement Process Diagram

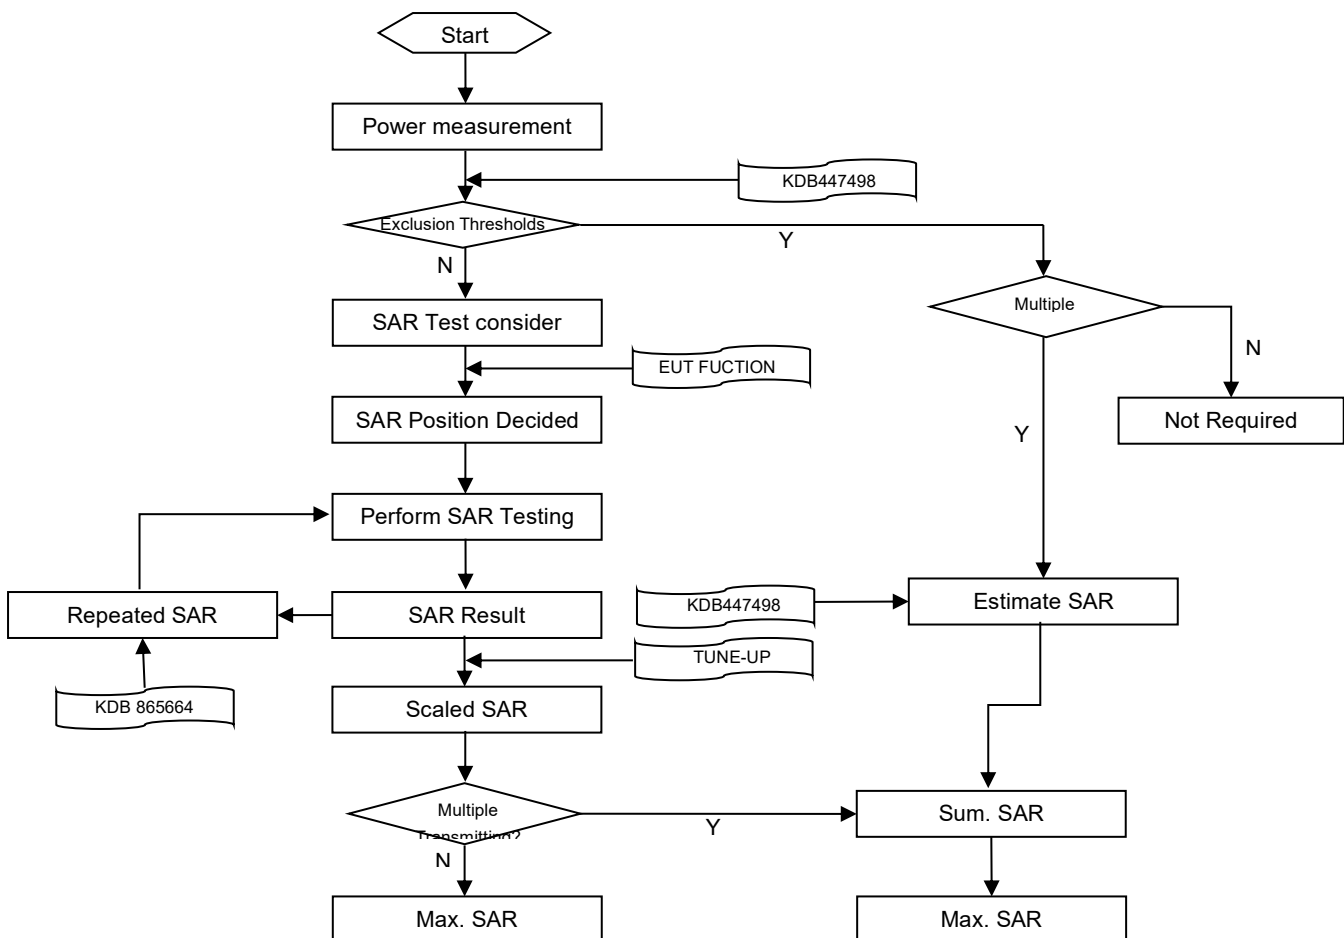

7 TEST RESULT

7.1 Measurement of RF conducted Power

6GHz 802.11n HT20 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5955	2.04	2.40	5.23	3.00	6.00	1.247	1.148	1.194	87.80
6175	2.44	2.33	5.40	3.00	6.00	1.138	1.167	1.148	
6415	2.03	2.33	5.19	3.00	6.00	1.250	1.167	1.205	
6435	2.10	2.53	5.33	3.00	6.00	1.230	1.114	1.167	
6475	2.24	2.66	5.47	3.00	6.00	1.191	1.081	1.130	
6515	2.41	2.92	5.68	3.00	6.00	1.146	1.019	1.076	
6535	2.38	2.73	5.57	3.00	6.00	1.153	1.064	1.104	
6695	2.54	2.70	5.63	3.00	6.00	1.112	1.072	1.089	
6855	2.45	2.53	5.50	3.00	6.00	1.135	1.114	1.122	
6875	2.46	2.55	5.52	3.00	6.00	1.132	1.109	1.117	
6895	2.18	2.47	5.34	3.00	6.00	1.208	1.130	1.164	
6995	2.07	2.47	5.28	3.00	6.00	1.239	1.130	1.180	
7115	-2.45	-1.53	1.04	-1.00	2.00	1.396	1.130	1.247	

6GHz 802.11n HT40 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5965	5.09	5.63	8.38	6.00	9.00	1.233	1.089	1.153	87.18
6165	5.08	5.25	8.18	6.00	9.00	1.236	1.189	1.208	
6405	4.71	5.39	8.07	6.00	9.00	1.346	1.151	1.239	
6445	5.10	5.70	8.42	6.00	9.00	1.230	1.072	1.143	
6485	4.54	5.52	8.07	6.00	9.00	1.400	1.117	1.239	
6525	4.70	5.71	8.24	6.00	9.00	1.349	1.069	1.191	
6565	5.14	5.58	8.38	6.00	9.00	1.219	1.102	1.153	
6685	5.22	5.37	8.31	6.00	9.00	1.197	1.156	1.172	
6845	5.28	5.17	8.24	6.00	9.00	1.180	1.211	1.191	
6885	4.50	4.66	7.59	6.00	9.00	1.413	1.361	1.384	
6925	5.03	5.38	8.22	6.00	9.00	1.250	1.153	1.197	
6965	4.94	5.26	8.11	6.00	9.00	1.276	1.186	1.227	
7085	5.24	5.62	8.44	6.00	9.00	1.191	1.091	1.138	

6GHz 802.11ac VHT20 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5955	2.11	2.69	5.42	3.00	6.00	1.227	1.074	1.143	86.49
6175	2.19	2.49	5.35	3.00	6.00	1.205	1.125	1.161	
6415	2.05	2.63	5.36	3.00	6.00	1.245	1.089	1.159	
6435	2.11	2.64	5.39	3.00	6.00	1.227	1.086	1.151	
6475	2.18	2.70	5.46	3.00	6.00	1.208	1.072	1.132	
6515	2.19	2.88	5.53	3.00	6.00	1.205	1.028	1.114	
6535	2.14	2.66	5.42	3.00	6.00	1.219	1.081	1.143	
6695	2.26	2.49	5.39	3.00	6.00	1.186	1.125	1.151	
6855	2.20	2.28	5.25	3.00	6.00	1.202	1.180	1.189	
6875	2.29	2.32	5.32	3.00	6.00	1.178	1.169	1.169	
6895	2.20	2.45	5.34	3.00	6.00	1.202	1.135	1.164	
6995	1.89	3.31	5.12	3.00	6.00	1.291	0.931	1.225	
7115	-2.74	-1.54	0.91	-1.00	2.00	1.493	1.132	1.285	

6GHz 802.11ac VHT40 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5965	4.94	5.08	8.02	6.00	9.00	1.276	1.236	1.253	86.11
6165	5.00	4.79	7.91	6.00	9.00	1.259	1.321	1.285	
6405	4.57	5.01	7.81	6.00	9.00	1.390	1.256	1.315	
6445	4.42	5.11	7.79	6.00	9.00	1.439	1.227	1.321	
6485	4.60	5.19	7.92	6.00	9.00	1.380	1.205	1.282	
6525	4.91	5.41	8.18	6.00	9.00	1.285	1.146	1.208	
6565	5.04	5.31	8.19	6.00	9.00	1.247	1.172	1.205	
6685	5.20	5.15	8.19	6.00	9.00	1.202	1.216	1.205	
6845	5.16	4.94	8.06	6.00	9.00	1.213	1.276	1.242	
6885	4.75	4.96	7.87	6.00	9.00	1.334	1.271	1.297	
6925	5.01	5.16	8.10	6.00	9.00	1.256	1.213	1.230	
6965	4.87	5.03	7.96	6.00	9.00	1.297	1.250	1.271	
7085	5.16	5.42	8.30	6.00	9.00	1.213	1.143	1.175	

6GHz 802.11ac VHT80 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5985	7.68	7.92	10.81	8.00	11.00	1.076	1.019	1.045	85.29
6145	7.63	7.65	10.65	8.00	11.00	1.089	1.084	1.084	
6385	7.50	7.76	10.64	8.00	11.00	1.122	1.057	1.086	
6465	7.33	8.02	10.70	8.00	11.00	1.167	0.995	1.072	
6545	7.94	8.27	11.12	8.00	11.00	1.014	0.940	0.973	
6625	7.86	8.05	10.97	8.00	11.00	1.033	0.989	1.007	
6705	7.90	7.89	10.91	8.00	11.00	1.023	1.026	1.021	
6785	8.03	7.94	11.00	8.00	11.00	0.993	1.014	1.000	
6865	7.84	7.80	10.83	8.00	11.00	1.038	1.047	1.040	
6945	7.77	7.97	10.88	8.00	11.00	1.054	1.007	1.028	
7025	7.54	7.92	10.74	8.00	11.00	1.112	1.019	1.062	

6GHz 802.11ac VHT160 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
6025	9.97	10.21	13.10	11.00	14.00	1.268	1.199	1.230	85.29
6185	9.97	10.00	13.00	11.00	14.00	1.268	1.259	1.259	
6345	9.74	10.05	12.91	11.00	14.00	1.337	1.245	1.285	
6505	10.04	10.45	13.26	11.00	14.00	1.247	1.135	1.186	
6665	10.33	10.20	13.28	11.00	14.00	1.167	1.202	1.180	
6825	10.53	10.37	13.46	11.00	14.00	1.114	1.156	1.132	
6985	10.11	10.61	13.38	11.00	14.00	1.227	1.094	1.153	

6GHz 802.11ax HE20 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5955	2.52	2.86	5.70	3.00	6.00	1.117	1.033	1.072	90.57
6175	2.34	2.54	5.45	3.00	6.00	1.164	1.112	1.135	
6415	2.20	2.64	5.44	3.00	6.00	1.202	1.086	1.138	
6435	2.06	2.77	5.44	3.00	6.00	1.242	1.054	1.138	
6475	2.11	2.86	5.51	3.00	6.00	1.227	1.033	1.119	
6515	2.42	3.18	5.83	3.00	6.00	1.143	0.959	1.040	
6535	2.46	3.01	5.75	3.00	6.00	1.132	0.998	1.059	
6695	2.50	2.79	5.66	3.00	6.00	1.122	1.050	1.081	
6855	2.38	2.69	5.55	3.00	6.00	1.153	1.074	1.109	
6875	2.45	2.53	5.50	3.00	6.00	1.135	1.114	1.122	
6895	1.99	2.36	5.19	3.00	6.00	1.262	1.159	1.205	
6995	2.16	2.73	5.46	3.00	6.00	1.213	1.064	1.132	
7115	-2.81	-1.57	0.86	-1.00	2.00	1.517	1.140	1.300	

6GHz 802.11ax HE40 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5965	4.73	5.19	7.98	6.00	9.00	1.340	1.205	1.265	85.71
6165	4.71	4.82	7.78	6.00	9.00	1.346	1.312	1.324	
6405	4.34	4.93	7.66	6.00	9.00	1.466	1.279	1.361	
6445	4.26	5.04	7.68	6.00	9.00	1.493	1.247	1.355	
6485	4.51	5.2	7.88	6.00	9.00	1.409	1.202	1.294	
6525	4.78	5.39	8.11	6.00	9.00	1.324	1.151	1.227	
6565	4.71	5.22	7.98	6.00	9.00	1.346	1.197	1.265	
6685	4.80	5.07	7.95	6.00	9.00	1.318	1.239	1.274	
6845	4.81	4.88	7.86	6.00	9.00	1.315	1.294	1.300	
6885	4.55	4.74	7.66	6.00	9.00	1.396	1.337	1.361	
6925	4.55	5.01	7.8	6.00	9.00	1.396	1.256	1.318	
6965	4.50	4.86	7.69	6.00	9.00	1.413	1.300	1.352	
7085	4.80	5.13	7.98	6.00	9.00	1.318	1.222	1.265	

6GHz 802.11ax HE80 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
5985	7.38	7.77	10.59	8.00	11.00	1.153	1.054	1.099	85.71
6145	7.28	7.54	10.42	8.00	11.00	1.180	1.112	1.143	
6385	7.13	7.59	10.38	8.00	11.00	1.222	1.099	1.153	
6465	7.24	7.85	10.57	8.00	11.00	1.191	1.035	1.104	
6545	7.64	8.03	10.85	8.00	11.00	1.086	0.993	1.035	
6625	7.62	7.84	10.74	8.00	11.00	1.091	1.038	1.062	
6705	7.67	7.63	10.66	8.00	11.00	1.079	1.089	1.081	
6785	7.80	7.91	10.87	8.00	11.00	1.047	1.021	1.030	
6865	7.56	7.55	10.57	8.00	11.00	1.107	1.109	1.104	
6945	7.50	7.74	10.63	8.00	11.00	1.122	1.062	1.089	
7025	7.30	7.74	10.54	8.00	11.00	1.175	1.062	1.112	

6GHz 802.11ax HE160 :

Test Frequency (MHz)	Conducted Power Output (dBm)		Conducted Power Output (dBm)	Tune up Power Output (dBm)		Tune up Factor			Duty Cycle [%]
	SISO		MIMO	SISO	MIMO	SISO		MIMO	
	Ant1	Ant2	Total(Ant1+2)			Ant1	Ant2	Ant1+2	
6025	9.91	10.16	13.05	11.00	14.00	1.285	1.213	1.245	85.71
6185	9.91	9.86	12.90	11.00	14.00	1.285	1.300	1.288	
6345	9.63	9.88	12.77	11.00	14.00	1.371	1.294	1.327	
6505	9.93	10.33	13.14	11.00	14.00	1.279	1.167	1.219	
6665	10.11	10.18	13.16	11.00	14.00	1.227	1.208	1.213	
6825	10.25	10.30	13.29	11.00	14.00	1.189	1.175	1.178	
6985	9.91	10.07	13.00	11.00	14.00	1.285	1.239	1.259	

7.2 Measurement of SAR and Power Density Test Results

7.2.1. Measurement of SAR Test Data

Original case test data									
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	APD W/m ² (4cm ²)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g(W/kg)
Body SAR Test data (Separate 0mm) Ant 1+2									
Back	802.11ac-VHT160	15/6025	1:1	0.130	0.95	13.10	14.00	1.230	0.160
Left Side	802.11ac-VHT160	15/6025	1:1	0.004	0.00	13.10	14.00	1.230	0.005
Right Side	802.11ac-VHT160	15/6025	1:1	0.067	0.00	13.10	14.00	1.230	0.082
Bottom Side	802.11ac-VHT160	15/6025	1:1	0.715	4.19	13.10	14.00	1.230	0.880
Bottom Side	802.11ac-VHT160	47/6185	1:1	0.692	3.79	13.00	14.00	1.259	0.871
Bottom Side	802.11ac-VHT160	79/6345	1:1	0.602	3.33	12.91	14.00	1.285	0.774
Bottom Side	802.11ac-VHT160	111/6505	1:1	0.659	3.61	13.26	14.00	1.186	0.781
Bottom Side	802.11ac-VHT160	143/6665	1:1	0.688	3.73	13.28	14.00	1.180	0.812
Bottom Side	802.11ac-VHT160	175/6825	1:1	0.621	3.32	13.46	14.00	1.132	0.703
Bottom Side	802.11ac-VHT160	207/6985	1:1	0.641	4.19	13.38	14.00	1.153	0.739

Change battery verification to worst mode									
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	APD W/m ² (4cm ²)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g(W/kg)
Body SAR Test data (Separate 0mm) Ant 1+2									
Bottom Side	802.11ac-VHT160	15/6025	1:1	0.656	3.23	13.10	14.00	1.230	0.807

SAR Test Note:

1. Per KDB648474 D04y01r03, this device is considered a phablet since the display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm. Therefore, phablet SAR tests are required when wireless mode does not apply or if wireless router 1g SAR > 1.2W/kg.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. The Wi-Fi duty cycle is 95~100%, Wi-Fi SAR scaling need further consideration and the theoretical duty cycle is 100%, therefore the actual duty cycle will be scaled up to the theoretical value of Wi-Fi reported SAR calculation.
4. The ratio is the difference in percentage between original and repeated measured SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

7.2.2. Measurement of Power Density Test Data

Original case test data										
Test position	Test mode	Test ch./Freq.	Duty Cycle	Total psPD(W/m ²)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Grip Step (λ)	Scaling Factor for measurement uncertainty	Scaled Total psPD(W/m ²)
Body SAR Test data (Separate 2mm) Ant 1+0										
Bottom Side	802.11ac-VHT160	15/6025	1:1	2.490	13.10	14.00	1.230	0.0625	1.55	4.75
Bottom Side	802.11ac-VHT160	47/6185	1:1	2.910	13.00	14.00	1.259	0.0625	1.55	5.68
Bottom Side	802.11ac-VHT160	79/6345	1:1	2.740	12.91	14.00	1.285	0.0625	1.55	5.46
Bottom Side	802.11ac-VHT160	111/6505	1:1	2.070	13.26	14.00	1.186	0.0625	1.55	3.80
Bottom Side	802.11ac-VHT160	143/6665	1:1	1.450	13.28	14.00	1.180	0.0625	1.55	2.65
Bottom Side	802.11ac-VHT160	175/6825	1:1	3.600	13.46	14.00	1.132	0.0625	1.55	6.32
Bottom Side	802.11ac-VHT160	207/6985	1:1	1.740	13.38	14.00	1.153	0.0625	1.55	3.11

Change battery verification to worst mode										
Test position	Test mode	Test ch./Freq.	Duty Cycle	Total psPD(W/m ²)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Grip Step (λ)	Scaling Factor for measurement uncertainty	Scaled Total psPD(W/m ²)
Body SAR Test data (Separate 2mm) Ant 1+0										
Bottom Side	802.11ac-VHT160	175/6825	1:1	2.890	13.46	14.00	1.132	0.0625	1.55	5.08

Power Density Test Note:

1. The test spacing is the distance between probe sensor and DUT surface.
2. $1.0 \text{ W/m}^2 = 0.1 \text{ mW/cm}^2$.
3. Wi-Fi 6E SAR and Power Density measurements were implemented according to the U-NII 6-7 GHz Interim Procedures described in Oct. 2020 TCB workshop.
4. The SAR evaluations using 6-7 GHz parameters were performed per IEC/IEEE 62209-1528, and the Absorbed Power Density (APD) were reported based on SAR measurements.
5. According to DASY Application Note, the APD is evaluated numerically using the FDTD method of Sim4Life V5.2. For comparison with the basic restrictions, the APD is averaged over square surface areas of 1 cm^2 and 4 cm^2 in the lowermost voxel layer of a flat phantom at a frequency of 6.5 GHz.

7.2.3. SAR Measurement Variability

Band	Mode	Test Position	Ch.	Freq. (MHz)	Antenna	Original 1g SAR (W/kg)	First 1g SAR (W/kg)	First Ratio SAR 1g
--	--	--	--	--	--	--	--	--

Note:

According to KDB 865664 D01v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required:

1. The original highest measured Reported SAR 1-g ≥ 0.80 W/kg repeated that measurement once.
2. Perform a second repeated measurement the ratio of the largest to the smallest SAR for the original and first repeated measurements is <1.2 W/kg, or when the original or repeated measurement ≥ 1.45 W/kg (~10% from the 1-g SAR limit).

8 SAR AND POWER DENSITY VALIDATION DATA

Measurement Report for Device, CW, Channel 0 (6500MHz)

Exposure Conditions

Phantom Section, TSL	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	6500, 0	5.22	6.24	35.29

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000	EX3DV4 - SN7761, 2024-09-19	DAE4 Sn1220, 2025-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-08-18	2025-08-18
psSAR1g [W/Kg]	22.7	27.4
psSAR10g [W/Kg]	5.19	5.62
Power Drift [dB]	-0.07	0.02



Measurement Report for Device, EDGE TOP, Validation band, CW, Channel 10000 (10000MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE TOP, 10.00	10000, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9681_F1-55GHz, 2024-09-16	DAE4 Sn1220, 2025-03-14

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

Scan Type	5G Scan
Date	2025-08-18
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	53.9
psPDtot+ [W/m²]	54.3
psPDmod+ [W/m²]	54.7
Power Drift [dB]	-0.06



9 SAR AND POWER DENSITY TEST DATA

Measurement Report for Device, EDGE BOTTOM, U-NII-5, IEEE 802.11ac (160MHz, MCS0), Channel 15 (6025MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	6025, 15	5.22	5.39	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	HBBL-600-10000	EX3DV4 - SN7761, 2024-09-19	DAE4 Sn1220, 2025-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	136.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2025-08-18	2025-08-18
psSAR1g [W/Kg]	0.587	0.656
psSAR10g [W/Kg]	0.123	0.131
Power Drift [dB]	0.12	-0.13



Measurement Report for Device, Bottom, IEEE 802.11ac (160MHz, MCS0), Channel 175 (6825MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	BOTTOM, 2.00	6825, 175	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air	EUmmWV4 - SN9681_F1-55GHz, 2024-09-16	DAE4 Sn1220, 2025-03-14

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2025-08-19
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.81
psPDtot+ [W/m²]	2.89
psPDmod+ [W/m²]	5.29
Power Drift [dB]	0.02



10 CALIBRATION CERTIFICATE

Note: The detailed calibration certificate can refer to Appendix.

11 TEST SETUP PHOTO

Note: The Test Setup Photo please see appendix.

_____ The End _____