

Appendix B:SAR Measurement results Plots

Table of contents
Bluetooth

Test Laboratory: CTI SAR Lab

Bluetooth GFSK 2402CH Back Side 0mm-Left Earbuds**DUT: Bluetooth Earbuds; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 3.0; Frequency: 2402 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2402$ MHz; $\sigma = 1.765$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2402 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/12/2026
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.435 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.331 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 0.491 W/kg

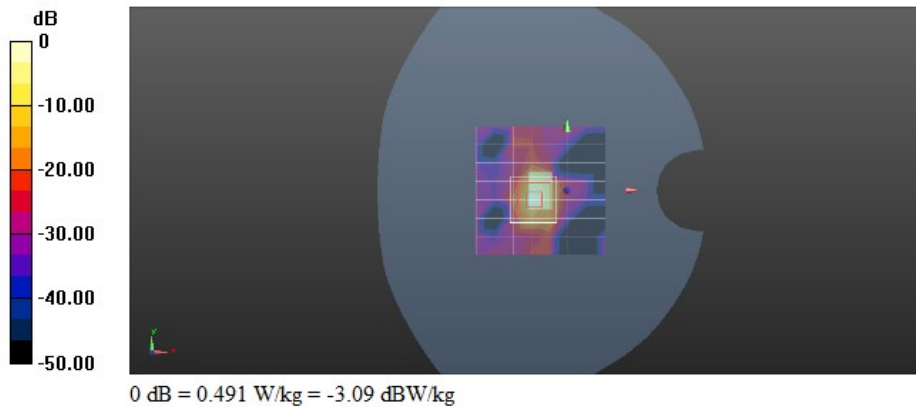

Test Laboratory: CTI SAR Lab

Bluetooth GFSK 2402CH Back Side 0mm-Right Earbuds**DUT: Bluetooth Earbuds; Type: NA; Serial: NA**

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth 3.0; Frequency: 2402 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.765$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.65, 7.65, 7.65) @ 2402 MHz; Calibrated: 5/7/2025
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/12/2026
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1875
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0990 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.29 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 33.9%

Maximum value of SAR (measured) = 0.388 W/kg

