



RF TEST REPORT



Report No.: 16070853-FCC-R

Supersede Report No.: N/A

Applicant	Vitek Electronics International Co.,Ltd	
Product Name	GSM Senior phone	
Model No.	RLTP169 -BLACK	
Serial No.	T19, S19Y	
Test Standard	FCC Part 22(H):2015 ;FCC Part 24(E):2015;ANSI/TIA-603-D: 2010	
Test Date	July 15 to 27, 2016	
Issue Date	July 28, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070853-FCC-R
Page	3 of 49

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 RF EXPOSURE (SAR).....	9
6.2 RF OUTPUT POWER	10
6.3 PEAK-AVERAGE RATIO.....	15
6.4 OCCUPIED BANDWIDTH.....	18
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
6.6 SPURIOUS RADIATED EMISSIONS	27
6.7 BAND EDGE.....	31
6.8 FREQUENCY STABILITY	35
ANNEX A. TEST INSTRUMENT.....	39
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	40
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	45
ANNEX C.II. EUT OPERATING CONKITIONS	47
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	48
ANNEX E. DECLARATION OF SIMILARITY	49

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070853-FCC-R	NONE	Original	July 28, 2016

2. Customer information

Applicant Name	Vitek Electronics International Co.,Ltd
Applicant Add	Rm 2202, Leizhen Building, Fuming Rd,Shen Zhen, China
Manufacturer	Shenzhen Vitek Electronics Co., Ltd
Manufacturer Add	Rm 2202, Leizhen Building, Fuming Rd, Futian District, Shen Zhen, China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	GSM Senior phone
Main Model:	RLTP169 -BLACK
Serial Model:	T19, S19Y
Date EUT received:	July 14, 2016
Test Date(s):	July 15 to 27, 2016
Equipment Category :	PCE
Antenna Gain:	GSM850:0.4dBi PCS1900:1.2dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
Maximum Conducted AV Power to Antenna:	GSM Voice :GSM850: 31.85dBm PCS1900:28.95dBm GPRS:GSM850: 31.83 dBm PCS1900: 28.85dBm
ERP/EIRP:	GSM Voice :GSM850: 29.58 dBm / ERP PCS1900: 29.71dBm / EIRPP GPRS: GSM850: 29.23 dBm / ERP PCS1900: 29.62dBm / EIRPP
Number of Channels:	GSM 850: 124CH PCS1900: 299CH
Port:	Power Port, Earphone Port, USB Port

Input Power: Adapter:
Model: RLTP169-BLACK
Input: AC 100-240V~50/60Hz
Output: DC 5V,500mA
Battery:
Spec:3.7V,600mAh,2.22Wh

Trade Name : RCA, VITEK, VTEX

GPRS Multi-slot class 8/10/12

FCC ID: 2A13CRLTP169-BLACK

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c);	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass


The EUT is a portable device, thus requires SAR evaluation;
Please refer to RF Exposure Evaluation Report: 16070853-FCC-H.

6.2 RF Output Power

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒

Test Setup	
------------	---

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated.
----------------	---

Test Report	16070853-FCC-R
Page	11 of 49

	- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	31.43	31.64	31.85	31.5±1	28.95	28.67	28.73	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	31.42	31.64	31.83	31.5±1	28.85	28.63	28.72	29±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.23	30.54	30.82	30.5±1	28.67	28.38	28.30	28.5±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	27.61	27.73	27.95	27.5±1	26.30	26.02	25.93	26±1
Remark : GPRS, CS1 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link								

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.

GSM Mode:

ERP & EIRP

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	23.08	V	6.8	0.53	29.35	38.45
824.2	22.12	H	6.8	0.53	28.39	38.45
836.6	23.17	V	6.8	0.53	29.44	38.45
836.6	22.28	H	6.8	0.53	28.55	38.45
848.8	23.21	V	6.9	0.53	29.58	38.45
848.8	22.29	H	6.9	0.53	28.66	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.61	V	7.88	0.85	29.64	33
1850.2	21.85	H	7.88	0.85	28.88	33
1880	22.68	V	7.88	0.85	29.71	33
1880	21.94	H	7.88	0.85	28.97	33
1909.8	22.65	V	7.86	0.85	29.66	33
1909.8	21.98	H	7.86	0.85	28.99	33

GPRS Mode:

ERP & EIRP

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	22.89	V	6.8	0.53	29.16	38.45
824.2	22.03	H	6.8	0.53	28.30	38.45
836.6	22.81	V	6.8	0.53	29.08	38.45
836.6	21.95	H	6.8	0.53	28.22	38.45
848.8	22.86	V	6.9	0.53	29.23	38.45
848.8	22.02	H	6.9	0.53	28.39	38.45


EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.54	V	7.88	0.85	29.57	33
1850.2	21.69	H	7.88	0.85	28.72	33
1880	22.48	V	7.88	0.85	29.51	33
1880	21.73	H	7.88	0.85	28.76	33
1909.8	22.61	V	7.86	0.85	29.62	33
1909.8	21.65	H	7.86	0.85	28.66	33

6.3 Peak-Average Ratio

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	☒
Test Setup			
Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty		

Test Report	16070853-FCC-R
Page	16 of 49

	cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle $< 98\%$), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.36	28.95	0.41
1880	29.55	28.67	0.88
1909.8	29.54	28.73	0.81


GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.45	28.85	0.6
1880	29.42	28.63	0.79
1909.8	29.48	28.72	0.76

6.4 Occupied Bandwidth

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	248.4509	317.400
190	836.6	247.9701	319.942
251	848.8	244.1576	319.557

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.7032	315.119
661	1880.0	247.2165	320.284
810	1909.8	244.1989	318.162

GPRS Mode:

Cellular Band (Part 22H) result


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	249.1979	319.532
190	836.6	245.4033	318.318
251	848.8	246.1959	322.925

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	239.9153	312.000
661	1880.0	247.9755	318.954
810	1909.8	243.8653	321.306


GSM Mode:

Test Plots

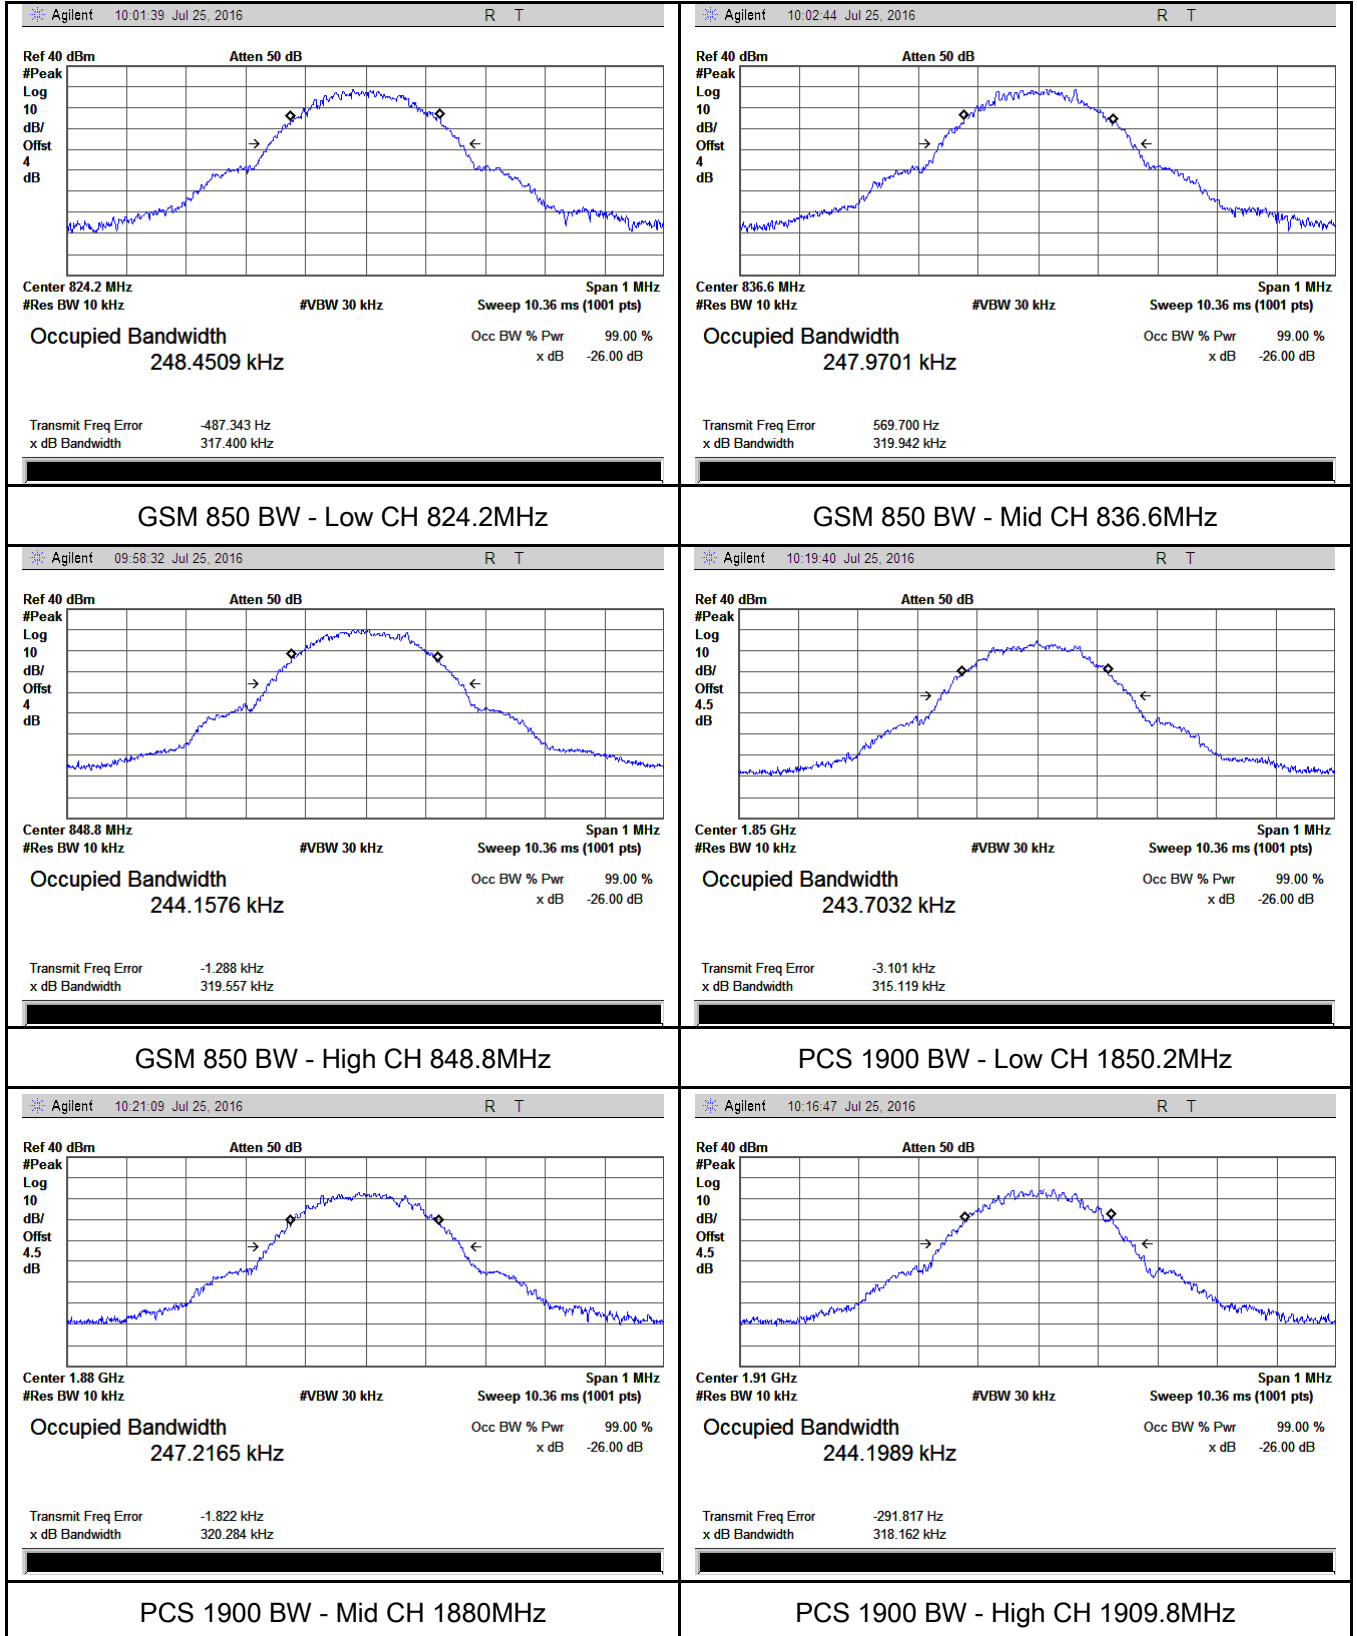

GPRS Mode:


Test Plots

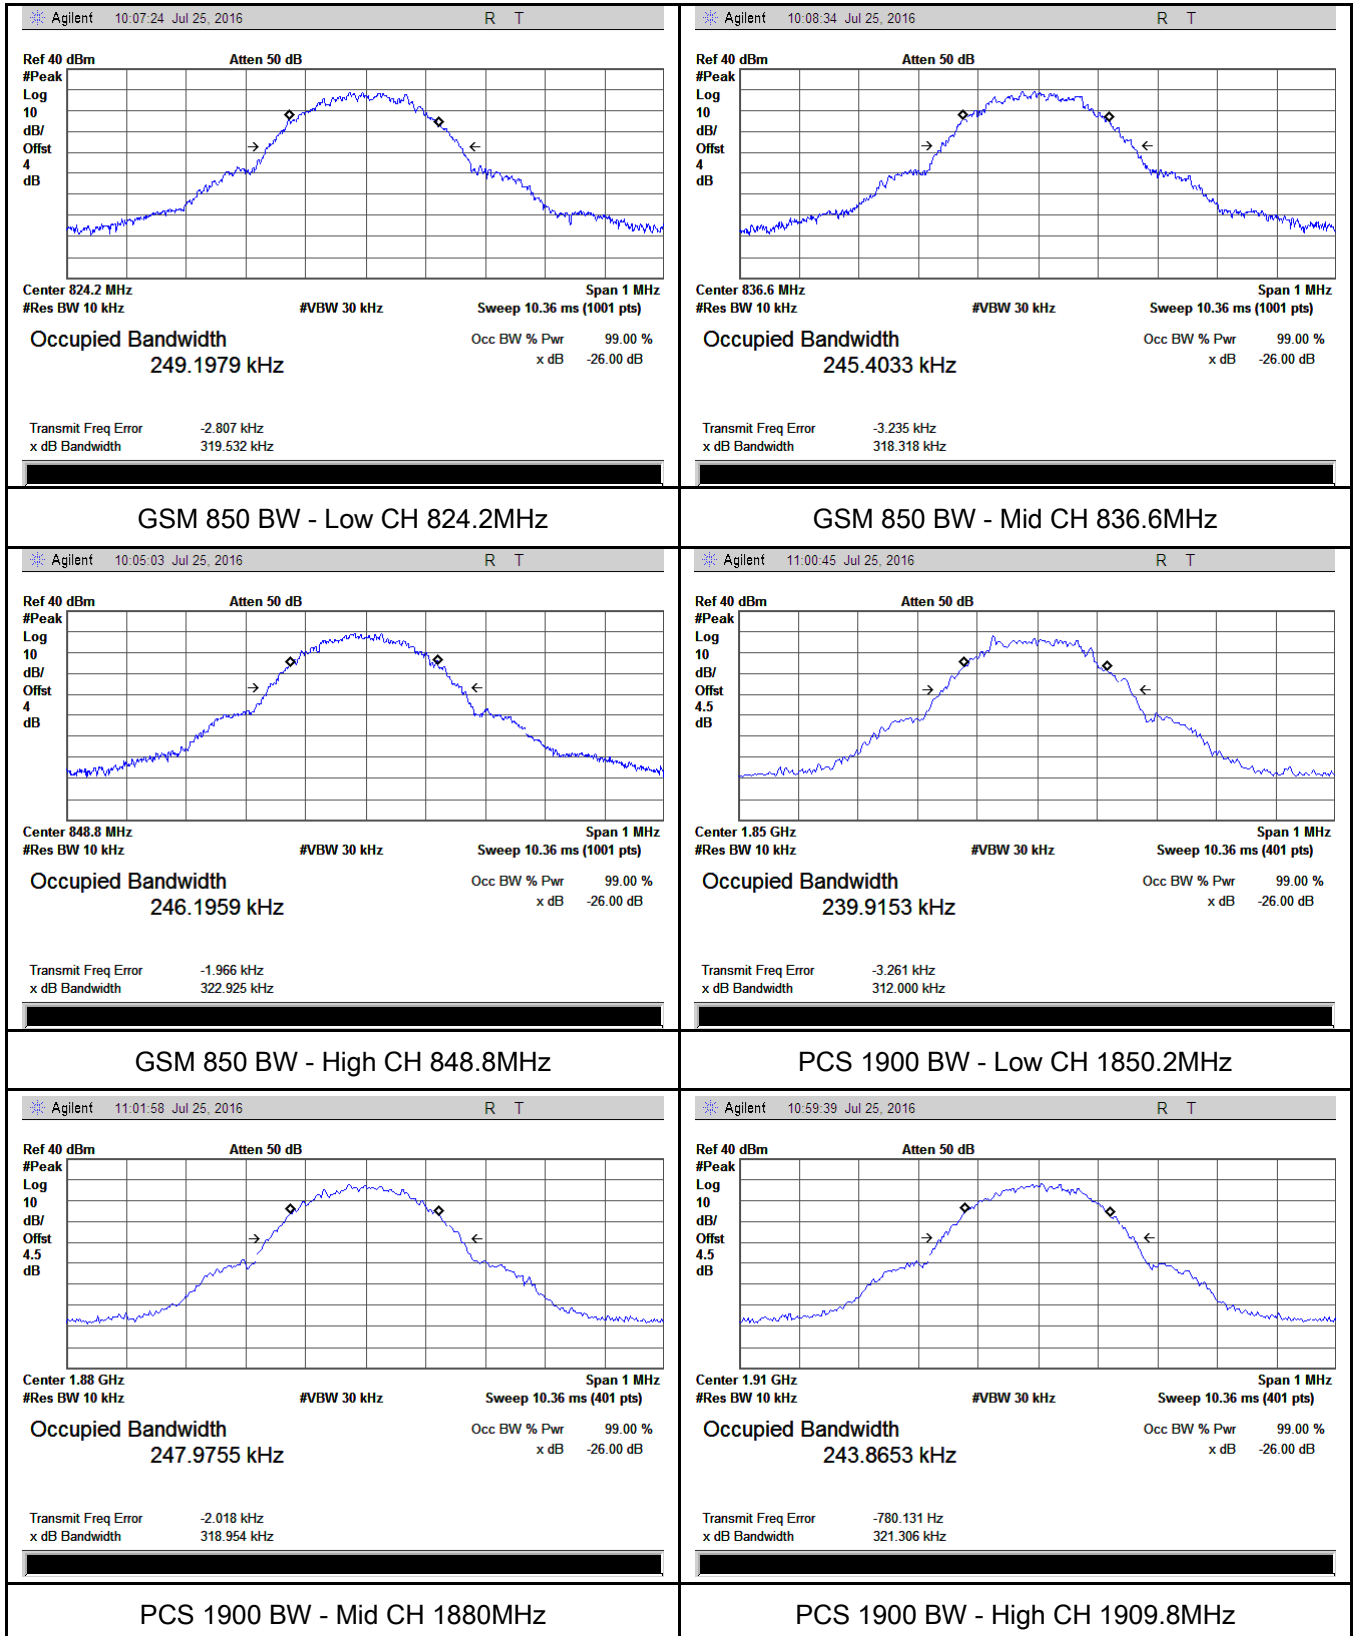

6.5 Spurious Emissions at Antenna Terminals

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


GSM Mode:

Test Plots


Cellular Band (Part 22H) result

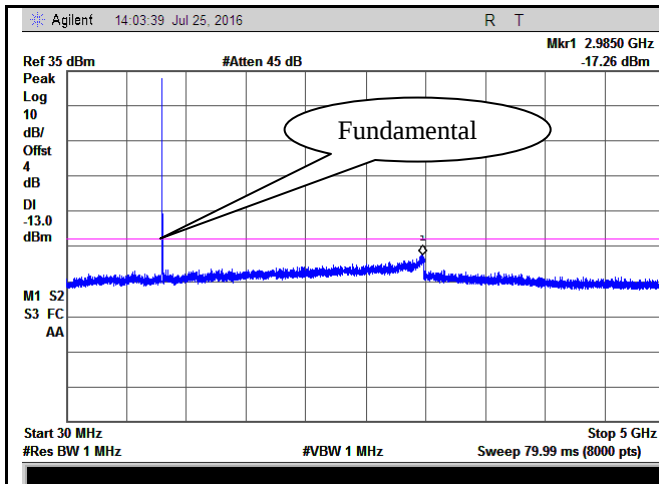


GSM 850 - Low Channel-1

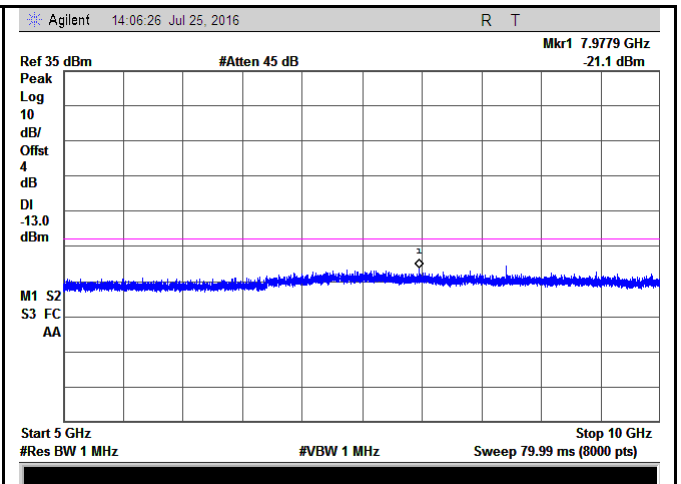


GSM 850 - Low Channel-2

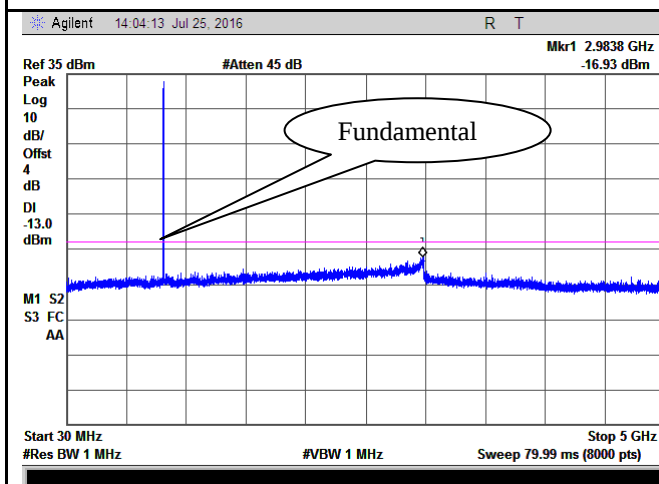


GSM 850 Middle Channel-1

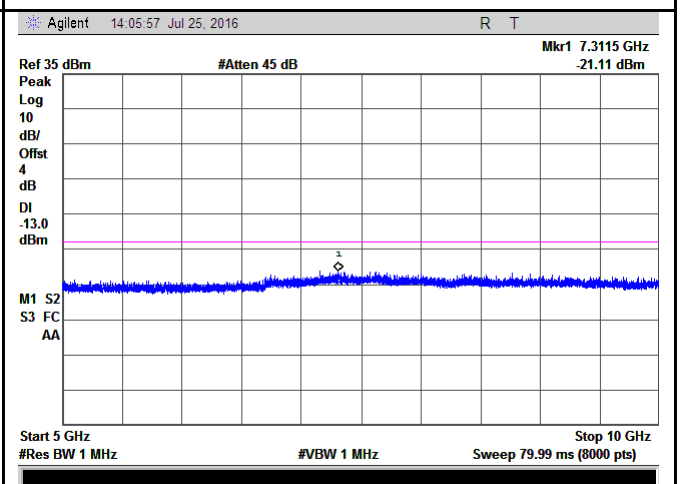

GSM 850 Middle Channel-2

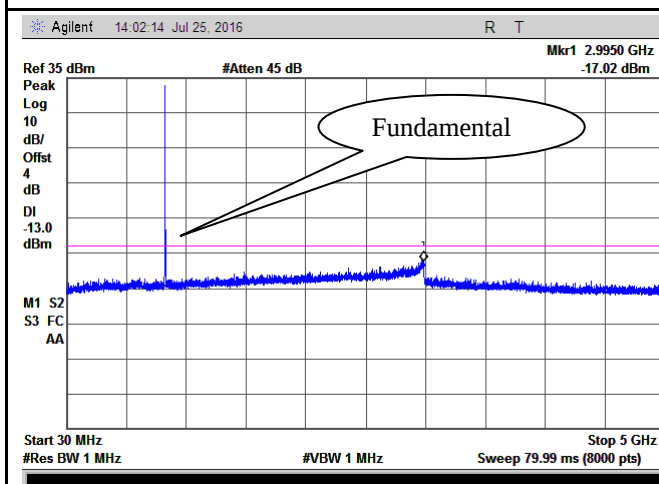


GSM 850 - High Channel-1

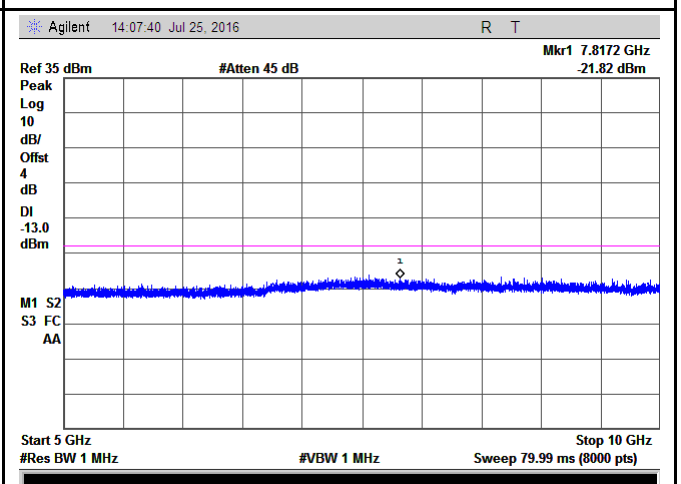


GSM 850 - High Channel-2


PCS Band (Part24E) result

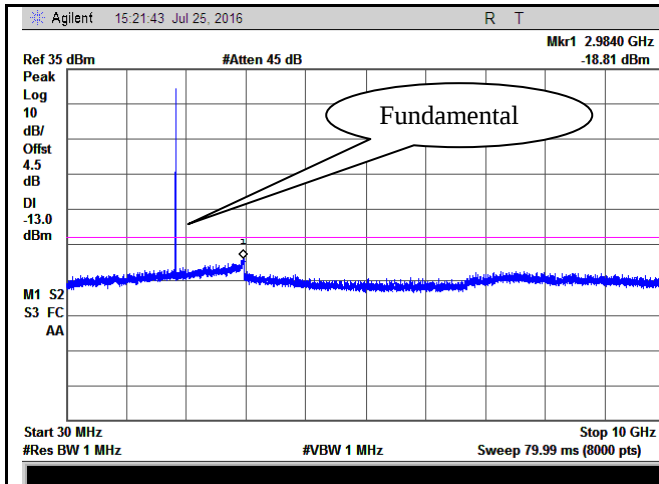


PCS1900 - Low Channel-1

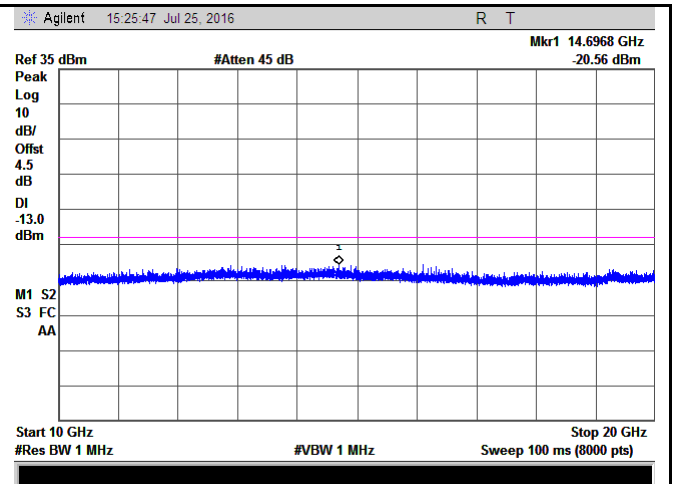


PCS 1900 - Low Channel-2

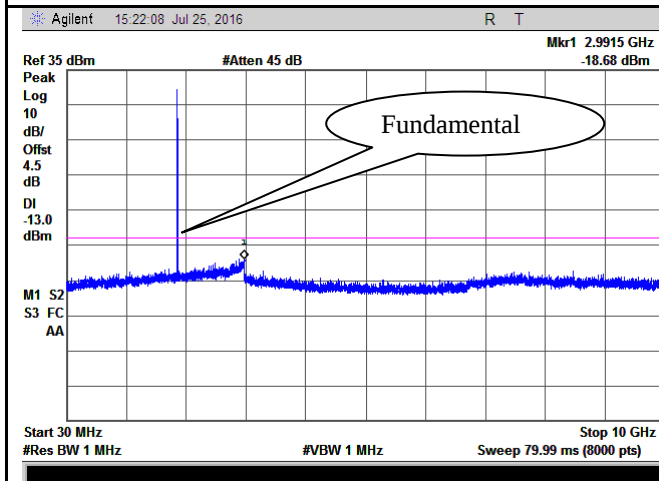


PCS1900 - Middle Channel-1

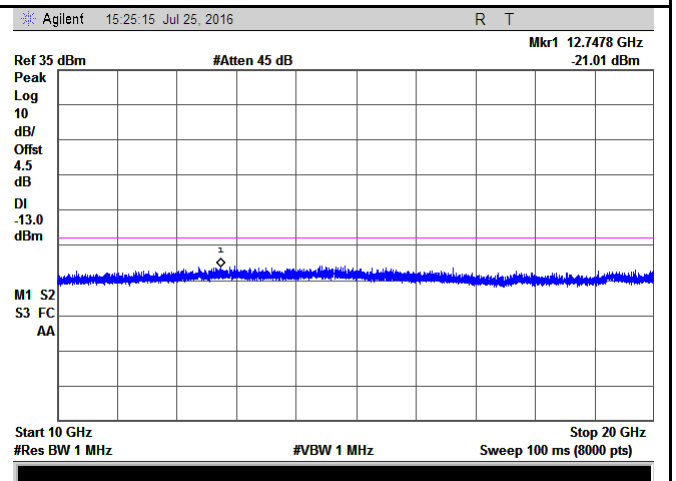

PCS 1900 - Middle Channel-2

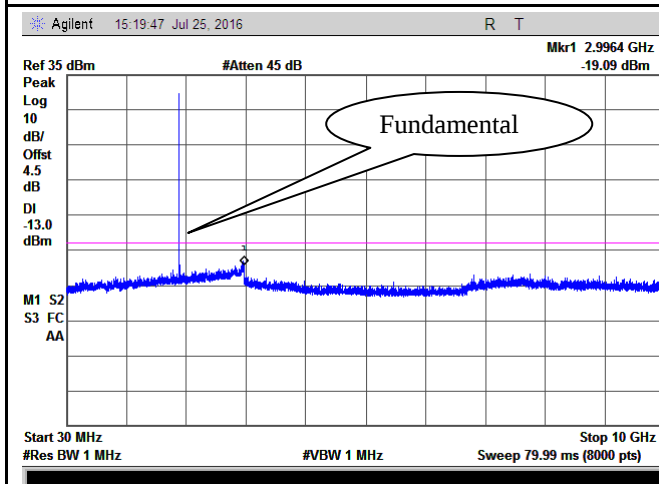

PCS1900 - High Channel-1

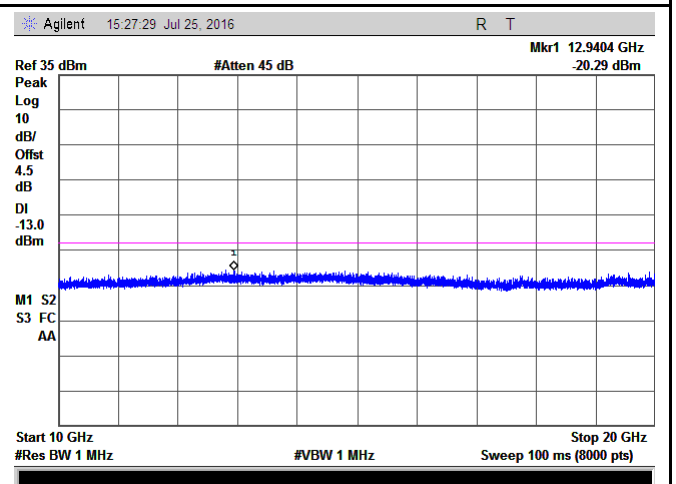


PCS 1900 - High Channel-2


GPRS Mode:

Test Plots


Cellular Band (Part 22H) result

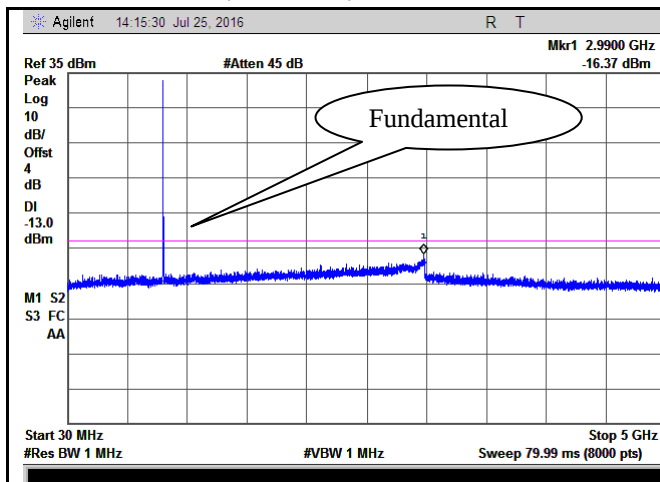


GSM 850 - Low Channel-1

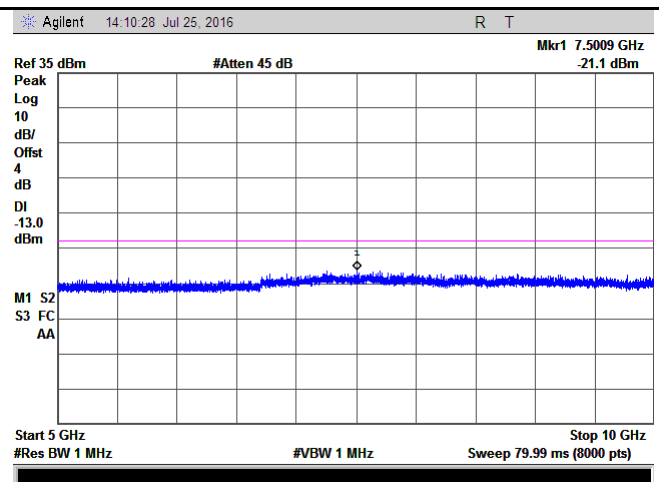


GSM 850 - Low Channel-2

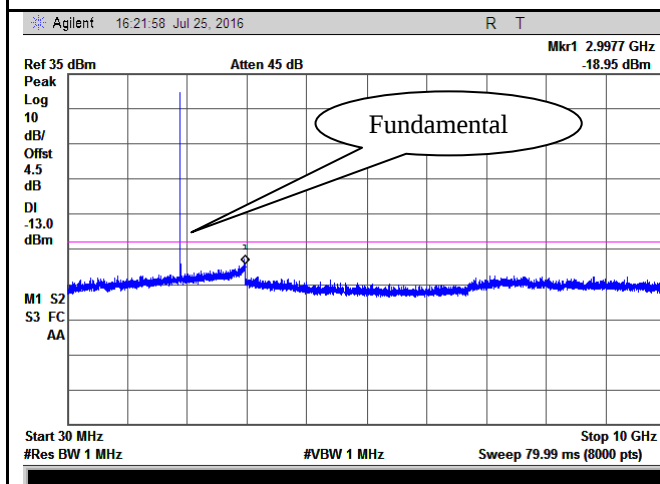


GSM 850 Middle Channel-1

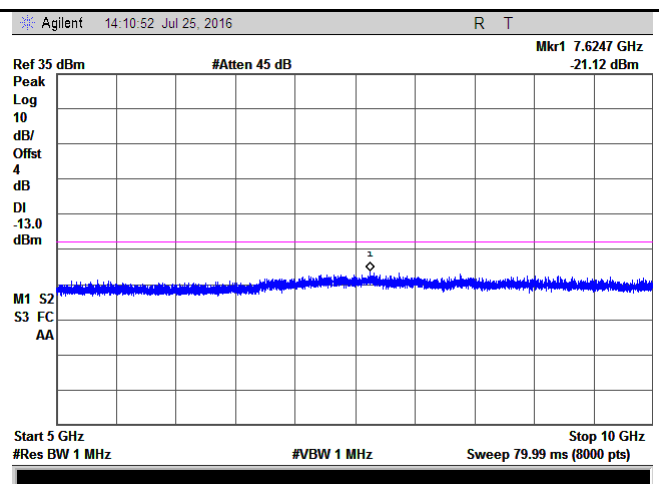

GSM 850 Middle Channel-2

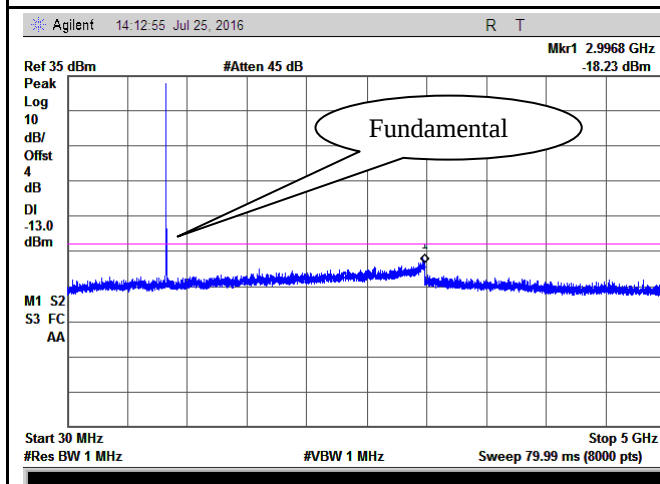


GSM 850 - High Channel-1

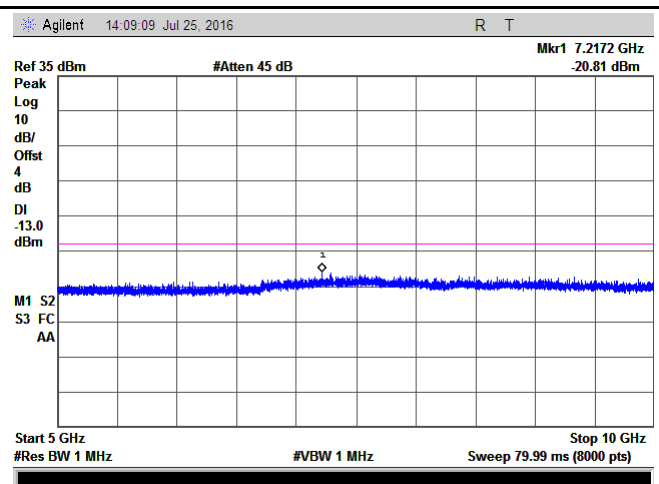


GSM 850 - High Channel-2


PCS Band (Part24E) result

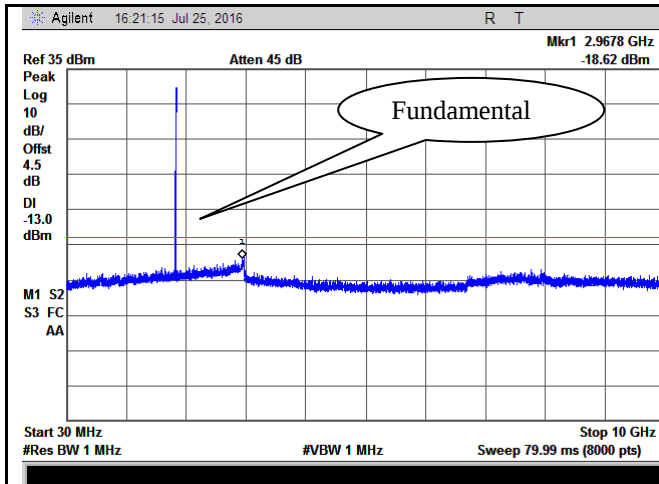


PCS1900 - Low Channel-1

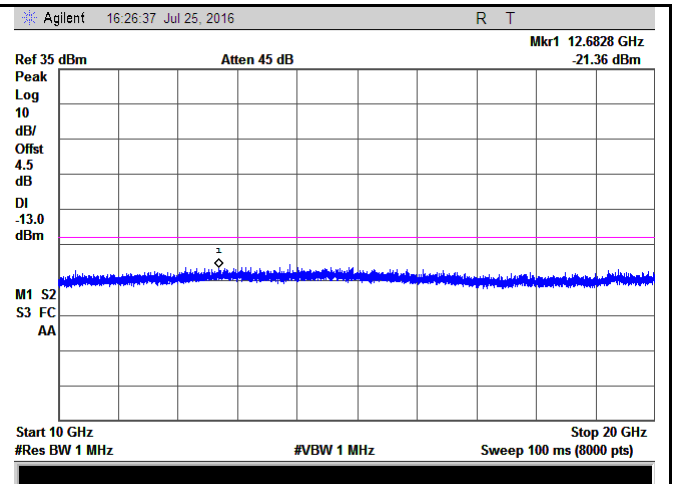


PCS 1900 - Low Channel-2

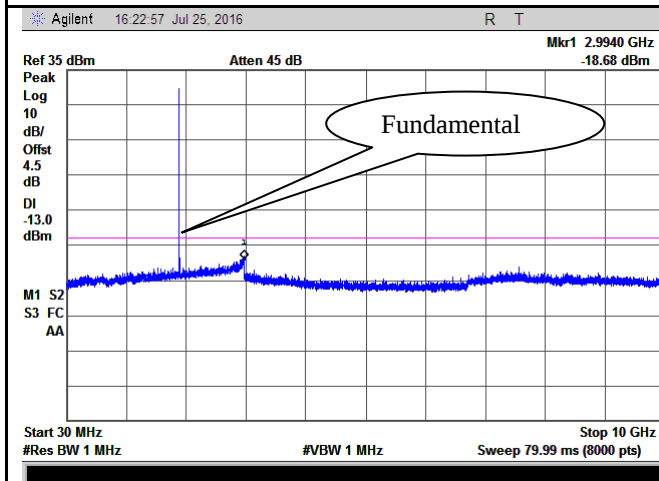


PCS1900 - Middle Channel-1

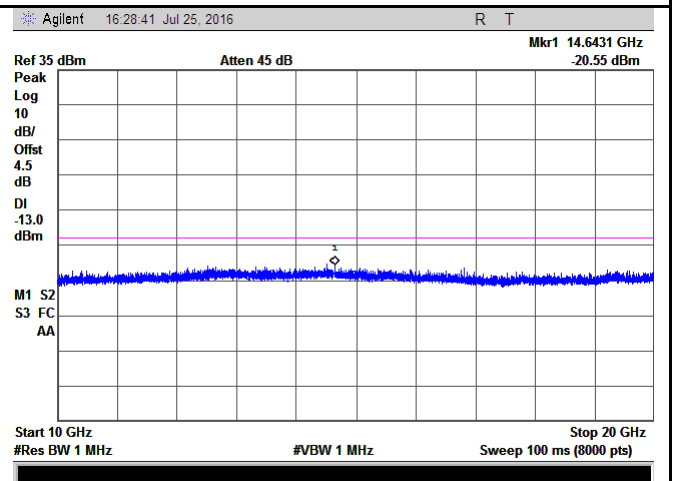

PCS 1900 - Middle Channel-2

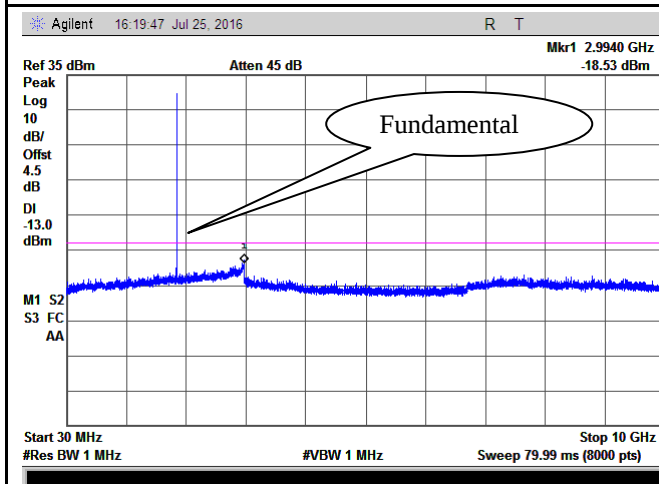

PCS1900 - High Channel-1

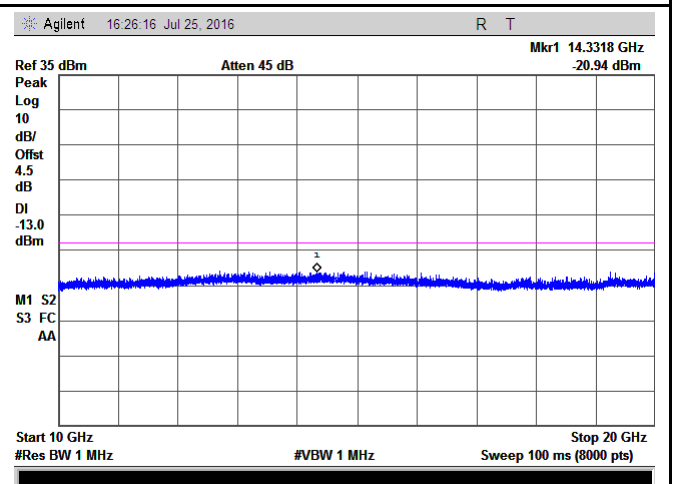


PCS 1900 - High Channel-2

6.6 Spurious Radiated Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

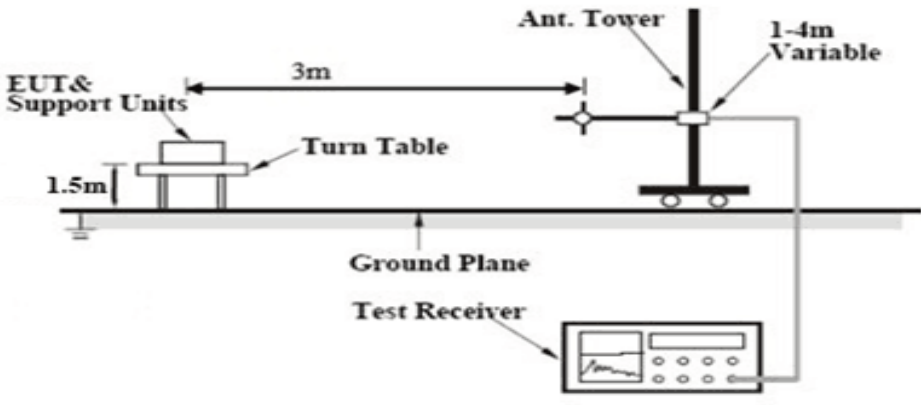Test setup	 The diagram illustrates the test setup. A turntable is placed on a ground plane, with EUT & Support Units on top. The turntable is 1.5m high. A measurement antenna is positioned 3m away from the turntable. The antenna is mounted on a tower with a 1-4m variable height. A test receiver is connected to the antenna.
------------	---

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Test Report	16070853-FCC-R
Page	28 of 49

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-44.53	V	7.95	0.78	-37.36	-13	-24.36
1648.4	-45.07	H	7.95	0.78	-37.9	-13	-24.9
351.7	-52.98	V	6.4	0.26	-46.84	-13	-33.84
569.3	-52.71	H	6.8	0.37	-46.28	-13	-33.28

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-44.68	V	7.95	0.78	-37.51	-13	-24.51
1673.2	-44.94	H	7.95	0.78	-37.77	-13	-24.77
351.5	-52.81	V	6.4	0.26	-46.67	-13	-33.67
569.8	-52.67	H	6.8	0.37	-46.24	-13	-33.24

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-45.27	V	7.95	0.78	-38.1	-13	-25.10
1697.6	-44.91	H	7.95	0.78	-37.74	-13	-24.74
351.3	-52.86	V	6.4	0.26	-46.72	-13	-33.72
569.4	-52.74	H	6.8	0.37	-46.31	-13	-33.31

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice , GPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-47.95	V	10.25	2.73	-40.43	-13	-27.43
3700.4	-48.31	H	10.25	2.73	-40.79	-13	-27.79
350.8	-53.46	V	6.4	0.26	-47.32	-13	-34.32
568.3	-53.24	H	6.8	0.37	-46.81	-13	-33.81

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-47.89	V	10.25	2.73	-40.37	-13	-27.37
3760	-48.42	H	10.25	2.73	-40.9	-13	-27.9
350.5	-53.51	V	6.4	0.26	-47.37	-13	-34.37
568.9	-53.37	H	6.8	0.37	-46.94	-13	-33.94

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-47.81	V	10.36	2.73	-40.18	-13	-27.18
3819.6	-48.35	H	10.36	2.73	-40.72	-13	-27.72
350.4	-53.39	V	6.4	0.26	-47.25	-13	-34.25
568.7	-53.22	H	6.8	0.37	-46.79	-13	-33.79

Note:

1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, GSM voice, GPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

6.7 Band Edge

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup			
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Mode:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.998	-14.95	-13
849.0200	-16.43	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.995	-15.61	-13
1910.020	-16.52	-13

GPRS Mode:

Cellular Band (Part 22H) result


Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.978	-15.74	-13
849.023	-14.97	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.995	-16.95	-13
1910.028	-17.34	-13


GSM Mode:

Test Plots

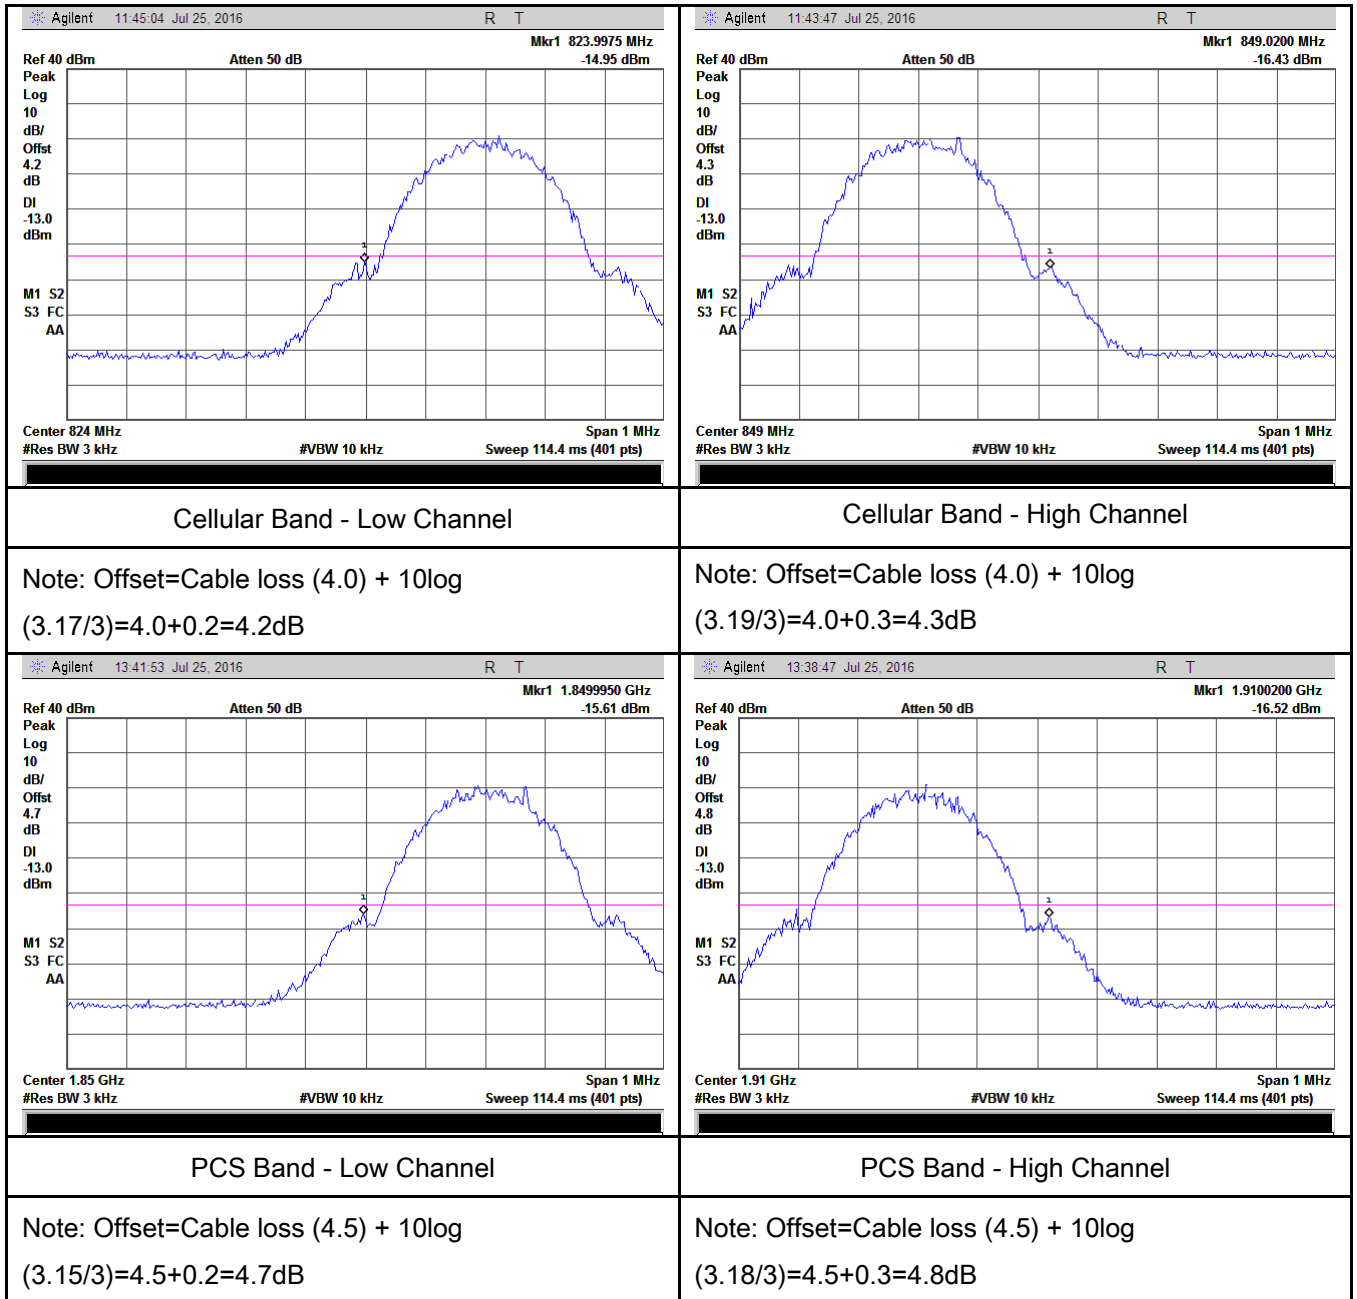

GPRS Mode:


Test Plots

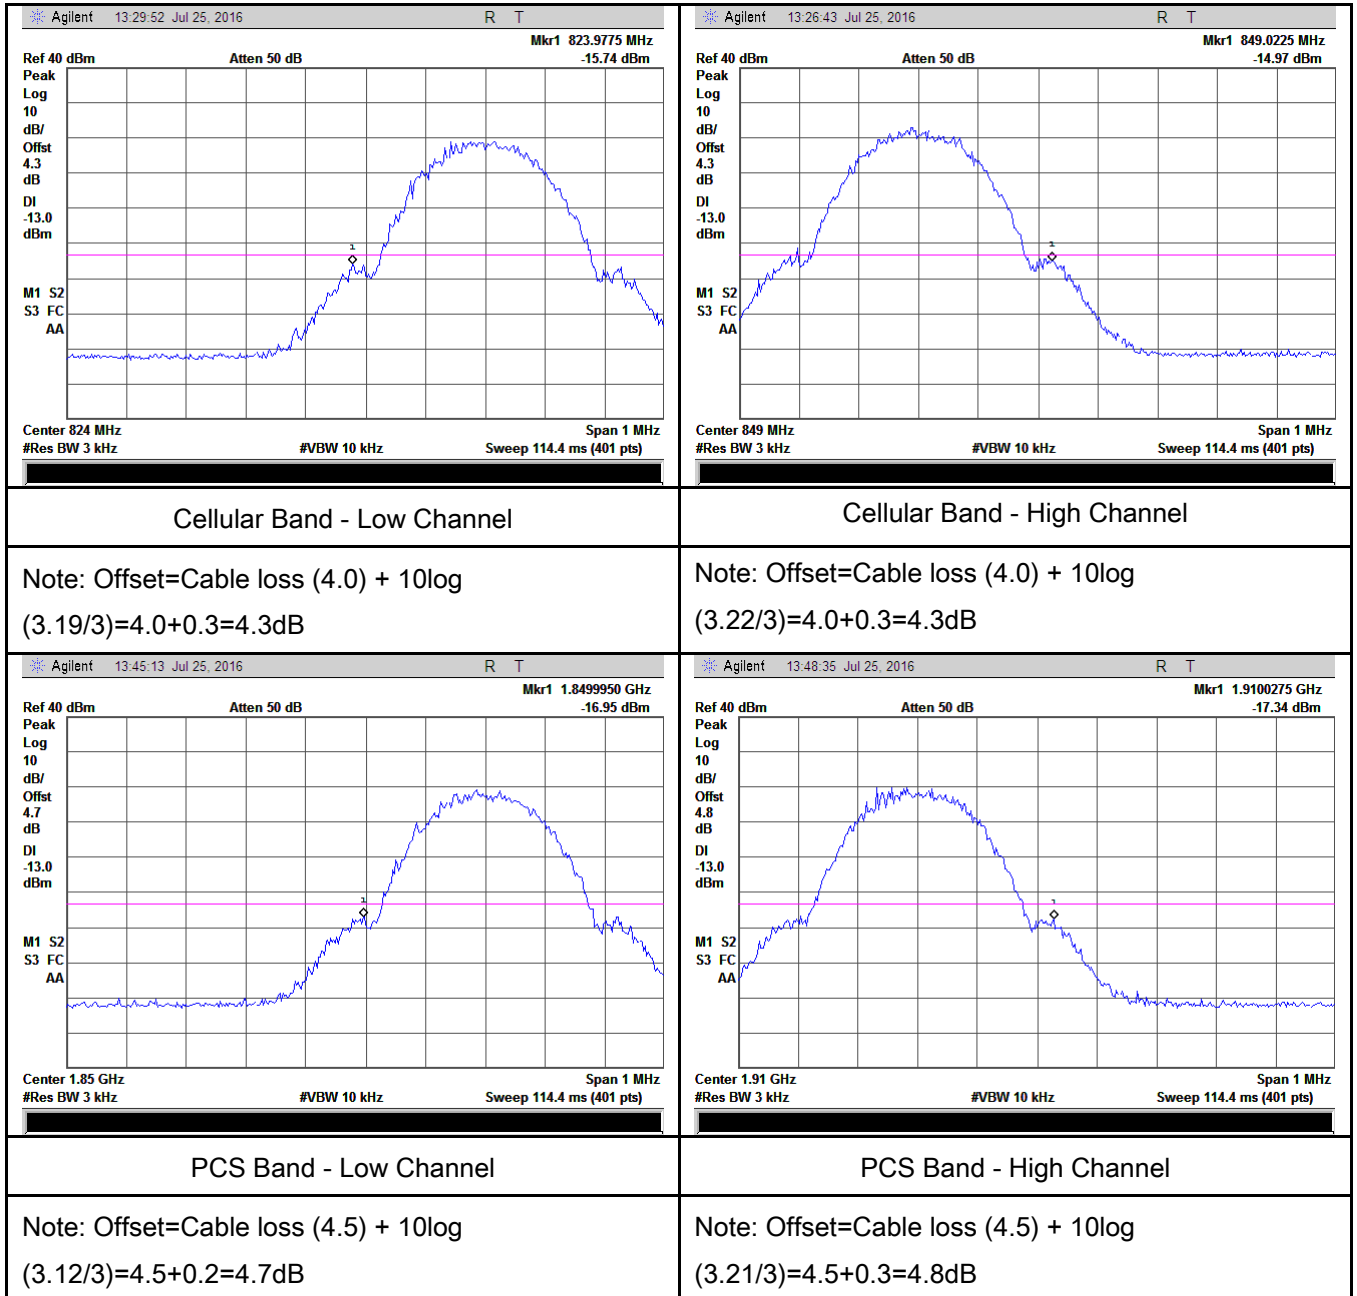

6.8 Frequency Stability

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	July 25, 2016
Tested By :	Loren Luo

Requirement(s):

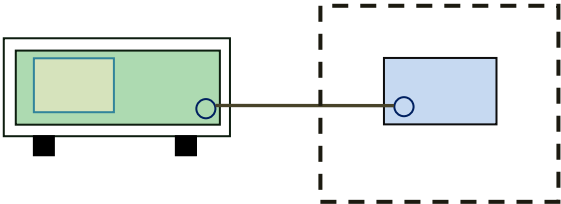Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (pp)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>45 to 512</td><td>2.5</td><td>5.0</td><td>.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 29.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (pp)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	45 to 512	2.5	5.0	.0	821 to 896	1.5	2.5	2.5	928 to 29.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (pp)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
45 to 512	2.5	5.0	.0																																
821 to 896	1.5	2.5	2.5																																
928 to 29.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup																																			

Test Report	16070853-FCC-R
Page	36 of 49

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Mode:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	19	0.0227	2.5
0		17	0.0203	2.5
10		14	0.0167	2.5
20		13	0.0155	2.5
30		12	0.0143	2.5
40		10	0.0120	2.5
50		12	0.0143	2.5
55		16	0.0191	2.5
25	4.2	19	0.0227	2.5
	3.5	17	0.0203	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0080	2.5
0		16	0.0085	2.5
10		14	0.0074	2.5
20		10	0.0053	2.5
30		19	0.0101	2.5
40		11	0.0059	2.5
50		13	0.0069	2.5
55		14	0.0074	2.5
25	4.2	20	0.0106	2.5
	3.5	17	0.0090	2.5

GPRS Mode:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	21	0.0251	2.5
0		17	0.0203	2.5
10		16	0.0191	2.5
20		11	0.0131	2.5
30		13	0.0155	2.5
40		17	0.0203	2.5
50		12	0.0143	2.5
55		19	0.0227	2.5
25	4.2	20	0.0239	2.5
	3.5	19	0.0227	2.5

PCS Band (Part 24E) result


Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0096	2.5
0		17	0.0090	2.5
10		15	0.0080	2.5
20		11	0.0059	2.5
30		11	0.0059	2.5
40		14	0.0074	2.5
50		13	0.0069	2.5
55		11	0.0059	2.5
25	4.2	19	0.0101	2.5
	3.5	20	0.0106	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/16/2015	09/15/2016	☒
Power Splitter	1#	1#	09/01/2015	08/31/2016	☒
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	☒
Temperature/Humidity Chamber	UHL-270	001	10/09/2015	10/08/2016	☒
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/21/2015	09/20/2016	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/24/2015	09/23/2016	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/17/2015	09/16/2016	☒
Tunable Notch Filter	3NF-800/1000-S	AA4	09/01/2015	08/31/2016	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	09/01/2015	08/31/2016	☒


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

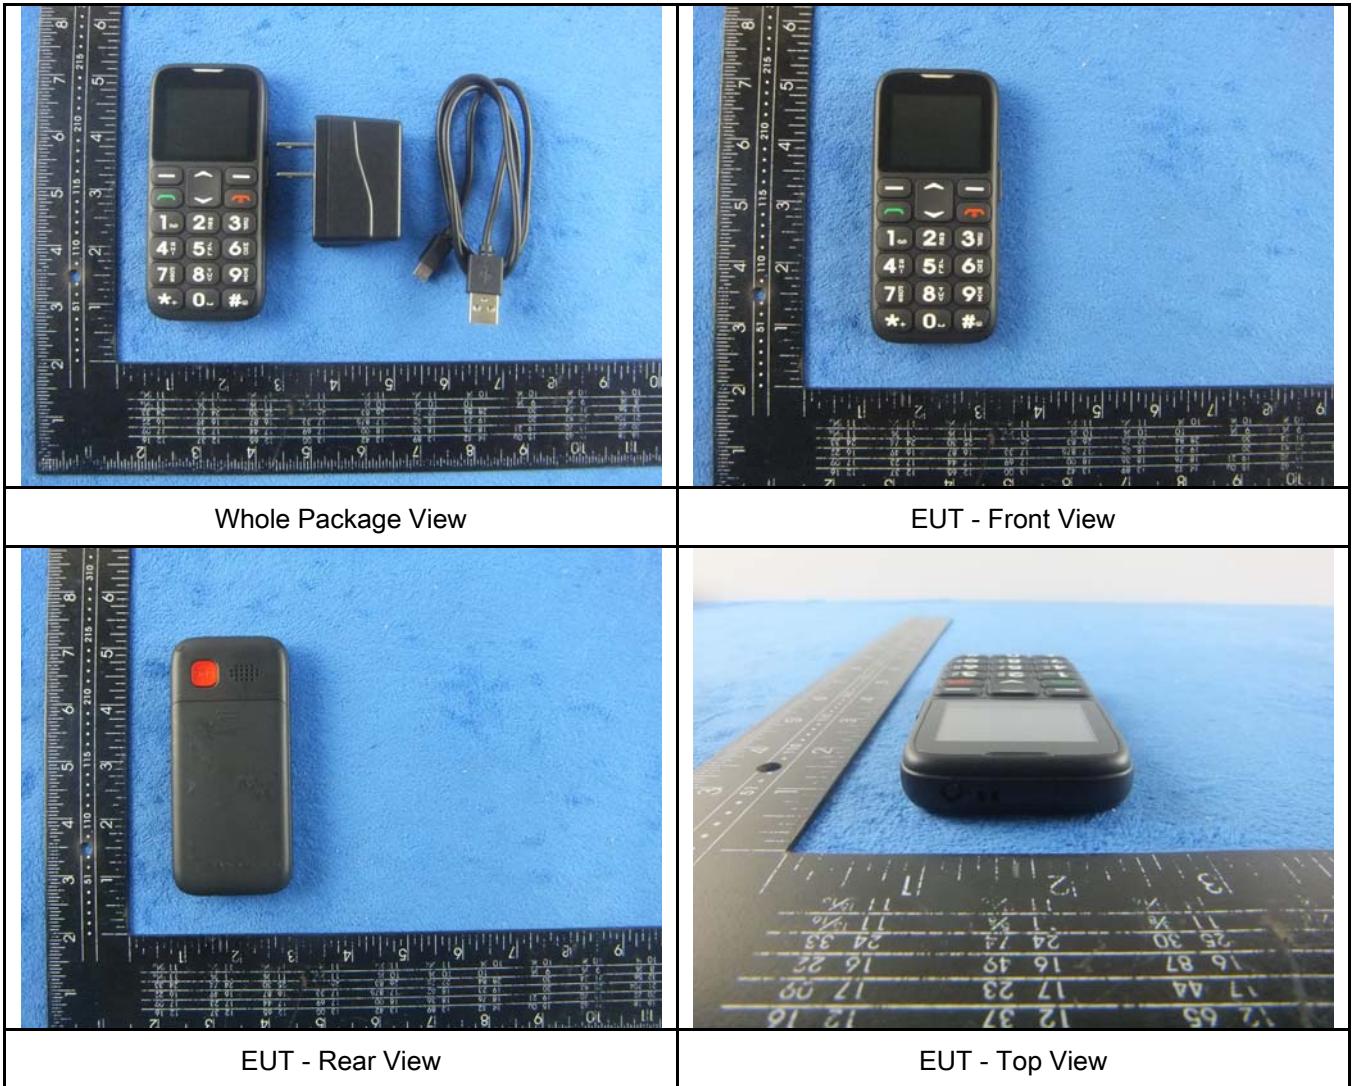




EUT - Bottom View

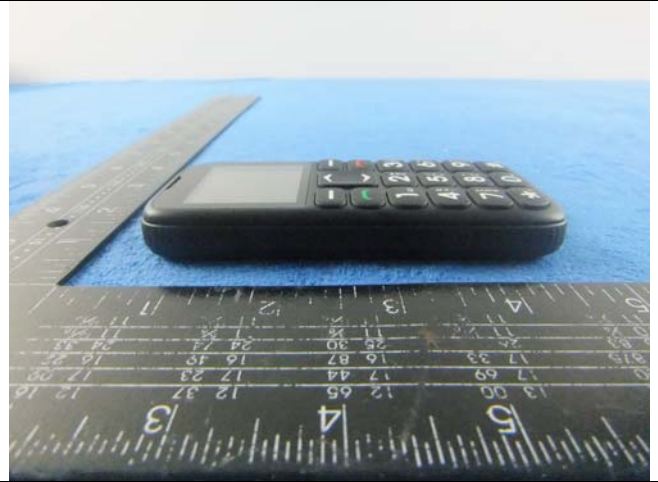

EUT - Left View



EUT - Right View

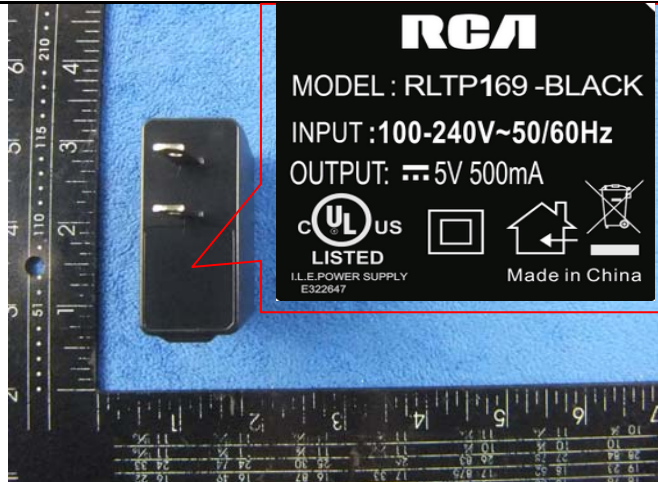

Adapter - Front View

RCA
MODEL : RLTP169 -BLACK
INPUT :100-240V~50/60Hz
OUTPUT: 5V 500mA
cULus LISTED
I.L.E. POWER SUPPLY
E322047
Made in China

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View



Battery - Rear View




Mainboard with Shielding - Front View

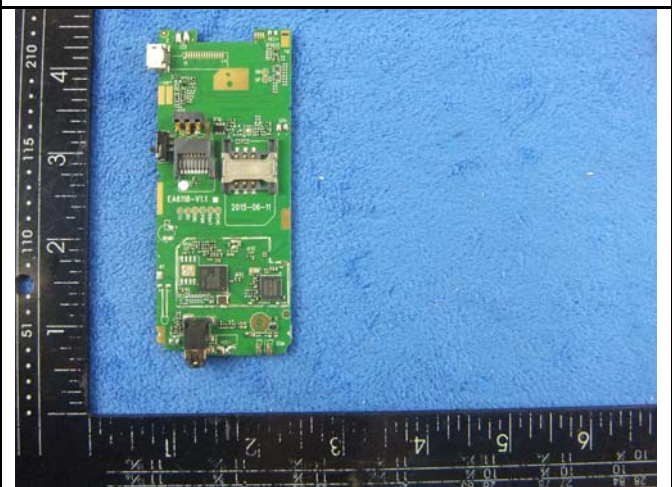


Mainboard without Shielding - Front View


Test Report	16070853-FCC-R
Page	43 of 49

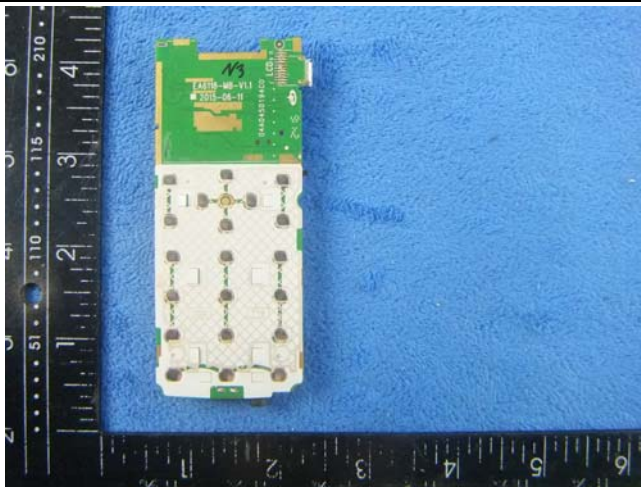

Mainboard - Rear View

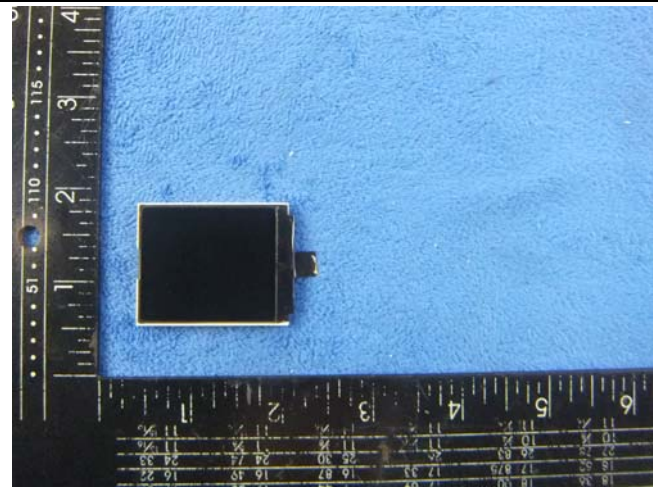

LCD - Front View

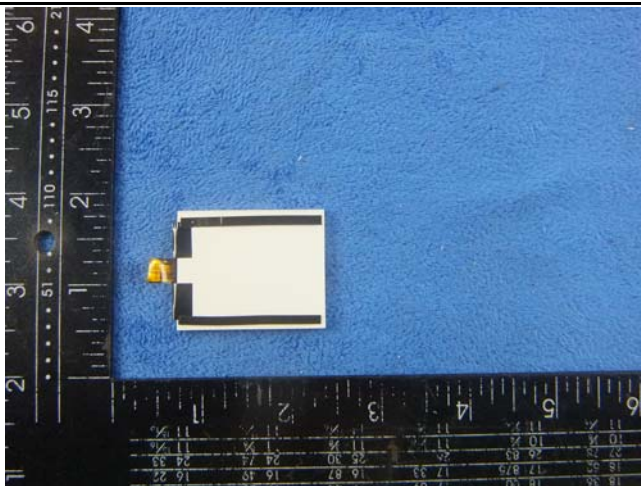


LCD - Rear View




GSM/PCS Antenna View

Annex B.iii. Photograph: Test Setup Photo

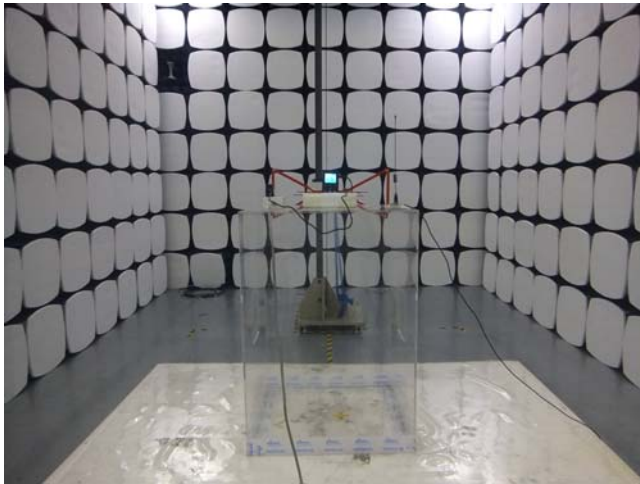

Radiated Spurious Emissions Test Setup Below 1GHz

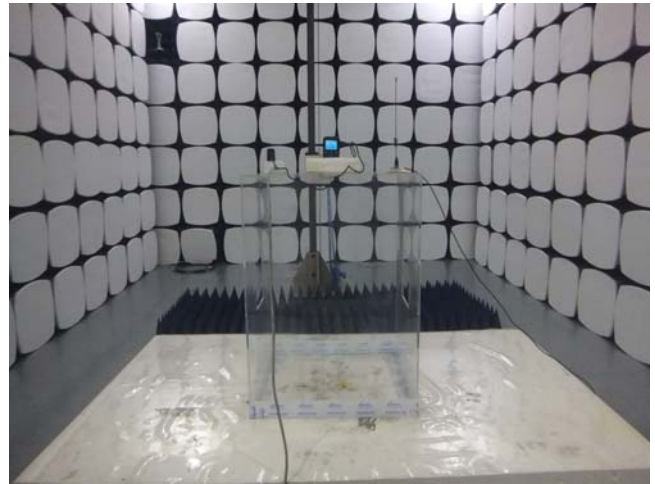


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

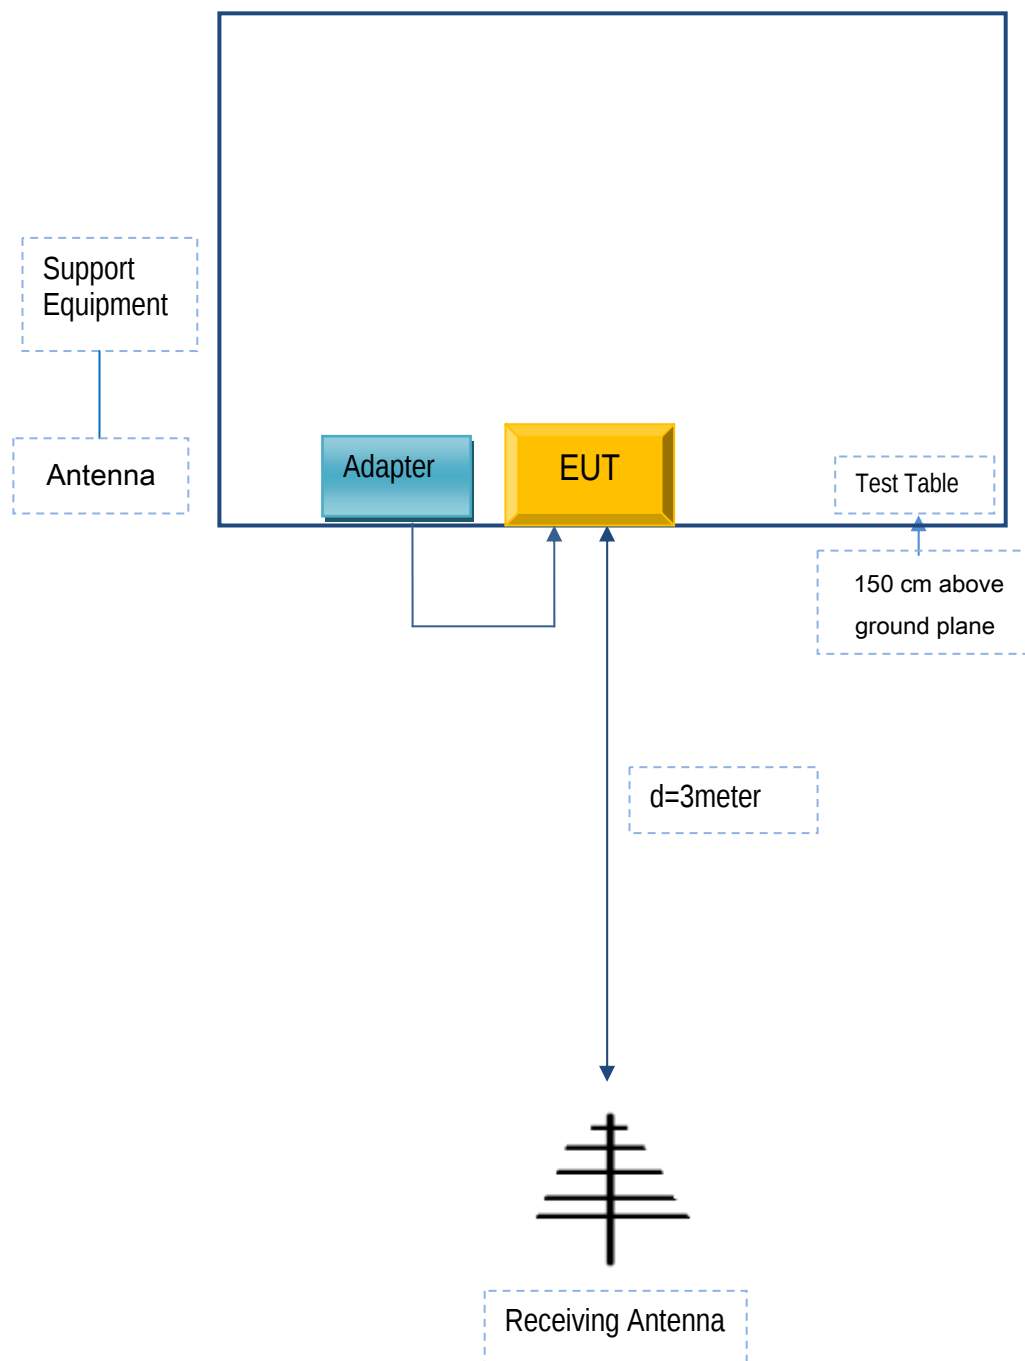

Annex C. II. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Shenzhen Vitek Electronics Co., Ltd	AC Adapter	RLTP169-BLACK	S71001

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	S71001

Test Report	16070853-FCC-R
Page	47 of 49

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	16070853-FCC-R
Page	48 of 49

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

Vitek Electronics International Co.,Ltd

To: 775 Montague Expressway Mlpitas,CA 95035,USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 3 model numbers on
The FCC reports, as following:

Model No: RLTP169 -BLACK, T19, S19Y
Trade: RCA, VITEK, VTEX
FCC ID: 2AI3CRLTP169-BLACK

We declare that : RLTP169 -BLACK, T19, S19Y, All models the same PCB and Appearance
shape, accessories ,the difference of these is listed as below:

Main Model No	Serial Model No	Difference
RLTP169 -BLACK	T19, S19Y	Model and trade mark

Thank you!

Sincerely,

Client's signature :

Client's name / title: SHI SHENG LI /Manager

Contact information : Vitek Electronics International Co.,Ltd

Address : Rm 2202, Leizhen Building, Fuming Rd, Shen Zhen, China

