DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

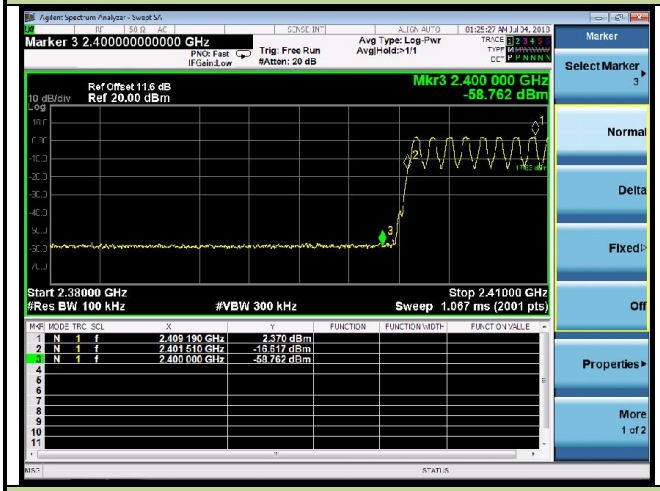

Channel 78 (2480MHz)

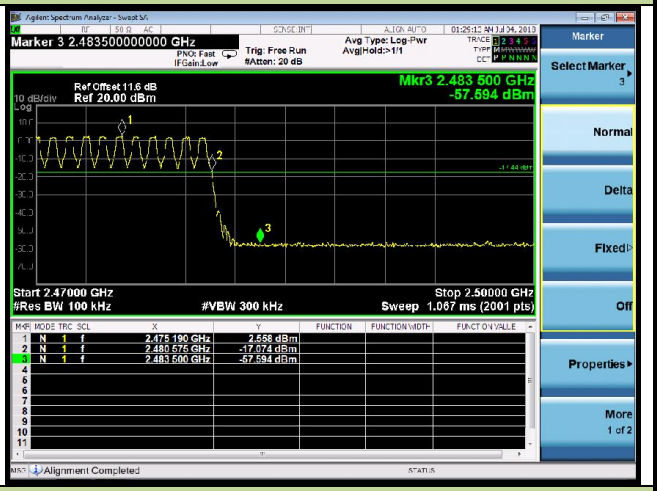

2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

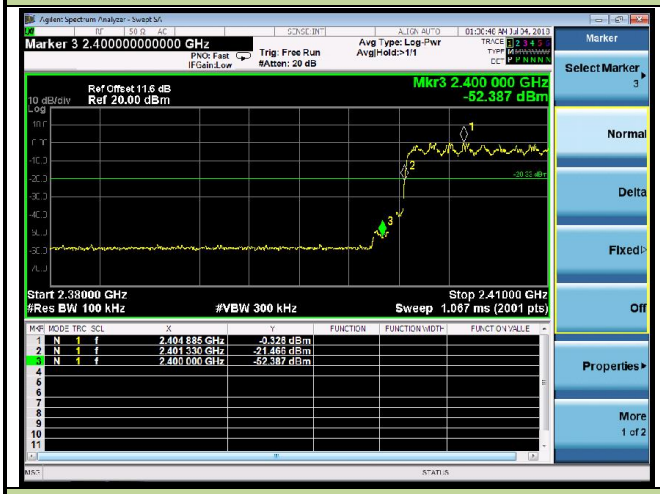

Channel 78 (2480MHz)

3DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

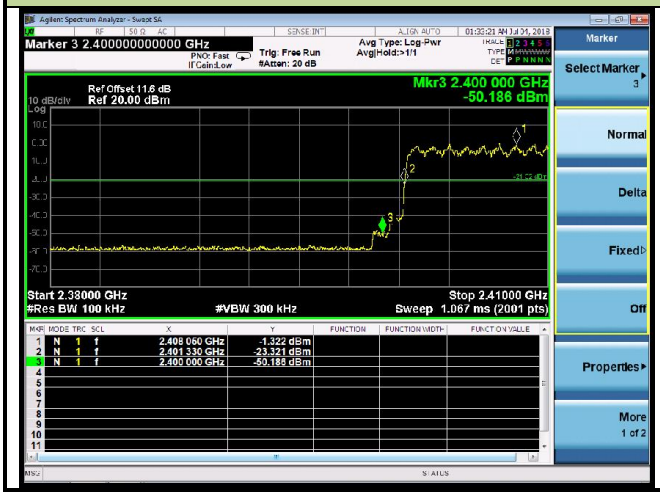

Channel 78 (2480MHz)

7.8. Conducted Spurious Emissions Measurement

7.8.1.Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.8.2.Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

7.8.3.Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 1.3 MHz
3. VBW ≥ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

7.8.4.Test Setup

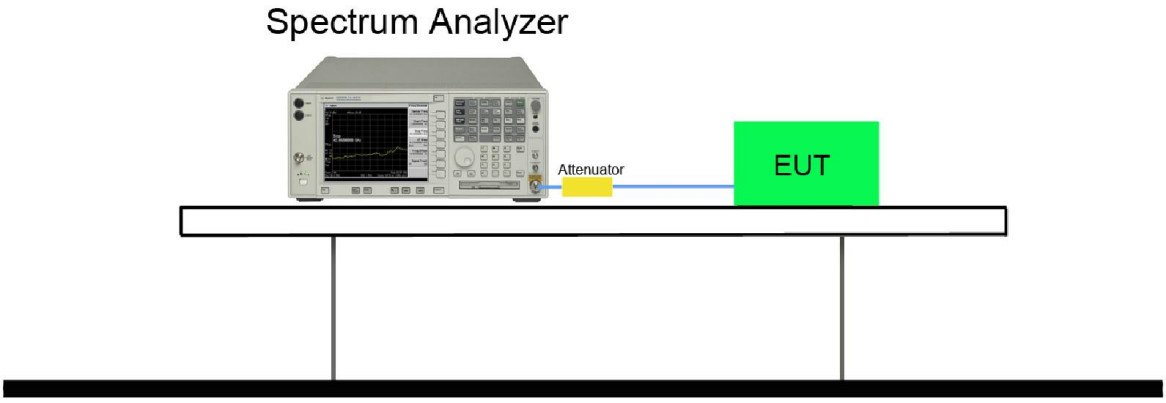

7.8.5.Test Result

Product	VR All-In-One Headset	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	52%
Test Site	TR3	Test Date	2018/07/04

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

Channel 39 (2441MHz)

Channel 78 (2480MHz)

2DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

Channel 39 (2441MHz)

Channel 78 (2480MHz)

3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

Channel 39 (2441MHz)

Channel 78 (2480MHz)

7.9. Radiated Spurious Emission Measurement

7.9.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2.Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW ≥ 1/T
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4.Test Setup

9kHz ~ 30MHz Test Setup:

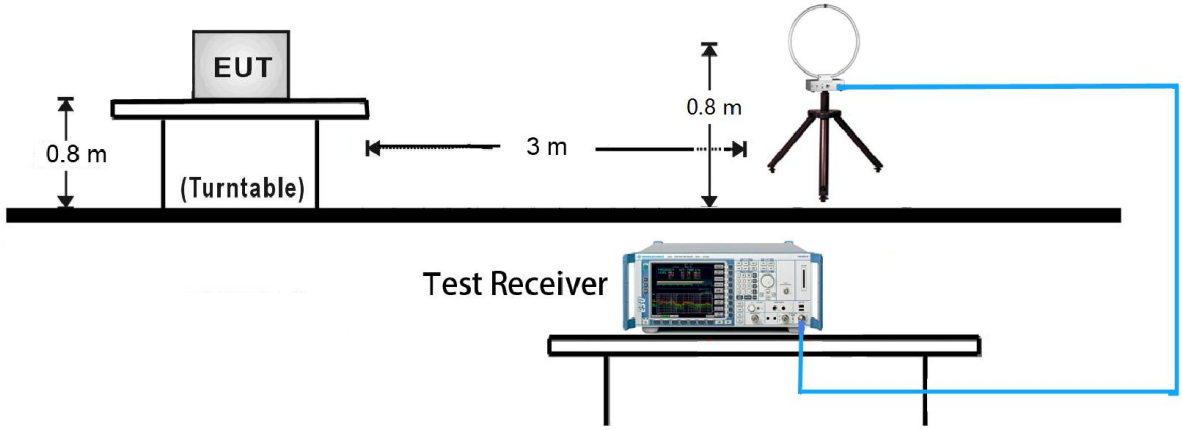

30MHz ~ 1GHz Test Setup:

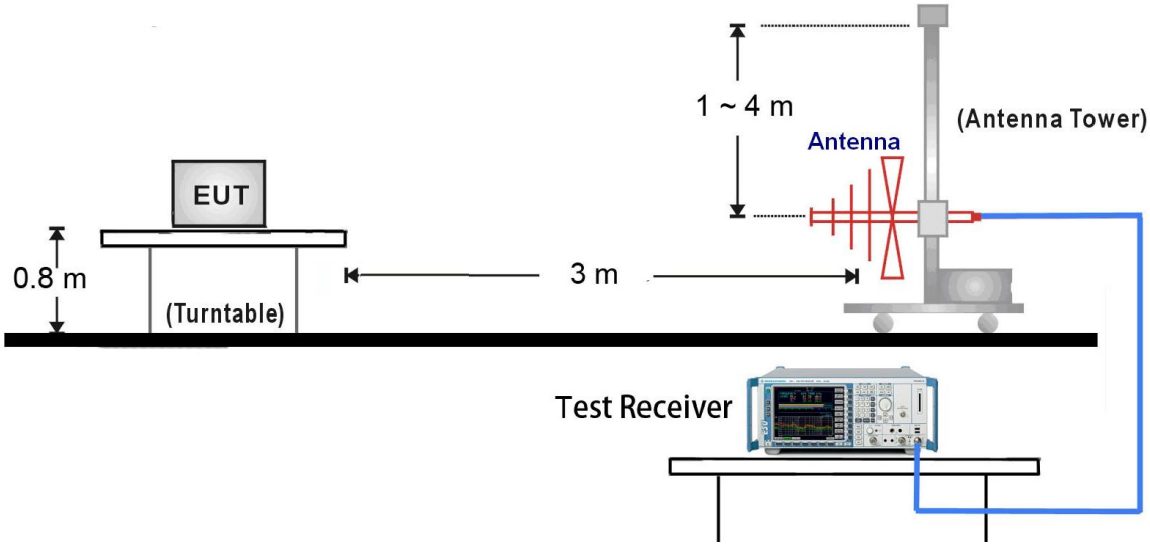

1GHz ~ 25GHz Test Setup:

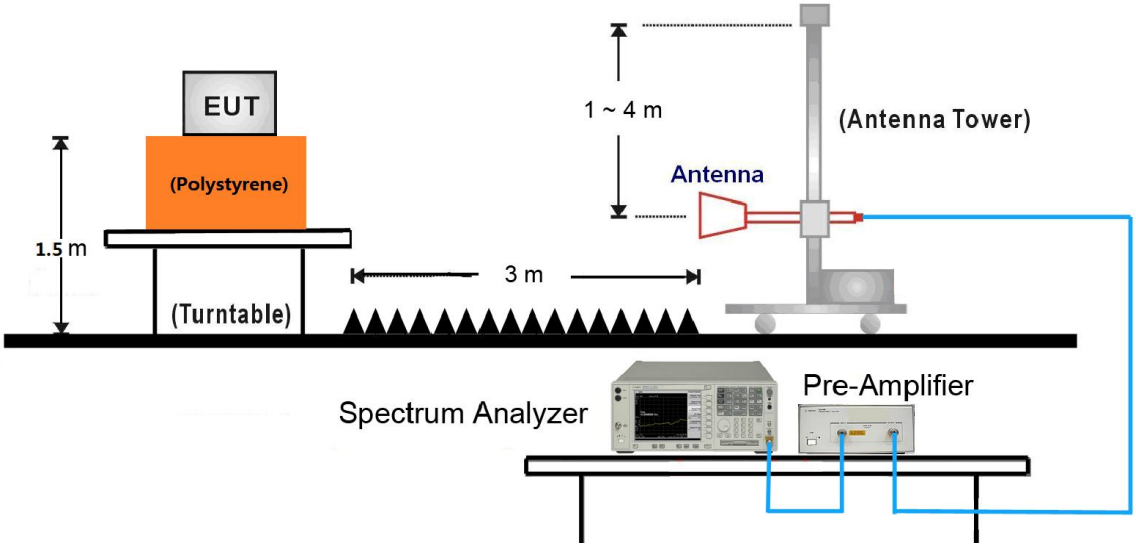

7.9.5.Test Result

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5607.0	36.5	7.0	43.5	76.2	-32.7	Peak	Horizontal
*	6100.0	35.0	8.1	43.1	76.2	-33.1	Peak	Horizontal
	7596.0	34.3	12.8	47.1	74.0	-26.9	Peak	Horizontal
	8412.0	34.0	12.5	46.5	74.0	-27.5	Peak	Horizontal
*	5760.0	36.2	7.4	43.6	76.2	-32.6	Peak	Vertical
*	6618.5	35.0	10.1	45.1	76.2	-31.1	Peak	Vertical
	7434.5	35.7	12.8	48.5	74.0	-25.5	Peak	Vertical
	8199.5	35.7	13.1	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (96.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5998.0	36.1	8.0	44.1	74.0	-29.9	Peak	Horizontal
*	6703.5	35.2	10.1	45.3	74.0	-28.7	Peak	Horizontal
	7468.5	35.8	12.9	48.7	74.0	-25.3	Peak	Horizontal
	8199.5	35.7	13.1	48.8	74.0	-25.2	Peak	Horizontal
*	5666.5	36.8	7.0	43.8	74.0	-30.2	Peak	Vertical
*	6797.0	35.1	10.3	45.4	74.0	-28.6	Peak	Vertical
	7587.5	34.5	12.8	47.3	74.0	-26.7	Peak	Vertical
	8199.5	34.4	13.1	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5862.0	35.9	7.8	43.7	74.0	-30.3	Peak	Horizontal
*	6457.0	35.4	9.8	45.2	74.0	-28.8	Peak	Horizontal
	7579.0	34.1	12.8	46.9	74.0	-27.1	Peak	Horizontal
	8174.0	36.1	13.2	49.3	74.0	-24.7	Peak	Horizontal
*	6176.5	36.0	8.3	44.3	74.0	-29.7	Peak	Vertical
*	6856.5	35.2	10.6	45.8	74.0	-28.2	Peak	Vertical
	7638.5	34.4	12.6	47.0	74.0	-27.0	Peak	Vertical
	8267.5	34.4	12.8	47.2	74.0	-26.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (91.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6057.5	34.5	7.9	42.4	74.8	-32.4	Peak	Horizontal
*	6916.0	34.9	10.9	45.8	74.8	-29.0	Peak	Horizontal
	7638.5	35.6	12.6	48.2	74.0	-25.8	Peak	Horizontal
	8463.0	35.5	12.7	48.2	74.0	-25.8	Peak	Horizontal
*	5615.5	34.6	7.0	41.6	74.8	-33.2	Peak	Vertical
*	6686.5	34.0	10.1	44.1	74.8	-30.7	Peak	Vertical
	7341.0	34.5	12.7	47.2	74.0	-26.8	Peak	Vertical
	8310.0	34.7	12.6	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5947.0	36.0	7.8	43.8	75.2	-31.4	Peak	Horizontal
*	6635.5	35.3	10.1	45.4	75.2	-29.8	Peak	Horizontal
	7468.5	35.0	12.9	47.9	74.0	-26.1	Peak	Horizontal
	8293.0	34.5	12.7	47.2	74.0	-26.8	Peak	Horizontal
*	5590.0	36.4	7.0	43.4	75.2	-31.8	Peak	Vertical
*	6083.0	35.3	8.0	43.3	75.2	-31.9	Peak	Vertical
	7621.5	34.4	12.6	47.0	74.0	-27.0	Peak	Vertical
	8131.5	35.1	13.4	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5539.0	34.7	6.9	41.6	75.6	-34.0	Peak	Horizontal
*	6525.0	35.4	10.0	45.4	75.6	-30.2	Peak	Horizontal
	7630.0	34.6	12.6	47.2	74.0	-26.8	Peak	Horizontal
	8310.0	35.2	12.6	47.8	74.0	-26.2	Peak	Horizontal
*	5989.5	36.3	7.9	44.2	75.6	-31.4	Peak	Vertical
*	6780.0	34.7	10.1	44.8	75.6	-30.8	Peak	Vertical
	7621.5	34.7	12.6	47.3	74.0	-26.7	Peak	Vertical
	8293.0	34.9	12.7	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5692.0	37.6	7.1	44.7	75.1	-30.4	Peak	Horizontal
*	6440.0	34.6	9.6	44.2	75.1	-30.9	Peak	Horizontal
	7536.5	34.9	12.9	47.8	74.0	-26.2	Peak	Horizontal
	8344.0	34.9	12.6	47.5	74.0	-26.5	Peak	Horizontal
*	5785.5	36.1	7.5	43.6	75.1	-31.5	Peak	Vertical
*	7009.5	34.1	11.3	45.4	75.1	-29.7	Peak	Vertical
	7638.5	34.6	12.6	47.2	74.0	-26.8	Peak	Vertical
	8310.0	34.5	12.6	47.1	74.0	-26.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5581.5	35.8	7.0	42.8	75.5	-32.7	Peak	Horizontal
*	6856.5	34.9	10.6	45.5	75.5	-30.0	Peak	Horizontal
	7400.5	34.7	12.6	47.3	74.0	-26.7	Peak	Horizontal
	8140.0	34.5	13.4	47.9	74.0	-26.1	Peak	Horizontal
*	5743.0	36.6	7.4	44.0	75.5	-31.5	Peak	Vertical
*	7230.5	36.9	12.7	49.6	75.5	-25.9	Peak	Vertical
	7468.5	35.4	12.9	48.3	74.0	-25.7	Peak	Vertical
	8199.5	35.6	13.1	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Cat Hu
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5683.5	34.6	7.1	41.7	75.8	-34.1	Peak	Horizontal
*	6822.5	35.1	10.5	45.6	75.8	-30.2	Peak	Horizontal
	7468.5	34.8	12.9	47.7	74.0	-26.3	Peak	Horizontal
	8352.5	35.8	12.6	48.4	74.0	-25.6	Peak	Horizontal
*	6032.0	35.7	7.9	43.6	75.8	-32.2	Peak	Vertical
*	6644.0	35.4	10.1	45.5	75.8	-30.3	Peak	Vertical
	7502.5	34.4	12.7	47.1	74.0	-26.9	Peak	Vertical
	8284.5	35.4	12.7	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission 9kHz ~ 1GHz and 18GHz ~ 25GHz:

Site: AC1	Time: 2018/07/04 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

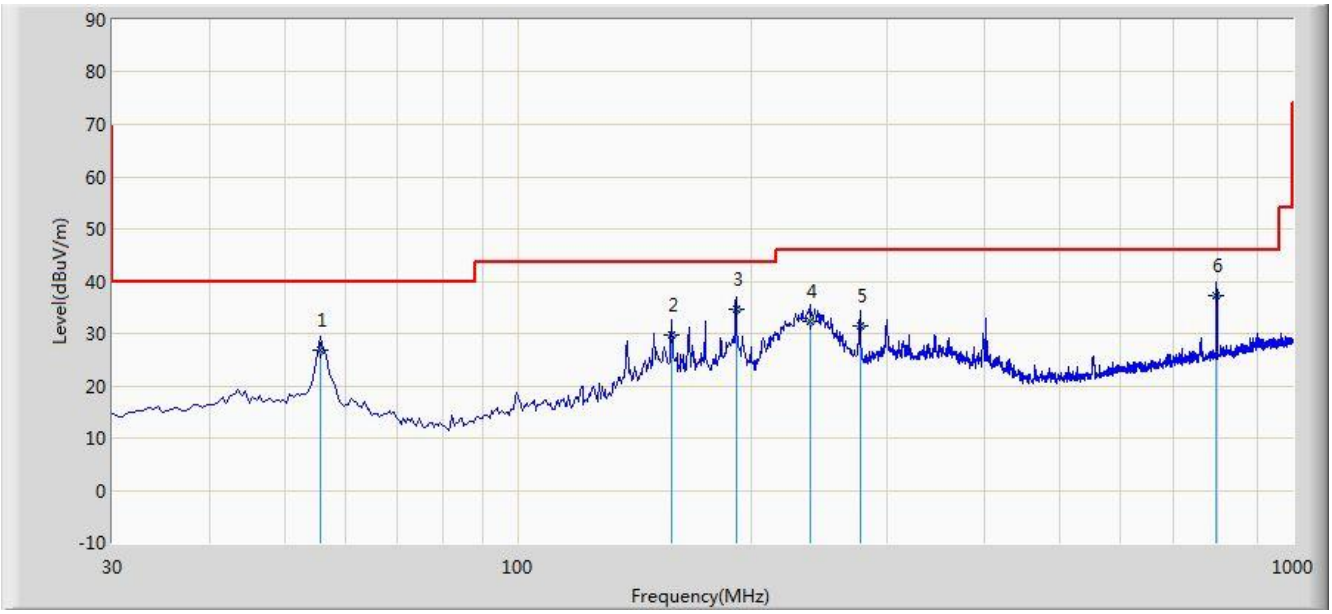

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		55.705	26.747	12.050	-13.253	40.000	14.697	QP
2		158.040	29.850	19.870	-13.650	43.500	9.980	QP
3	*	191.505	34.767	22.650	-8.733	43.500	12.117	QP
4		238.065	32.450	18.840	-13.550	46.000	13.611	QP
5		276.865	31.581	17.150	-14.419	46.000	14.432	QP
6		796.785	37.230	14.015	-8.770	46.000	23.215	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/07/04 - 10:47
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

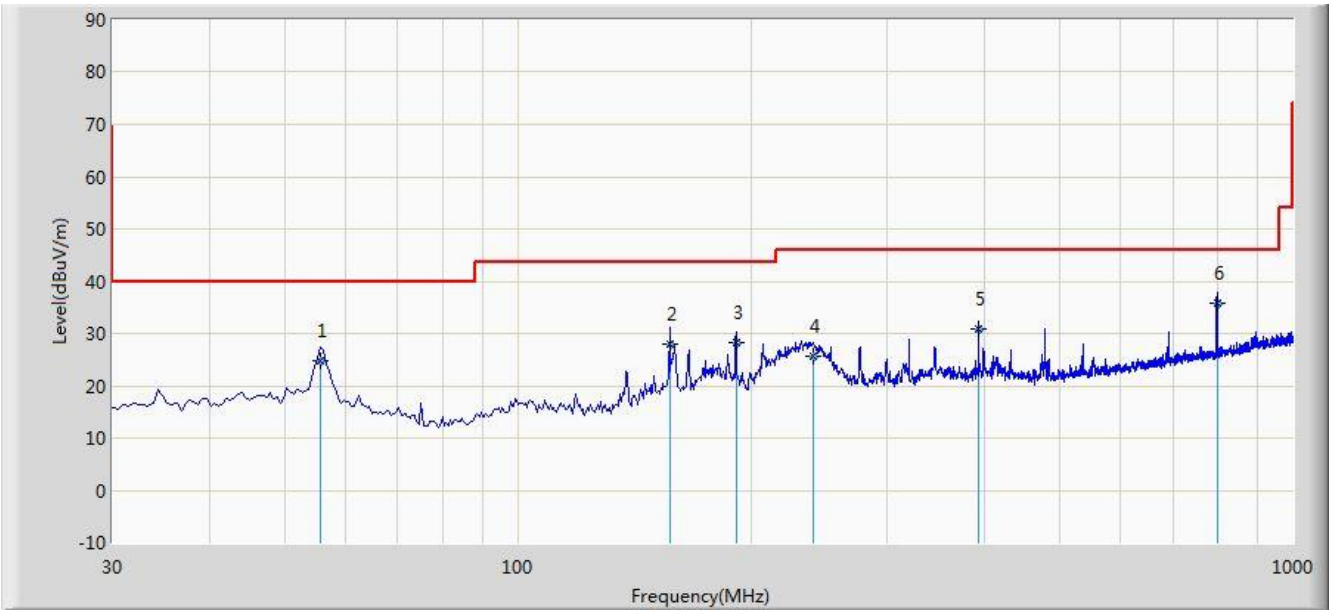

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		55.705	24.837	10.140	-15.163	40.000	14.697	QP
2		157.070	27.985	18.043	-15.515	43.500	9.942	QP
3		191.505	28.167	16.050	-15.333	43.500	12.117	QP
4		240.490	25.790	12.105	-20.210	46.000	13.685	QP
5		392.780	30.835	13.940	-15.165	46.000	16.895	QP
6	*	799.695	35.758	12.500	-10.242	46.000	23.259	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1] 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.10.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.10.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW ≥ 1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.10.4.Test Setup

1GHz ~ 18GHz Test Setup:

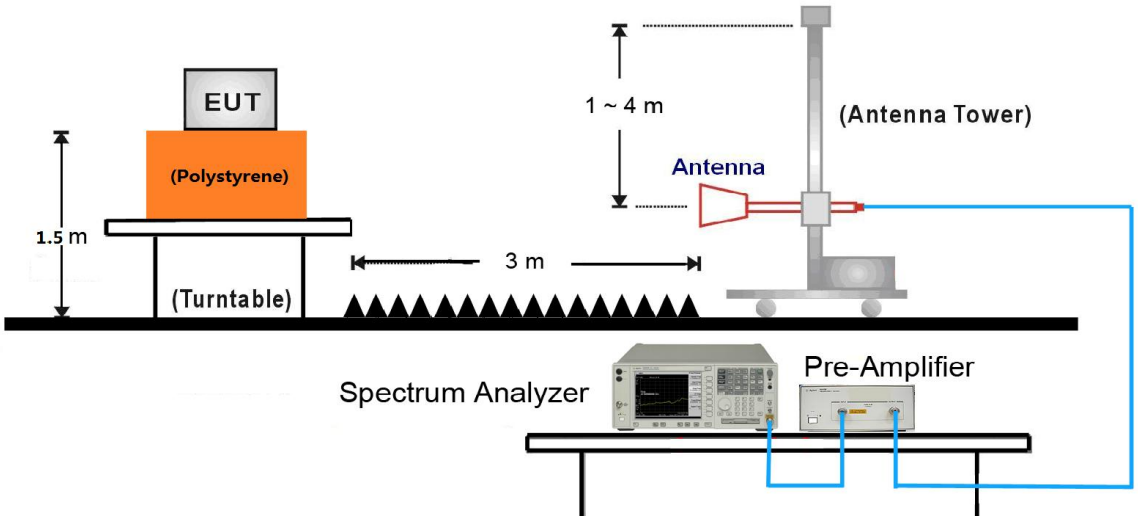

7.10.1.Test Result

Site: AC1	Time: 2018/07/04 - 04:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

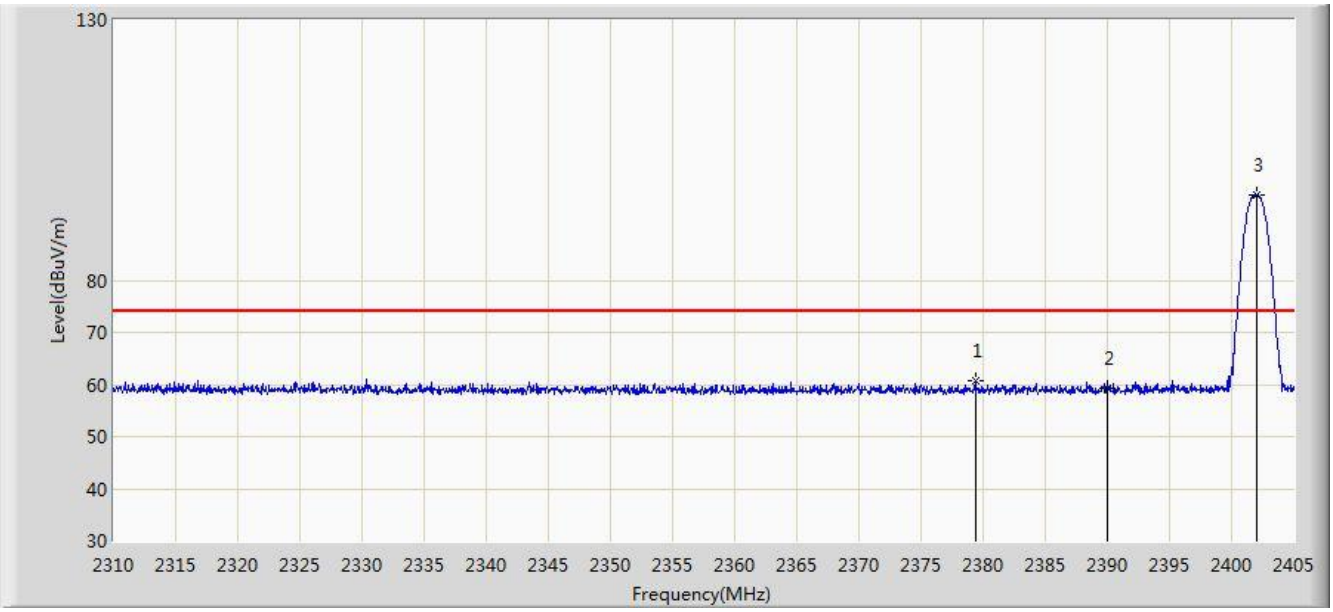

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.350	60.692	28.351	-13.308	74.000	32.341	PK
2			2390.000	59.359	27.032	-14.641	74.000	32.327	PK
3		*	2402.008	96.236	63.932	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 04:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

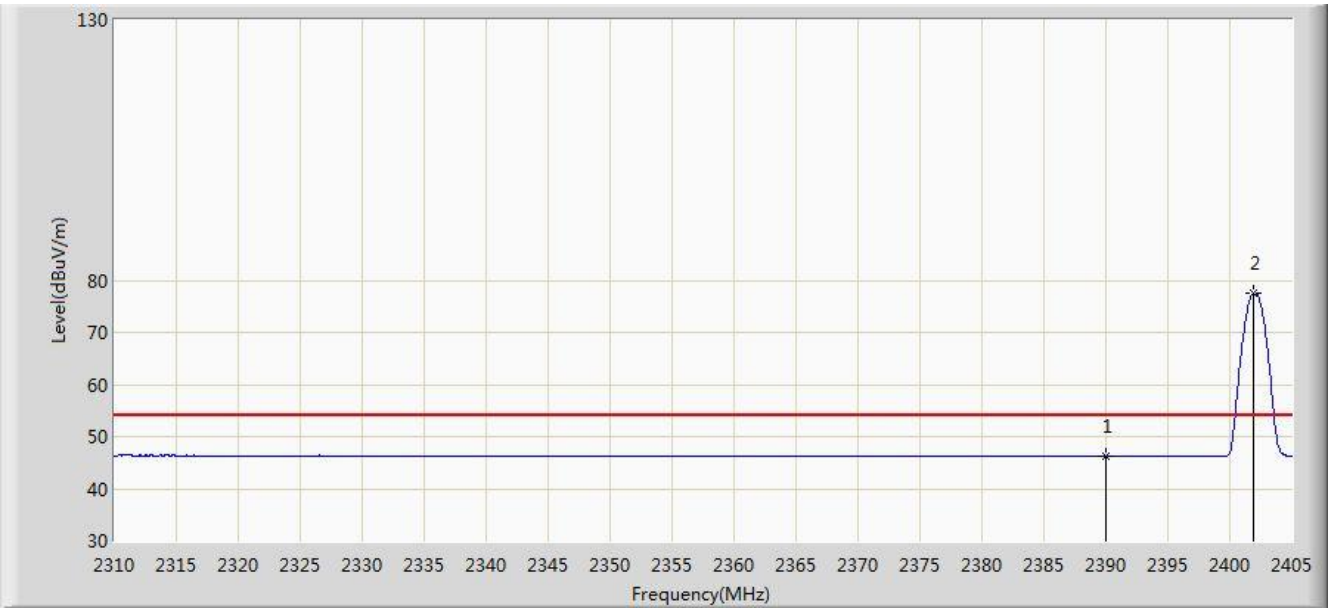

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.225	13.898	-7.775	54.000	32.327	AV
2		*	2401.960	77.673	45.368	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 04:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

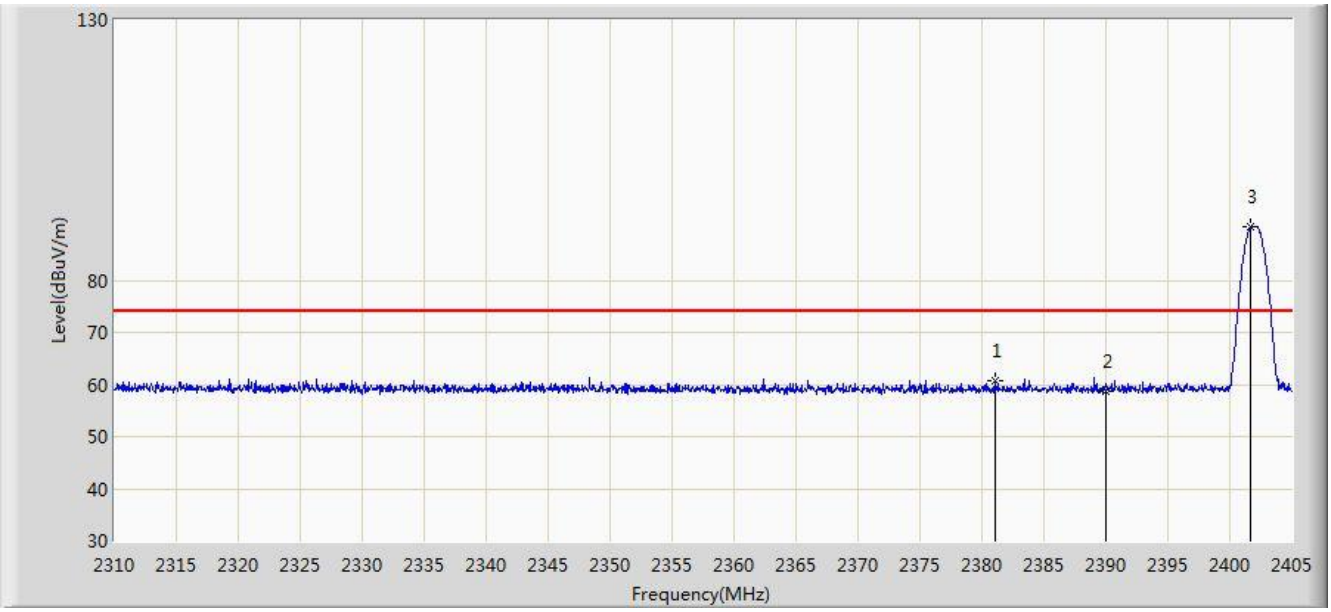

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.107	60.594	28.255	-13.406	74.000	32.339	PK
2			2390.000	58.726	26.399	-15.274	74.000	32.327	PK
3		*	2401.722	90.193	57.888	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

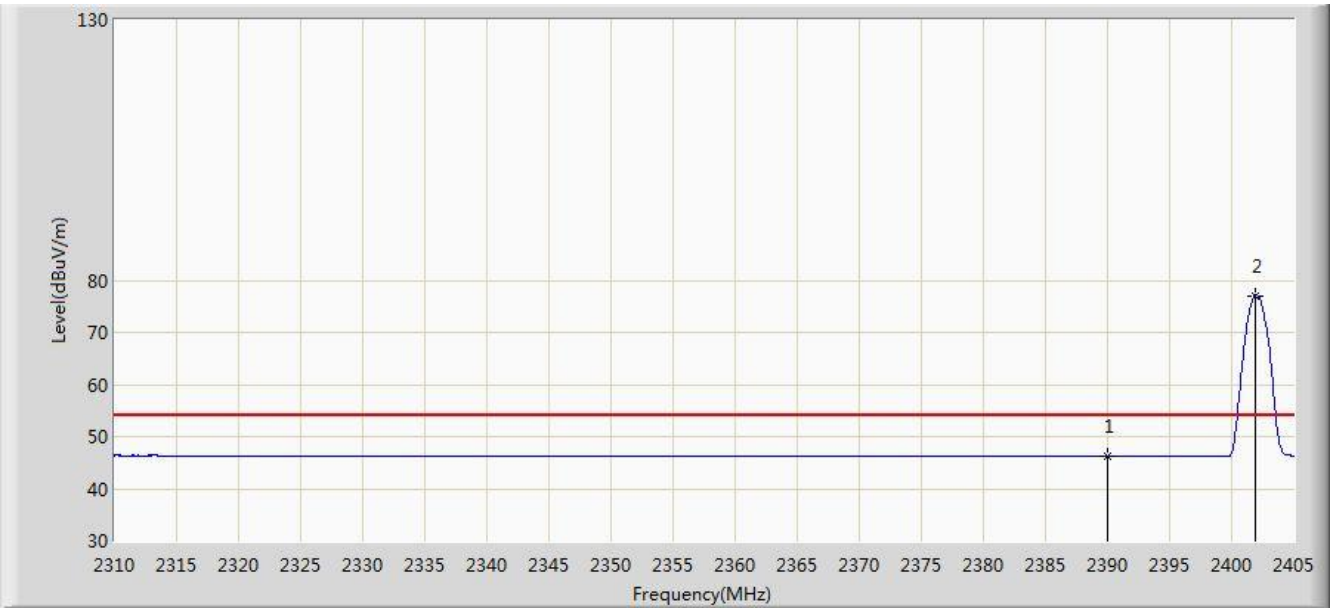

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.213	13.886	-7.787	54.000	32.327	AV
2		*	2401.913	77.079	44.774	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 04:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

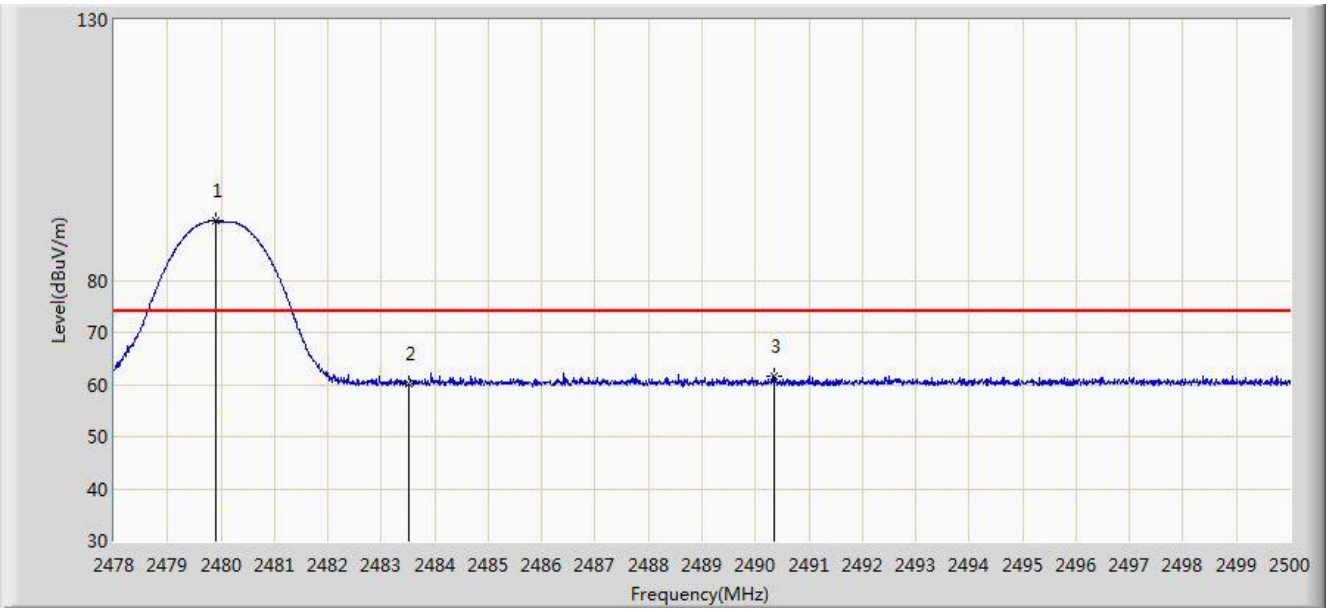

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.914	91.349	59.024	N/A	N/A	32.325	PK
2			2483.500	60.025	27.686	-13.975	74.000	32.340	PK
3			2490.342	61.663	29.297	-12.337	74.000	32.366	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

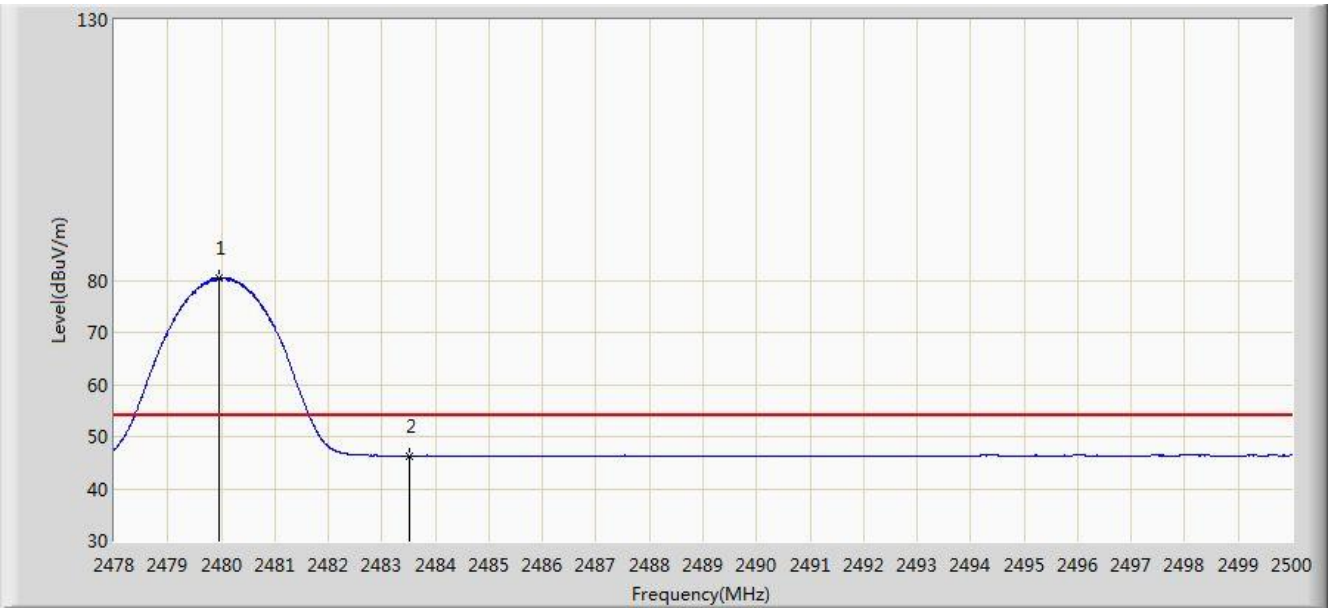

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.958	80.484	48.159	N/A	N/A	32.325	AV
2			2483.500	46.351	14.012	-7.649	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Cat Hu	
Site: AC1	Time: 2018/07/04 - 05:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

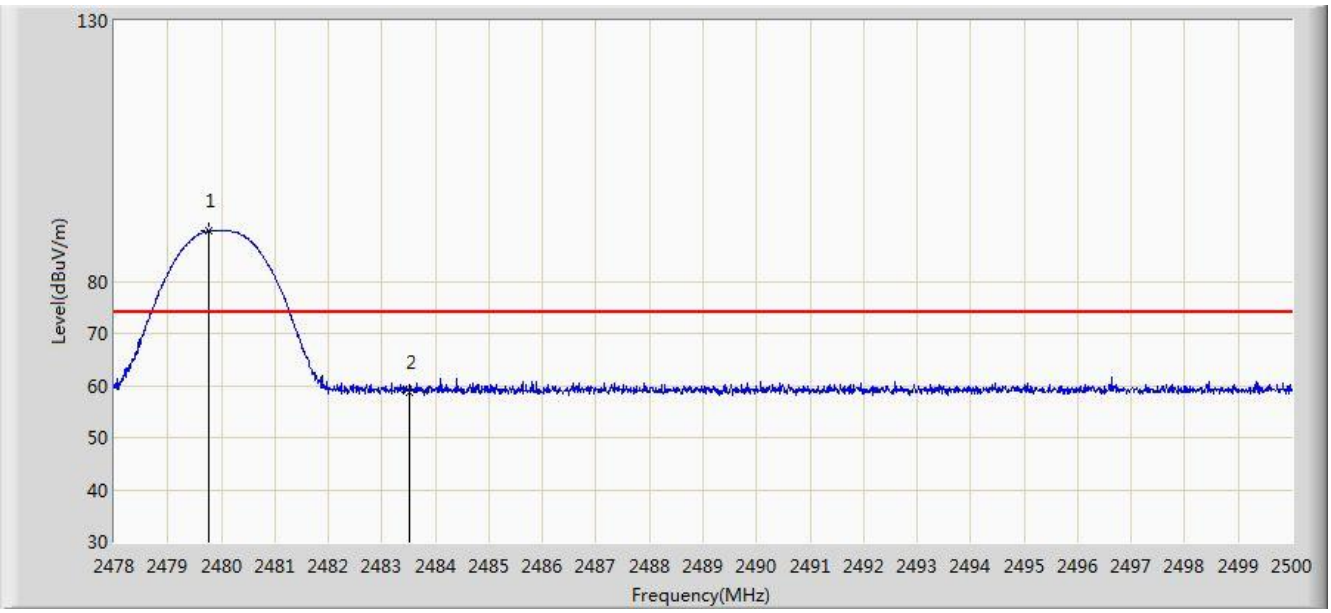

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.771	89.631	57.306	N/A	N/A	32.325	PK
2			2483.500	58.603	26.264	-15.397	74.000	32.340	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Cat Hu	
Site: AC1	Time: 2018/07/04 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

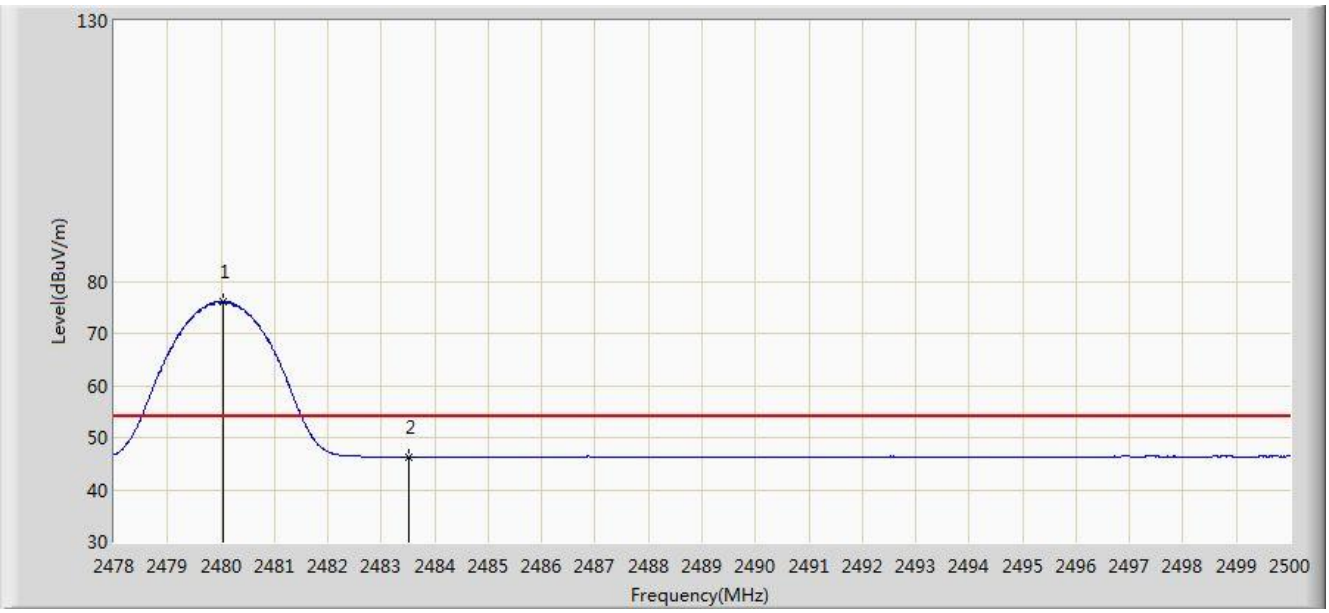

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	76.140	43.814	N/A	N/A	32.325	AV
2			2483.500	46.320	13.981	-7.680	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

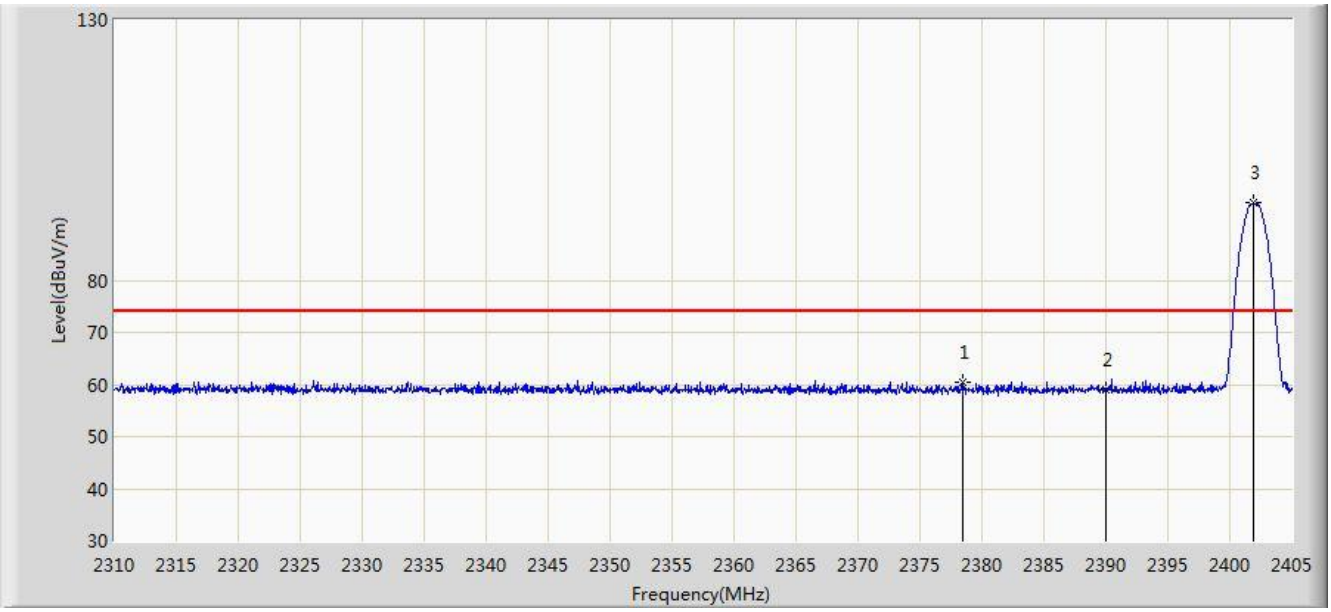

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.495	60.311	27.968	-13.689	74.000	32.343	PK
2			2390.000	59.126	26.799	-14.874	74.000	32.327	PK
3		*	2401.865	94.822	62.517	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

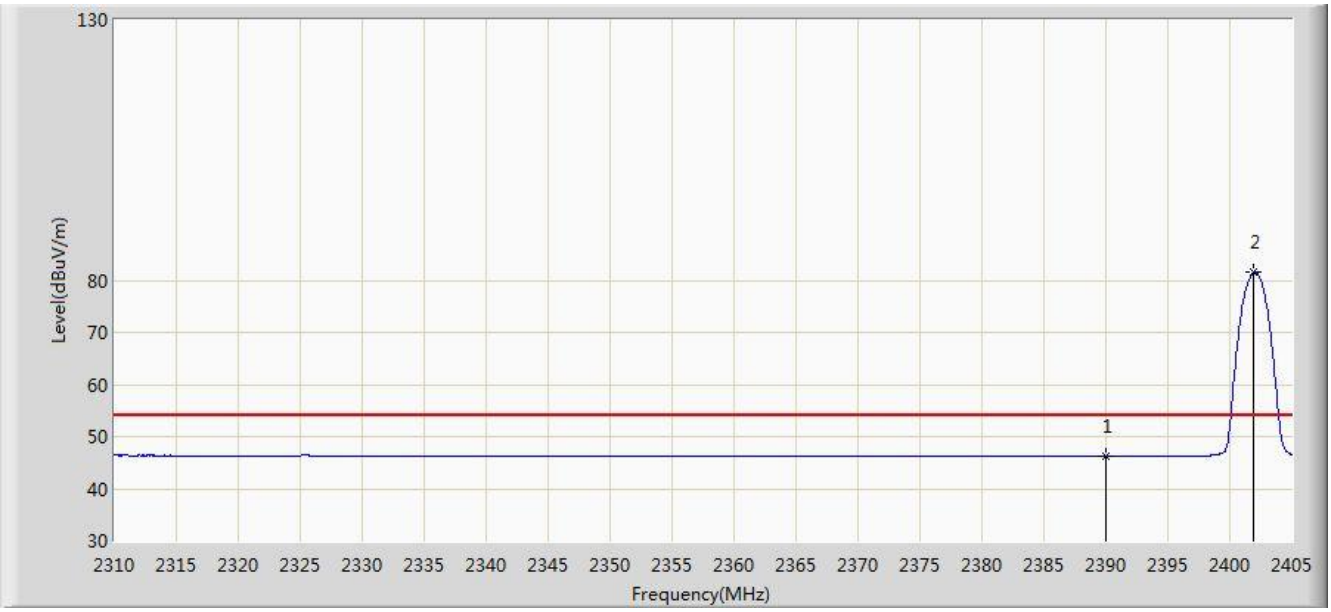

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.230	13.903	-7.770	54.000	32.327	AV
2		*	2401.865	81.450	49.145	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

aSite: AC1	Time: 2018/07/04 - 05:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

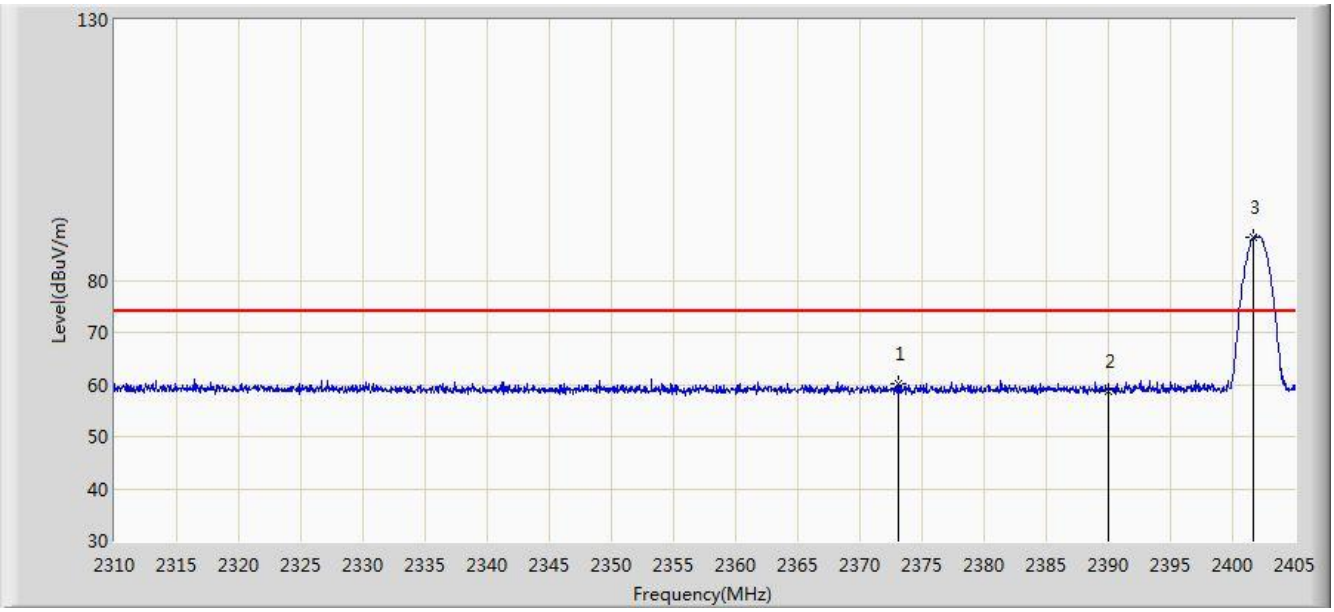

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.127	60.286	27.934	-13.714	74.000	32.352	PK
2			2390.000	58.635	26.308	-15.365	74.000	32.327	PK
3		*	2401.722	88.230	55.925	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

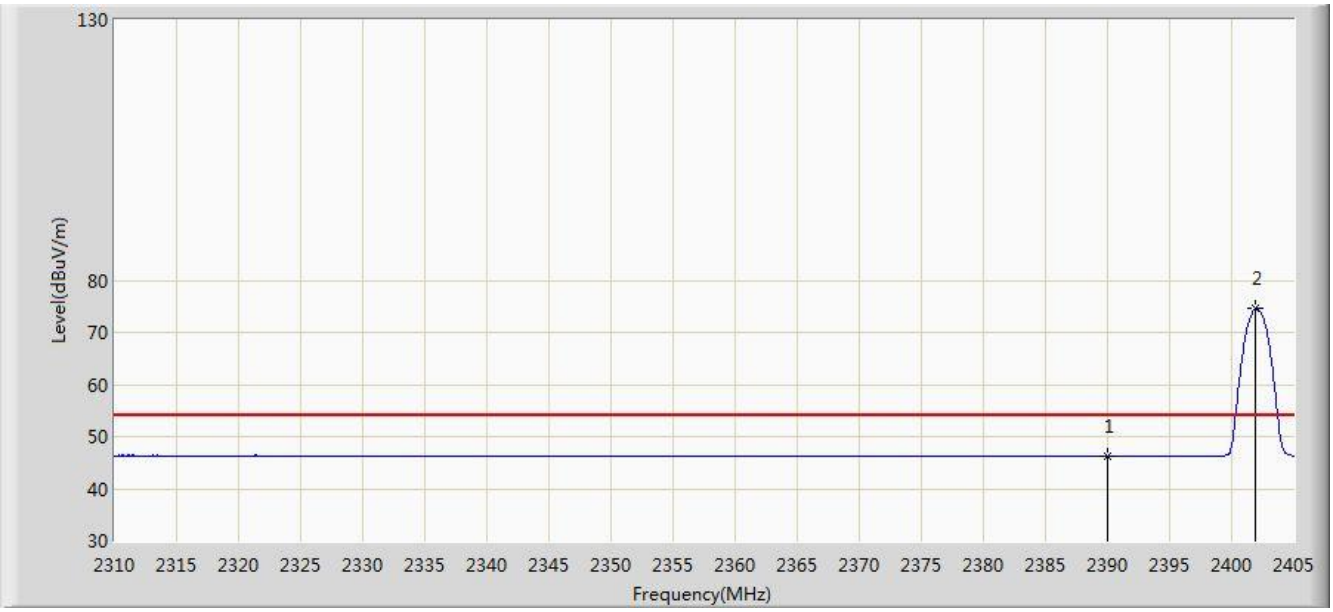

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.167	13.840	-7.833	54.000	32.327	AV
2		*	2401.913	74.611	42.306	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

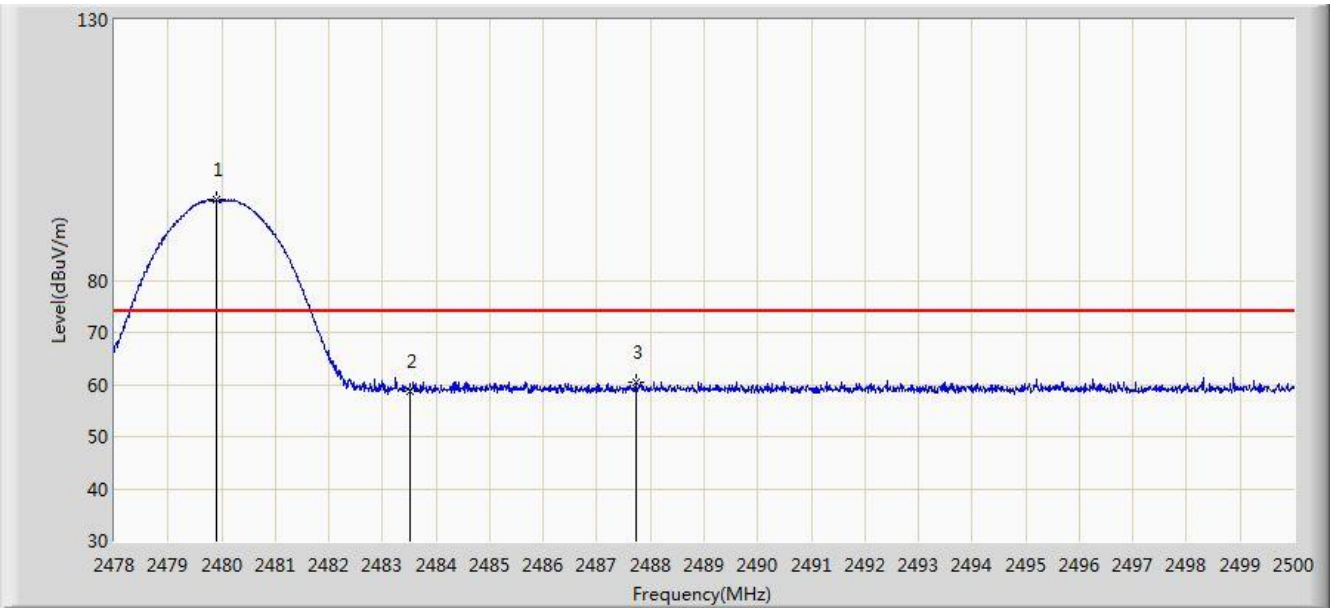

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	95.565	63.240	N/A	N/A	32.325	PK
2			2483.500	58.612	26.273	-15.388	74.000	32.340	PK
3			2487.735	60.484	28.128	-13.516	74.000	32.355	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

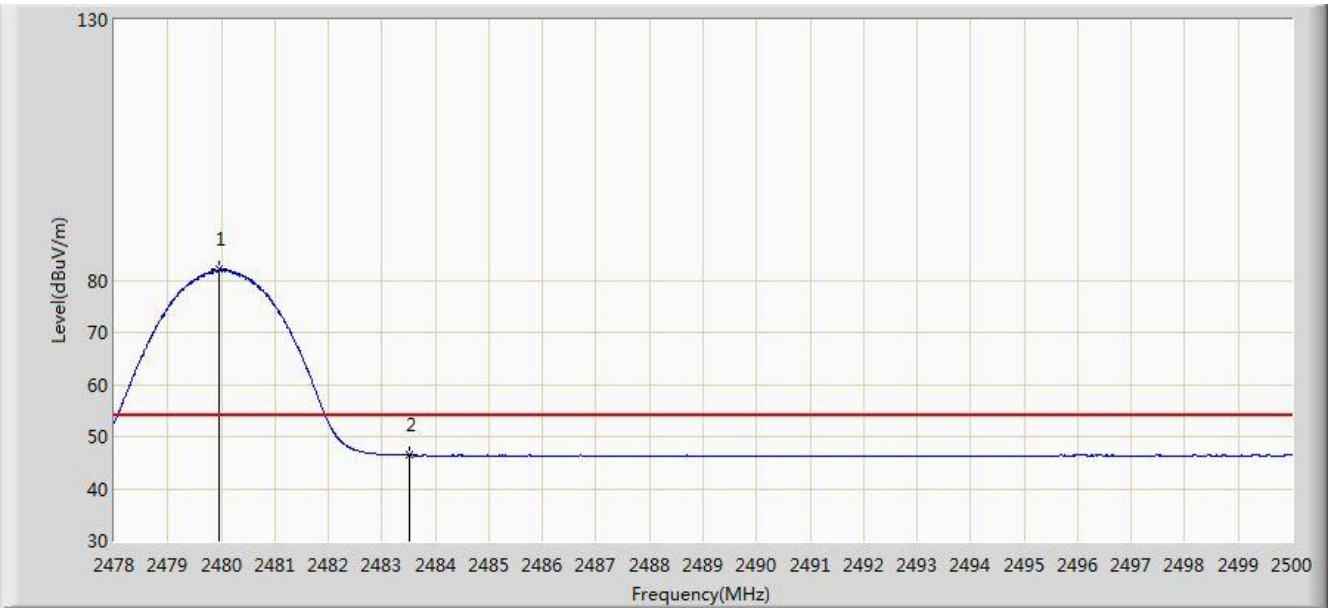

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.947	82.046	49.721	N/A	N/A	32.325	AV
2			2483.500	46.391	14.052	-7.609	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

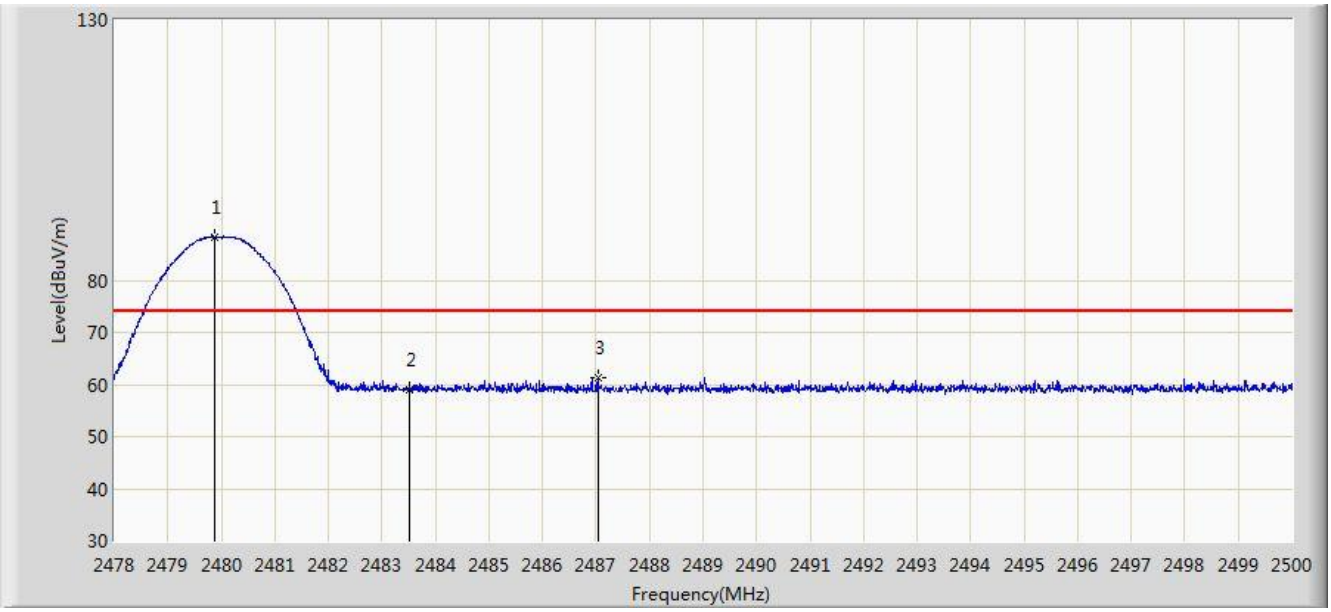

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	88.369	56.044	N/A	N/A	32.325	PK
2			2483.500	58.943	26.604	-15.057	74.000	32.340	PK
3			2487.031	61.386	29.033	-12.614	74.000	32.353	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

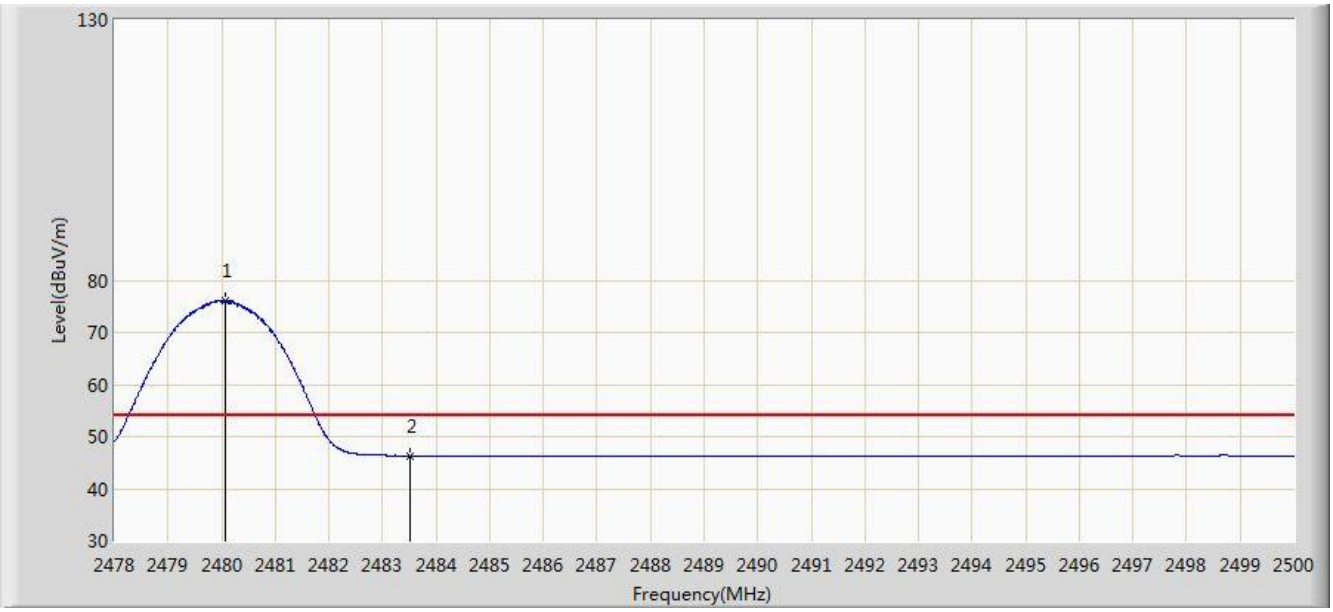

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	76.062	43.736	N/A	N/A	32.325	AV
2			2483.500	46.330	13.991	-7.670	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

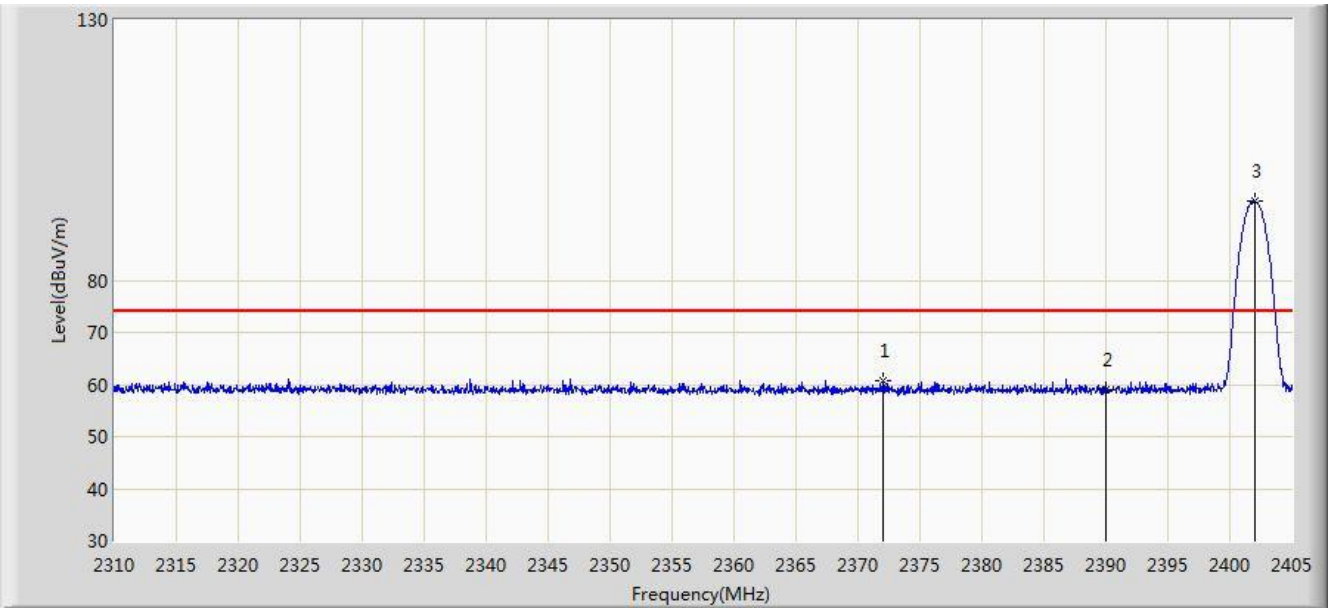

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.083	60.770	28.416	-13.230	74.000	32.354	PK
2			2390.000	58.996	26.669	-15.004	74.000	32.327	PK
3		*	2402.008	95.074	62.770	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

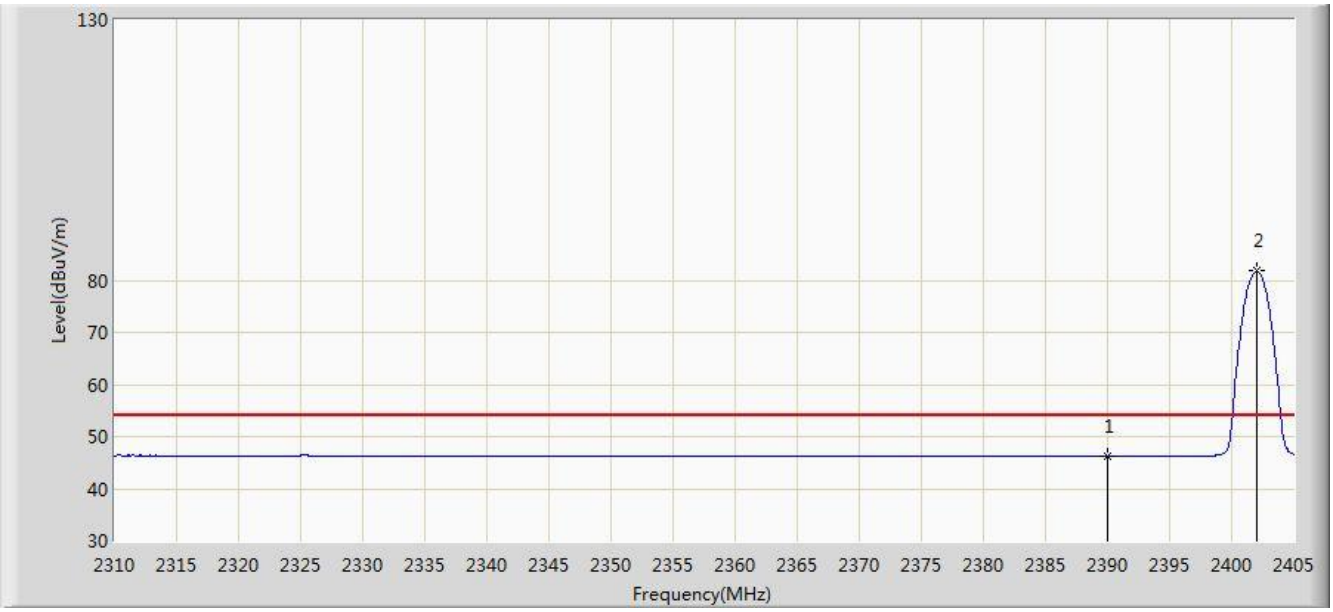

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.252	13.925	-7.748	54.000	32.327	AV
2		*	2402.008	81.742	49.438	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

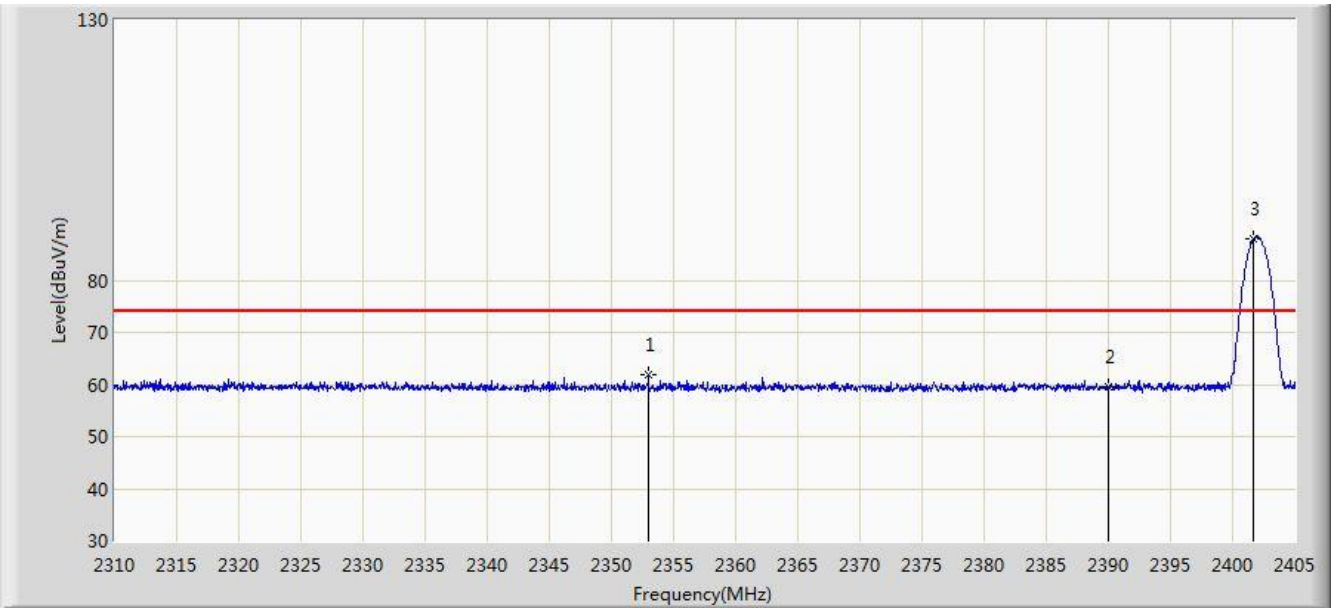

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2352.988	61.901	29.509	-12.099	74.000	32.393	PK
2			2390.000	59.430	27.103	-14.570	74.000	32.327	PK
3		*	2401.675	87.994	55.689	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

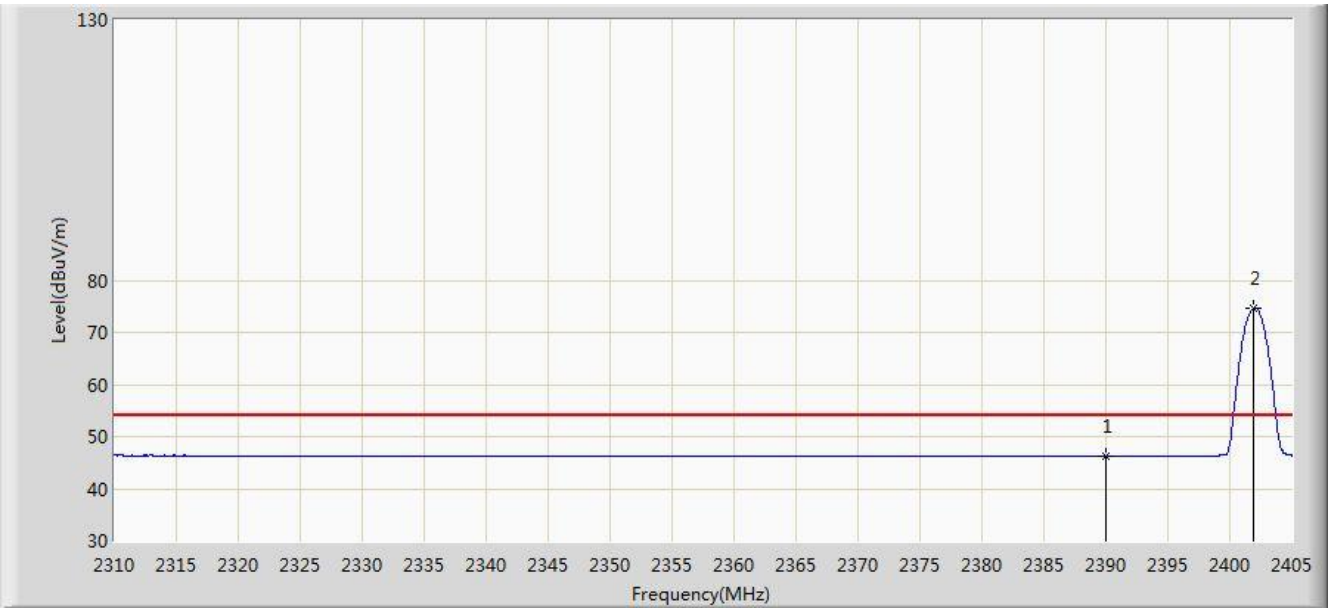

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.234	13.907	-7.766	54.000	32.327	AV
2		*	2401.865	74.581	42.276	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

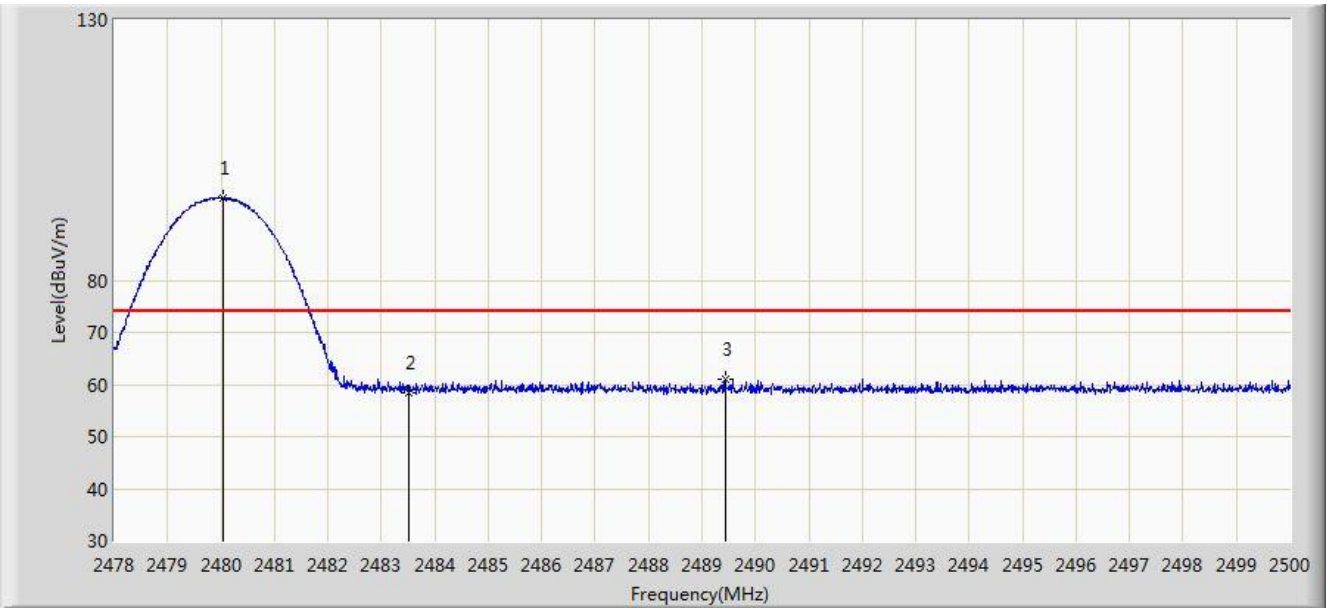

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	95.793	63.467	N/A	N/A	32.325	PK
2			2483.500	58.383	26.044	-15.617	74.000	32.340	PK
3			2489.429	61.033	28.671	-12.967	74.000	32.362	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

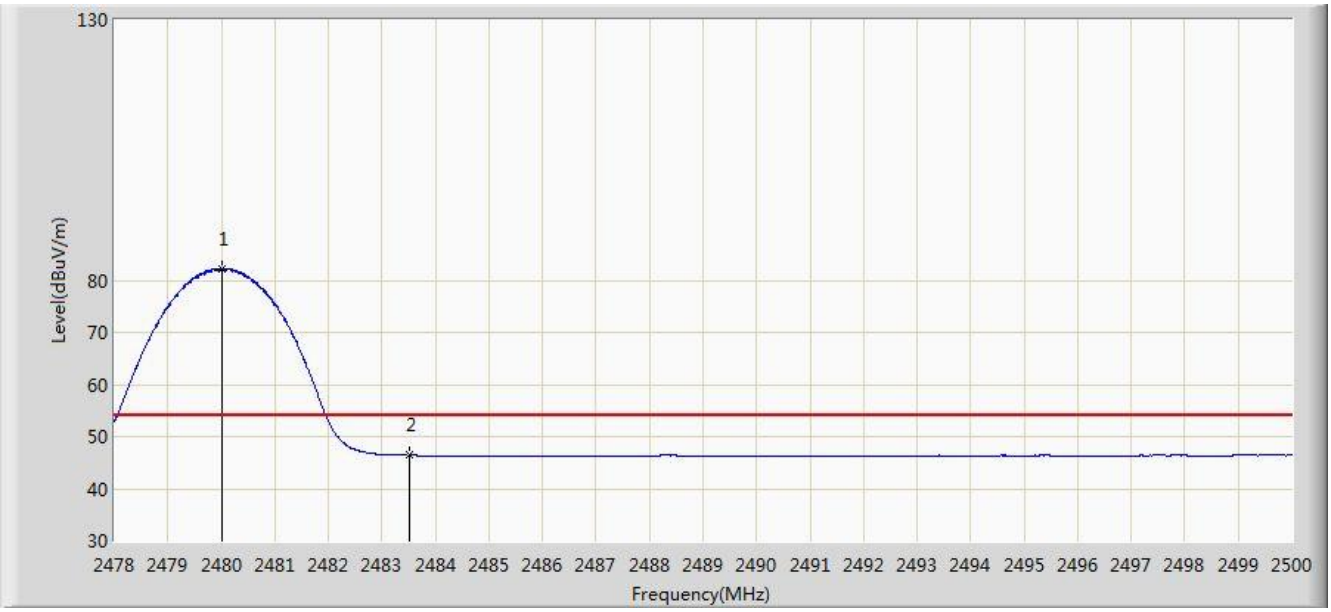

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	82.209	49.884	N/A	N/A	32.325	AV
2			2483.500	46.380	14.041	-7.620	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

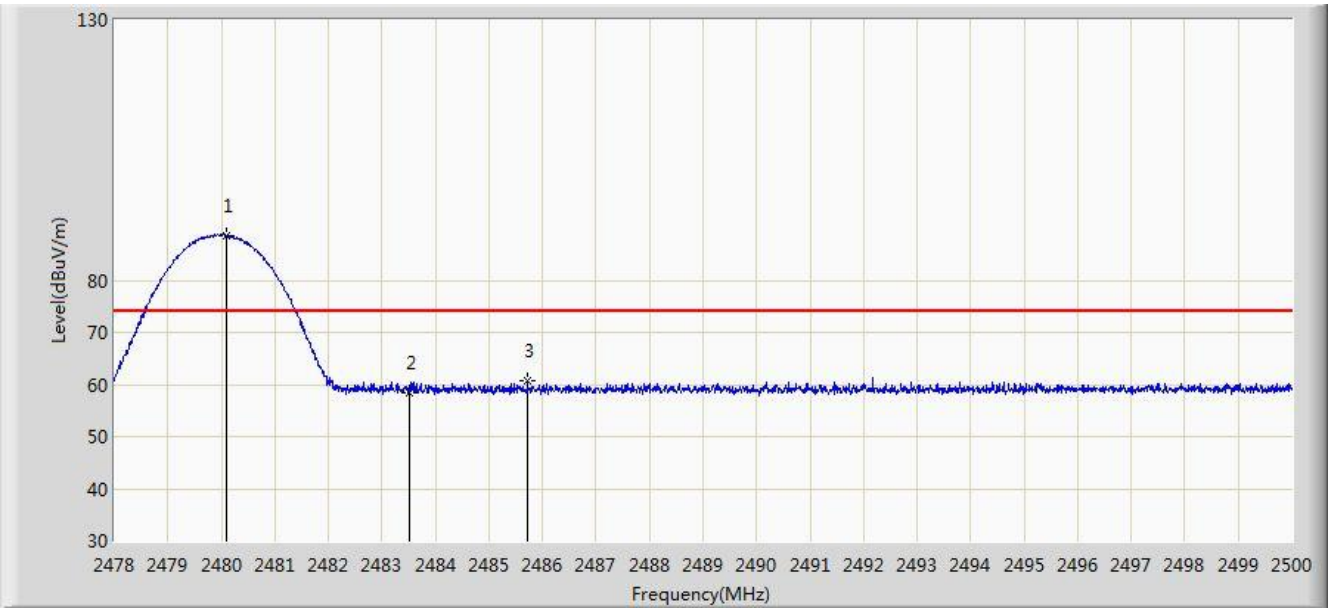

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.090	88.583	56.257	N/A	N/A	32.325	PK
2			2483.500	58.461	26.122	-15.539	74.000	32.340	PK
3			2485.722	60.700	28.352	-13.300	74.000	32.348	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/07/04 - 05:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

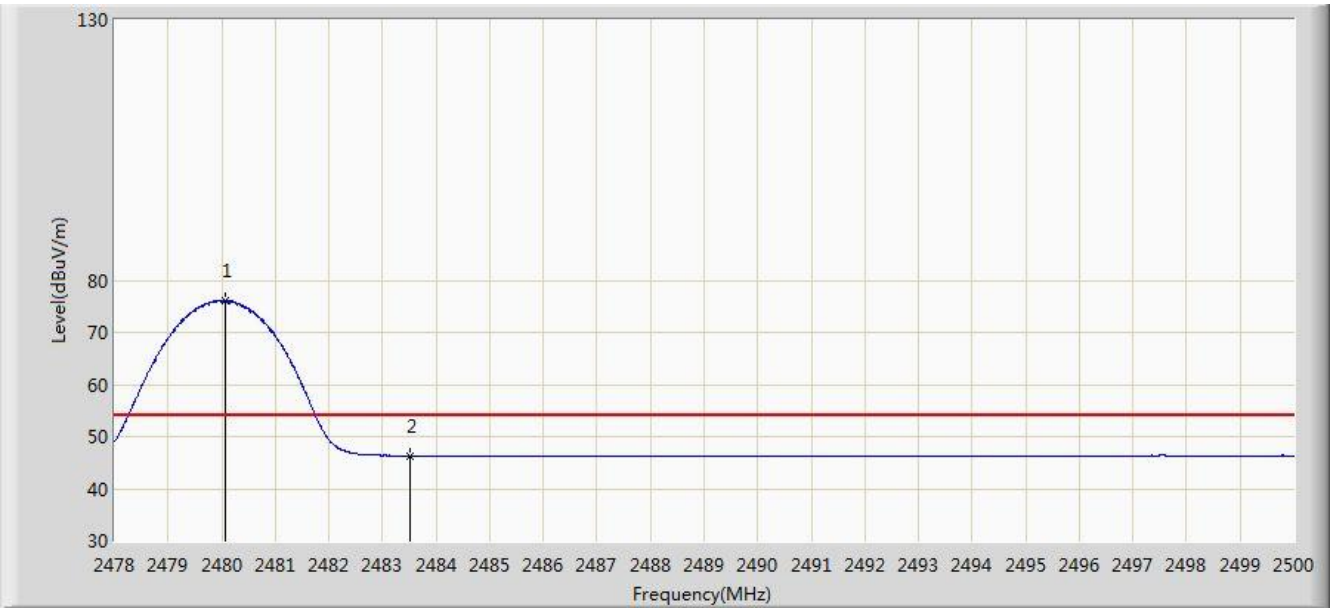

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	76.144	43.818	N/A	N/A	32.325	AV
2			2483.500	46.337	13.998	-7.663	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

7.11. AC Conducted Emissions Measurement

7.11.1.Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dBμV)	Average (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2.Test Setup

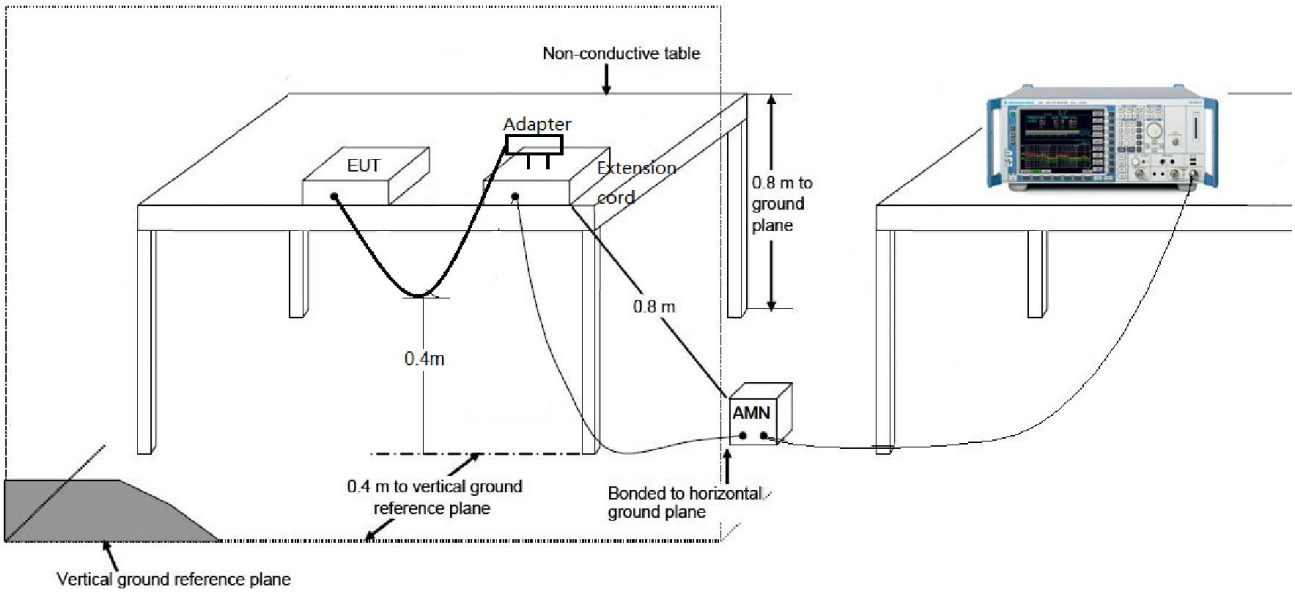

7.11.3.Test Result

Site: SR2	Time: 2018/07/23 - 09:24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

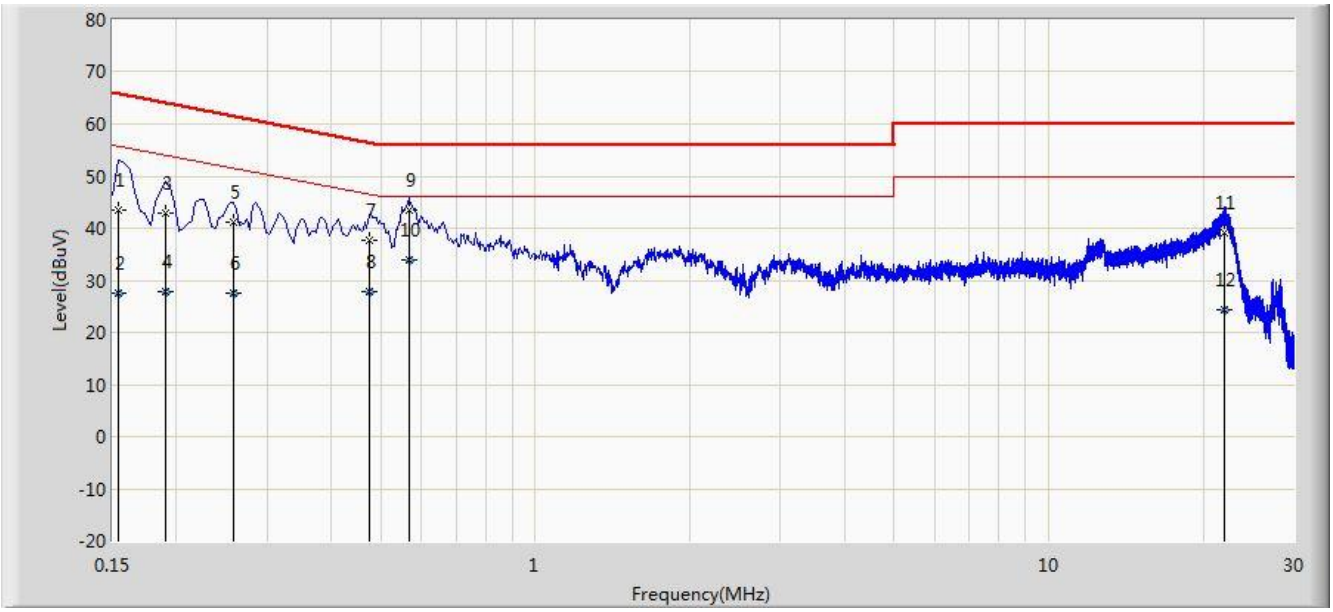

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	43.578	32.838	-22.204	65.781	10.740	QP
2			0.154	27.579	16.839	-28.203	55.781	10.740	AV
3			0.190	42.987	32.958	-21.049	64.037	10.029	QP
4			0.190	27.903	17.874	-26.134	54.037	10.029	AV
5			0.258	41.116	31.146	-20.379	61.496	9.970	QP
6			0.258	27.527	17.556	-23.969	51.496	9.970	AV
7			0.474	37.667	27.522	-18.776	56.444	10.145	QP
8			0.474	27.874	17.729	-18.570	46.444	10.145	AV
9			0.566	43.531	33.399	-12.469	56.000	10.132	QP
10		*	0.566	33.944	23.811	-12.056	46.000	10.132	AV
11			21.986	39.190	29.021	-20.810	60.000	10.169	QP
12			21.986	24.345	14.176	-25.655	50.000	10.169	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2018/07/23 - 09:30
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

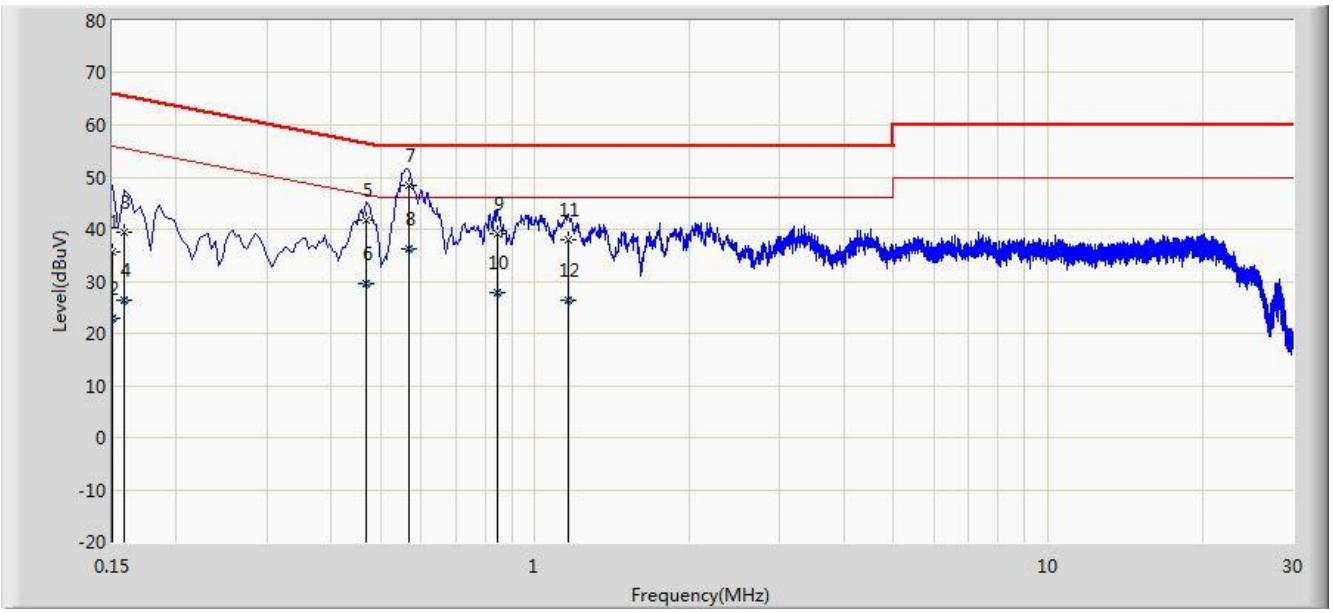

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	35.728	24.586	-30.272	66.000	11.142	QP
2			0.150	22.854	11.712	-33.146	56.000	11.142	AV
3			0.158	39.283	28.993	-26.286	65.568	10.290	QP
4			0.158	26.325	16.035	-29.243	55.568	10.290	AV
5			0.470	41.753	31.588	-14.761	56.514	10.164	QP
6			0.470	29.596	19.432	-16.918	46.514	10.164	AV
7		*	0.567	48.347	38.198	-7.653	56.000	10.149	QP
8			0.567	36.104	25.955	-9.896	46.000	10.149	AV
9			0.846	39.166	29.172	-16.834	56.000	9.994	QP
10			0.846	27.822	17.828	-18.178	46.000	9.994	AV
11			1.162	37.983	28.079	-18.017	56.000	9.904	QP
12			1.162	26.467	16.564	-19.533	46.000	9.904	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

The End