



3DH3 Time of Occupancy

Channel 39(2441MHz)

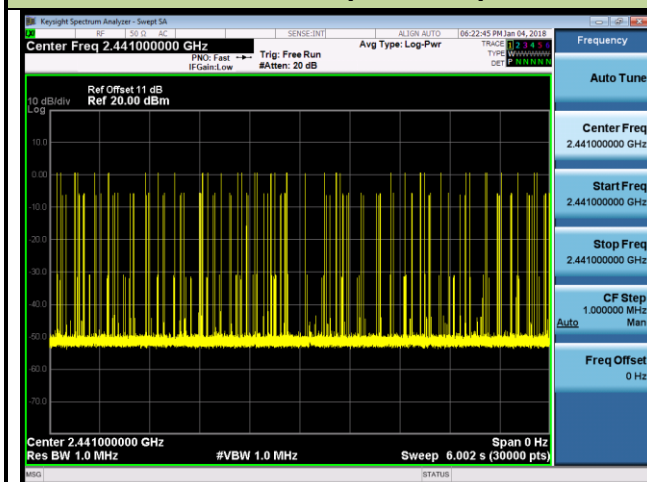

Channel 39(2441MHz)

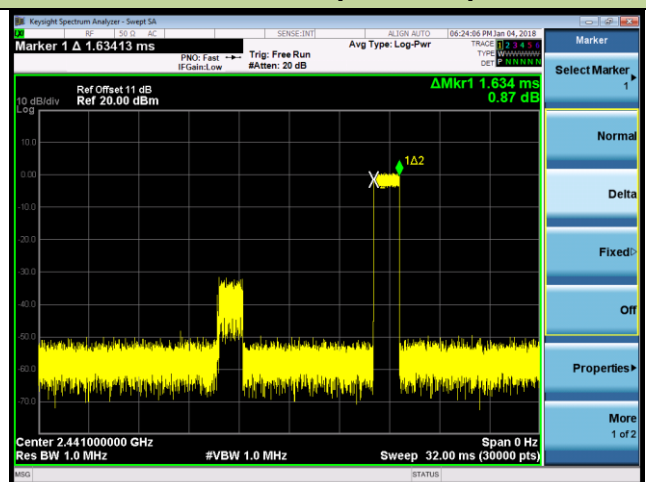


Note: Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: 43hops/6 sec ≈ 7 hops/sec.


The Maximum Occupancy Time within 31.6sec: $(1.634\text{ms} \times 7) \times 31.6 = 361.44$ msec.

3DH5 Time of Occupancy

Channel 39(2441MHz)

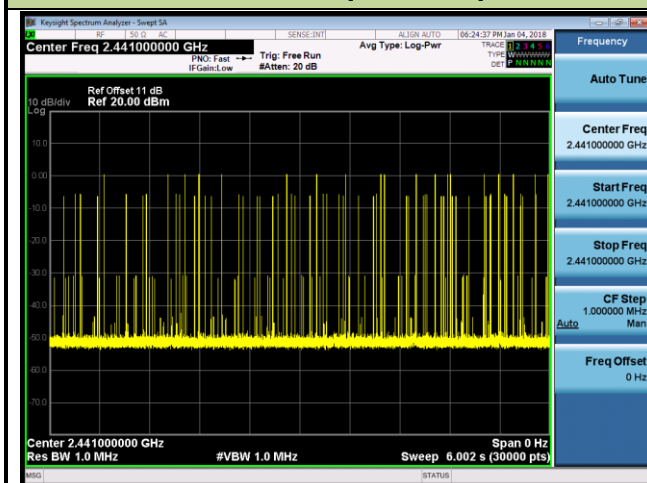

Channel 39(2441MHz)

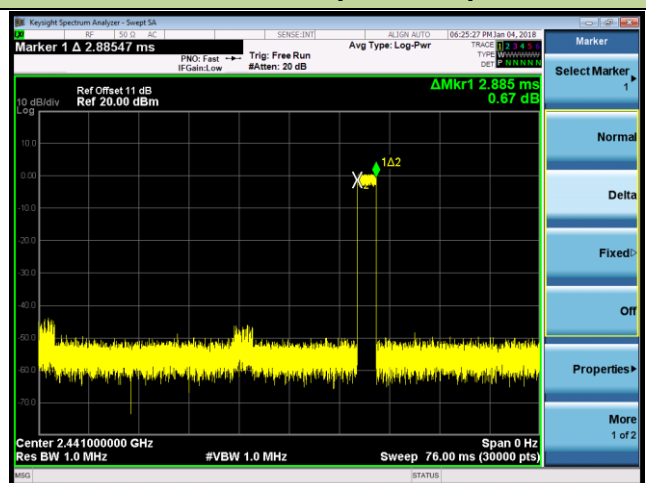

Note: Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: 15hops/6 sec ≈ 3 hops/sec.

The Maximum Occupancy Time within 31.6sec: $(2.885\text{ms} \times 3) \times 31.6 = 273.50$ msec.

7.7. Band-edge Compliance Measurement

7.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.4


7.7.3. Test Setting

1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = Peak
5. Sweep time = Coupled
6. Trace mode = max hold
7. Trace was allowed to stabilize

Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

7.7.4.Test Setup

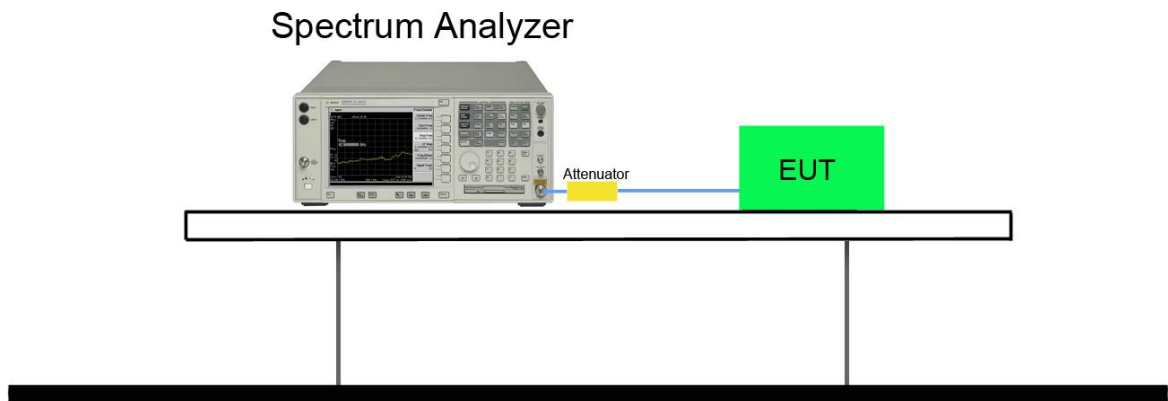


7.7.5. Test Result

Product	VR All-In-One Headset	Temperature	25°C
Test Engineer	Hunk Li	Relative Humidity	52%
Test Site	TR3	Test Date	2018/01/04


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Band-edge Compliance

Channel 00 (2402MHz)

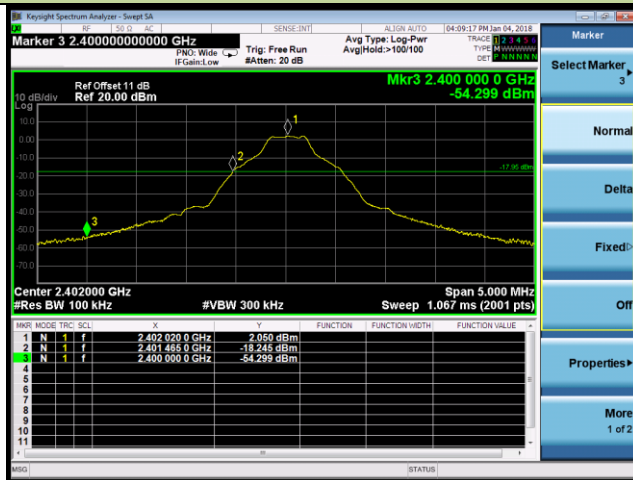


Channel 78 (2480MHz)

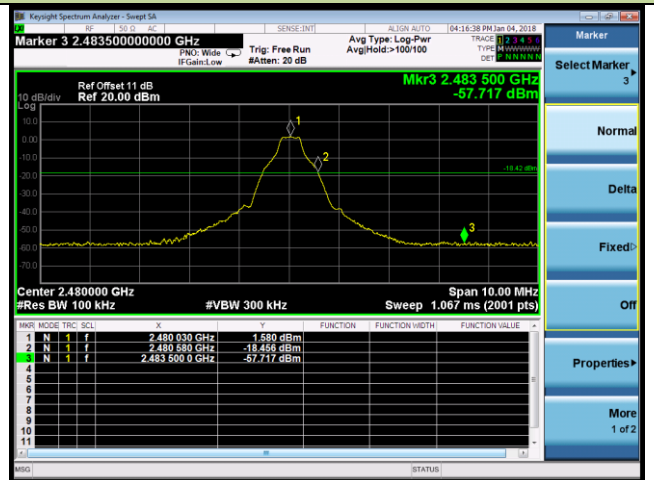


2DH5 Band-edge Compliance

Channel 00 (2402MHz)

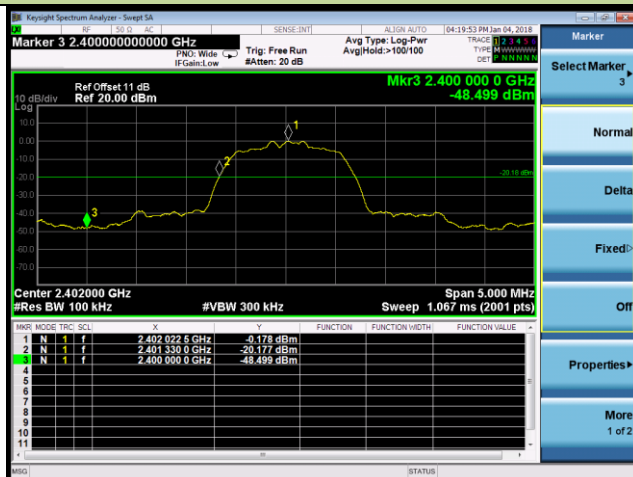


Channel 78 (2480MHz)

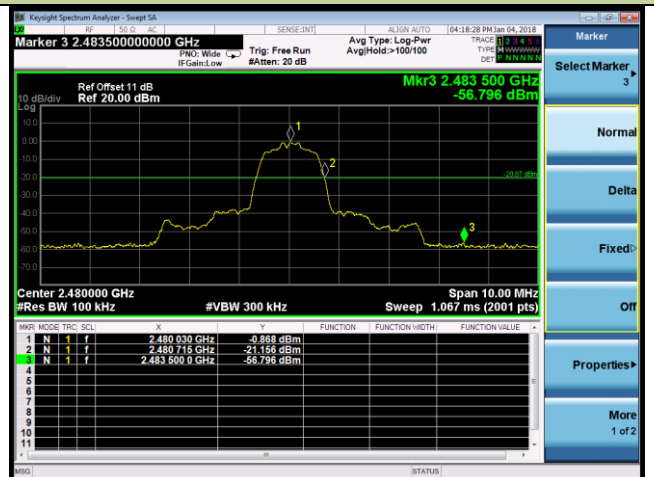


3DH5 Band-edge Compliance

Channel 00 (2402MHz)

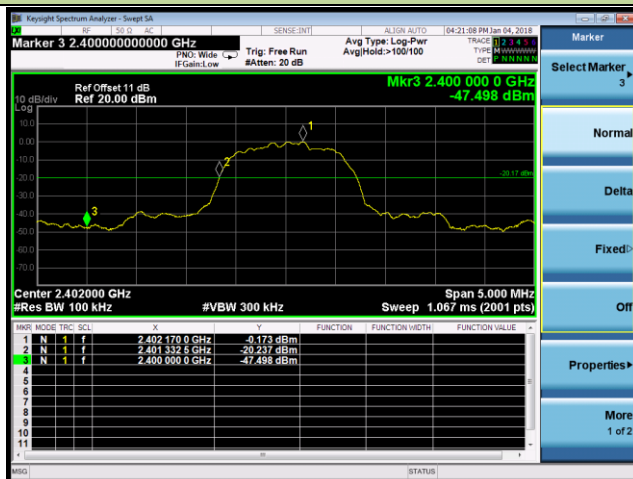


Channel 78 (2480MHz)

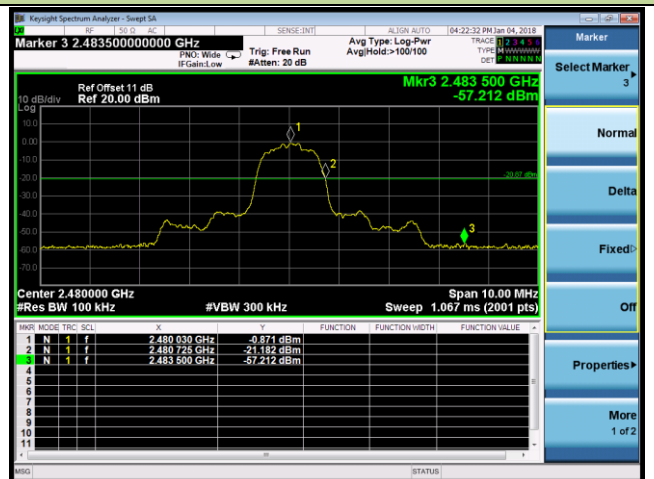


DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

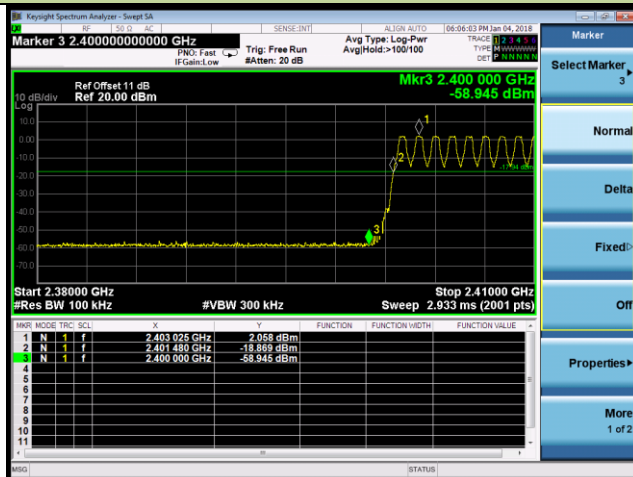


Channel 78 (2480MHz)

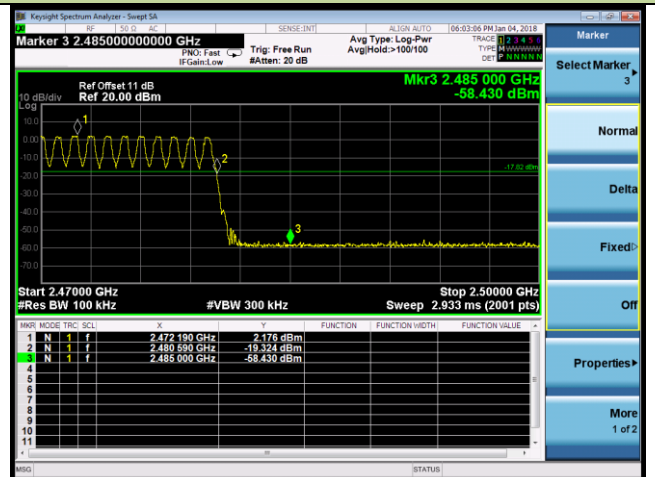


2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

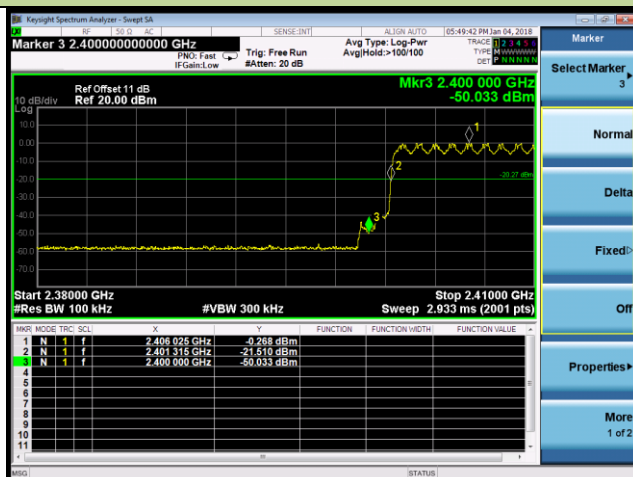


Channel 78 (2480MHz)

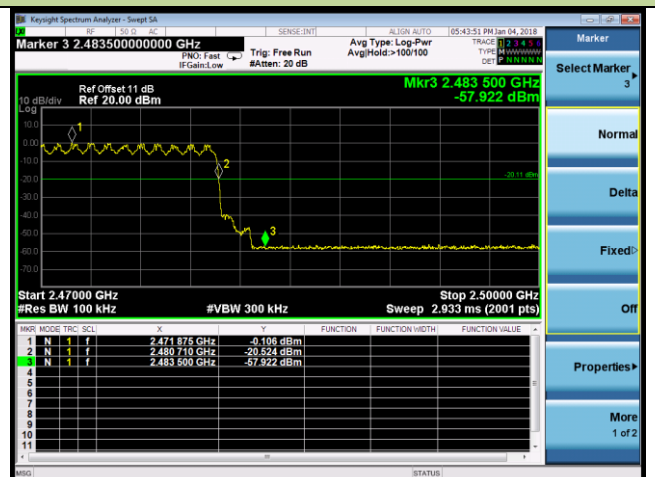


3DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

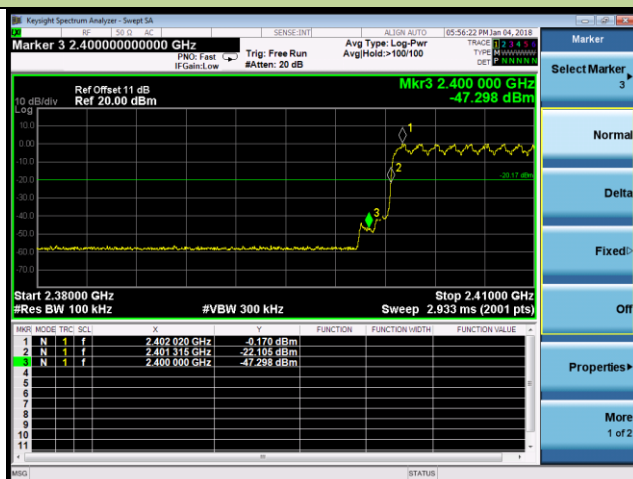

Channel 78 (2480MHz)

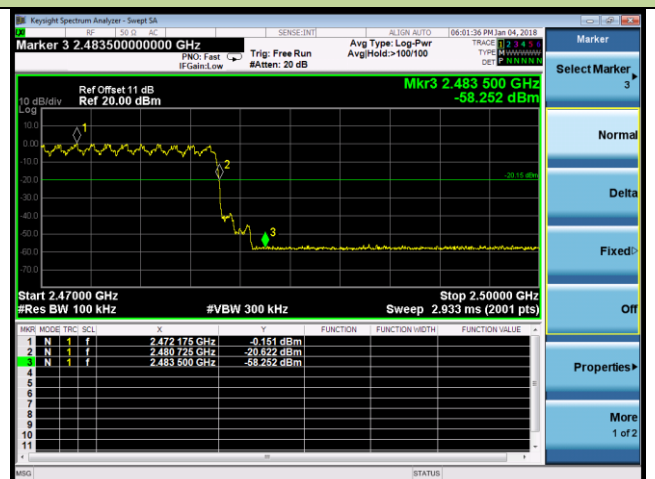

7.8. Conducted Spurious Emissions Measurement

7.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.8.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.8

7.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 1.3 MHz
3. VBW $\geq$ RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

7.8.4. Test Setup

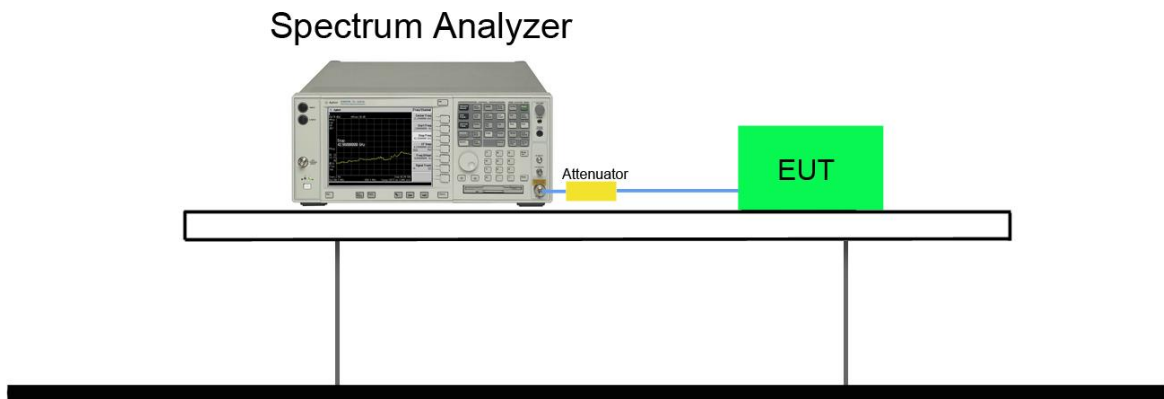


7.8.5. Test Result

Product	VR All-In-One Headset	Temperature	25°C
Test Engineer	Hunk Li	Relative Humidity	52%
Test Site	TR3	Test Date	2018/01/05


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

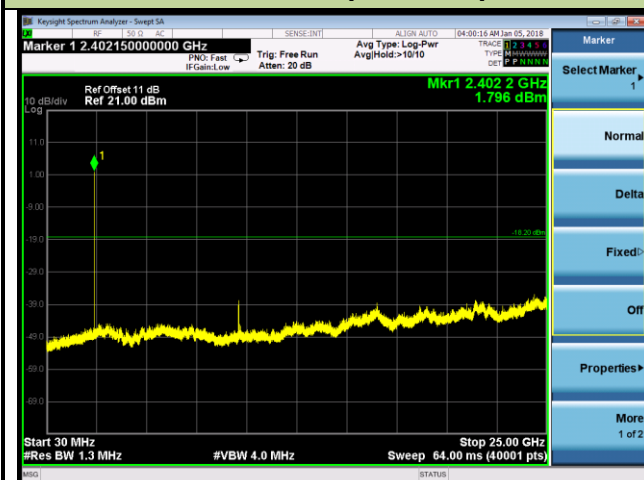

Channel 39 (2441MHz)

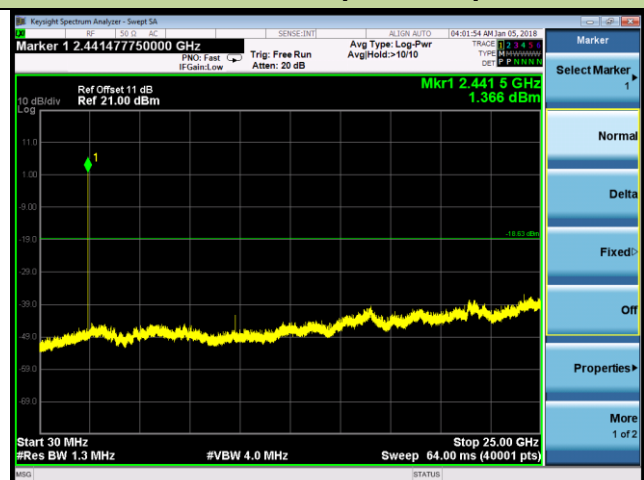


Channel 78 (2480MHz)

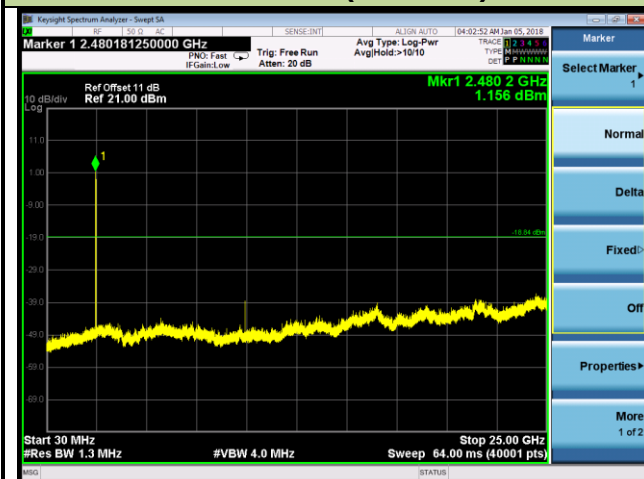


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

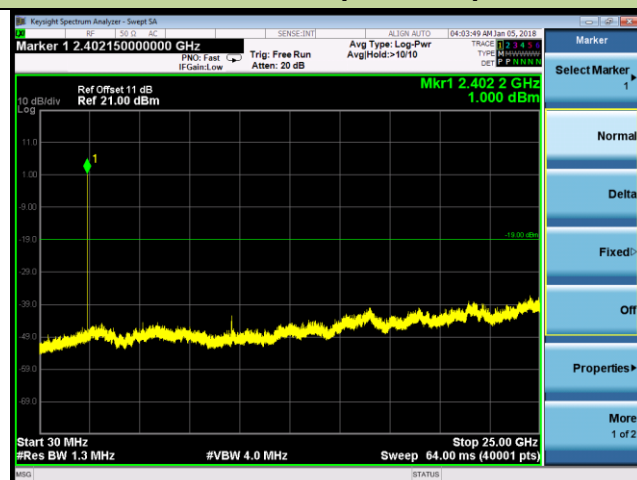

Channel 39 (2441MHz)

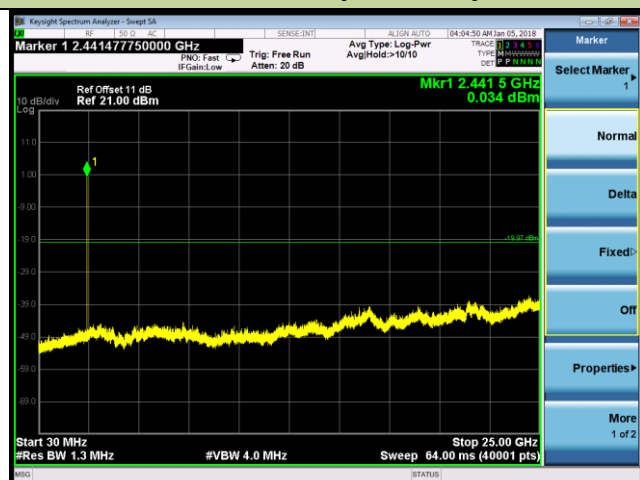


Channel 78 (2480MHz)

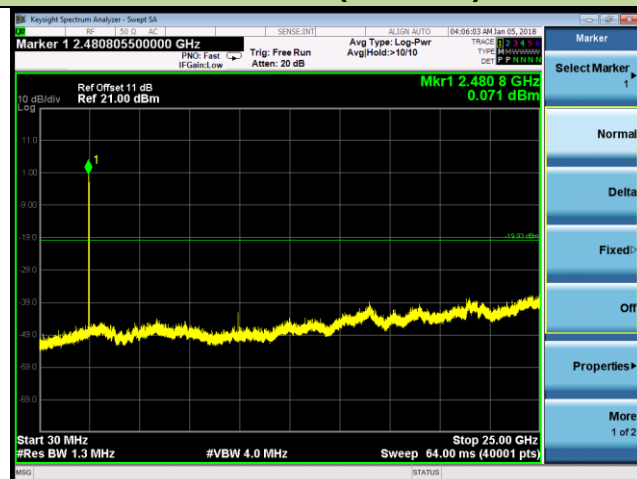


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

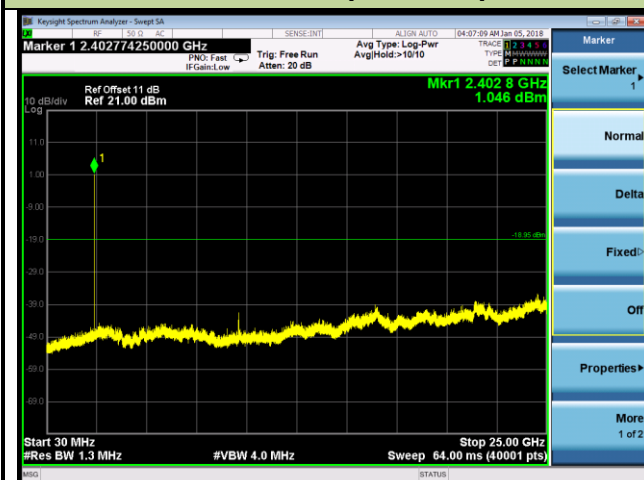

Channel 39 (2441MHz)

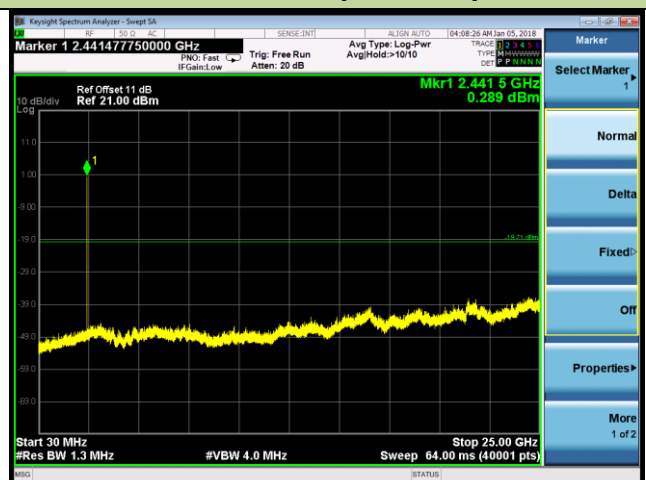

Channel 78 (2480MHz)

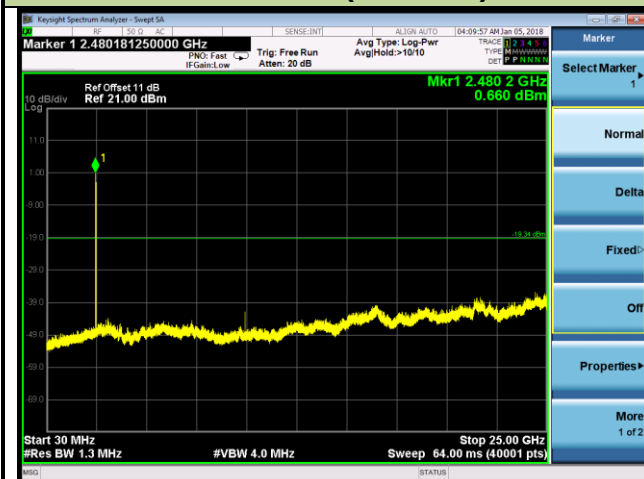

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

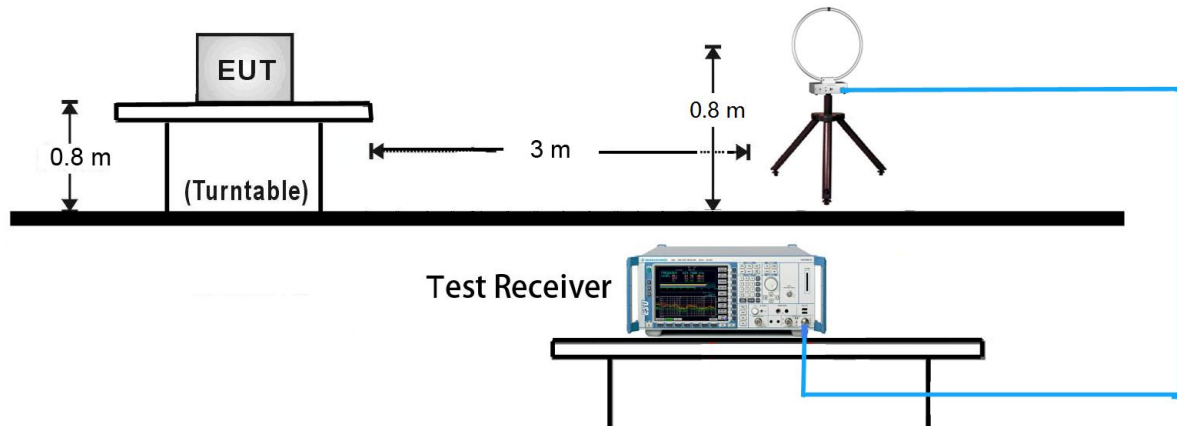

30MHz ~ 1GHz Test Setup:

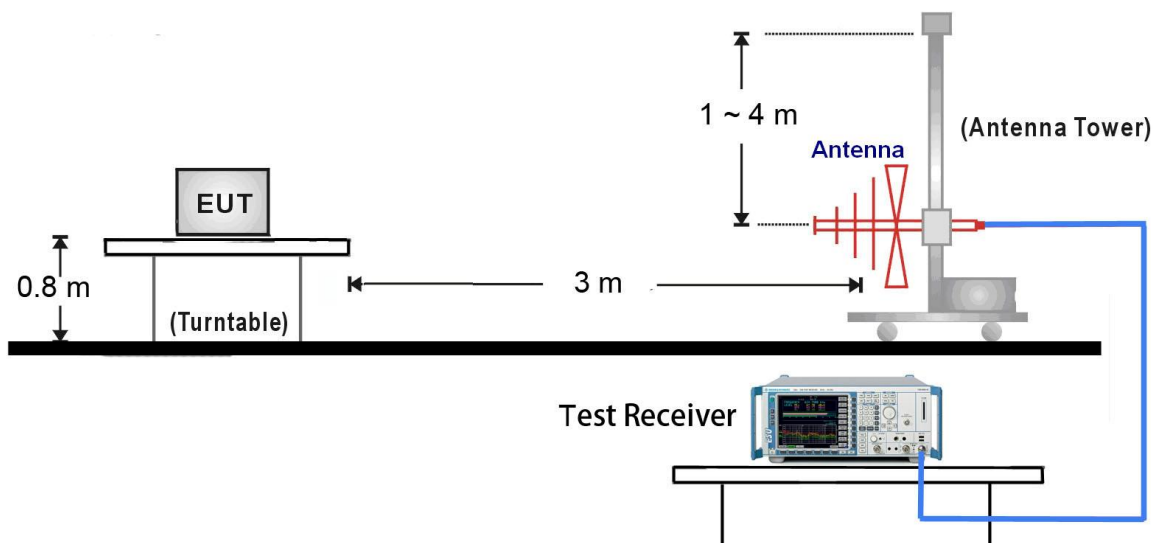

1GHz ~ 25GHz Test Setup:

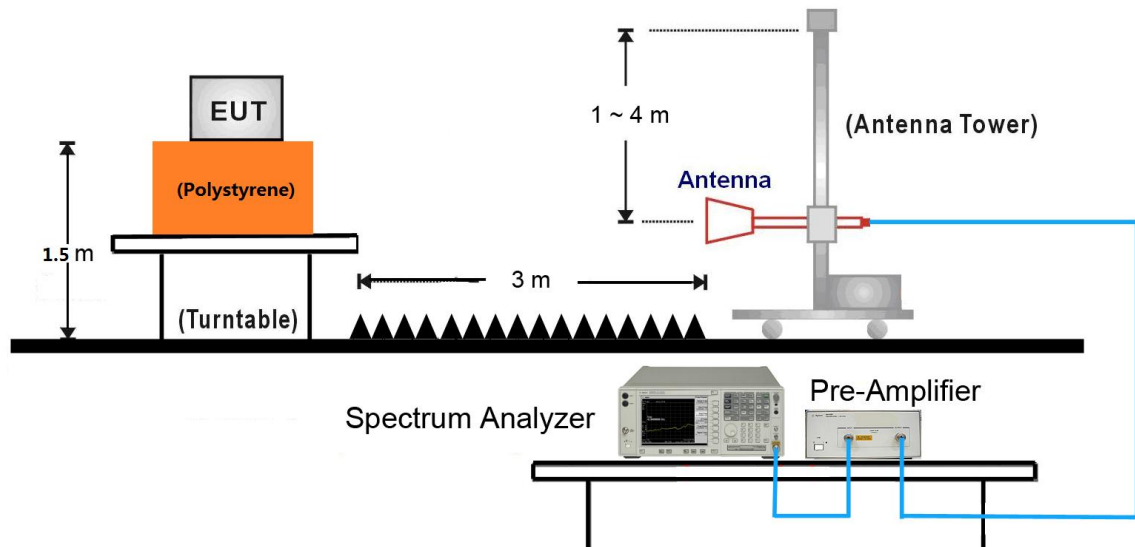

7.9.5. Test Result

Test Mode:	DH5	Test Site:	AC2
Test Channel:	00	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7375.0	31.9	13.9	45.8	74.0	-28.2	Peak	Horizontal
	8361.0	31.8	13.8	45.6	74.0	-28.4	Peak	Horizontal
*	9608.0	41.1	16.2	57.3	75.1	-17.8	Peak	Horizontal
*	12891.5	30.7	21.1	51.8	75.1	-23.3	Peak	Horizontal
	7477.0	33.3	14.0	47.3	74.0	-26.7	Peak	Vertical
	8386.5	32.7	13.8	46.5	74.0	-27.5	Peak	Vertical
*	9608.0	37.2	16.2	53.4	75.1	-21.7	Peak	Vertical
*	12840.5	31.5	20.6	52.1	75.1	-23.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC2
Test channel:	39	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7366.5	33.3	13.9	47.2	74.0	-26.8	Peak	Horizontal
	8395.0	32.2	13.8	46.0	74.0	-28.0	Peak	Horizontal
*	9764.0	37.3	17.0	54.3	74.8	-20.5	Peak	Horizontal
*	12781.0	30.9	20.5	51.4	74.8	-23.4	Peak	Horizontal
	7468.5	32.2	14.1	46.3	74.0	-27.7	Peak	Vertical
	8352.5	31.9	13.8	45.7	74.0	-28.3	Peak	Vertical
*	9764.0	36.0	17.0	53.0	74.8	-21.8	Peak	Vertical
*	12840.5	31.3	20.6	51.9	74.8	-22.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC2
Test channel:	78	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7358.0	32.5	14.0	46.5	74.0	-27.5	Peak	Horizontal
	8395.0	32.2	13.8	46.0	74.0	-28.0	Peak	Horizontal
*	9920.0	41.0	17.4	58.4	74.5	-16.1	Peak	Horizontal
*	12891.5	30.3	21.1	51.4	74.5	-23.1	Peak	Horizontal
	7477.0	32.5	14.0	46.5	74.0	-27.5	Peak	Vertical
	8463.0	31.9	13.9	45.8	74.0	-28.2	Peak	Vertical
*	9920.0	37.9	17.4	55.3	74.5	-19.2	Peak	Vertical
*	12993.5	31.6	21.4	53.0	74.5	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC2
Test channel:	00	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	32.3	14.1	46.4	74.0	-27.6	Peak	Horizontal
	8429.0	31.3	13.9	45.2	74.0	-28.8	Peak	Horizontal
*	9608.0	36.5	16.2	52.7	74.3	-21.6	Peak	Horizontal
*	12738.5	30.7	20.3	51.0	74.3	-23.3	Peak	Horizontal
	7468.5	31.6	14.1	45.7	74.0	-28.3	Peak	Vertical
	8463.0	31.3	13.9	45.2	74.0	-28.8	Peak	Vertical
*	9942.0	31.0	17.5	48.5	74.3	-25.8	Peak	Vertical
*	12849.0	29.4	20.7	50.1	74.3	-24.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC2
Test channel:	39	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7400.5	31.7	13.9	45.6	74.0	-28.4	Peak	Horizontal
	8352.5	31.3	13.8	45.1	74.0	-28.9	Peak	Horizontal
*	9764.0	35.6	17.0	52.6	74.0	-21.4	Peak	Horizontal
*	12951.0	29.7	21.2	50.9	74.0	-23.1	Peak	Horizontal
	7468.5	32.2	14.1	46.3	74.0	-27.7	Peak	Vertical
	8386.5	31.3	13.8	45.1	74.0	-28.9	Peak	Vertical
*	9899.5	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
*	12857.5	30.0	20.8	50.8	74.0	-23.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (93.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC2
Test channel:	78	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	34.7	14.2	48.9	74.0	-25.1	Peak	Horizontal
	8310.0	31.3	13.8	45.1	74.0	-28.9	Peak	Horizontal
*	9920.0	36.0	17.4	53.4	74.0	-20.6	Peak	Horizontal
*	12781.0	30.0	20.5	50.5	74.0	-23.5	Peak	Horizontal
	7502.5	33.6	14.2	47.8	74.0	-26.2	Peak	Vertical
	8242.0	32.0	14.2	46.2	74.0	-27.8	Peak	Vertical
*	9993.0	30.8	17.4	48.2	74.0	-25.8	Peak	Vertical
*	12781.0	30.0	20.5	50.5	74.0	-23.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (93.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC2
Test channel:	00	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	33.6	14.2	47.8	74.0	-26.2	Peak	Horizontal
	8437.5	30.4	13.9	44.3	74.0	-29.7	Peak	Horizontal
*	9608.0	35.5	16.2	51.7	74.6	-22.9	Peak	Horizontal
*	12900.0	29.8	21.1	50.9	74.6	-23.7	Peak	Horizontal
	7468.5	31.8	14.1	45.9	74.0	-28.1	Peak	Vertical
	8463.0	32.3	13.9	46.2	74.0	-27.8	Peak	Vertical
*	9882.5	30.5	17.3	47.8	74.6	-26.8	Peak	Vertical
*	12730.0	29.6	20.3	49.9	74.6	-24.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC2
Test channel:	39	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7417.5	33.3	14.1	47.4	74.0	-26.6	Peak	Horizontal
	8480.0	32.7	14.1	46.8	74.0	-27.2	Peak	Horizontal
*	9764.0	34.8	17.0	51.8	74.2	-22.4	Peak	Horizontal
*	12730.0	31.0	20.3	51.3	74.2	-22.9	Peak	Horizontal
	7485.5	33.5	14.0	47.5	74.0	-26.5	Peak	Vertical
	8344.0	33.5	13.9	47.4	74.0	-26.6	Peak	Vertical
*	9993.0	31.5	17.4	48.9	74.2	-25.3	Peak	Vertical
*	12730.0	31.0	20.3	51.3	74.2	-22.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC2
Test channel:	78	Test Engineer:	Will Yan
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7485.5	33.5	14.0	47.5	74.0	-26.5	Peak	Horizontal
	8437.5	31.1	13.9	45.0	74.0	-29.0	Peak	Horizontal
*	9920.0	36.6	17.4	54.0	74.0	-20.0	Peak	Horizontal
*	12849.0	31.4	20.7	52.1	74.0	-21.9	Peak	Horizontal
	7426.0	32.8	14.2	47.0	74.0	-27.0	Peak	Vertical
	8242.0	31.4	14.2	45.6	74.0	-28.4	Peak	Vertical
*	9976.0	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
*	12959.5	29.6	21.3	50.9	74.0	-23.1	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission 9kHz ~ 1GHz and 18GHz ~ 25GHz:

Site: AC2	Time: 2017/12/15 - 13:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

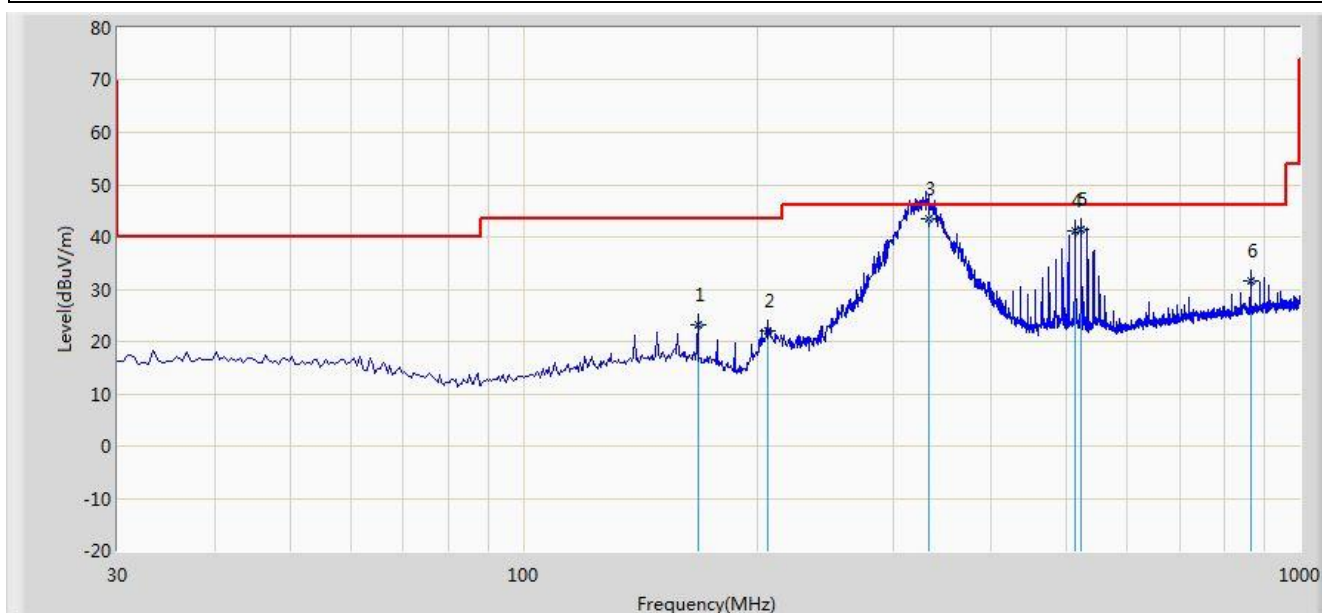


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		167.740	23.196	8.604	-20.304	43.500	14.592	QP
2		206.055	22.050	10.730	-21.450	43.500	11.320	QP
3	*	332.704	43.531	28.300	-2.469	46.000	15.231	QP
4		513.545	41.226	22.383	-4.774	46.000	18.843	QP
5		523.245	41.533	22.495	-4.467	46.000	19.038	QP
6		864.200	31.651	7.731	-14.349	46.000	23.920	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2017/12/15 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

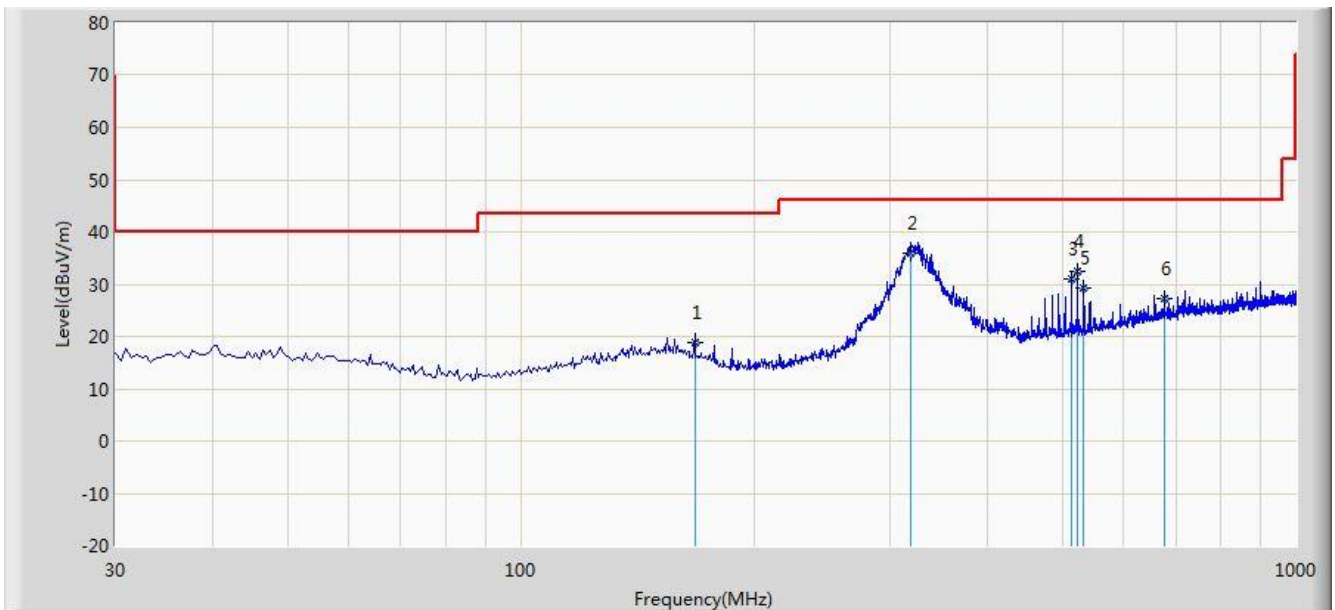

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		167.740	18.698	4.106	-24.802	43.500	14.592	QP
2	*	318.575	36.046	21.140	-9.954	46.000	14.906	QP
3		513.545	30.896	12.053	-15.104	46.000	18.843	QP
4		523.245	32.418	13.380	-13.582	46.000	19.038	QP
5		532.945	29.135	9.903	-16.865	46.000	19.232	QP
6		676.990	27.357	5.537	-18.643	46.000	21.819	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Result

Site: AC2	Time: 2017/12/15 - 18:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

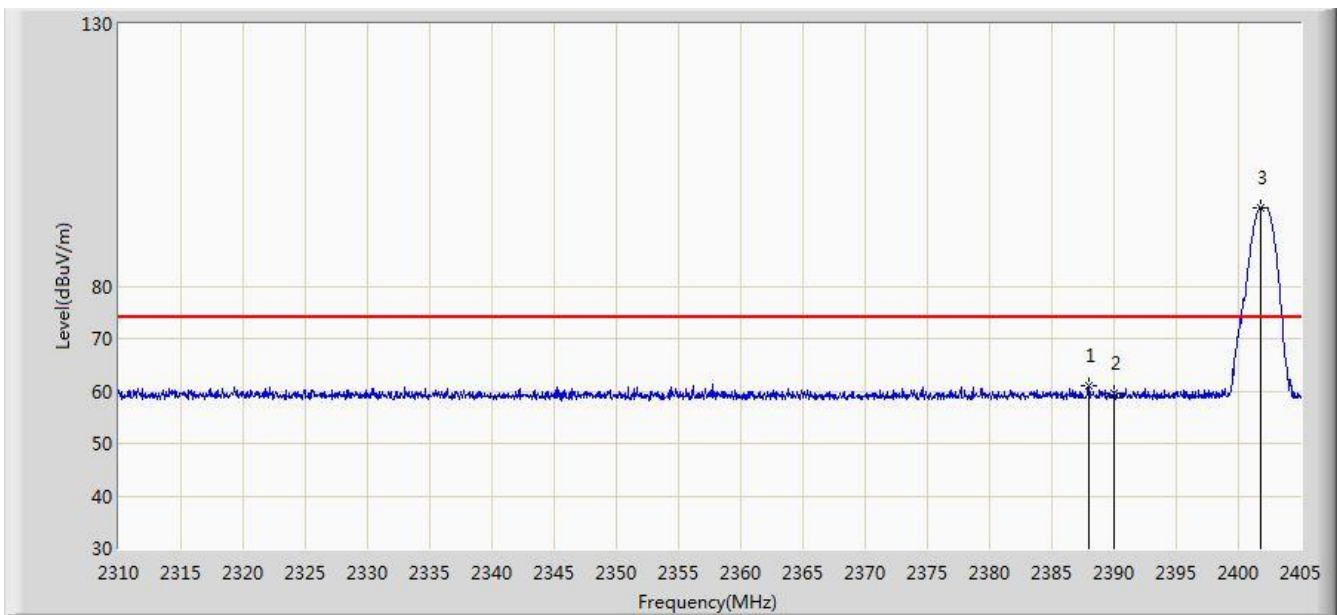


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.948	60.944	28.366	-13.056	74.000	32.578	PK
2			2390.000	59.637	27.062	-14.363	74.000	32.575	PK
3		*	2401.770	95.068	62.509	N/A	N/A	32.559	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

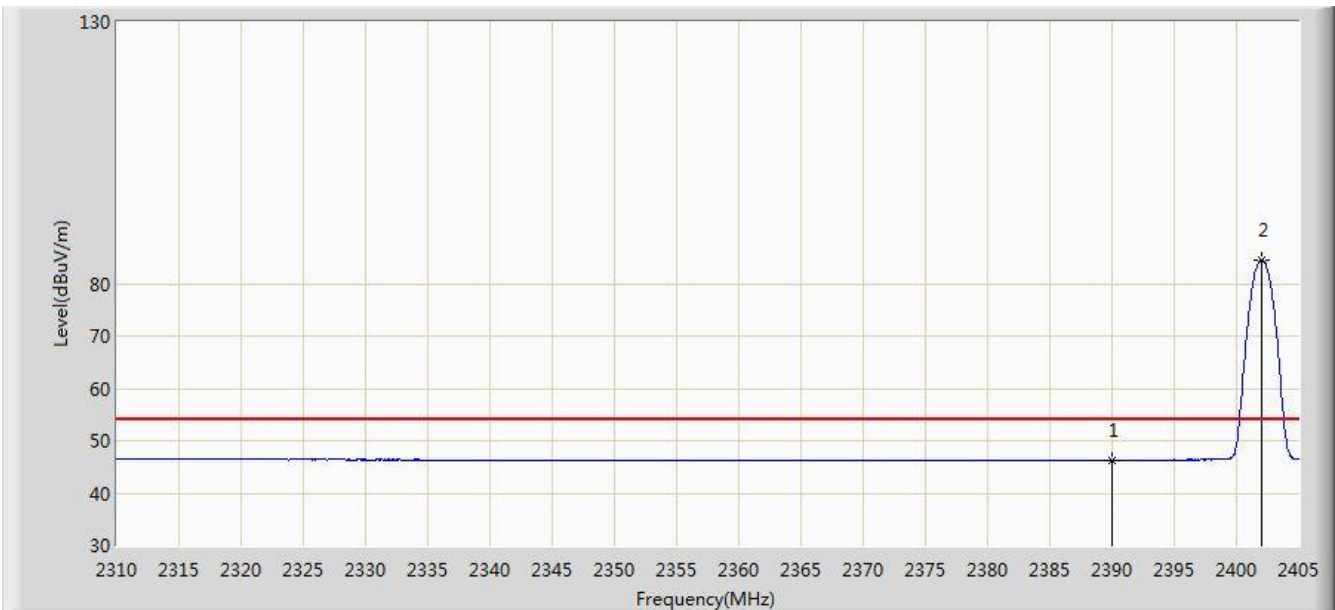


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.325	13.750	-7.675	54.000	32.575	AV
2		*	2402.008	84.635	52.076	N/A	N/A	32.559	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

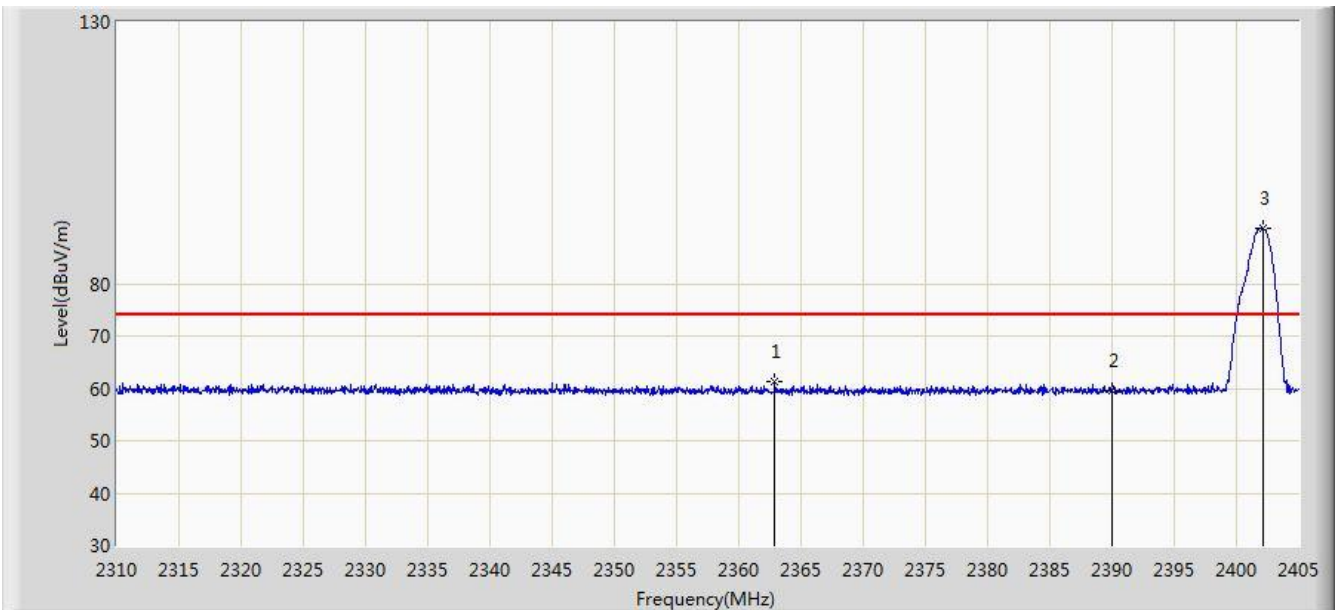


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.915	61.264	28.646	-12.736	74.000	32.618	PK
2			2390.000	59.622	27.047	-14.378	74.000	32.575	PK
3		*	2402.150	90.439	57.880	N/A	N/A	32.559	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

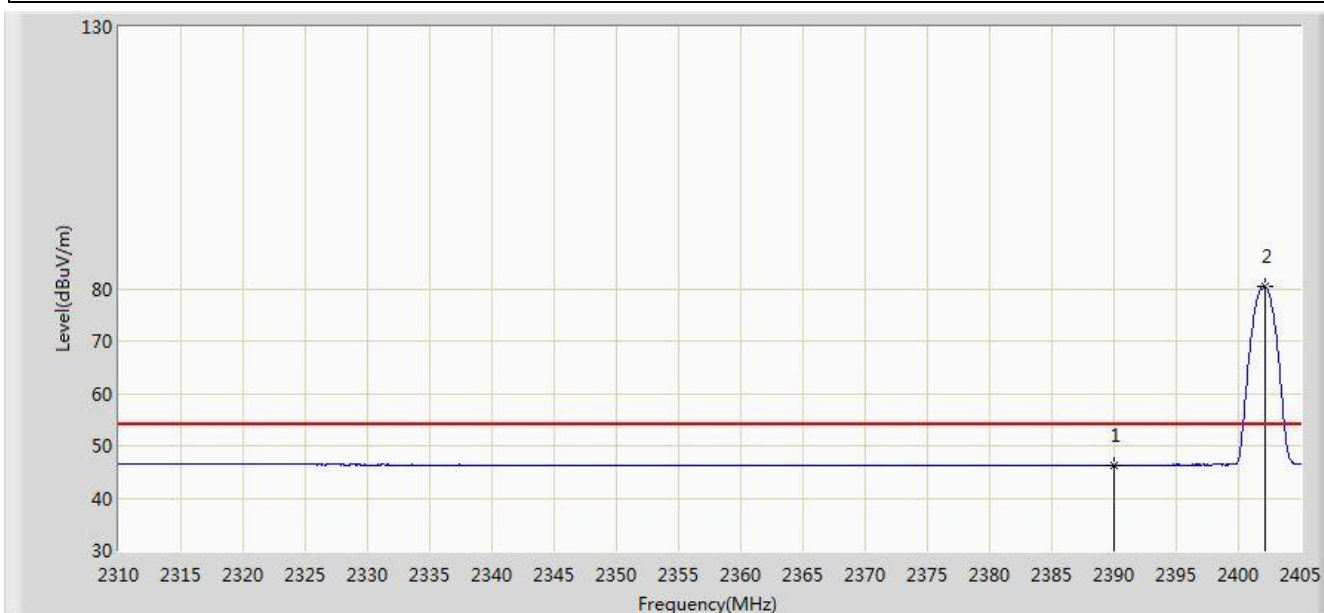


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.303	13.728	-7.697	54.000	32.575	AV
2		*	2402.150	80.506	47.947	N/A	N/A	32.559	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

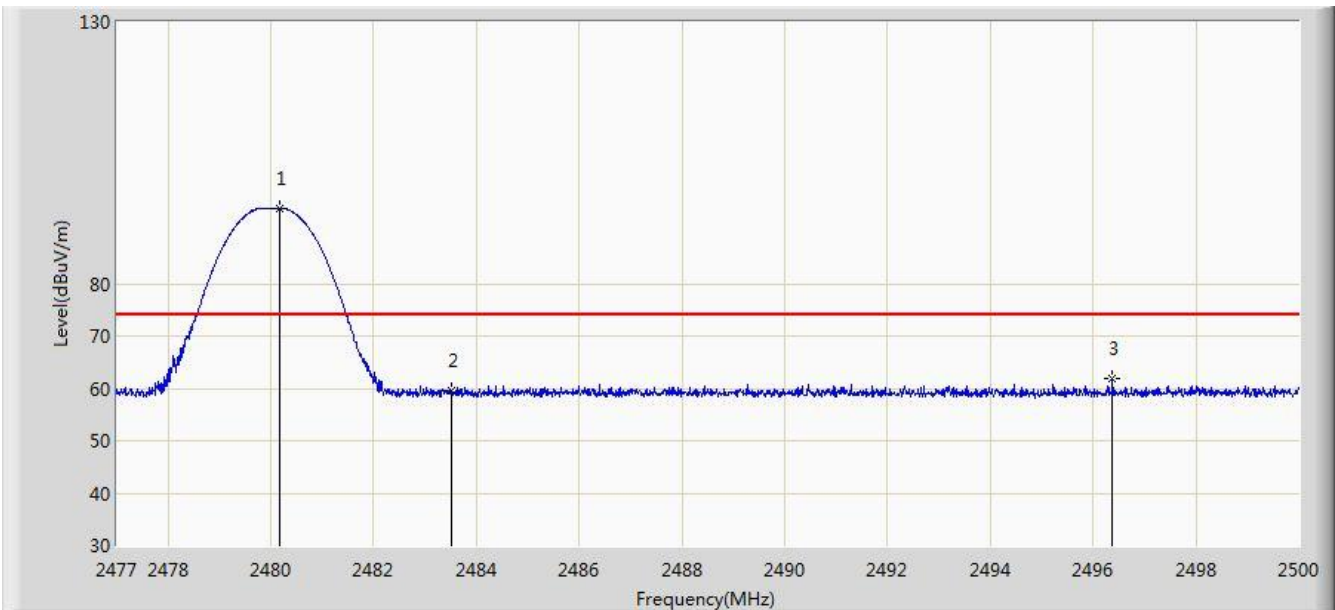


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.174	94.454	61.867	N/A	N/A	32.588	PK
2			2483.500	59.479	26.883	-14.521	74.000	32.596	PK
3			2496.377	61.823	29.195	-12.177	74.000	32.629	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

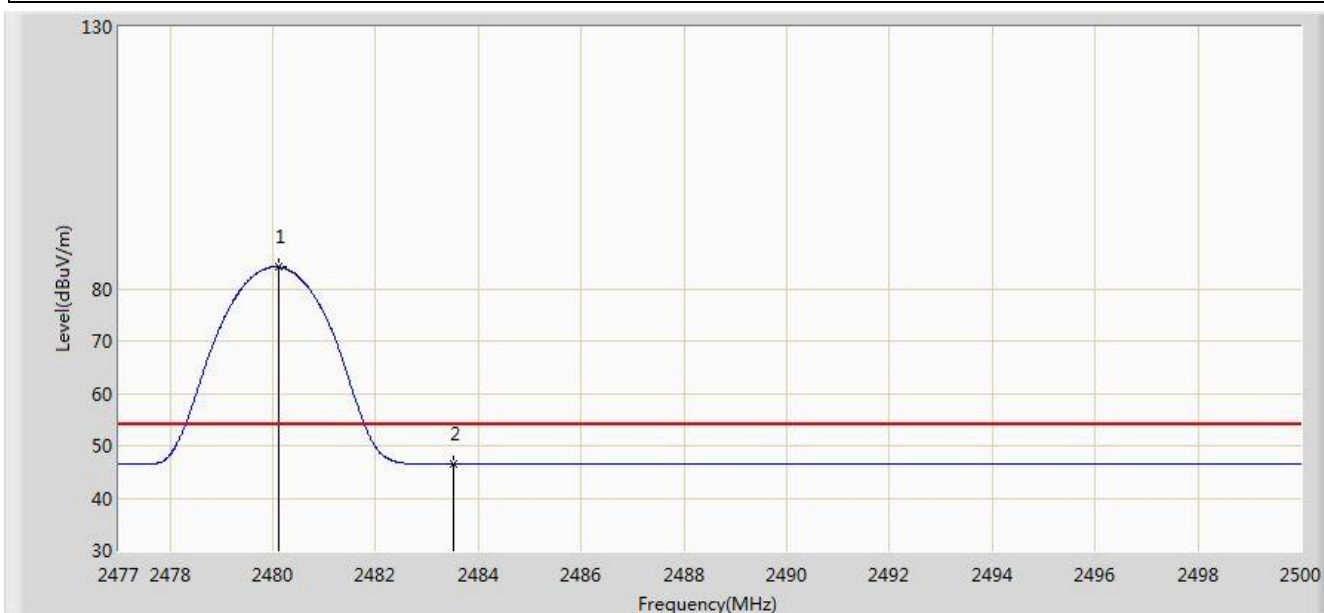


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	84.120	51.533	N/A	N/A	32.587	AV
2			2483.500	46.475	13.879	-7.525	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

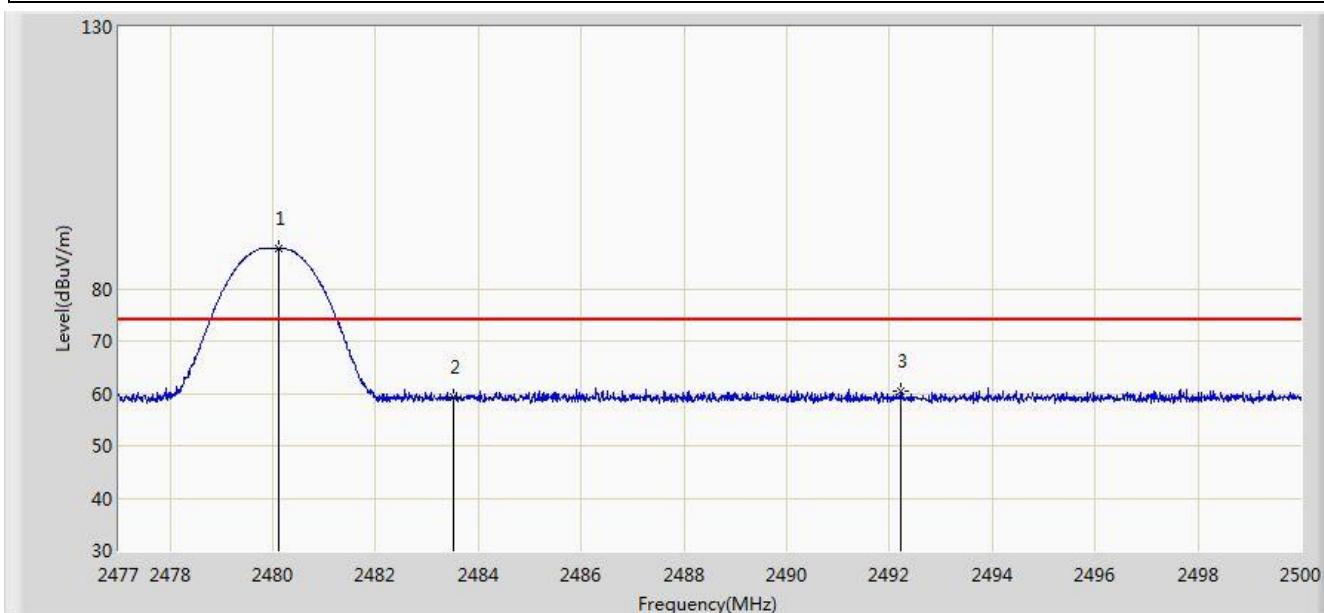


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	87.654	55.067	N/A	N/A	32.587	PK
2			2483.500	59.310	26.714	-14.690	74.000	32.596	PK
3			2492.215	60.556	27.938	-13.444	74.000	32.617	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

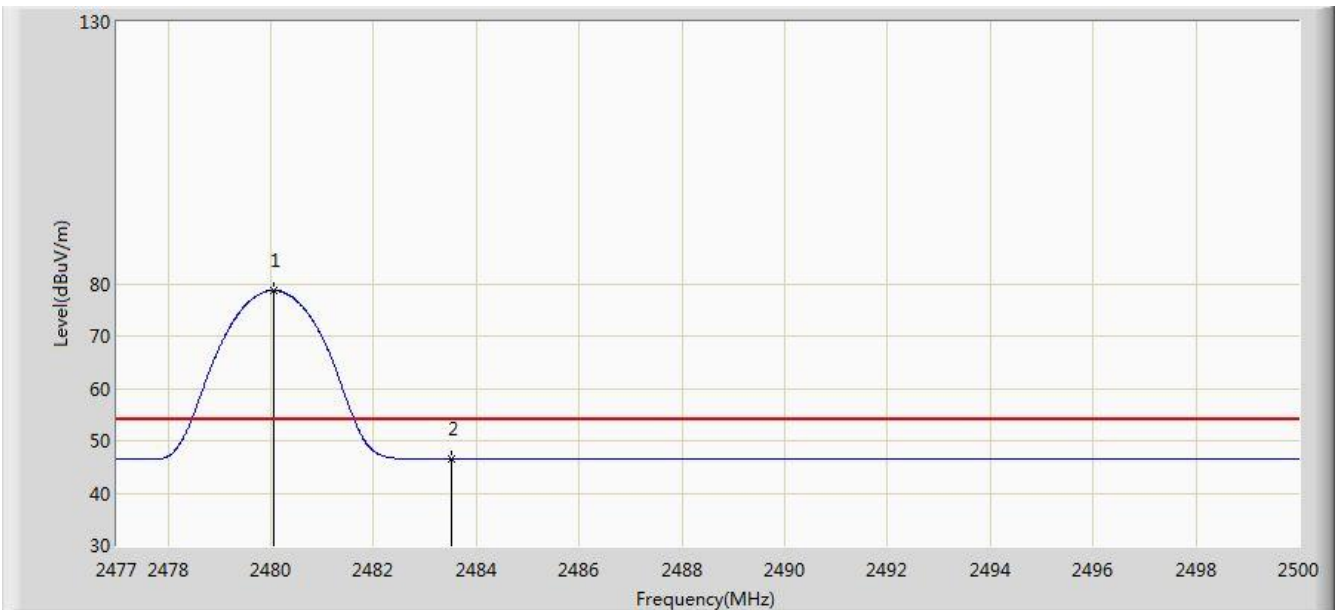


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	78.694	46.107	N/A	N/A	32.587	AV
2			2483.500	46.450	13.854	-7.550	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

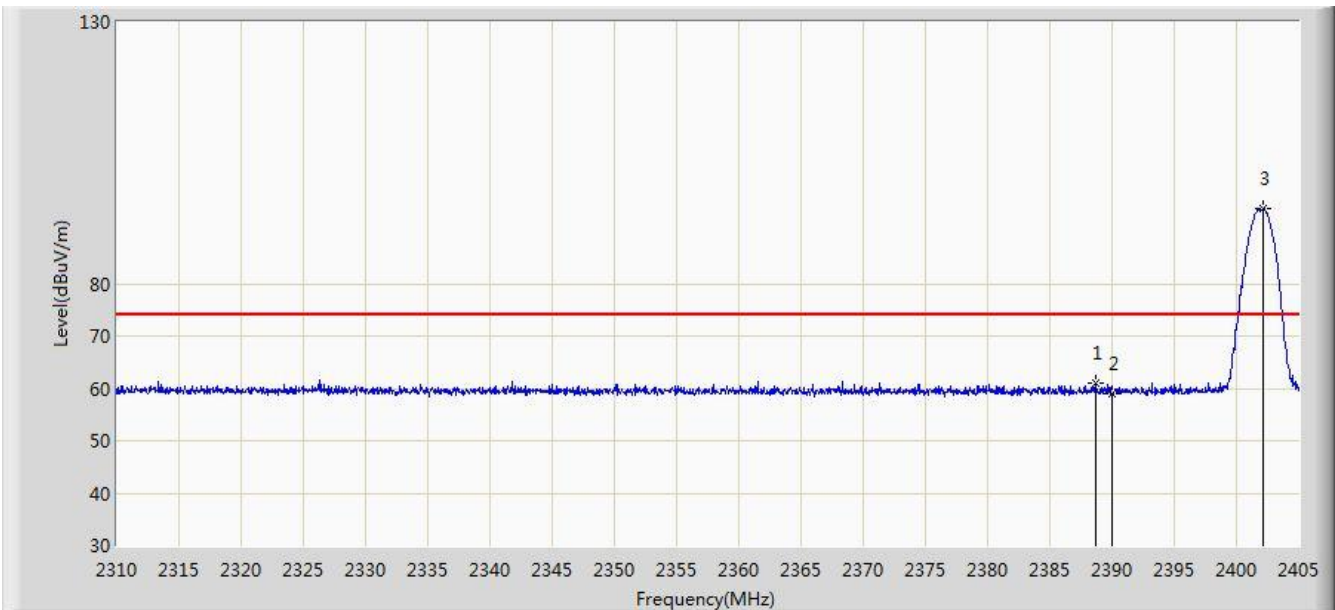


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.660	60.905	28.328	-13.095	74.000	32.577	PK
2			2390.000	59.071	26.496	-14.929	74.000	32.575	PK
3		*	2402.150	94.292	61.733	N/A	N/A	32.559	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

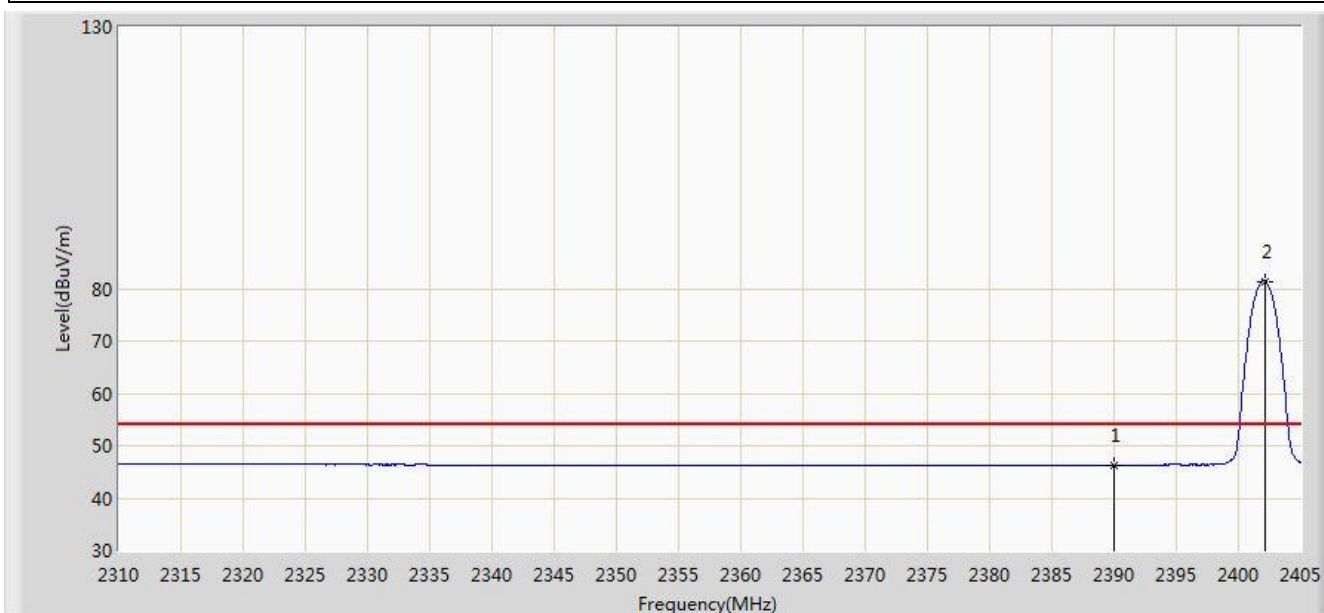


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.324	13.749	-7.676	54.000	32.575	AV
2		*	2402.150	81.410	48.851	N/A	N/A	32.559	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

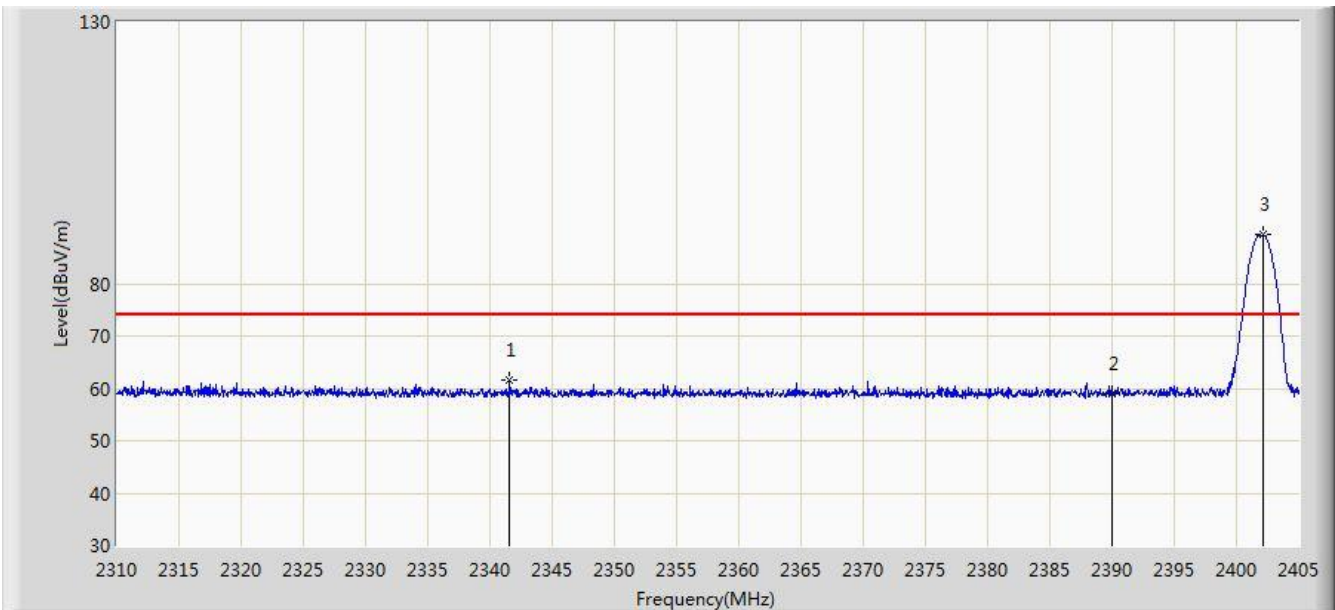


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2341.587	61.626	28.949	-12.374	74.000	32.677	PK
2			2390.000	58.854	26.279	-15.146	74.000	32.575	PK
3		*	2402.150	89.384	56.825	N/A	N/A	32.559	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

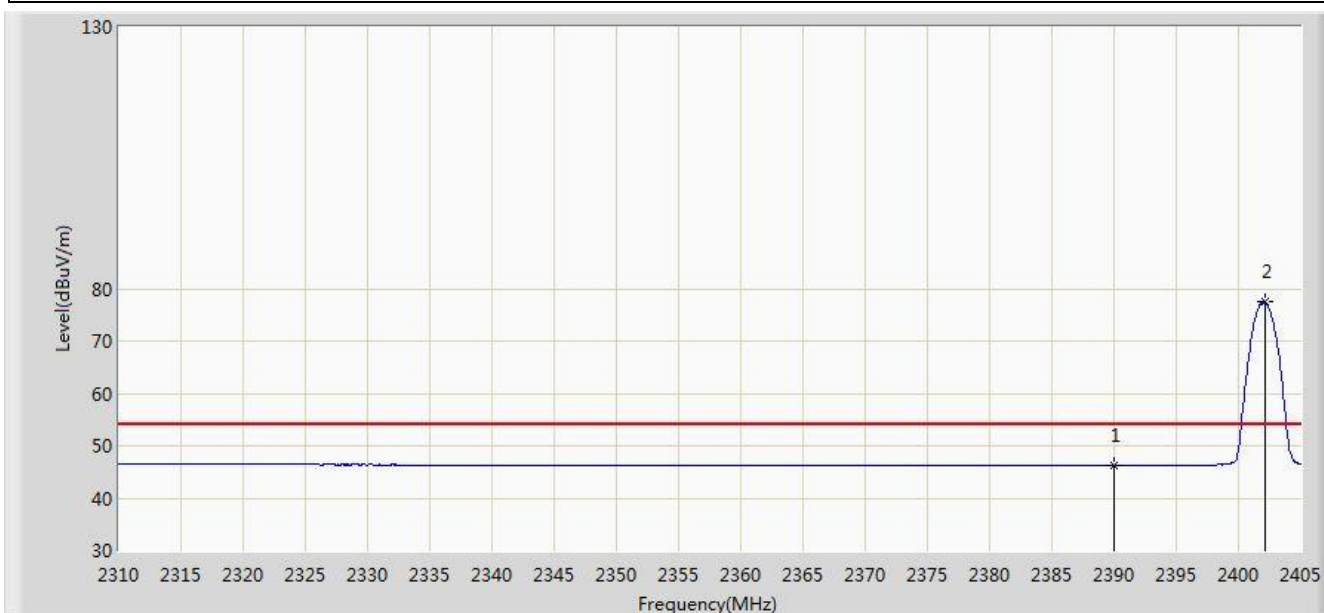


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.298	13.723	-7.702	54.000	32.575	AV
2		*	2402.150	77.459	44.900	N/A	N/A	32.559	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

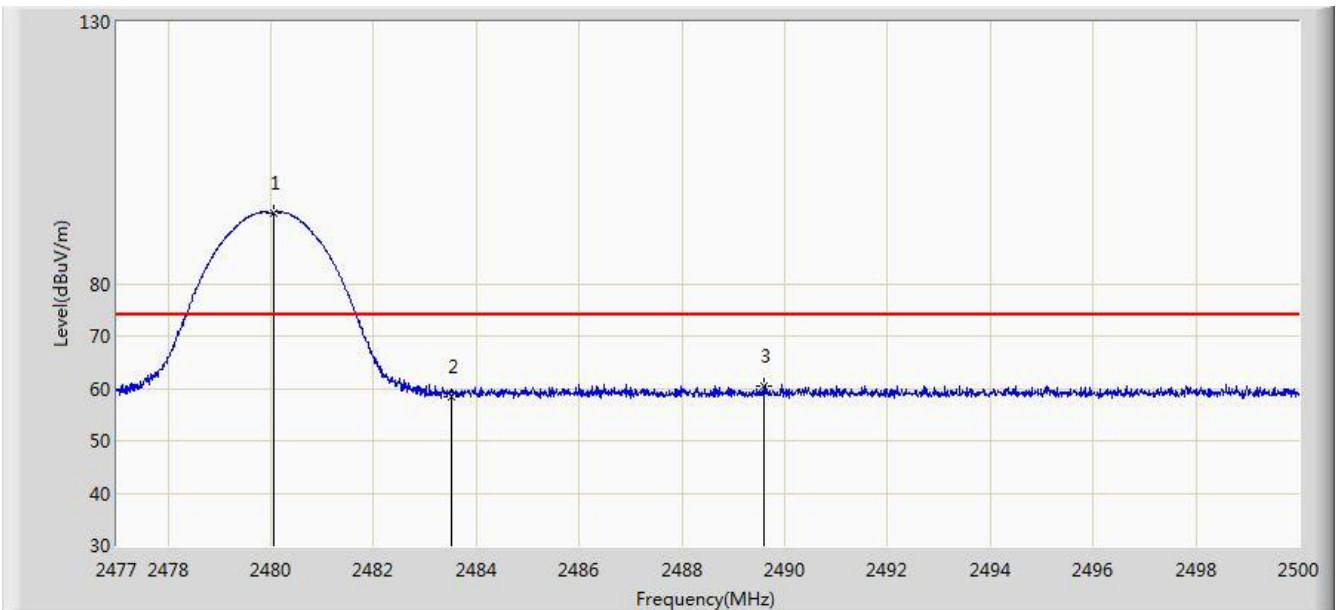


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	93.600	61.013	N/A	N/A	32.587	PK
2			2483.500	58.511	25.915	-15.489	74.000	32.596	PK
3			2489.593	60.308	27.697	-13.692	74.000	32.611	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

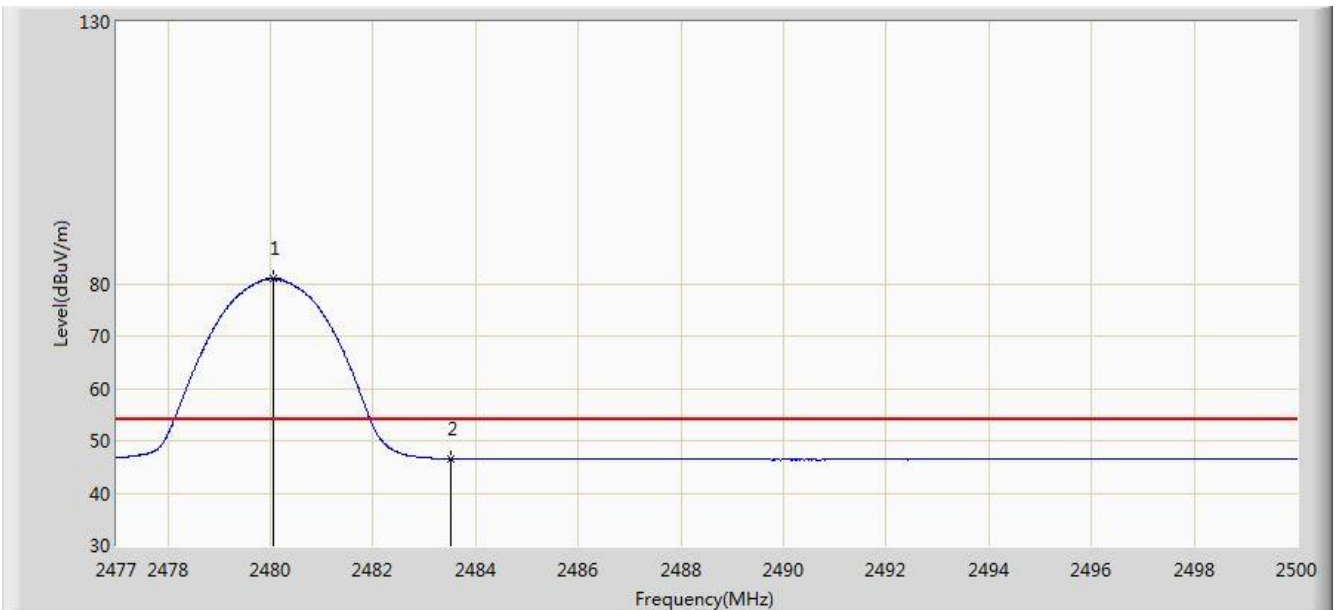


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	80.936	48.349	N/A	N/A	32.587	AV
2			2483.500	46.487	13.891	-7.513	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

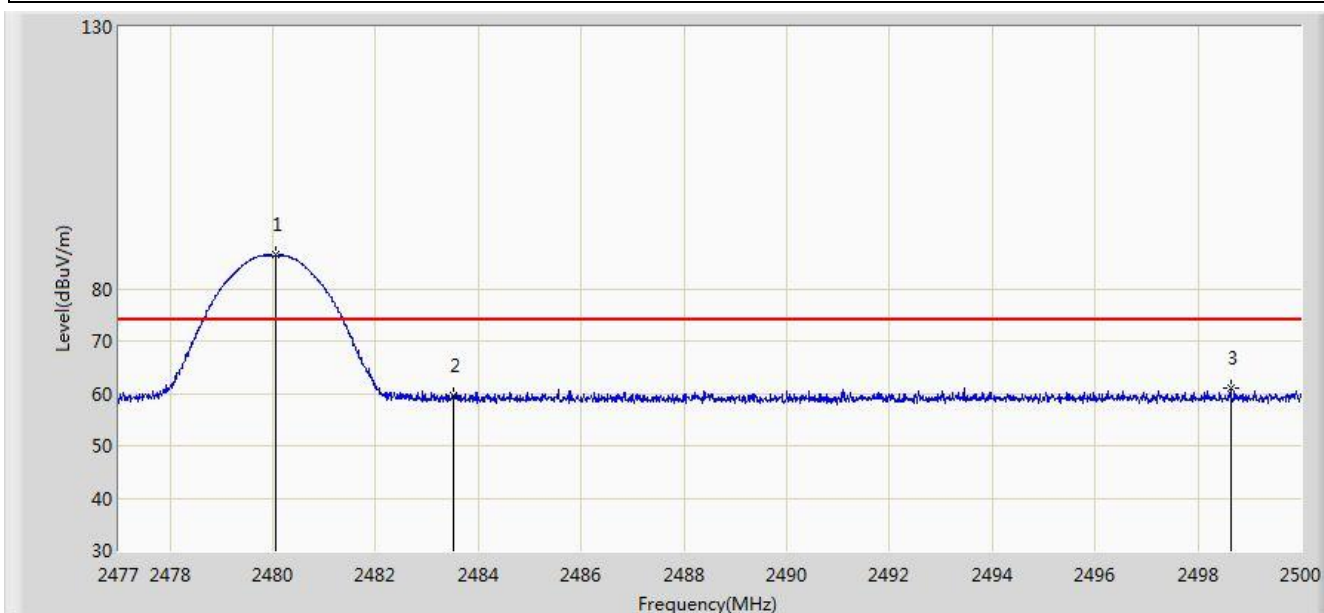


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.048	86.385	53.798	N/A	N/A	32.587	PK
2			2483.500	59.461	26.865	-14.539	74.000	32.596	PK
3			2498.632	60.985	28.349	-13.015	74.000	32.636	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

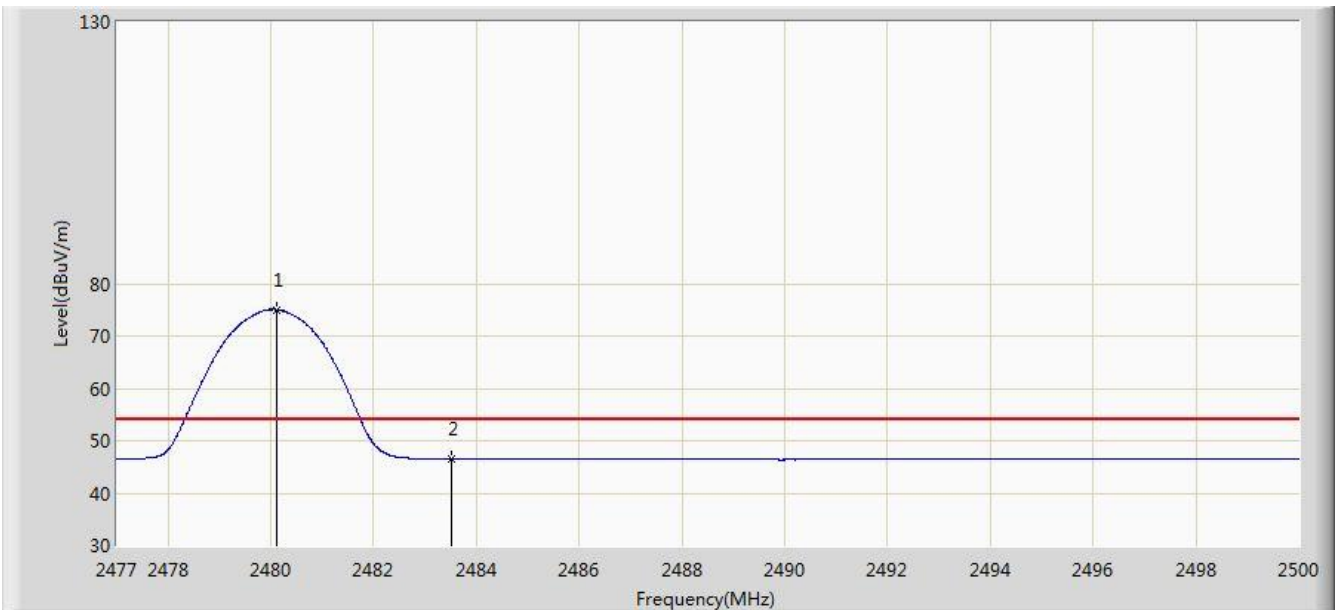


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	75.054	42.467	N/A	N/A	32.587	AV
2			2483.500	46.439	13.843	-7.561	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

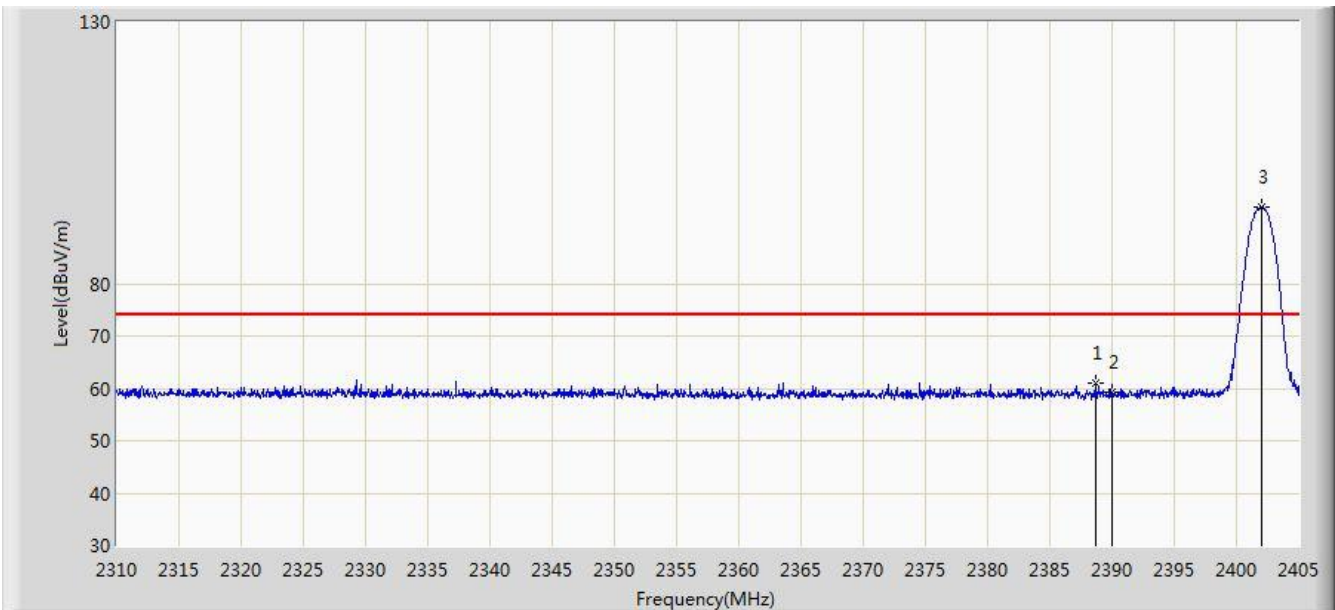


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.660	61.024	28.447	-12.976	74.000	32.577	PK
2			2390.000	59.248	26.673	-14.752	74.000	32.575	PK
3		*	2402.008	94.564	62.005	N/A	N/A	32.559	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

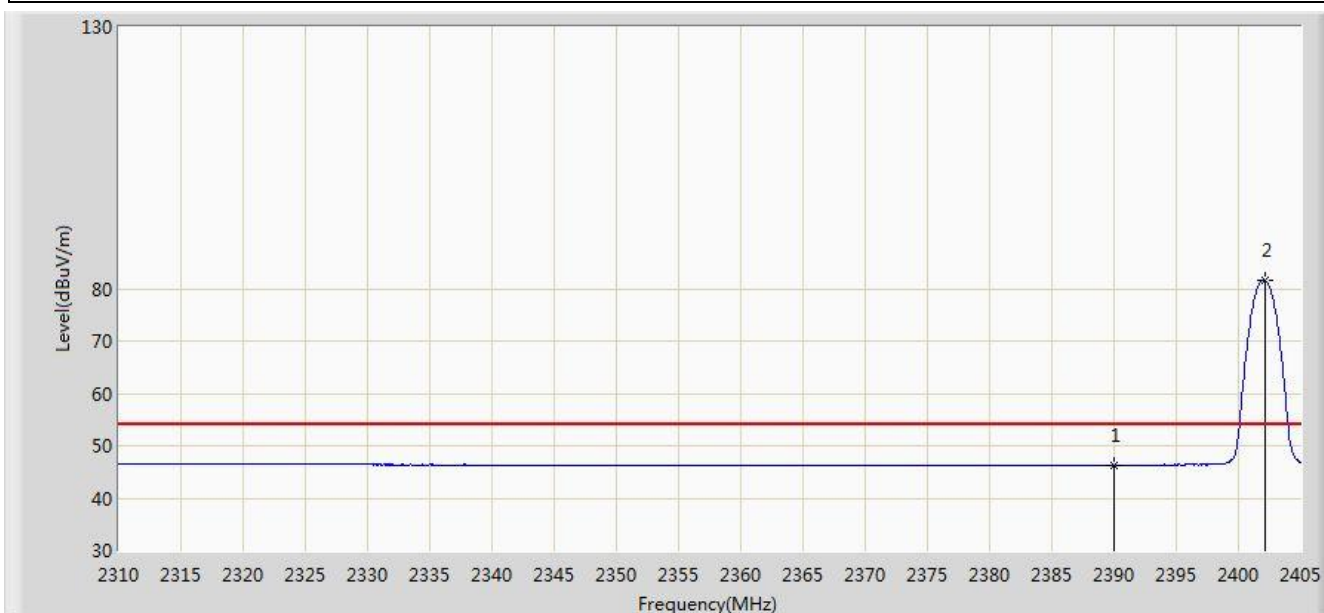


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.328	13.753	-7.672	54.000	32.575	AV
2		*	2402.150	81.621	49.062	N/A	N/A	32.559	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

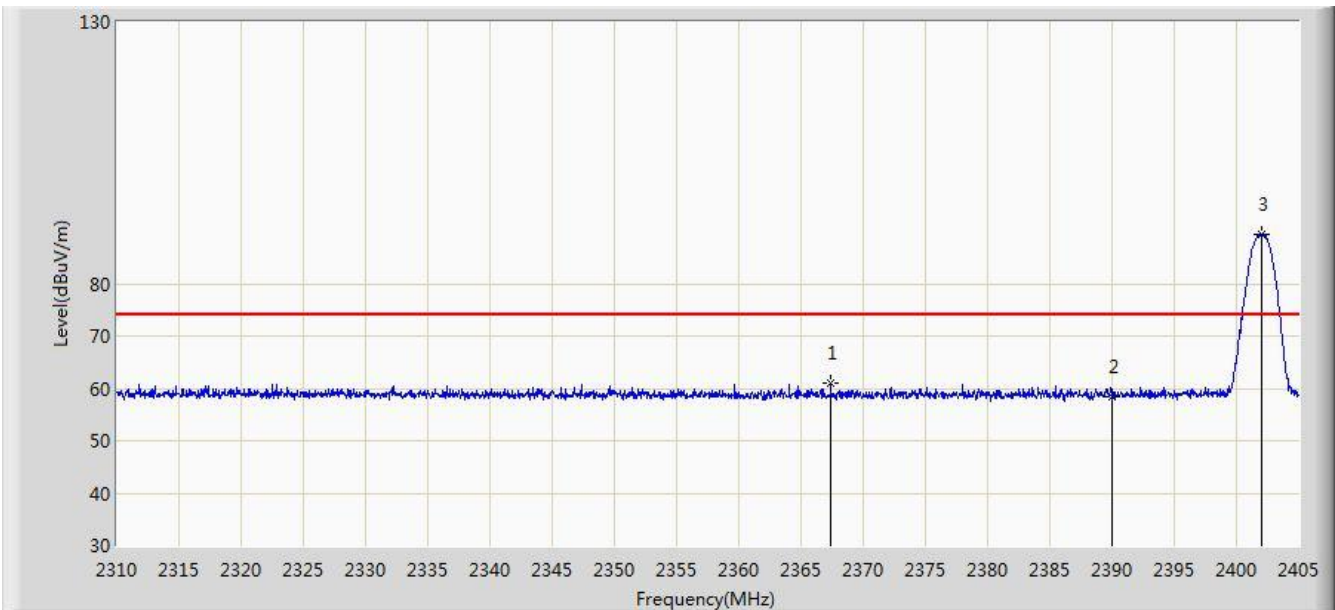


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.380	60.930	28.318	-13.070	74.000	32.612	PK
2			2390.000	58.264	25.689	-15.736	74.000	32.575	PK
3		*	2402.008	89.504	56.945	N/A	N/A	32.559	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

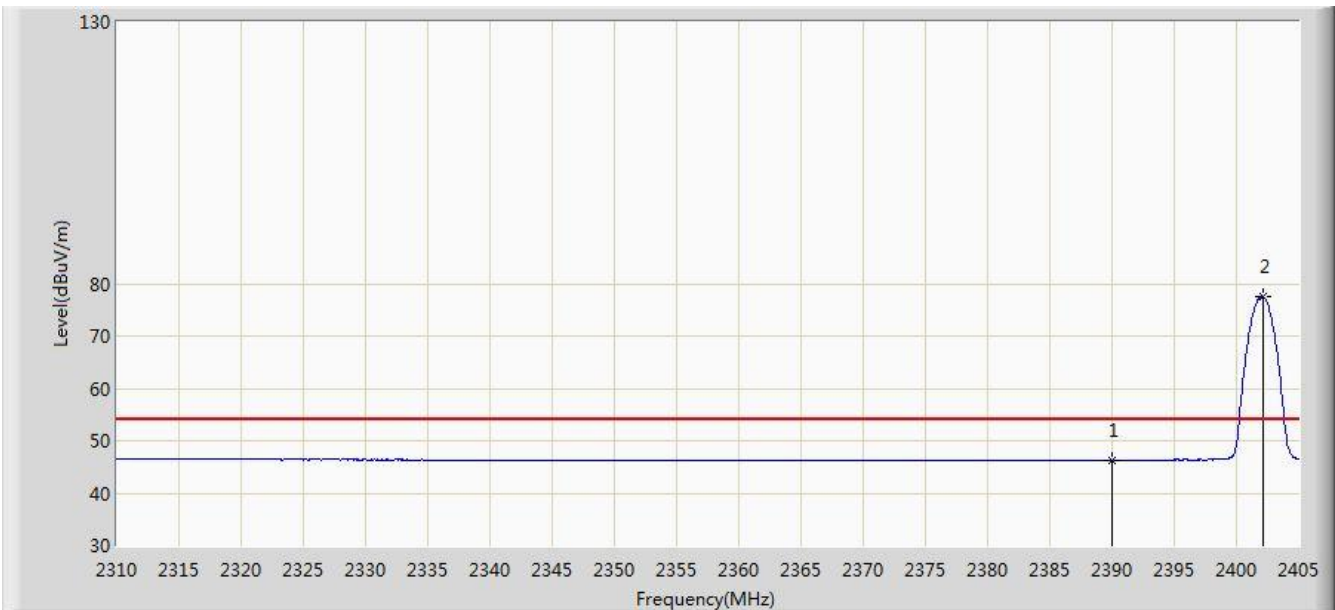


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.312	13.737	-7.688	54.000	32.575	AV
2		*	2402.150	77.523	44.964	N/A	N/A	32.559	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

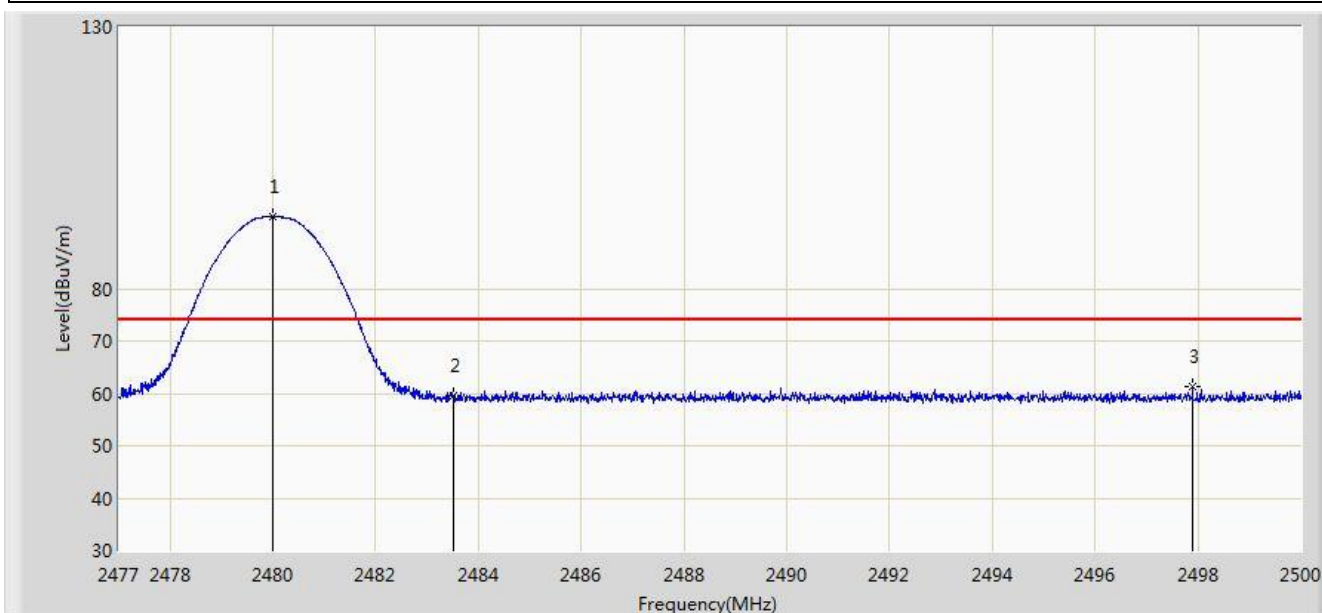


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.001	93.832	61.245	N/A	N/A	32.587	PK
2			2483.500	59.650	27.054	-14.350	74.000	32.596	PK
3			2497.896	61.233	28.599	-12.767	74.000	32.634	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

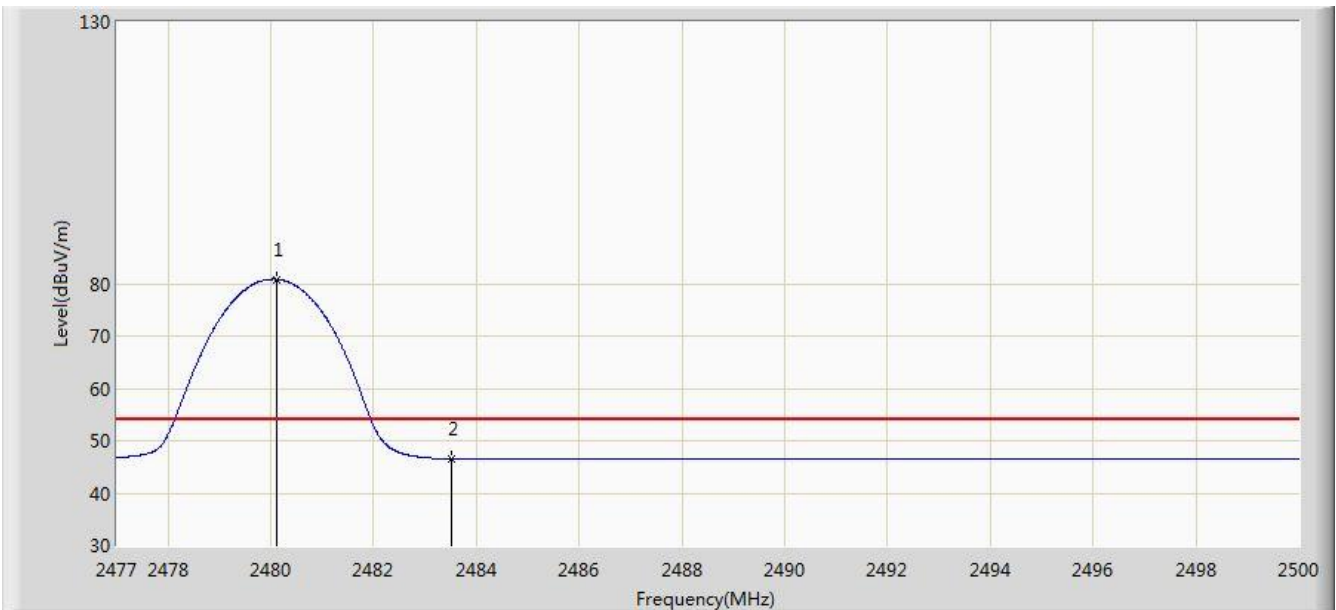


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	80.856	48.269	N/A	N/A	32.587	AV
2			2483.500	46.521	13.925	-7.479	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

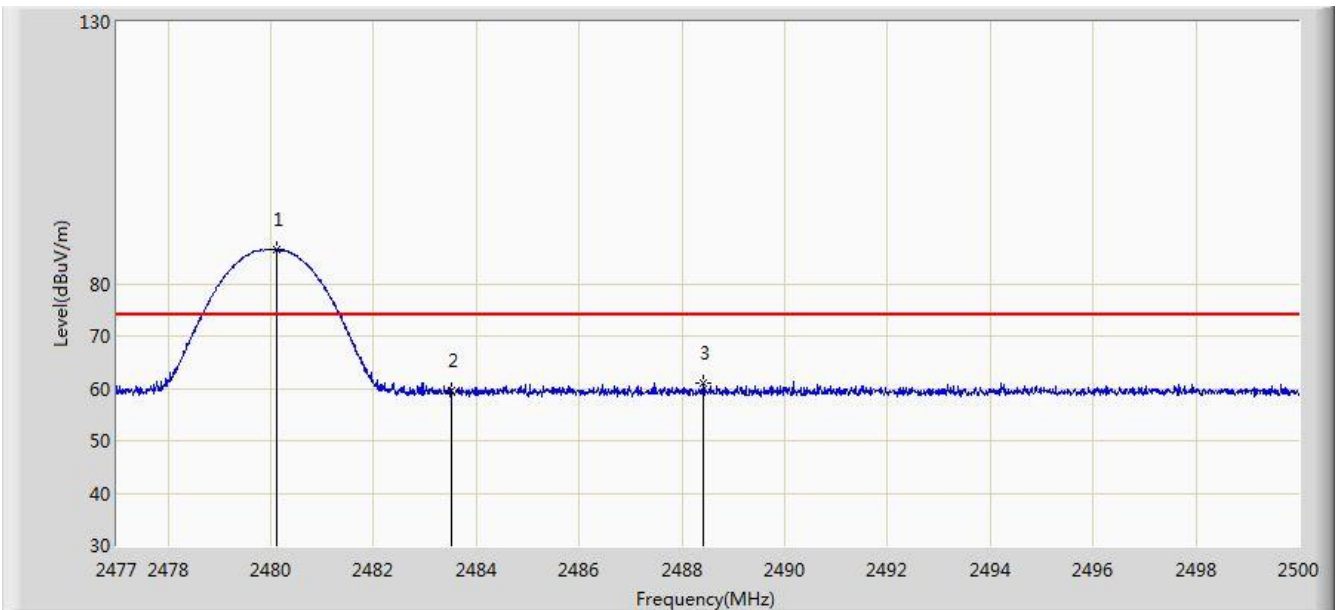


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	86.482	53.895	N/A	N/A	32.587	PK
2			2483.500	59.668	27.072	-14.332	74.000	32.596	PK
3			2488.419	61.119	28.511	-12.881	74.000	32.609	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2017/12/15 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

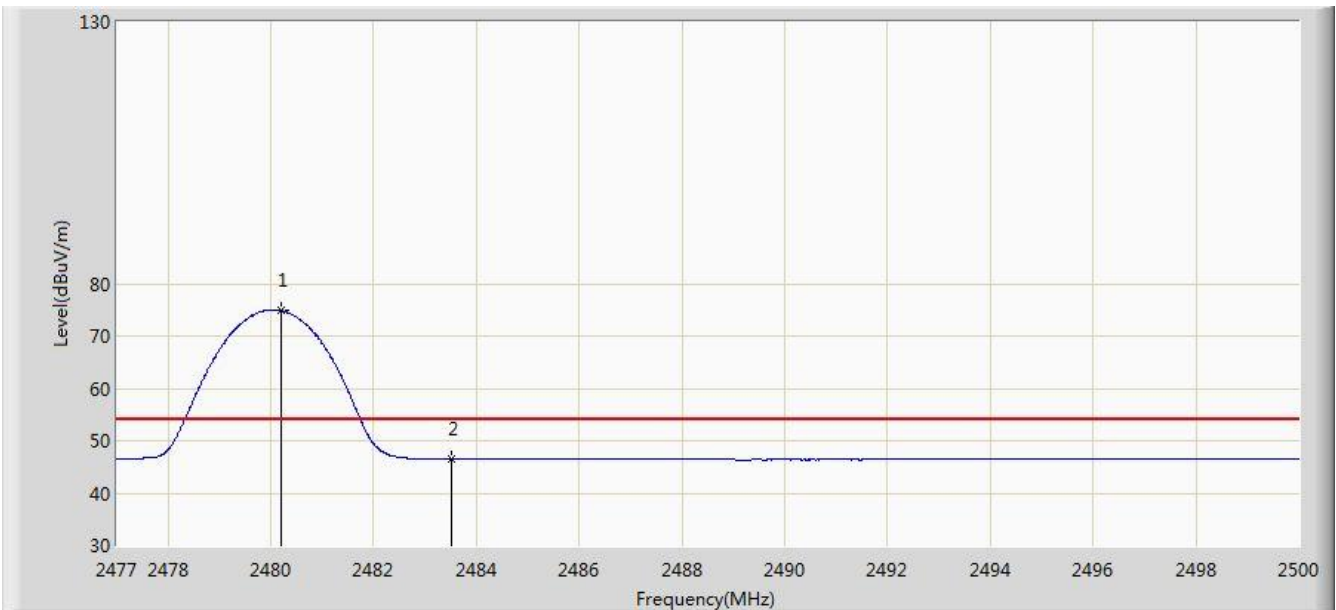

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.186	74.942	42.355	N/A	N/A	32.588	AV
2			2483.500	46.428	13.832	-7.572	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

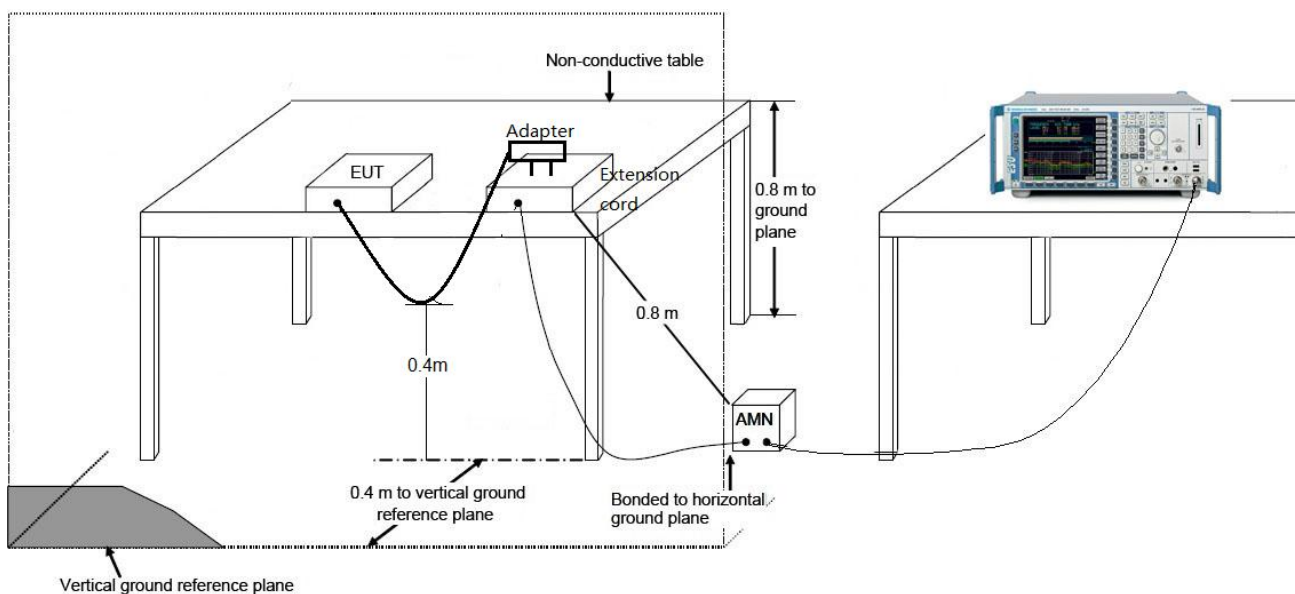

7.11.3.Test Result

Site: SR2	Time: 2017/12/11 - 09:53
Limit: FCC_Part15.207_CE_AC Power	Engineer: Polly Zong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode 1	

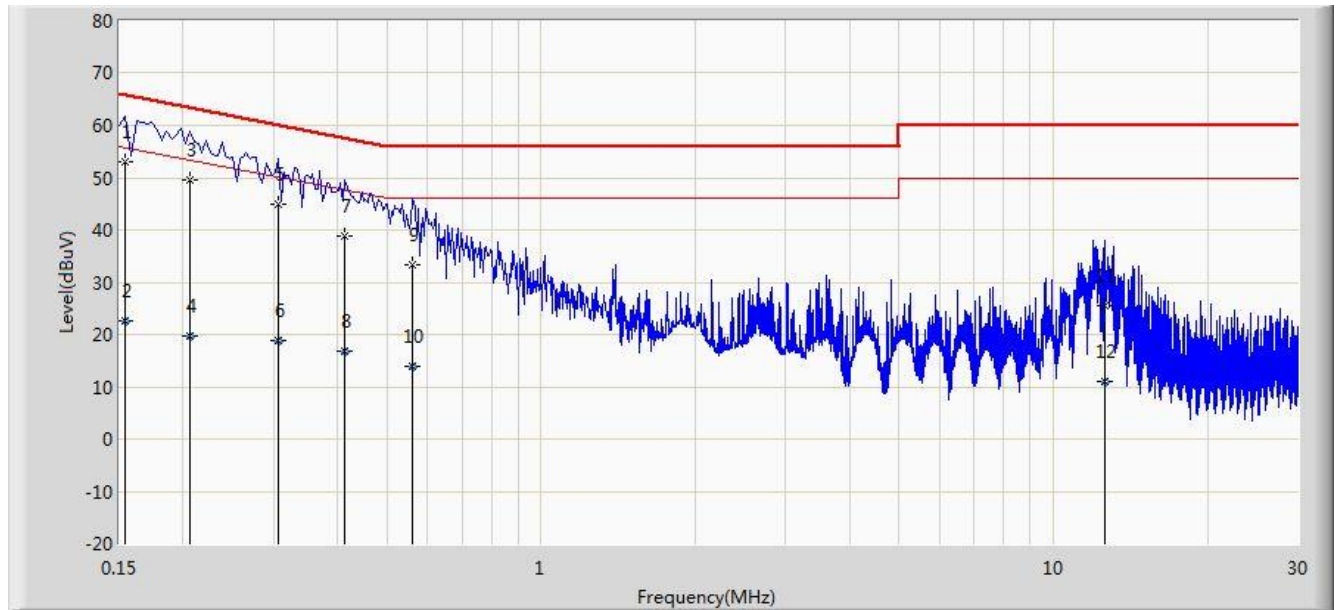


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	53.100	42.360	-12.682	65.781	10.740	QP
2			0.154	22.747	12.008	-33.034	55.781	10.740	AV
3			0.206	49.442	39.461	-13.923	63.365	9.981	QP
4			0.206	19.776	9.795	-33.589	53.365	9.981	AV
5			0.306	44.822	34.813	-15.256	60.078	10.009	QP
6			0.306	18.915	8.906	-31.163	50.078	10.009	AV
7			0.414	38.957	28.860	-18.611	57.568	10.097	QP
8			0.414	16.691	6.594	-30.876	47.568	10.097	AV
9			0.562	33.355	23.221	-22.645	56.000	10.135	QP
10			0.562	14.000	3.865	-32.000	46.000	10.135	AV
11			12.610	25.593	15.530	-34.407	60.000	10.063	QP
12			12.610	11.124	1.060	-38.876	50.000	10.063	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2017/12/11 - 09:58
Limit: FCC_Part15.207_CE_AC Power	Engineer: Polly Zong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Test Mode 1	

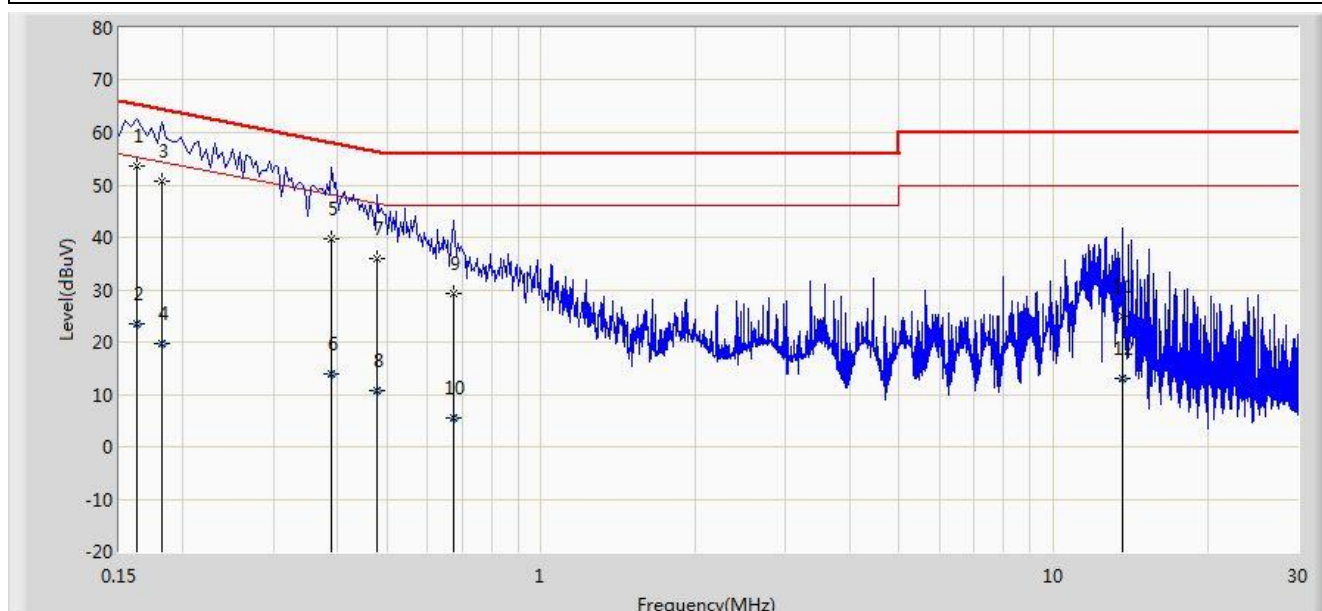

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.162	53.608	43.530	-11.752	65.361	10.078	QP
2			0.162	23.544	13.466	-31.817	55.361	10.078	AV
3			0.182	50.676	40.634	-13.717	64.394	10.042	QP
4			0.182	19.830	9.788	-34.564	54.394	10.042	AV
5			0.390	39.853	29.748	-18.211	58.064	10.105	QP
6			0.390	13.867	3.762	-34.197	48.064	10.105	AV
7			0.478	36.003	25.833	-20.371	56.374	10.170	QP
8			0.478	10.855	0.684	-35.519	46.374	10.170	AV
9			0.674	29.169	19.080	-26.831	56.000	10.090	QP
10			0.674	5.634	-4.456	-40.366	46.000	10.090	AV
11			13.622	24.894	14.789	-35.106	60.000	10.105	QP
12			13.622	13.094	2.989	-36.906	50.000	10.105	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **VR All-In-One Headset** is in compliance with Part 15C of the FCC Rules.

The End