| | | | |
|---|---|---|---|
| Test Mode: | 802.11ac-VHT80 - Ant 1 + 2 | Test Site: | AC2 |
| Test Channel: | 106 | Test Engineer: | Jone Zhang |
| Remark: | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 7383.5 | 36.5 | 12.6 | 49.1 | 74.0 | -24.9 | Peak | Horizontal |
| | 8250.5 | 35.9 | 12.9 | 48.8 | 74.0 | -25.2 | Peak | Horizontal |
| * | 9840.0 | 34.8 | 16.7 | 51.5 | 68.2 | -16.7 | Peak | Horizontal |
| * | 10171.5 | 34.1 | 17.0 | 51.1 | 68.2 | -17.1 | Peak | Horizontal |
| | 7434.5 | 36.1 | 12.8 | 48.9 | 74.0 | -25.1 | Peak | Vertical |
| | 8208.0 | 35.3 | 13.0 | 48.3 | 74.0 | -25.7 | Peak | Vertical |
| * | 9823.0 | 33.5 | 16.5 | 50.0 | 68.2 | -18.2 | Peak | Vertical |
| * | 10222.5 | 33.1 | 17.1 | 50.2 | 68.2 | -18.0 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Mode: | 802.11ac-VHT80 - Ant 1 + 2 | Test Site: | AC2 |
| Test Channel: | 122 | Test Engineer: | Jone Zhang |
| Remark: | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 7468.5 | 35.4 | 12.9 | 48.3 | 74.0 | -25.7 | Peak | Horizontal |
| | 8182.5 | 33.9 | 13.2 | 47.1 | 74.0 | -26.9 | Peak | Horizontal |
| * | 9729.5 | 33.1 | 15.8 | 48.9 | 68.2 | -19.3 | Peak | Horizontal |
| * | 10265.0 | 32.9 | 17.2 | 50.1 | 68.2 | -18.1 | Peak | Horizontal |
| | 7460.0 | 35.4 | 12.9 | 48.3 | 74.0 | -25.7 | Peak | Vertical |
| | 8242.0 | 33.9 | 13.0 | 46.9 | 74.0 | -27.1 | Peak | Vertical |
| * | 9772.0 | 32.7 | 16.2 | 48.9 | 68.2 | -19.3 | Peak | Vertical |
| * | 10273.5 | 32.9 | 17.2 | 50.1 | 68.2 | -18.1 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Mode: | 802.11ac-VHT80 - Ant 1 + 2 | Test Site: | AC2 |
| Test Channel: | 138 | Test Engineer: | Jone Zhang |
| Remark: | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 7519.5 | 35.7 | 12.8 | 48.5 | 74.0 | -25.5 | Peak | Horizontal |
| | 8131.5 | 34.2 | 13.4 | 47.6 | 74.0 | -26.4 | Peak | Horizontal |
| * | 9712.5 | 33.1 | 15.6 | 48.7 | 68.2 | -19.5 | Peak | Horizontal |
| * | 10307.5 | 32.5 | 17.3 | 49.8 | 68.2 | -18.4 | Peak | Horizontal |
| | 7647.0 | 35.1 | 12.7 | 47.8 | 74.0 | -26.2 | Peak | Vertical |
| | 8242.0 | 34.7 | 13.0 | 47.7 | 74.0 | -26.3 | Peak | Vertical |
| * | 9874.0 | 33.3 | 16.8 | 50.1 | 68.2 | -18.1 | Peak | Vertical |
| * | 10214.0 | 33.2 | 17.1 | 50.3 | 68.2 | -17.9 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | | | |
|---|---|---|---|
| Test Mode: | 802.11ac-VHT80 - Ant 1 + 2 | Test Site: | AC2 |
| Test Channel: | 155 | Test Engineer: | Jone Zhang |
| Remark: | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|---|---|---|---|---|---|---|---|---|
| | 7655.5 | 35.1 | 12.7 | 47.8 | 74.0 | -26.2 | Peak | Horizontal |
| | 8131.5 | 33.7 | 13.4 | 47.1 | 74.0 | -26.9 | Peak | Horizontal |
| * | 9772.0 | 32.2 | 16.2 | 48.4 | 68.2 | -19.8 | Peak | Horizontal |
| * | 10239.5 | 31.9 | 17.2 | 49.1 | 68.2 | -19.1 | Peak | Horizontal |
| | 7443.0 | 35.3 | 12.9 | 48.2 | 74.0 | -25.8 | Peak | Vertical |
| | 8182.5 | 33.5 | 13.2 | 46.7 | 74.0 | -27.3 | Peak | Vertical |
| * | 9738.0 | 32.1 | 15.9 | 48.0 | 68.2 | -20.2 | Peak | Vertical |
| * | 10222.5 | 32.1 | 17.1 | 49.2 | 68.2 | -19.0 | Peak | Vertical |

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz or -17dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

**The worst case of Radiated Emission below 1GHz:**

| | |
|---|---|
| Site: AC2 | Time: 2018/01/03 - 14:49 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: VULB 9168 _20-2000MHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: AC 120V/60Hz |
| **Worst Mode**: Transmit at channel 5180MHz by 802.11a | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 326.335 | 43.765 | 28.654 | -2.235 | 46.000 | 15.111 | QP |
| 2 | | | 503.845 | 39.053 | 20.409 | -6.947 | 46.000 | 18.644 | QP |
| 3 | | | 513.545 | 41.943 | 23.100 | -4.057 | 46.000 | 18.843 | QP |
| 4 | | | 523.245 | 42.424 | 23.386 | -3.576 | 46.000 | 19.038 | QP |
| 5 | | | 532.945 | 40.476 | 21.244 | -5.524 | 46.000 | 19.232 | QP |
| 6 | | | 887.965 | 31.688 | 7.426 | -14.312 | 46.000 | 24.262 | QP |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.
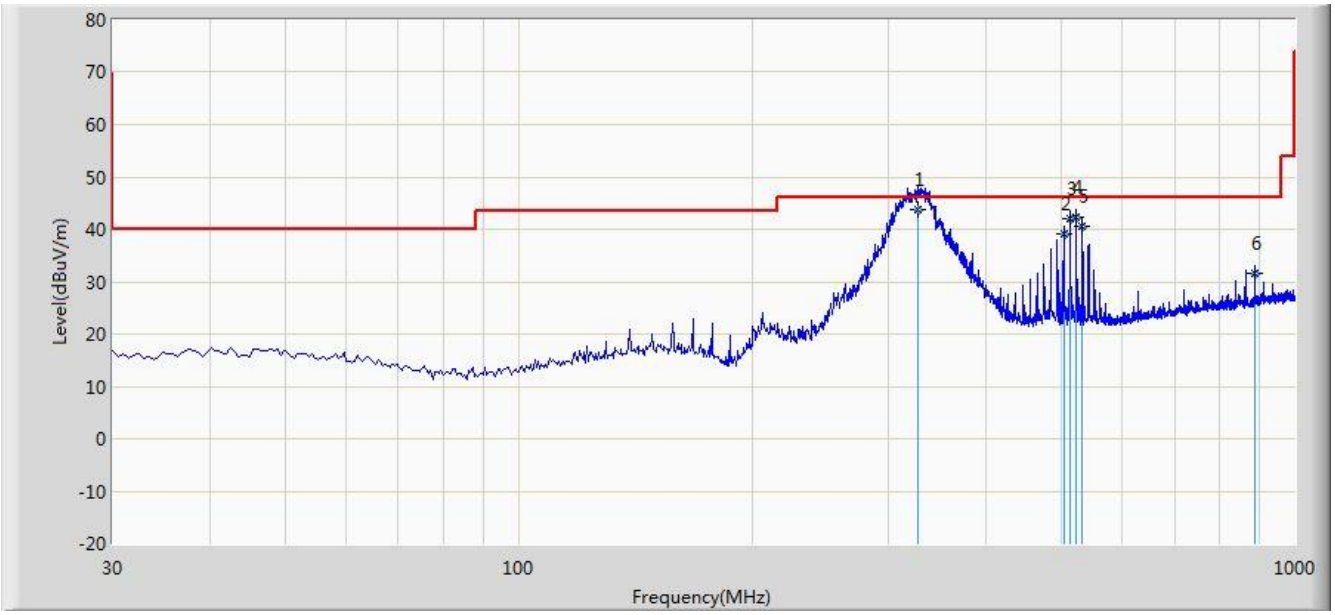
| | |
|---|---|
| Site: AC2 | Time: 2018/01/03 - 14:53 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: VULB 9168 _20-2000MHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: AC 120V/60Hz |
| **Worst Mode**: Transmit at channel 5180MHz by 802.11a | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 158.040 | 18.469 | 3.171 | -25.031 | 43.500 | 15.298 | QP |
| 2 | | * | 324.880 | 37.309 | 22.224 | -8.691 | 46.000 | 15.085 | QP |
| 3 | | | 513.545 | 31.830 | 12.987 | -14.170 | 46.000 | 18.843 | QP |
| 4 | | | 523.245 | 30.482 | 11.444 | -15.518 | 46.000 | 19.038 | QP |
| 5 | | | 532.945 | 28.366 | 9.134 | -17.634 | 46.000 | 19.232 | QP |
| 6 | | | 720.155 | 27.786 | 5.398 | -18.214 | 46.000 | 22.388 | QP |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.
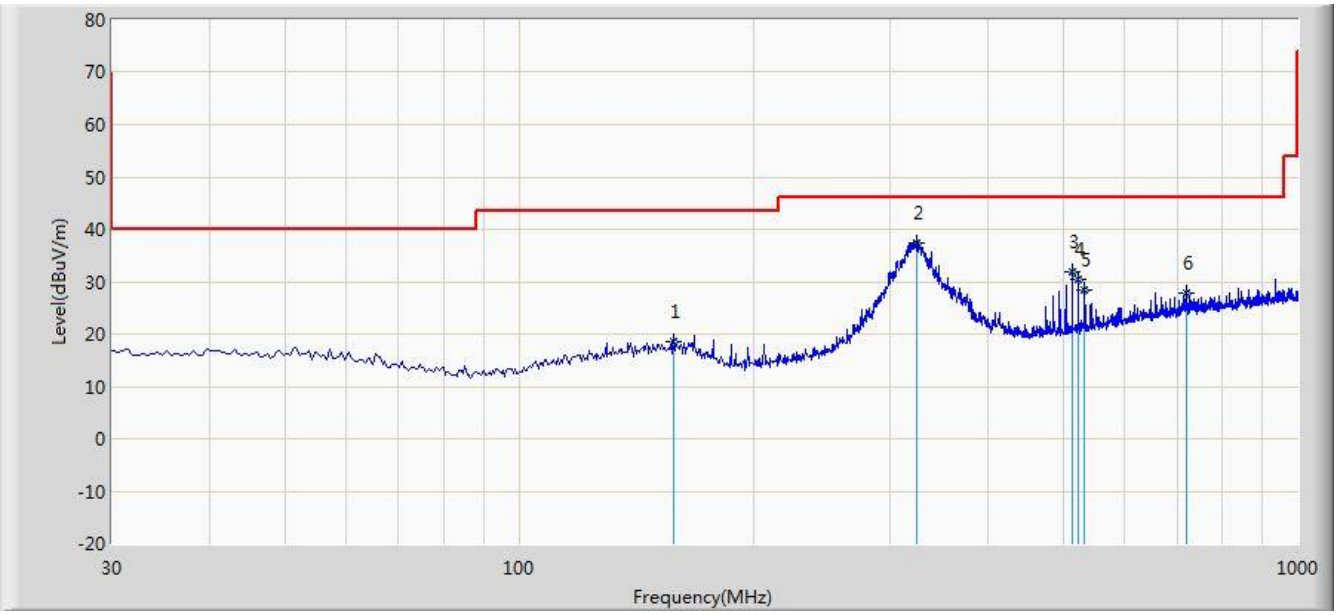
## 7.8. Radiated Restricted Band Edge Measurement

### 7.8.1.Test Limit

**For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|---|---|---|---|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| [1] 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.25 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 – 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | ([2]) |
| 13.36 - 13.41 | -- | -- | -- |

**For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz

above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| **FCC Part 15 Subpart C Paragraph 15.209** | | |
|---|---|---|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 – 0.490 | 2400/F (kHz) | 300 |
| 0.490 – 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

### 7.8.2.Test Result

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:34 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5147.890 | 60.684 | 57.609 | -13.316 | 74.000 | 3.075 | PK |
| 2 | | | 5150.000 | 55.533 | 52.463 | -18.467 | 74.000 | 3.069 | PK |
| 3 | | * | 5181.100 | 105.031 | 101.984 | N/A | N/A | 3.047 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:37 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 | |

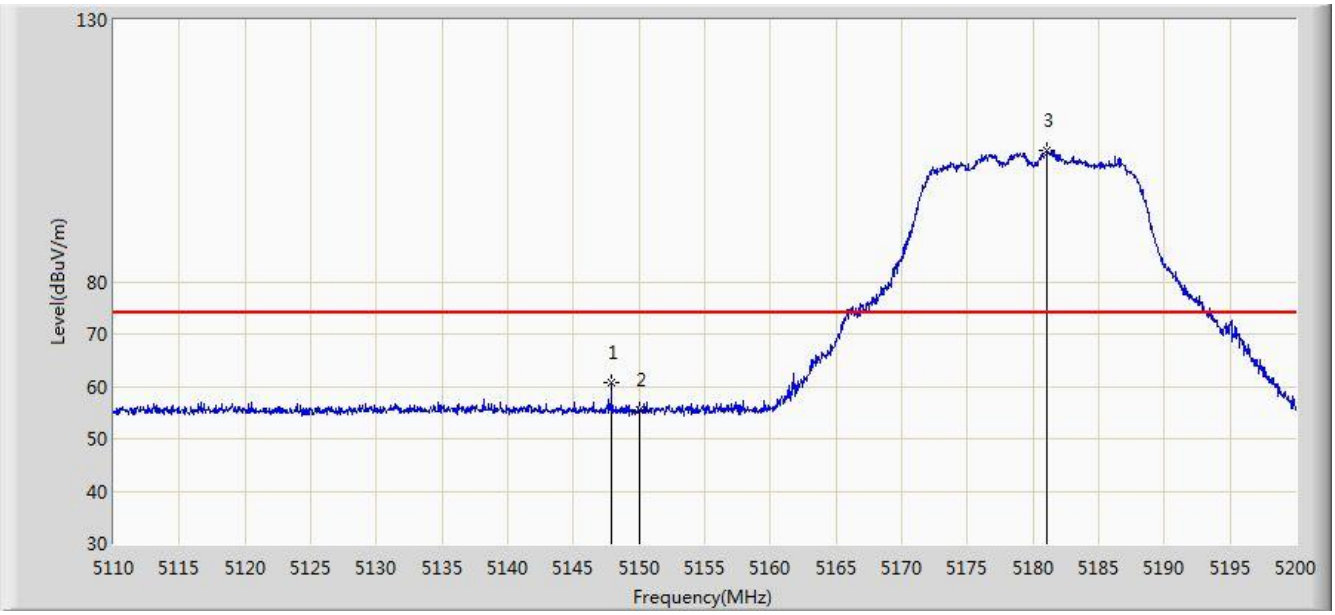


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.301 | 40.231 | -10.699 | 54.000 | 3.069 | AV |
| 2 | | * | 5178.940 | 93.377 | 90.338 | N/A | N/A | 3.040 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:39 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 | |

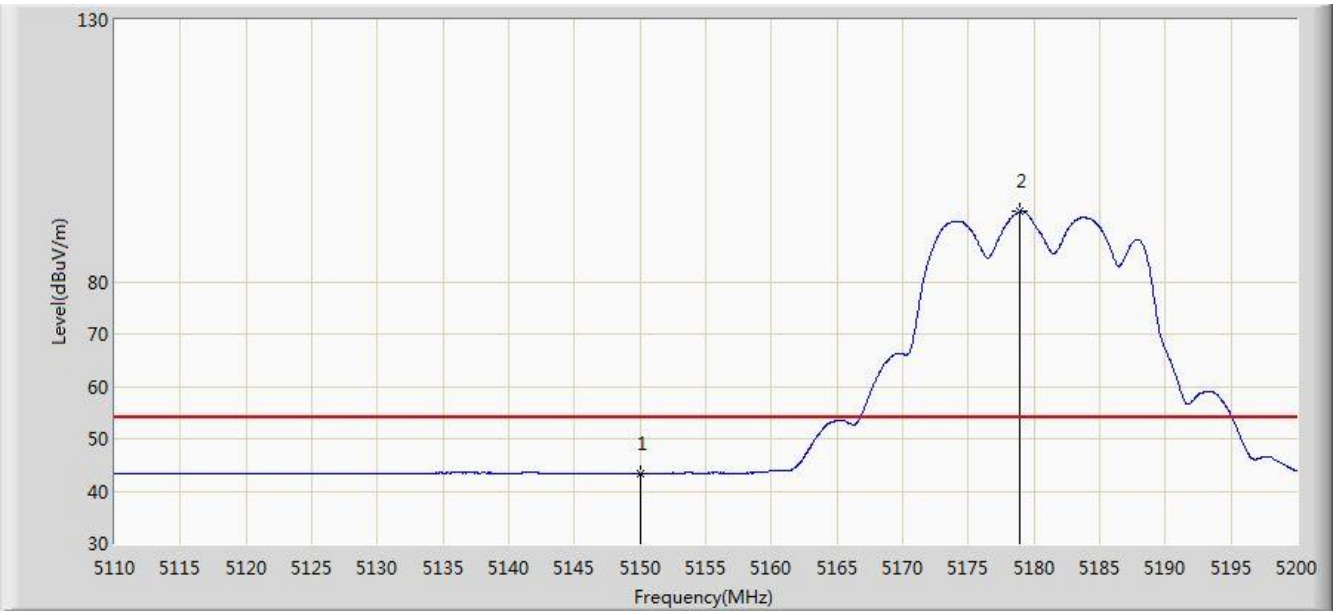


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5142.940 | 57.415 | 54.328 | -16.585 | 74.000 | 3.087 | PK |
| 2 | | | 5150.000 | 56.392 | 53.322 | -17.608 | 74.000 | 3.069 | PK |
| 3 | | * | 5177.635 | 99.743 | 96.709 | N/A | N/A | 3.033 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:40 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 | |

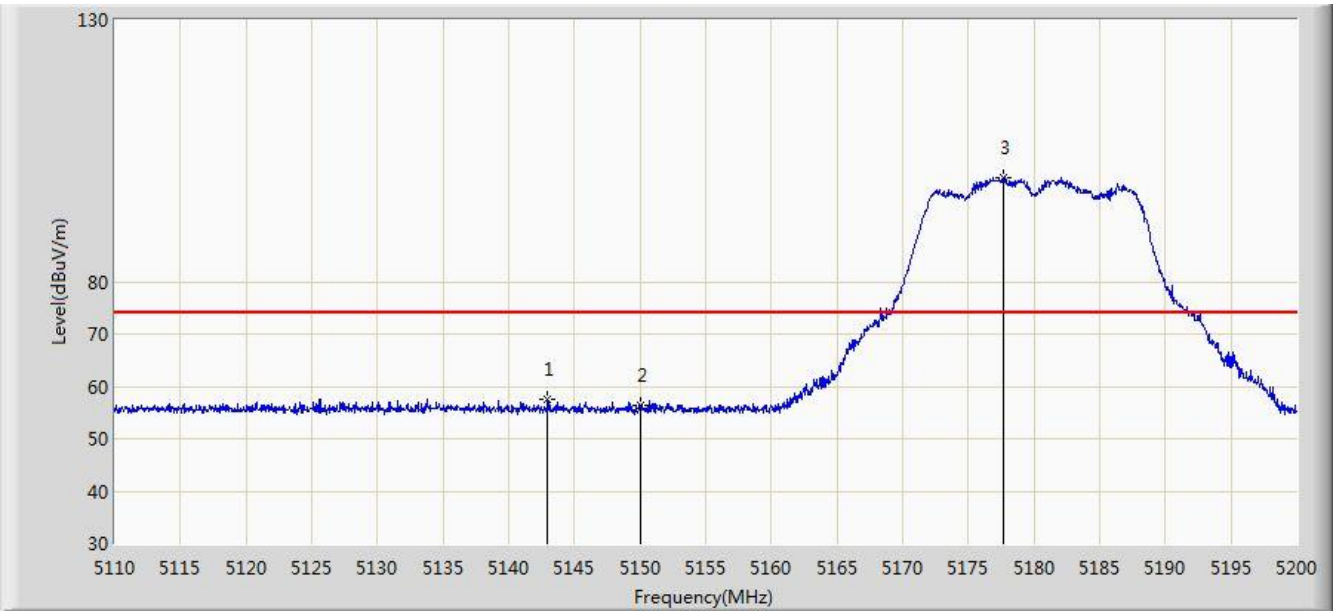


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 42.921 | 39.851 | -11.079 | 54.000 | 3.069 | AV |
| 2 | | * | 5181.325 | 88.437 | 85.389 | N/A | N/A | 3.048 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:42 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 | |

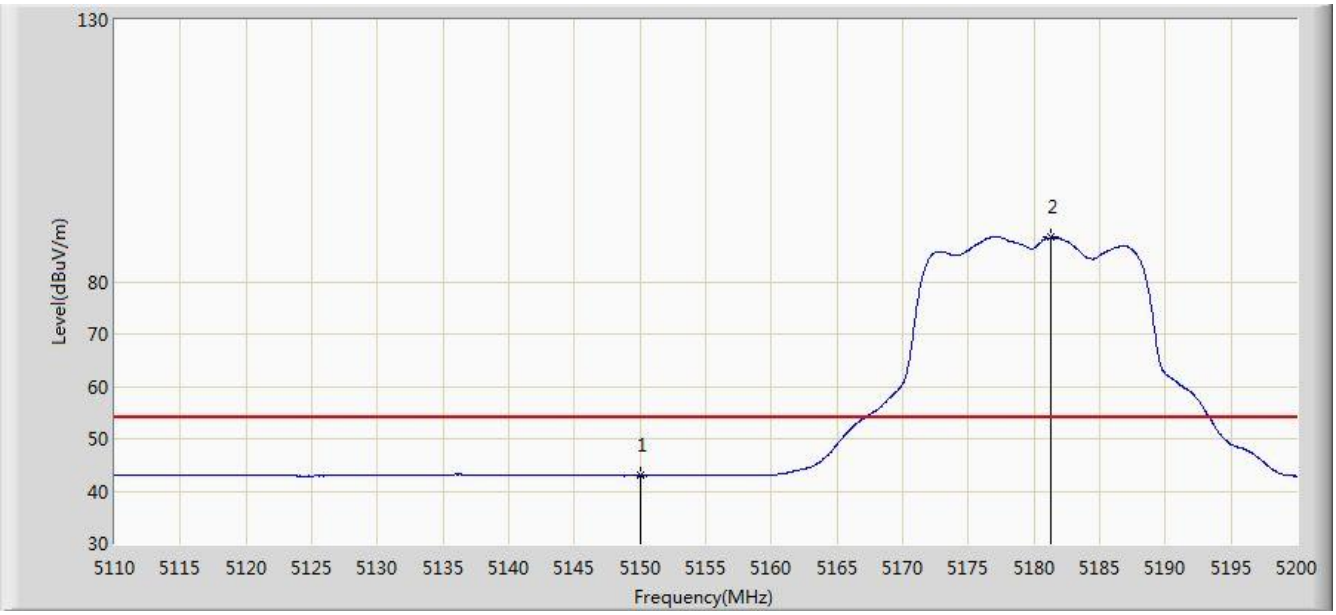


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.040 | 104.637 | 101.971 | N/A | N/A | 2.667 | PK |
| 2 | | | 5350.000 | 54.954 | 52.257 | -19.046 | 74.000 | 2.697 | PK |
| 3 | | | 5358.960 | 59.028 | 56.309 | -14.972 | 74.000 | 2.720 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:43 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 | |

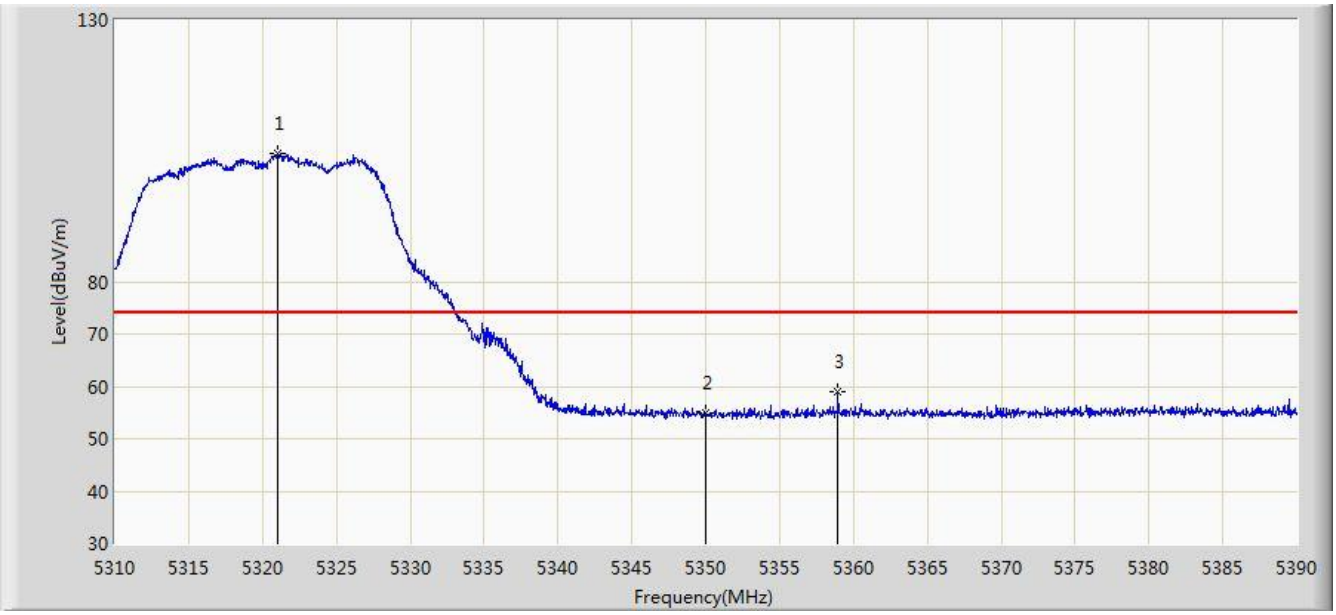


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.400 | 93.869 | 91.201 | N/A | N/A | 2.668 | AV |
| 2 | | | 5350.000 | 42.489 | 39.792 | -11.511 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:44 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 | |

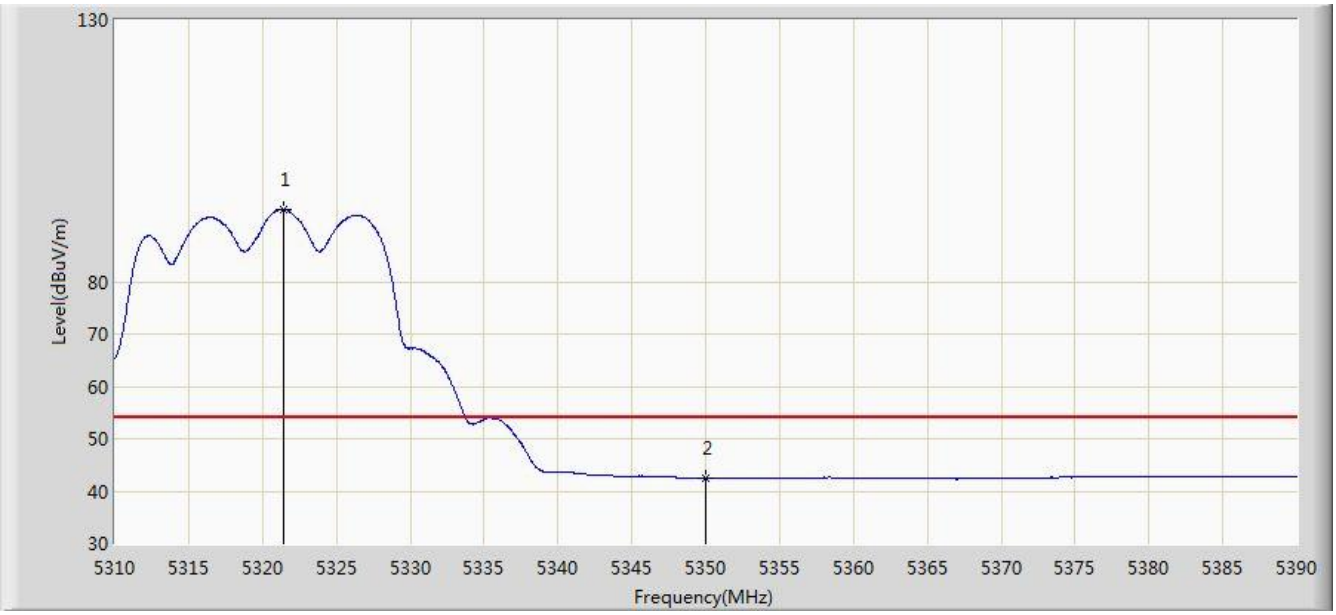


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.400 | 100.067 | 97.399 | N/A | N/A | 2.668 | PK |
| 2 | | | 5350.000 | 54.655 | 51.958 | -19.345 | 74.000 | 2.697 | PK |
| 3 | | | 5374.520 | 57.300 | 54.351 | -16.700 | 74.000 | 2.948 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:46 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 | |

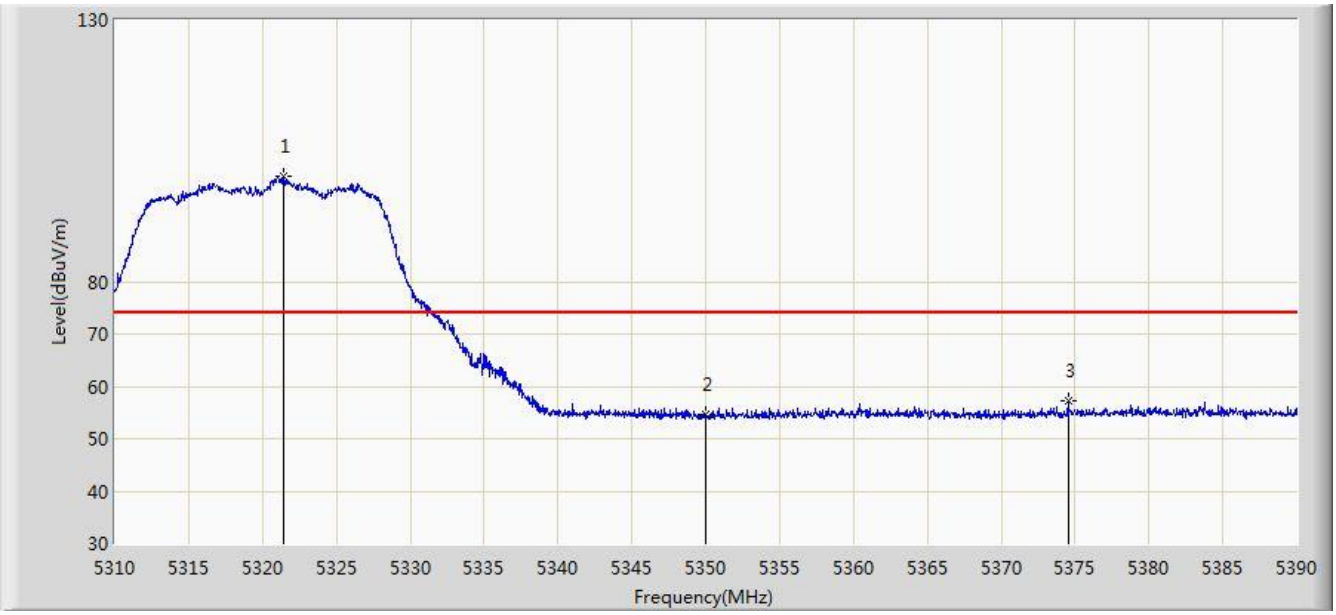


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5320.920 | 89.310 | 86.644 | N/A | N/A | 2.665 | AV |
| 2 | | | 5350.000 | 41.920 | 39.223 | -12.080 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:47 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 | |

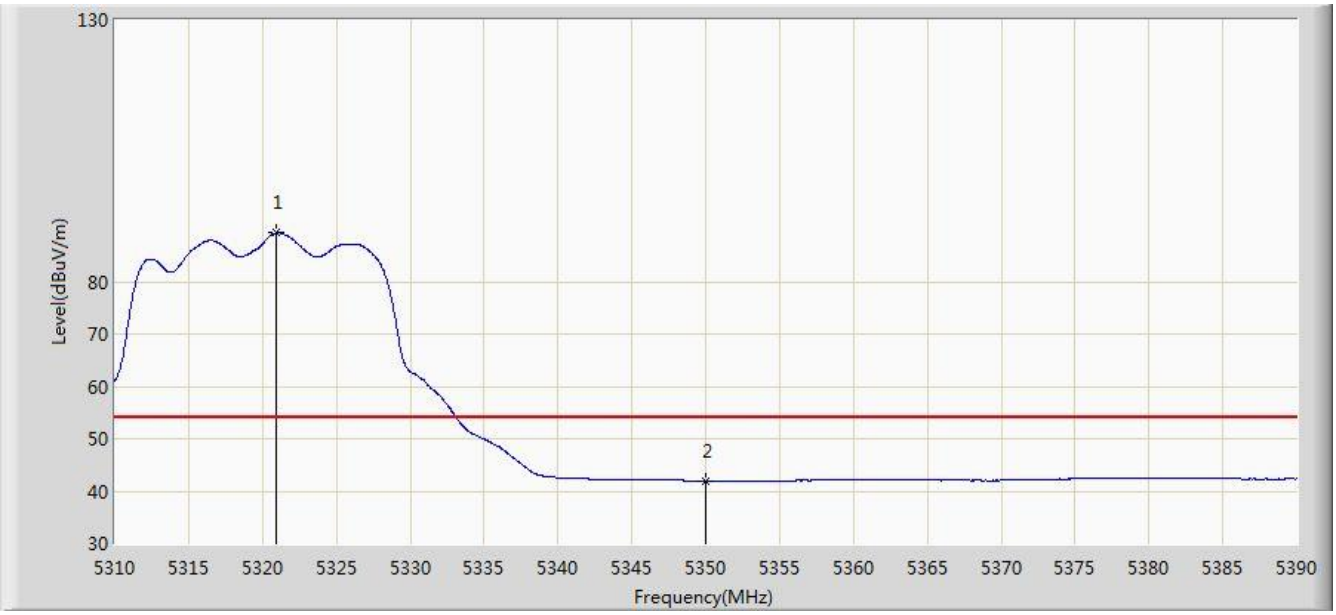


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5457.720 | 56.868 | 53.751 | -17.132 | 74.000 | 3.117 | PK |
| 2 | | | 5460.000 | 55.800 | 52.607 | -18.200 | 74.000 | 3.194 | PK |
| 3 | | | 5464.245 | 57.031 | 53.695 | -16.969 | 74.000 | 3.336 | PK |
| 4 | | | 5470.000 | 56.556 | 53.027 | -17.444 | 74.000 | 3.529 | PK |
| 5 | | * | 5497.995 | 106.491 | 103.358 | N/A | N/A | 3.133 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:49 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 | |

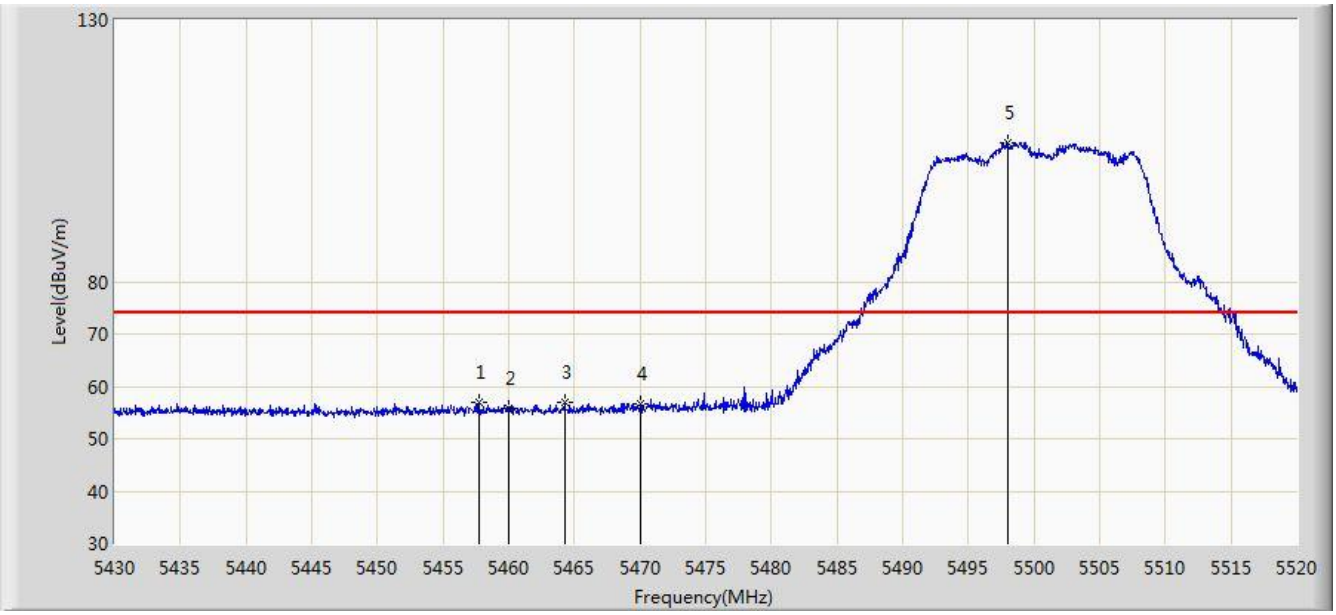


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.066 | 39.873 | -10.934 | 54.000 | 3.194 | AV |
| 2 | | * | 5499.075 | 94.874 | 91.752 | N/A | N/A | 3.122 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:50 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 | |

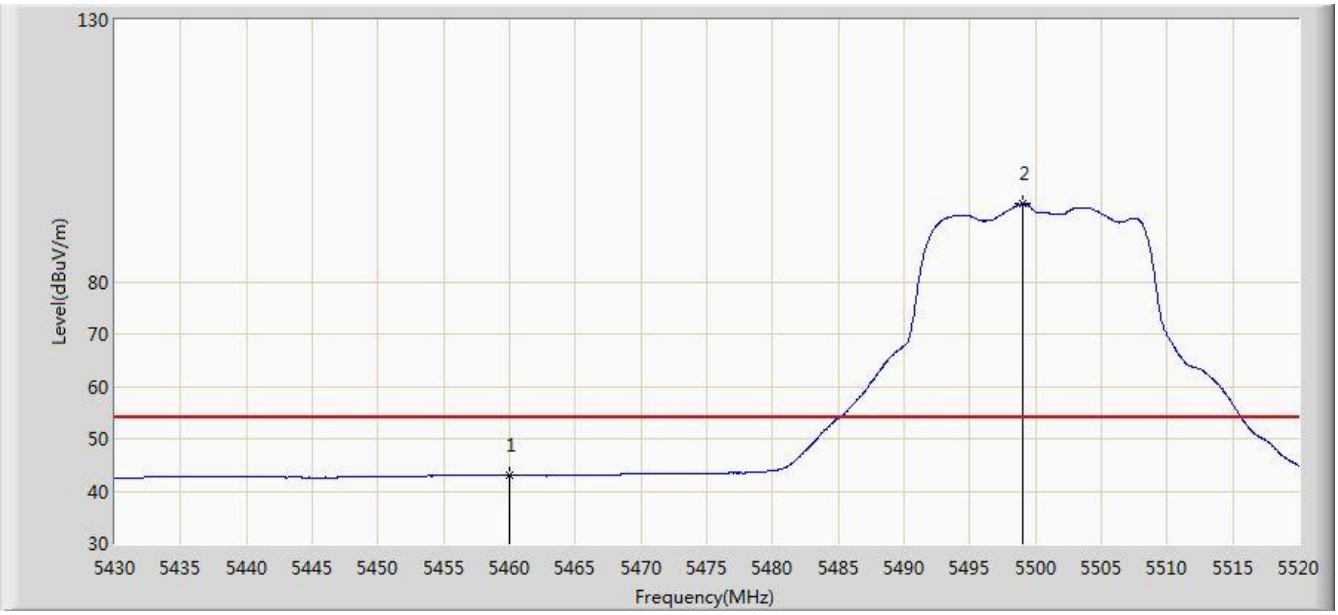


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5453.940 | 56.592 | 53.603 | -17.408 | 74.000 | 2.989 | PK |
| 2 | | | 5460.000 | 55.327 | 52.134 | -18.673 | 74.000 | 3.194 | PK |
| 3 | | | 5465.640 | 56.540 | 53.157 | -17.460 | 74.000 | 3.383 | PK |
| 4 | | | 5470.000 | 55.762 | 52.233 | -18.238 | 74.000 | 3.529 | PK |
| 5 | | * | 5497.680 | 101.006 | 97.870 | N/A | N/A | 3.135 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:52 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 | |

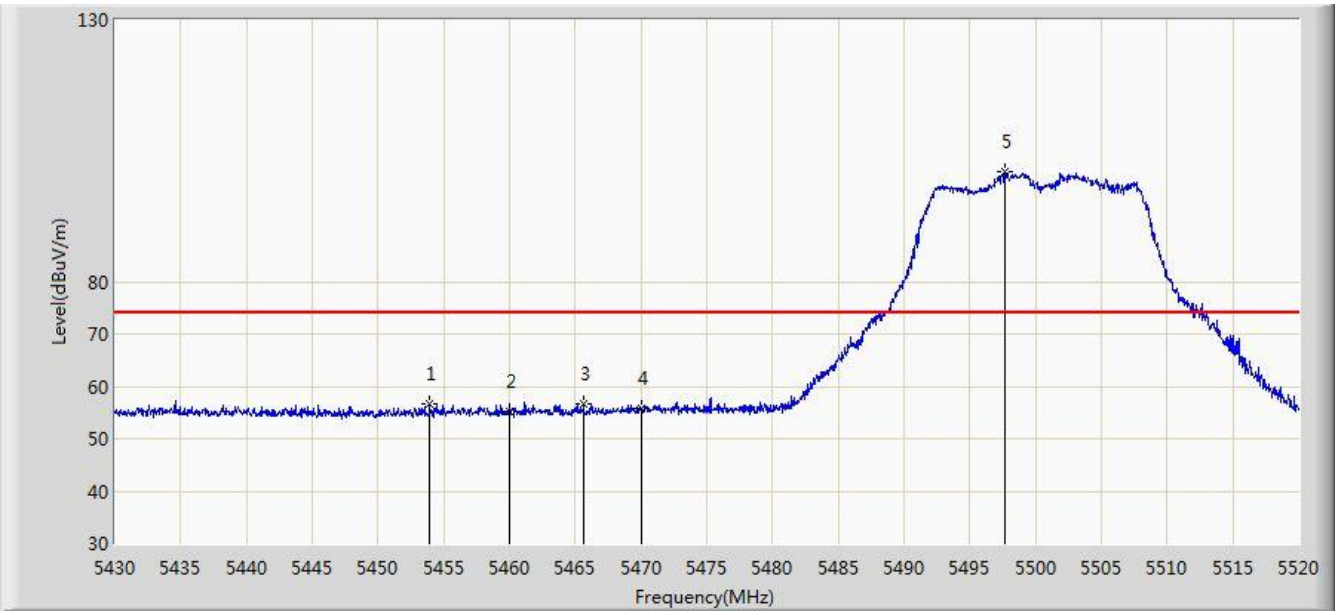


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 42.691 | 39.498 | -11.309 | 54.000 | 3.194 | AV |
| 2 | | * | 5499.075 | 89.174 | 86.052 | N/A | N/A | 3.122 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:53 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 | |

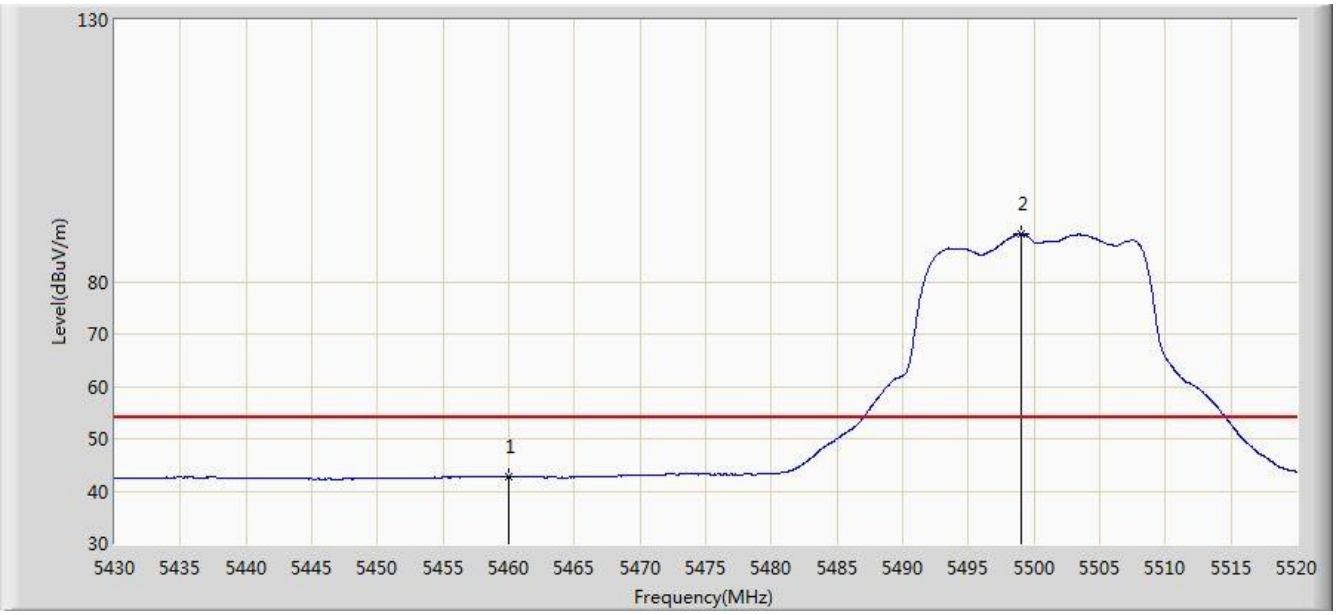


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5696.700 | 104.386 | 100.411 | N/A | N/A | 3.975 | PK |
| 2 | | | 5725.000 | 55.578 | 51.472 | -18.422 | 74.000 | 4.105 | PK |
| 3 | | | 5742.330 | 59.859 | 55.587 | -14.141 | 74.000 | 4.272 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:55 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 | |

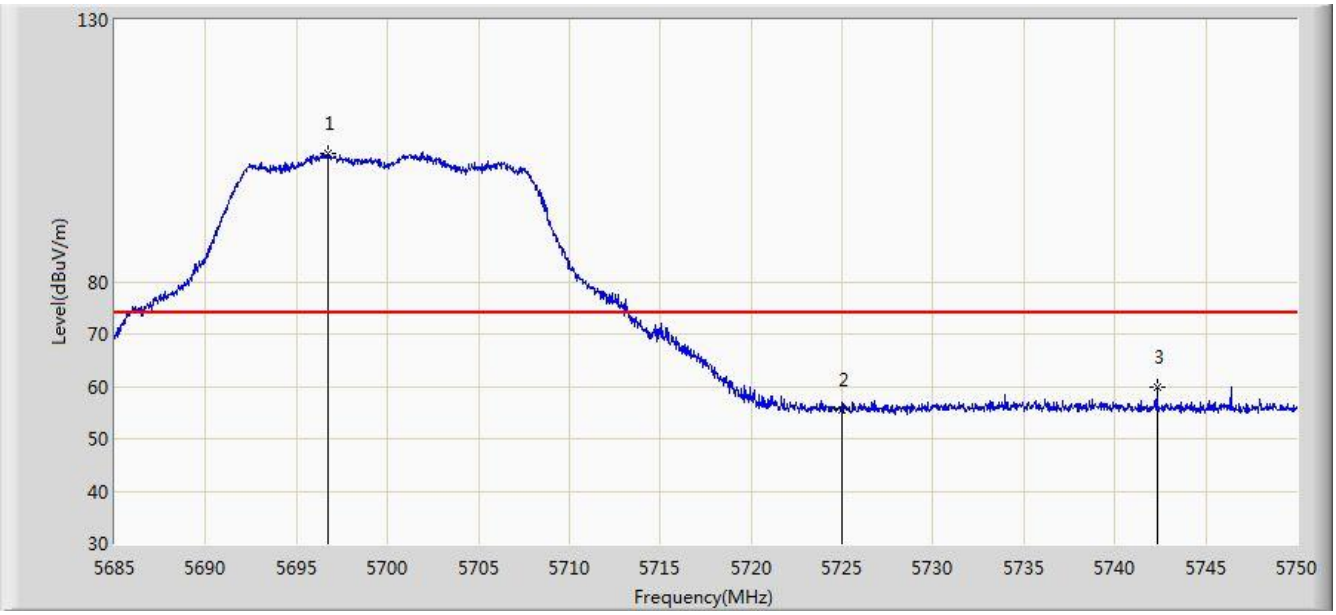


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5700.925 | 93.358 | 89.428 | N/A | N/A | 3.930 | AV |
| 2 | | | 5725.000 | 43.895 | 39.789 | -10.105 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:55 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 | |

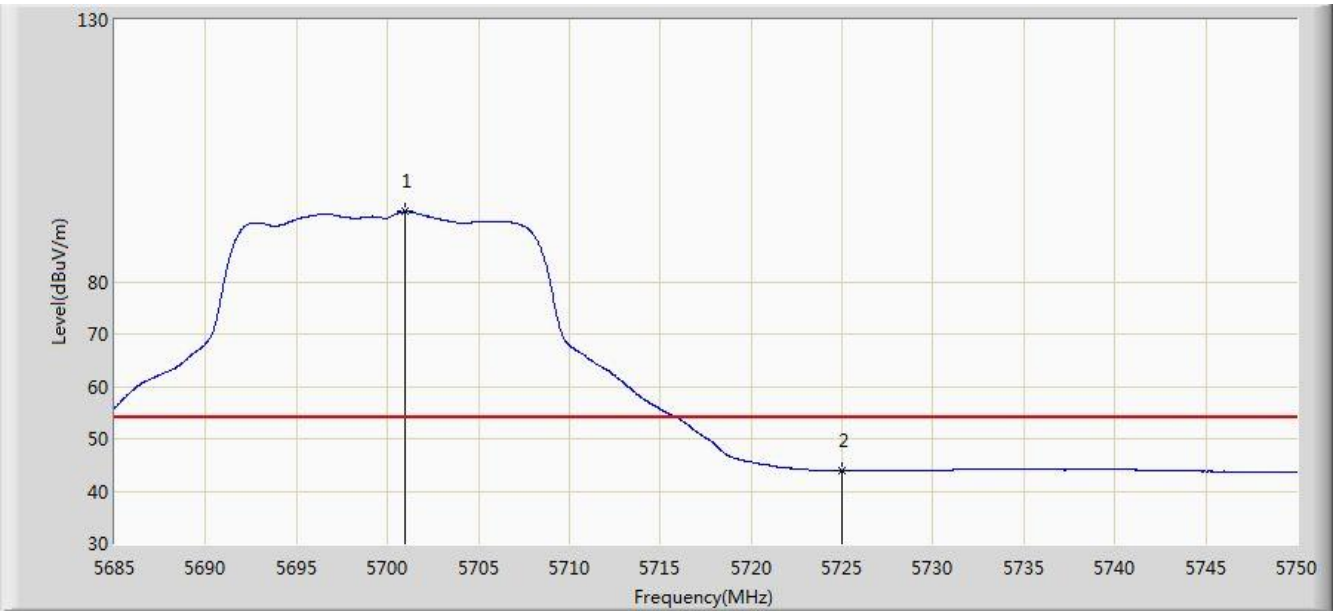


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5701.250 | 100.732 | 96.806 | N/A | N/A | 3.927 | PK |
| 2 | | | 5725.000 | 55.244 | 51.138 | -18.756 | 74.000 | 4.105 | PK |
| 3 | | | 5728.712 | 57.374 | 53.175 | -16.626 | 74.000 | 4.199 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:57 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 | |

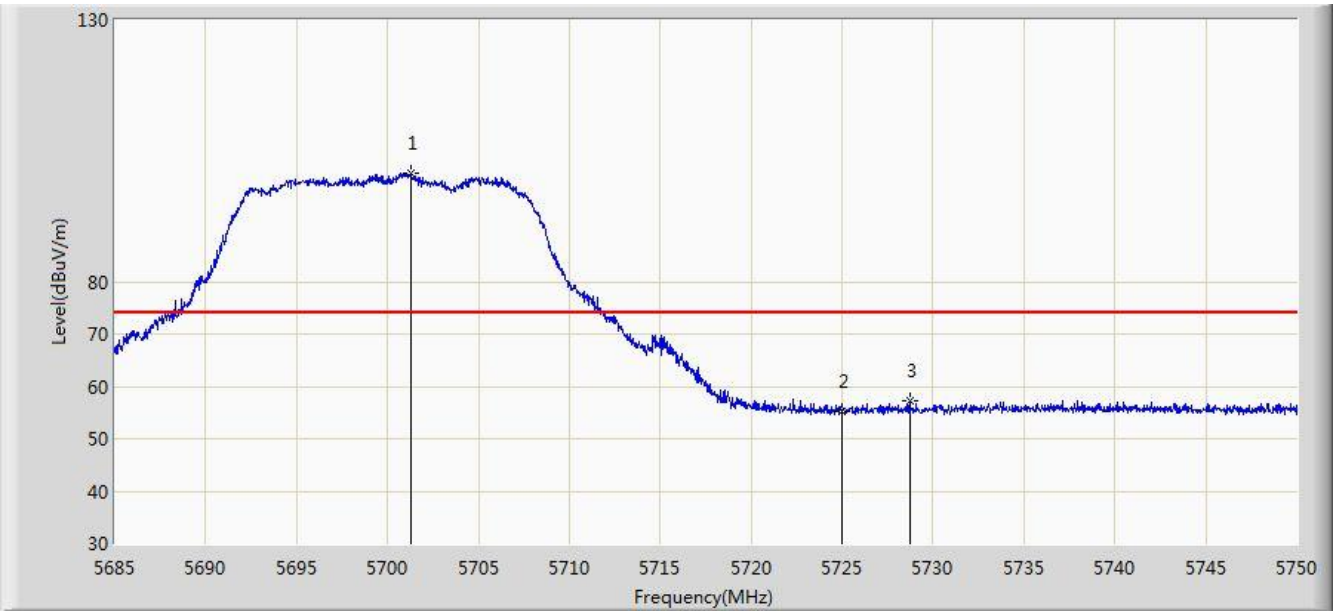


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5701.152 | 90.130 | 86.203 | N/A | N/A | 3.927 | AV |
| 2 | | | 5725.000 | 42.927 | 38.821 | -11.073 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 14:58 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 | |

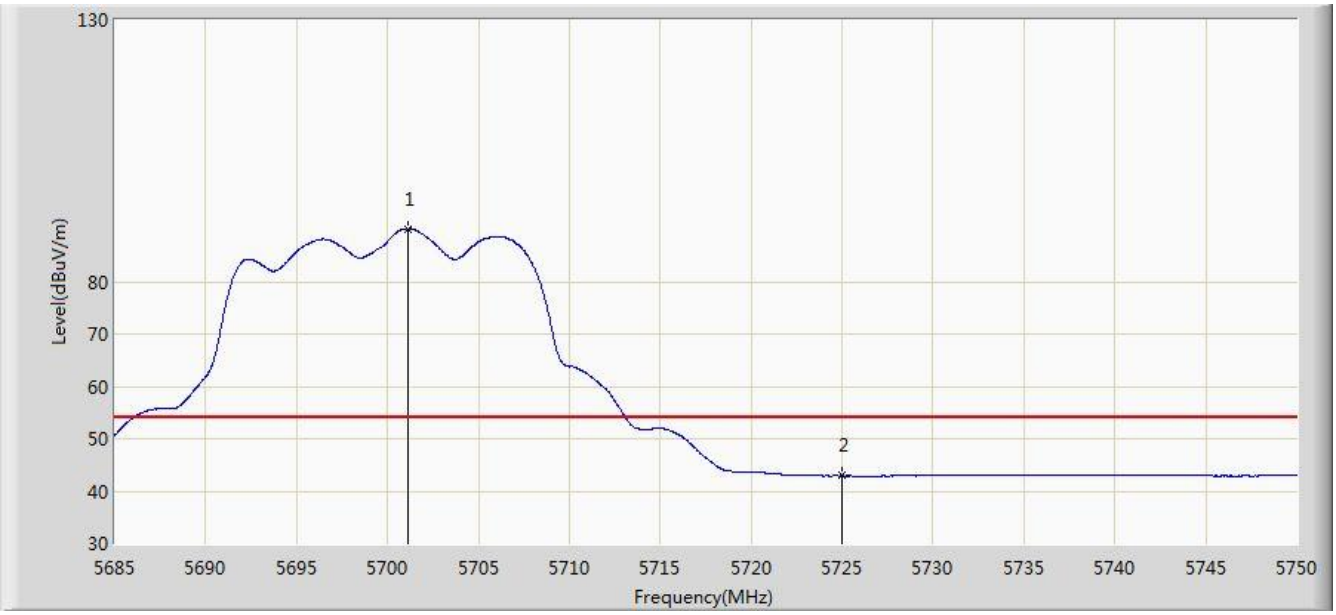


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5644.550 | 57.501 | 53.591 | -10.699 | 68.200 | 3.910 | PK |
| 2 | | | 5650.000 | 55.441 | 51.638 | -12.759 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.472 | 51.532 | -49.728 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 55.788 | 51.806 | -55.012 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 55.885 | 51.779 | -66.315 | 122.200 | 4.105 | PK |
| 6 | | | 5744.375 | 104.384 | 100.114 | N/A | N/A | 4.270 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:00 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 | |

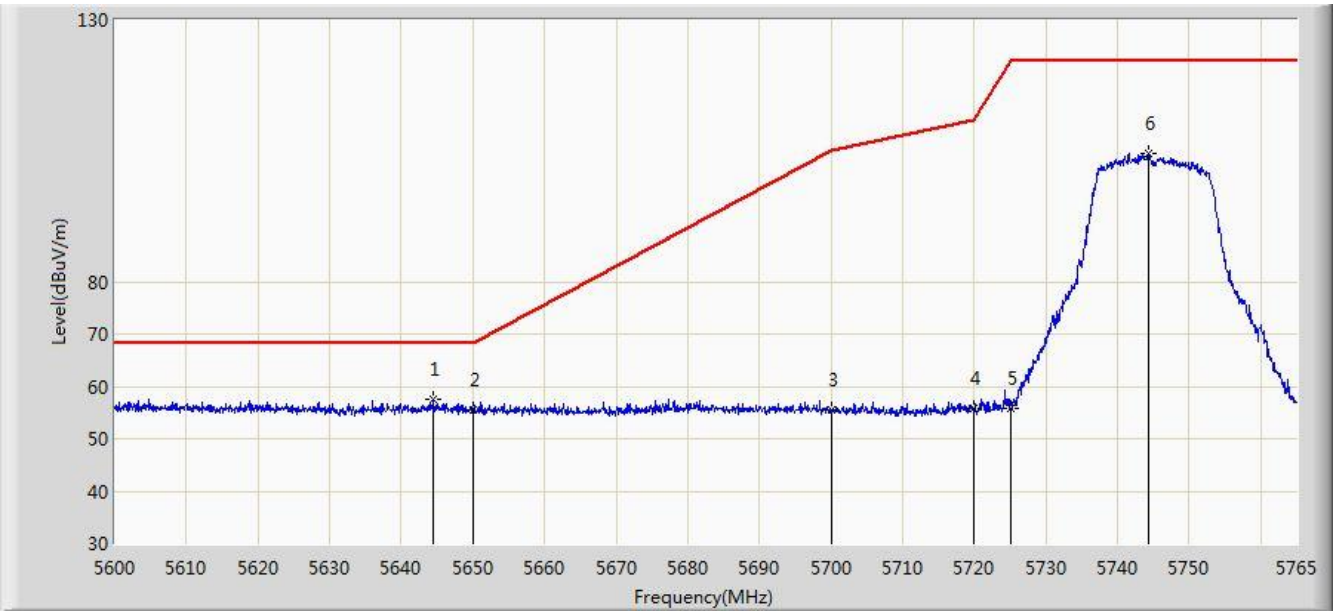


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5642.817 | 57.114 | 53.234 | -11.086 | 68.200 | 3.879 | PK |
| 2 | | | 5650.000 | 56.316 | 52.513 | -11.884 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.628 | 51.688 | -49.572 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 55.305 | 51.323 | -55.495 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 55.627 | 51.521 | -66.573 | 122.200 | 4.105 | PK |
| 6 | | | 5747.592 | 100.138 | 95.870 | N/A | N/A | 4.268 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:02 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 | |

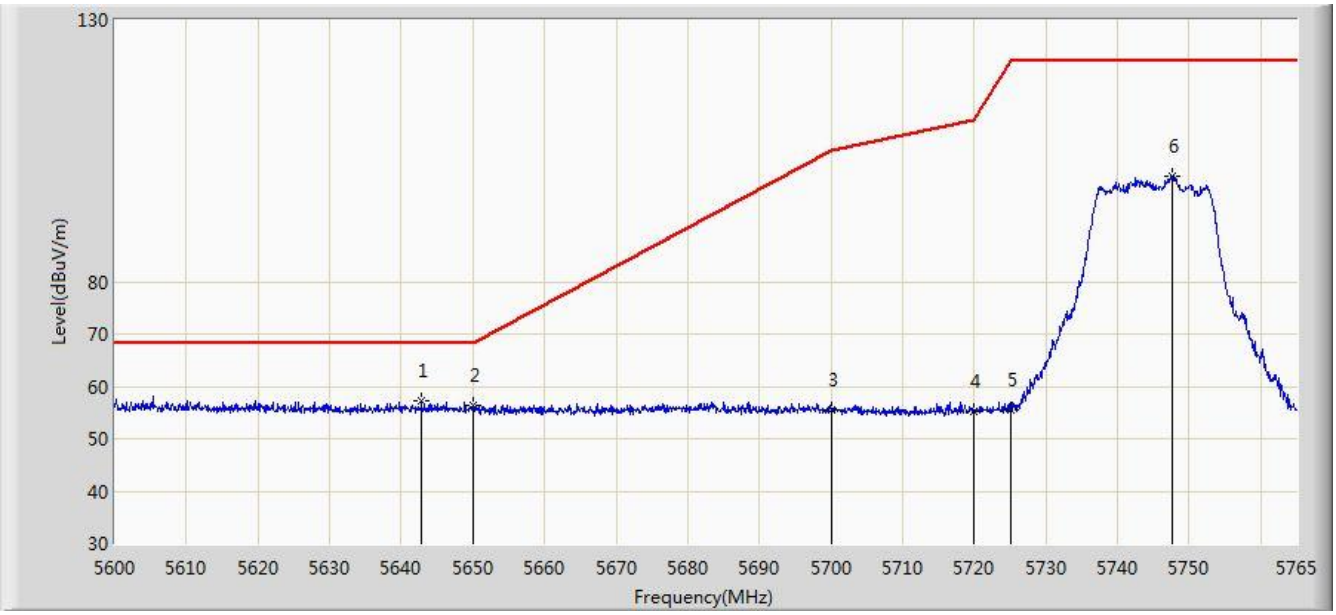


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5827.717 | 102.405 | 97.627 | N/A | N/A | 4.779 | PK |
| 2 | | | 5850.000 | 56.322 | 51.327 | -65.878 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 56.129 | 51.141 | -54.671 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 56.023 | 51.016 | -49.177 | 105.200 | 5.008 | PK |
| 5 | | | 5924.000 | 55.906 | 50.753 | -13.030 | 68.937 | 5.153 | PK |
| 6 | | * | 5928.922 | 57.929 | 52.742 | -10.271 | 68.200 | 5.187 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:04 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 | |

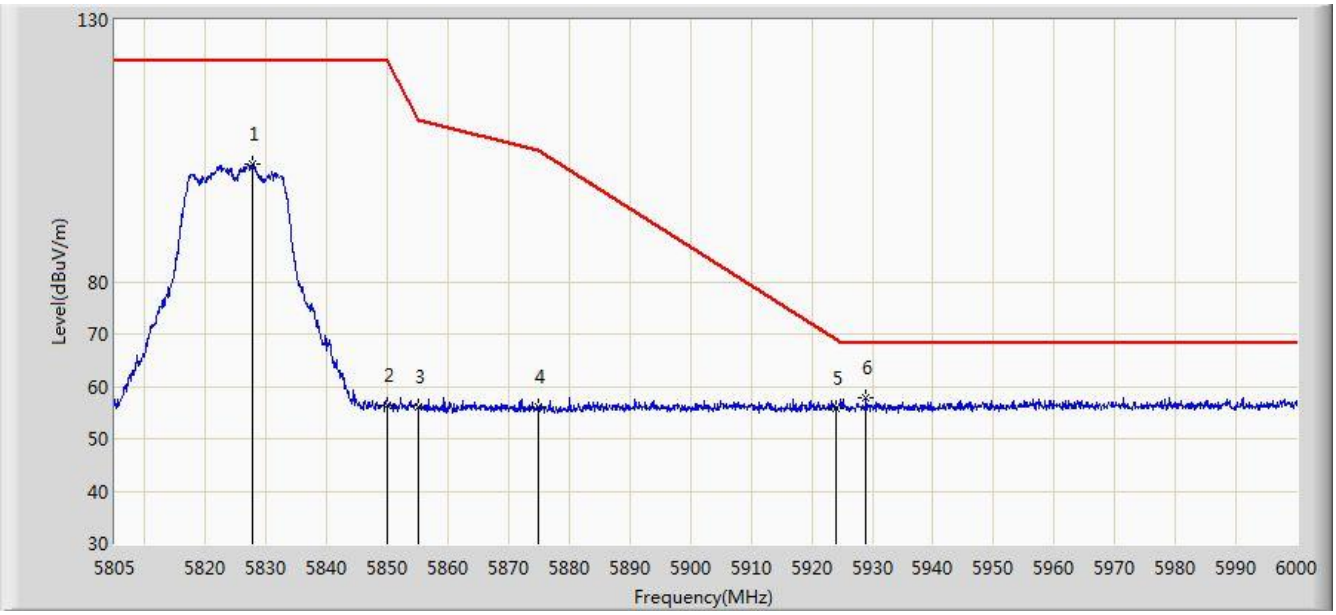


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5825.962 | 98.797 | 94.045 | N/A | N/A | 4.752 | PK |
| 2 | | | 5850.000 | 56.345 | 51.350 | -65.855 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 55.459 | 50.471 | -55.341 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 55.561 | 50.554 | -49.639 | 105.200 | 5.008 | PK |
| 5 | | | 5925.000 | 55.807 | 50.655 | -12.393 | 68.200 | 5.152 | PK |
| 6 | | * | 5970.750 | 57.806 | 52.583 | -10.394 | 68.200 | 5.222 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:08 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 | |

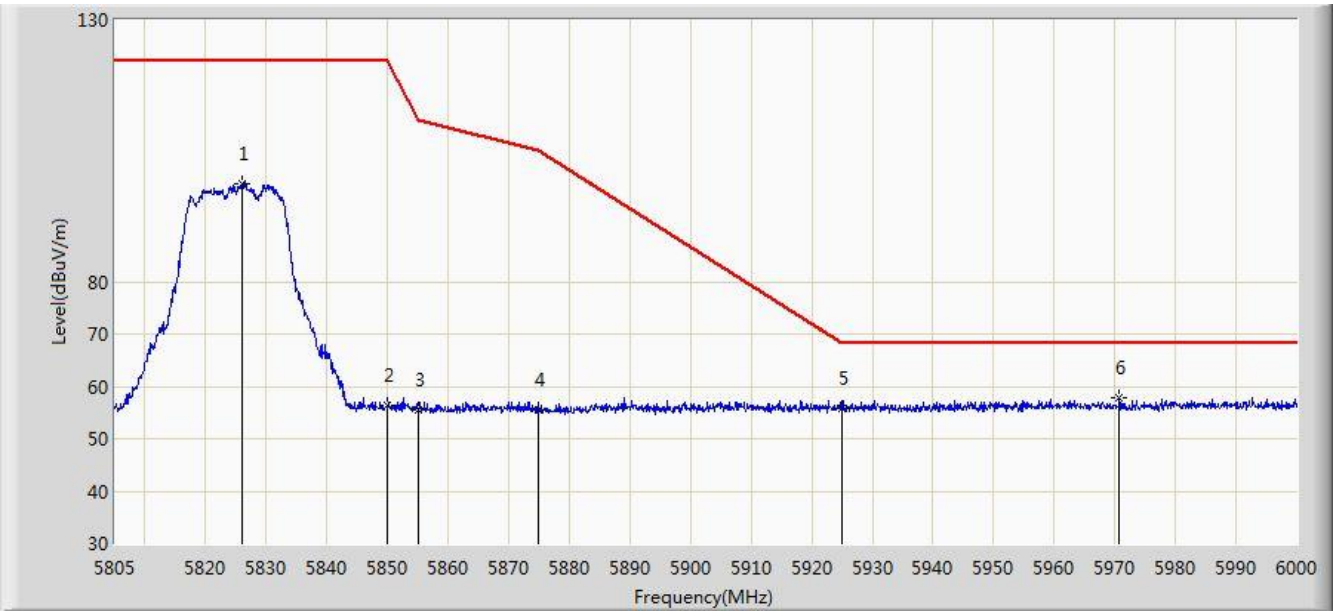


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5128.675 | 57.551 | 54.392 | -16.449 | 74.000 | 3.159 | PK |
| 2 | | | 5150.000 | 56.041 | 52.971 | -17.959 | 74.000 | 3.069 | PK |
| 3 | | * | 5183.800 | 103.447 | 100.419 | N/A | N/A | 3.028 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:10 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 | |

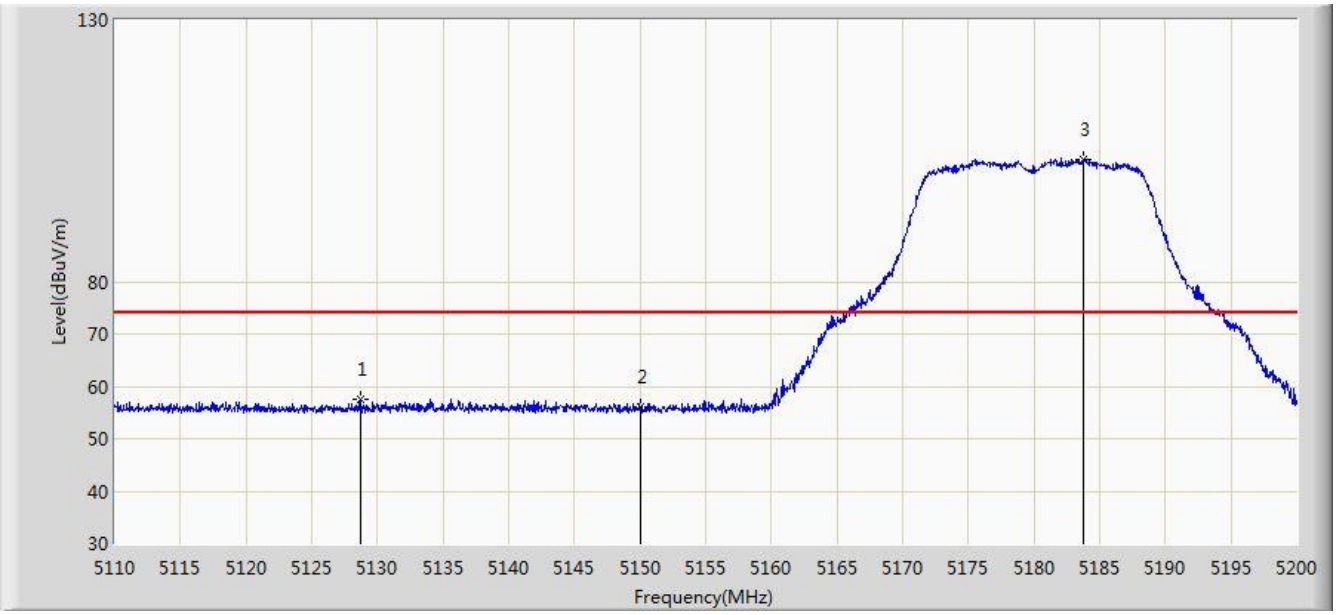


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.231 | 40.161 | -10.769 | 54.000 | 3.069 | AV |
| 2 | | * | 5182.720 | 92.122 | 89.080 | N/A | N/A | 3.043 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:12 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 | |

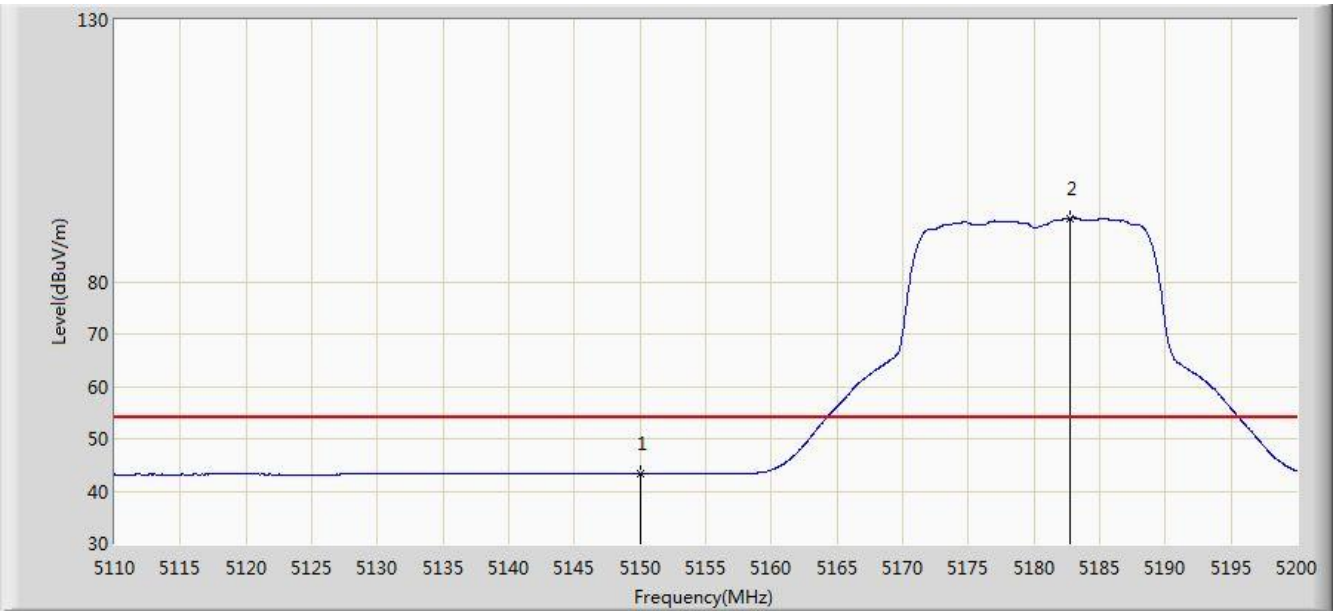


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5141.725 | 57.577 | 54.487 | -16.423 | 74.000 | 3.090 | PK |
| 2 | | | 5150.000 | 55.304 | 52.234 | -18.696 | 74.000 | 3.069 | PK |
| 3 | | * | 5183.665 | 98.548 | 95.518 | N/A | N/A | 3.029 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 | |

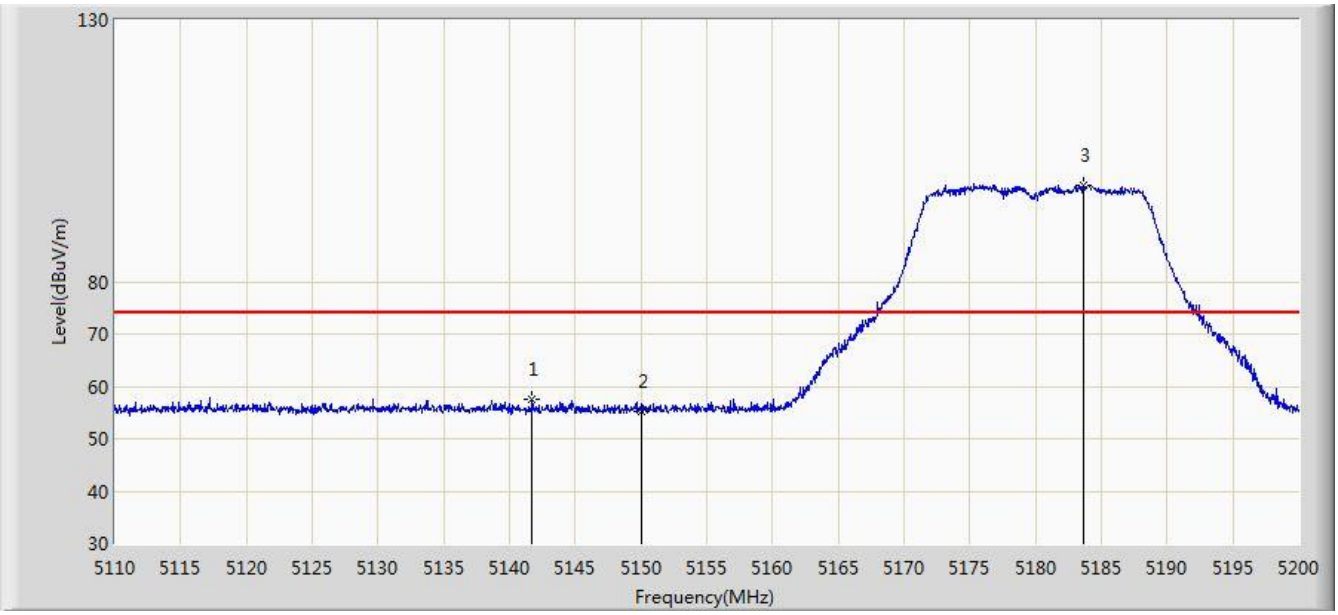


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 42.851 | 39.781 | -11.149 | 54.000 | 3.069 | AV |
| 2 | | * | 5177.140 | 87.431 | 84.399 | N/A | N/A | 3.032 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:16 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 | |

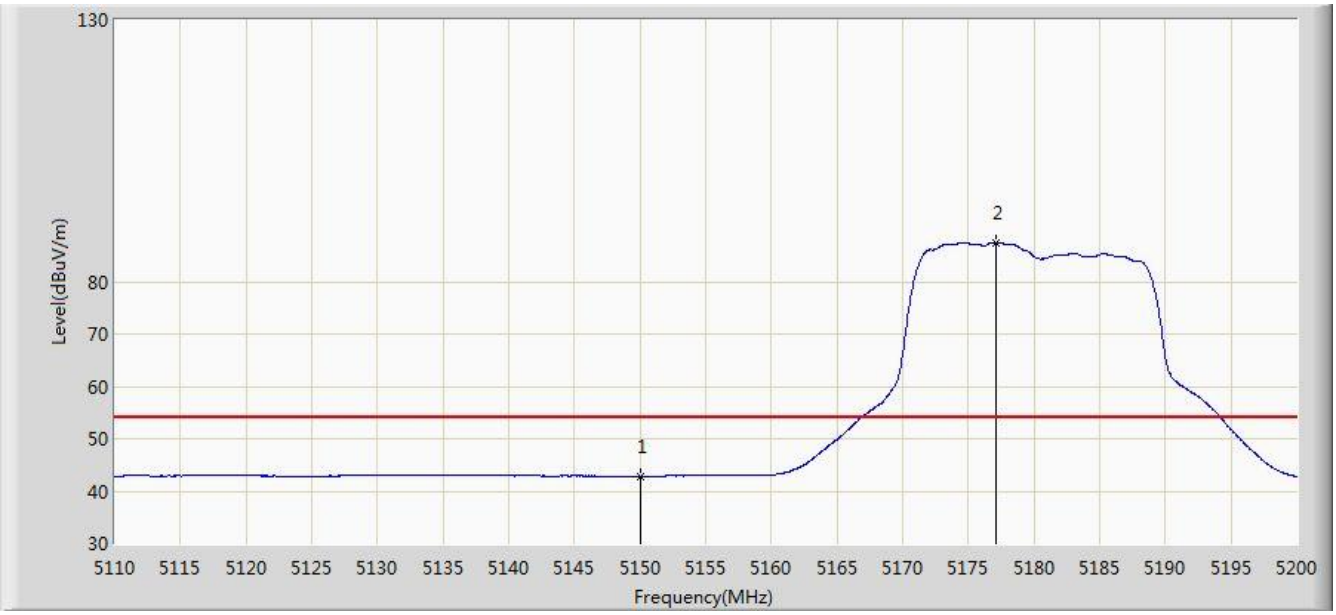


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.400 | 104.795 | 102.127 | N/A | N/A | 2.668 | PK |
| 2 | | | 5350.000 | 54.944 | 52.247 | -19.056 | 74.000 | 2.697 | PK |
| 3 | | | 5376.120 | 57.192 | 54.199 | -16.808 | 74.000 | 2.992 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:18 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 | |

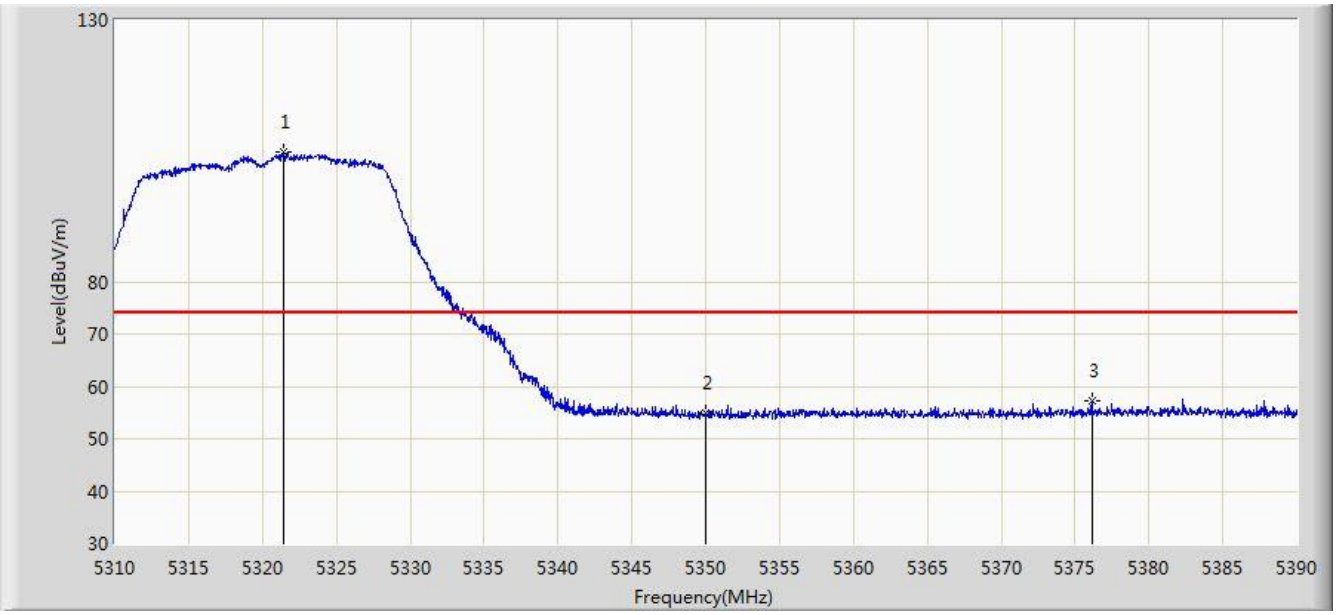


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5322.880 | 91.119 | 88.444 | N/A | N/A | 2.675 | AV |
| 2 | | | 5350.000 | 41.940 | 39.243 | -12.060 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:19 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 | |

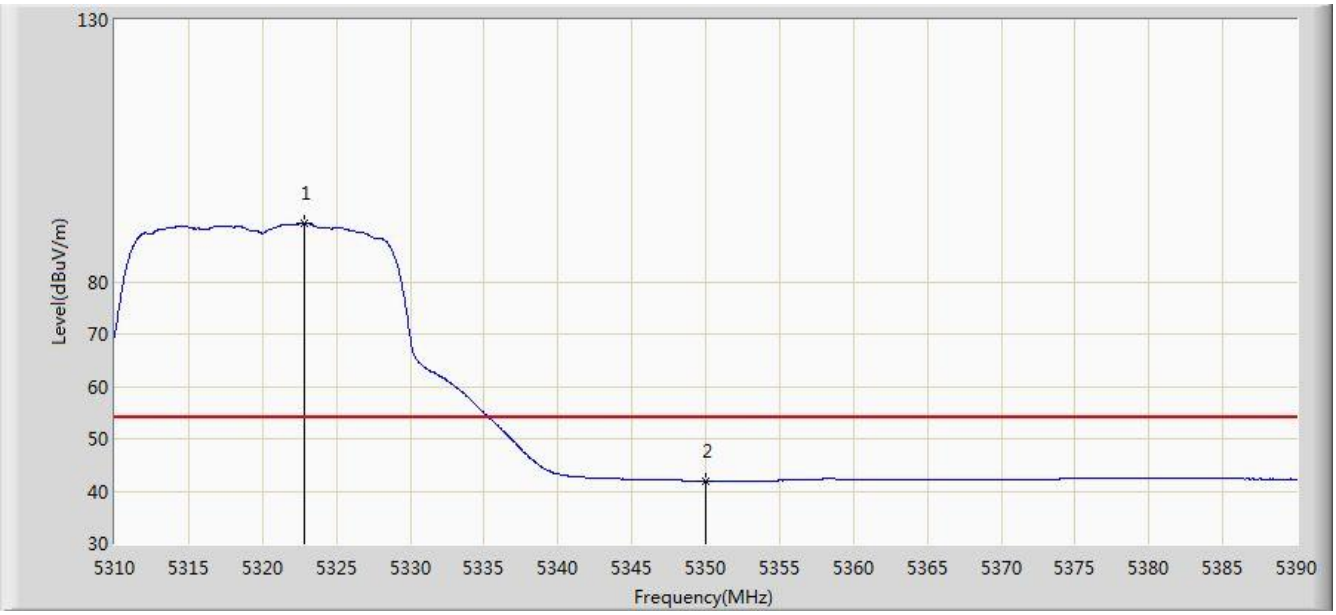


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.440 | 98.323 | 95.655 | N/A | N/A | 2.668 | PK |
| 2 | | | 5350.000 | 54.327 | 51.630 | -19.673 | 74.000 | 2.697 | PK |
| 3 | | | 5362.280 | 56.556 | 53.830 | -17.444 | 74.000 | 2.726 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 | |

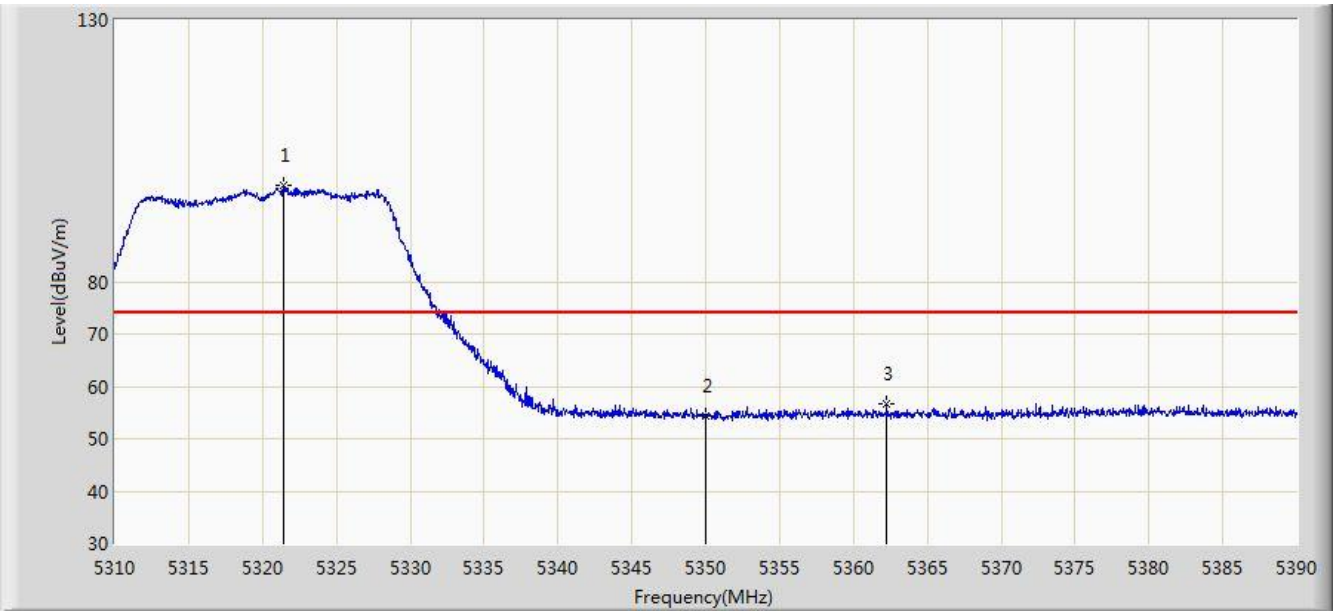


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5322.640 | 86.494 | 83.820 | N/A | N/A | 2.674 | AV |
| 2 | | | 5350.000 | 41.880 | 39.183 | -12.120 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:24 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 | |

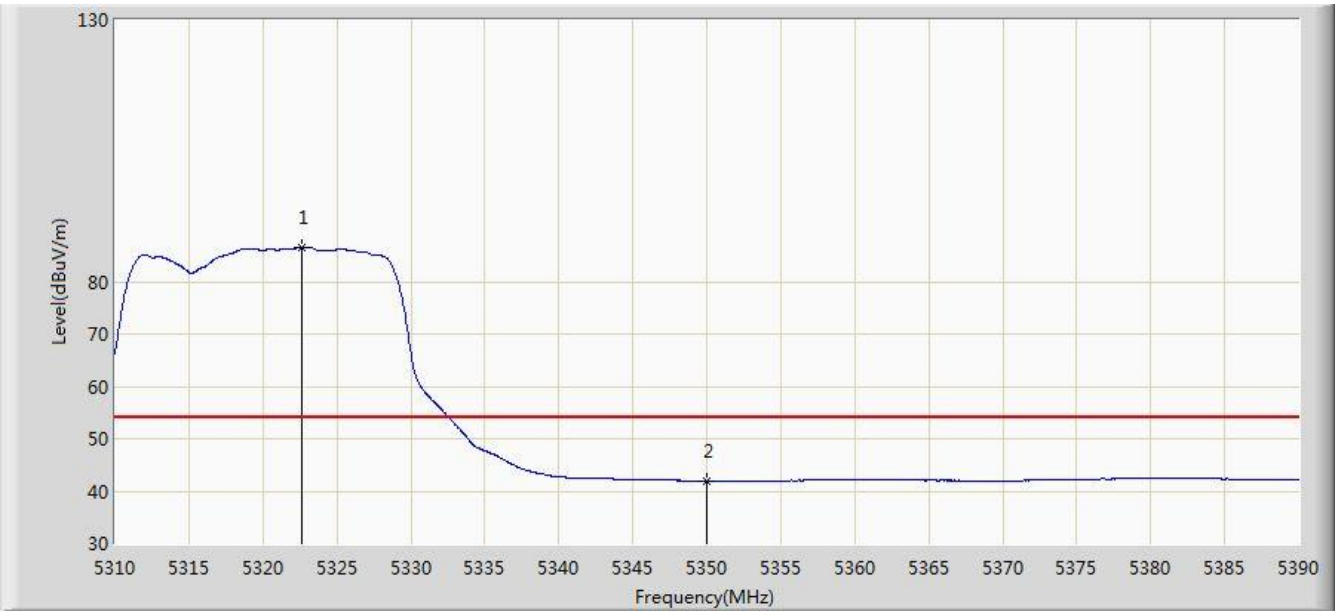


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5455.830 | 57.028 | 53.975 | -16.972 | 74.000 | 3.053 | PK |
| 2 | | | 5460.000 | 55.754 | 52.561 | -18.246 | 74.000 | 3.194 | PK |
| 3 | | | 5461.050 | 59.176 | 55.947 | -14.824 | 74.000 | 3.229 | PK |
| 4 | | | 5470.000 | 55.632 | 52.103 | -18.368 | 74.000 | 3.529 | PK |
| 5 | | * | 5498.940 | 105.934 | 102.810 | N/A | N/A | 3.124 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:25 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 | |

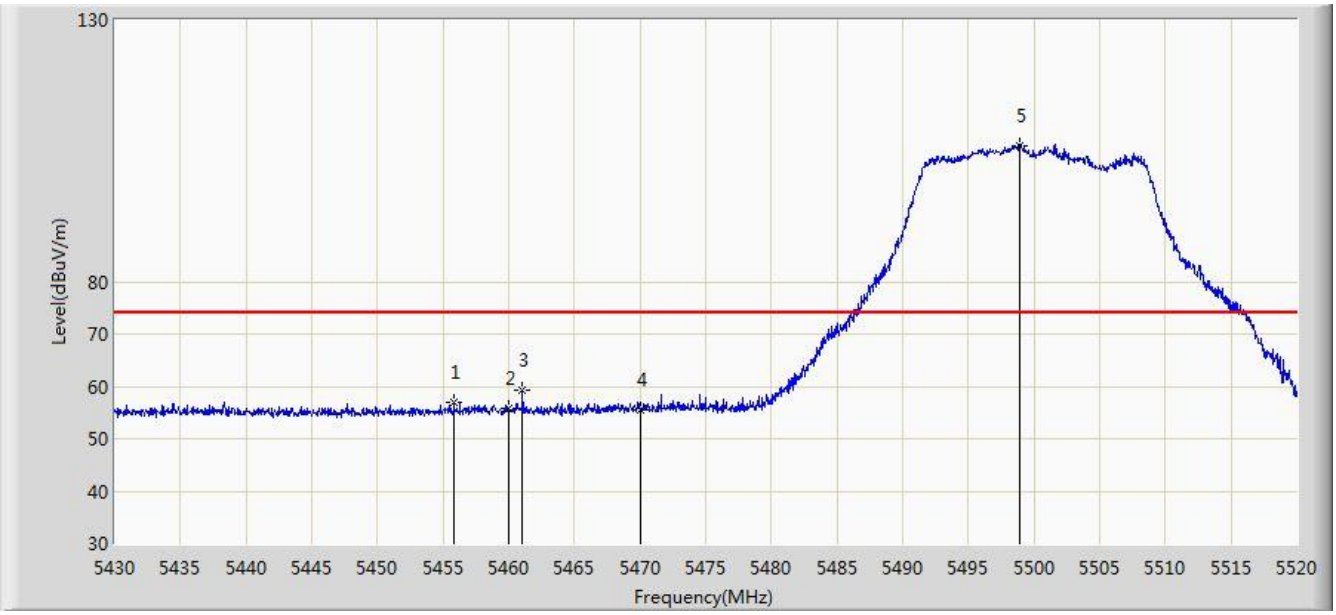


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.081 | 39.888 | -10.919 | 54.000 | 3.194 | AV |
| 2 | | * | 5497.275 | 92.453 | 89.313 | N/A | N/A | 3.140 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:26 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 | |

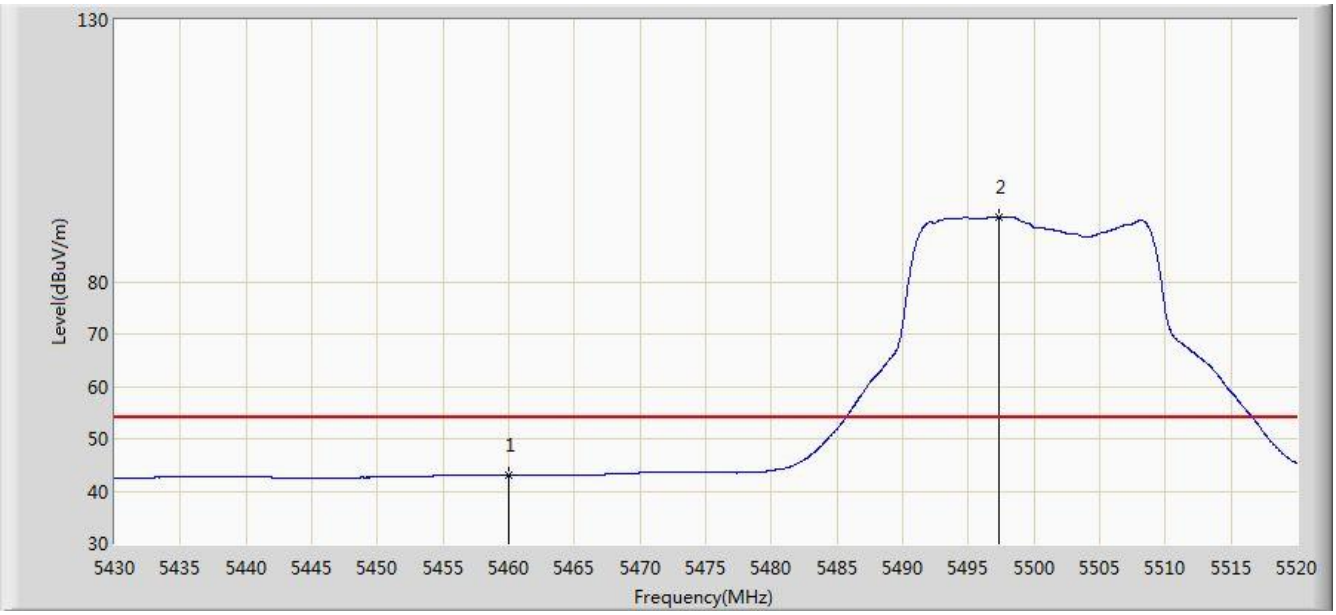


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5456.460 | 57.259 | 54.185 | -16.741 | 74.000 | 3.074 | PK |
| 2 | | | 5460.000 | 55.203 | 52.010 | -18.797 | 74.000 | 3.194 | PK |
| 3 | | | 5461.095 | 56.673 | 53.443 | -17.327 | 74.000 | 3.230 | PK |
| 4 | | | 5470.000 | 55.669 | 52.140 | -18.331 | 74.000 | 3.529 | PK |
| 5 | | * | 5501.730 | 99.205 | 96.108 | N/A | N/A | 3.097 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:28 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 | |

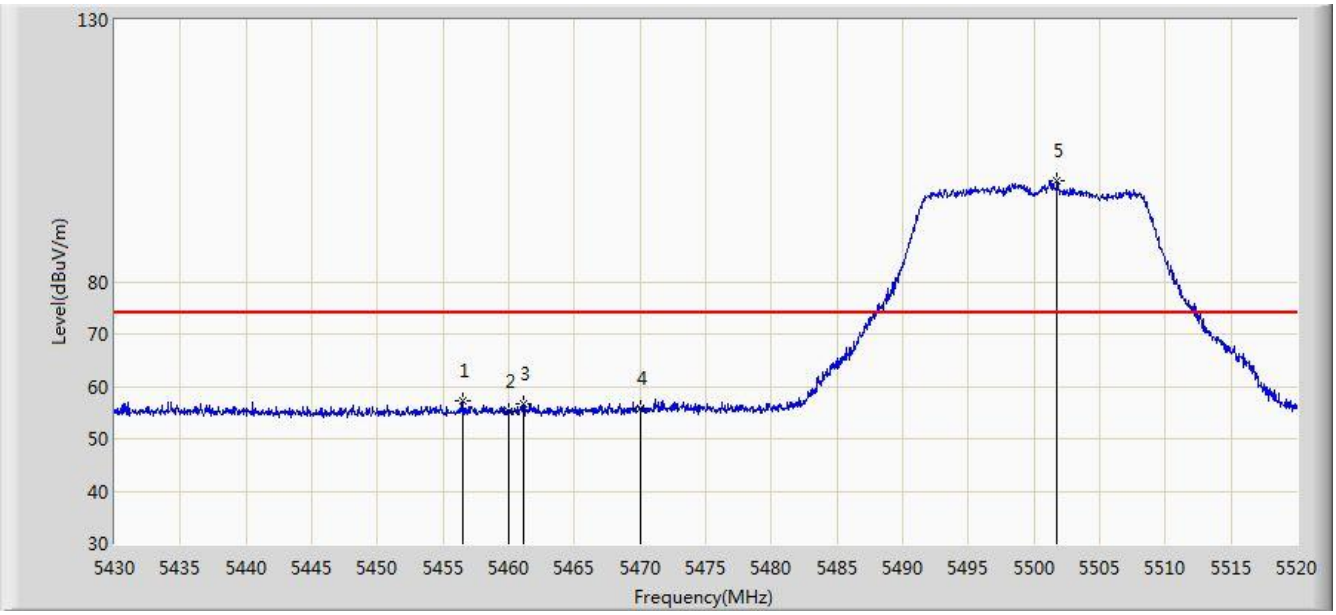


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 42.696 | 39.503 | -11.304 | 54.000 | 3.194 | AV |
| 2 | | * | 5498.535 | 86.654 | 83.526 | N/A | N/A | 3.127 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:29 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 | |

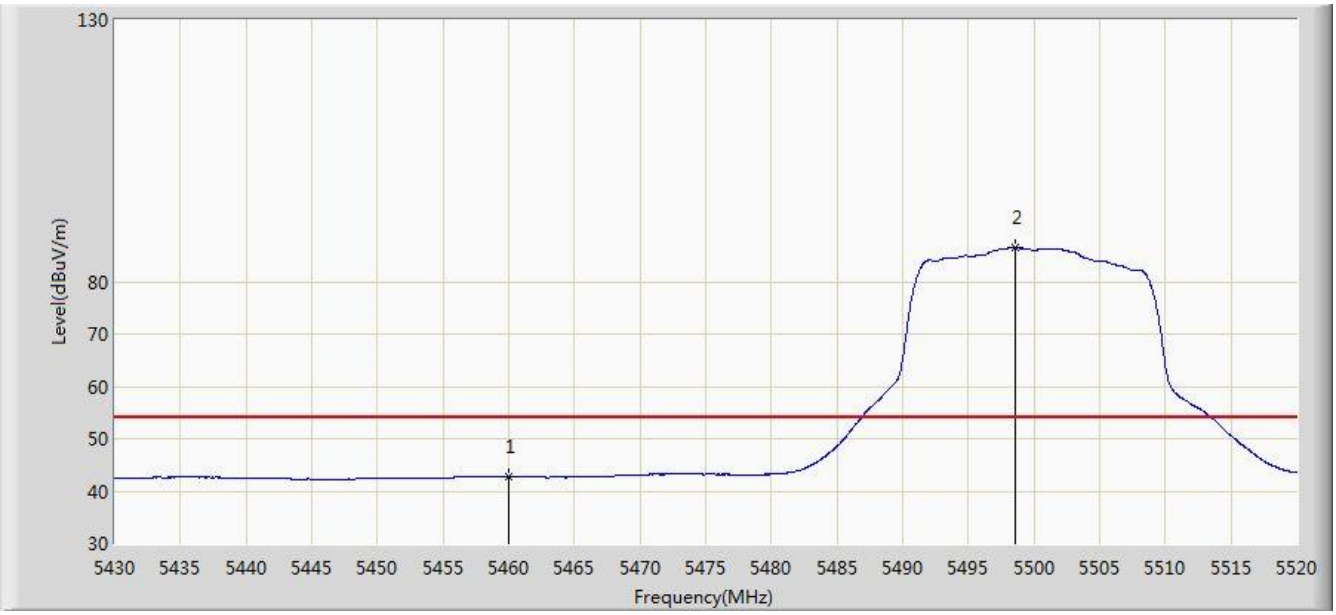


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5701.607 | 105.661 | 101.739 | N/A | N/A | 3.922 | PK |
| 2 | | | 5725.000 | 55.453 | 51.347 | -18.547 | 74.000 | 4.105 | PK |
| 3 | | | 5726.145 | 57.887 | 53.753 | -16.113 | 74.000 | 4.133 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:31 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 | |

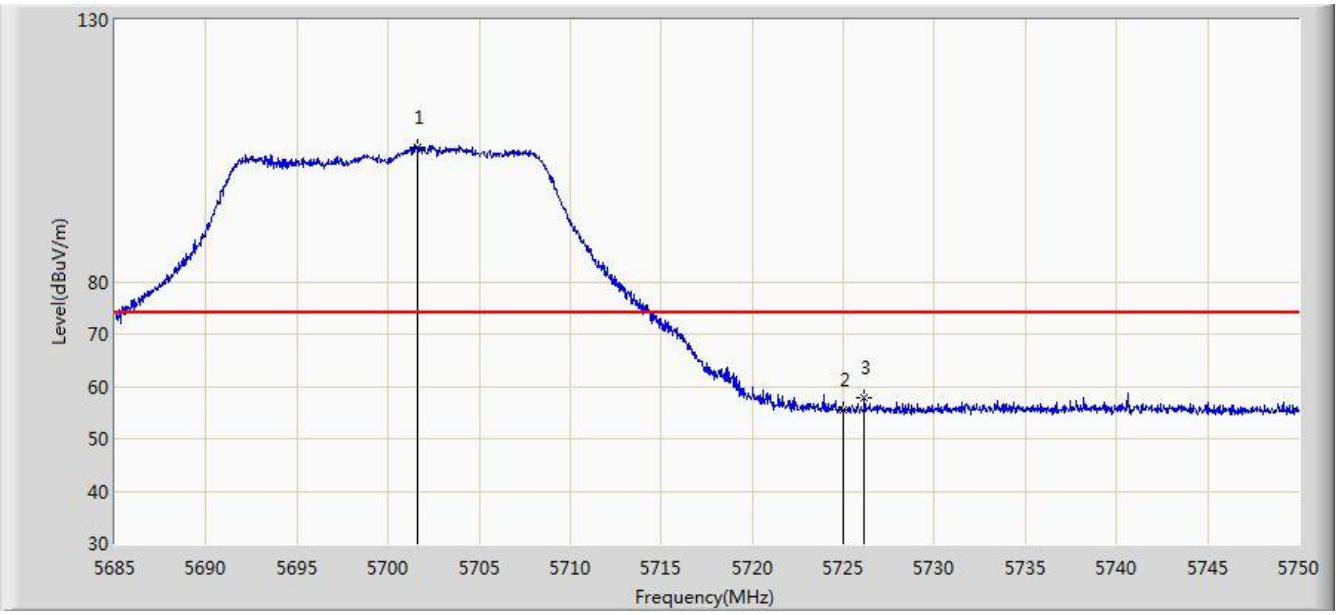


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5702.842 | 92.959 | 89.050 | N/A | N/A | 3.909 | AV |
| 2 | | | 5725.000 | 43.276 | 39.170 | -10.724 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:32 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 | |

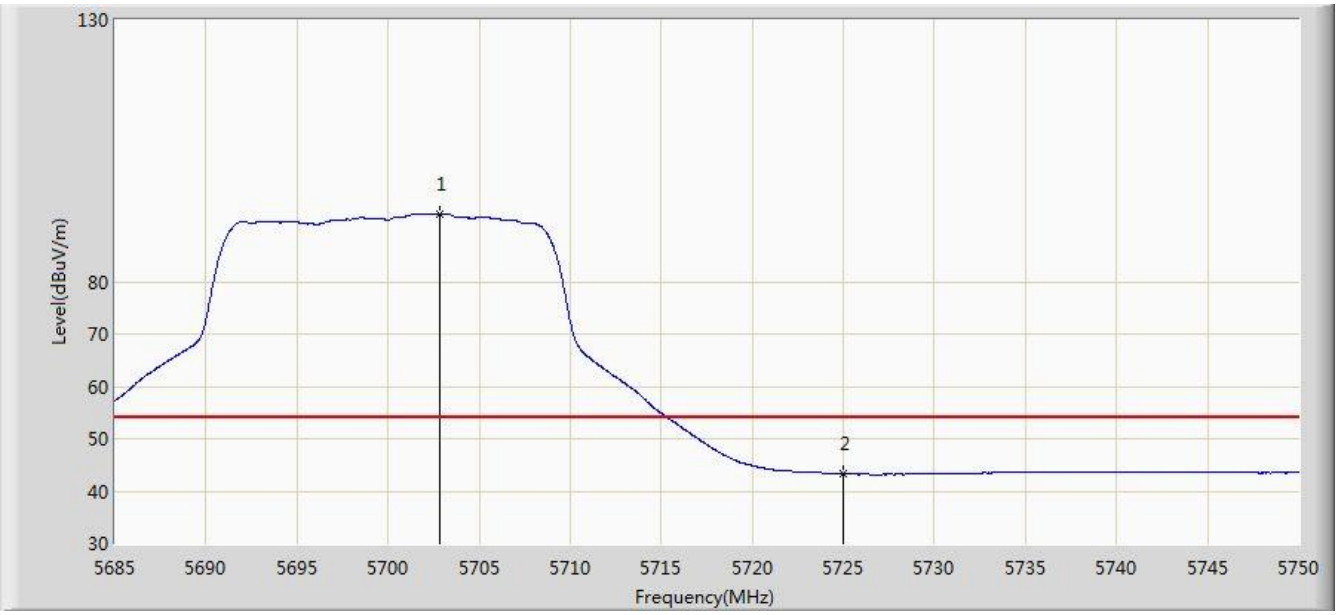


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5701.380 | 101.387 | 97.462 | N/A | N/A | 3.925 | PK |
| 2 | | | 5725.000 | 55.343 | 51.237 | -18.657 | 74.000 | 4.105 | PK |
| 3 | | | 5735.180 | 57.565 | 53.276 | -16.435 | 74.000 | 4.288 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:34 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 | |

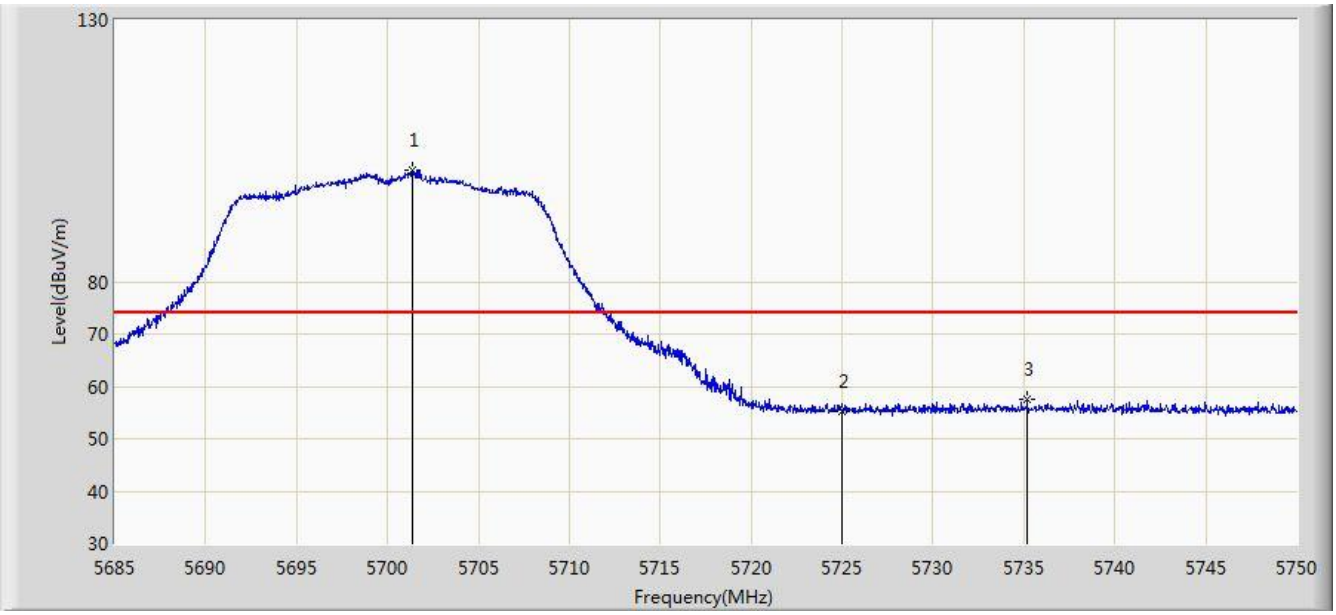


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5701.250 | 88.774 | 84.848 | N/A | N/A | 3.927 | AV |
| 2 | | | 5725.000 | 42.834 | 38.728 | -11.166 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:35 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 | |

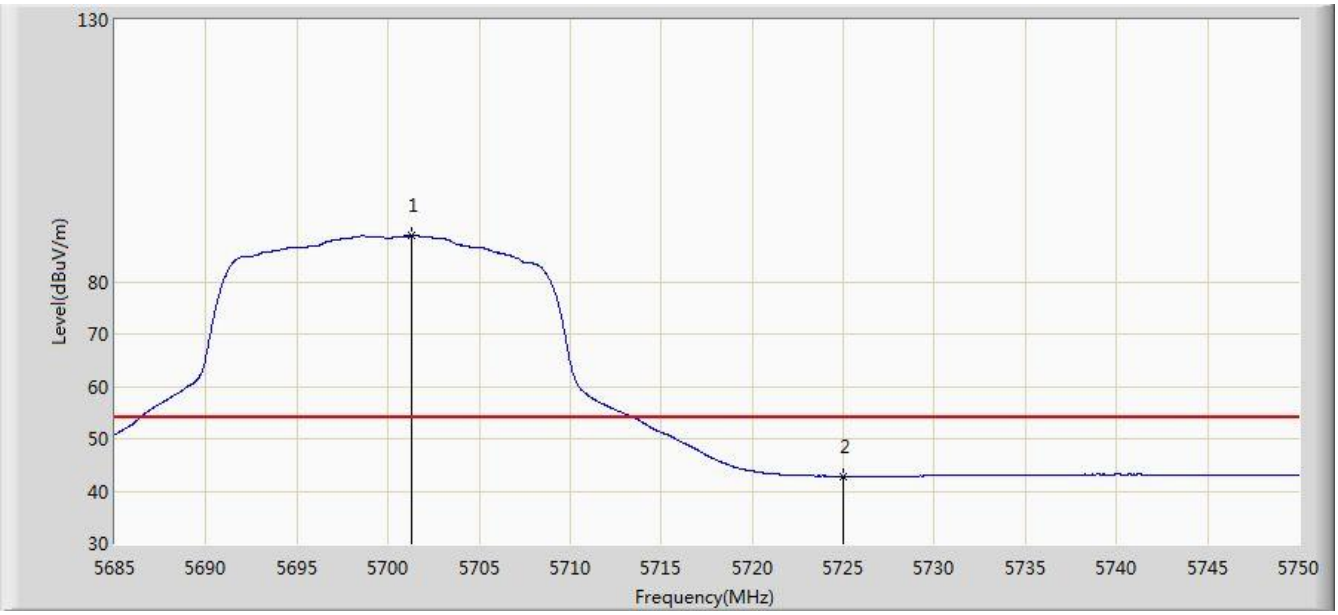


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5635.062 | 57.909 | 54.188 | -10.291 | 68.200 | 3.721 | PK |
| 2 | | | 5650.000 | 55.247 | 51.444 | -12.953 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 56.535 | 52.595 | -48.665 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 56.525 | 52.543 | -54.275 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 56.646 | 52.540 | -65.554 | 122.200 | 4.105 | PK |
| 6 | | | 5747.510 | 102.709 | 98.441 | N/A | N/A | 4.268 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:37 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 | |

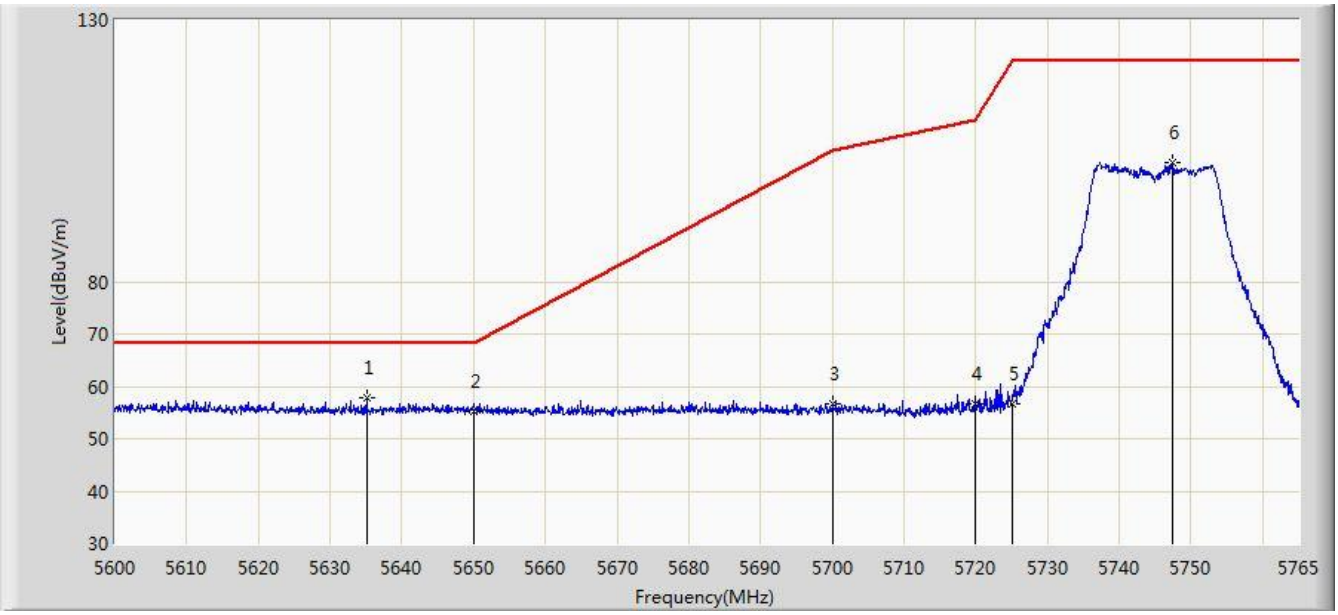


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5624.998 | 57.756 | 54.186 | -10.444 | 68.200 | 3.570 | PK |
| 2 | | | 5650.000 | 55.241 | 51.438 | -12.959 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.496 | 51.556 | -49.704 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 56.091 | 52.109 | -54.709 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 56.660 | 52.554 | -65.540 | 122.200 | 4.105 | PK |
| 6 | | | 5746.437 | 99.919 | 95.651 | N/A | N/A | 4.268 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:38 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 | |

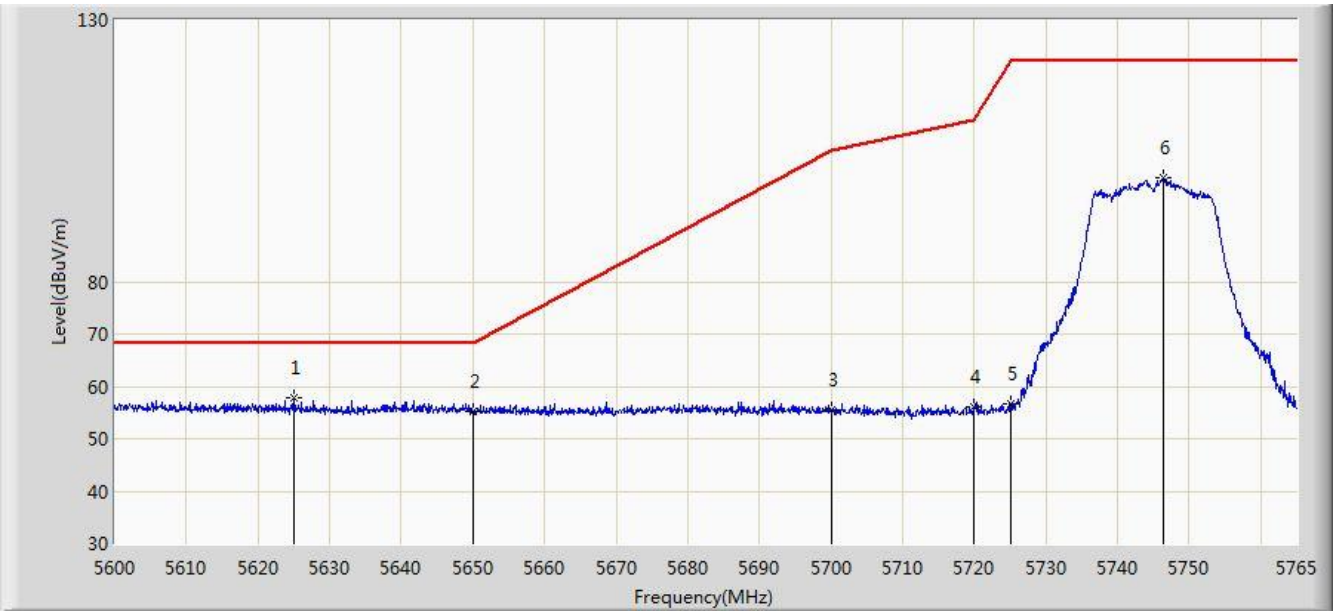


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5826.450 | 101.518 | 96.758 | N/A | N/A | 4.760 | PK |
| 2 | | | 5850.000 | 55.836 | 50.841 | -66.364 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 55.678 | 50.690 | -55.122 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 55.705 | 50.698 | -49.495 | 105.200 | 5.008 | PK |
| 5 | | | 5925.000 | 56.233 | 51.081 | -11.967 | 68.200 | 5.152 | PK |
| 6 | | * | 5928.825 | 57.865 | 52.679 | -10.335 | 68.200 | 5.186 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:41 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 | |

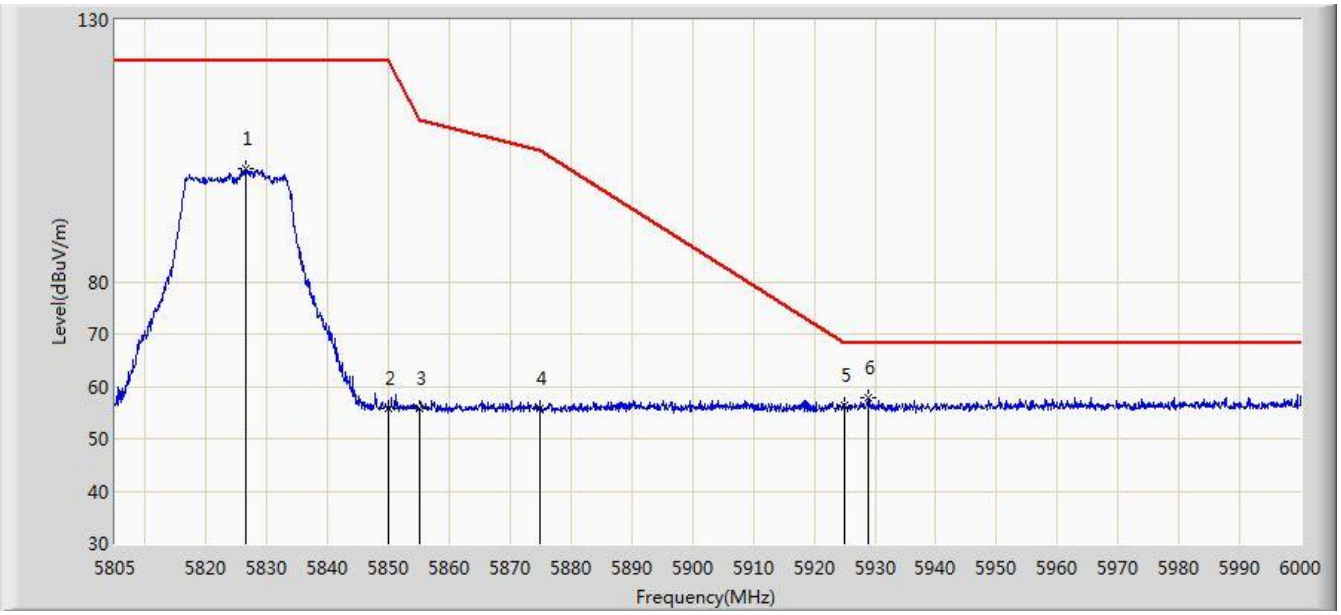


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5826.255 | 99.463 | 94.706 | N/A | N/A | 4.757 | PK |
| 2 | | | 5850.000 | 56.125 | 51.130 | -66.075 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 55.911 | 50.923 | -54.889 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 55.285 | 50.278 | -49.915 | 105.200 | 5.008 | PK |
| 5 | | | 5925.000 | 55.703 | 50.551 | -12.497 | 68.200 | 5.152 | PK |
| 6 | | * | 5930.775 | 57.372 | 52.178 | -10.828 | 68.200 | 5.195 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:42 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 | |

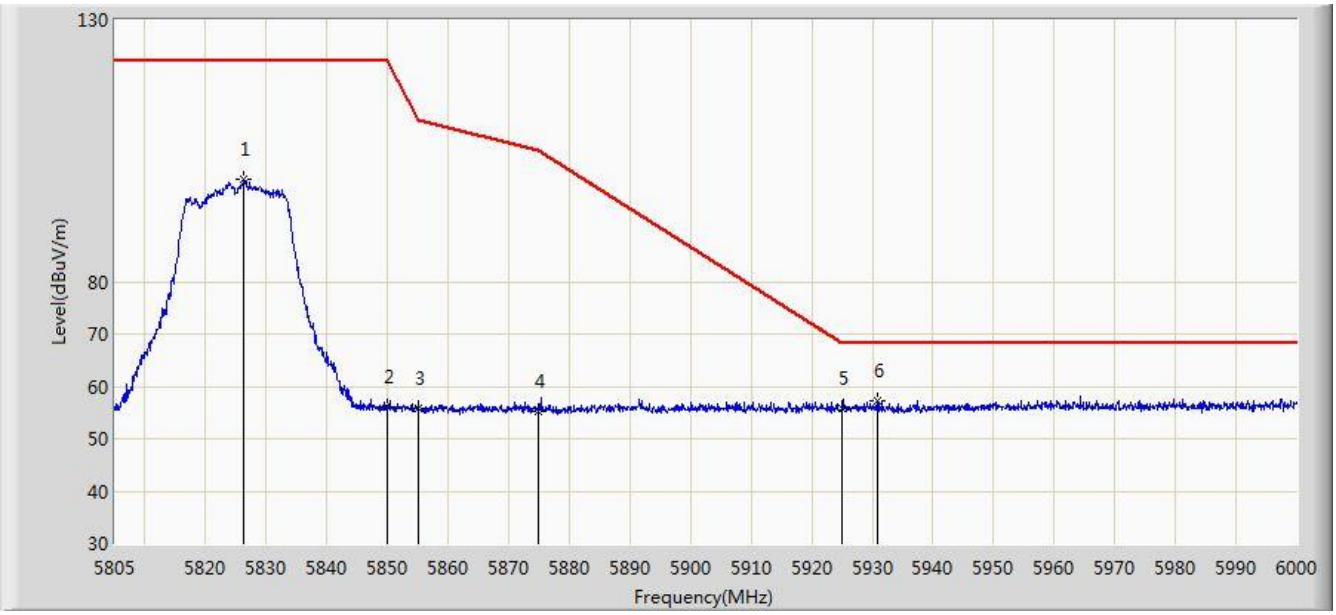


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5146.350 | 57.774 | 54.696 | -16.226 | 74.000 | 3.078 | PK |
| 2 | | | 5150.000 | 56.002 | 52.932 | -17.998 | 74.000 | 3.069 | PK |
| 3 | | * | 5192.950 | 102.995 | 100.088 | N/A | N/A | 2.907 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:44 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 | |

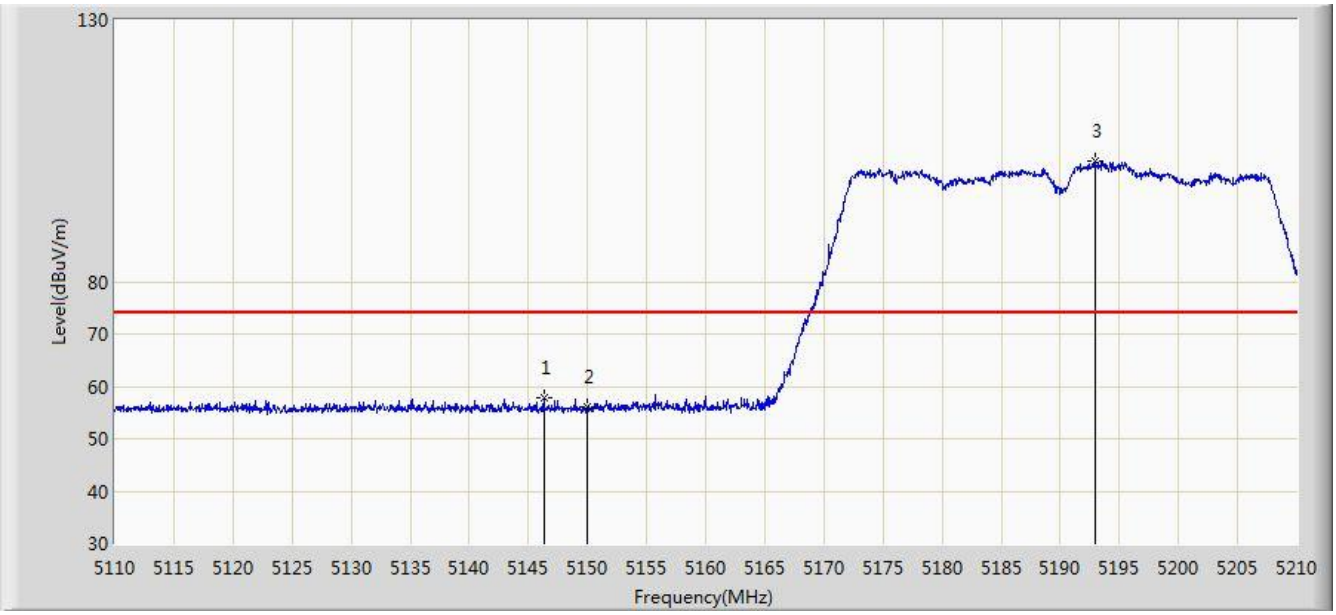


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.888 | 40.818 | -10.112 | 54.000 | 3.069 | AV |
| 2 | | * | 5194.250 | 92.683 | 89.795 | N/A | N/A | 2.888 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:48 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 | |

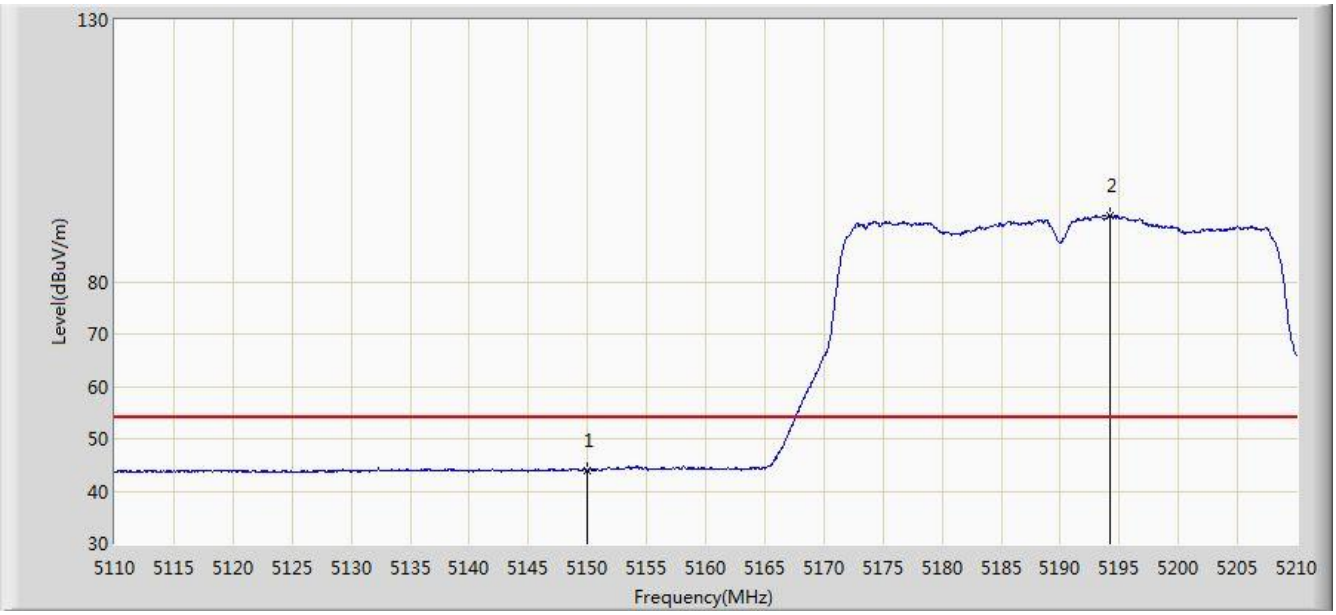


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5135.250 | 57.804 | 54.684 | -16.196 | 74.000 | 3.120 | PK |
| 2 | | | 5150.000 | 54.943 | 51.873 | -19.057 | 74.000 | 3.069 | PK |
| 3 | | * | 5195.350 | 97.244 | 94.372 | N/A | N/A | 2.871 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:49 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 | |

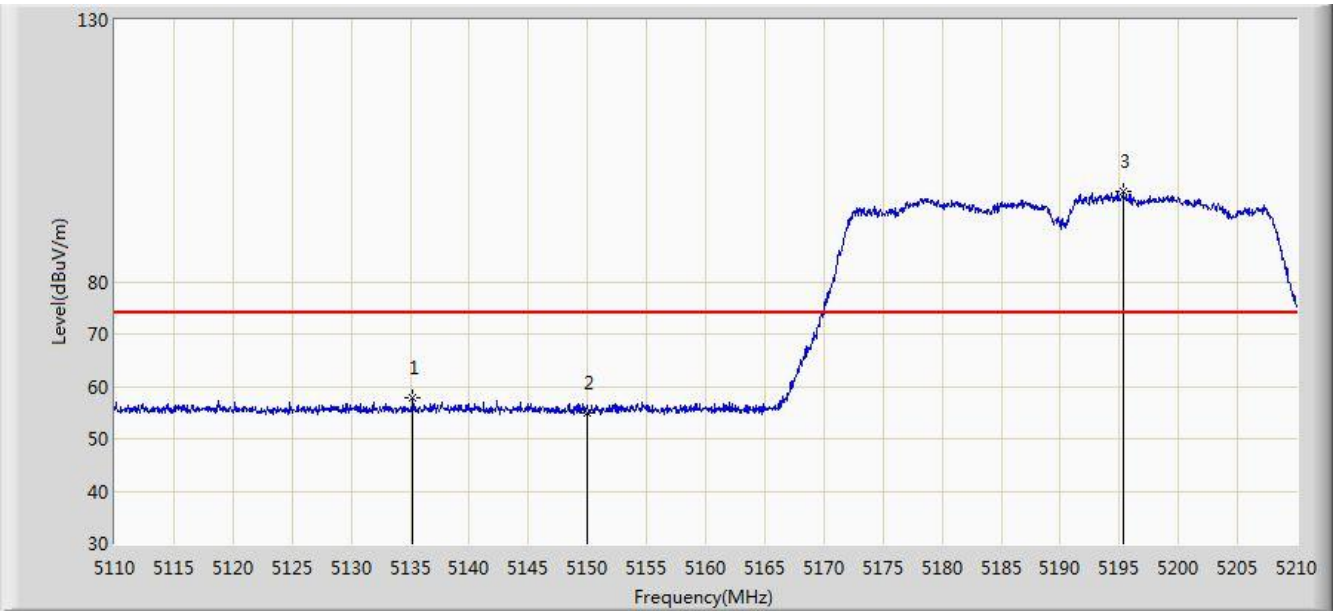


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.379 | 40.309 | -10.621 | 54.000 | 3.069 | AV |
| 2 | | * | 5194.800 | 87.111 | 84.231 | N/A | N/A | 2.880 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:51 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 | |

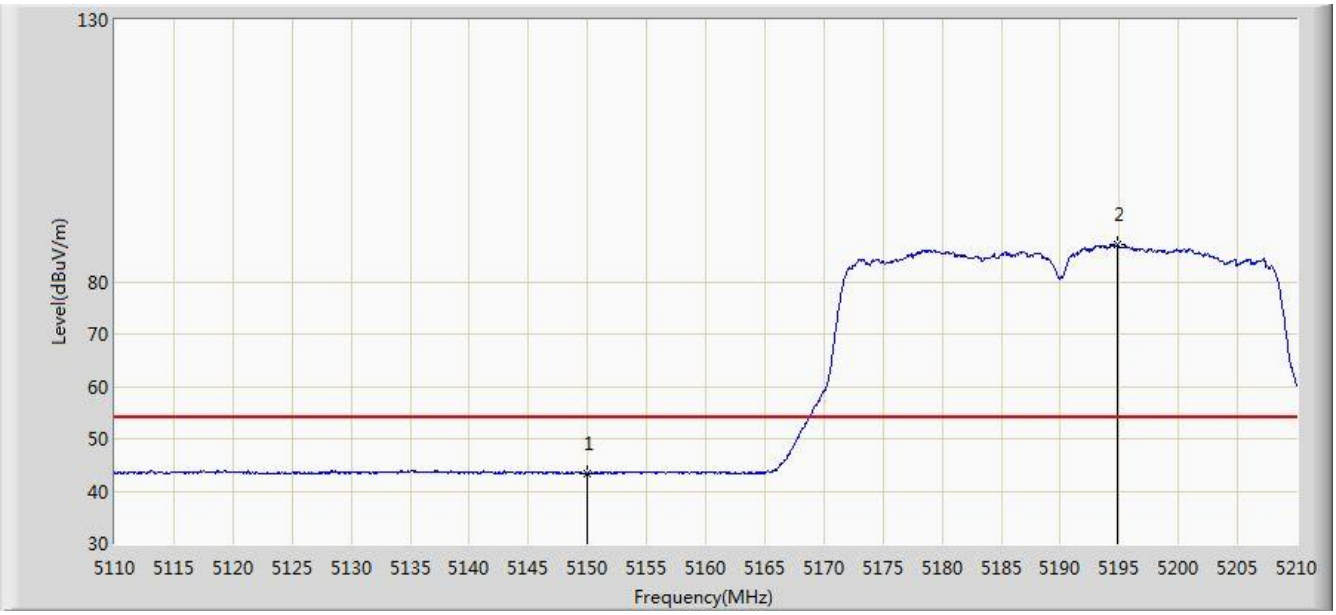


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5311.550 | 101.037 | 98.432 | N/A | N/A | 2.605 | PK |
| 2 | | | 5350.000 | 54.829 | 52.132 | -19.171 | 74.000 | 2.697 | PK |
| 3 | | | 5362.750 | 56.259 | 53.532 | -17.741 | 74.000 | 2.727 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:53 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 | |

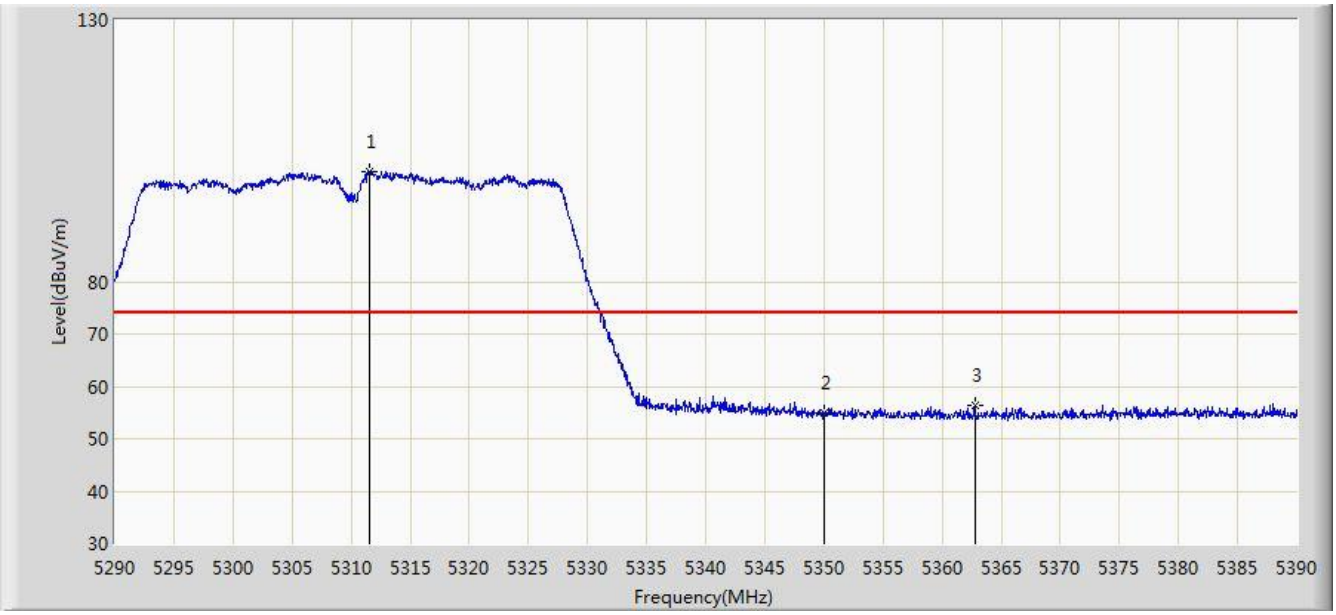


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5306.100 | 90.757 | 88.145 | N/A | N/A | 2.612 | AV |
| 2 | | | 5350.000 | 43.641 | 40.944 | -10.359 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:54 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 | |

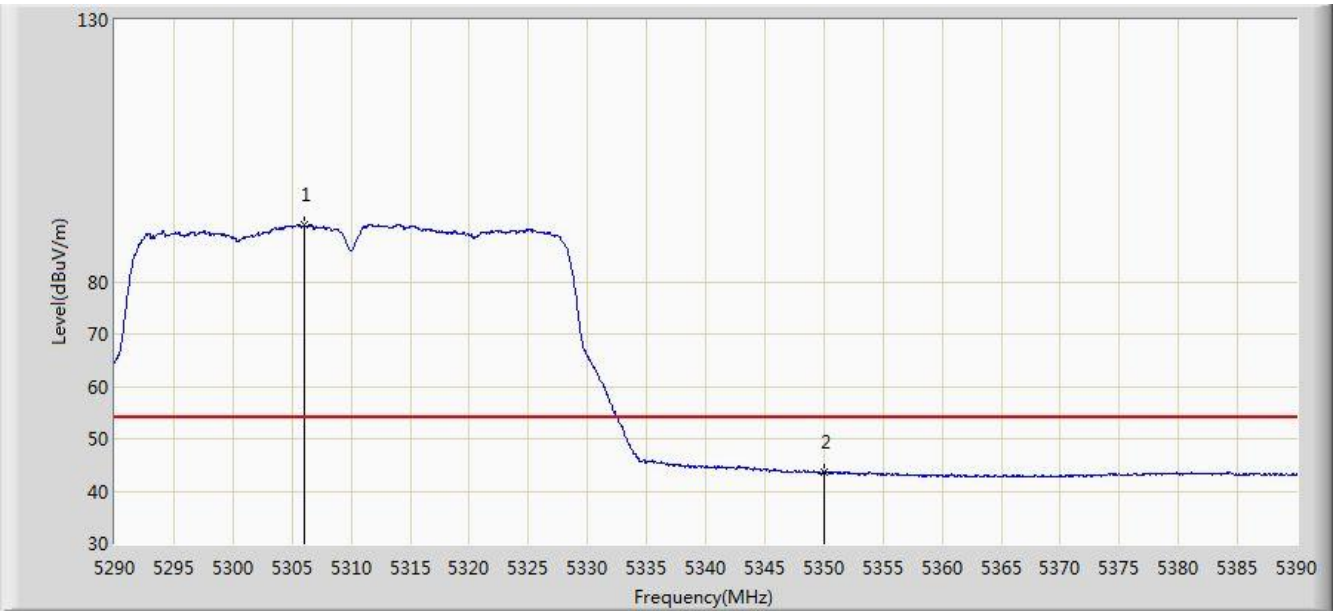


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5313.250 | 96.616 | 94.006 | N/A | N/A | 2.610 | PK |
| 2 | | | 5350.000 | 54.081 | 51.384 | -19.919 | 74.000 | 2.697 | PK |
| 3 | | | 5355.450 | 56.003 | 53.291 | -17.997 | 74.000 | 2.712 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:56 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 | |

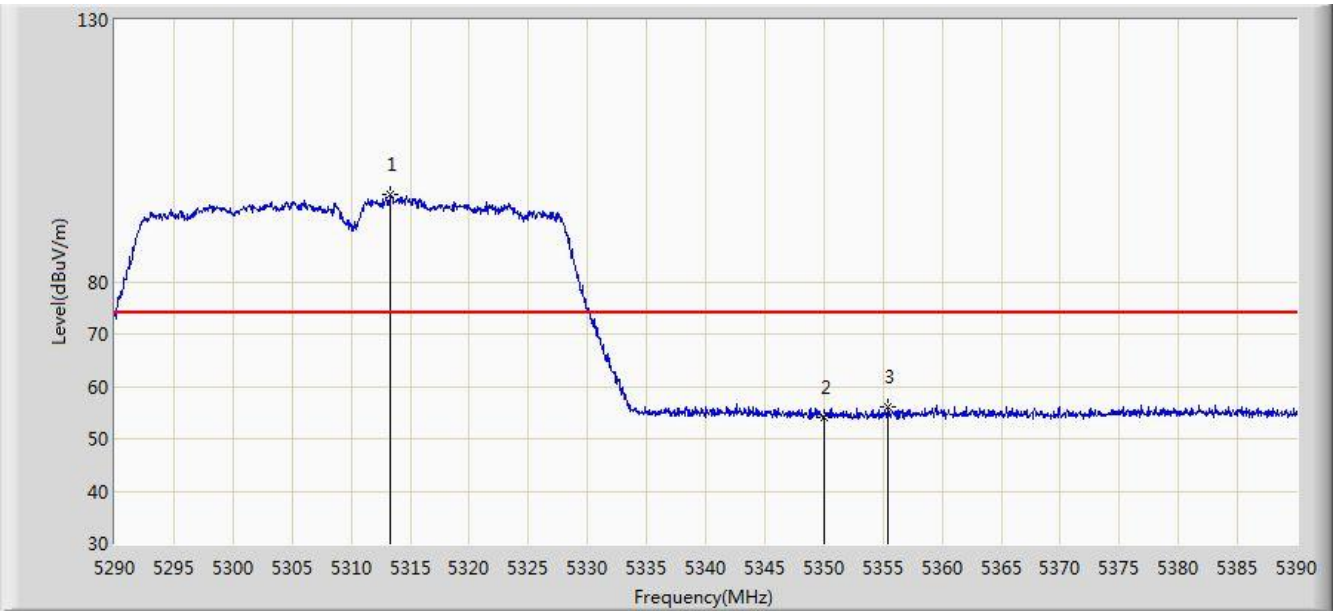


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5314.200 | 86.378 | 83.760 | N/A | N/A | 2.618 | AV |
| 2 | | | 5350.000 | 42.425 | 39.728 | -11.575 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:58 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 | |

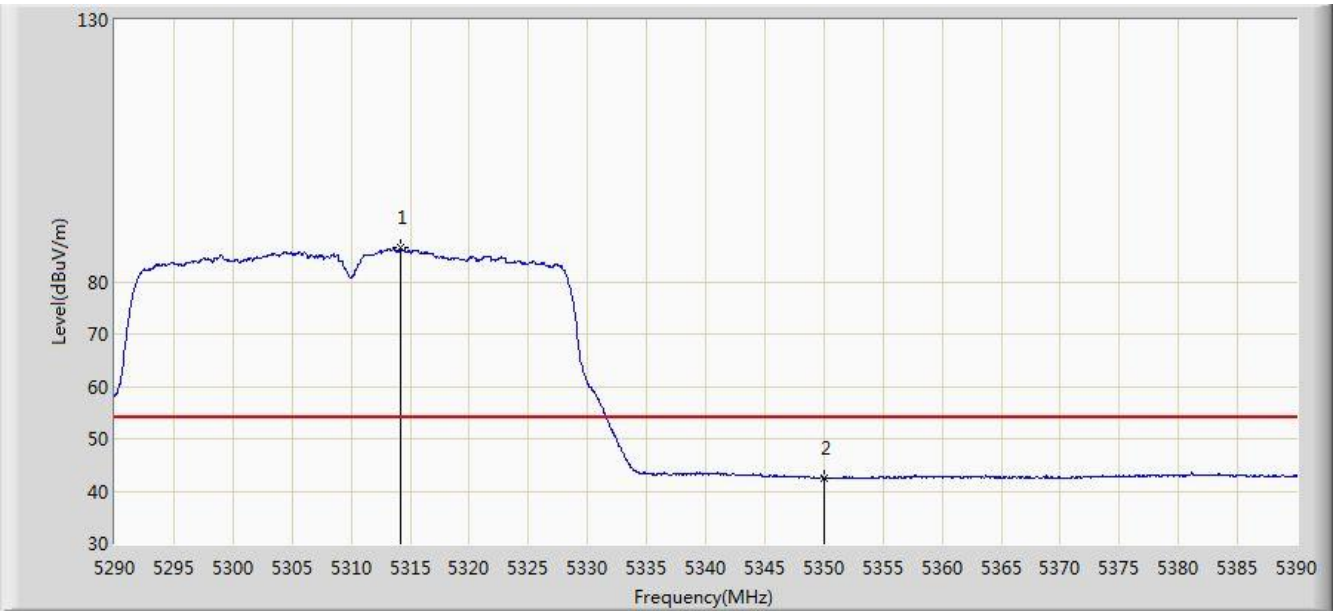


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5455.100 | 57.394 | 54.365 | -16.606 | 74.000 | 3.029 | PK |
| 2 | | | 5460.000 | 55.152 | 51.959 | -18.848 | 74.000 | 3.194 | PK |
| 3 | | | 5468.750 | 57.856 | 54.369 | -16.144 | 74.000 | 3.487 | PK |
| 4 | | | 5470.000 | 56.018 | 52.489 | -17.982 | 74.000 | 3.529 | PK |
| 5 | | * | 5505.900 | 104.828 | 101.740 | N/A | N/A | 3.088 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 15:59 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 | |

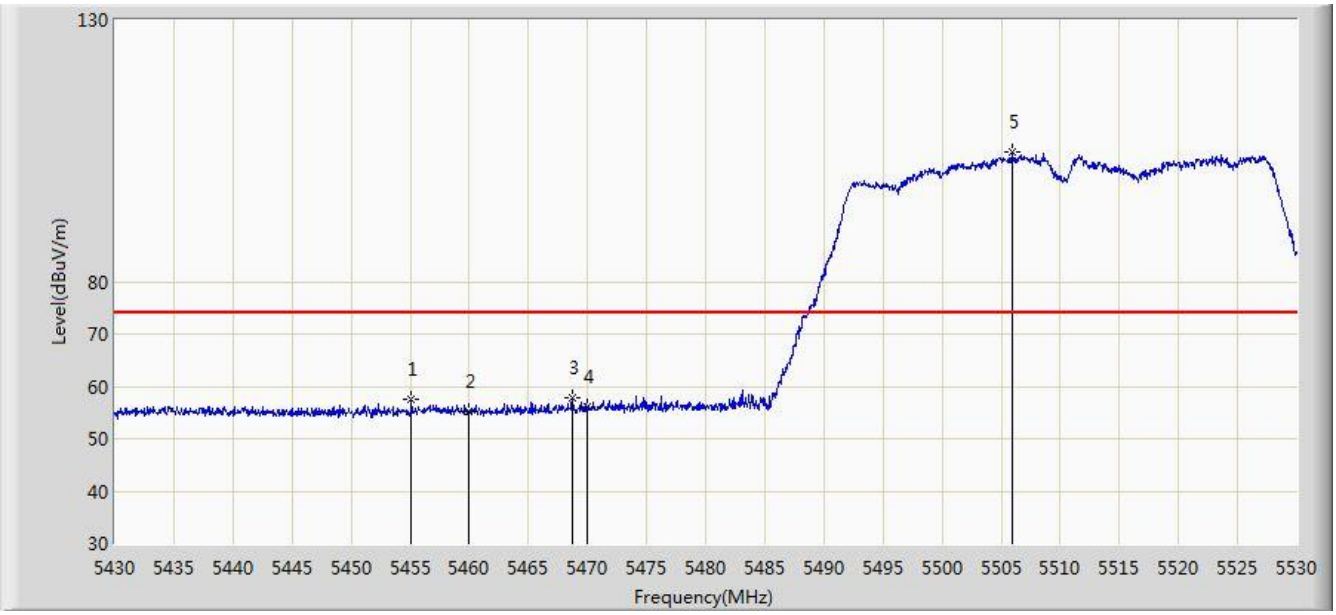


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 44.044 | 40.851 | -9.956 | 54.000 | 3.194 | AV |
| 2 | | * | 5506.450 | 94.165 | 91.064 | N/A | N/A | 3.101 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 | |

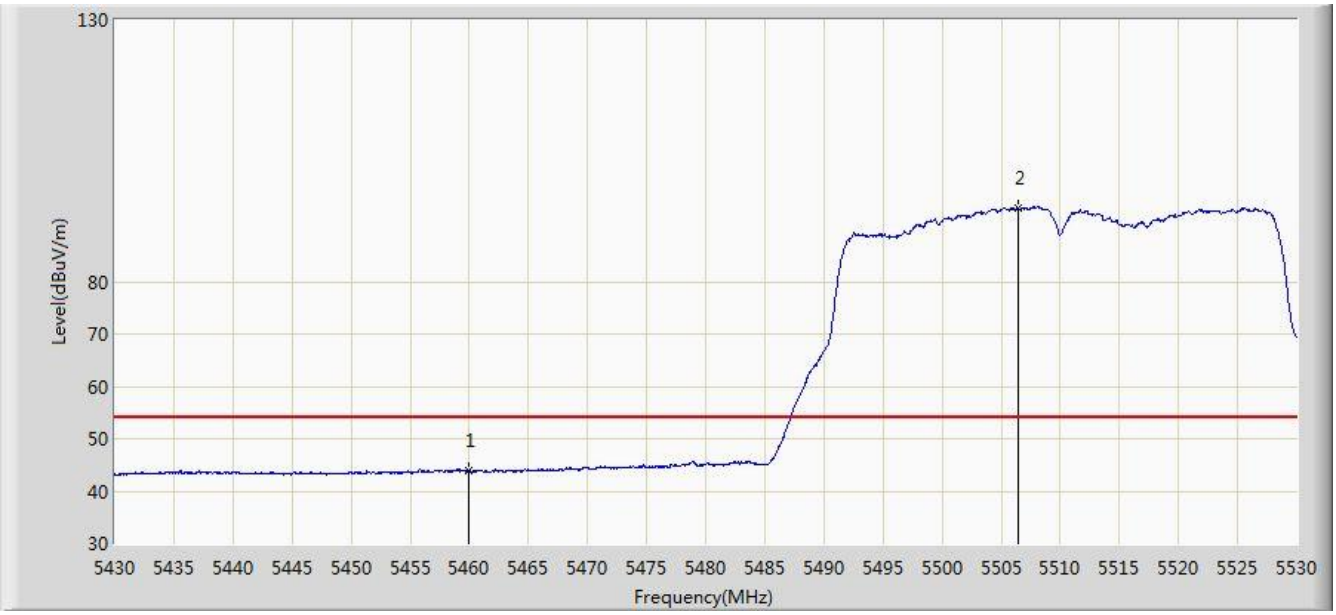


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5446.200 | 56.893 | 53.799 | -17.107 | 74.000 | 3.093 | PK |
| 2 | | | 5460.000 | 55.185 | 51.992 | -18.815 | 74.000 | 3.194 | PK |
| 3 | | | 5461.700 | 56.706 | 53.456 | -17.294 | 74.000 | 3.251 | PK |
| 4 | | | 5470.000 | 55.775 | 52.246 | -18.225 | 74.000 | 3.529 | PK |
| 5 | | * | 5514.900 | 97.791 | 94.484 | N/A | N/A | 3.307 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:03 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 | |

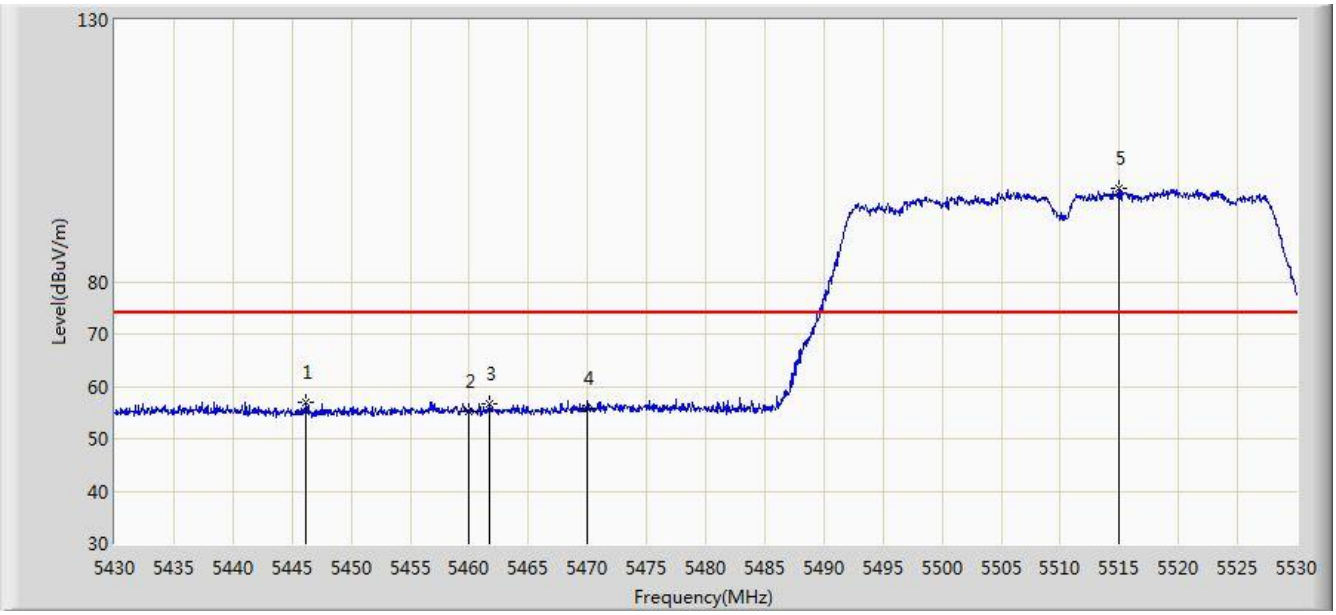


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.262 | 40.069 | -10.738 | 54.000 | 3.194 | AV |
| 2 | | * | 5521.550 | 87.504 | 84.036 | N/A | N/A | 3.469 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:04 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 | |

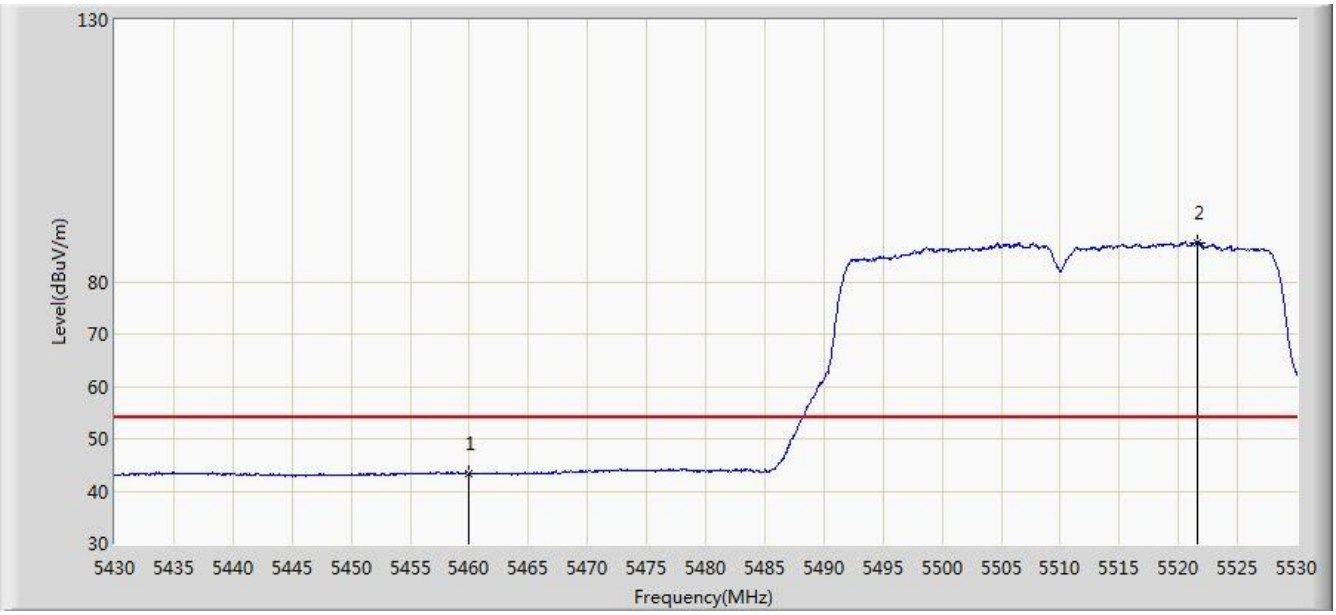


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5673.850 | 103.705 | 99.866 | N/A | N/A | 3.839 | PK |
| 2 | | | 5725.000 | 56.732 | 52.626 | -17.268 | 74.000 | 4.105 | PK |
| 3 | | | 5727.100 | 56.793 | 52.635 | -17.207 | 74.000 | 4.158 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:06 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 | |

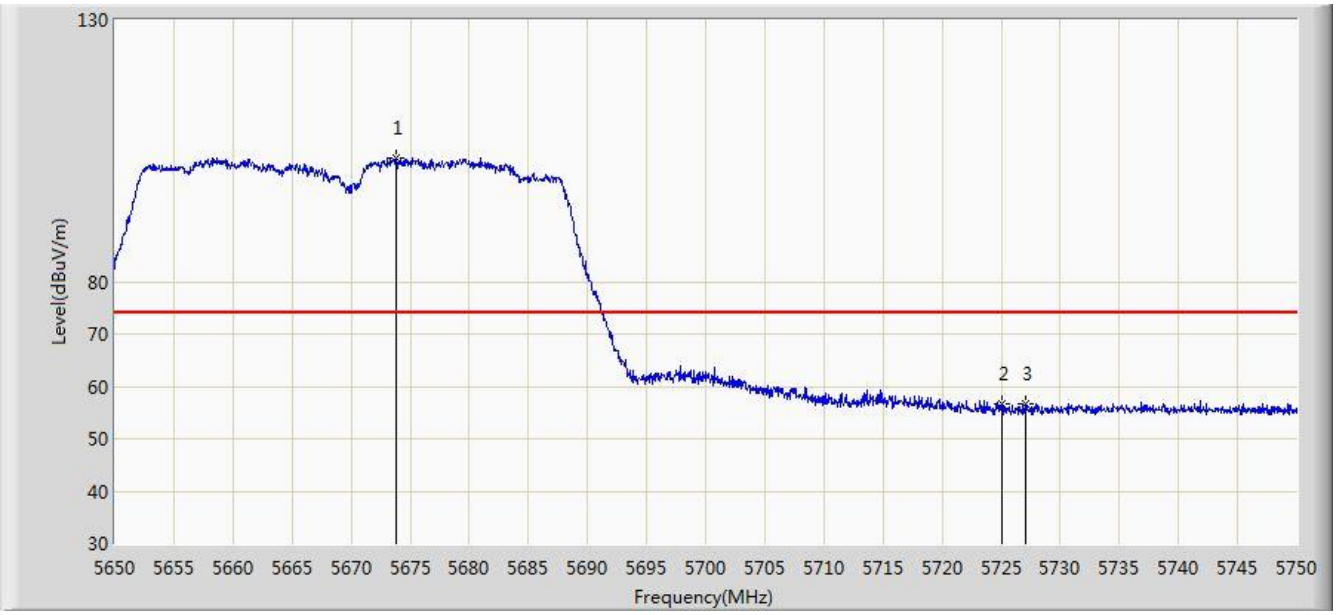


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5674.350 | 93.542 | 89.689 | N/A | N/A | 3.853 | AV |
| 2 | | | 5725.000 | 44.299 | 40.193 | -9.701 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:08 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 | |

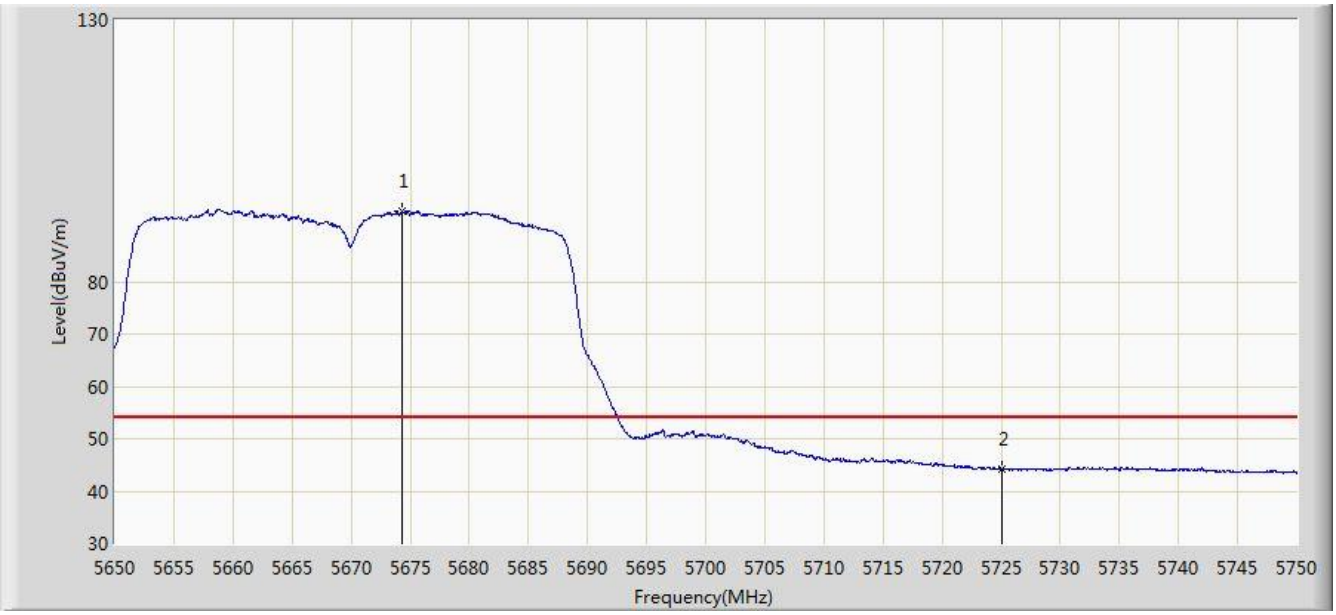


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5671.700 | 99.649 | 95.866 | N/A | N/A | 3.783 | PK |
| 2 | | | 5725.000 | 55.253 | 51.147 | -18.747 | 74.000 | 4.105 | PK |
| 3 | | | 5744.800 | 56.950 | 52.681 | -17.050 | 74.000 | 4.269 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:09 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 | |

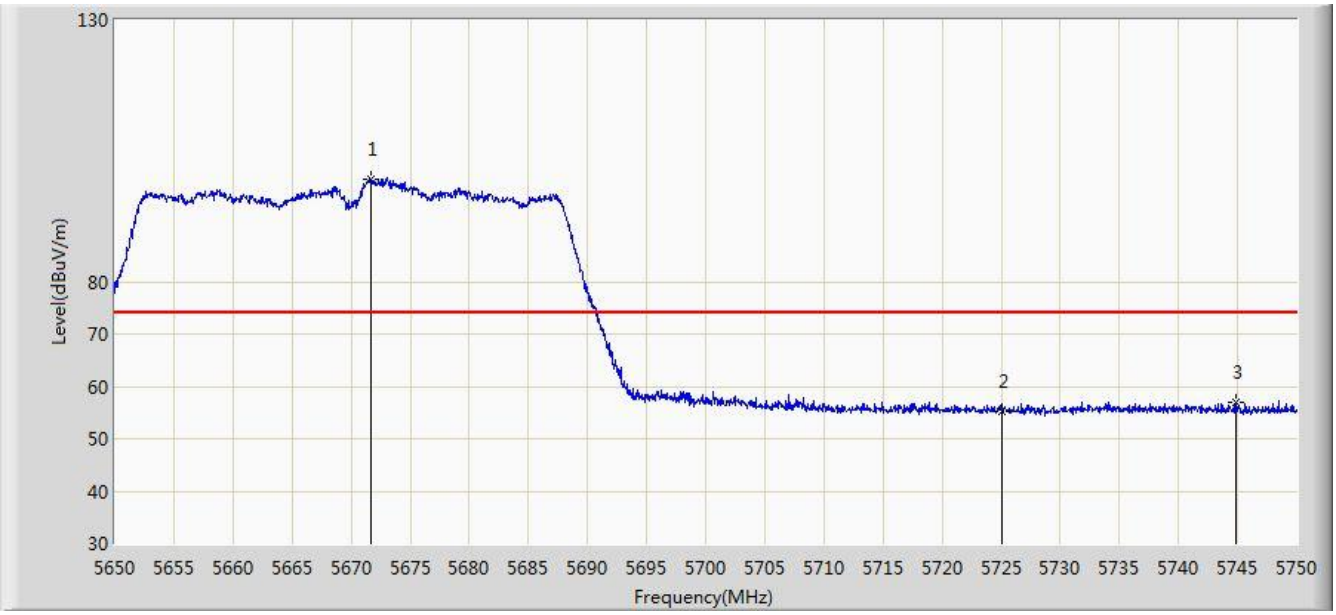


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5672.200 | 89.402 | 85.606 | N/A | N/A | 3.795 | AV |
| 2 | | | 5725.000 | 43.412 | 39.306 | -10.588 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:10 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 | |

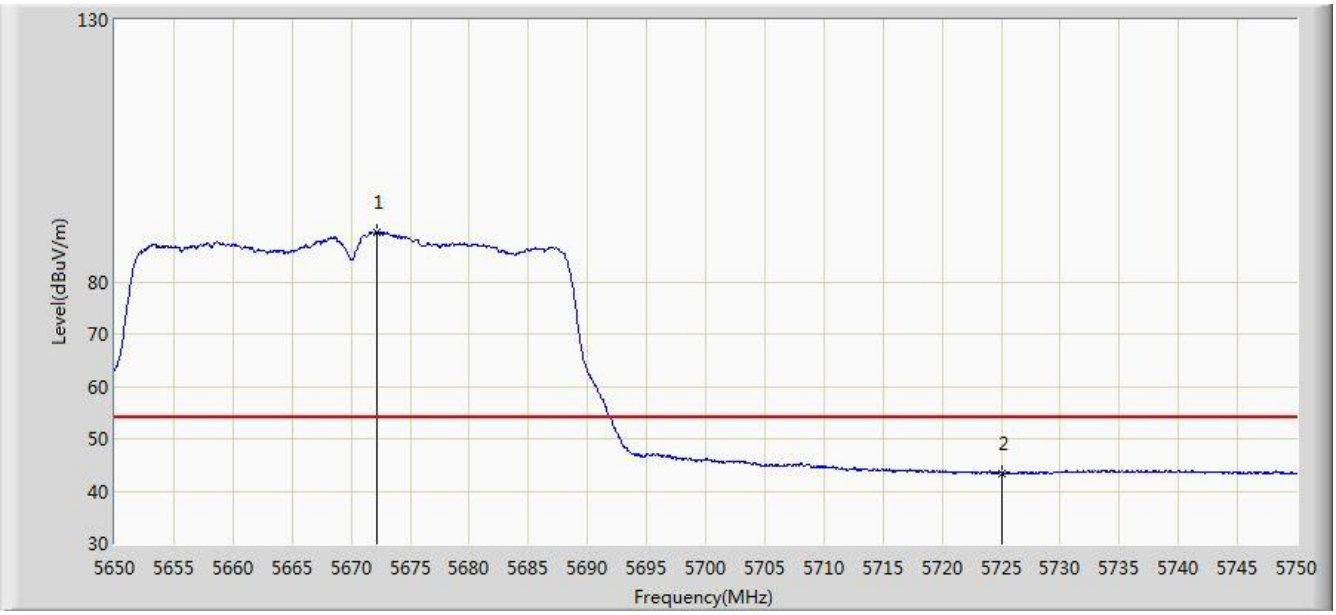


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5625.025 | 57.718 | 54.148 | -10.482 | 68.200 | 3.570 | PK |
| 2 | | | 5650.000 | 55.183 | 51.380 | -13.017 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.871 | 51.931 | -49.329 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 56.453 | 52.471 | -54.347 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 56.882 | 52.776 | -65.318 | 122.200 | 4.105 | PK |
| 6 | | | 5764.413 | 103.156 | 98.710 | N/A | N/A | 4.447 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:12 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 | |

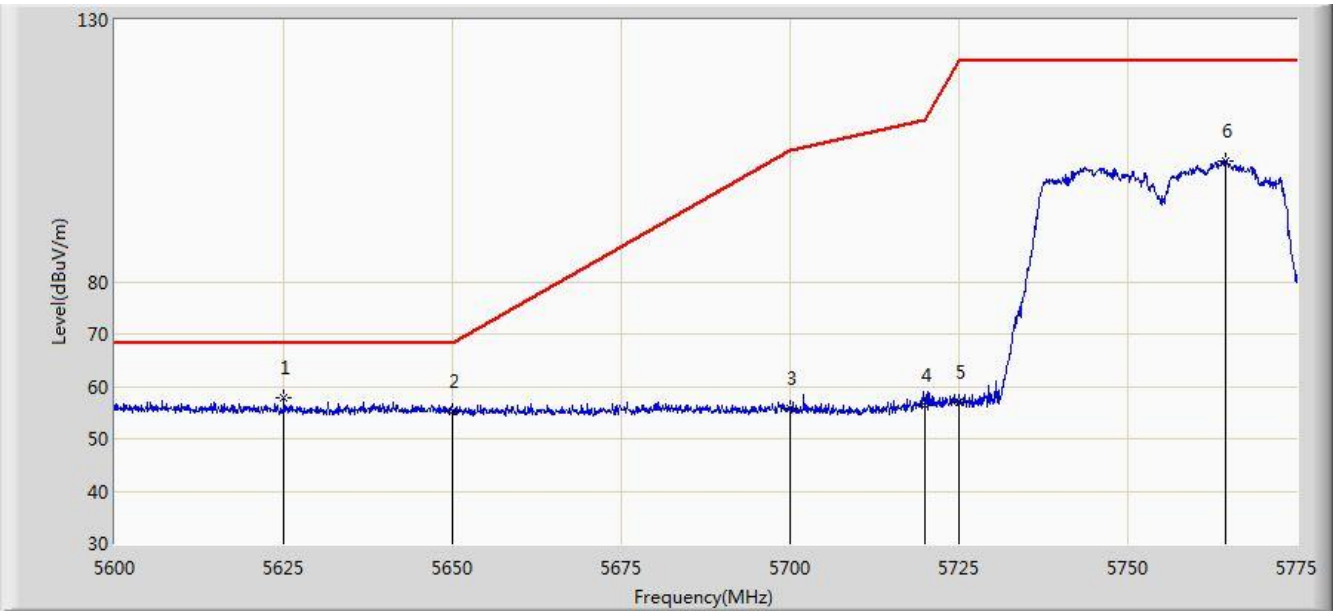


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5629.750 | 57.023 | 53.416 | -11.177 | 68.200 | 3.608 | PK |
| 2 | | | 5650.000 | 55.497 | 51.694 | -12.703 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 56.226 | 52.286 | -48.974 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 55.391 | 51.409 | -55.409 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 55.770 | 51.664 | -66.430 | 122.200 | 4.105 | PK |
| 6 | | | 5756.712 | 98.172 | 93.789 | N/A | N/A | 4.383 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:14 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 | |

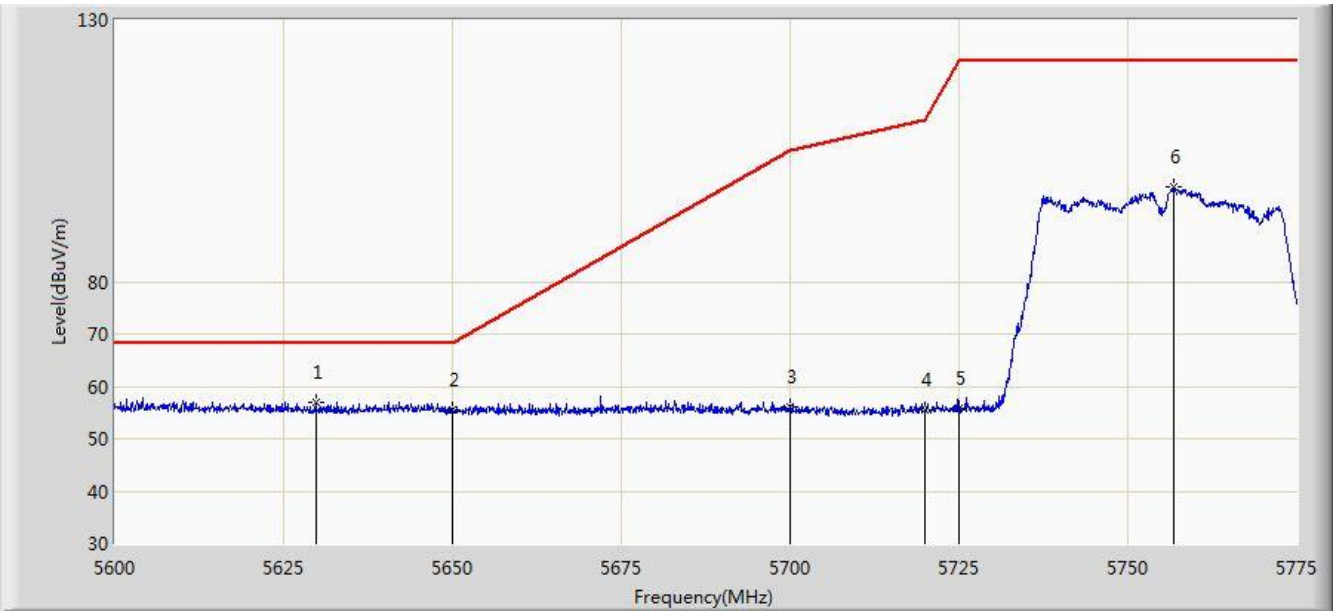


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5786.138 | 102.531 | 98.045 | N/A | N/A | 4.486 | PK |
| 2 | | | 5850.000 | 55.906 | 50.911 | -66.294 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 55.246 | 50.258 | -55.554 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 55.446 | 50.439 | -49.754 | 105.200 | 5.008 | PK |
| 5 | | | 5925.000 | 55.011 | 49.859 | -13.189 | 68.200 | 5.152 | PK |
| 6 | | * | 5933.850 | 57.311 | 52.124 | -10.889 | 68.200 | 5.187 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/02 - 16:16 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 | |

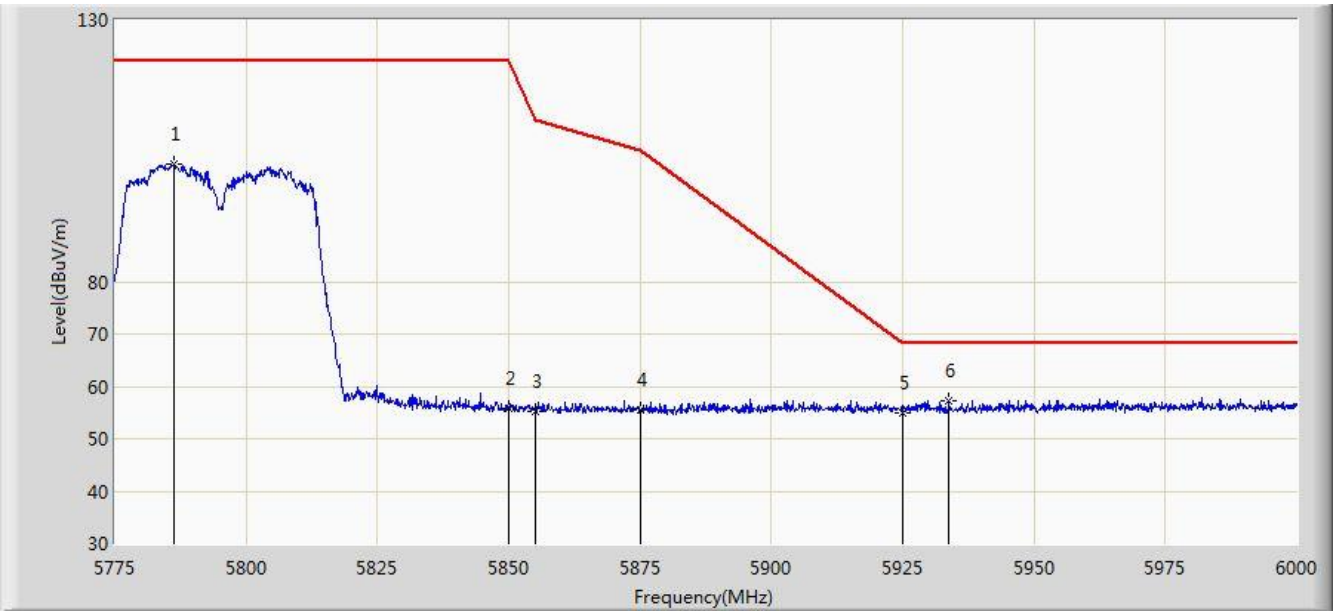


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5798.288 | 98.211 | 93.579 | N/A | N/A | 4.632 | PK |
| 2 | | | 5850.000 | 56.291 | 51.296 | -65.909 | 122.200 | 4.995 | PK |
| 3 | | | 5855.000 | 56.449 | 51.461 | -54.351 | 110.800 | 4.987 | PK |
| 4 | | | 5875.000 | 55.761 | 50.754 | -49.439 | 105.200 | 5.008 | PK |
| 5 | | * | 5925.000 | 56.213 | 51.061 | -11.987 | 68.200 | 5.152 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:02 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 | |

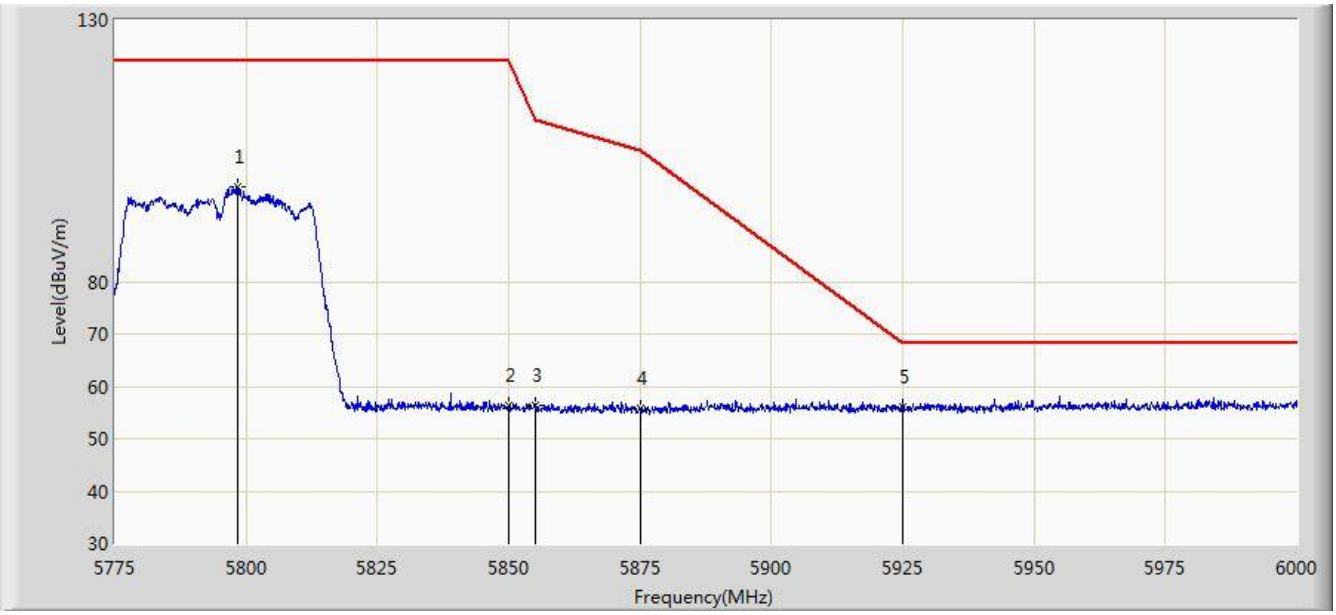


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5133.850 | 57.535 | 54.404 | -16.465 | 74.000 | 3.131 | PK |
| 2 | | | 5150.000 | 55.834 | 52.764 | -18.166 | 74.000 | 3.069 | PK |
| 3 | | * | 5181.145 | 104.857 | 101.810 | N/A | N/A | 3.048 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:07 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 | |

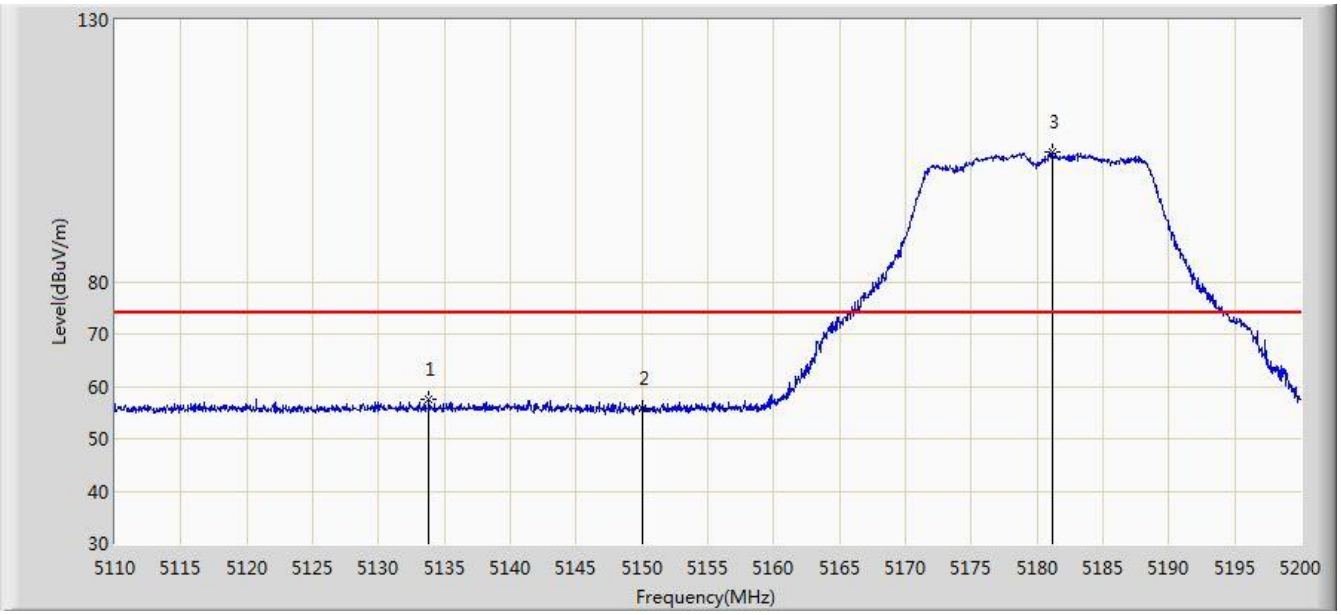


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.208 | 40.138 | -10.792 | 54.000 | 3.069 | AV |
| 2 | | * | 5177.995 | 94.447 | 91.412 | N/A | N/A | 3.035 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:09 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 | |

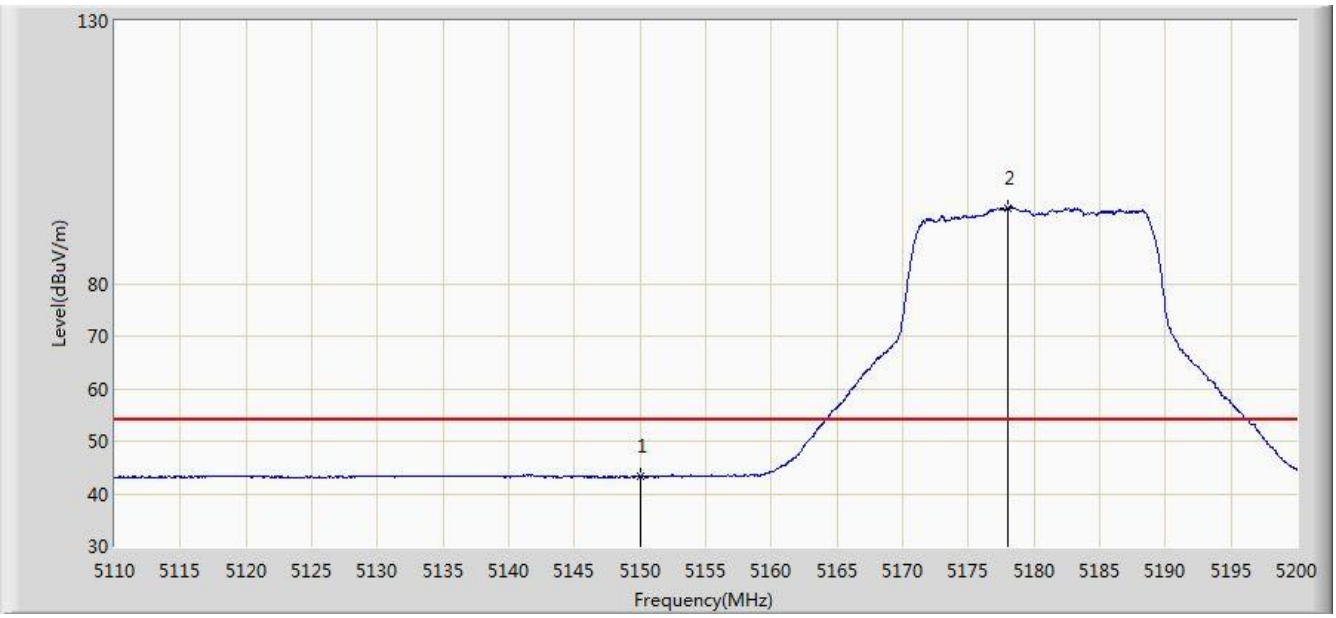


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5126.245 | 57.861 | 54.696 | -16.139 | 74.000 | 3.165 | PK |
| 2 | | | 5150.000 | 54.905 | 51.835 | -19.095 | 74.000 | 3.069 | PK |
| 3 | | * | 5175.475 | 98.586 | 95.561 | N/A | N/A | 3.026 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:10 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 | |

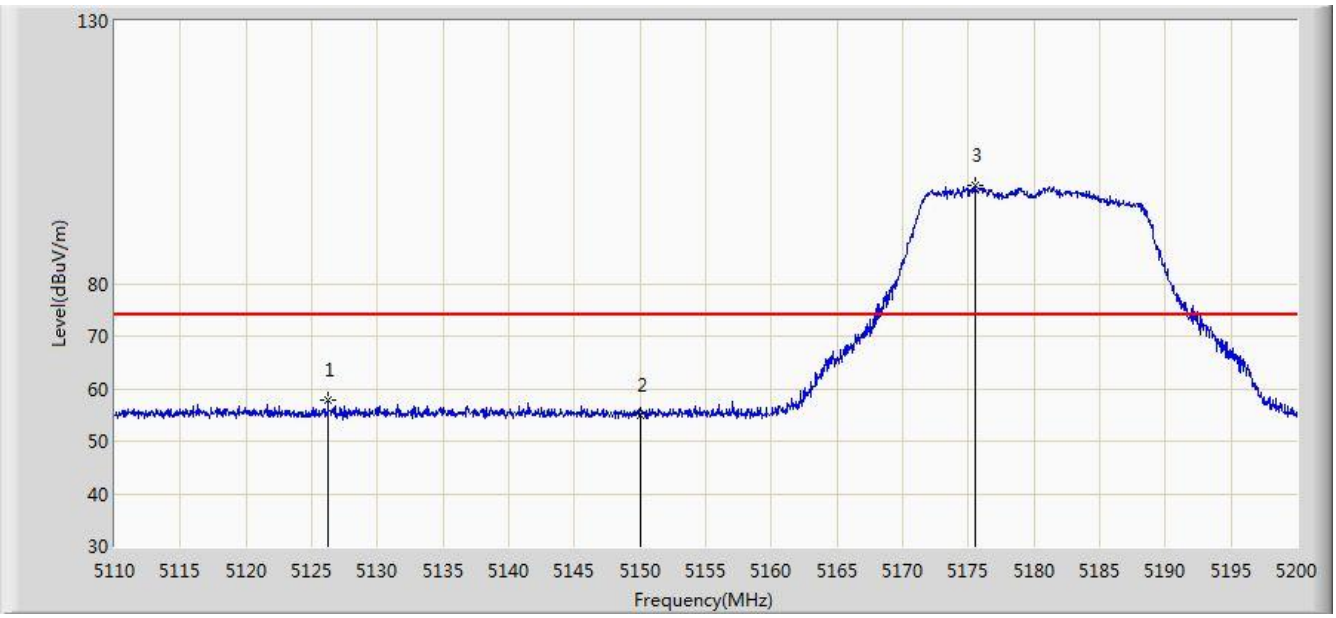


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.024 | 39.954 | -10.976 | 54.000 | 3.069 | AV |
| 2 | | * | 5174.170 | 88.244 | 85.224 | N/A | N/A | 3.020 | AV |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:12 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 | |

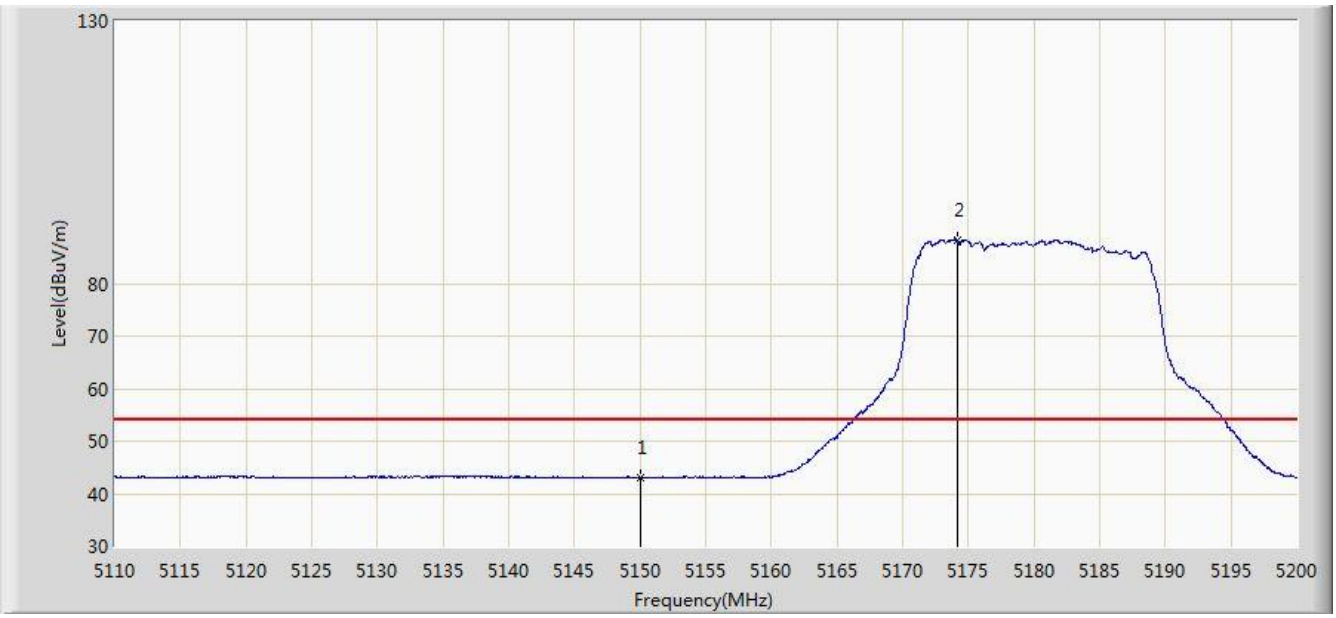


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5322.280 | 104.481 | 101.809 | N/A | N/A | 2.673 | PK |
| 2 | | | 5350.000 | 54.192 | 51.495 | -19.808 | 74.000 | 2.697 | PK |
| 3 | | | 5363.440 | 56.621 | 53.892 | -17.379 | 74.000 | 2.728 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:13 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 | |

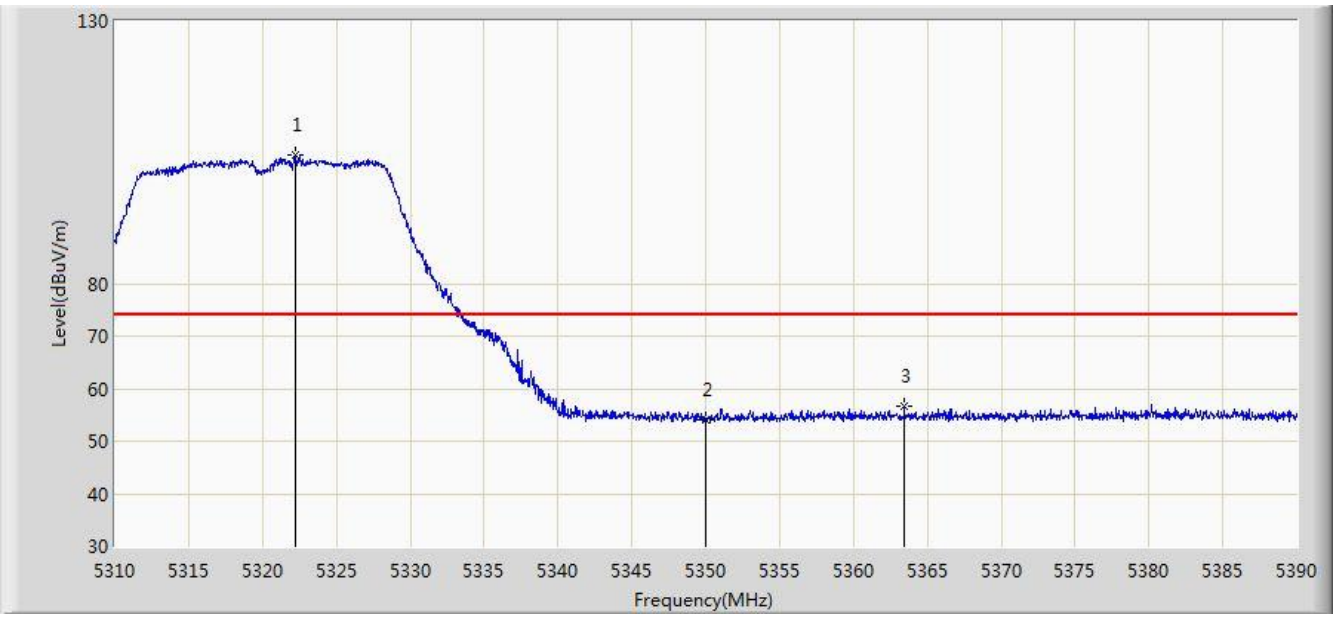


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.520 | 93.650 | 90.981 | N/A | N/A | 2.668 | AV |
| 2 | | | 5350.000 | 42.441 | 39.744 | -11.559 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 | |

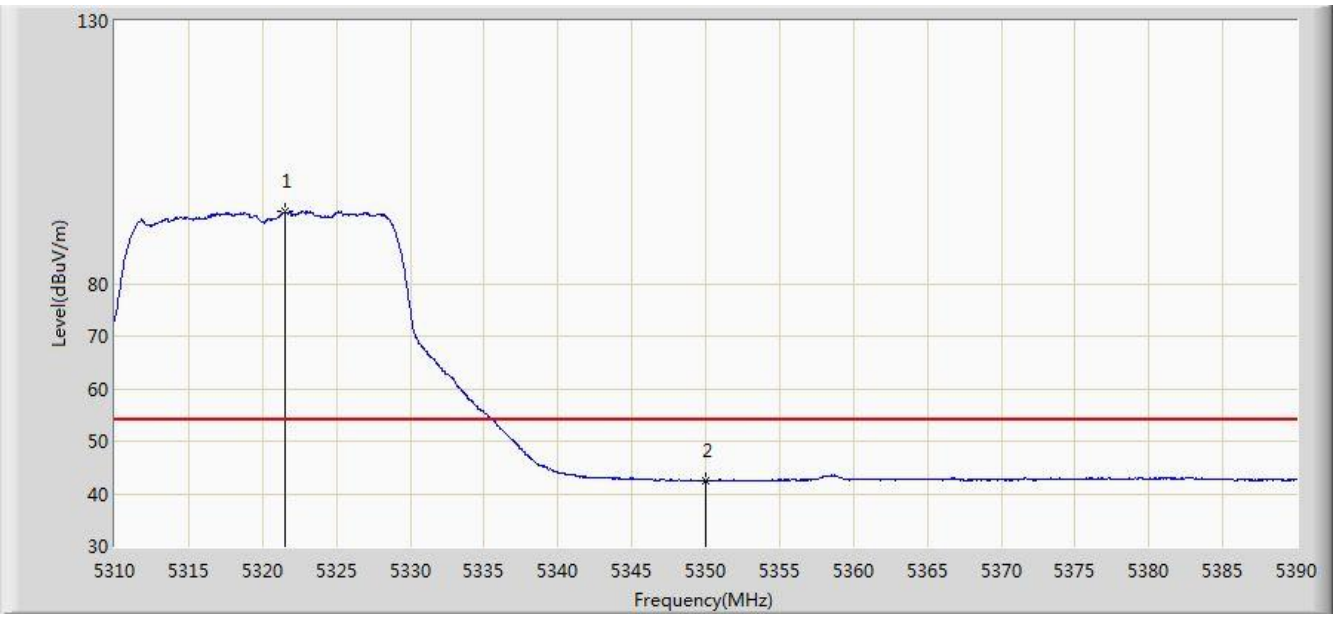


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.600 | 99.326 | 96.657 | N/A | N/A | 2.669 | PK |
| 2 | | | 5350.000 | 54.974 | 52.277 | -19.026 | 74.000 | 2.697 | PK |
| 3 | | | 5365.000 | 56.095 | 53.363 | -17.905 | 74.000 | 2.732 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/06 - 16:16 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 | |

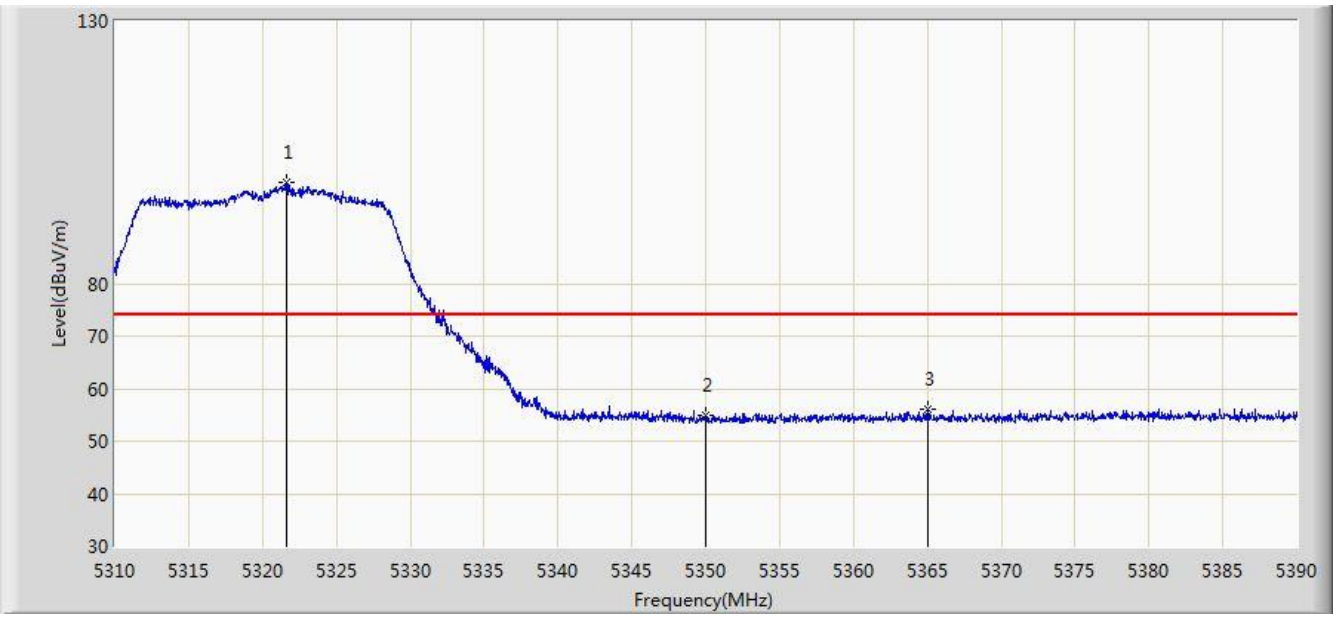


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5321.640 | 88.250 | 85.581 | N/A | N/A | 2.669 | AV |
| 2 | | | 5350.000 | 41.989 | 39.292 | -12.011 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 18:40 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 | |

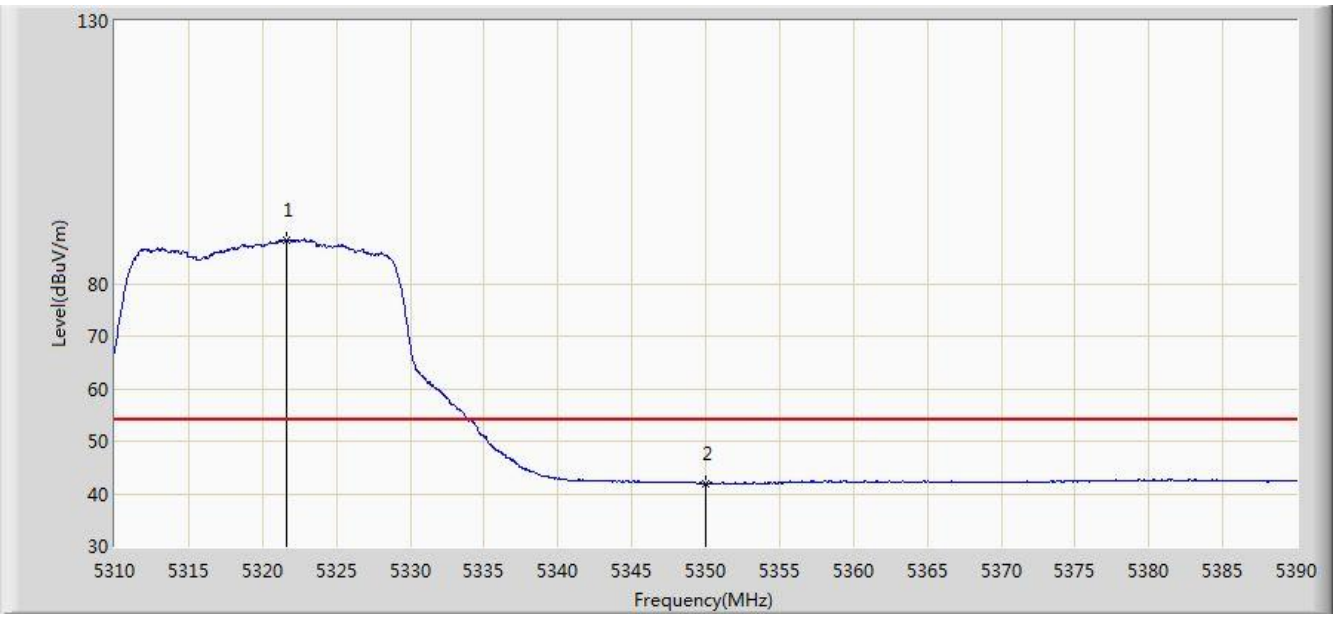


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5438.505 | 57.317 | 54.051 | -16.683 | 74.000 | 3.265 | PK |
| 2 | | | 5460.000 | 56.024 | 52.831 | -17.976 | 74.000 | 3.194 | PK |
| 3 | | | 5467.125 | 57.603 | 54.171 | -16.397 | 74.000 | 3.432 | PK |
| 4 | | | 5470.000 | 56.146 | 52.617 | -17.854 | 74.000 | 3.529 | PK |
| 5 | | * | 5498.850 | 106.563 | 103.438 | N/A | N/A | 3.124 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 18:47 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 | |

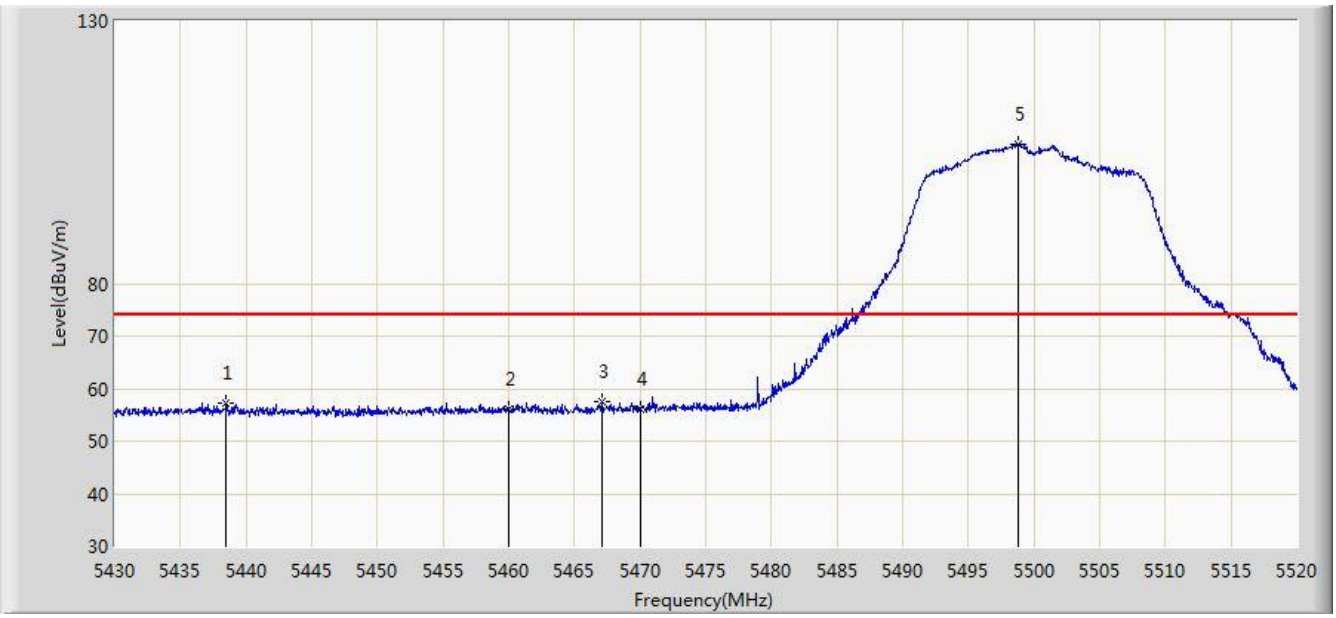


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.440 | 40.247 | -10.560 | 54.000 | 3.194 | AV |
| 2 | | * | 5498.580 | 96.247 | 93.120 | N/A | N/A | 3.127 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 18:52 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 | |

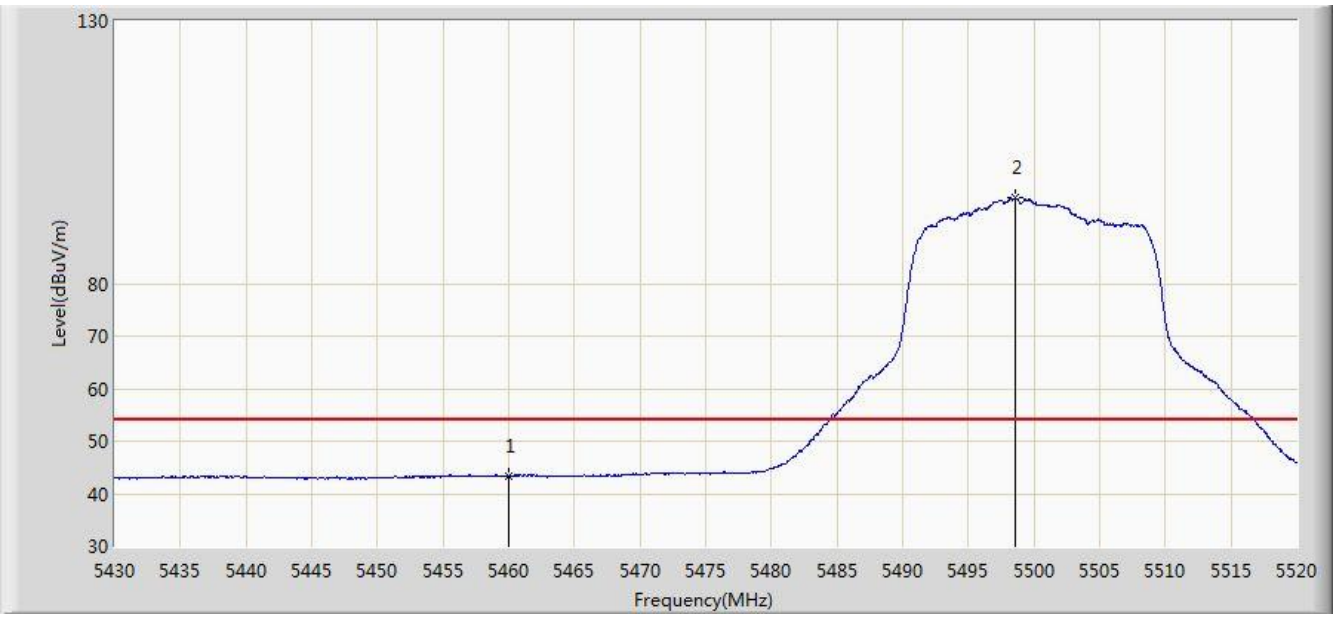


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5443.590 | 56.863 | 53.711 | -17.137 | 74.000 | 3.152 | PK |
| 2 | | | 5460.000 | 56.342 | 53.149 | -17.658 | 74.000 | 3.194 | PK |
| 3 | | | 5465.010 | 56.679 | 53.318 | -17.321 | 74.000 | 3.362 | PK |
| 4 | | | 5470.000 | 55.631 | 52.102 | -18.369 | 74.000 | 3.529 | PK |
| 5 | | * | 5501.415 | 100.610 | 97.510 | N/A | N/A | 3.100 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 18:56 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 | |

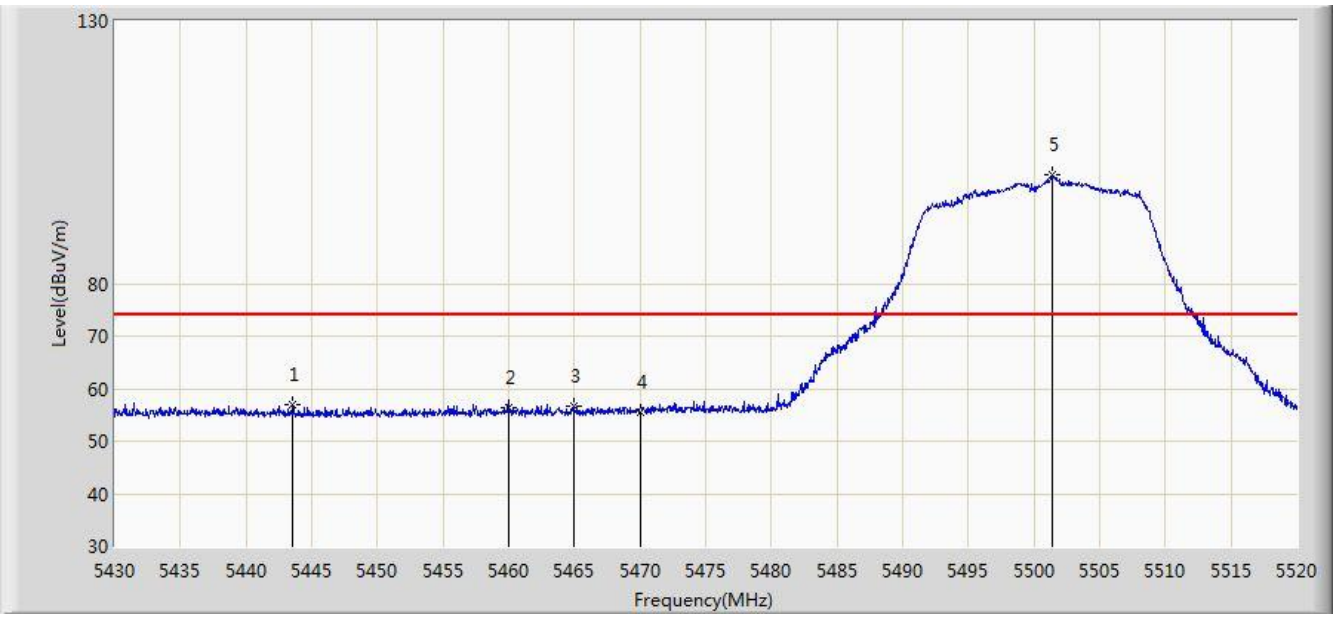


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 42.998 | 39.805 | -11.002 | 54.000 | 3.194 | AV |
| 2 | | * | 5501.595 | 89.508 | 86.410 | N/A | N/A | 3.098 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 18:57 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 | |

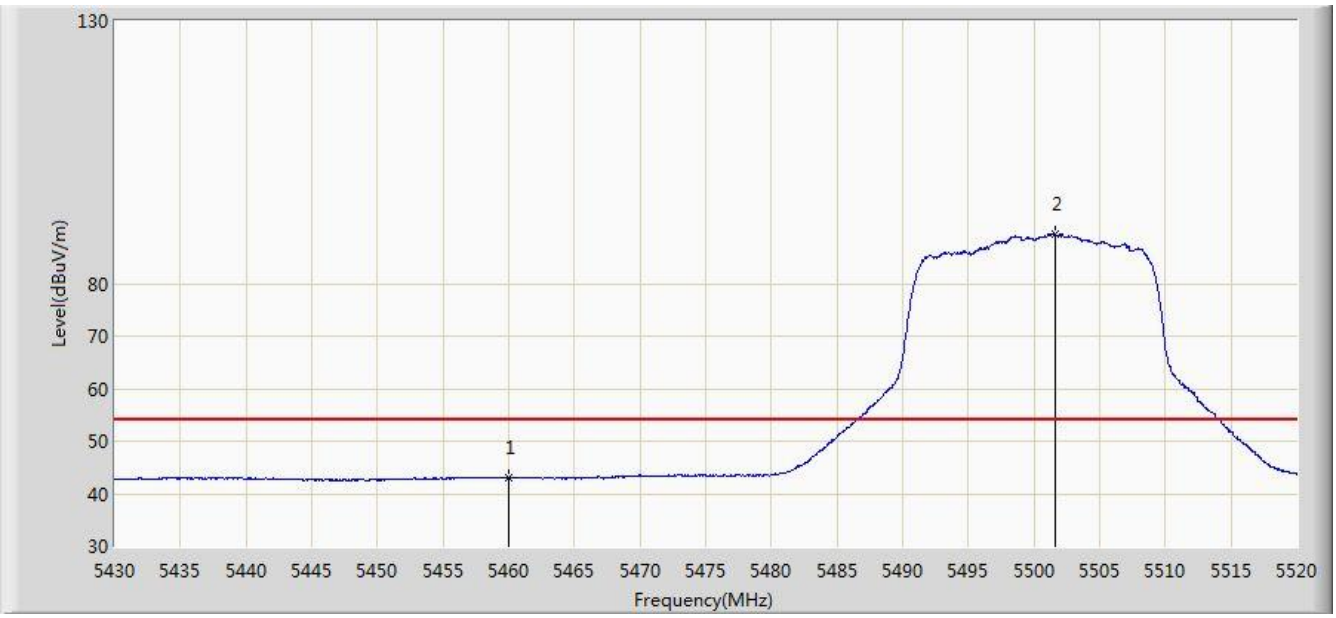


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5698.780 | 105.618 | 101.665 | N/A | N/A | 3.953 | PK |
| 2 | | | 5725.000 | 55.354 | 51.248 | -18.646 | 74.000 | 4.105 | PK |
| 3 | | | 5738.690 | 57.999 | 53.718 | -16.001 | 74.000 | 4.280 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:00 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 | |

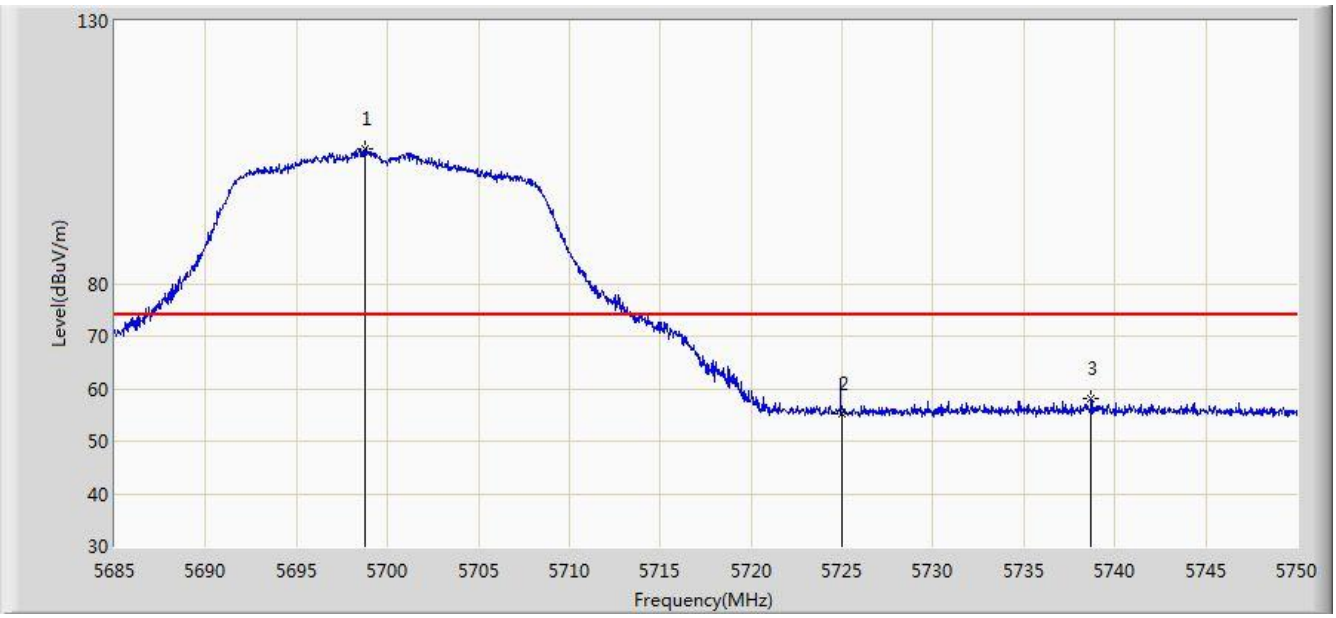


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5698.033 | 95.277 | 91.316 | N/A | N/A | 3.961 | AV |
| 2 | | | 5725.000 | 43.795 | 39.689 | -10.205 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 | |

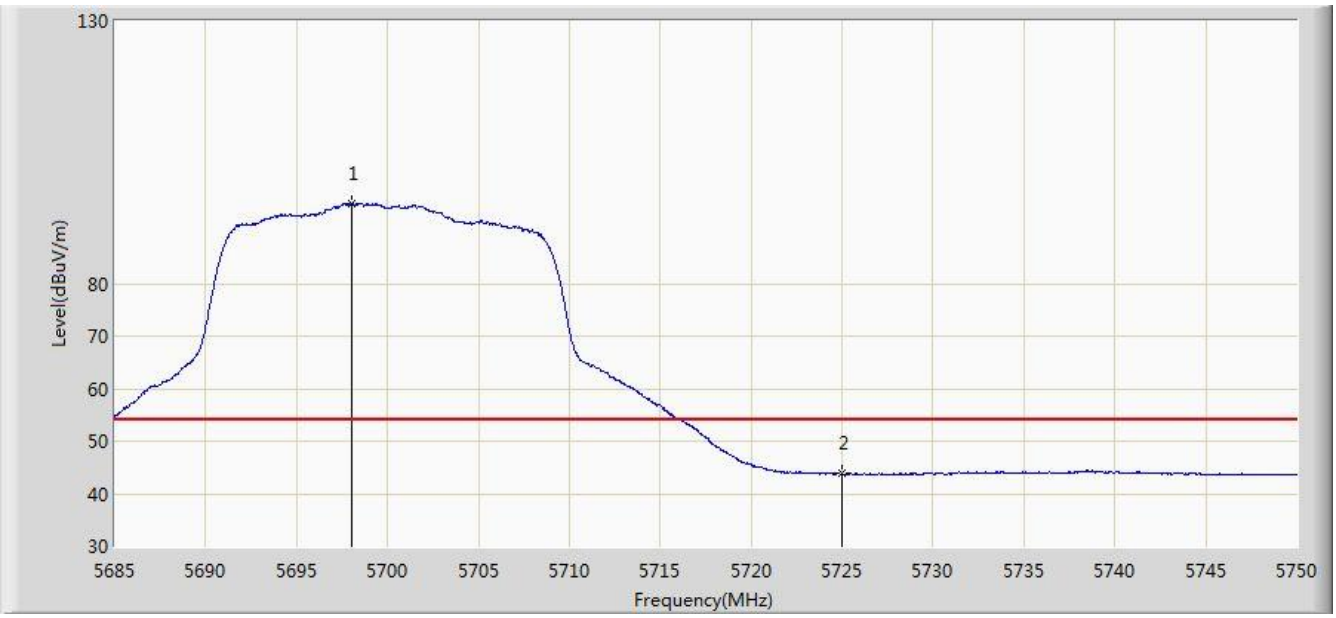


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5698.553 | 97.891 | 93.935 | N/A | N/A | 3.956 | PK |
| 2 | | | 5725.000 | 55.928 | 51.822 | -18.072 | 74.000 | 4.105 | PK |
| 3 | | | 5728.095 | 57.003 | 52.820 | -16.997 | 74.000 | 4.183 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:03 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 | |

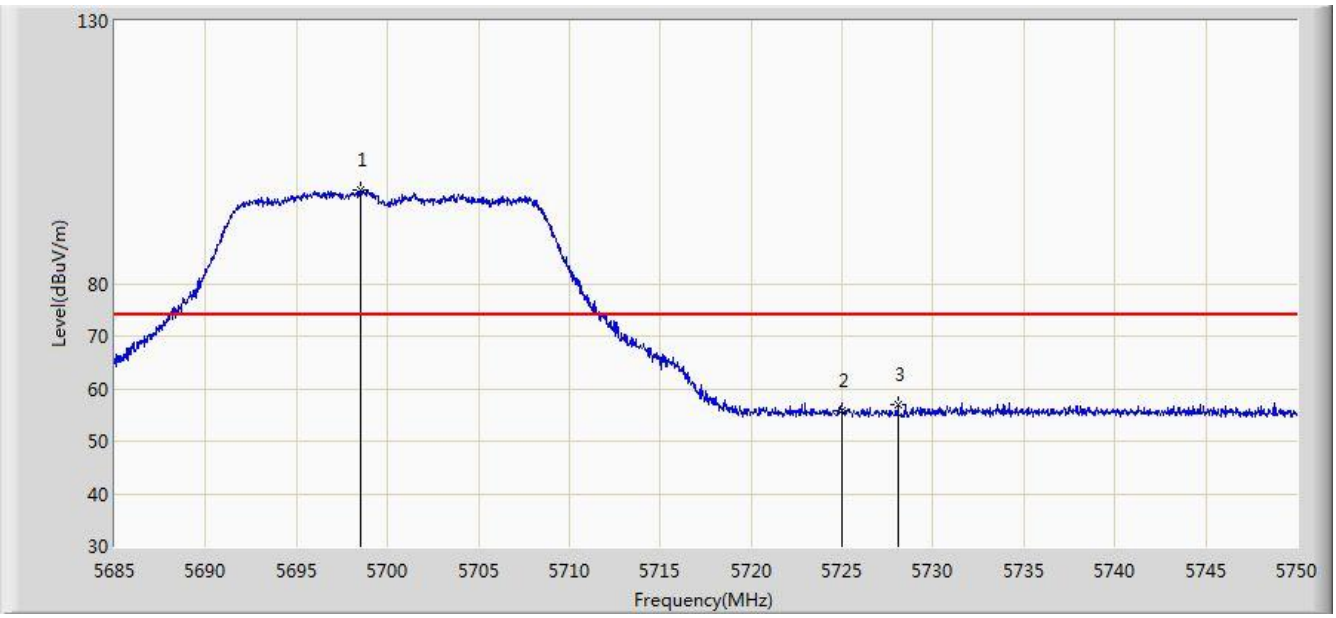


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5698.455 | 87.649 | 83.692 | N/A | N/A | 3.956 | AV |
| 2 | | | 5725.000 | 43.156 | 39.050 | -10.844 | 54.000 | 4.105 | AV |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:05 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 | |

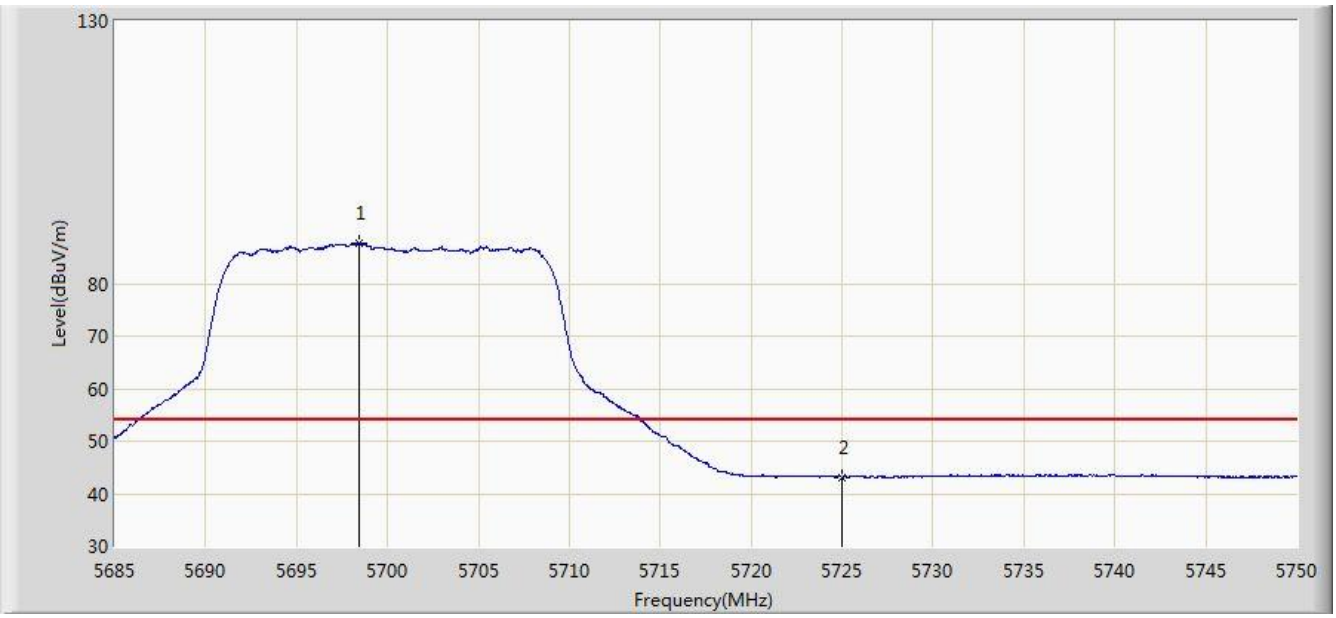


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5618.067 | 57.257 | 53.622 | -10.943 | 68.200 | 3.635 | PK |
| 2 | | | 5650.000 | 55.283 | 51.480 | -12.917 | 68.200 | 3.803 | PK |
| 3 | | | 5662.123 | 57.629 | 54.082 | -19.572 | 77.201 | 3.546 | PK |
| 4 | | | 5700.000 | 55.135 | 51.195 | -50.065 | 105.200 | 3.940 | PK |
| 5 | | | 5708.817 | 57.166 | 53.311 | -50.505 | 107.671 | 3.855 | PK |
| 6 | | | 5720.000 | 55.219 | 51.237 | -55.581 | 110.800 | 3.982 | PK |
| 7 | | | 5720.945 | 56.728 | 52.722 | -56.228 | 112.955 | 4.006 | PK |
| 8 | | | 5725.000 | 55.466 | 51.360 | -66.734 | 122.200 | 4.105 | PK |
| 9 | | | 5747.428 | 102.853 | 98.585 | N/A | N/A | 4.268 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:07 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 | |

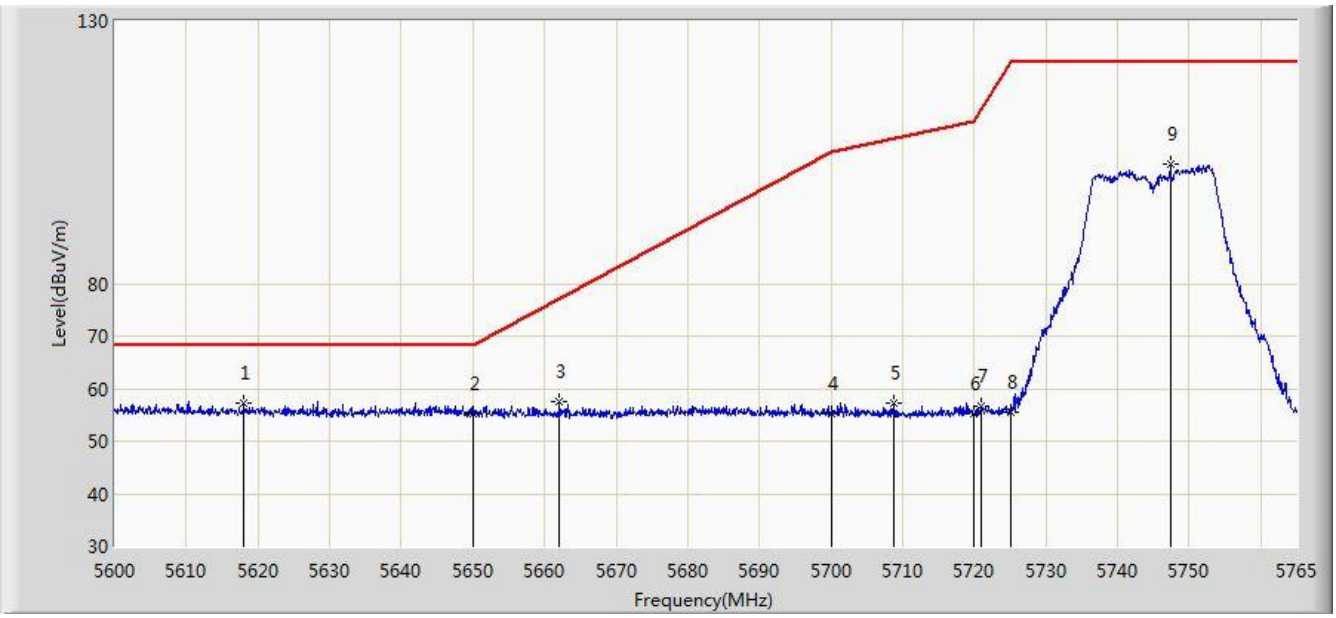


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5635.805 | 57.278 | 53.541 | -10.922 | 68.200 | 3.737 | PK |
| 2 | | | 5650.000 | 55.959 | 52.156 | -12.241 | 68.200 | 3.803 | PK |
| 3 | | | 5692.482 | 57.033 | 53.018 | -42.624 | 99.657 | 4.015 | PK |
| 4 | | | 5700.000 | 55.058 | 51.118 | -50.142 | 105.200 | 3.940 | PK |
| 5 | | | 5707.745 | 57.079 | 53.214 | -50.292 | 107.371 | 3.865 | PK |
| 6 | | | 5720.000 | 55.592 | 51.610 | -55.208 | 110.800 | 3.982 | PK |
| 7 | | | 5724.575 | 56.565 | 52.470 | -64.666 | 121.231 | 4.095 | PK |
| 8 | | | 5725.000 | 55.320 | 51.214 | -66.880 | 122.200 | 4.105 | PK |
| 9 | | | 5743.550 | 96.558 | 92.288 | N/A | N/A | 4.270 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:09 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 | |

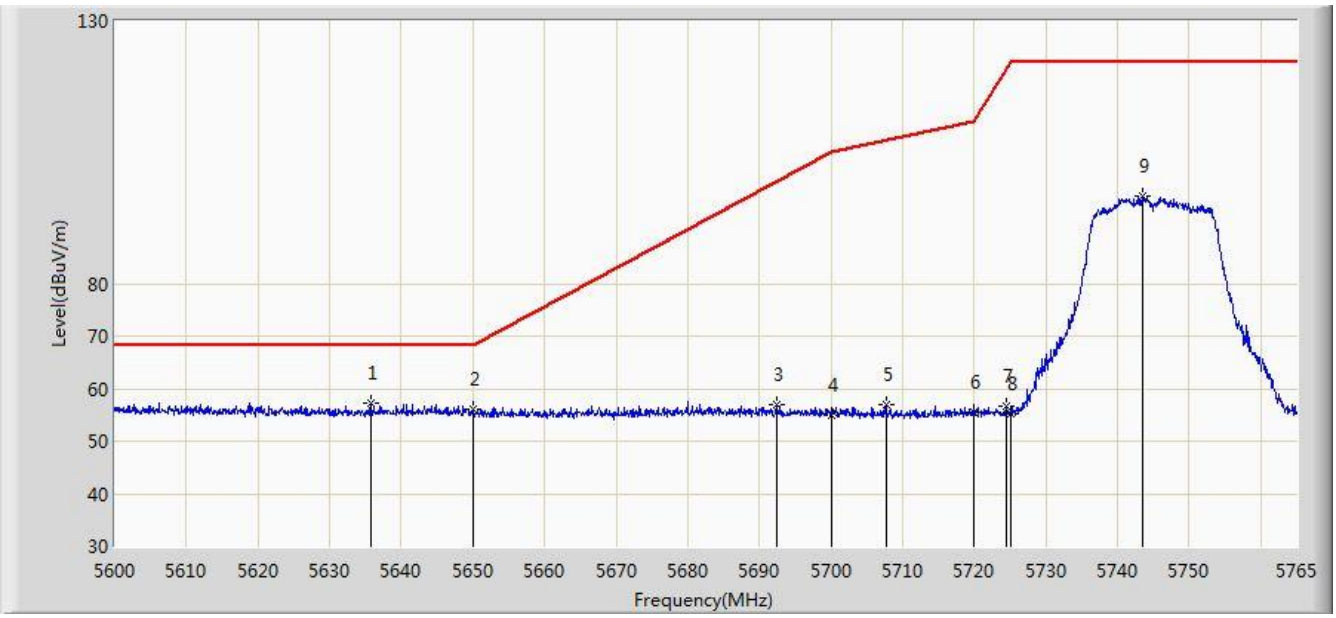


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5823.720 | 104.474 | 99.755 | N/A | N/A | 4.719 | PK |
| 2 | | | 5850.000 | 56.137 | 51.142 | -66.063 | 122.200 | 4.995 | PK |
| 3 | | | 5851.312 | 58.004 | 53.011 | -61.204 | 119.208 | 4.993 | PK |
| 4 | | | 5855.000 | 56.059 | 51.071 | -54.741 | 110.800 | 4.987 | PK |
| 5 | | | 5864.085 | 57.817 | 52.840 | -50.437 | 108.254 | 4.977 | PK |
| 6 | | | 5875.000 | 55.791 | 50.784 | -49.409 | 105.200 | 5.008 | PK |
| 7 | | | 5901.623 | 58.155 | 52.996 | -27.305 | 85.460 | 5.158 | PK |
| 8 | | | 5925.000 | 55.506 | 50.354 | -12.694 | 68.200 | 5.152 | PK |
| 9 | | * | 5930.482 | 57.642 | 52.447 | -10.558 | 68.200 | 5.195 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:12 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 | |

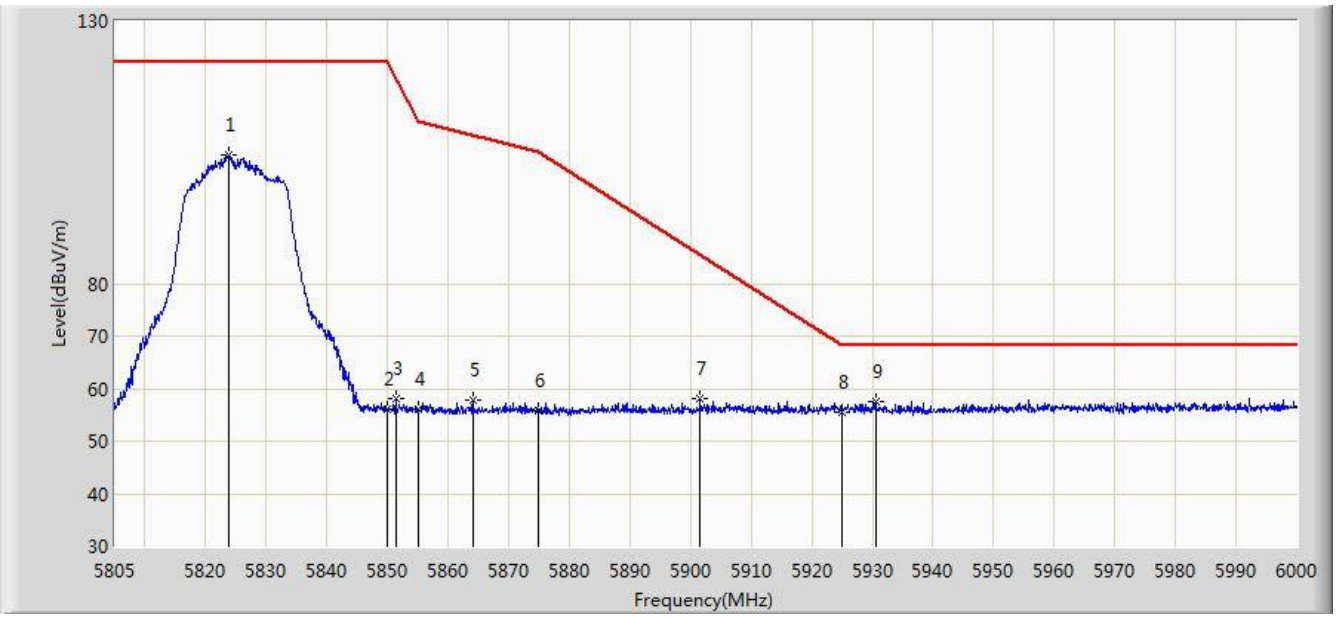


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5826.743 | 95.739 | 90.975 | N/A | N/A | 4.764 | PK |
| 2 | | | 5850.000 | 56.232 | 51.237 | -65.968 | 122.200 | 4.995 | PK |
| 3 | | | 5853.652 | 56.564 | 51.574 | -57.309 | 113.872 | 4.990 | PK |
| 4 | | | 5855.000 | 55.570 | 50.582 | -55.230 | 110.800 | 4.987 | PK |
| 5 | | | 5868.473 | 57.496 | 52.518 | -49.530 | 107.025 | 4.978 | PK |
| 6 | | | 5875.000 | 55.052 | 50.045 | -50.148 | 105.200 | 5.008 | PK |
| 7 | | | 5890.410 | 57.626 | 52.511 | -36.137 | 93.763 | 5.116 | PK |
| 8 | | | 5925.000 | 56.071 | 50.919 | -12.129 | 68.200 | 5.152 | PK |
| 9 | | * | 5958.855 | 57.490 | 52.134 | -10.710 | 68.200 | 5.356 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 | |

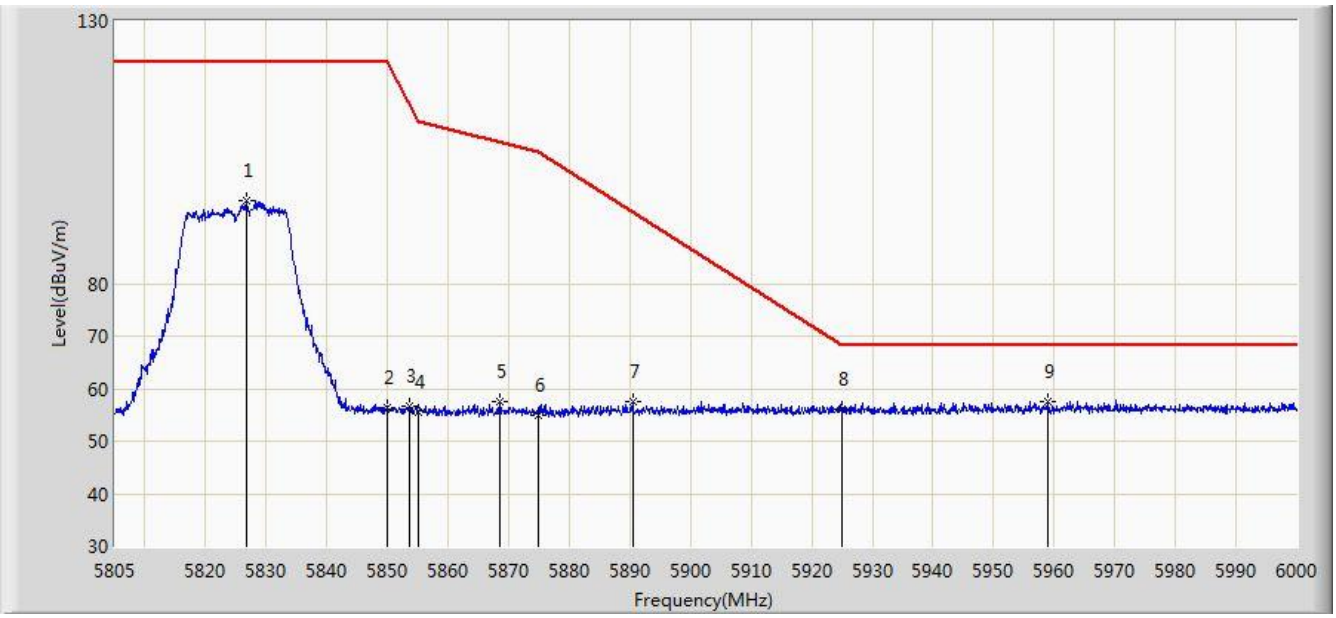


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5139.300 | 58.189 | 55.093 | -15.811 | 74.000 | 3.096 | PK |
| 2 | | | 5150.000 | 55.365 | 52.295 | -18.635 | 74.000 | 3.069 | PK |
| 3 | | * | 5186.750 | 102.652 | 99.660 | N/A | N/A | 2.992 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:18 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 | |

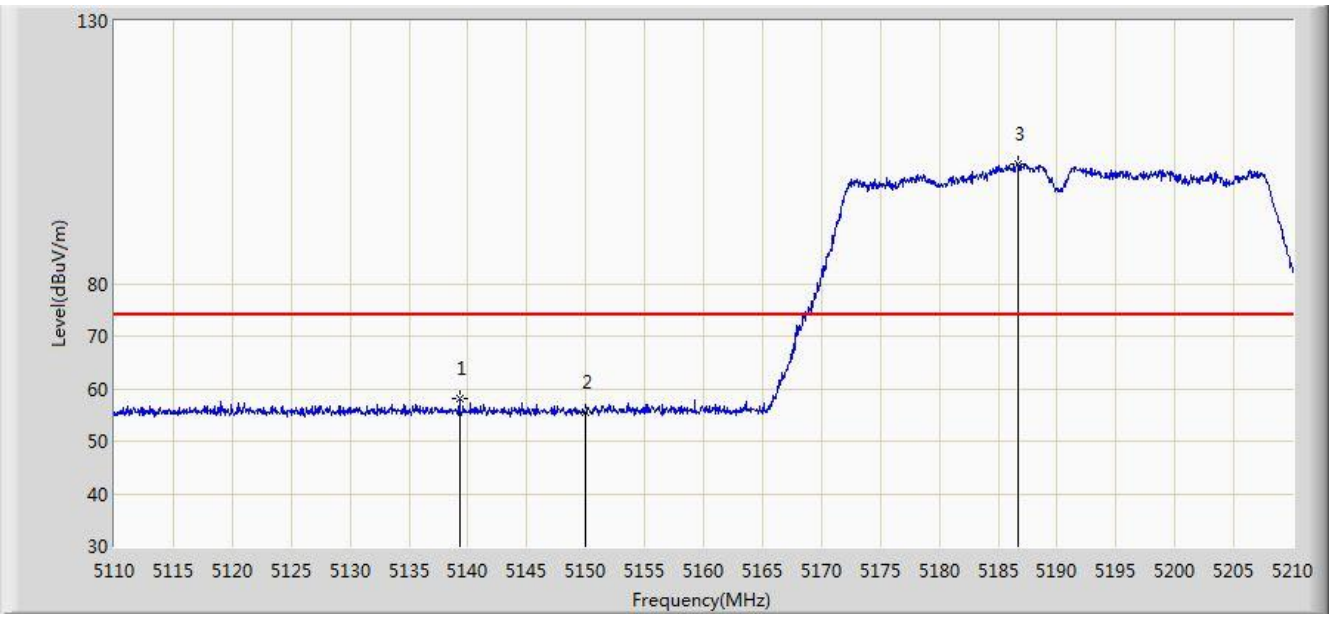


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.991 | 40.921 | -10.009 | 54.000 | 3.069 | AV |
| 2 | | * | 5187.700 | 93.158 | 90.178 | N/A | N/A | 2.980 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:20 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 | |

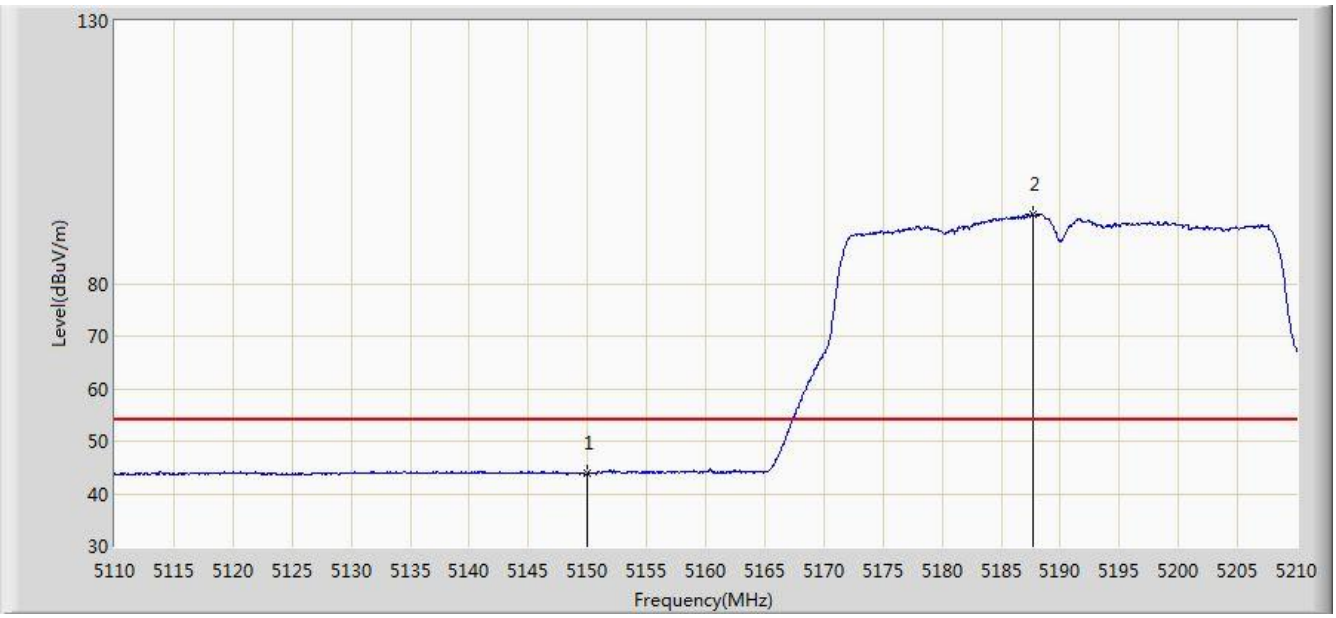


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5144.650 | 57.261 | 54.178 | -16.739 | 74.000 | 3.082 | PK |
| 2 | | | 5150.000 | 55.244 | 52.174 | -18.756 | 74.000 | 3.069 | PK |
| 3 | | * | 5193.050 | 97.366 | 94.460 | N/A | N/A | 2.906 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 | |

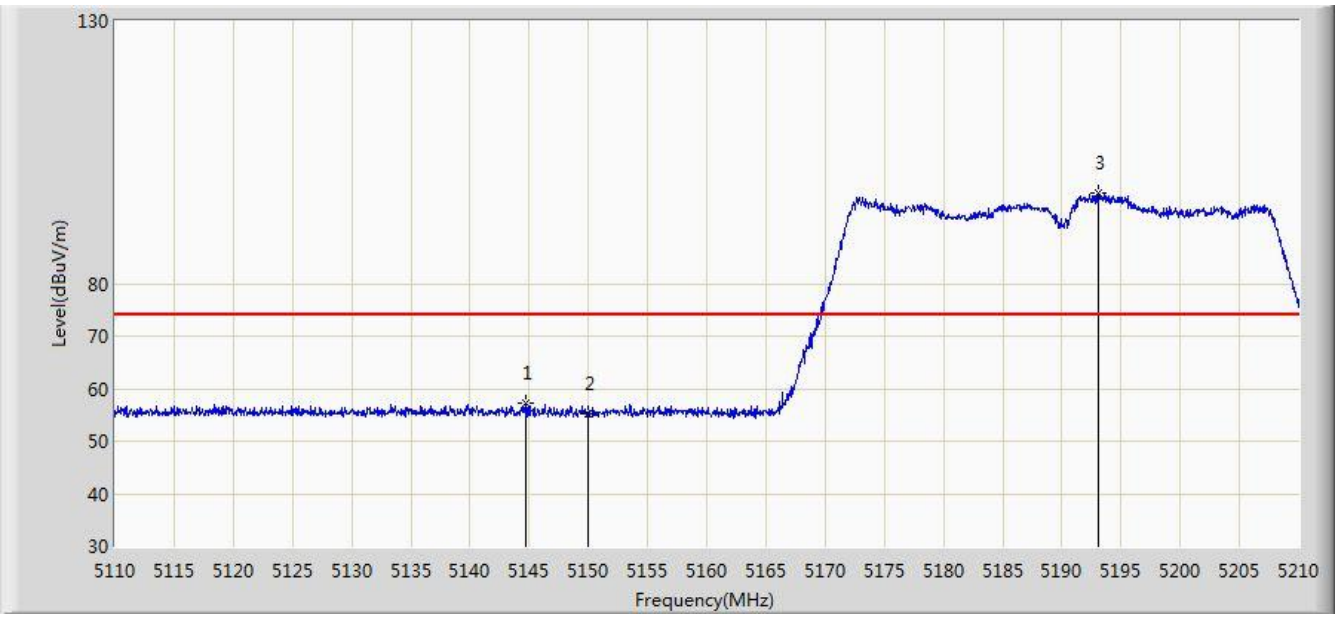


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.470 | 40.400 | -10.530 | 54.000 | 3.069 | AV |
| 2 | | * | 5192.600 | 86.850 | 83.937 | N/A | N/A | 2.912 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:24 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 | |

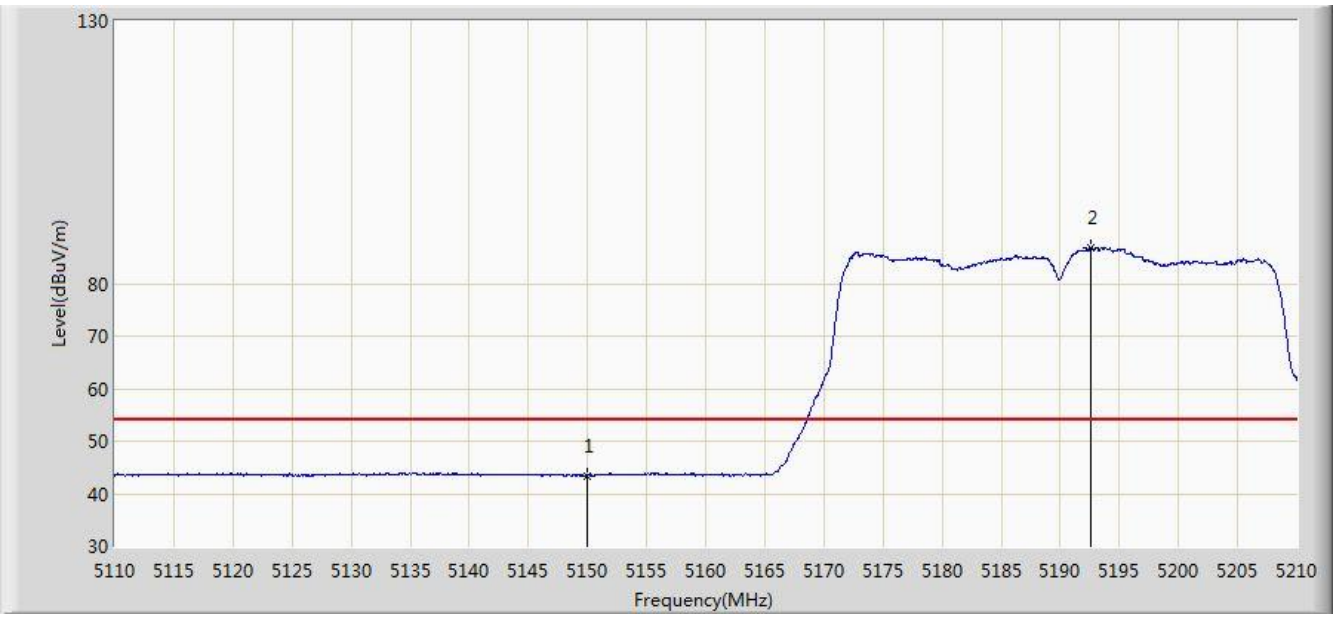


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5313.100 | 101.674 | 99.066 | N/A | N/A | 2.609 | PK |
| 2 | | | 5350.000 | 55.793 | 53.096 | -18.207 | 74.000 | 2.697 | PK |
| 3 | | | 5372.650 | 60.761 | 57.864 | -13.239 | 74.000 | 2.897 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:27 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 | |

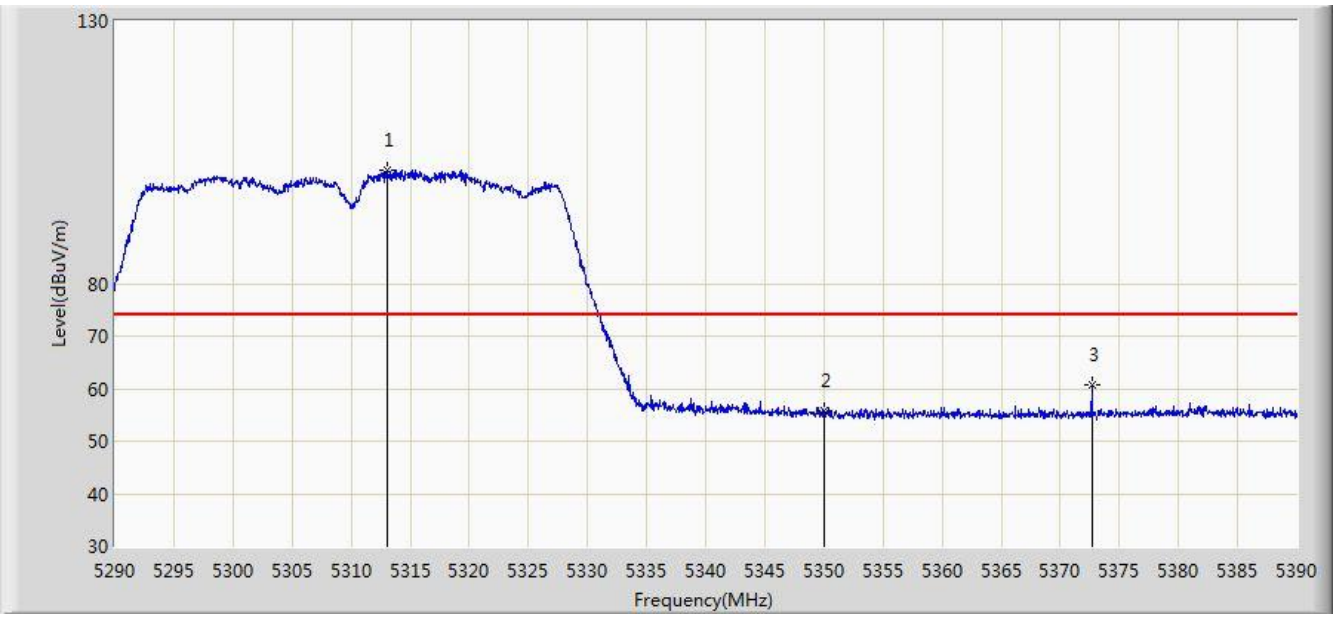


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5314.400 | 91.584 | 88.964 | N/A | N/A | 2.620 | AV |
| 2 | | | 5350.000 | 43.745 | 41.048 | -10.255 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:29 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 | |

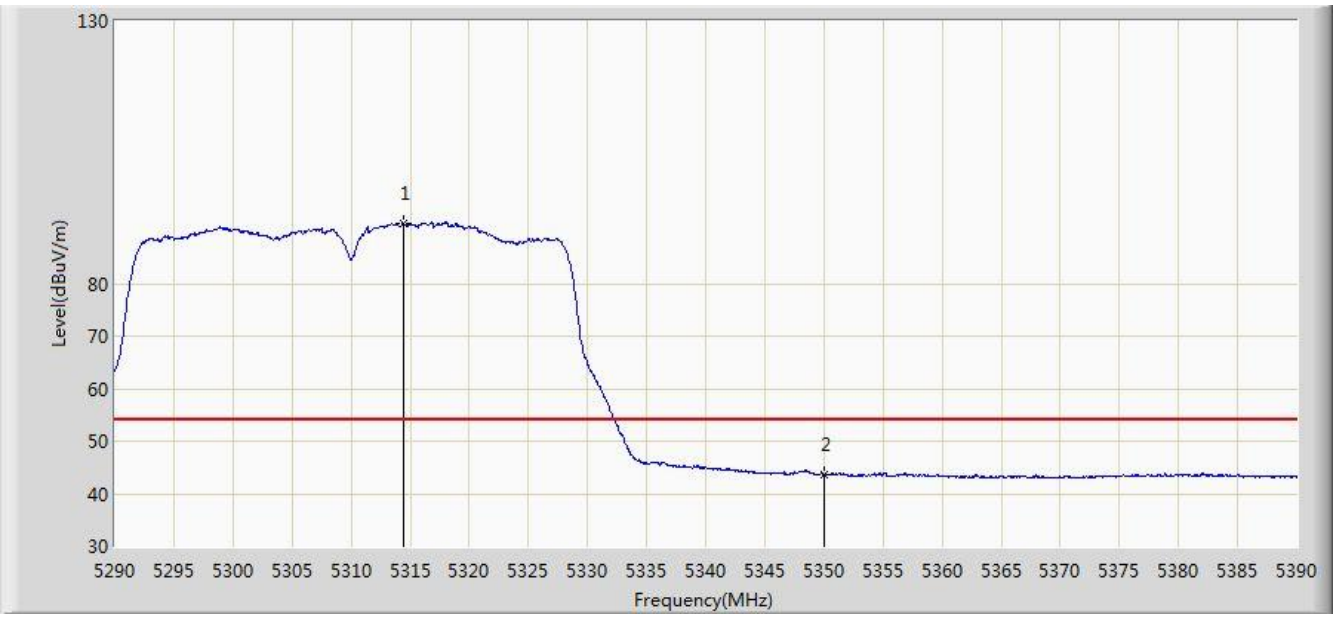


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5301.050 | 95.138 | 92.519 | N/A | N/A | 2.619 | PK |
| 2 | | | 5350.000 | 55.269 | 52.572 | -18.731 | 74.000 | 2.697 | PK |
| 3 | | | 5365.250 | 58.429 | 55.693 | -15.571 | 74.000 | 2.736 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:30 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 | |

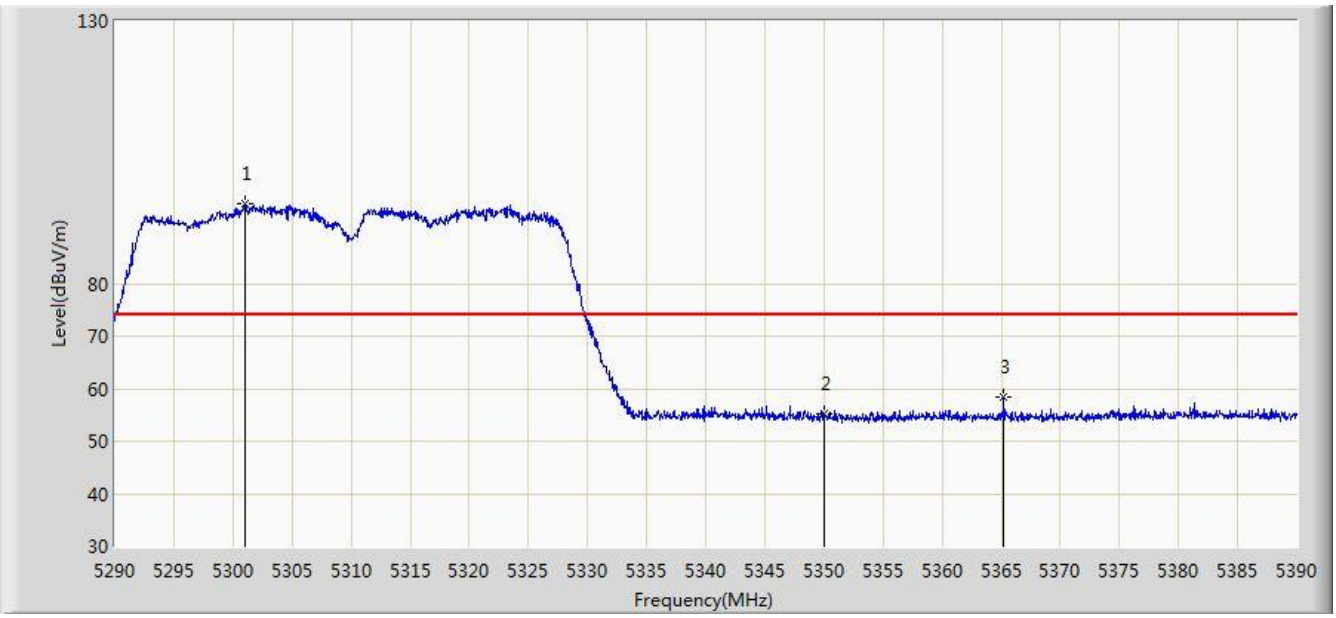


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5304.250 | 85.310 | 82.695 | N/A | N/A | 2.614 | AV |
| 2 | | | 5350.000 | 42.762 | 40.065 | -11.238 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:32 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 | |

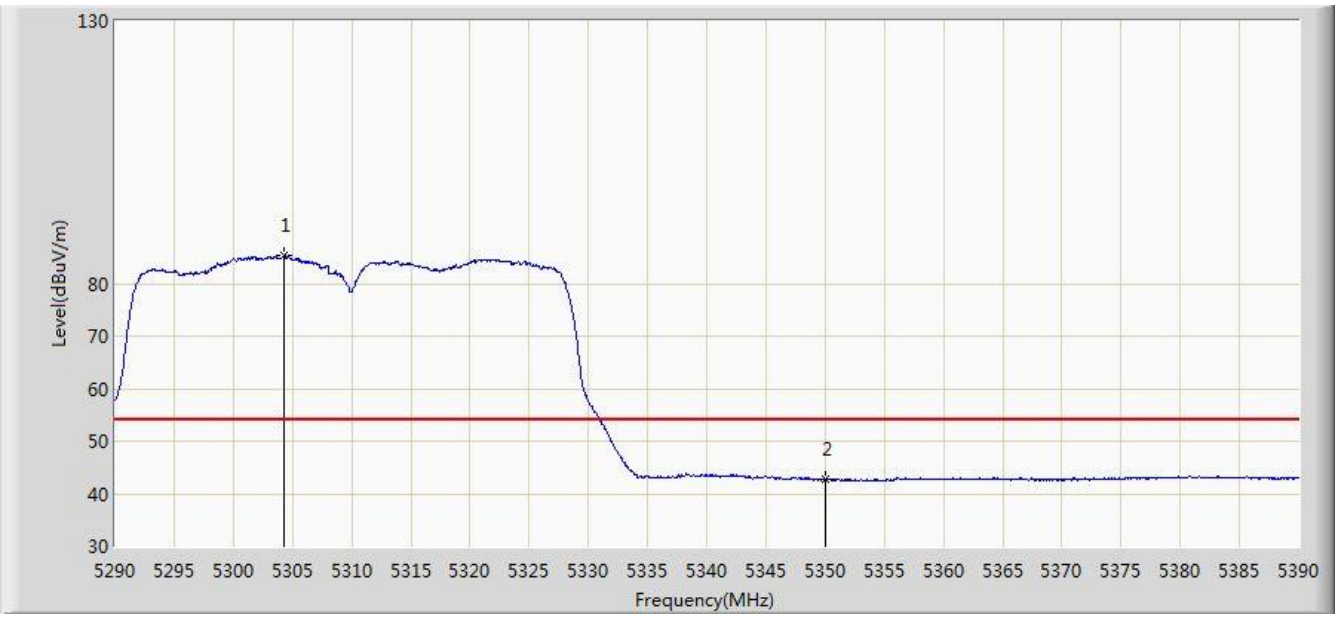


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5455.900 | 56.973 | 53.917 | -17.027 | 74.000 | 3.056 | PK |
| 2 | | | 5460.000 | 55.011 | 51.818 | -18.989 | 74.000 | 3.194 | PK |
| 3 | | | 5463.800 | 56.882 | 53.561 | -17.118 | 74.000 | 3.321 | PK |
| 4 | | | 5470.000 | 56.029 | 52.500 | -17.971 | 74.000 | 3.529 | PK |
| 5 | | * | 5525.650 | 102.723 | 99.267 | N/A | N/A | 3.456 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:34 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 | |

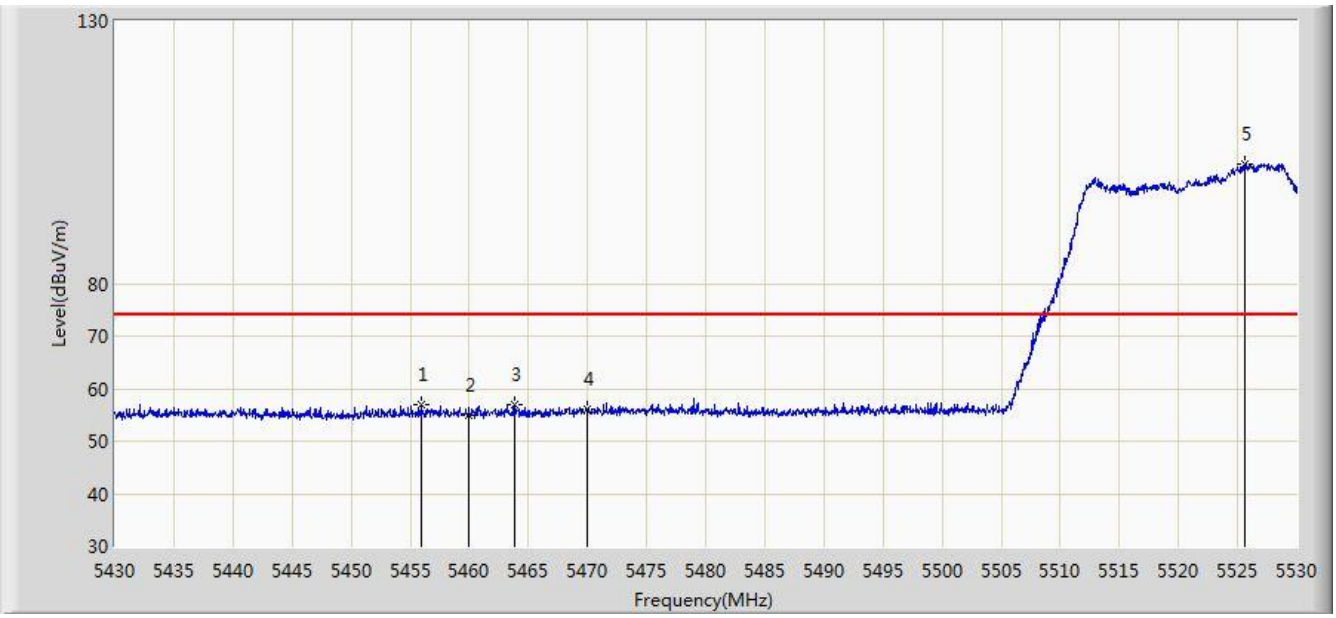


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.492 | 40.299 | -10.508 | 54.000 | 3.194 | AV |
| 2 | | * | 5528.000 | 93.421 | 89.987 | N/A | N/A | 3.433 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:35 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 | |

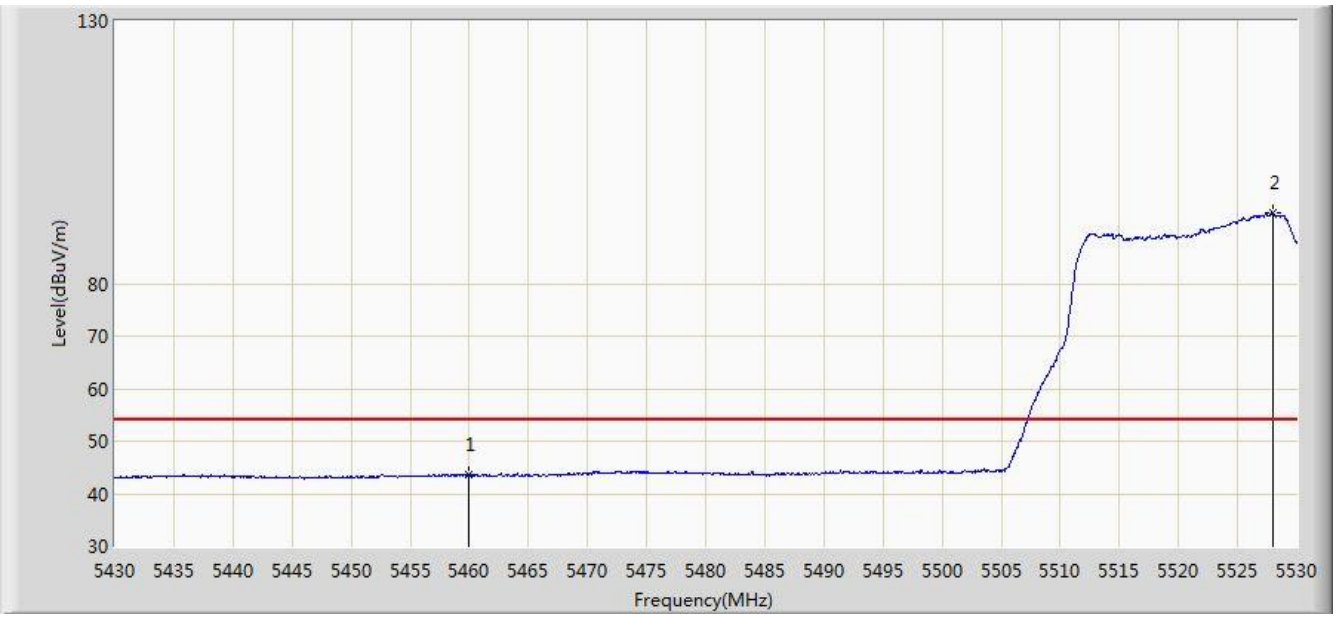


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5447.500 | 56.653 | 53.588 | -17.347 | 74.000 | 3.064 | PK |
| 2 | | | 5460.000 | 54.733 | 51.540 | -19.267 | 74.000 | 3.194 | PK |
| 3 | | | 5465.450 | 56.879 | 53.503 | -17.121 | 74.000 | 3.377 | PK |
| 4 | | | 5470.000 | 54.855 | 51.326 | -19.145 | 74.000 | 3.529 | PK |
| 5 | | * | 5526.000 | 95.564 | 92.112 | N/A | N/A | 3.452 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:38 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 | |

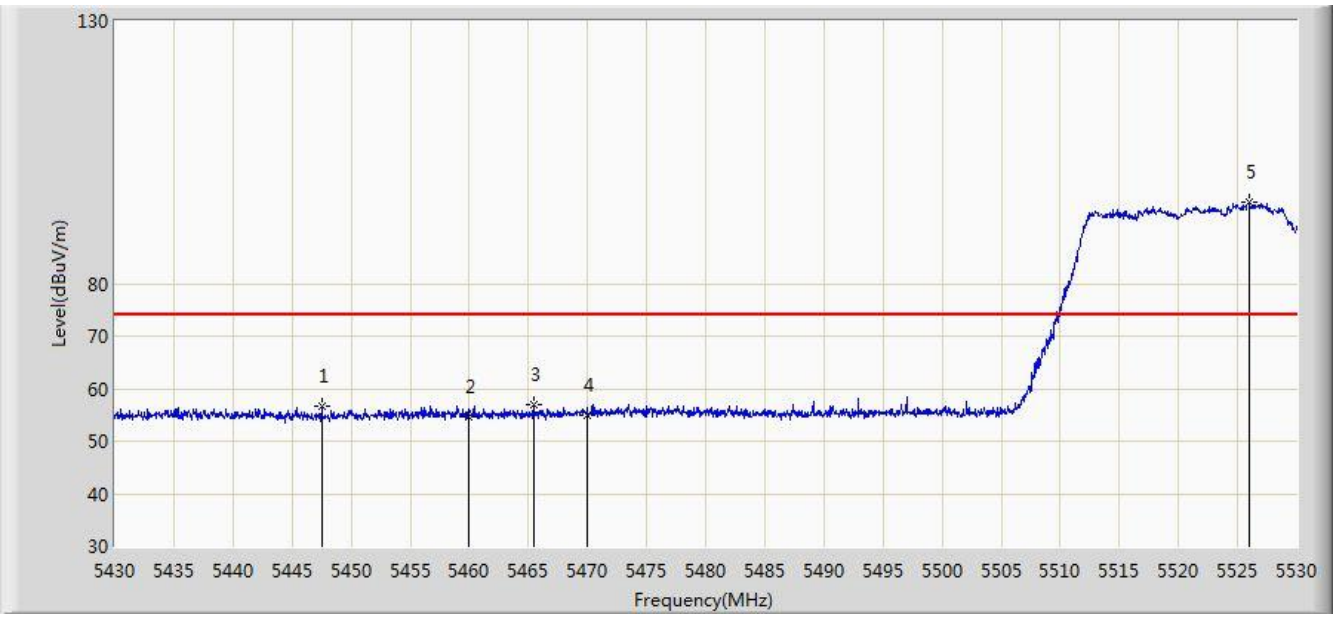


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.320 | 40.127 | -10.680 | 54.000 | 3.194 | AV |
| 2 | | * | 5526.300 | 85.432 | 81.982 | N/A | N/A | 3.450 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:40 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 | |

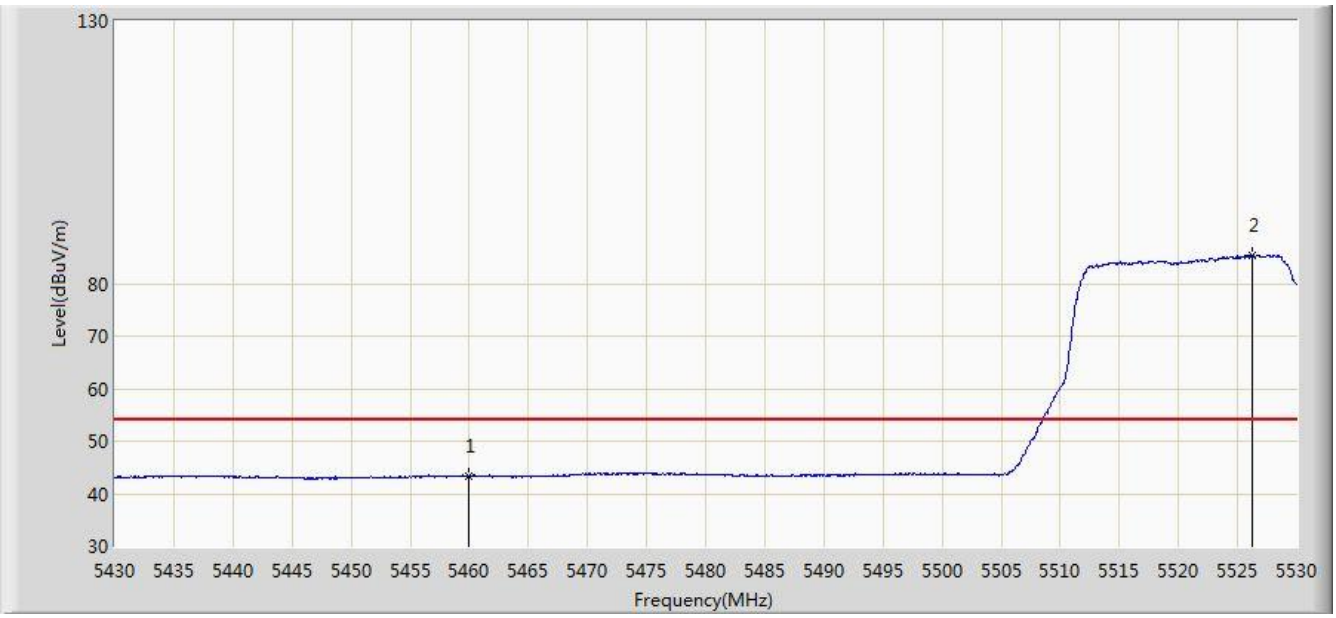


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5675.000 | 102.425 | 98.555 | N/A | N/A | 3.870 | PK |
| 2 | | | 5725.000 | 55.708 | 51.602 | -18.292 | 74.000 | 4.105 | PK |
| 3 | | | 5731.300 | 57.948 | 53.684 | -16.052 | 74.000 | 4.264 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:43 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 | |

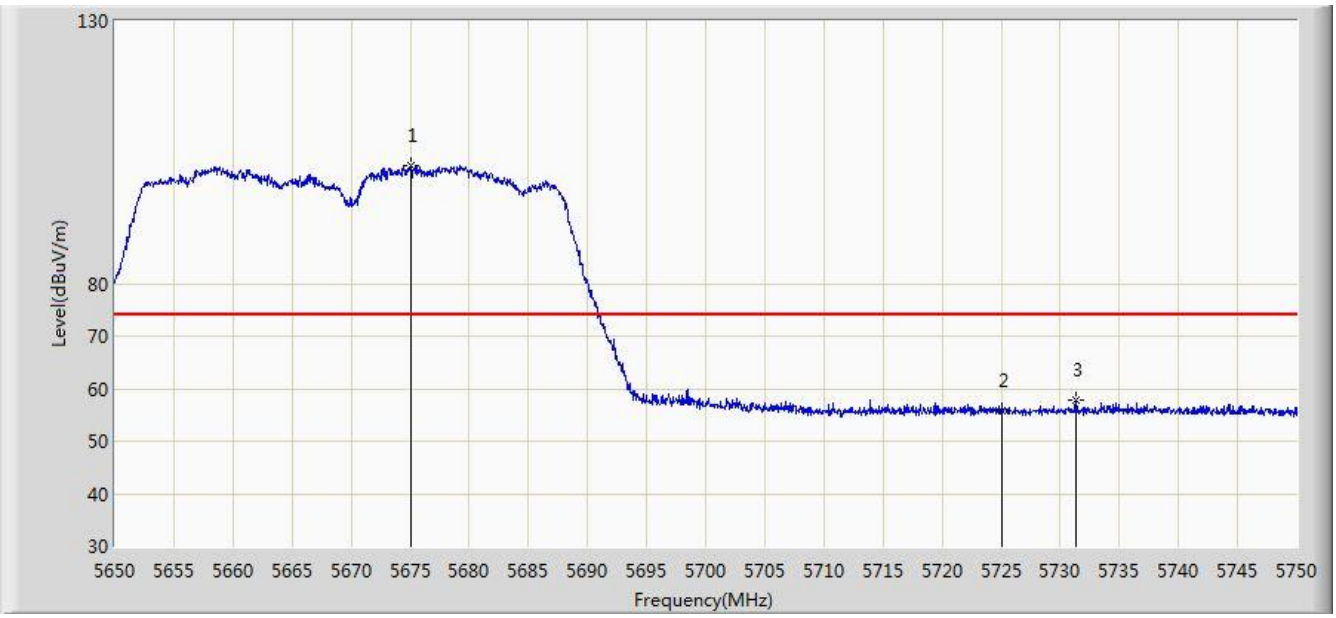


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5659.100 | 92.361 | 88.757 | N/A | N/A | 3.605 | AV |
| 2 | | | 5725.000 | 44.062 | 39.956 | -9.938 | 54.000 | 4.105 | AV |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:44 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 | |

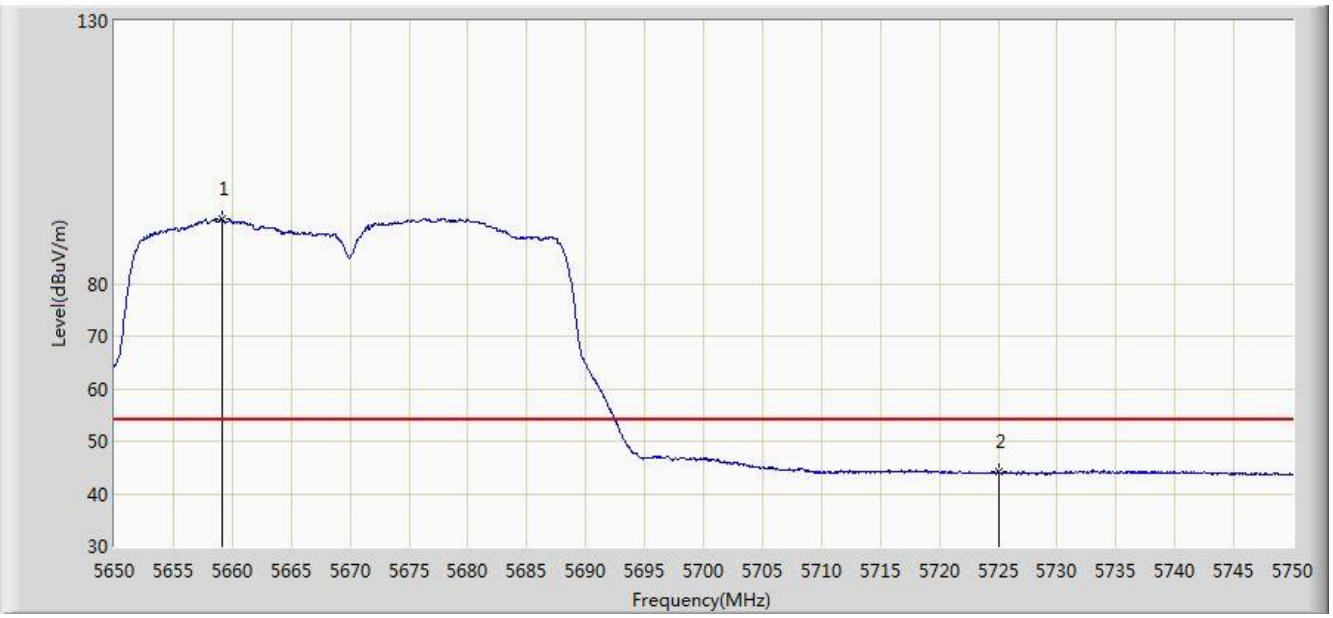


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5673.250 | 97.689 | 93.865 | N/A | N/A | 3.824 | PK |
| 2 | | | 5725.000 | 55.577 | 51.471 | -18.423 | 74.000 | 4.105 | PK |
| 3 | | | 5744.450 | 57.617 | 53.347 | -16.383 | 74.000 | 4.269 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:46 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 | |

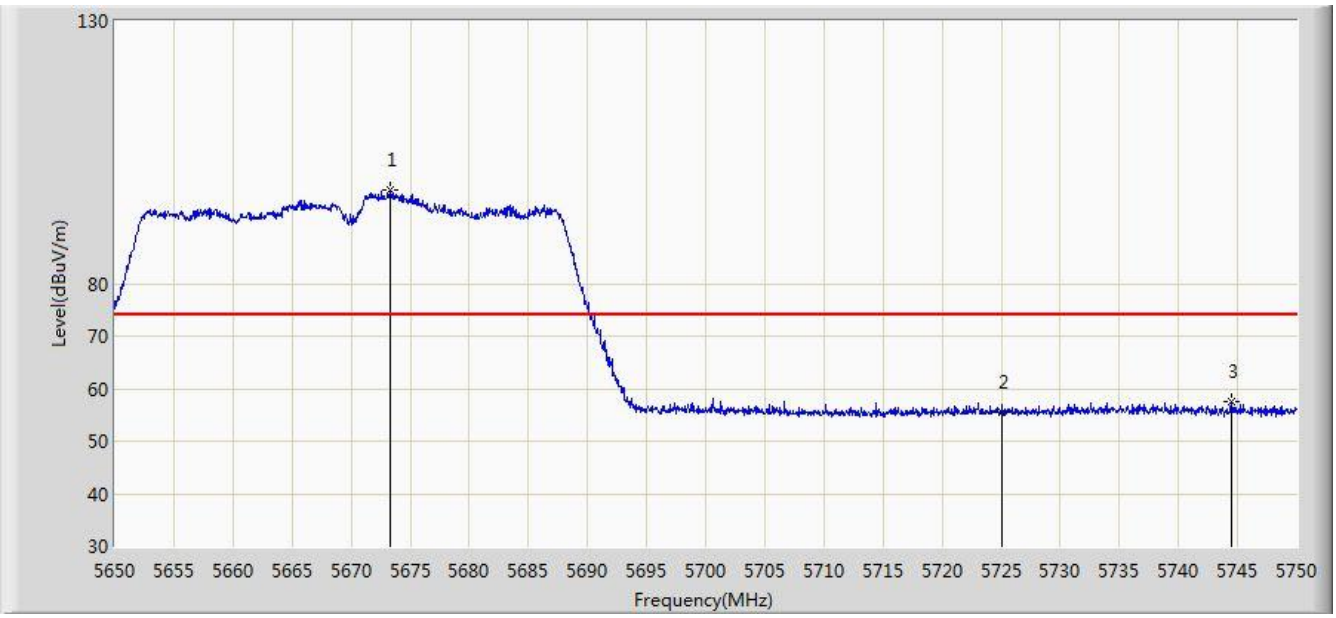


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5672.350 | 87.310 | 83.510 | N/A | N/A | 3.800 | AV |
| 2 | | | 5725.000 | 43.419 | 39.313 | -10.581 | 54.000 | 4.105 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:48 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 | |

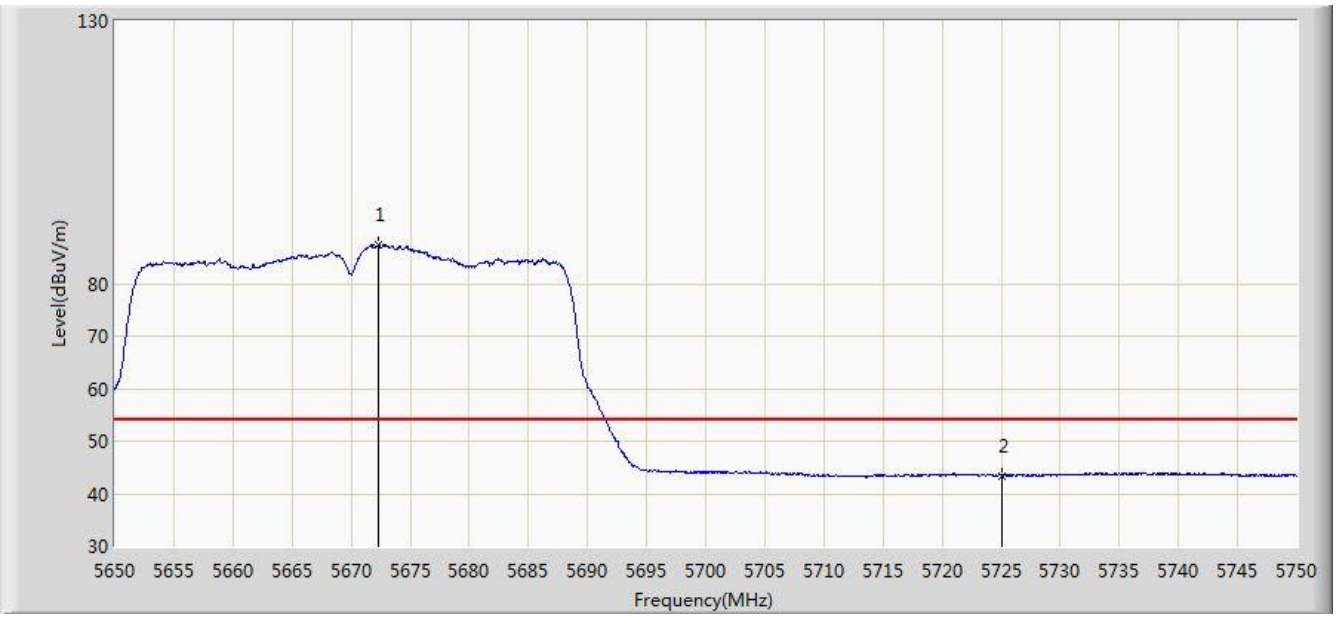


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5629.050 | 57.607 | 54.015 | -10.593 | 68.200 | 3.593 | PK |
| 2 | | | 5650.000 | 55.633 | 51.830 | -12.567 | 68.200 | 3.803 | PK |
| 3 | | | 5695.812 | 58.452 | 54.469 | -43.661 | 102.113 | 3.983 | PK |
| 4 | | | 5700.000 | 55.598 | 51.658 | -49.602 | 105.200 | 3.940 | PK |
| 5 | | | 5716.812 | 56.949 | 53.045 | -52.960 | 109.909 | 3.905 | PK |
| 6 | | | 5720.000 | 56.259 | 52.277 | -54.541 | 110.800 | 3.982 | PK |
| 7 | | | 5723.900 | 57.865 | 53.787 | -61.827 | 119.693 | 4.079 | PK |
| 8 | | | 5725.000 | 56.304 | 52.198 | -65.896 | 122.200 | 4.105 | PK |
| 9 | | | 5762.487 | 101.793 | 97.350 | N/A | N/A | 4.443 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:52 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 | |

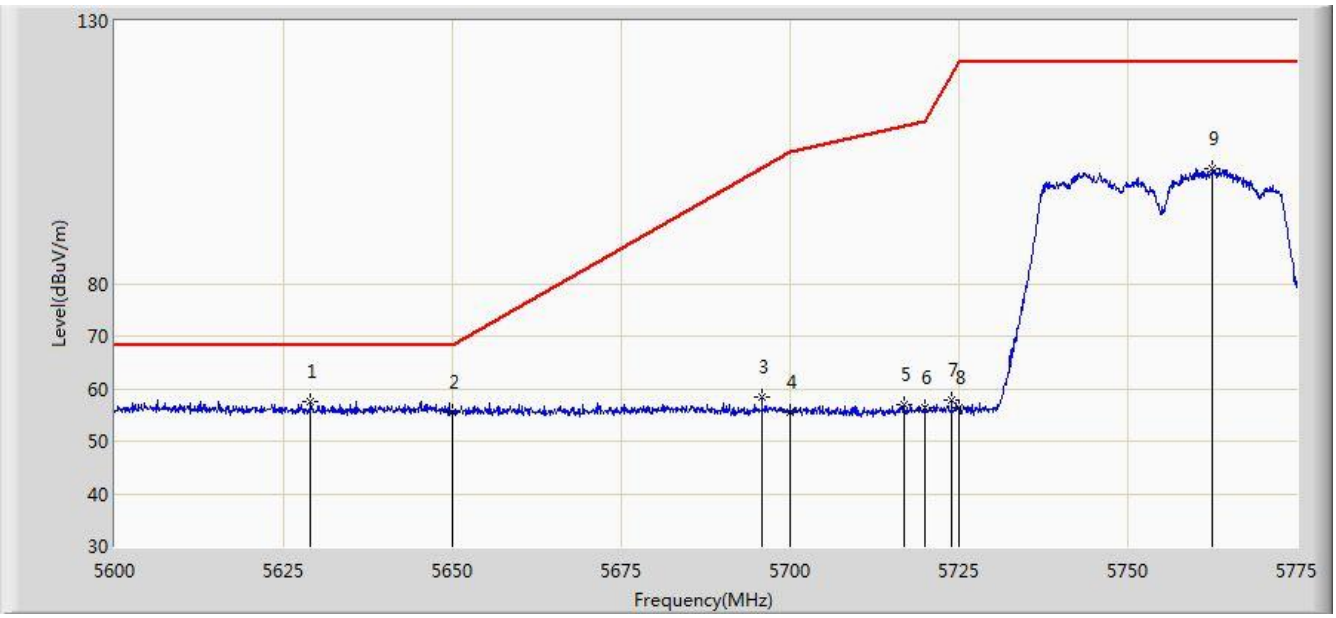


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5644.187 | 57.535 | 53.632 | -10.665 | 68.200 | 3.903 | PK |
| 2 | | | 5650.000 | 55.014 | 51.211 | -13.186 | 68.200 | 3.803 | PK |
| 3 | | | 5678.138 | 57.178 | 53.218 | -31.884 | 89.062 | 3.960 | PK |
| 4 | | | 5700.000 | 55.306 | 51.366 | -49.894 | 105.200 | 3.940 | PK |
| 5 | | | 5713.400 | 56.641 | 52.783 | -52.313 | 108.954 | 3.858 | PK |
| 6 | | | 5720.000 | 55.137 | 51.155 | -55.663 | 110.800 | 3.982 | PK |
| 7 | | | 5722.763 | 56.194 | 52.144 | -60.906 | 117.101 | 4.050 | PK |
| 8 | | | 5725.000 | 55.665 | 51.559 | -66.535 | 122.200 | 4.105 | PK |
| 9 | | | 5756.800 | 95.528 | 91.143 | N/A | N/A | 4.385 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:54 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 | |

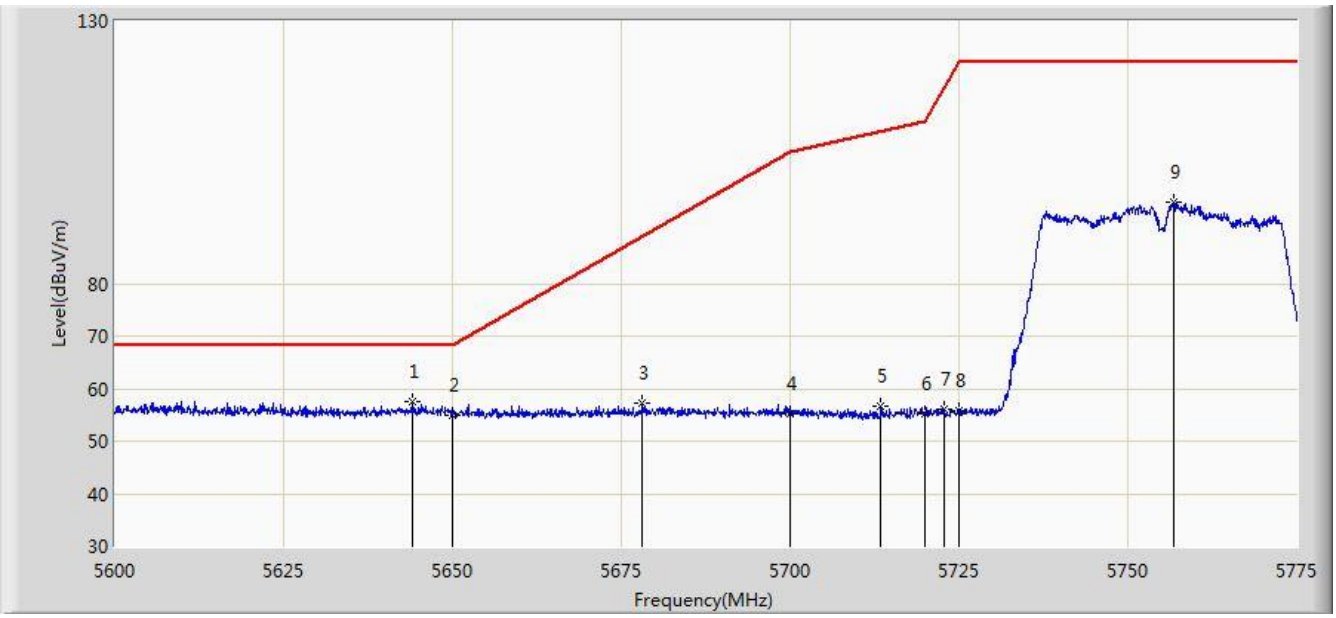


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5792.212 | 102.126 | 97.553 | N/A | N/A | 4.573 | PK |
| 2 | | | 5850.000 | 56.724 | 51.729 | -65.476 | 122.200 | 4.995 | PK |
| 3 | | | 5852.737 | 56.953 | 51.962 | -59.005 | 115.958 | 4.991 | PK |
| 4 | | | 5855.000 | 56.030 | 51.042 | -54.770 | 110.800 | 4.987 | PK |
| 5 | | | 5866.462 | 57.558 | 52.581 | -50.030 | 107.588 | 4.977 | PK |
| 6 | | | 5875.000 | 55.829 | 50.822 | -49.371 | 105.200 | 5.008 | PK |
| 7 | | | 5908.312 | 57.720 | 52.532 | -22.794 | 80.514 | 5.188 | PK |
| 8 | | | 5925.000 | 55.904 | 50.752 | -12.296 | 68.200 | 5.152 | PK |
| 9 | | * | 5933.288 | 58.106 | 52.918 | -10.094 | 68.200 | 5.189 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:56 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 | |

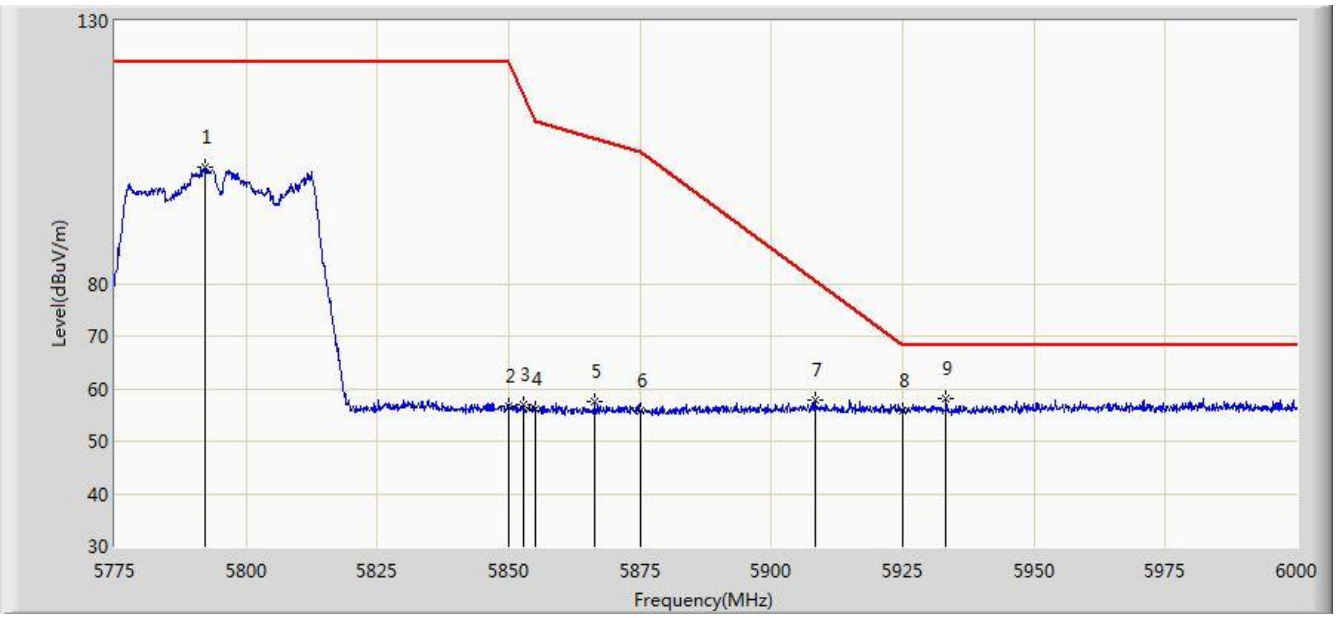


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5804.138 | 94.335 | 89.672 | N/A | N/A | 4.664 | PK |
| 2 | | | 5850.000 | 56.479 | 51.484 | -65.721 | 122.200 | 4.995 | PK |
| 3 | | | 5852.062 | 56.557 | 51.565 | -60.940 | 117.497 | 4.992 | PK |
| 4 | | | 5855.000 | 55.626 | 50.638 | -55.174 | 110.800 | 4.987 | PK |
| 5 | | | 5868.487 | 57.088 | 52.110 | -49.934 | 107.022 | 4.978 | PK |
| 6 | | | 5875.000 | 55.670 | 50.663 | -49.530 | 105.200 | 5.008 | PK |
| 7 | | | 5901.675 | 58.234 | 53.075 | -27.188 | 85.421 | 5.159 | PK |
| 8 | | | 5925.000 | 56.459 | 51.307 | -11.741 | 68.200 | 5.152 | PK |
| 9 | | * | 5932.163 | 57.797 | 52.606 | -10.403 | 68.200 | 5.191 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 19:59 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 | |

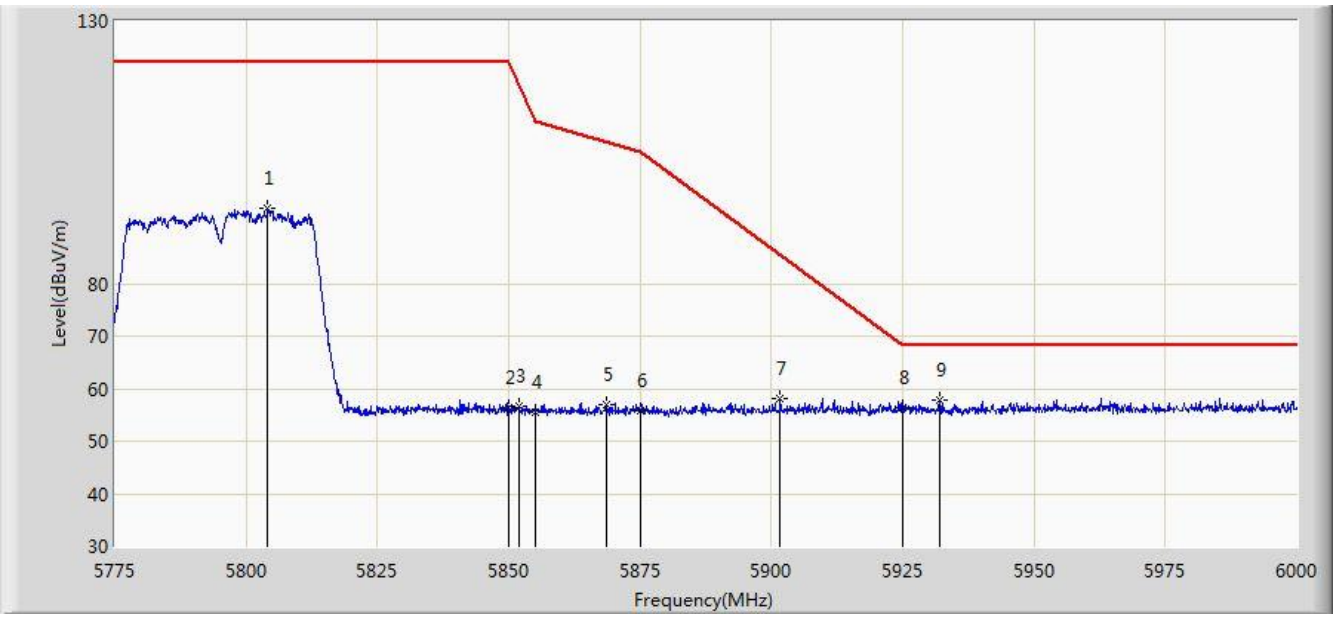


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5127.700 | 57.552 | 54.390 | -16.448 | 74.000 | 3.161 | PK |
| 2 | | | 5150.000 | 55.849 | 52.779 | -18.151 | 74.000 | 3.069 | PK |
| 3 | | * | 5207.875 | 99.615 | 96.823 | N/A | N/A | 2.792 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:04 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 | |

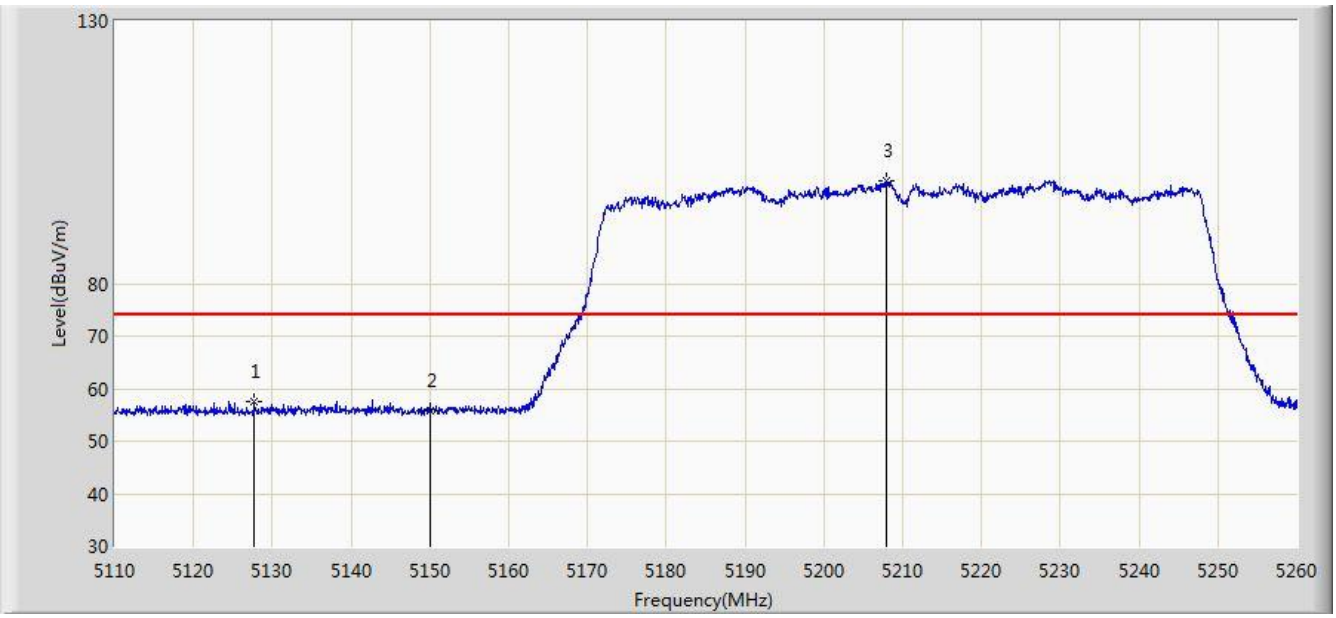


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 44.243 | 41.173 | -9.757 | 54.000 | 3.069 | AV |
| 2 | | * | 5229.400 | 89.376 | 86.571 | N/A | N/A | 2.805 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:06 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 | |

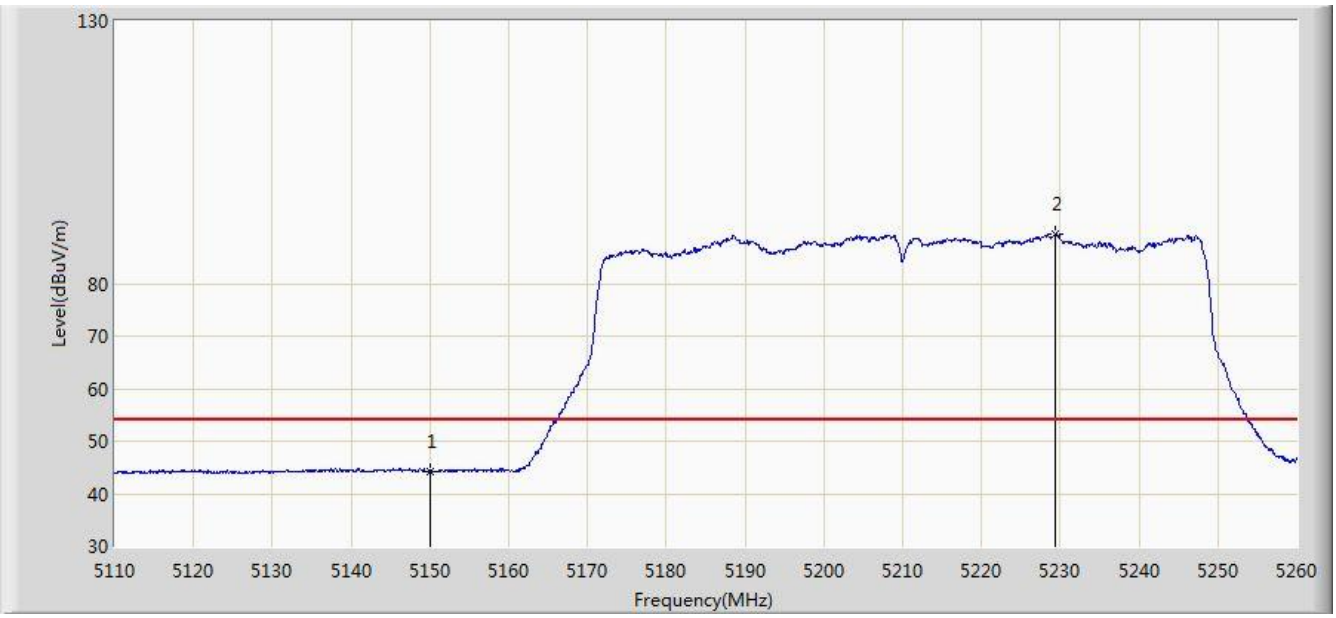


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5116.225 | 57.705 | 54.540 | -16.295 | 74.000 | 3.164 | PK |
| 2 | | | 5150.000 | 55.548 | 52.478 | -18.452 | 74.000 | 3.069 | PK |
| 3 | | * | 5213.200 | 94.982 | 92.183 | N/A | N/A | 2.799 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:08 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 | |

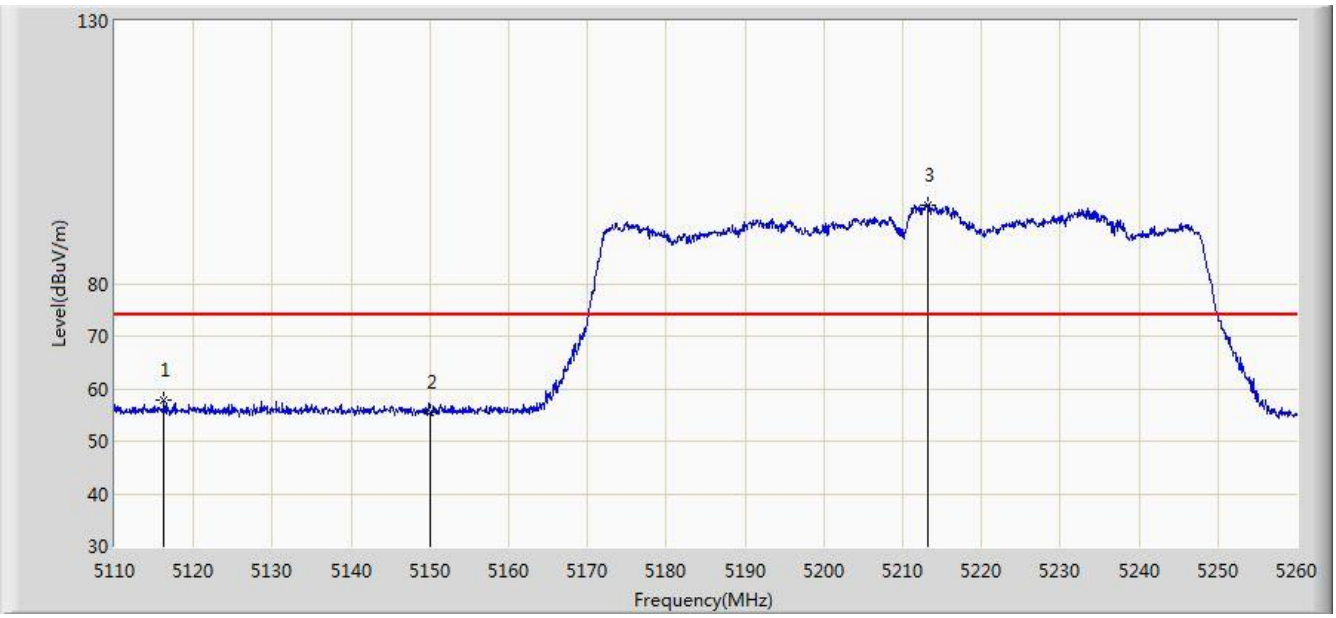


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5150.000 | 43.778 | 40.708 | -10.222 | 54.000 | 3.069 | AV |
| 2 | | * | 5213.275 | 85.225 | 82.425 | N/A | N/A | 2.800 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:10 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 | |

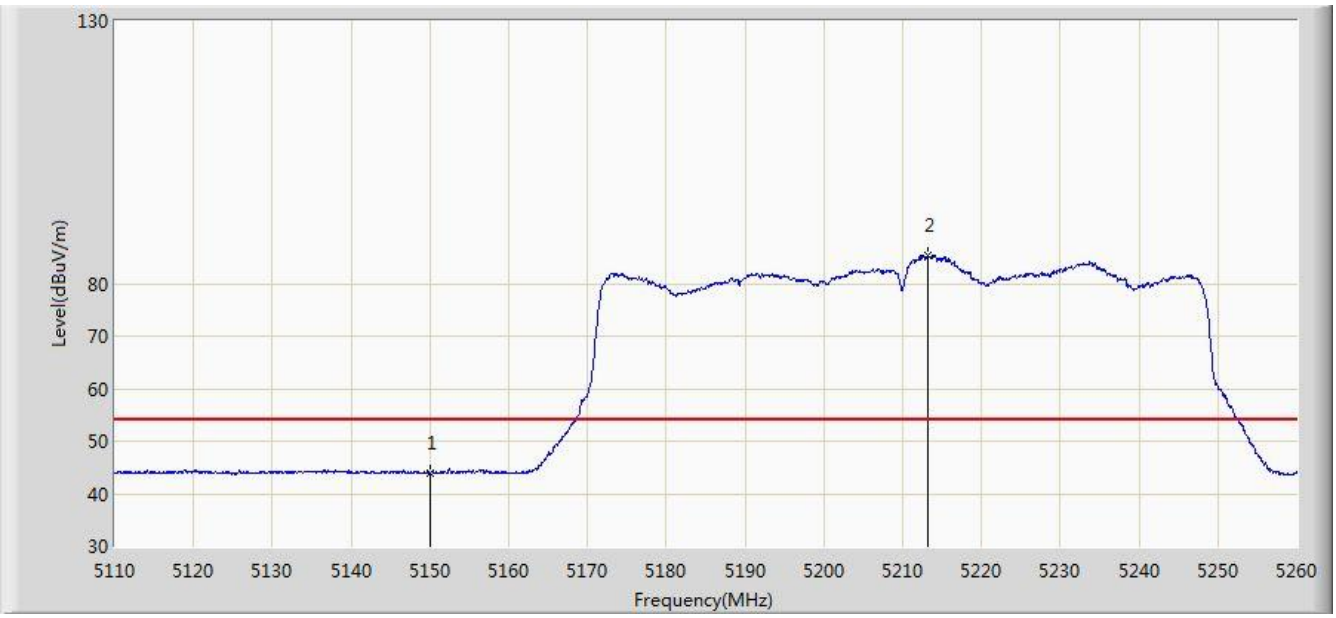


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5297.420 | 98.534 | 95.895 | N/A | N/A | 2.639 | PK |
| 2 | | | 5350.000 | 56.058 | 53.361 | -17.942 | 74.000 | 2.697 | PK |
| 3 | | | 5409.950 | 58.290 | 55.165 | -15.710 | 74.000 | 3.125 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:11 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 | |

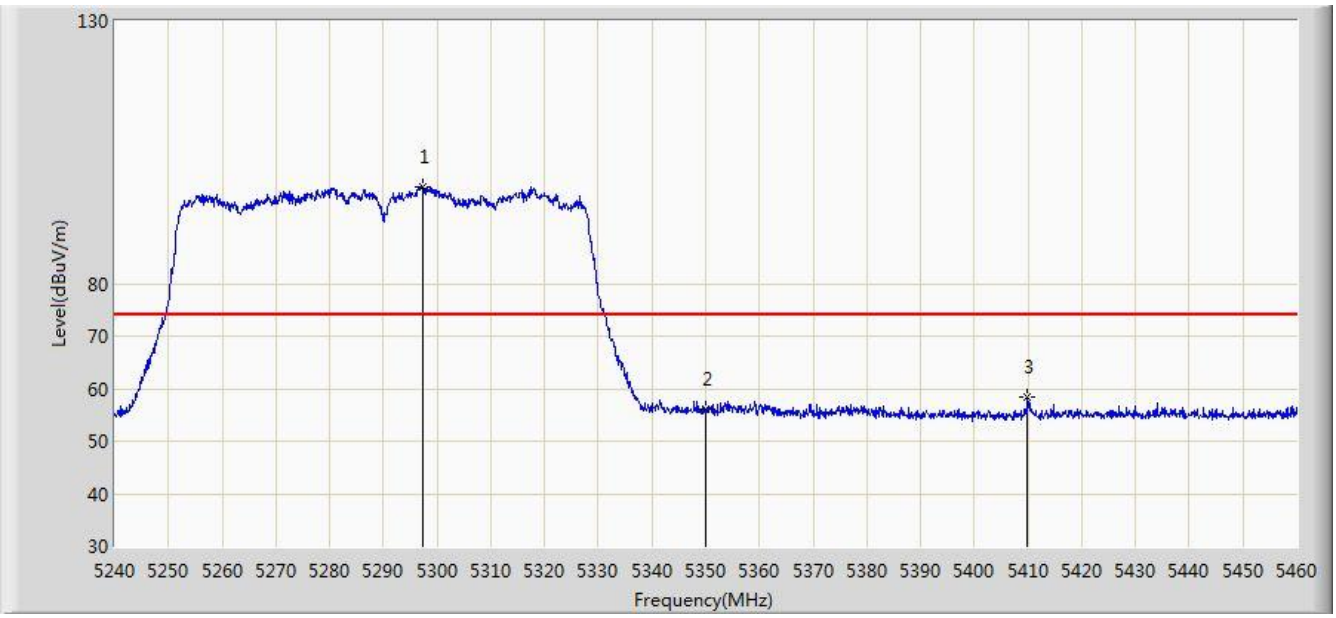


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5298.630 | 88.679 | 86.047 | N/A | N/A | 2.632 | AV |
| 2 | | | 5350.000 | 45.641 | 42.944 | -8.359 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 | |

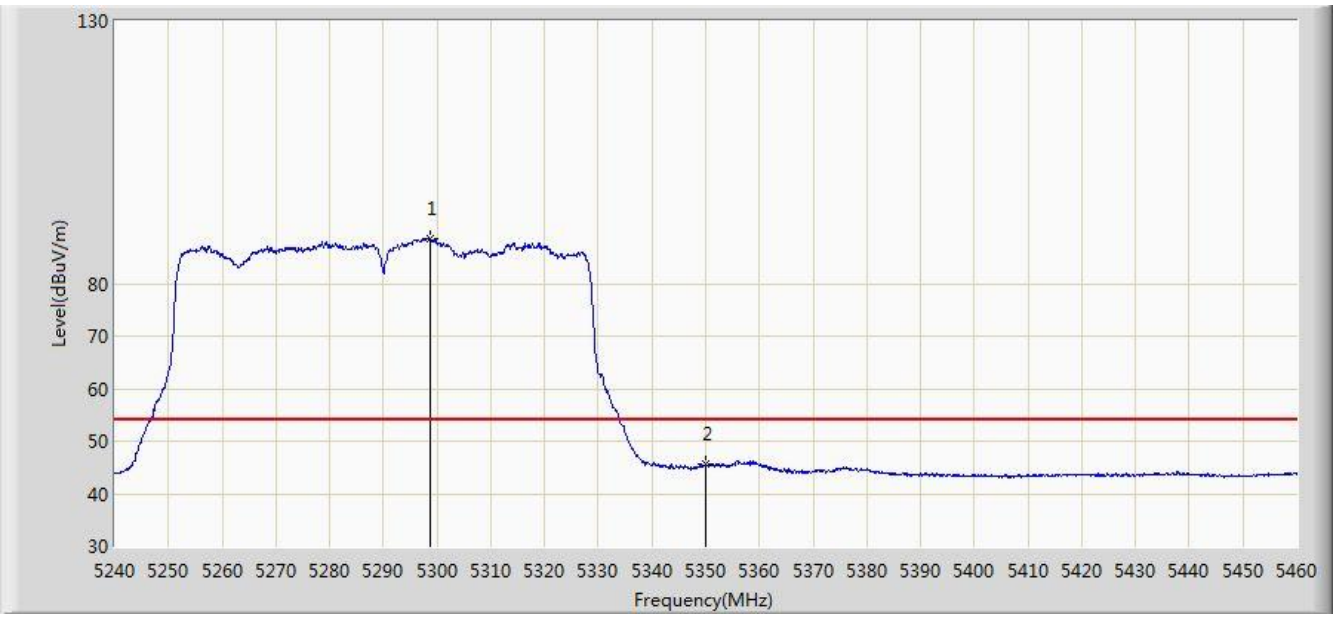


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5284.440 | 93.201 | 90.511 | N/A | N/A | 2.690 | PK |
| 2 | | | 5350.000 | 54.458 | 51.761 | -19.542 | 74.000 | 2.697 | PK |
| 3 | | | 5426.230 | 57.312 | 54.002 | -16.688 | 74.000 | 3.310 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:15 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 | |

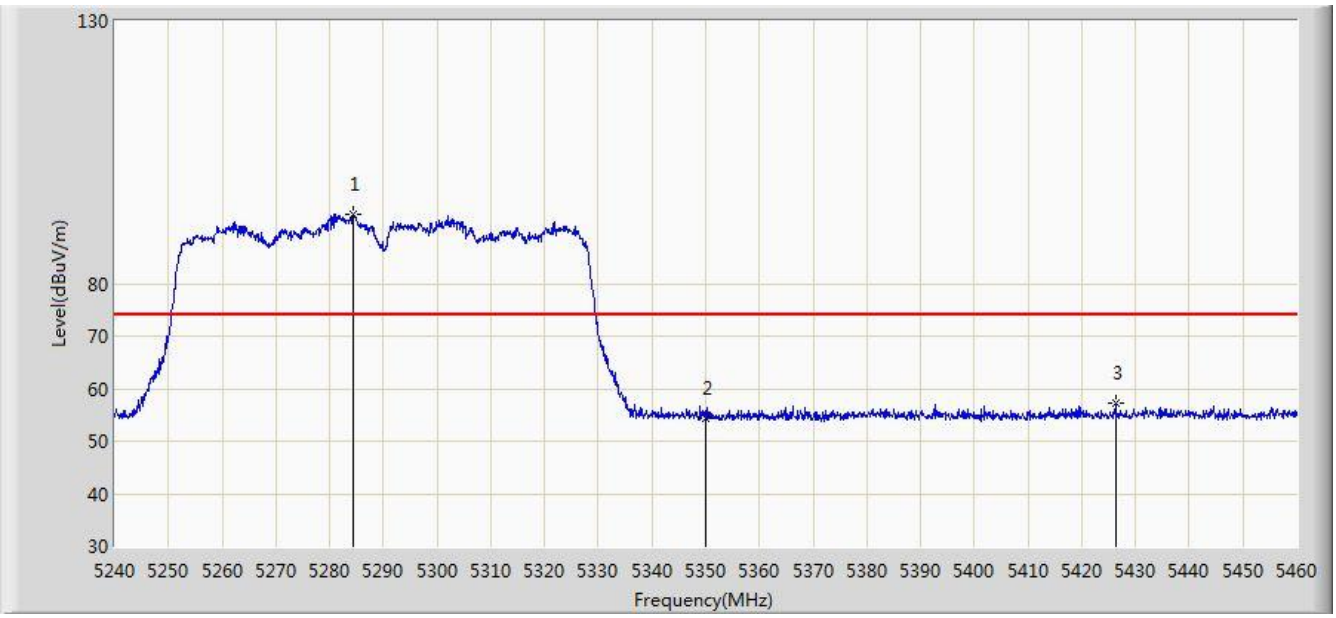


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5283.670 | 83.513 | 80.822 | N/A | N/A | 2.691 | AV |
| 2 | | | 5350.000 | 43.737 | 41.040 | -10.263 | 54.000 | 2.697 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:17 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 | |

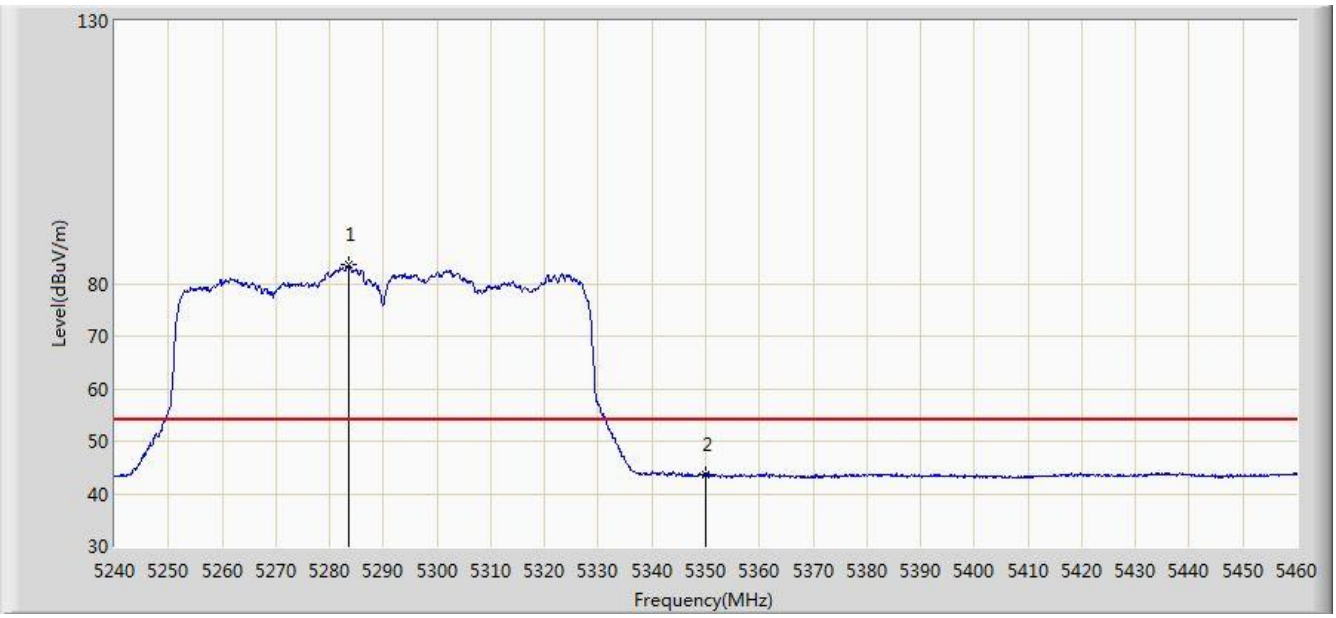


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5410.030 | 56.771 | 53.644 | -17.229 | 74.000 | 3.127 | PK |
| 2 | | | 5460.000 | 55.172 | 51.979 | -18.828 | 74.000 | 3.194 | PK |
| 3 | | | 5468.910 | 57.226 | 53.734 | -16.774 | 74.000 | 3.493 | PK |
| 4 | | | 5470.000 | 55.569 | 52.040 | -18.431 | 74.000 | 3.529 | PK |
| 5 | | * | 5527.790 | 100.091 | 96.655 | N/A | N/A | 3.436 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:19 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 | |

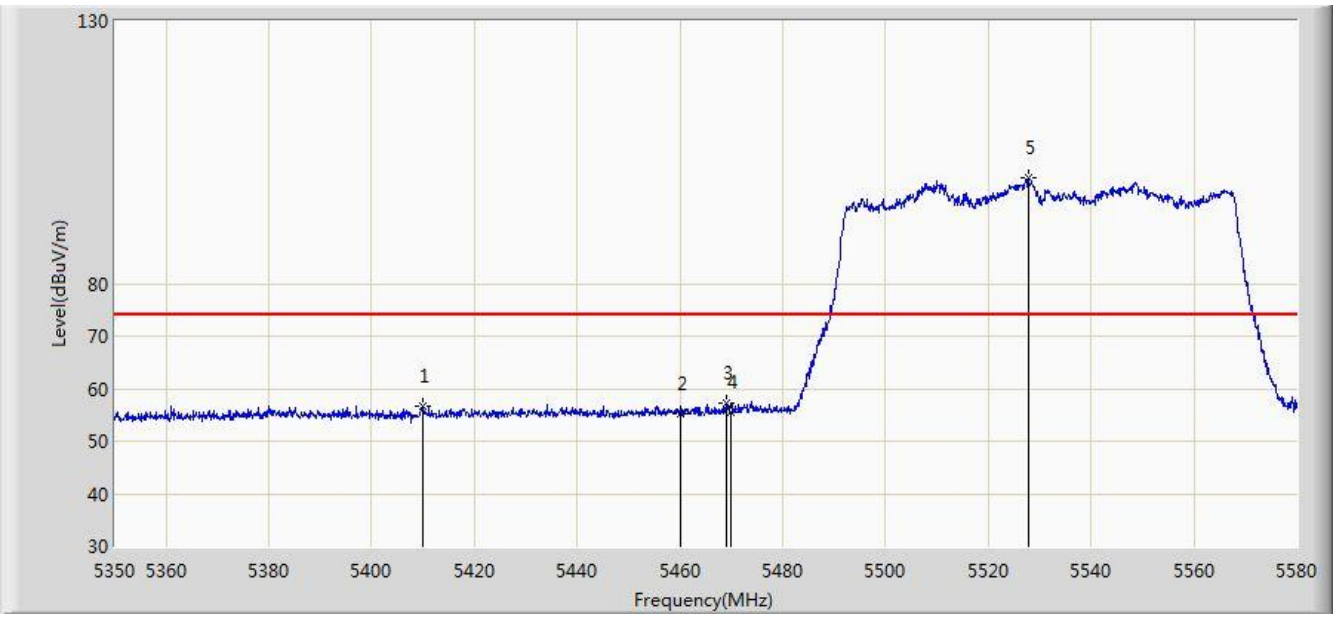


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.991 | 40.798 | -10.009 | 54.000 | 3.194 | AV |
| 2 | | * | 5508.355 | 89.712 | 86.565 | N/A | N/A | 3.147 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:20 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 | |

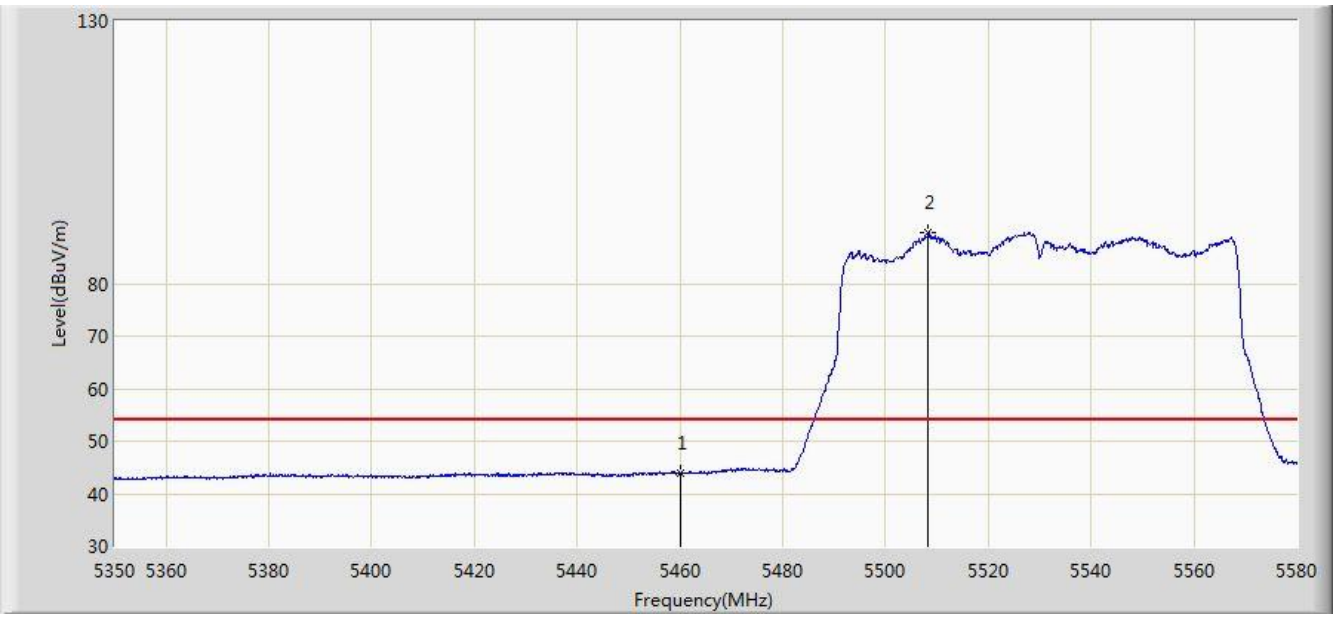


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5421.530 | 58.248 | 54.956 | -15.752 | 74.000 | 3.292 | PK |
| 2 | | | 5460.000 | 55.223 | 52.030 | -18.777 | 74.000 | 3.194 | PK |
| 3 | | | 5461.665 | 56.768 | 53.519 | -17.232 | 74.000 | 3.249 | PK |
| 4 | | | 5470.000 | 55.326 | 51.797 | -18.674 | 74.000 | 3.529 | PK |
| 5 | | * | 5536.990 | 93.247 | 89.898 | N/A | N/A | 3.349 | PK |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:22 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 | |

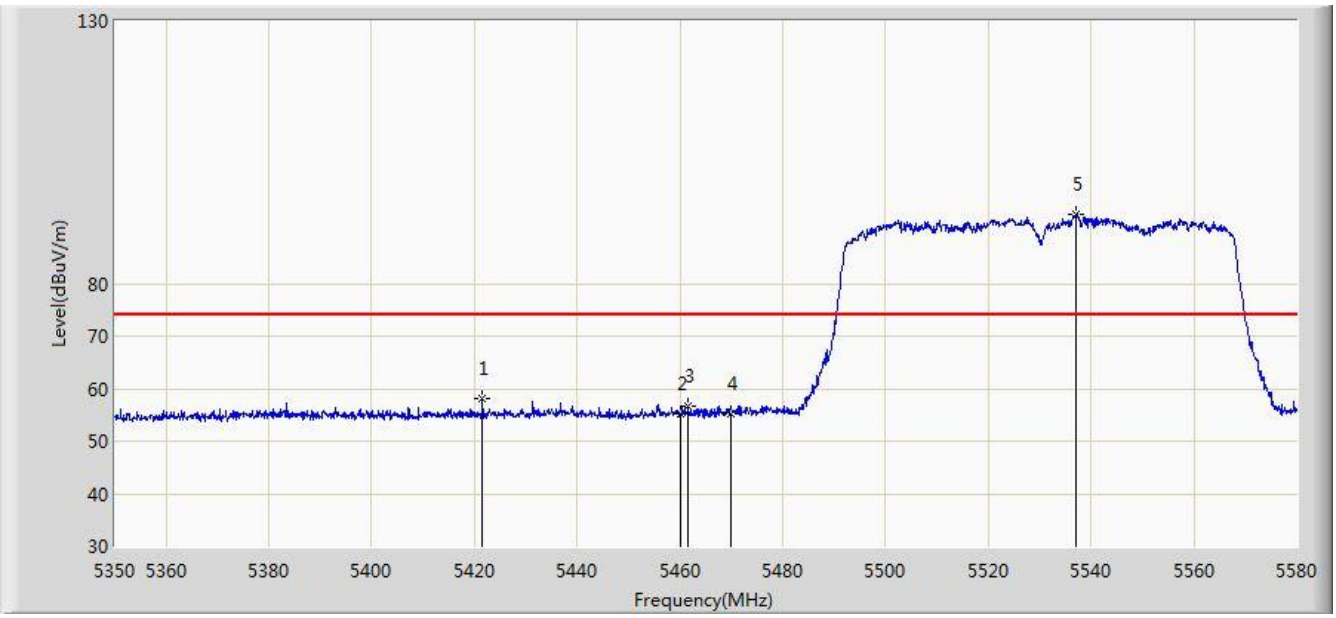


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | | 5460.000 | 43.724 | 40.531 | -10.276 | 54.000 | 3.194 | AV |
| 2 | | * | 5536.530 | 83.169 | 79.816 | N/A | N/A | 3.354 | AV |

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:27 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 | |

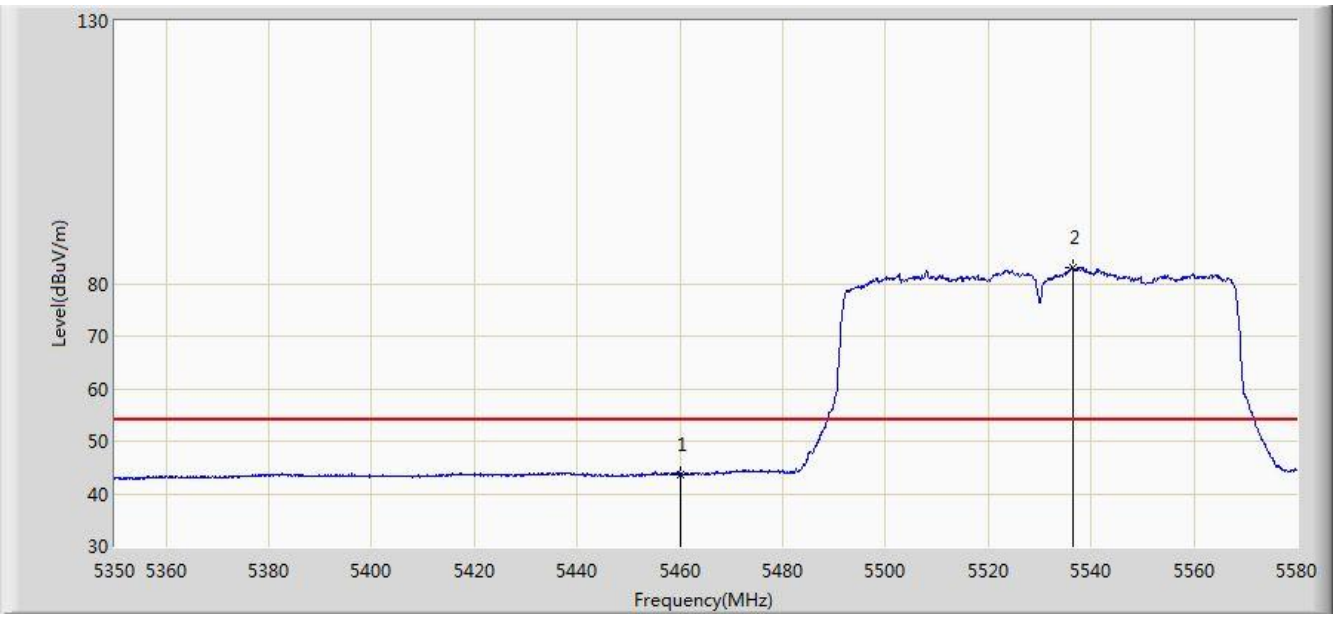


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5612.200 | 57.821 | 54.125 | -10.379 | 68.200 | 3.696 | PK |
| 2 | | | 5650.000 | 55.314 | 51.511 | -12.886 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.204 | 51.264 | -49.996 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 55.484 | 51.502 | -55.316 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 56.168 | 52.062 | -66.032 | 122.200 | 4.105 | PK |
| 6 | | | 5782.000 | 99.006 | 94.564 | N/A | N/A | 4.442 | PK |
| 7 | | | 5850.000 | 56.838 | 51.843 | -65.362 | 122.200 | 4.995 | PK |
| 8 | | | 5855.000 | 55.861 | 50.873 | -54.939 | 110.800 | 4.987 | PK |
| 9 | | | 5875.000 | 55.511 | 50.504 | -49.689 | 105.200 | 5.008 | PK |
| 10 | | | 5925.000 | 56.469 | 51.317 | -11.731 | 68.200 | 5.152 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|---|
| Site: AC2 | Time: 2017/12/08 - 20:31 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Snake Ni |
| Probe: BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: VR All-In-One Headset | Power: By Battery |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 | |

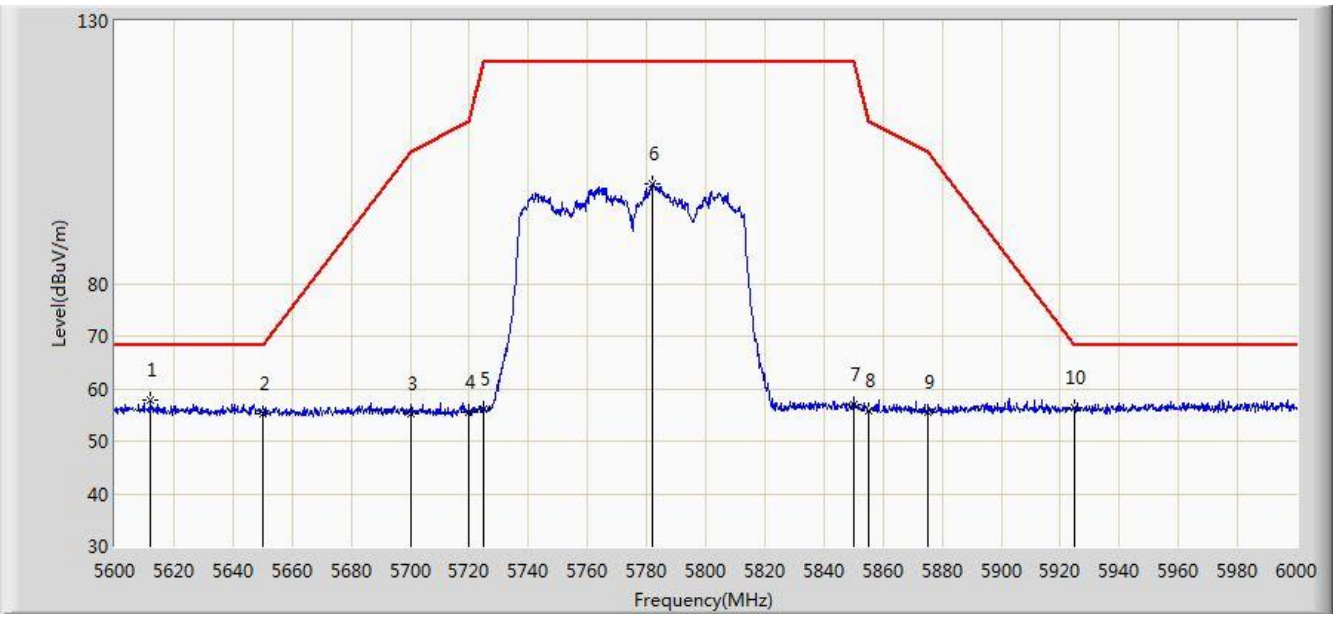


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 5627.200 | 57.180 | 53.619 | -11.020 | 68.200 | 3.561 | PK |
| 2 | | | 5650.000 | 54.927 | 51.124 | -13.273 | 68.200 | 3.803 | PK |
| 3 | | | 5700.000 | 55.380 | 51.440 | -49.820 | 105.200 | 3.940 | PK |
| 4 | | | 5720.000 | 55.032 | 51.050 | -55.768 | 110.800 | 3.982 | PK |
| 5 | | | 5725.000 | 55.779 | 51.673 | -66.421 | 122.200 | 4.105 | PK |
| 6 | | | 5756.400 | 91.419 | 87.041 | N/A | N/A | 4.378 | PK |
| 7 | | | 5850.000 | 55.635 | 50.640 | -66.565 | 122.200 | 4.995 | PK |
| 8 | | | 5855.000 | 56.076 | 51.088 | -54.724 | 110.800 | 4.987 | PK |
| 9 | | | 5875.000 | 55.122 | 50.115 | -50.078 | 105.200 | 5.008 | PK |
| 10 | | | 5925.000 | 55.839 | 50.687 | -12.361 | 68.200 | 5.152 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

## 7.9. AC Conducted Emissions Measurement
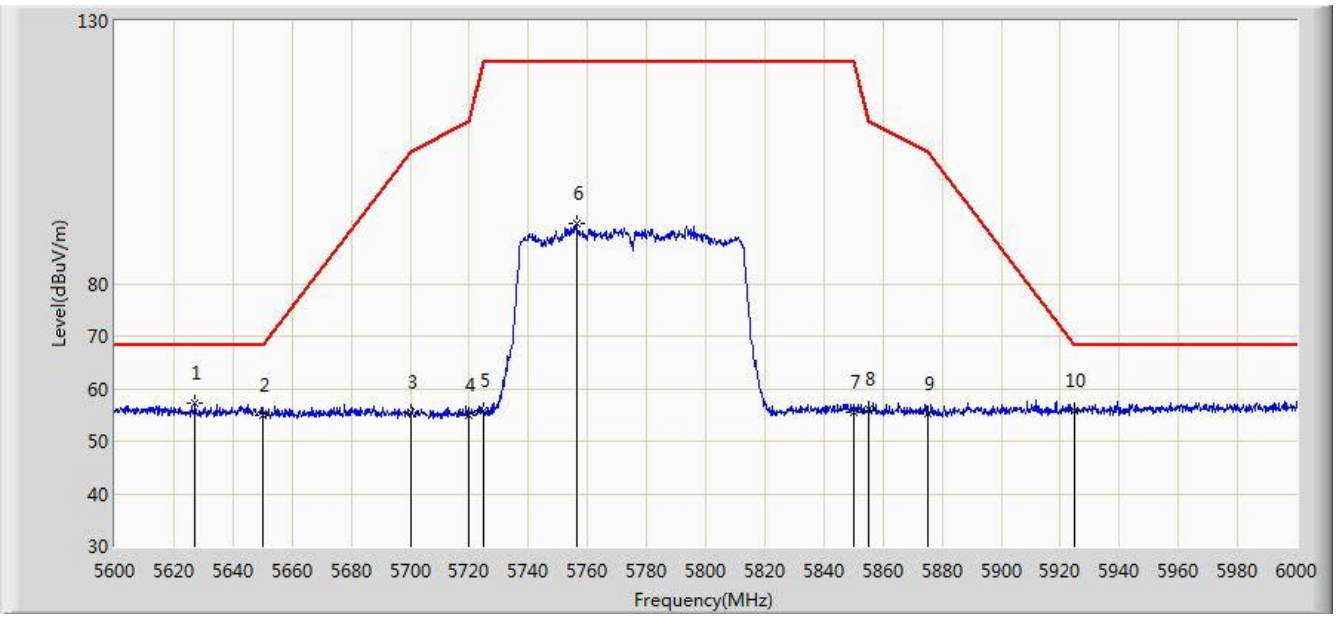
### 7.9.1.Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits | | |
|---|---|---|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 – 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.9.2.Test Setup



### 7.9.3.Test Result

| | |
|---|---|
| Site: SR2 | Time: 2017/12/11 - 09:42 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Polly Zong |
| Probe: ENV216_101683_Filter On | Polarity: Line |
| EUT: VR All-In-One Headset | Power: AC 120V/60Hz |
| Test Mode 1 | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (DBUV) | Reading Level (DBUV) | Over Limit (dB) | Limit (DBUV) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 0.154 | 53.703 | 42.963 | -12.079 | 65.781 | 10.740 | QP |
| 2 | | | 0.154 | 22.917 | 12.178 | -32.864 | 55.781 | 10.740 | AV |
| 3 | | | 0.186 | 51.290 | 41.251 | -12.923 | 64.213 | 10.039 | QP |
| 4 | | | 0.186 | 20.816 | 10.777 | -33.398 | 54.213 | 10.039 | AV |
| 5 | | | 0.414 | 40.173 | 30.076 | -17.395 | 57.568 | 10.097 | QP |
| 6 | | | 0.414 | 20.256 | 10.159 | -27.312 | 47.568 | 10.097 | AV |
| 7 | | | 0.502 | 35.484 | 25.327 | -20.516 | 56.000 | 10.157 | QP |
| 8 | | | 0.502 | 11.164 | 1.007 | -34.836 | 46.000 | 10.157 | AV |
| 9 | | | 0.574 | 32.660 | 22.531 | -23.340 | 56.000 | 10.128 | QP |
| 10 | | | 0.574 | 16.193 | 6.065 | -29.807 | 46.000 | 10.128 | AV |
| 11 | | | 13.478 | 22.065 | 12.006 | -37.935 | 60.000 | 10.058 | QP |
| 12 | | | 13.478 | 10.723 | 0.664 | -39.277 | 50.000 | 10.058 | AV |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

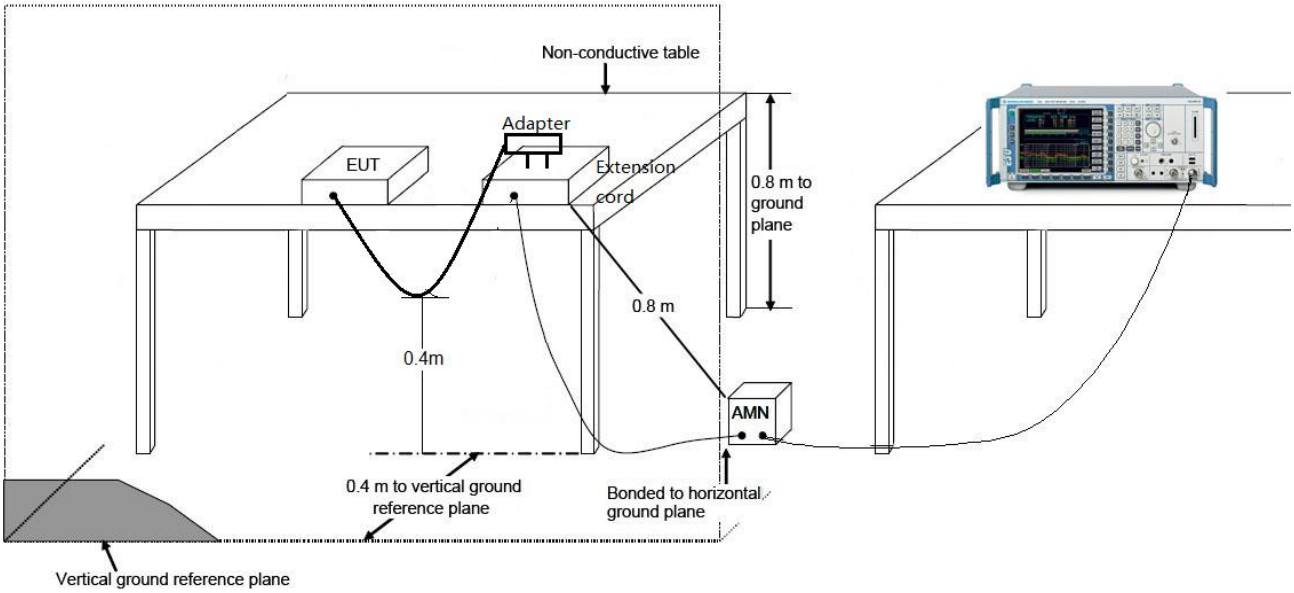Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

| | |
|---|---|
| Site: SR2 | Time: 2017/12/11 - 09:47 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Polly Zong |
| Probe: ENV216_101683_Filter On | Polarity: Neutral |
| EUT: VR All-In-One Headset | Power: AC 120V/60Hz |
| Test Mode 1 | |

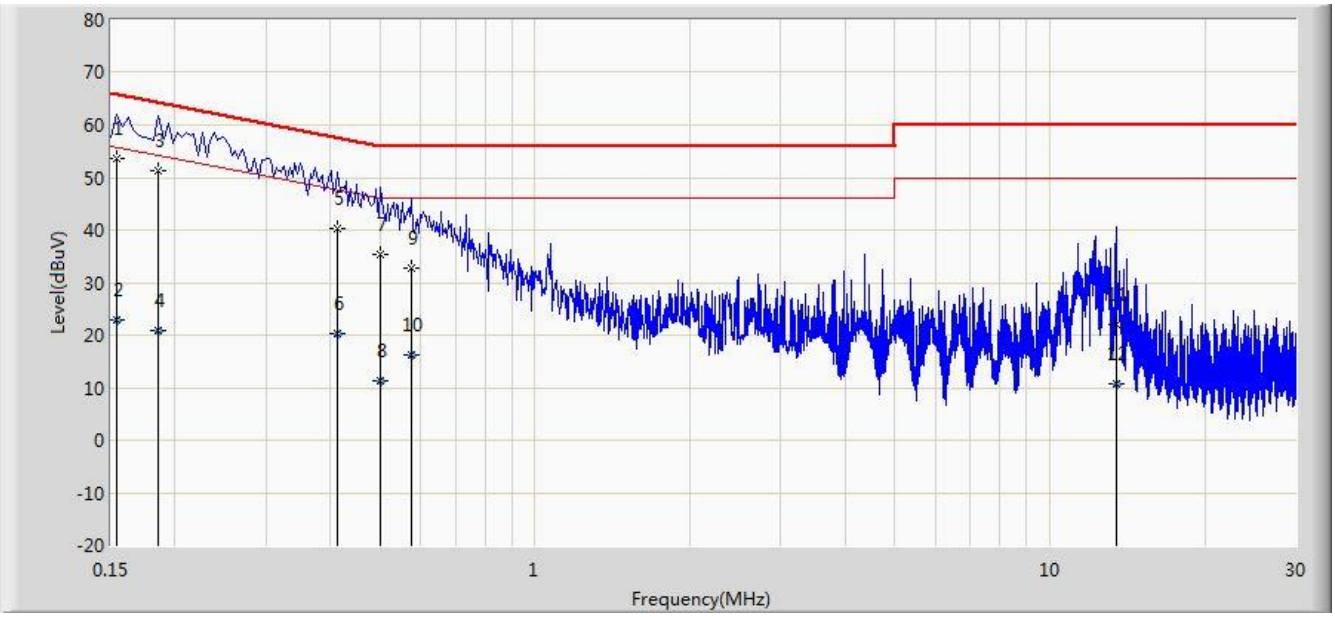


| No | Flag | Mark | Frequency (MHz) | Measure Level (DBUV) | Reading Level (DBUV) | Over Limit (dB) | Limit (DBUV) | Factor (dB) | Type |
|---|---|---|---|---|---|---|---|---|---|
| 1 | | * | 0.186 | 51.156 | 41.121 | -13.058 | 64.213 | 10.035 | QP |
| 2 | | | 0.186 | 21.022 | 10.987 | -33.191 | 54.213 | 10.035 | AV |
| 3 | | | 0.322 | 42.988 | 32.934 | -16.667 | 59.655 | 10.054 | QP |
| 4 | | | 0.322 | 14.165 | 4.111 | -35.490 | 49.655 | 10.054 | AV |
| 5 | | | 0.422 | 38.901 | 28.772 | -18.508 | 57.409 | 10.129 | QP |
| 6 | | | 0.422 | 13.852 | 3.723 | -33.556 | 47.409 | 10.129 | AV |
| 7 | | | 0.478 | 36.045 | 25.874 | -20.329 | 56.374 | 10.170 | QP |
| 8 | | | 0.478 | 10.930 | 0.759 | -35.444 | 46.374 | 10.170 | AV |
| 9 | | | 0.730 | 28.618 | 18.561 | -27.382 | 56.000 | 10.058 | QP |
| 10 | | | 0.730 | 6.187 | -3.870 | -39.813 | 46.000 | 10.058 | AV |
| 11 | | | 13.218 | 24.400 | 14.307 | -35.600 | 60.000 | 10.093 | QP |
| 12 | | | 13.218 | 7.292 | -2.802 | -42.708 | 50.000 | 10.093 | AV |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

# 8. CONCLUSION

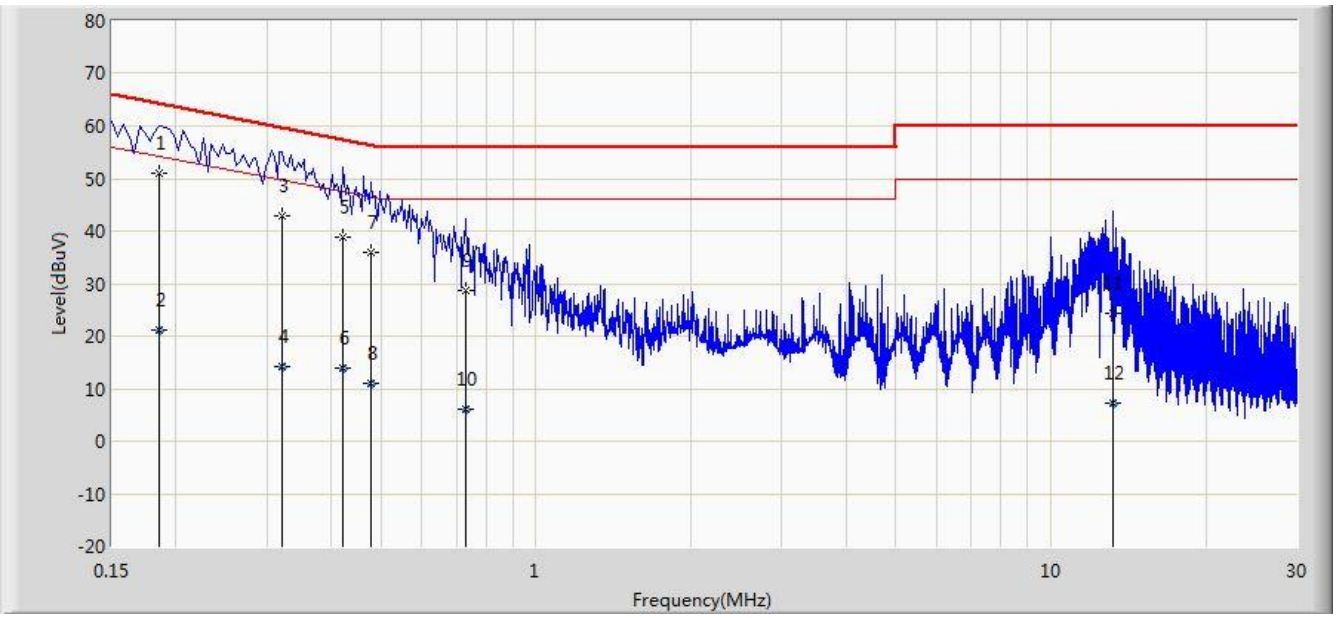The data collected relate only the item(s) tested and show that the **VR All-In-One Headset** is in compliance with Part 15E of the FCC Rules.

The End